

Appendix B _ Radiated Test data and AC Power-Line Conducted Emission

1. Radiated spurious emissions

9 kHz-30 MHz:


- 1. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.
- 2. The all data rate modes had been test, but only worse test data was recorded in the test report.

Below 1GHz:

Note:

All modes have been tested, only worst case(802.11b-2412MHz) mode was recorded in the test report if no any others.


	Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Г	Polarization	Horizontal	Mode	11B-2412

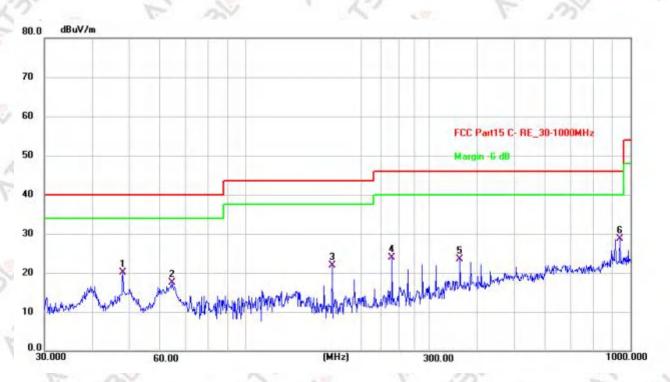

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detecto
1	47.9940	49.05	-28.94	20.11	40.00	-19.89	QP
2	64.4330	47.38	-29.90	17.48	40.00	-22.52	QP
3	167.8242	51.35	-29.49	21.86	43.50	-21.64	QP
4	239.9873	54.55	-30.71	23.84	46.00	-22.16	QP
5	360.4476	50.85	-27.35	23.50	46.00	-22.50	QP
6 *	938.8326	45.02	-16.24	28.78	46.00	-17.22	QP



Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11B-2412

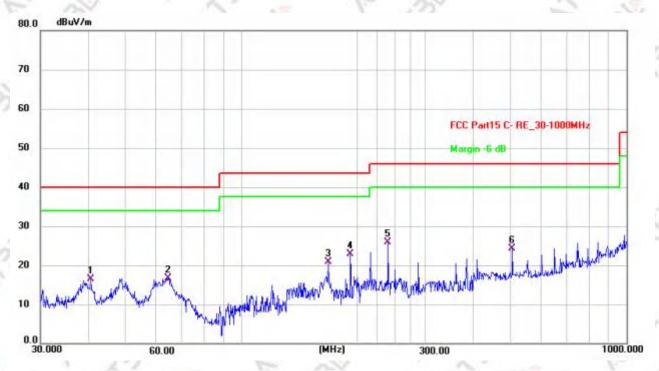

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.5591	45.76	-29.34	16.42	40.00	-23.58	QP
2	64.4330	46.53	-29.90	16.63	40.00	-23.37	QP
3	167.8241	50.35	-29.49	20.86	43.50	-22.64	QP
4	191.7450	55.05	-32.16	22.89	43.50	-20.61	QP
5 +	239.9873	56.55	-30.71	25.84	46.00	-20.16	QP
6	504.7062	47.77	-23.48	24.29	46.00	-21.71	QP




Above 1GHz:

Note:

- 1. The all data rate modes had been test, but only worse test data was recorded in the test report.
- 2.In frequency ranges 18 ~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.
- 3. We used the filter to test and the main frequency was filtered out.


Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11B-2412

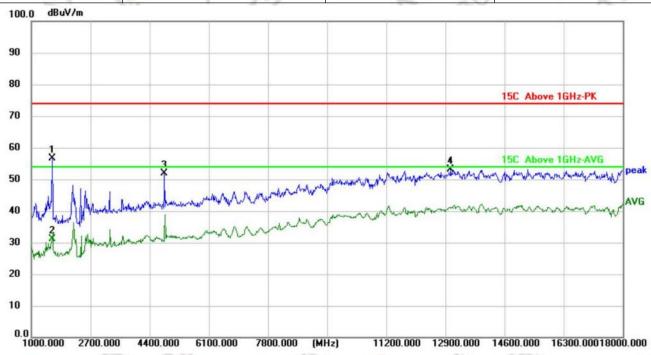

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
1 *	1595.000	75.46	-18.73	56.73	74.00	-17.27	peak	
2	1595.000	49.94	-18.73	31.21	54.00	-22.79	AVG	
3	4825.000	58.55	-6.74	51.81	74.00	-22.19	peak	
4	13053.000	43.10	10.08	53.18	74.00	-20.82	peak	




Indoor Wi-Fi lP Plug In 1080p	the sale	1 1/2
Deterrence Camera with	Model	WCM-FWIP2-I-V2
,	Mode	11B-2412
		Deterrence Camera with Model 2-Way Audio-White

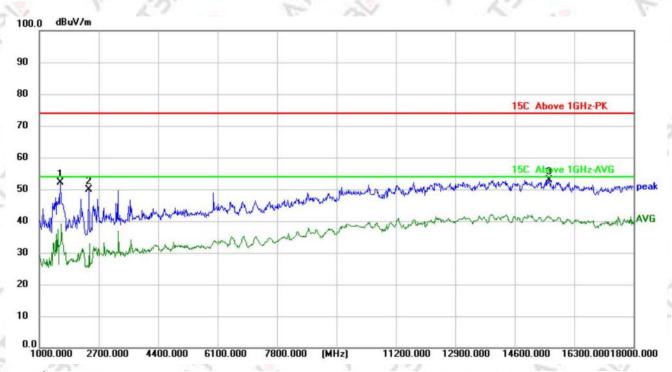

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	70.75	-18.73	52.02	74.00	-21.98	peak
2	2411.000	64.80	-15.00	49.80	74.00	-24.20	peak
3 *	15586.000	40.70	12.18	52.88	74.00	-21.12	peak




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11B-2437

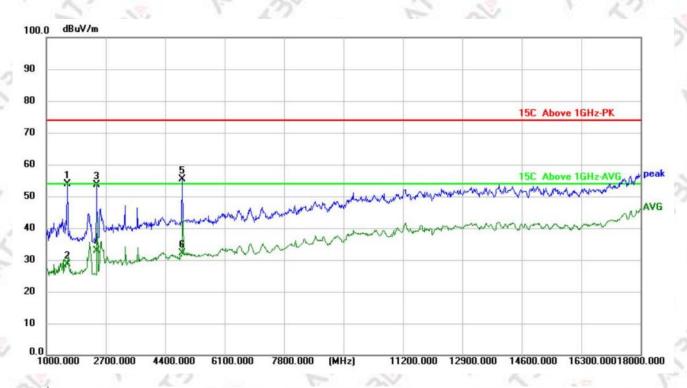

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	72.67	-18.73	53.94	74.00	-20.06	peak
2	1595.000	47.31	-18.73	28.58	54.00	-25.42	AVG
3	2445.000	68.56	-14.83	53.73	74.00	-20.27	peak
4	2445.000	47.78	-14.83	32.95	54.00	-21.05	AVG
5 *	4876.000	61.80	-6.41	55.39	74.00	-18.61	peak
6	4876.000	38.46	-6.41	32.05	54.00	-21.95	AVG




	Indoor Wi-Fi lP Plug In 1080p	12	25
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11B-2437

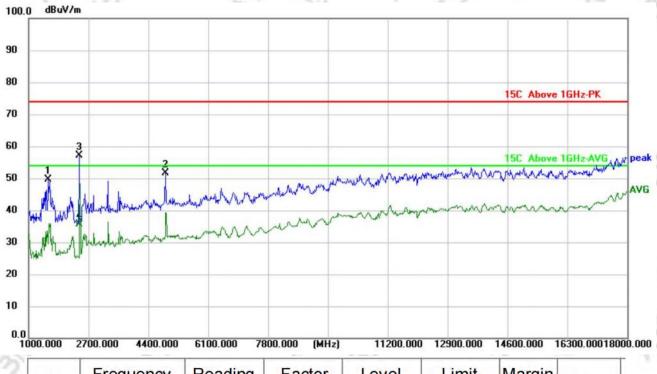

	No.	Frequency	Reading	Factor	Level	Limit	Margin	Detector
_	1	(MHz) 1561.000	(dBuV) 68.27	(dB/m) -18.74	(dBuV/m)	(dBuV/m) 74.00	(dB) -24.47	peak
	2	4876.000	58.02	-6.41	51.61	74.00	-22.39	peak
	3 *	2445.000	72.01	-14.83	57.18	74.00	-16.82	peak
	4	2445.000	50.56	-14.83	35.73	54.00	-18.27	AVG




S. I	Indoor Wi-Fi lP Plug In 1080p	1 1	12 E
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11B-2462

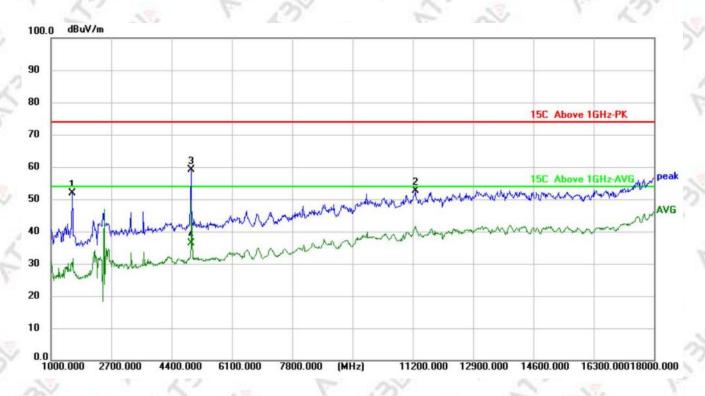

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	70.68	-18.73	51.95	74.00	-22.05	peak
2	11268.000	44.46	8.27	52.73	74.00	-21.27	peak
3 *	4944.000	65.10	-5.96	59.14	74.00	-14.86	peak
4	4944.000	42.22	-5.96	36.26	54.00	-17.74	AVG




Product Name	Indoor Wi-Fi IP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11B-2462

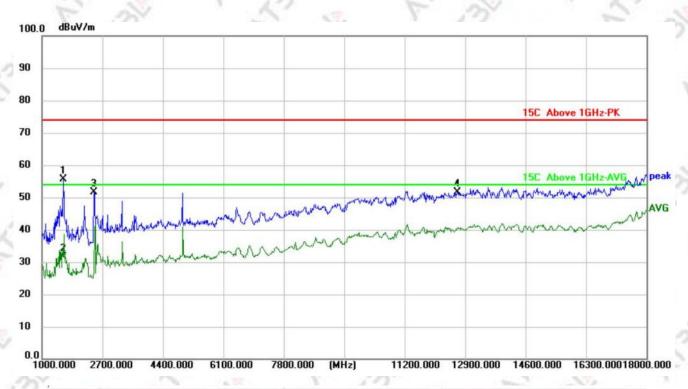

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	1595.000	74.24	-18.73	55.51	74.00	-18.49	peak
2	1595.000	50.29	-18.73	31.56	54.00	-22.44	AVG
3	2462.000	66.30	-14.76	51.54	74.00	-22.46	peak
4	12679.000	42.30	9.36	51.66	74.00	-22.34	peak




Š	Indoor Wi-Fi lP Plug In 1080p	Y	1 12 E
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
	2-Way Audio-White	25	E all
Polarization	Horizontal	Mode	11g-2412

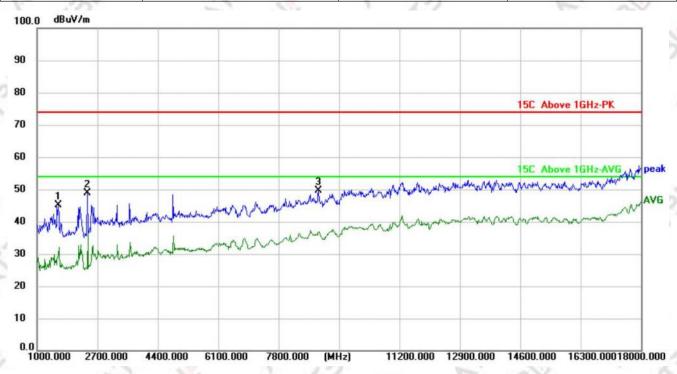

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	63.85	-18.73	45.12	74.00	-28.88	peak
2	2411.000	63.77	-15.00	48.77	74.00	-25.23	peak
3 *	8922.000	45.45	4.07	49.52	74.00	-24.48	peak




Product Name	Indoor Wi-Fi lP Plug In Product Name 1080p Deterrence Camera with 2-Way Audio-White		WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11g-2412

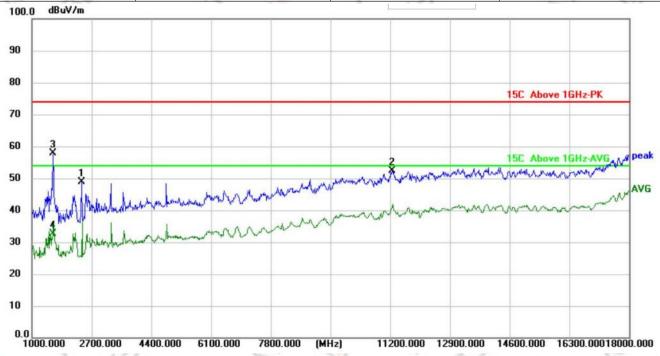

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2411.000	63.77	-15.00	48.77	74.00	-25.23	peak
2	11251.000	44.15	8.25	52.40	74.00	-21.60	peak
3 *	1595.000	76.72	-18.73	57.99	74.00	-16.01	peak
4	1595.000	51.26	-18.73	32.53	54.00	-21.47	AVG




, i	Indoor Wi-Fi lP Plug In 1080p		N NO F
Product Name	Deterrence Camera with 2-Way	Model	WCM-FWIP2-I-V2
123	Audio-White	69	The sale
Polarization	Horizontal	Mode	11g-2437

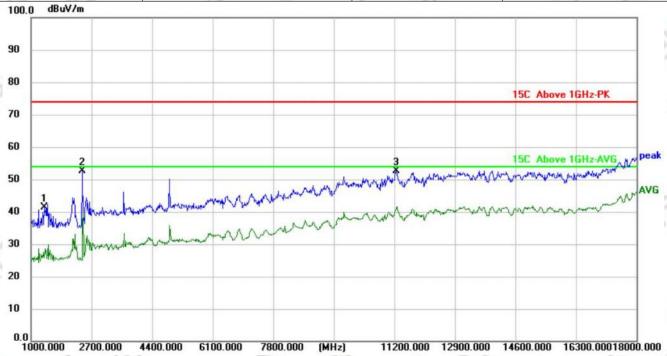

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1374.000	60.14	-18.86	41.28	74.00	-32.72	peak
2 *	2445.000	67.52	-14.83	52.69	74.00	-21.31	peak
3	11251.000	44.38	8.25	52.63	74.00	-21.37	peak




Product Name	Indoor Wi-Fi lP Plug In 1080p	Model	WCM-FWIP2-I-V2
1	Deterrence Camera with 2-Way	12	25
125	Audio-White		The sale
Polarization	Vertical	Mode	11g-2437

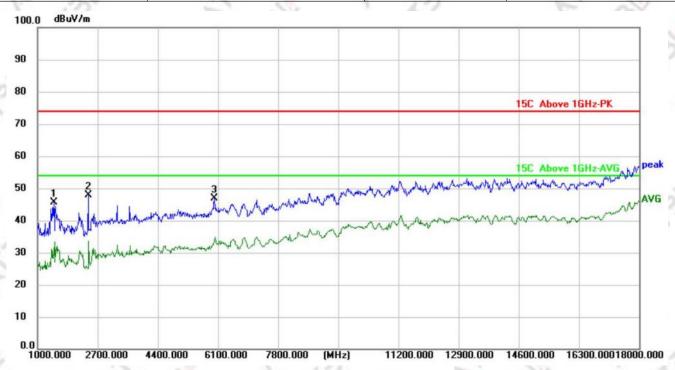

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1459.000	64.47	-18.77	45.70	74.00	-28.30	peak
2 *	2428.000	62.85	-14.92	47.93	74.00	-26.07	peak
3	5998.000	50.19	-3.20	46.99	74.00	-27.01	peak




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11g-2462

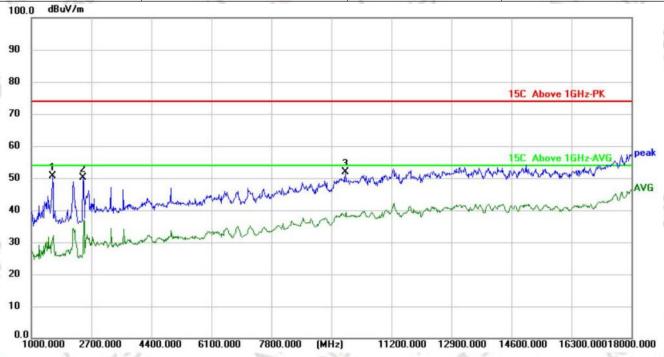

	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
	1	1595.000	69.34	-18.73	50.61	74.00	-23.39	peak
	2	2462.000	64.97	-14.76	50.21	74.00	-23.79	peak
1	3 *	9891.000	46.07	5.70	51.77	74.00	-22.23	peak




- F.	Indoor Wi-Fi lP Plug In 1080p	9	25
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11g-2462

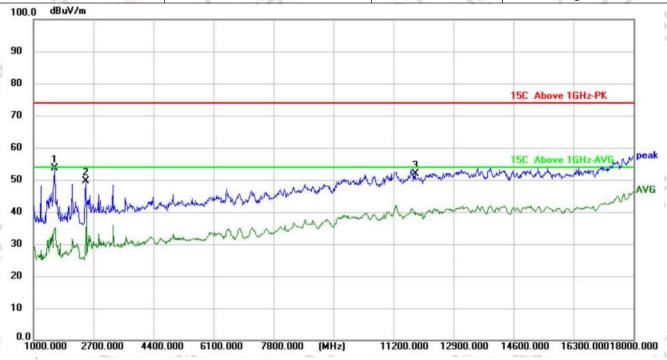

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	1595.000	72.26	-18.73	53.53	74.00	-20.47	peak
2	2479.000	64.37	-14.68	49.69	74.00	-24.31	peak
3	11812.000	43.13	8.67	51.80	74.00	-22.20	peak




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera	Model	WCM-FWIP2-I-V2
Polarization	with 2-Way Audio-White Horizontal	Mode	11n20-2412

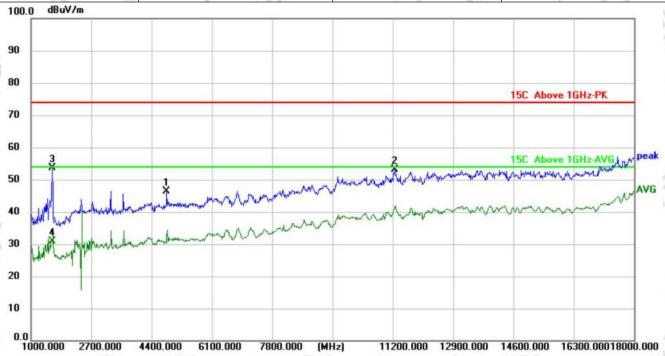

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4825.000	53.09	-6.74	46.35	74.00	-27.65	peak
2	11251.000	44.90	8.25	53.15	74.00	-20.85	peak
3 *	1595.000	72.36	-18.73	53.63	74.00	-20.37	peak
4	1595.000	49.53	-18.73	30.80	54.00	-23.20	AVG




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11n20-2412

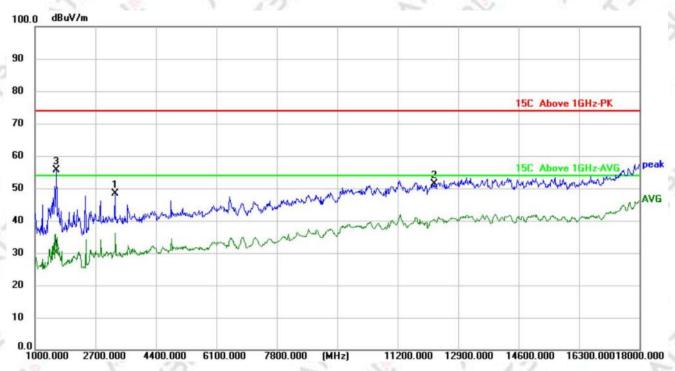

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3244.000	59.95	-11.50	48.45	74.00	-25.55	peak
2	12220.000	42.60	8.84	51.44	74.00	-22.56	peak
3 *	1595.000	74.32	-18.73	55.59	74.00	-18.41	peak
4	1595.000	48.79	-18.73	30.06	54.00	-23.94	AVG




Product Name	Indoor Wi-Fi lP Plug In 1080p	Model	WCM-FWIP2-I-V2
200	Deterrence Camera with 2-Way	2	1 1/2
1 13	Audio-White	100	F 32
Polarization	Horizontal	Mode	11n20-2437

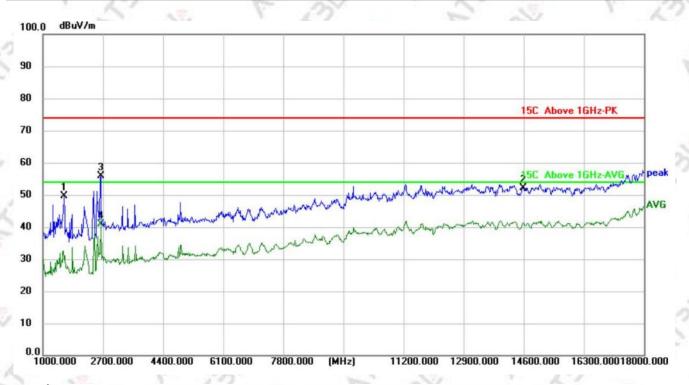

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	68.31	-18.73	49.58	74.00	-24.42	peak
2	14583.000	40.67	11.54	52.21	74.00	-21.79	peak
3	2632.000	69.70	-13.89	55.81	74.00	-18.19	peak
4 *	2632.000	54.81	-13.89	40.92	54.00	-13.08	AVG




Product Name Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White		Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11n20-2437

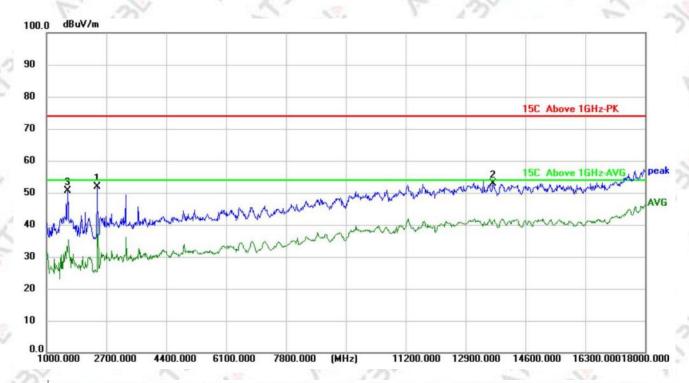

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2445.000	66.68	-14.83	51.85	74.00	-22.15	peak
2 *	13682.000	42.03	10.94	52.97	74.00	-21.03	peak
3	1595.000	69.28	-18.73	50.55	74.00	-23.45	peak




· - L	Indoor Wi-Fi lP Plug In	17	25
Product Name	1080p Deterrence Camera	Model	WCM-FWIP2-I-V2
	with 2-Way Audio-White	the of	1 42
Polarization	Horizontal	Mode	11n20-2462

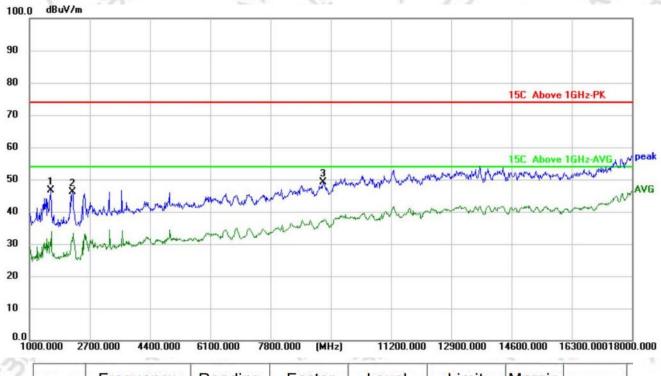

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	65.31	-18.73	46.58	74.00	-27.42	peak
2	2207.000	61.68	-15.67	46.01	74.00	-27.99	peak
3 *	9279.000	44.59	4.47	49.06	74.00	-24.94	peak




, i	Indoor Wi-Fi lP Plug In 1080p	7	1 48 F
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11n20-2462

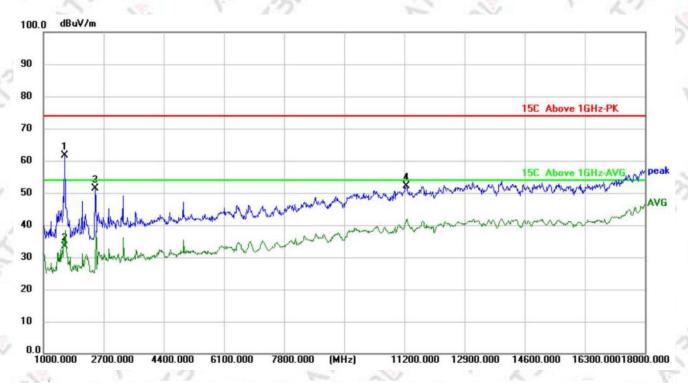

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	1595.000	80.26	-18.73	61.53	74.00	-12.47	peak
2	1595.000	52.20	-18.73	33.47	54.00	-20.53	AVG
3	2462.000	66.06	-14.76	51.30	74.00	-22.70	peak
4	11251.000	43.77	8.25	52.02	74.00	-21.98	peak




,	Indoor Wi-Fi lP Plug In 1080p	4	12 E
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
25	2-Way Audio-White	25	The sale
Polarization	Horizontal	Mode	11n40-2422

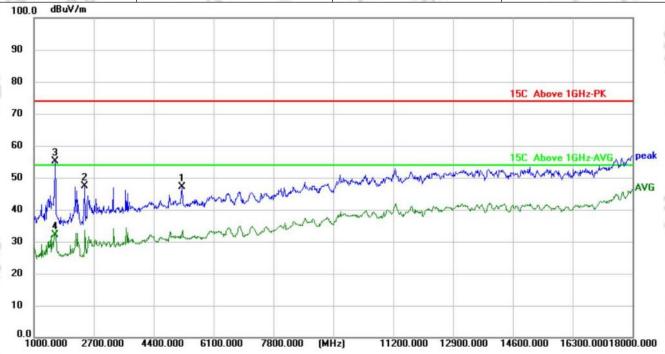

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5199.000	52.50	-5.32	47.18	74.00	-26.82	peak
2	2445.000	62.15	-14.83	47.32	74.00	-26.68	peak
3 *	1595.000	73.85	-18.73	55.12	74.00	-18.88	peak
4	1595.000	50.96	-18.73	32.23	54.00	-21.77	AVG




· '	Indoor Wi-Fi lP Plug In 1080p	7	1 12 E
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11n40-2422

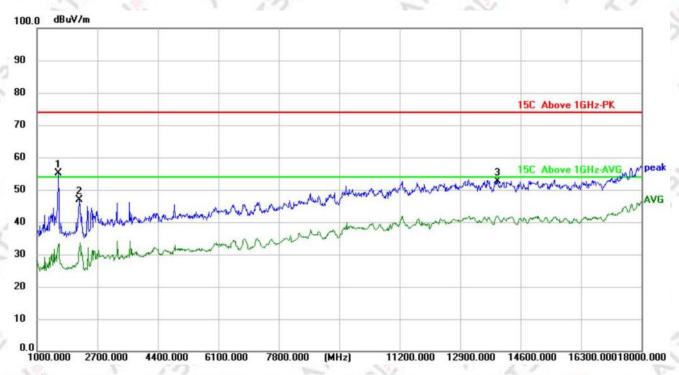

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	1595.000	73.89	-18.73	55.16	74.00	-18.84	peak
2	2190.000	62.59	-15.76	46.83	74.00	-27.17	peak
3	13954.000	41.32	11.25	52.57	74.00	-21.43	peak




	Indoor Wi-Fi lP Plug In 1080p	17	25
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
	2-Way Audio-White	The man	1 67
Polarization	Horizontal	Mode	11n40-2437

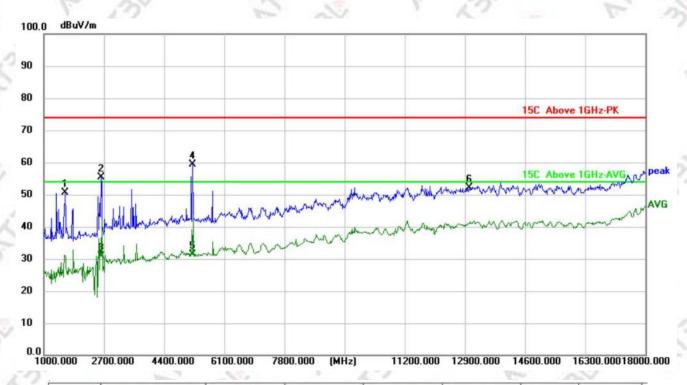

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	69.37	-18.73	50.64	74.00	-23.36	peak
2	2615.000	69.36	-14.01	55.35	74.00	-18.65	peak
3	2615.000	44.77	-14.01	30.76	54.00	-23.24	AVG
4 *	5199.000	64.74	-5.32	59.42	74.00	-14.58	peak
5	5199.000	36.69	-5.32	31.37	54.00	-22.63	AVG
6	13019.000	42.19	10.03	52.22	74.00	-21.78	peak
				1			




The Car	Indoor Wi-Fi lP Plug In 1080p	The man	1 67
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
15 3	2-Way Audio-White	7 (2)	
Polarization	Vertical	Mode	11n40-2437

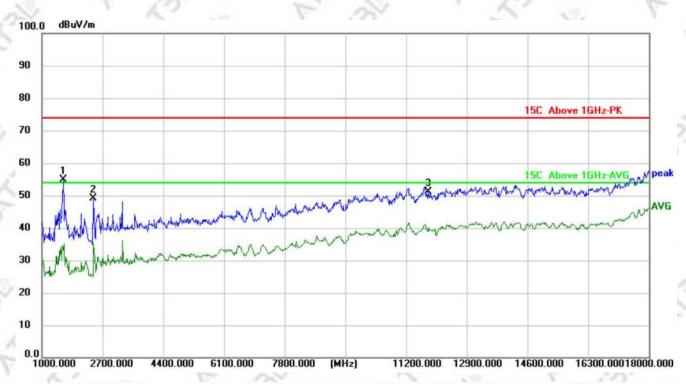

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	1595.000	73.52	-18.73	54.79	74.00	-19.21	peak
2	2445.000	63.86	-14.83	49.03	74.00	-24.97	peak
3	11812.000	42.55	8.67	51.22	74.00	-22.78	peak




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11n40-2452

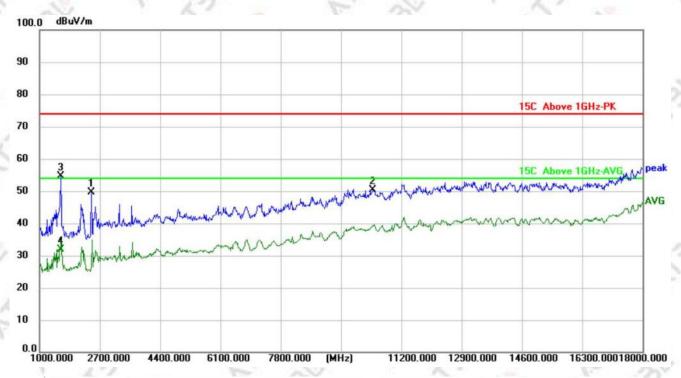

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2462.000	64.44	-14.76	49.68	74.00	-24.32	peak
2	10401.000	43.42	6.88	50.30	74.00	-23.70	peak
3 *	1595.000	73.32	-18.73	54.59	74.00	-19.41	peak
4	1595.000	50.49	-18.73	31.76	54.00	-22.24	AVG




1 16	Indoor Wi-Fi lP Plug In 1080p		S. 7 2	
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2	
b.	2-Way Audio-White	Y	The Park	
Polarization	Vertical	Mode	11n40-2452	

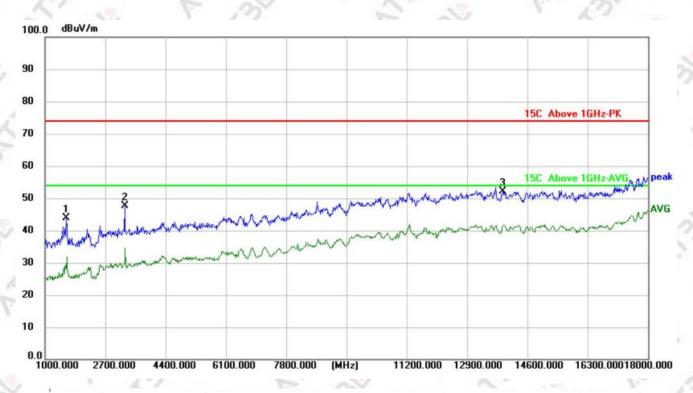

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	62.67	-18.73	43.94	74.00	-30.06	peak
2	3244.000	59.03	-11.50	47.53	74.00	-26.47	peak
3 *	13903.000	40.95	11.19	52.14	74.00	-21.86	peak




1	Indoor Wi-Fi lP Plug In 1080p	4 _	12 12
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11ax20-2412

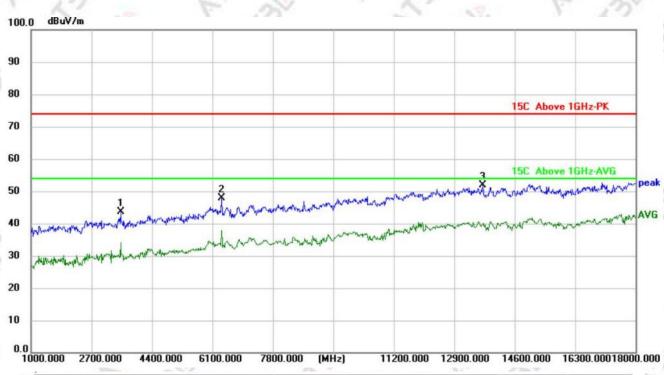

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3516.000	54.90	-11.21	43.69	74.00	-30.31	peak
2	6355.000	50.23	-2.28	47.95	74.00	-26.05	peak
3 *	13699.000	40.80	10.97	51.77	74.00	-22.23	peak




.0	Indoor Wi-Fi lP Plug In 1080p	17	25	
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2	
Jan 1	2-Way Audio-White	The of	1 1/2	
Polarization	Vertical	Mode	11ax20-2412	

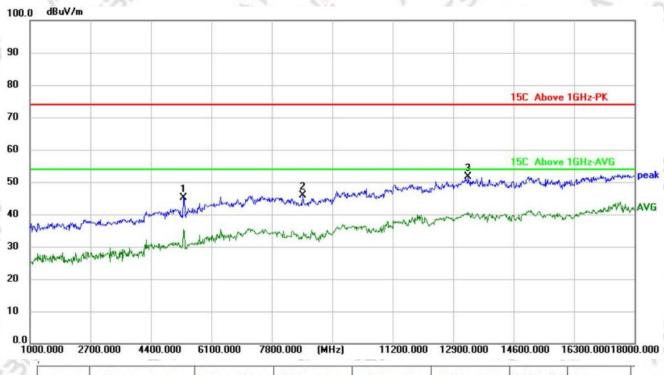

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector
1	5318.000	50.21	-5.15	45.06	74.00	-28.94	peak
2	8667.000	42.59	3.30	45.89	74.00	-28.11	peak
3 *	13325.000	41.12	10.49	51.61	74.00	-22.39	peak




· 1	Indoor Wi-Fi lP Plug In 1080p	4 . 1	1. 16 E
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11ax20-2437

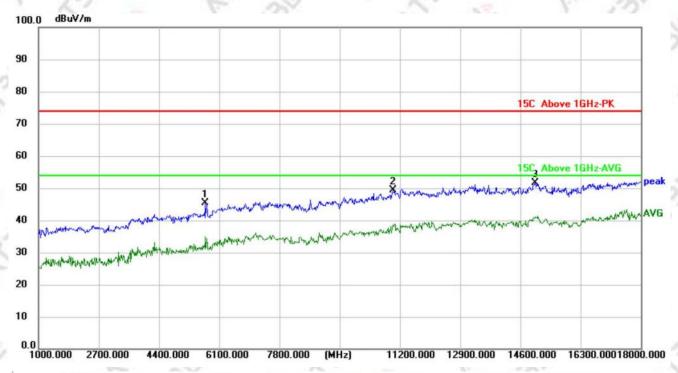

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5709.000	49.99	-4.70	45.29	74.00	-28.71	peak
2	11013.000	41.38	7.92	49.30	74.00	-24.70	peak
3 *	15008.000	39.91	11.81	51.72	74.00	-22.28	peak




S 1	Indoor Wi-Fi lP Plug In 1080p	N	1 42 F
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
	2-Way Audio-White	69	The salve
Polarization	Vertical	Mode	11ax20-2437

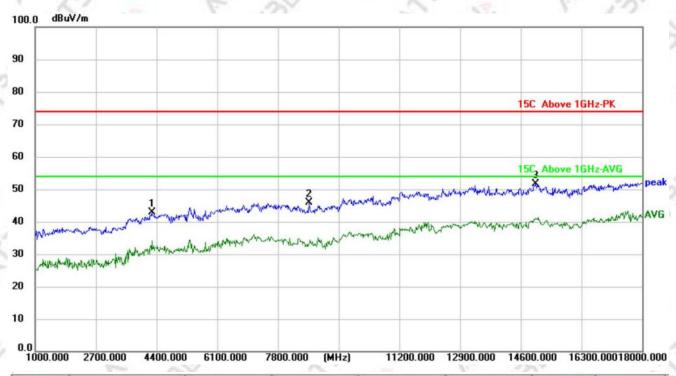

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4264.000	50.75	-7.91	42.84	74.00	-31.16	peak
2	8667.000	42.59	3.30	45.89	74.00	-28.11	peak
3 *	15008.000	39.91	11.81	51.72	74.00	-22.28	peak




V 1	Indoor Wi-Fi lP Plug In 1080p	1 1	1 12 F
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
125	2-Way Audio-White	25	The sale
Polarization	Horizontal	Mode	11ax20-2462

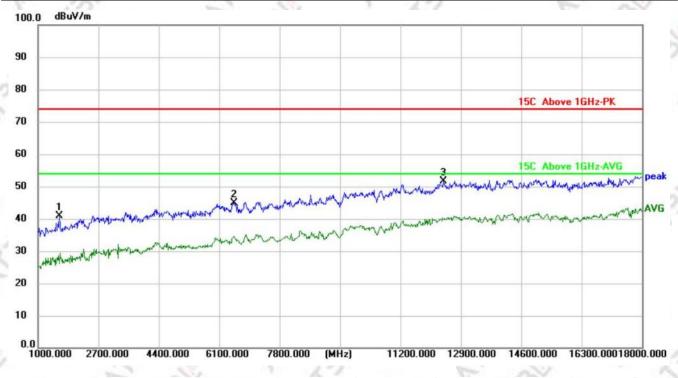

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	59.67	-18.73	40.94	74.00	-33.06	peak
2	6525.000	46.79	-1.81	44.98	74.00	-29.02	peak
3 *	12407.000	42.71	8.95	51.66	74.00	-22.34	peak




· 1	Indoor Wi-Fi lP Plug In 1080p	Y .	12 E
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11ax20-2462

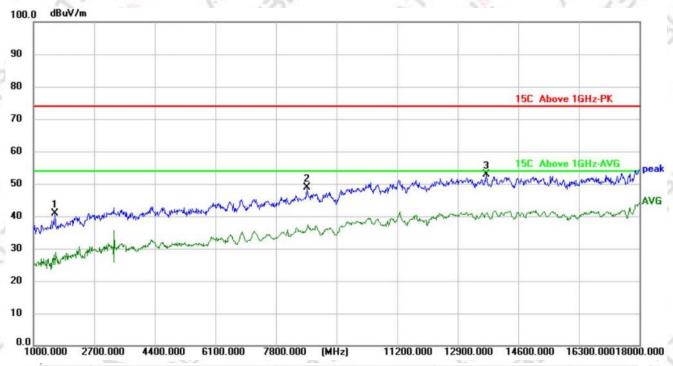

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1595.000	59.67	-18.73	40.94	74.00	-33.06	peak
2	8667.000	45.59	3.30	48.89	74.00	-25.11	peak
3 *	13699.000	41.80	10.97	52.77	74.00	-21.23	peak




V 1	Indoor Wi-Fi lP Plug In 1080p	1 1	1 12 E
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
125	2-Way Audio-White	69	The salv
Polarization	Horizontal	Mode	11ax40-2422

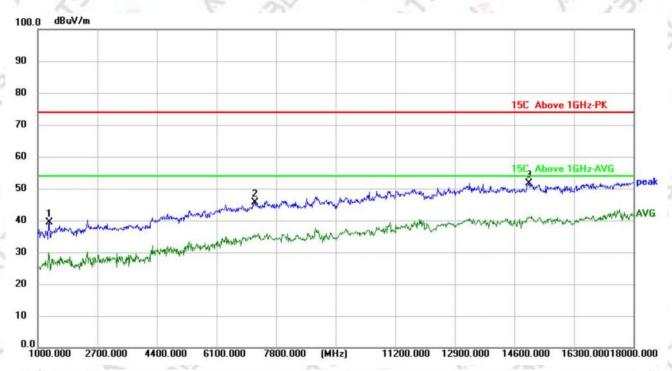

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1323.000	58.35	-19.00	39.35	74.00	-34.65	peak
2	7188.000	45.48	0.21	45.69	74.00	-28.31	peak
3 *	15008.000	39.91	11.81	51.72	74.00	-22.28	peak




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11ax40-2422

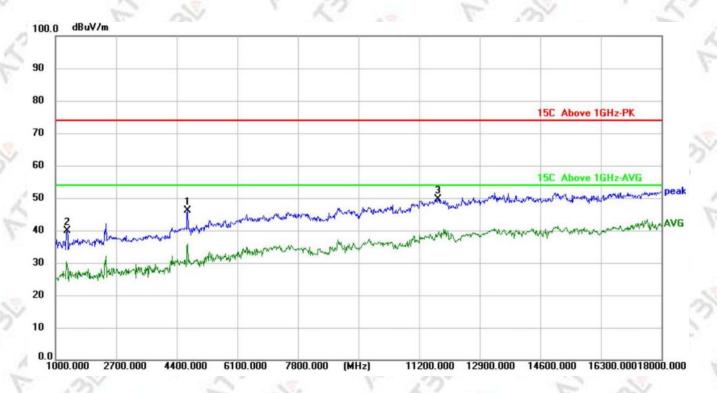

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)		Detector
4706.000	53.03	-6.90	46.13	74.00	-27.87	peak
1323.000	58.85	-19.00	39.85	74.00	-34.15	peak
11727.000	40.99	8.65	49.64	74.00	-24.36	peak
	(MHz) 4706.000 1323.000	(MHz) (dBuV) 4706.000 53.03 1323.000 58.85	(MHz) (dBuV) (dB/m) 4706.000 53.03 -6.90 1323.000 58.85 -19.00	(MHz) (dBuV) (dB/m) (dBuV/m) 4706.000 53.03 -6.90 46.13 1323.000 58.85 -19.00 39.85	(MHz) (dBuV) (dB/m) (dBuV/m) (dBuV/m) 4706.000 53.03 -6.90 46.13 74.00 1323.000 58.85 -19.00 39.85 74.00	(MHz) (dBuV) (dB/m) (dBuV/m) (dBuV/m) (dBuV/m) (dB) 4706.000 53.03 -6.90 46.13 74.00 -27.87 1323.000 58.85 -19.00 39.85 74.00 -34.15




V 1	Indoor Wi-Fi lP Plug In 1080p	Y	12 E
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
125	2-Way Audio-White	25	The same of the sa
Polarization	Horizontal	Mode	11ax40-2437

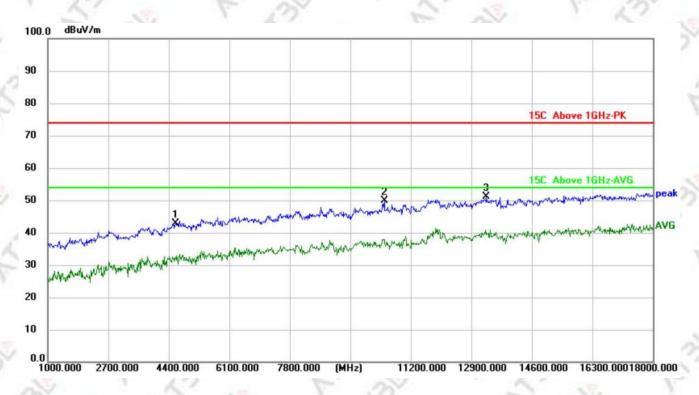

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4587.000	49.73	-6.92	42.81	74.00	-31.19	peak
2	10452.000	42.95	6.99	49.94	74.00	-24.06	peak
3 *	13325.000	40.62	10.49	51.11	74.00	-22.89	peak




N. T.	Indoor Wi-Fi lP Plug In 1080p	2	1 42 F
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
123	2-Way Audio-White	62	The sale
Polarization	Vertical	Mode	11ax40-2437

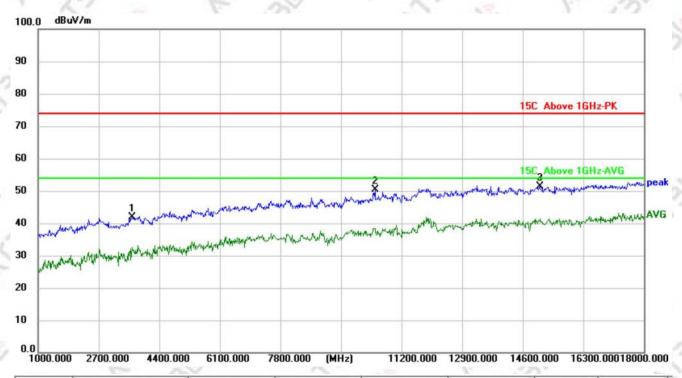

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3635.000	52.51	-10.65	41.86	74.00	-32.14	peak
2	10452.000	43.45	6.99	50.44	74.00	-23.56	peak
3 *	15076.000	39.41	11.88	51.29	74.00	-22.71	peak




· 1	Indoor Wi-Fi lP Plug In 1080p	4 . 1	1. 16 E
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11ax40-2452

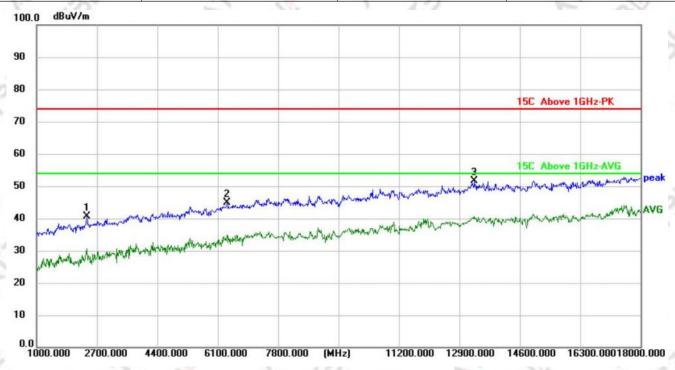

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2411.000	55.58	-15.00	40.58	74.00	-33.42	peak
2	6355.000	47.23	-2.28	44.95	74.00	-29.05	peak
3 *	13325.000	41.12	10.49	51.61	74.00	-22.39	peak



V 1	Indoor Wi-Fi lP Plug In 1080p	4 1	7 12 F
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11ax40-2452

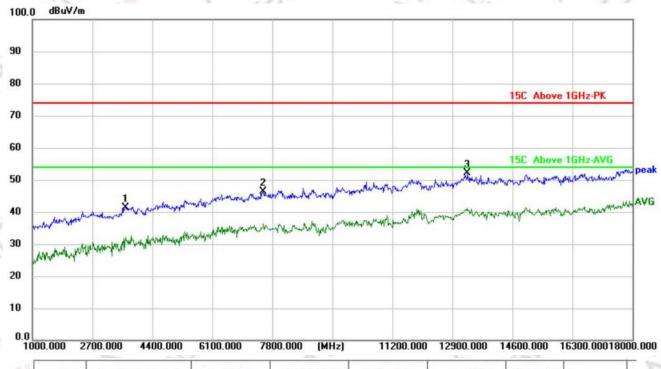


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3635.000	52.01	-10.65	41.36	74.00	-32.64	peak
2	7545.000	45.53	0.80	46.33	74.00	-27.67	peak
3 *	13325.000	41.62	10.49	52.11	74.00	-21.89	peak



2. Restricted Band


Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11B-2412

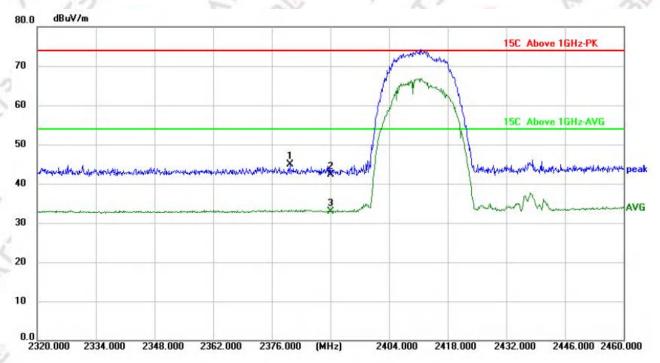

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2380.340	59.95	-15.11	44.84	74.00	-29.16	peak	150	360	P
2	2390.000	57.29	-15.08	42.21	74.00	-31.79	peak	150	360	Р
3 *	2390.000	48.02	-15.08	32.94	54.00	-21.06	AVG	150	360	Р




V 1	Indoor Wi-Fi lP Plug In 1080p	7	1 12 F
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11B-2412

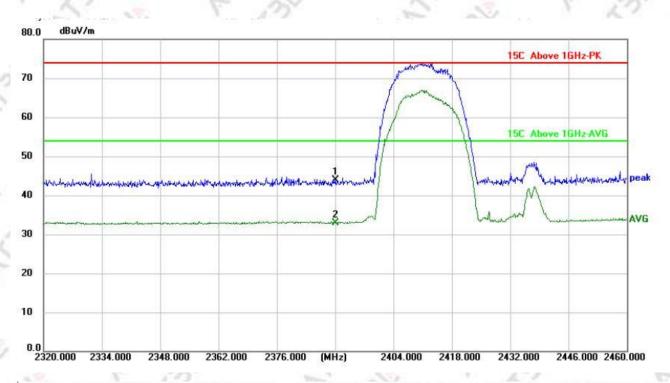

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	58.93	-15.08	43.85	74.00	-30.15	peak	150	360	Р
2 *	2390.000	48.06	-15.08	32.98	54.00	-21.02	AVG	150	360	Р




V 1	Indoor Wi-Fi lP Plug In 1080p	1	1 12 F
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
23	2-Way Audio-White	25	The Call
Polarization	Horizontal	Mode	11B-2462

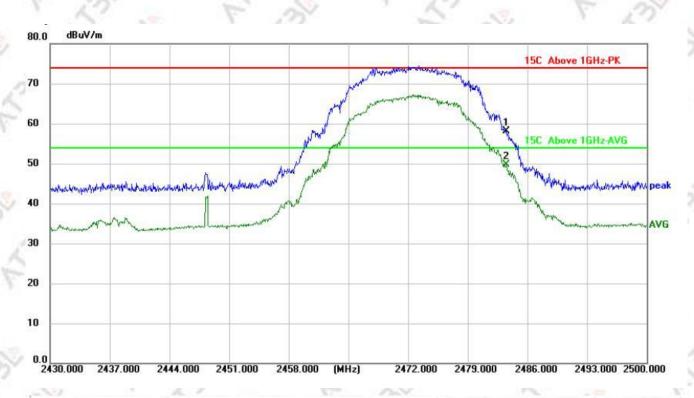

	No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
	1	2483.500	72.84	-14.66	58.18	74.00	-15.82	peak	150	360	Р
1	2 *	2483.500	64.32	-14.66	49.66	54.00	-4.34	AVG	150	360	P




, i	Indoor Wi-Fi lP Plug In 1080p	4	12 E
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
25	2-Way Audio-White	25	The sale
Polarization	Vertical	Mode	11B-2462

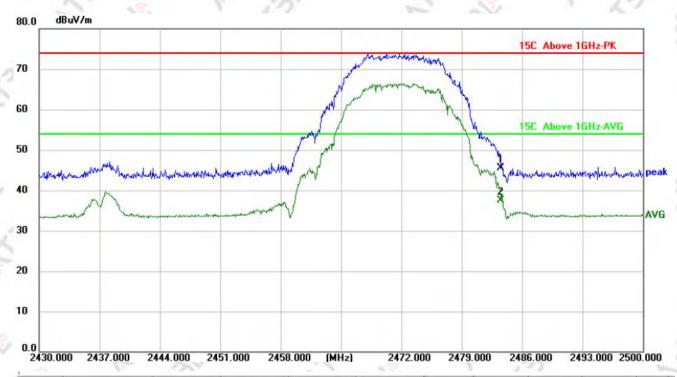

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.500	60.20	-14.66	45.54	74.00	-28.46	peak	150	360	P
2 *	2483.500	52.24	-14.66	37.58	54.00	-16.42	AVG	150	360	Р




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11g-2412

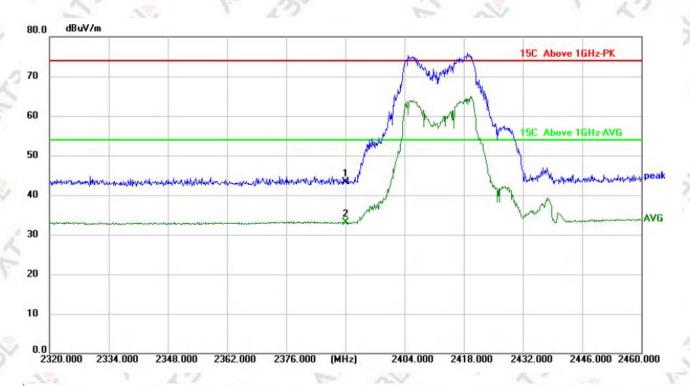

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	58.48	-15.08	43.40	74.00	-30.60	peak	150	360	P
2 *	2390.000	48.11	-15.08	33.03	54.00	-20.97	AVG	150	360	Р




· 1	Indoor Wi-Fi lP Plug In 1080p	4	1 12 E
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11g-2412

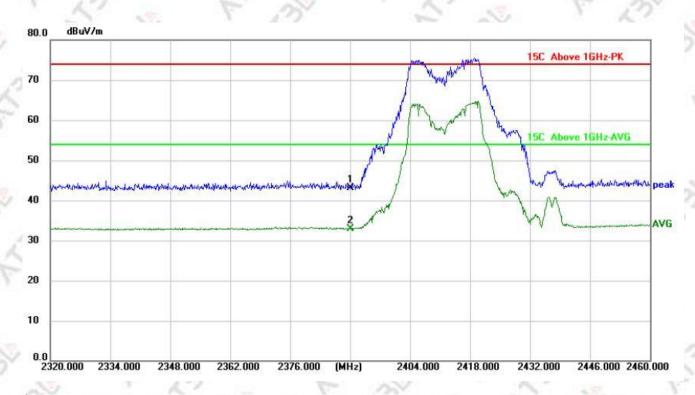

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	58.25	-15.08	43.17	74.00	-30.83	peak	150	360	P
2 *	2390.000	48.08	-15.08	33.00	54.00	-21.00	AVG	150	360	P




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11g-2462

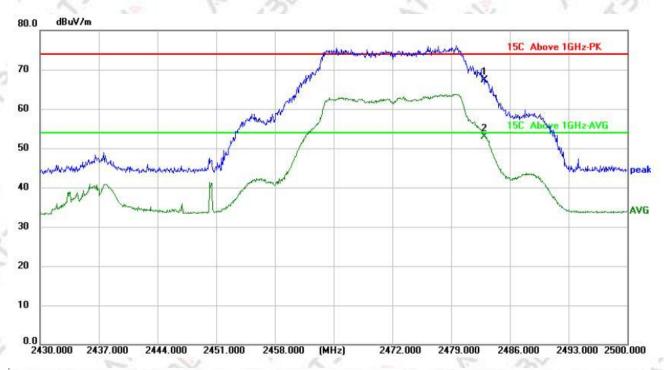

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.000	81.90	-14.66	67.24	74.00	-6.76	peak	150	360	Р
2 *	2483.000	67.56	-14.66	52.90	54.00	-1.10	AVG	150	360	P




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way	Model	WCM-FWIP2-I-V2
Froduct Name	Audio-White	Wiodei	W CIVI-F W IFZ-I- V Z
Polarization	Vertical	Mode	11g-2462

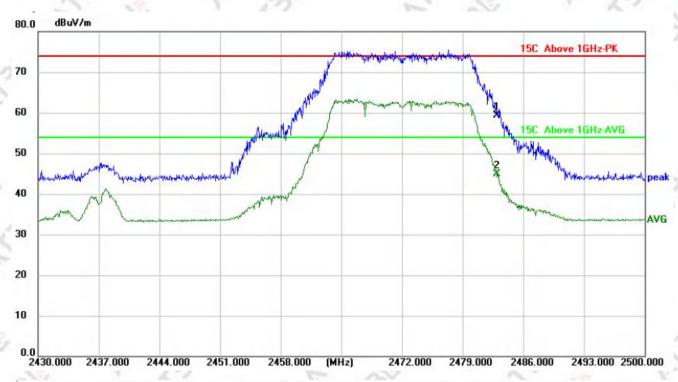

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	The second second		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.000	73.98	-14.66	59.32	74.00	-14.68	peak	150	360	Р
2 *	2483.000	59.48	-14.66	44.82	54.00	-9.18	AVG	150	360	Р




N.	Indoor Wi-Fi lP Plug In 1080p		47	
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2	
Polarization	Horizontal	Mode	11n20-2412	

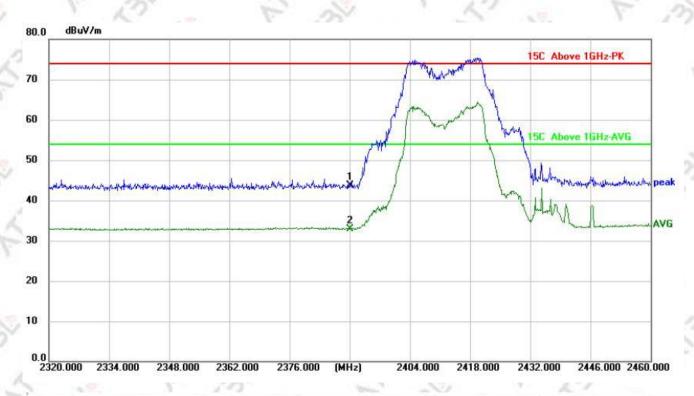

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	58.69	-15.08	43.61	74.00	-30.39	peak	150	360	P
2 *	2390.000	47.96	-15.08	32.88	54.00	-21.12	AVG	150	360	Р




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11n20-2412

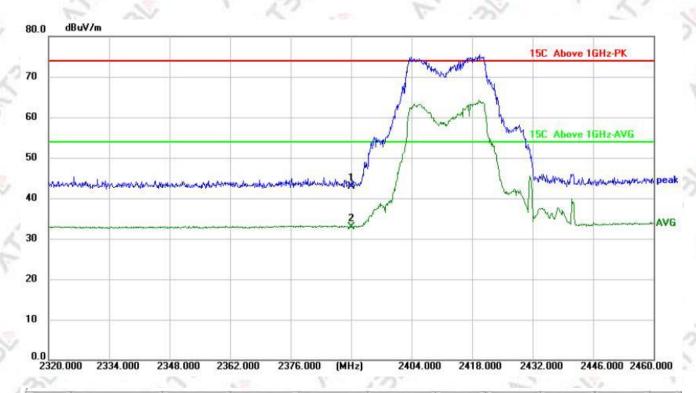

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	57.93	-15.08	42.85	74.00	-31.15	peak	150	360	P
2 *	2390.000	48.06	-15.08	32.98	54.00	-21.02	AVG	150	360	Р




V 1	Indoor Wi-Fi lP Plug In 1080p	4	1 12 E
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11n20-2462

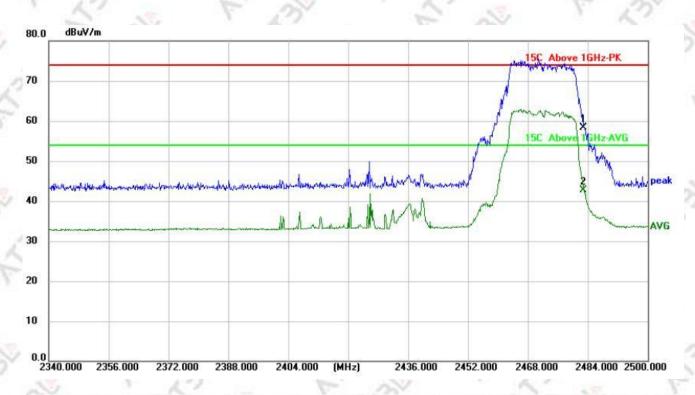

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.000	73.05	-14.66	58.39	74.00	-15.61	peak	150	360	Р
2 *	2483.000	57.28	-14.66	42.62	54.00	-11.38	AVG	150	360	P




V 1	Indoor Wi-Fi lP Plug In 1080p	Y	1 12 F
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
23	2-Way Audio-White	25	The sale
Polarization	Vertical	Mode	11n20-2462

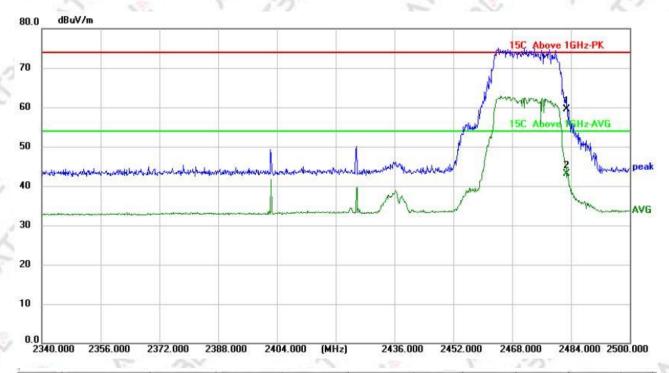

No.	Frequency (MHz)	Reading (dBuV)		Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.000	74.12	-14.66	59.46	74.00	-14.54	peak	150	360	P
2 *	2483.000	57.83	-14.66	43.17	54.00	-10.83	AVG	150	360	Р




	Indoor Wi-Fi lP Plug In 1080p			
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2	
13	2-Way Audio-White	17	WCM-FWIP2-I-V2	
Polarization	Horizontal	Mode	11n40-2422	

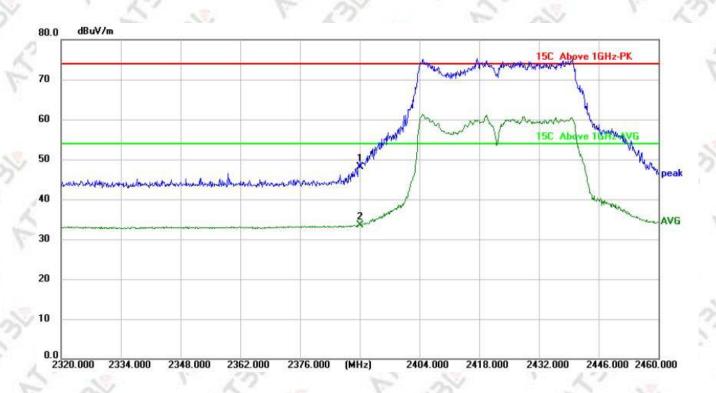

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	63.13	-15.08	48.05	74.00	-25.95	peak	150	360	Р
2 *	2390.000	48.66	-15.08	33.58	54.00	-20.42	AVG	150	360	P




Product Name	Indoor Wi-Fi IP Plug In 1080p		WIGHT FWWDO I WO
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11n40-2422

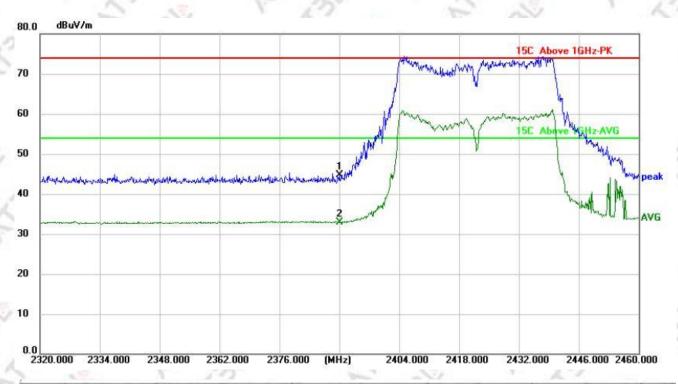

No.	Frequency (MHz)	Reading (dBuV)		Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	59.70	-15.08	44.62	74.00	-29.38	peak	150	360	P
2 *	2390.000	48.02	-15.08	32.94	54.00	-21.06	AVG	150	360	P




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with	Model	WCM-FWIP2-I-V2
r roduct Name	2-Way Audio-White	Woder	W CIVI-1 W II 2-1- V 2
Polarization	Horizontal	Mode	11n40-2452

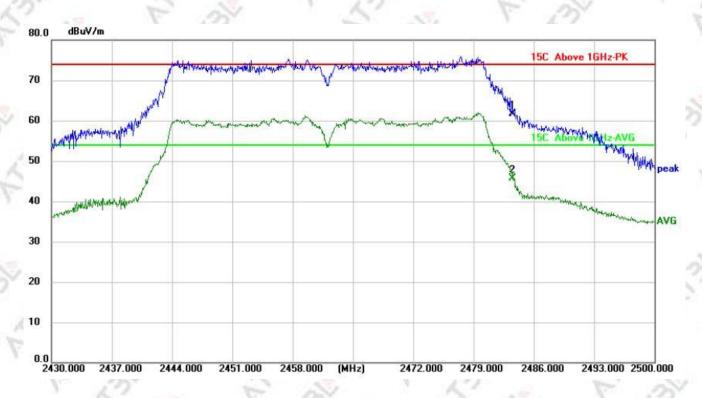

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.500	76.33	-14.66	61.67	74.00	-12.33	peak	150	360	P
2 *	2483.500	60.29	-14.66	45.63	54.00	-8.37	AVG	150	360	Р




Product Name	Product Name Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White		WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11n40-2452

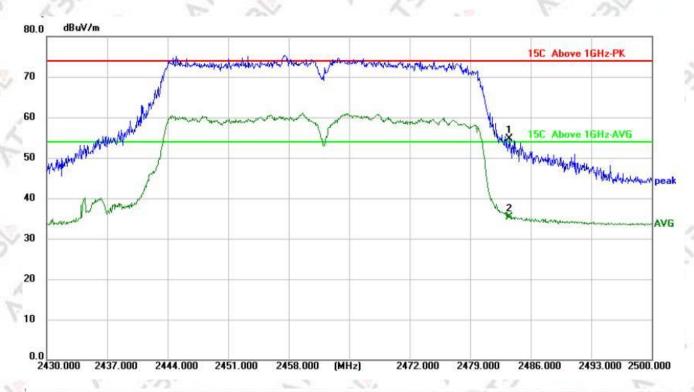

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.500	69.35	-14.66	54.69	74.00	-19.31	peak	150	360	P
2 *	2483.500	49.90	-14.66	35.24	54.00	-18.76	AVG	150	360	Р




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11ax20-2412

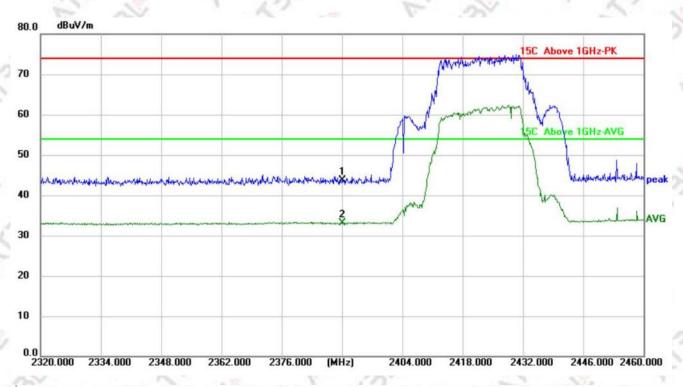

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	58.78	-15.08	43.70	74.00	-30.30	peak	150	360	Р
2 *	2390.000	48.10	-15.08	33.02	54.00	-20.98	AVG	150	360	P




2	Indoor Wi-Fi lP Plug In 1080p	125	200
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11ax20-2412

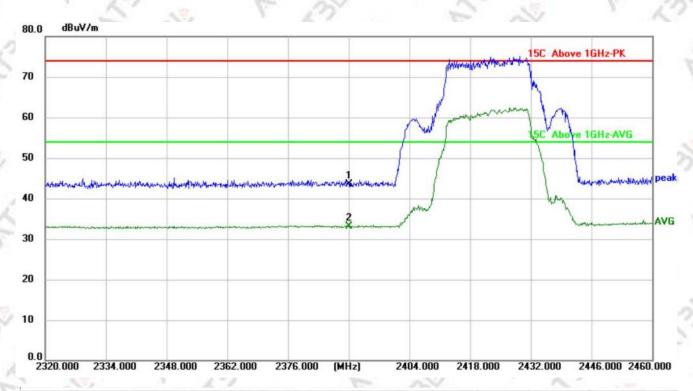

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	58.56	-15.08	43.48	74.00	-30.52	peak	150	360	Р
2 *	2390.000	48.17	-15.08	33.09	54.00	-20.91	AVG	150	360	P




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Horizontal	Mode	11ax20-2462

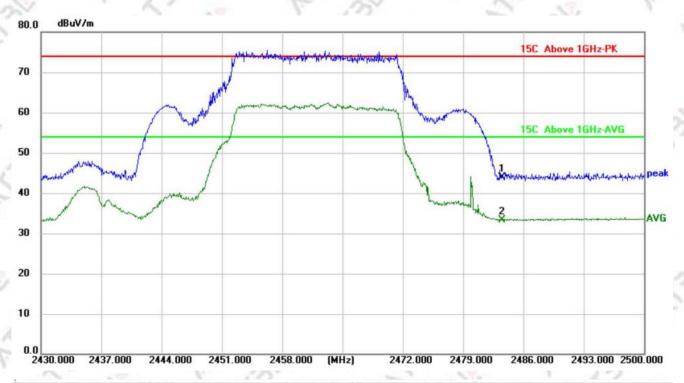

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.500	58.49	-14.66	43.83	74.00	-30.17	peak	150	360	P
2 *	2483.500	48.03	-14.66	33.37	54.00	-20.63	AVG	150	360	P




Va Ca	Indoor Wi-Fi lP Plug In 1080p	E AN	1
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
F 3	2-Way Audio-White	1 3	
Polarization	Vertical	Mode	11ax20-2462

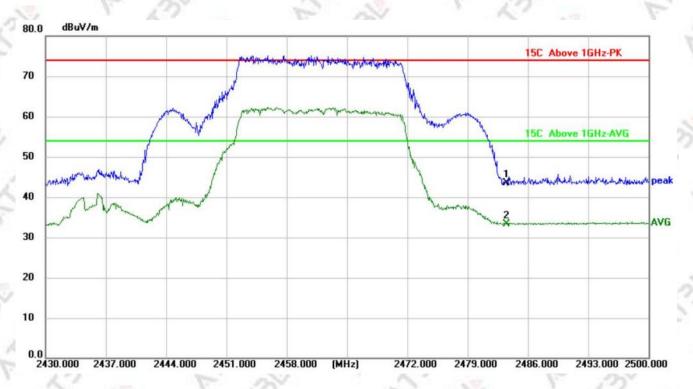

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.500	58.18	-14.66	43.52	74.00	-30.48	peak	150	360	P
2 *	2483.500	48.05	-14.66	33.39	54.00	-20.61	AVG	150	360	Р




S 1	Indoor Wi-Fi lP Plug In 1080p	4	1. 12 E
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
23	2-Way Audio-White	25	The sale
Polarization	Horizontal	Mode	11ax40-2422

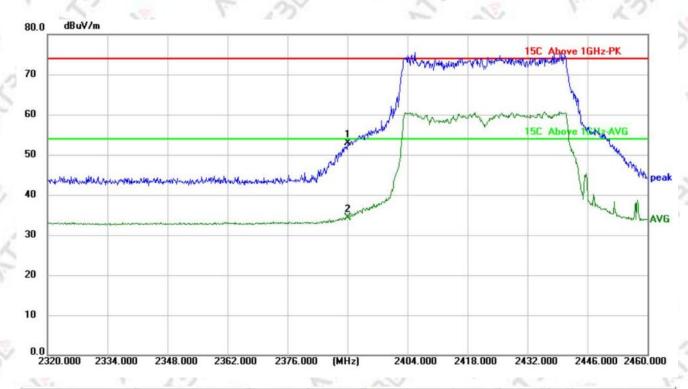

No.	Frequency (MHz)			Level (dBuV/m)			Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	67.99	-15.08	52.91	74.00	-21.09	peak	150	360	P	
2 *	2390.000	49.39	-15.08	34.31	54.00	-19.69	AVG	150	360	Р	




	Indoor Wi-Fi lP Plug In 1080p		447017 111111111111111111111111111111111
Product Name	Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11ax40-2422

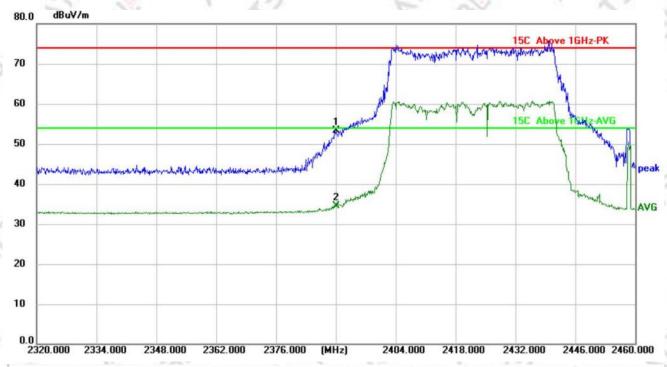

No.	Frequency (MHz)	Reading (dBuV)		Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2390.000	68.43	-15.08	53.35	74.00	-20.65	peak	150	360	P
2 *	2390.000	49.59	-15.08	34.51	54.00	-19.49	AVG	150	360	P




ý .	Indoor Wi-Fi lP Plug In 1080p	1	12 E
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
25	2-Way Audio-White	25	The Call
Polarization	Horizontal	Mode	11ax40-2452

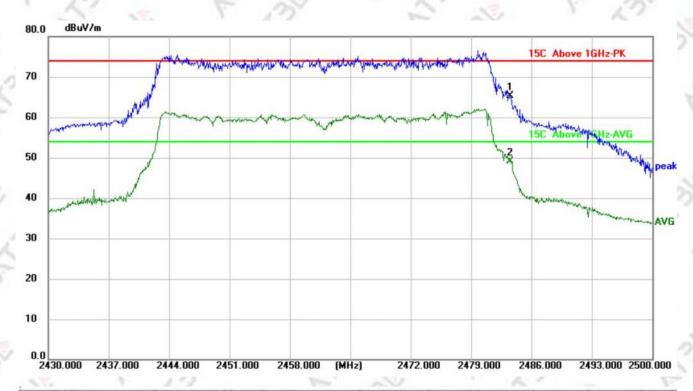

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.500	80.01	-14.66	65.35	74.00	-8.65	peak	150	360	Р
2 *	2483.500	63.77	-14.66	49.11	54.00	-4.89	AVG	150	360	P



Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	Vertical	Mode	11ax40-2452

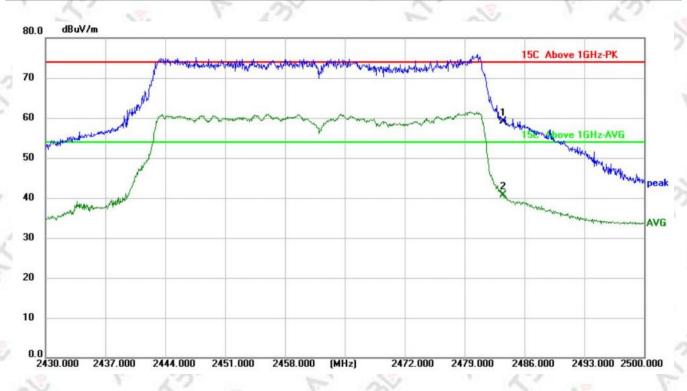


No.	Frequency (MHz)	Reading (dBuV)		9 - 7 - 7 - 7 - 4 - 4 - 7 - 7		Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	2483.500	73.78	-14.66	59.12	74.00	-14.88	peak	150	360	P
2 *	2483.500	55.33	-14.66	40.67	54.00	-13.33	AVG	150	360	Р



3. AC Power-Line Conducted Emission

only worst case (802.11b) mode was recorded in the test report if no any others.


100	Indoor Wi-Fi lP Plug In 1080p		WCM-FWIP2-I-V2	
Product Name	Deterrence Camera with	Model		
- 2	2-Way Audio-White	75	10	
Polarization	N	Mode	11b-2412	

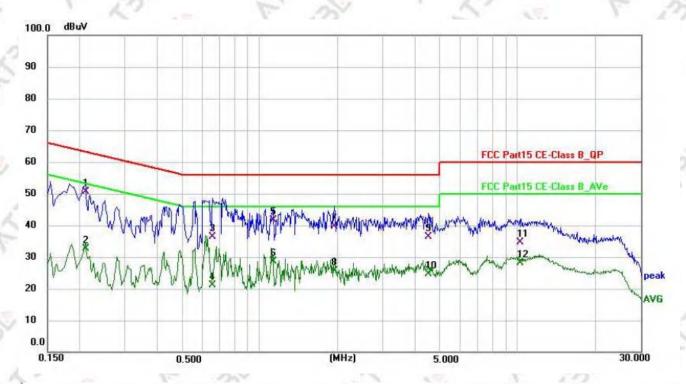

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.2100	31.33	19.33	50.66	63.21	-12.55	QP	Р
2	0.2100	13.32	19.33	32.65	53.21	-20.56	AVG	Р
3	0.6540	17.08	19.34	36.42	56.00	-19.58	QP	Р
4	0.6540	1.69	19.34	21.03	46.00	-24.97	AVG	P
5	1.1300	22.38	19.35	41.73	56.00	-14.27	QP	Р
6	1.1300	9.22	19.35	28.57	46.00	-17.43	AVG	Р
7	1.9460	20.34	19.36	39.70	56.00	-16.30	QP	Р
8	1.9460	6.31	19.36	25.67	46.00	-20.33	AVG	P
9	4.5180	16.90	19.38	36.28	56.00	-19.72	QP	Р
10	4.5180	5.37	19.38	24.75	46.00	-21.25	AVG	Р
11	10.3139	15.10	19.42	34.52	60.00	-25.48	QP	P
12	10.3139	8.72	19.42	28.14	50.00	-21.86	AVG	P




SY	Indoor Wi-Fi lP Plug In 1080p	7	5 70
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
19	2-Way Audio-White	10	1 20
Polarization	L	Mode	11b-2412

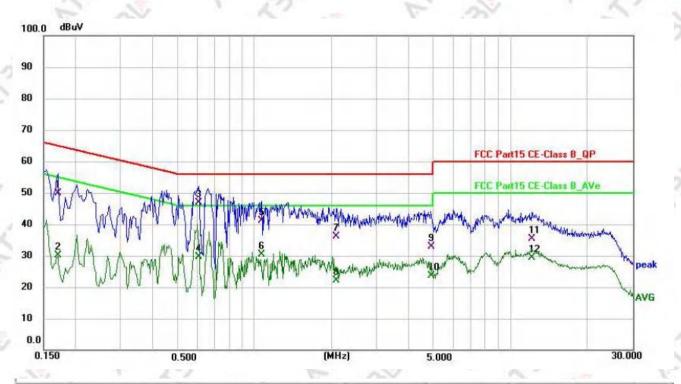

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1700	30.45	19.33	49.78	64.96	-15.18	QP	Р
2	0.1700	10.86	19.33	30.19	54.96	-24.77	AVG	Р
3 *	0.6060	27.50	19.35	46.85	56.00	-9.15	QP	Р
4	0.6060	10.17	19.35	29.52	46.00	-16.48	AVG	Р
5	1.0660	21.95	19.26	41.21	56.00	-14.79	QP	Р
6	1.0660	11.20	19.26	30.46	46.00	-15.54	AVG	Р
7	2.0940	16.79	19.46	36.25	56.00	-19.75	QP	Р
8	2.0940	2.69	19.46	22.15	46.00	-23.85	AVG	Р
9	4.9220	13.55	19.42	32.97	56.00	-23.03	QP	Р
10	4.9220	4.23	19.42	23.65	46.00	-22.35	AVG	Р
11	12.1100	15.92	19.51	35.43	60.00	-24.57	QP	P
12	12.1100	9.84	19.51	29.35	50.00	-20.65	AVG	P




Product Name	Indoor Wi-Fi lP Plug In 1080p Deterrence Camera with 2-Way Audio-White	Model	WCM-FWIP2-I-V2
Polarization	N	Mode	11b-2462

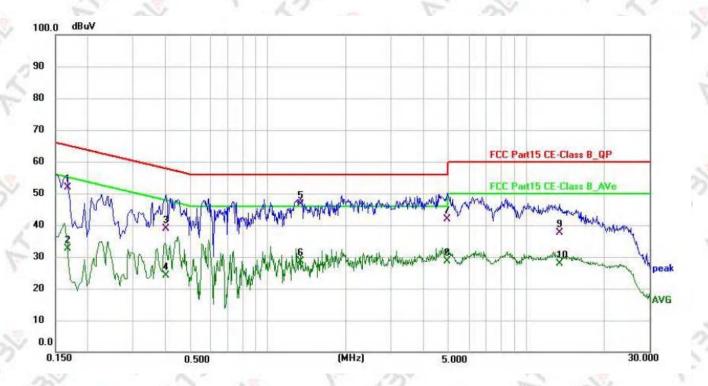

		-	4				
Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
0.1660	32.67	19.33	52.00	65.16	-13.16	QP	Р
0.1660	13.42	19.33	32.75	55.16	-22.41	AVG	Р
0.4020	19.66	19.34	39.00	57.81	-18.81	QP	Р
0.4020	4.71	19.34	24.05	47.81	-23.76	AVG	Р
1.3340	27.23	19.35	46.58	56.00	-9.42	QP	P
1.3340	9.27	19.35	28.62	46.00	-17.38	AVG	Р
4.9260	22.46	19.38	41.84	56.00	-14.16	QP	Р
4.9260	9.33	19.38	28.71	46.00	-17.29	AVG	Р
13.4940	18.24	19.48	37.72	60.00	-22.28	QP	Р
13.4940	8.52	19.48	28.00	50.00	-22.00	AVG	P
	(MHz) 0.1660 0.1660 0.4020 0.4020 1.3340 1.3340 4.9260 4.9260 13.4940	(MHz) (dBuV) 0.1660 32.67 0.1660 13.42 0.4020 19.66 0.4020 4.71 1.3340 27.23 1.3340 9.27 4.9260 22.46 4.9260 9.33 13.4940 18.24	(MHz) (dBuV) (dB) 0.1660 32.67 19.33 0.1660 13.42 19.33 0.4020 19.66 19.34 0.4020 4.71 19.34 1.3340 27.23 19.35 1.3340 9.27 19.35 4.9260 22.46 19.38 4.9260 9.33 19.38 13.4940 18.24 19.48	(MHz) (dBuV) (dB) (dBuV) 0.1660 32.67 19.33 52.00 0.1660 13.42 19.33 32.75 0.4020 19.66 19.34 39.00 0.4020 4.71 19.34 24.05 1.3340 27.23 19.35 46.58 1.3340 9.27 19.35 28.62 4.9260 22.46 19.38 41.84 4.9260 9.33 19.38 28.71 13.4940 18.24 19.48 37.72	(MHz) (dBuV) (dB) (dBuV) (dBuV) 0.1660 32.67 19.33 52.00 65.16 0.1660 13.42 19.33 32.75 55.16 0.4020 19.66 19.34 39.00 57.81 0.4020 4.71 19.34 24.05 47.81 1.3340 27.23 19.35 46.58 56.00 1.3340 9.27 19.35 28.62 46.00 4.9260 22.46 19.38 41.84 56.00 4.9260 9.33 19.38 28.71 46.00 13.4940 18.24 19.48 37.72 60.00	(MHz) (dBuV) (dB) (dBuV) (dBuV) (dB) 0.1660 32.67 19.33 52.00 65.16 -13.16 0.1660 13.42 19.33 32.75 55.16 -22.41 0.4020 19.66 19.34 39.00 57.81 -18.81 0.4020 4.71 19.34 24.05 47.81 -23.76 1.3340 27.23 19.35 46.58 56.00 -9.42 1.3340 9.27 19.35 28.62 46.00 -17.38 4.9260 22.46 19.38 41.84 56.00 -14.16 4.9260 9.33 19.38 28.71 46.00 -17.29 13.4940 18.24 19.48 37.72 60.00 -22.28	(MHz) (dBuV) (dB) (dBuV) (dBuV) (dB) Detector 0.1660 32.67 19.33 52.00 65.16 -13.16 QP 0.1660 13.42 19.33 32.75 55.16 -22.41 AVG 0.4020 19.66 19.34 39.00 57.81 -18.81 QP 0.4020 4.71 19.34 24.05 47.81 -23.76 AVG 1.3340 27.23 19.35 46.58 56.00 -9.42 QP 1.3340 9.27 19.35 28.62 46.00 -17.38 AVG 4.9260 22.46 19.38 41.84 56.00 -14.16 QP 4.9260 9.33 19.38 28.71 46.00 -17.29 AVG 13.4940 18.24 19.48 37.72 60.00 -22.28 QP



	Indoor Wi-Fi lP Plug In 1080p	200	7
Product Name	Deterrence Camera with	Model	WCM-FWIP2-I-V2
F 3	2-Way Audio-White	133	Vac of
Polarization	L	Mode	11b-2462

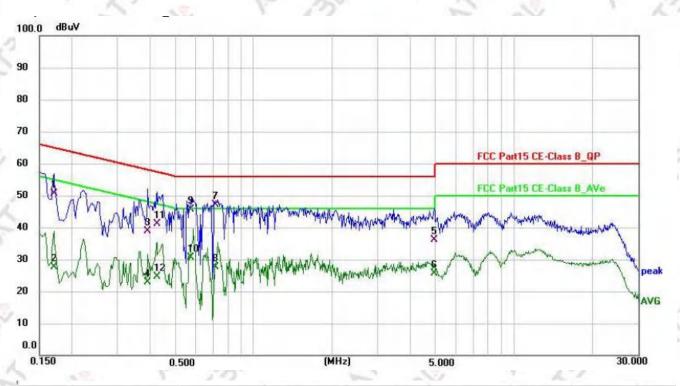

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1700	31.40	19.33	50.73	64.96	-14.23	QP	P
2	0.1700	8.18	19.33	27.51	54.96	-27.45	AVG	Р
3	0.3899	19.70	19.28	38.98	58.07	-19.09	QP	Р
4	0.3899	3.67	19.28	22.95	48.07	-25.12	AVG	Р
5	4.9300	16.81	19.42	36.23	56.00	-19.77	QP	Р
6	4.9300	6.21	19.42	25.63	46.00	-20.37	AVG	Р
7 *	0.7140	27.76	19.44	47.20	56.00	-8.80	QP	Р
8	0.7140	8.07	19.44	27.51	46.00	-18.49	AVG	P
9	0.5740	26.38	19.31	45.69	56.00	-10.31	QP	Р
10	0.5740	11.34	19.31	30.65	46.00	-15.35	AVG	P
11	0.4220	21.92	19.27	41.19	57.41	-16.22	QP	Р
12	0.4220	5.33	19.27	24.60	47.41	-22.81	AVG	Р

****END OF APPENDIX B***