



Shenzhen Lejin radio frequency technology Co., LTD

SPECIFICATIONS FOR APPROVAL

Customer Name: 深圳乐木骆科技有限公司

Product Name: WIFI Antenna

Product Model: PLAF301

Part Number: LJP02-23082108-R0A

Write By : Huxuwen

Issued Date: 2023-08-21

CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVAL

LEJIN

R&D DEPT	ENGINEER DEPT	APPROVAL

REV	MODIFIED DESCRIPTION	DATE	REMARK
V0.1	Initial Draft Release	2023/08/21	



Index

1. Cover	1
2. Index	2
3. Product Specification	3
4. Test Equipment & Conditions	3
5. Test Report	4
6. Reliability Test	5
7. Assemble type	6
8. Product Drawing	7

3.Product Specification

A. Electrical Characteristics	
Frequency	2400MHz ~2500 MHz 5150MHz ~5850 MHz
VSWR	<2.0
Efficiency	≥40%
Impedance	50Ohm
Polarization	Linear
Gain(2.4GHz)	≤2.62dbi
Gain(5GHz)	≤2.69dbi
B. Material & Mechanical Characteristics	
Material of Radiator	PCB(Black)
Cable Type	Φ1.13mm,L100mm,Black
Connector Type	IPX1
Dimension	49.0*14.0mm
C. Environmental	
Operation Temperature	- 20 °C ~ + 70 °C
Storage Temperature	- 30 °C ~ + 85 °C
Humidity	40%~95%

4.Test Equipment & Conditions

- 1.Network Analyzers Agilent 8753D/5071C
- 2.HSPA and LTE protocol test set R&S CMW500 -PT
- 3.Communications Test Set Agilent 8960
- 4.3D Chamber Test System

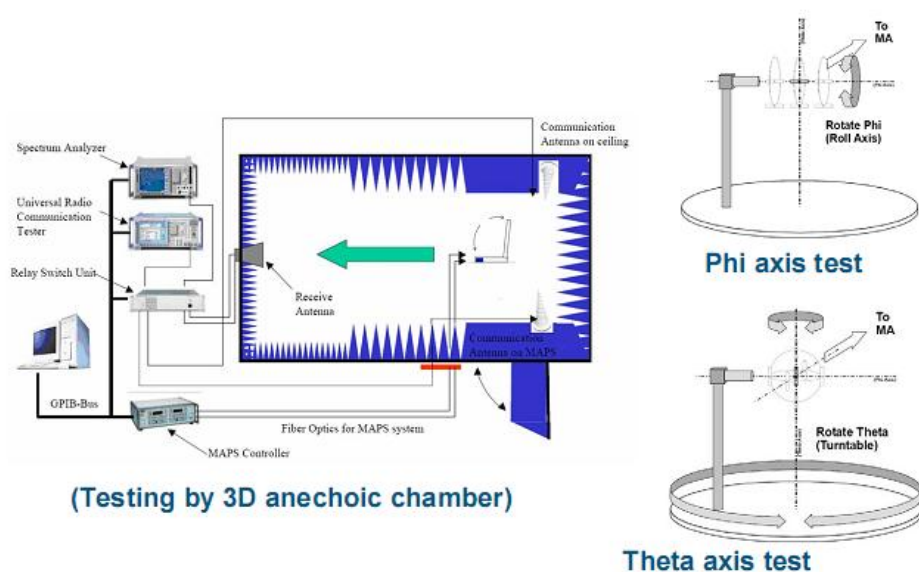


Chart 1 Test topology

5. Test Report

5.1 Voltage Standing Wave Ratio(VSWR).

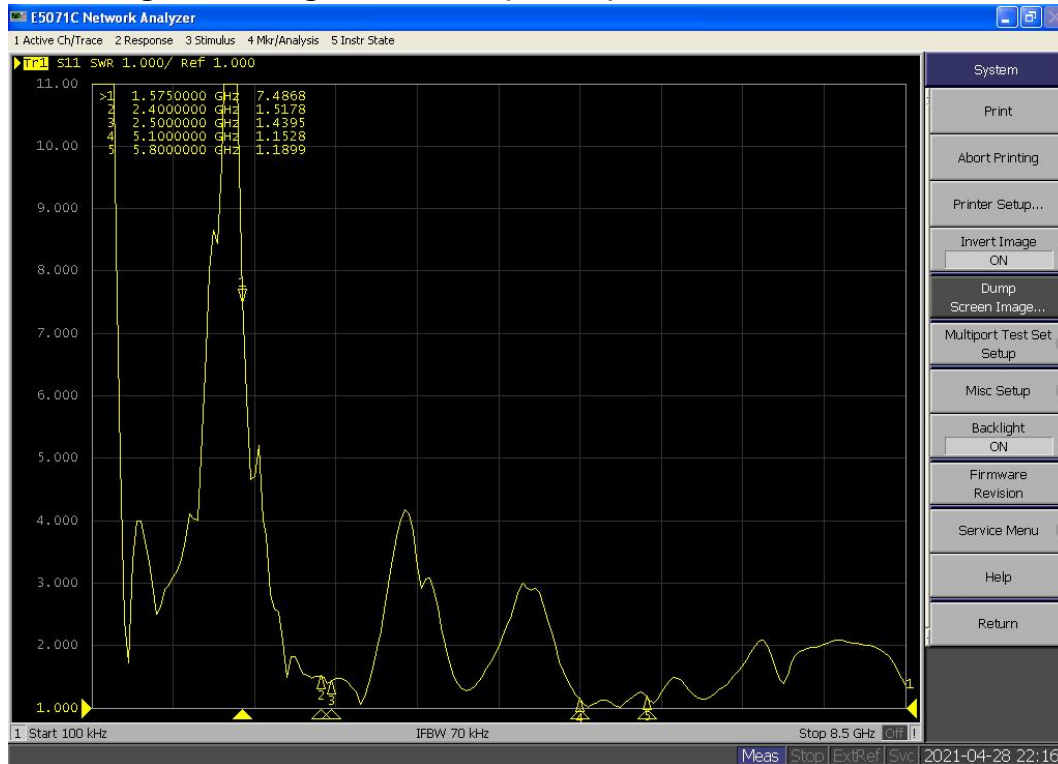



Chart 2 VSWR

5.2 Efficient and gain.

Passive	Freq(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Test	Effi(%)	50.71	53.03	53.58	54.57	56.24	56.11	57.12	58.21	59.29	58.70	59.57
2.4GHz	Gain(dBi)	2.24	2.36	2.40	2.48	2.58	2.58	2.62	2.49	2.54	2.52	2.49



Passive	Freq(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Test WIFI	Effi(%)	65.42	64.86	61.34	63.49	65.85	62.95	62.64	64.74	64.41	62.95	62.57	63.05	64.52	64.46	61.54
5G	Gain(dBi)	2.65	2.50	2.35	2.56	2.56	2.53	2.35	2.56	2.51	2.47	2.51	2.44	2.54	2.69	2.53

5.3 Radiation pattern.

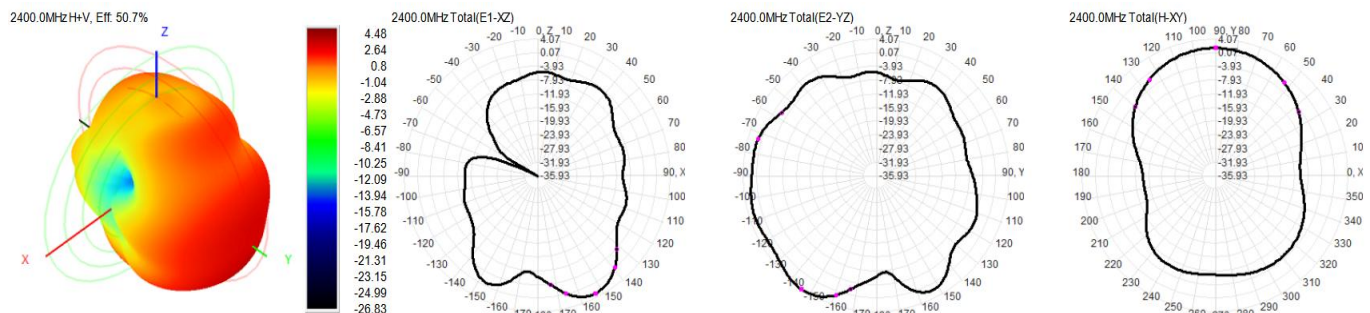





2450.0MHz H+V, Eff: 56.1%

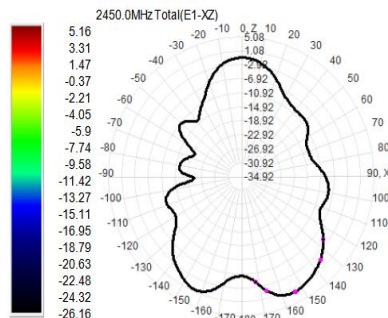



2450.0MHz Total(E2-YZ)




2450.0MHz Total(H-XY)




2500.0MHz H+V, Eff: 56.1%

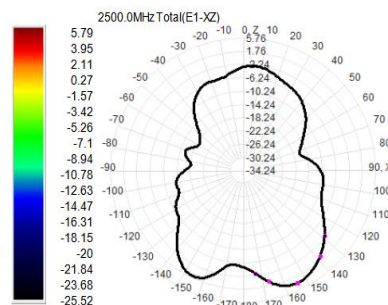



2500.0MHz Total(E2-YZ)




2500.0MHz Total(H-XY)




5150.0MHz H+V, Eff: 59.6%

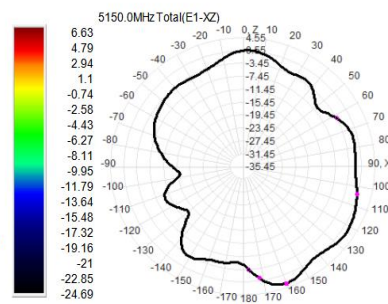



5150.0MHz Total(E2-YZ)




5150.0MHz Total(H-XY)




5500.0MHz H+V, Eff: 64.7%

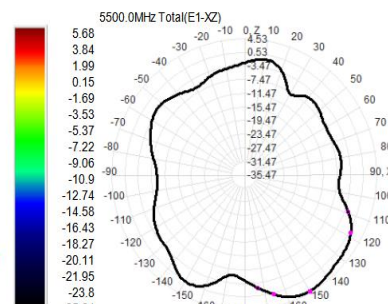



5500.0MHz Total(E2-YZ)




5500.0MHz Total(H-XY)




5850.0MHz H+V, Eff: 61.5%

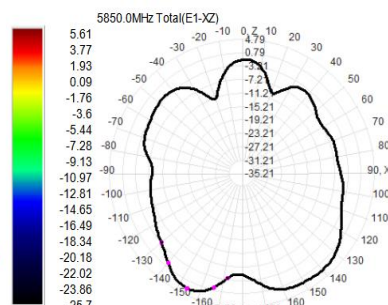

5850.0MHz Total(E2-YZ)



5850.0MHz Total(H-XY)



6. Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
3	Salt-Spray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: $35 \pm 2^\circ\text{C}$ Humidity: 85% NaCl salt spray: $5 \pm 1\%$. PH value: 6.5~7.2 Testtime: 24 hours	Salt-Spray Tester	No color change No appearance rusting	PASS

7. Assemble type



Chart 3 PLAF301 real picture

8. Product Drawing

