


## Channel 11 (2462MHz)


## 100kHz PSD reference Level



## High Band Edge

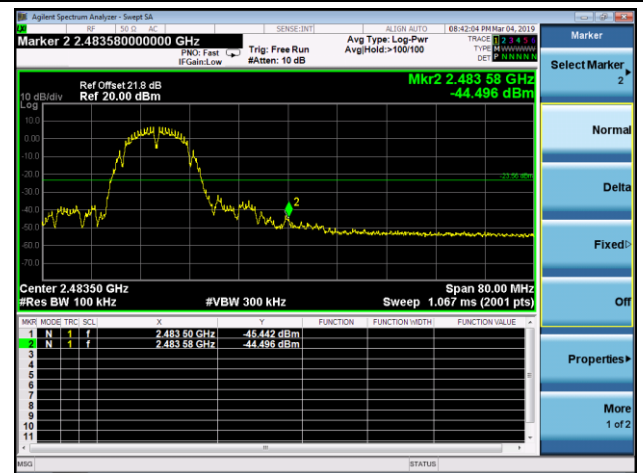


## Spurious Emission

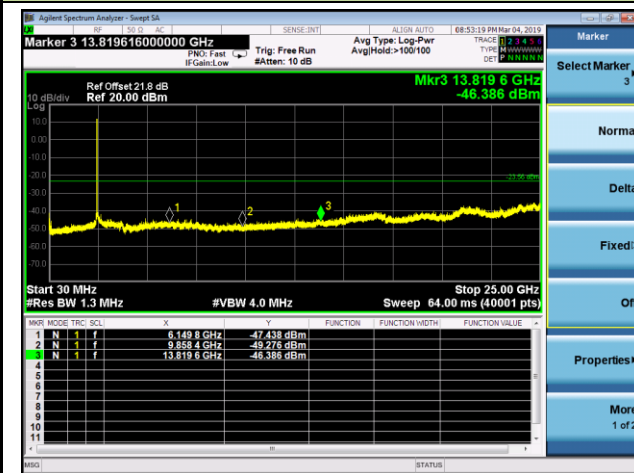


## 802.11g Out-of-Band Emissions- Ant 0 / Ant 0 + 1

## Channel 01 (2412MHz)


## 100kHz PSD reference Level

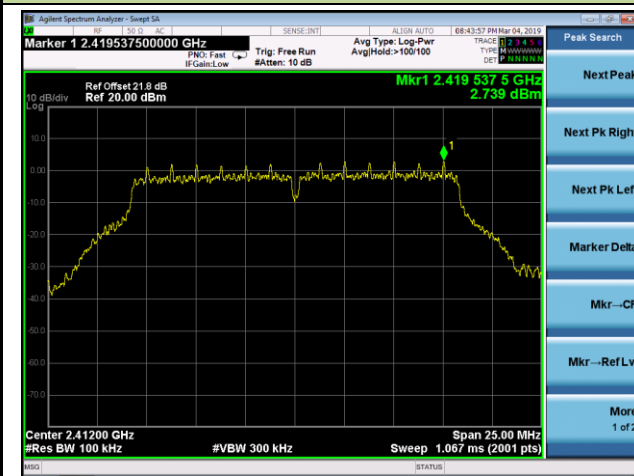

## Low Band Edge

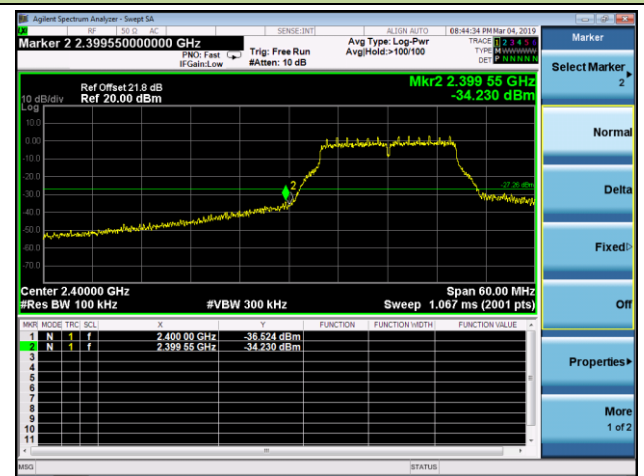


## Spurious Emission

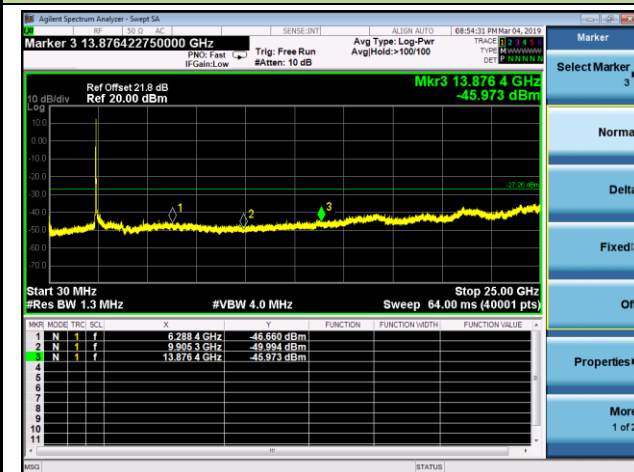


## Channel 06 (2437MHz)

## 100kHz PSD reference Level

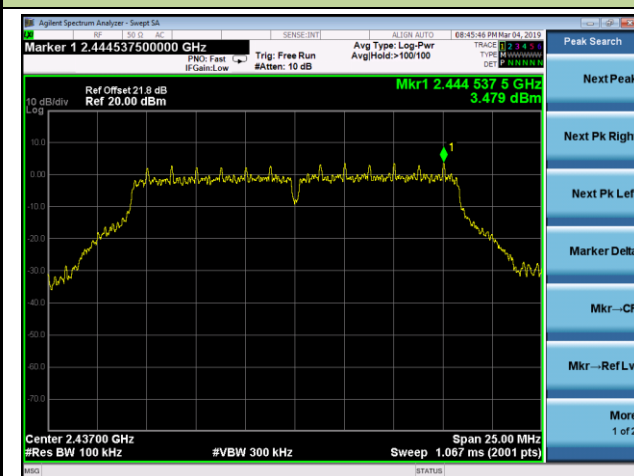


## Spurious Emission

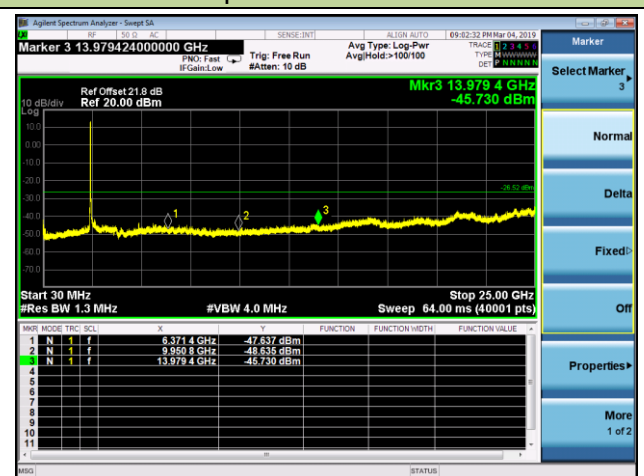


## Channel 11 (2462MHz)


## 100kHz PSD reference Level

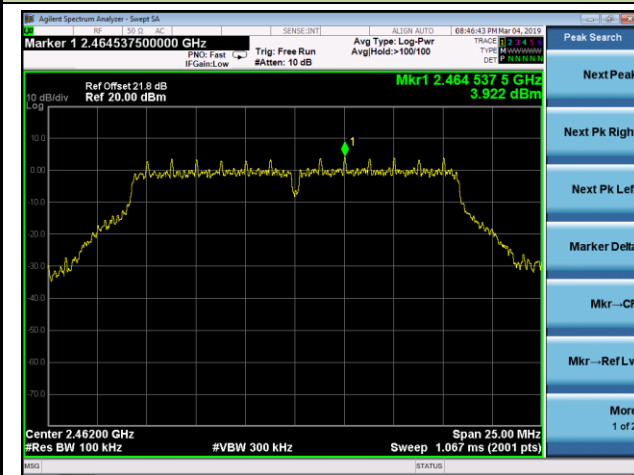

## High Band Edge

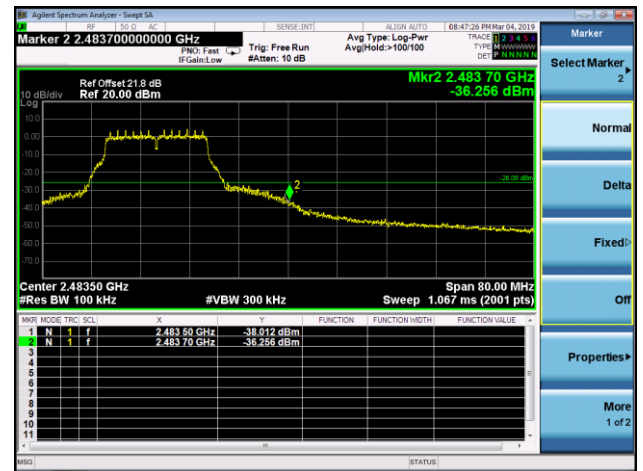


## Spurious Emission

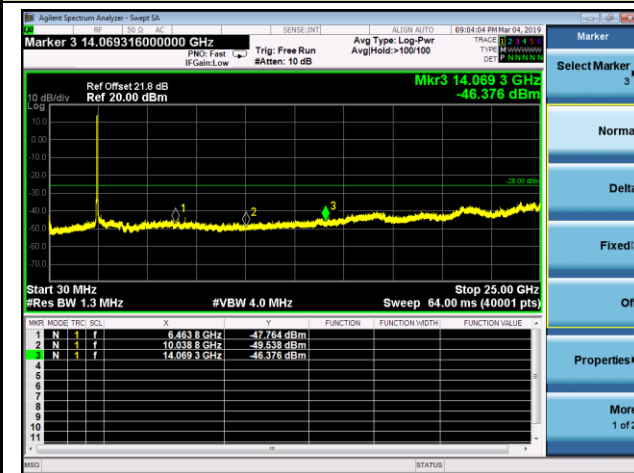


## 802.11n-HT20 Out-of-Band Emissions- Ant 0 / Ant 0 + 1

## Channel 01 (2412MHz)


## 100kHz PSD reference Level

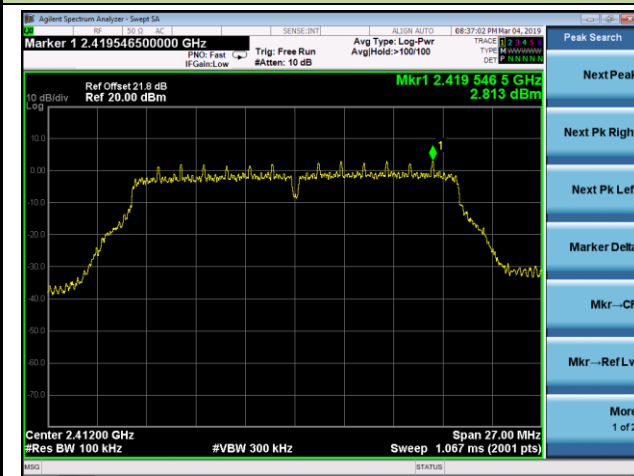

## Low Band Edge

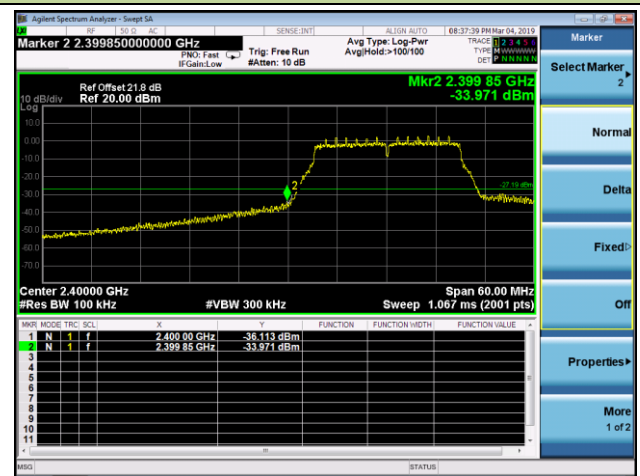


## Spurious Emission

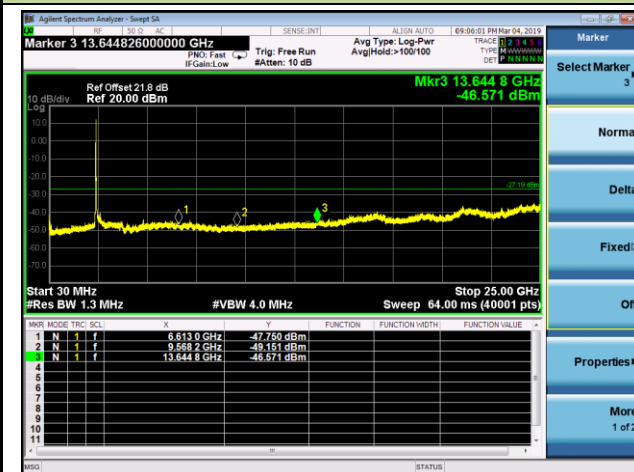


## Channel 06 (2437MHz)

## 100kHz PSD reference Level

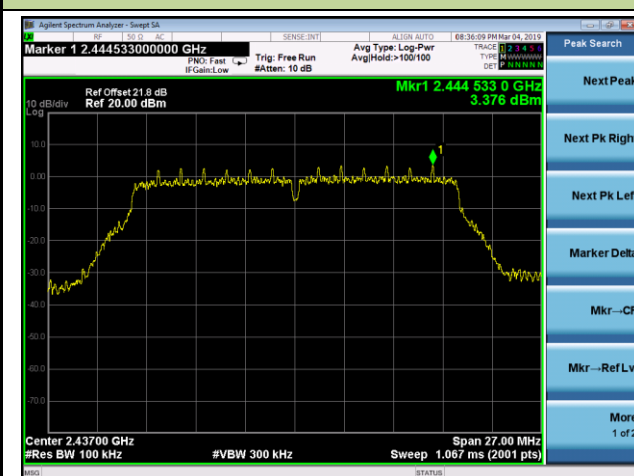

## Spurious Emission

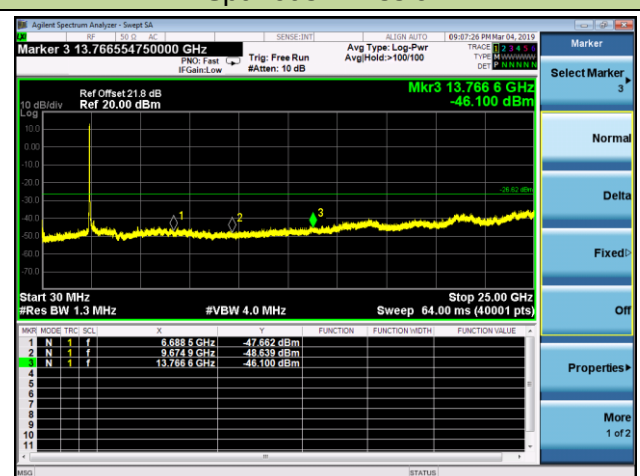


## Channel 11 (2462MHz)


## 100kHz PSD reference Level



## High Band Edge

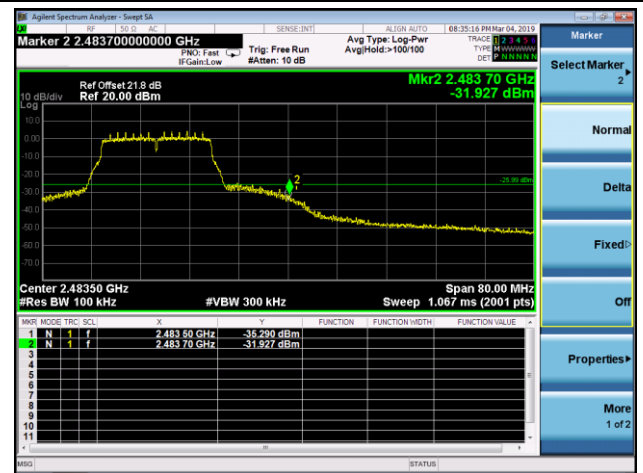

## Spurious Emission

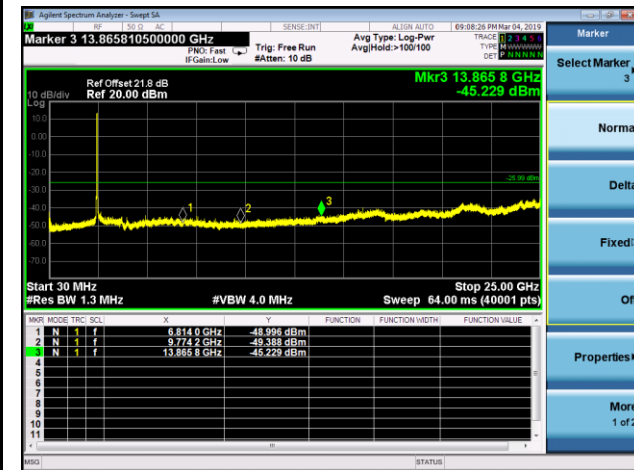

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                         |                               |
|----------------------------------------|-------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[V/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)            | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)           | 30                            |
| 1.705 - 30                             | 30                      | 30                            |
| 30 - 88                                | 100                     | 3                             |
| 88 - 216                               | 150                     | 3                             |
| 216 - 960                              | 200                     | 3                             |
| Above 960                              | 500                     | 3                             |

### 7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 7.6.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**


| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| > 1000 MHz    | 1 MHz         |

### **Average Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 7.6.4.Test Setup

##### 30MHz ~ 1GHz Test Setup:

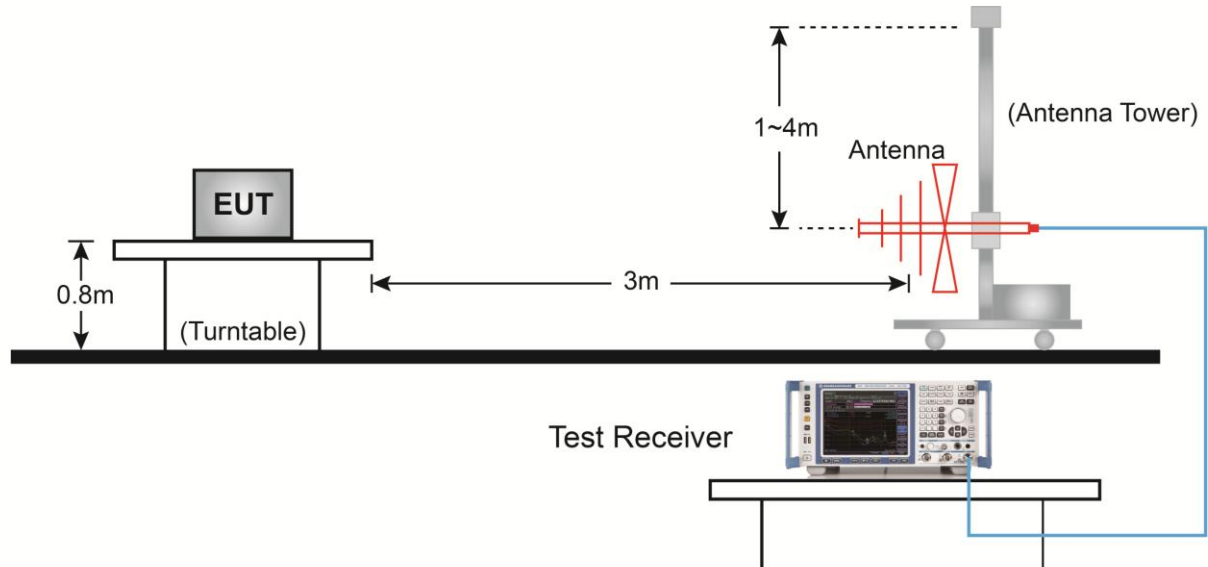

##### 1GHz ~ 18GHz Test Setup:

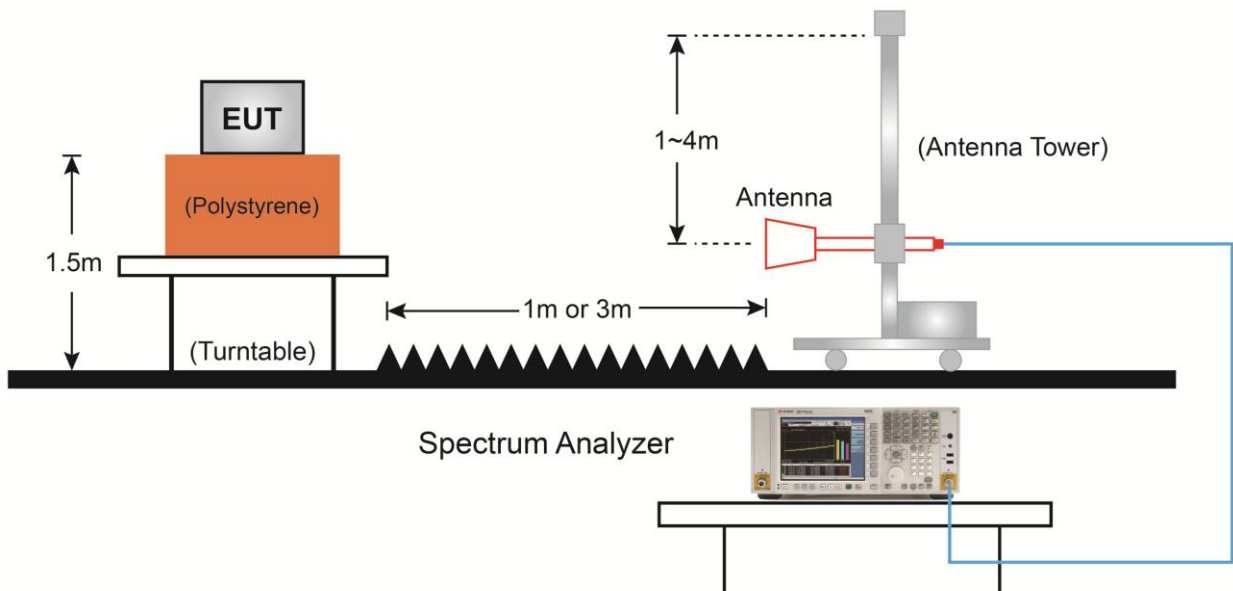

### 7.6.5. Test Result

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11b                                                                                                                                                                                      | Test Channel      | 01         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 3414.0          | 41.1                 | 1.2         | 42.3                   | 75.1           | -32.8       | Peak     | Horizontal   |
| *    | 4451.0          | 44.2                 | 4.6         | 48.8                   | 75.1           | -26.3       | Peak     | Horizontal   |
|      | 4825.0          | 41.9                 | 5.9         | 47.8                   | 74.0           | -26.2       | Peak     | Horizontal   |
|      | 7434.5          | 36.9                 | 12.8        | 49.7                   | 74.0           | -24.3       | Peak     | Horizontal   |
| *    | 3490.5          | 39.3                 | 1.7         | 41.0                   | 75.1           | -34.1       | Peak     | Vertical     |
| *    | 4451.0          | 43.1                 | 4.6         | 47.7                   | 75.1           | -27.4       | Peak     | Vertical     |
|      | 4825.0          | 39.5                 | 5.9         | 45.4                   | 74.0           | -28.6       | Peak     | Vertical     |
|      | 7468.5          | 36.0                 | 12.9        | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is 30dBc of the fundamental emission level (105.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11b                                                                                                                                                                                      | Test Channel      | 06         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 3414.0          | 43.3                 | 1.2         | 44.5                   | 75.3           | -30.8       | Peak     | Horizontal   |
| *    | 4451.0          | 43.0                 | 4.6         | 47.6                   | 75.3           | -27.7       | Peak     | Horizontal   |
|      | 4876.0          | 41.1                 | 6.0         | 47.1                   | 74.0           | -26.9       | Peak     | Horizontal   |
|      | 7460.0          | 36.3                 | 12.9        | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
| *    | 3558.5          | 42.0                 | 2.0         | 44.0                   | 75.3           | -31.3       | Peak     | Vertical     |
| *    | 4451.0          | 42.9                 | 4.6         | 47.5                   | 75.3           | -27.8       | Peak     | Vertical     |
|      | 4876.0          | 39.9                 | 6.0         | 45.9                   | 74.0           | -28.1       | Peak     | Vertical     |
|      | 7417.5          | 36.3                 | 12.7        | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (105.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11b                                                                                                                                                                                      | Test Channel      | 11         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 3533.0          | 37.3                 | 1.9         | 39.2                   | 75.5           | -36.3       | Peak     | Horizontal   |
| *    | 4451.0          | 42.9                 | 4.6         | 47.5                   | 75.5           | -28.0       | Peak     | Horizontal   |
|      | 4927.0          | 42.2                 | 6.1         | 48.3                   | 74.0           | -25.7       | Peak     | Horizontal   |
|      | 7375.0          | 37.0                 | 12.6        | 49.6                   | 74.0           | -24.4       | Peak     | Horizontal   |
| *    | 3558.5          | 41.2                 | 2.0         | 43.2                   | 75.5           | -32.3       | Peak     | Vertical     |
| *    | 4451.0          | 41.0                 | 4.6         | 45.6                   | 75.5           | -29.9       | Peak     | Vertical     |
|      | 4927.0          | 41.4                 | 6.1         | 47.5                   | 74.0           | -26.5       | Peak     | Vertical     |
|      | 7689.5          | 37.0                 | 12.8        | 49.8                   | 74.0           | -24.2       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (105.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11g                                                                                                                                                                                      | Test Channel      | 01         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 4451.0          | 43.9                 | 4.6         | 48.5                   | 76.9           | -28.4       | Peak     | Horizontal   |
| *    | 6227.5          | 40.0                 | 8.6         | 48.6                   | 76.9           | -28.3       | Peak     | Horizontal   |
|      | 7672.5          | 36.3                 | 12.8        | 49.1                   | 74.0           | -24.9       | Peak     | Horizontal   |
|      | 8199.5          | 35.3                 | 13.1        | 48.4                   | 74.0           | -25.6       | Peak     | Horizontal   |
| *    | 4451.0          | 43.0                 | 4.6         | 47.6                   | 76.9           | -29.3       | Peak     | Vertical     |
| *    | 6380.5          | 40.2                 | 9.2         | 49.4                   | 76.9           | -27.5       | Peak     | Vertical     |
|      | 7460.0          | 36.3                 | 12.9        | 49.2                   | 74.0           | -24.8       | Peak     | Vertical     |
|      | 8250.5          | 36.1                 | 12.9        | 49.0                   | 74.0           | -25.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (106.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11g                                                                                                                                                                                      | Test Channel      | 06         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 3422.5          | 40.1                 | 1.3         | 41.4                   | 77.1           | -35.7       | Peak     | Horizontal   |
| *    | 4451.0          | 42.9                 | 4.6         | 47.5                   | 77.1           | -29.6       | Peak     | Horizontal   |
|      | 4876.0          | 41.0                 | 6.0         | 47.0                   | 74.0           | -27.0       | Peak     | Horizontal   |
|      | 7528.0          | 36.2                 | 12.8        | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
| *    | 4451.0          | 41.6                 | 4.6         | 46.2                   | 77.1           | -30.9       | Peak     | Vertical     |
| *    | 6380.5          | 40.3                 | 9.2         | 49.5                   | 77.1           | -27.6       | Peak     | Vertical     |
|      | 7638.5          | 36.3                 | 12.6        | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
|      | 8267.5          | 36.8                 | 12.8        | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (107.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11g                                                                                                                                                                                      | Test Channel      | 11         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 4451.0          | 44.7                 | 4.6         | 49.3                   | 77.3           | -28.0       | Peak     | Horizontal   |
| *    | 6227.5          | 38.3                 | 8.6         | 46.9                   | 77.3           | -30.4       | Peak     | Horizontal   |
|      | 7477.0          | 36.3                 | 12.9        | 49.2                   | 74.0           | -24.8       | Peak     | Horizontal   |
|      | 8267.5          | 37.1                 | 12.8        | 49.9                   | 74.0           | -24.1       | Peak     | Horizontal   |
| *    | 4451.0          | 44.5                 | 4.6         | 49.1                   | 77.3           | -28.2       | Peak     | Vertical     |
| *    | 6380.5          | 40.9                 | 9.2         | 50.1                   | 77.3           | -27.2       | Peak     | Vertical     |
|      | 7494.0          | 36.2                 | 12.7        | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
|      | 8276.0          | 35.2                 | 12.8        | 48.0                   | 74.0           | -26.0       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (107.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11n-HT20                                                                                                                                                                                 | Test Channel      | 01         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 4451.0          | 42.1                 | 4.6         | 46.7                   | 76.4           | -29.7       | Peak     | Horizontal   |
| *    | 6236.0          | 38.3                 | 8.6         | 46.9                   | 76.4           | -29.5       | Peak     | Horizontal   |
|      | 7545.0          | 36.3                 | 13.0        | 49.3                   | 74.0           | -24.7       | Peak     | Horizontal   |
|      | 8242.0          | 36.1                 | 13.0        | 49.1                   | 74.0           | -24.9       | Peak     | Horizontal   |
| *    | 4451.0          | 43.3                 | 4.6         | 47.9                   | 76.4           | -28.5       | Peak     | Vertical     |
| *    | 6380.5          | 40.2                 | 9.2         | 49.4                   | 76.4           | -27.0       | Peak     | Vertical     |
|      | 7451.5          | 37.2                 | 12.9        | 50.1                   | 74.0           | -23.9       | Peak     | Vertical     |
|      | 8250.5          | 37.6                 | 12.9        | 50.5                   | 74.0           | -23.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (106.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11n-HT20                                                                                                                                                                                 | Test Channel      | 06         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 3422.5          | 43.3                 | 1.3         | 44.6                   | 76.5           | -31.9       | Peak     | Horizontal   |
| *    | 4451.0          | 43.2                 | 4.6         | 47.8                   | 76.5           | -28.7       | Peak     | Horizontal   |
|      | 7553.5          | 37.1                 | 13.0        | 50.1                   | 74.0           | -23.9       | Peak     | Horizontal   |
|      | 8250.5          | 36.6                 | 12.9        | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
| *    | 4451.0          | 41.4                 | 4.6         | 46.0                   | 76.5           | -30.5       | Peak     | Vertical     |
| *    | 6380.5          | 41.4                 | 9.2         | 50.6                   | 76.5           | -25.9       | Peak     | Vertical     |
|      | 7468.5          | 36.7                 | 12.9        | 49.6                   | 74.0           | -24.4       | Peak     | Vertical     |
|      | 8293.0          | 36.2                 | 12.7        | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is 30dBc of the fundamental emission level (106.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                              |                   |            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | WIFI+BT Combo Module                                                                                                                                                                         | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                                     | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                                          | Test Date         | 2019/02/27 |
| Test Mode     | 802.11n-HT20                                                                                                                                                                                 | Test Channel      | 11         |
| Remark        | 1. Average measurement was not performed if peak level lower than average limit (54dBμV/m).<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
| *    | 3422.5          | 41.8                 | 1.3         | 43.1                   | 76.7           | -33.6       | Peak     | Horizontal   |
| *    | 4451.0          | 41.0                 | 4.6         | 45.6                   | 76.7           | -31.1       | Peak     | Horizontal   |
|      | 4927.0          | 39.3                 | 6.1         | 45.4                   | 74.0           | -28.6       | Peak     | Horizontal   |
|      | 7570.5          | 36.6                 | 12.9        | 49.5                   | 74.0           | -24.5       | Peak     | Horizontal   |
| *    | 4451.0          | 42.5                 | 4.6         | 47.1                   | 76.7           | -29.6       | Peak     | Vertical     |
| *    | 6380.5          | 40.1                 | 9.2         | 49.3                   | 76.7           | -27.4       | Peak     | Vertical     |
|      | 7477.0          | 37.1                 | 12.9        | 50.0                   | 74.0           | -24.0       | Peak     | Vertical     |
|      | 8276.0          | 36.3                 | 12.8        | 49.1                   | 74.0           | -24.9       | Peak     | Vertical     |


Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (106.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The worst case of Radiated Emission below 1GHz:

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/03/13 - 03:17 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Messiah Li     |
| Probe: VULB 9168 _20-2000MHz                                                       | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                                          | Power: AC 120V/60Hz      |
| <b>Worst Case Mode: There is the worst case within frequency range 30MHz~1GHz.</b> |                          |

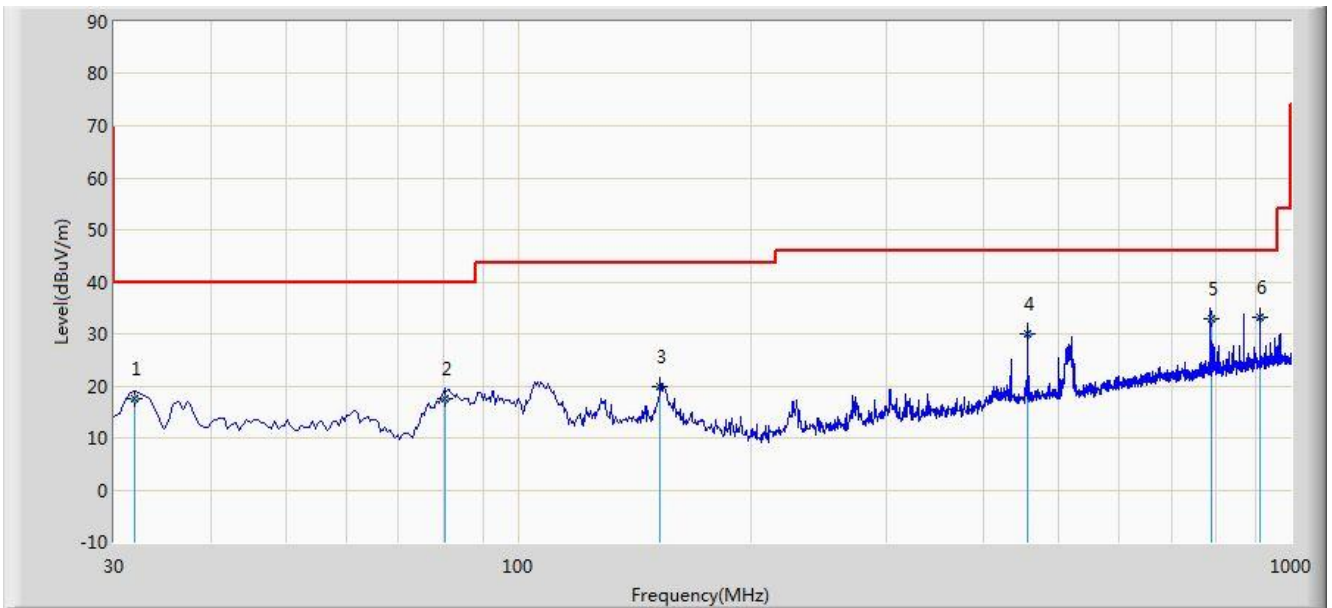


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 31.860          | 17.458                 | 3.650                | -22.542     | 40.000         | 13.808      | QP   |
| 2  |      | 80.420          | 17.619                 | 7.450                | -22.381     | 40.000         | 10.169      | QP   |
| 3  |      | 152.740         | 19.850                 | 4.560                | -23.650     | 43.500         | 15.290      | QP   |
| 4  |      | 455.620         | 30.022                 | 12.030               | -15.978     | 46.000         | 17.992      | QP   |
| 5  |      | 787.540         | 32.803                 | 9.580                | -13.197     | 46.000         | 23.223      | QP   |
| 6  | *    | 912.200         | 33.249                 | 8.650                | -12.751     | 46.000         | 24.599      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/03/13 - 03:19 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Messiah Li     |
| Probe: VULB 9168 _20-2000MHz                                                       | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                                          | Power: AC 120V/60Hz      |
| <b>Worst Case Mode: There is the worst case within frequency range 30MHz~1GHz.</b> |                          |

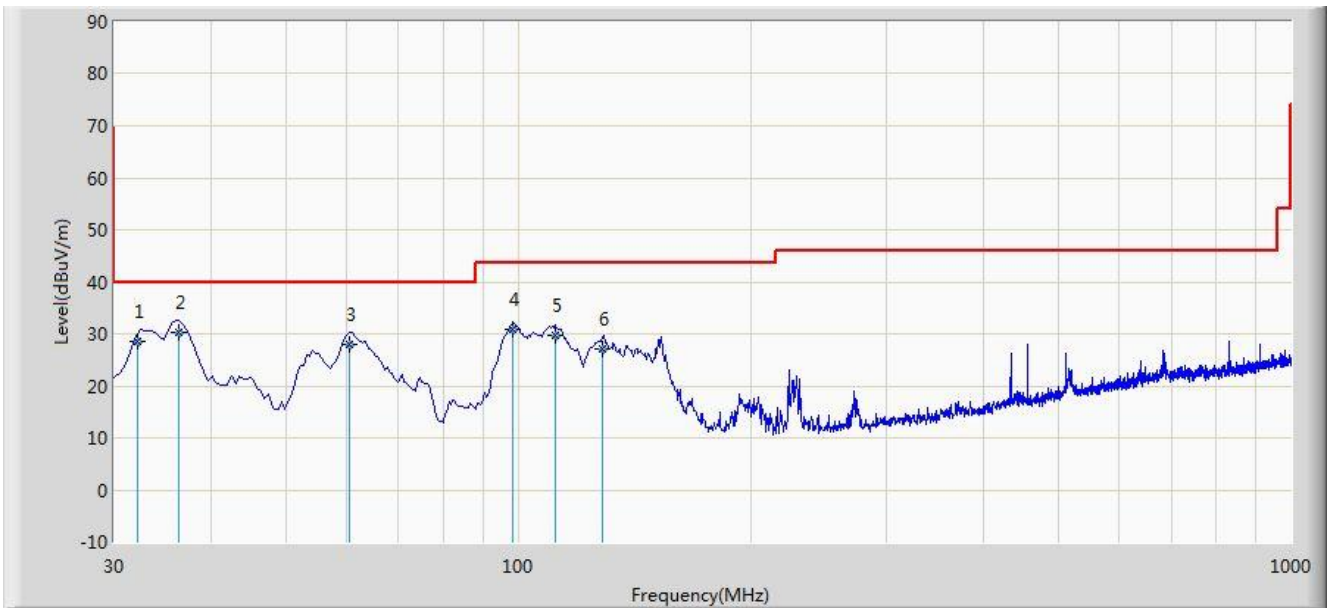

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 32.150          | 28.640                 | 14.820               | -11.360     | 40.000         | 13.820      | QP   |
| 2  | *    | 36.320          | 30.378                 | 16.250               | -9.622      | 40.000         | 14.127      | QP   |
| 3  |      | 60.520          | 28.060                 | 14.720               | -11.940     | 40.000         | 13.339      | QP   |
| 4  |      | 98.350          | 30.784                 | 19.840               | -12.716     | 43.500         | 10.944      | QP   |
| 5  |      | 111.980         | 29.772                 | 17.450               | -13.728     | 43.500         | 12.322      | QP   |
| 6  |      | 128.650         | 27.014                 | 13.260               | -16.486     | 43.500         | 13.754      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)  | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|---------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9       | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17   | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2      | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285           | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4         | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                  | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

**For RSS-Gen Section 8.10 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

| Frequency<br>(MHz)  | Frequency<br>(MHz)     | Frequency<br>(GHz) |
|---------------------|------------------------|--------------------|
| 0.009 - 0.110       | 149.9 - 150.05         | 9.0 - 9.2          |
| 0.495 - 0.505       | 156.52475 - 156.525225 | 9.3 - 9.5          |
| 2.1735 - 2.1905     | 156.7 - 156.9          | 10.6 - 12.7        |
| 3.020 - 3.026       | 162.0125 - 167.17      | 13.25 - 13.4       |
| 4.125 - 4.128       | 167.72 - 173.2         | 14.47 - 14.5       |
| 4.17725 - 4.17775   | 240 - 285              | 15.35 - 16.2       |
| 4.20725 - 4.20775   | 322 - 335.4            | 17.7 - 21.4        |
| 5.677 - 5.683       | 399.9 - 410            | 22.01 - 23.12      |
| 6.215 - 6.218       | 608 - 614              | 23.6 - 24.0        |
| 6.26775 - 6.26825   | 960 - 1427             | 31.2 - 31.8        |
| 6.31175 - 6.31225   | 1435 - 1626.5          | 36.43 - 36.5       |
| 8.291 - 8.294       | 1645.5 - 1646.5        | Above 38.6         |
| 8.362 - 8.366       | 1660 - 1710            | --                 |
| 8.37625 - 8.38675   | 1718.8 -1722.2         |                    |
| 8.41425 - 8.41475   | 2200 - 2300            |                    |
| 12.29 - 12.293      | 2310 -2390             |                    |
| 12.51975 - 12.52025 | 2655 - 2900            |                    |
| 12.57675 - 12.57725 | 3260 - 3267            |                    |
| 13.36 -13.41        | 3332 -3339             |                    |
| 16.42 - 16.423      | 334.5 - 3358           |                    |
| 16.69475 - 16.69525 | 3500 - 4400            |                    |
| 16.80425 - 16.80475 | 4500 - 5150            |                    |
| 25.5 - 25.67        | 5350 - 5460            |                    |
| 37.5 - 38.25        | 7250 - 7750            |                    |
| 73 - 74.6           | 8025 - 8500            |                    |
| 74.8 - 75.2         | --                     |                    |
| 108 - 138           |                        |                    |

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

| RSS-Gen Section 8.9 |                          |                               |
|---------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]  | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490       | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705       | 24000/F (kHz)            | 30                            |
| 1.705 - 30          | 30                       | 30                            |
| 30 - 88             | 100                      | 3                             |
| 88 - 216            | 150                      | 3                             |
| 216 - 960           | 200                      | 3                             |
| Above 960           | 500                      | 3                             |

### 7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 7.7.3. Test Setting


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW  $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

#### 7.7.4.Test Setup

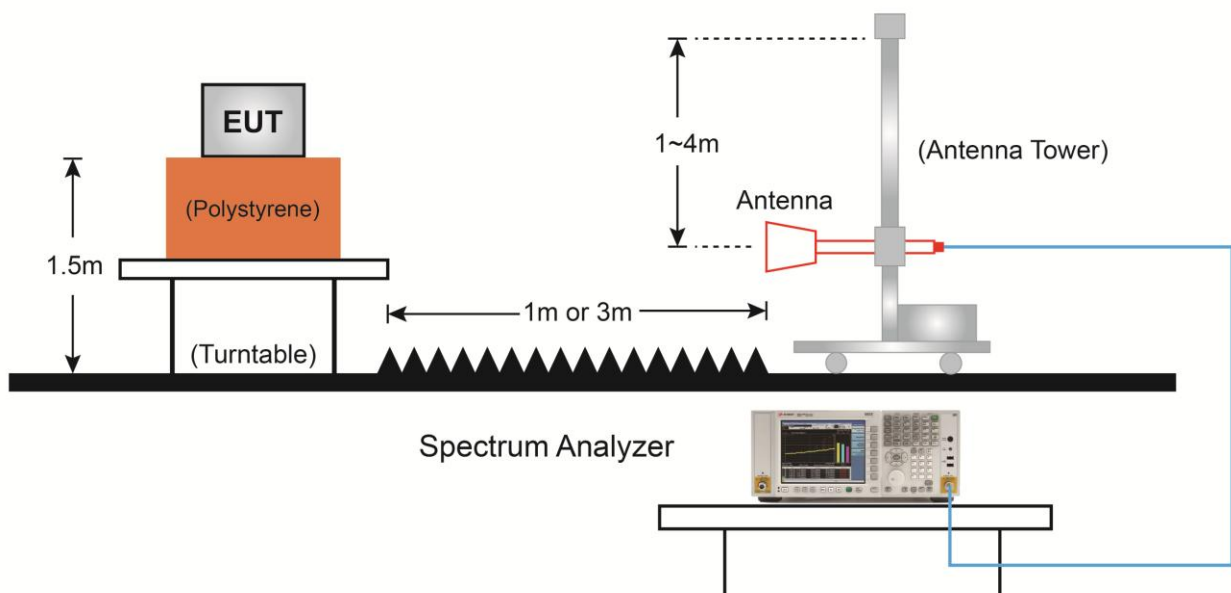

### 7.7.5.Test Result

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 01:55 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz |                          |

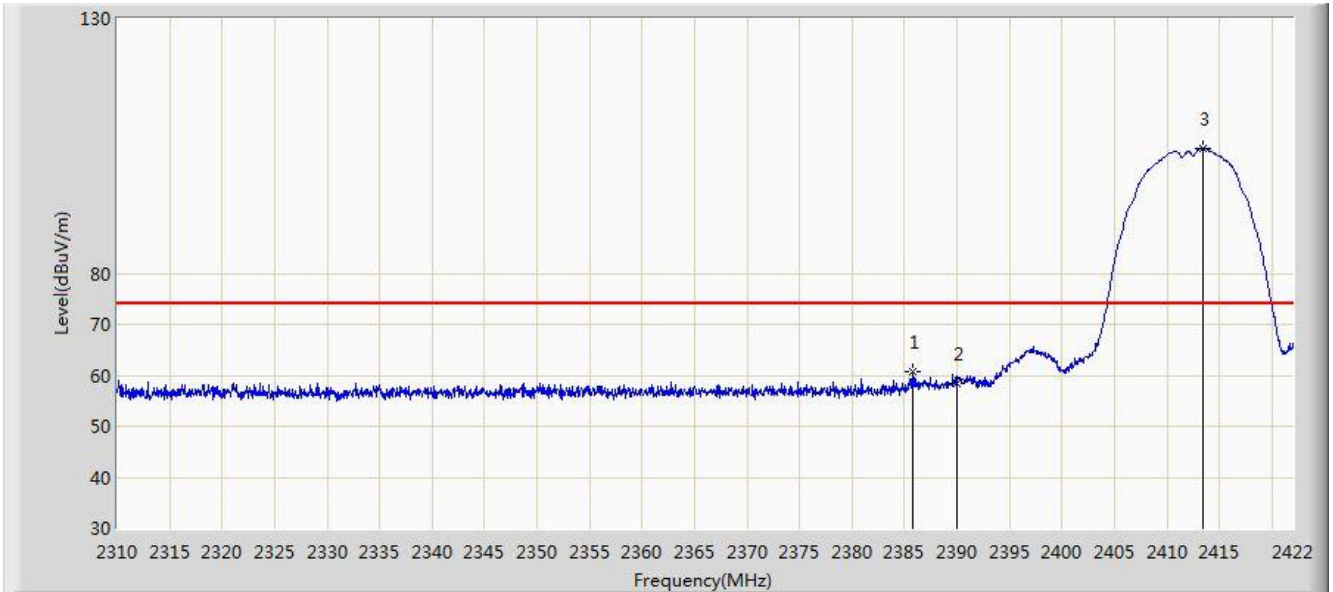


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2385.824        | 60.766                 | 28.433               | -13.234     | 74.000         | 32.333      | PK   |
| 2  |      |      | 2390.000        | 58.326                 | 25.999               | -15.674     | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2413.432        | 104.496                | 72.212               | N/A         | N/A            | 32.285      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 01:59 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz |                          |

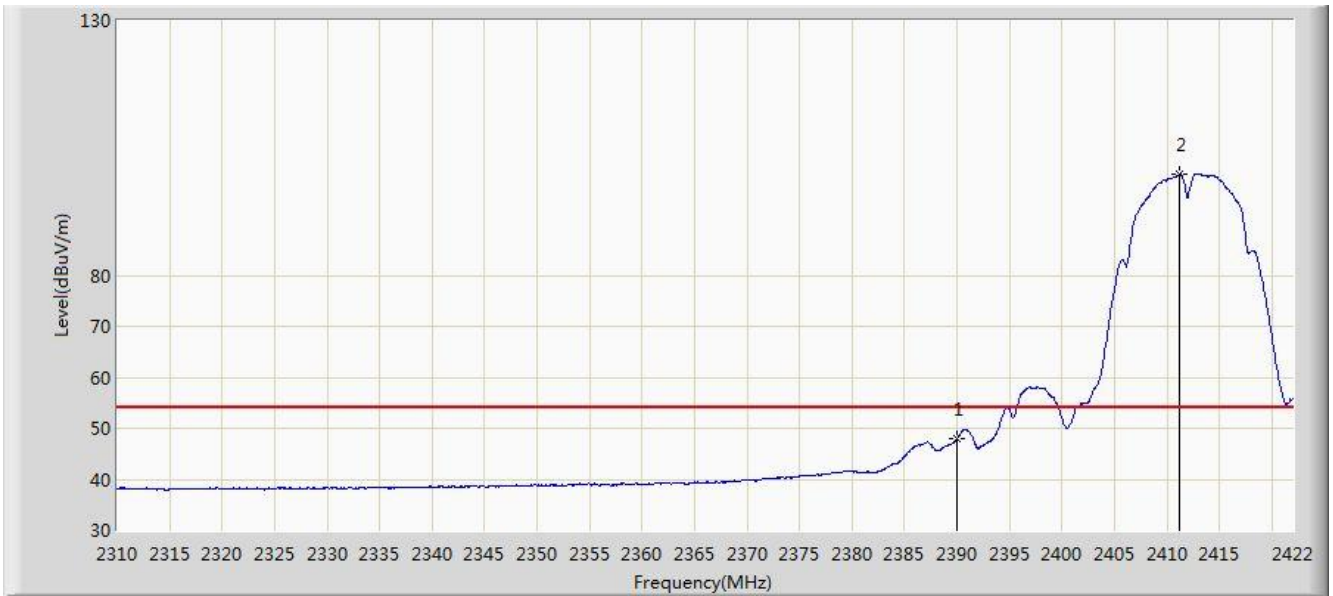


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.900                 | 15.573               | -6.100      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2411.136        | 99.812                 | 67.527               | N/A         | N/A            | 32.285      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:00 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz |                          |

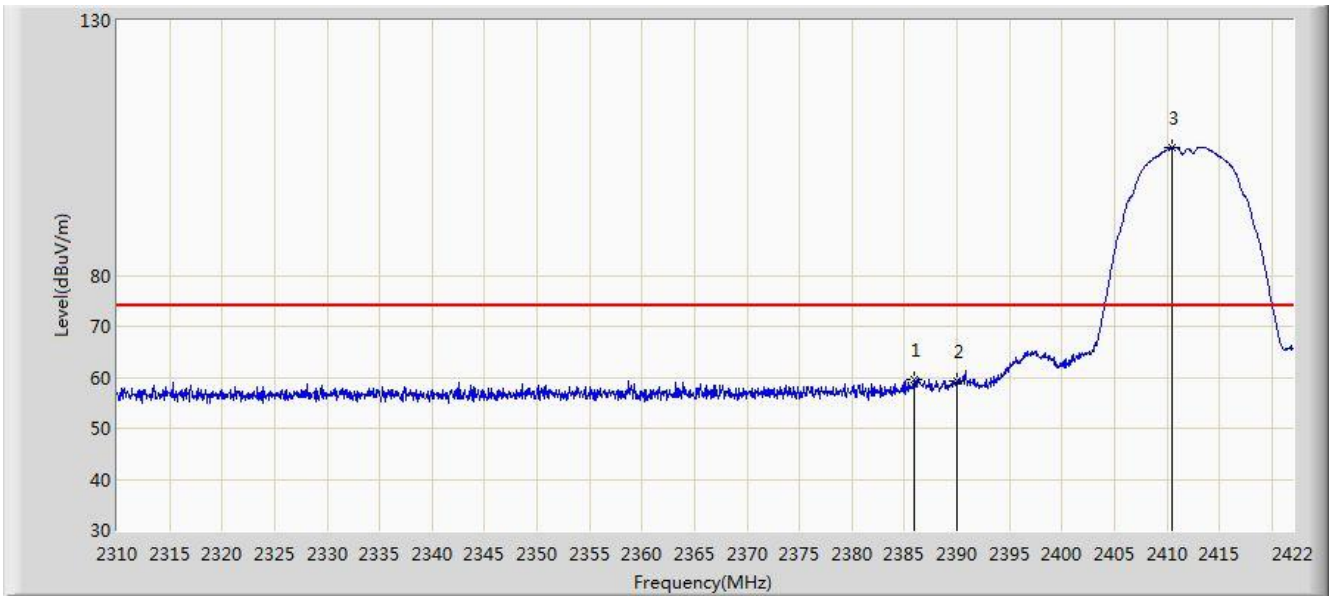

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2385.880        | 59.689                 | 27.357               | -14.311     | 74.000         | 32.333      | PK   |
| 2  |      |      | 2390.000        | 59.229                 | 26.902               | -14.771     | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2410.464        | 105.102                | 72.816               | N/A         | N/A            | 32.287      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:02 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.999                 | 14.672               | -7.001      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2411.304        | 101.158                | 68.873               | N/A         | N/A            | 32.286      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:03 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz |                          |

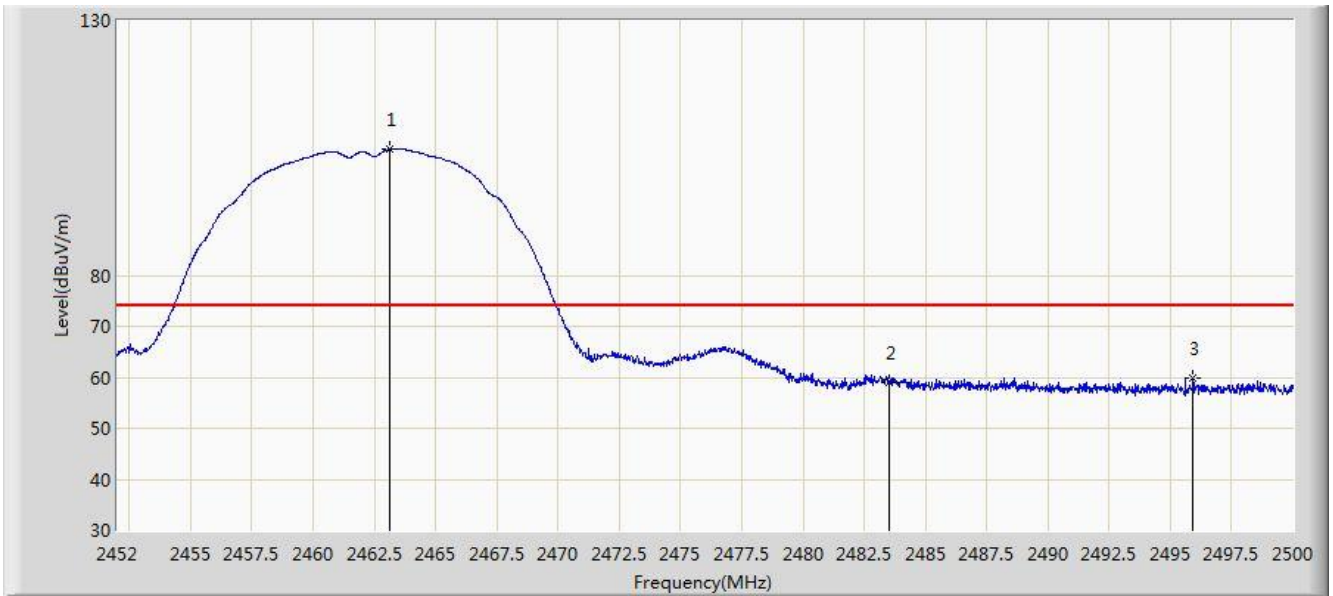

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2463.136        | 104.693                | 72.411               | N/A         | N/A            | 32.282      | PK   |
| 2  |      |      | 2483.500        | 58.995                 | 26.656               | -15.005     | 74.000         | 32.340      | PK   |
| 3  |      |      | 2495.920        | 59.756                 | 27.368               | -14.244     | 74.000         | 32.388      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:05 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2462.680        | 99.433                 | 67.152               | N/A         | N/A            | 32.281      | AV   |
| 2  |      |      | 2483.500        | 47.637                 | 15.298               | -6.363      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:06 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz |                          |

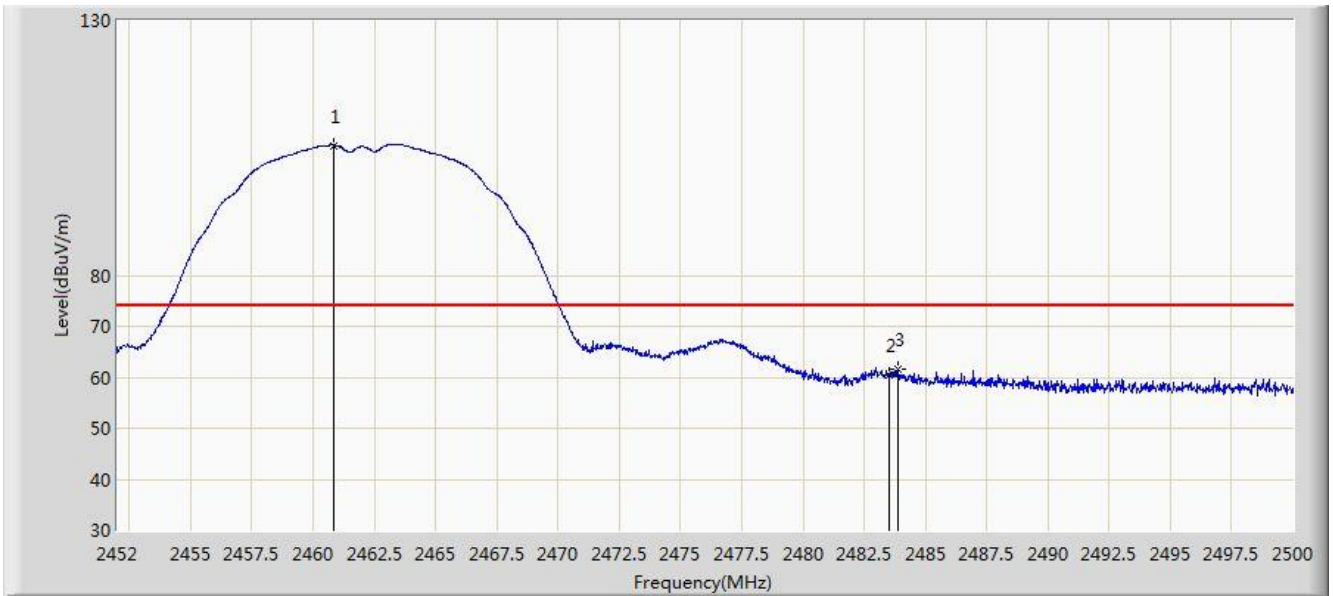

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2460.856        | 105.497                | 73.219               | N/A         | N/A            | 32.278      | PK   |
| 2  |      |      | 2483.500        | 60.467                 | 28.128               | -13.533     | 74.000         | 32.340      | PK   |
| 3  |      |      | 2483.896        | 61.683                 | 29.342               | -12.317     | 74.000         | 32.340      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:07 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2461.384        | 101.300                | 69.021               | N/A         | N/A            | 32.279      | AV   |
| 2  |      |      | 2483.500        | 50.168                 | 17.829               | -3.832      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:09 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz |                          |

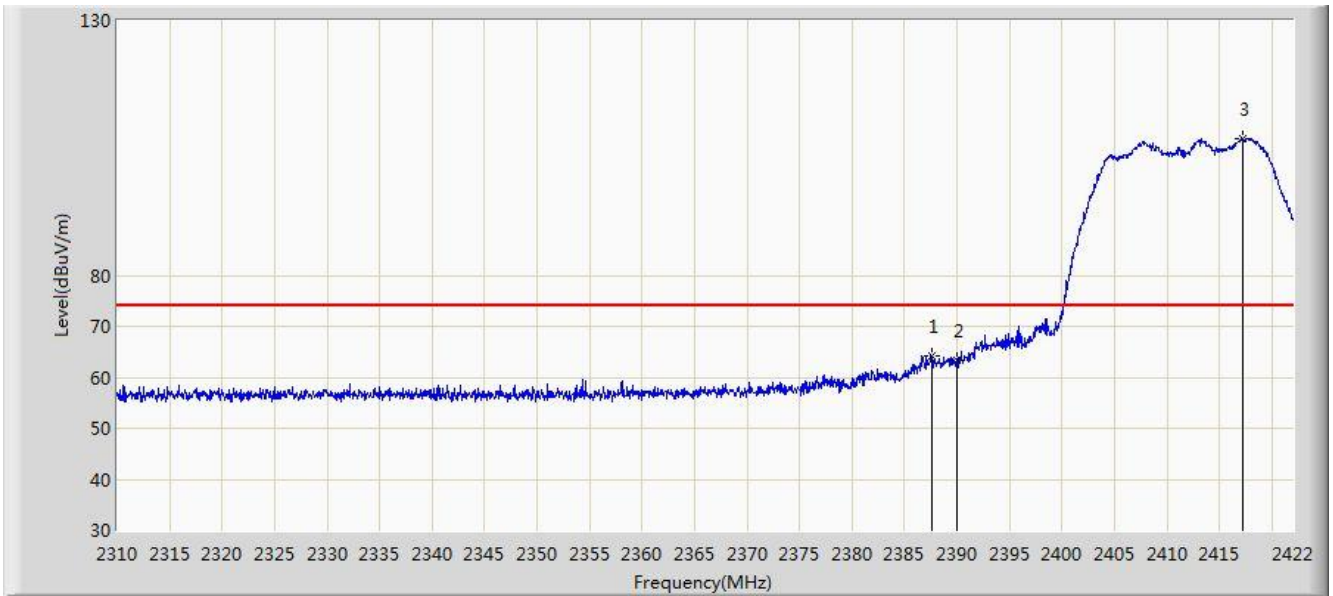


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2387.672        | 64.323                 | 31.993               | -9.677      | 74.000         | 32.330      | PK   |
| 2  |      |      | 2390.000        | 63.433                 | 31.106               | -10.567     | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2417.296        | 106.876                | 74.593               | N/A         | N/A            | 32.282      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:12 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz |                          |

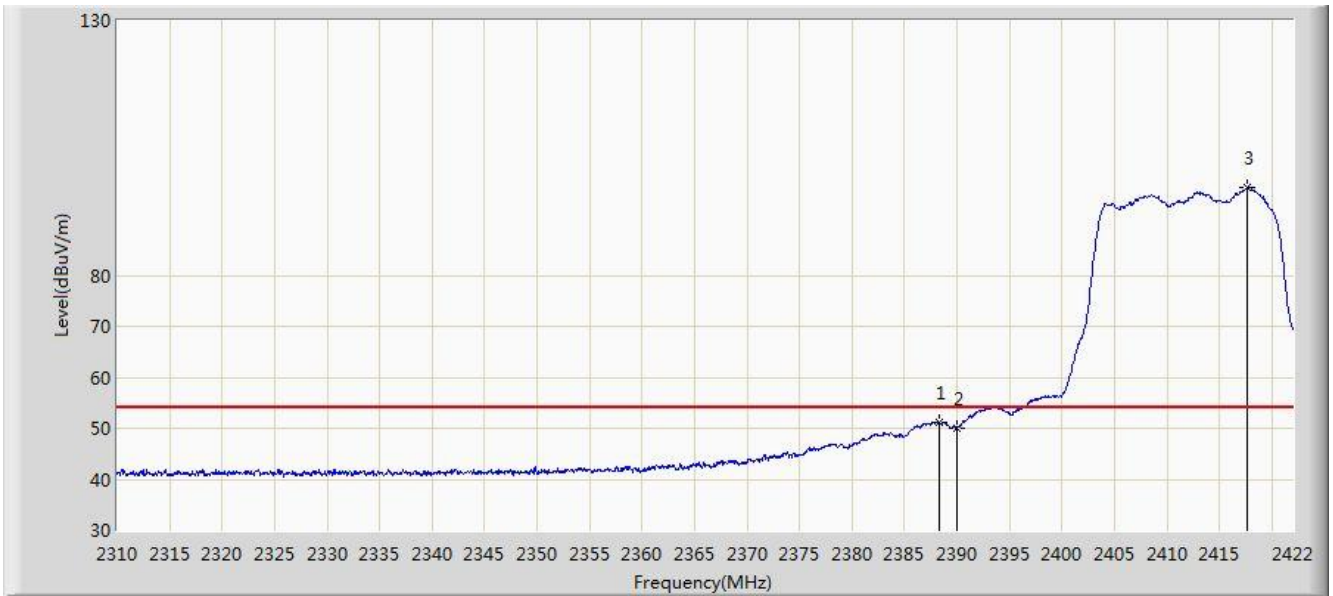


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2388.344        | 51.102                 | 18.773               | -2.898      | 54.000         | 32.329      | AV   |
| 2  |      |      | 2390.000        | 50.144                 | 17.817               | -3.856      | 54.000         | 32.327      | AV   |
| 3  |      | *    | 2417.688        | 97.274                 | 64.992               | N/A         | N/A            | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:13 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz |                          |

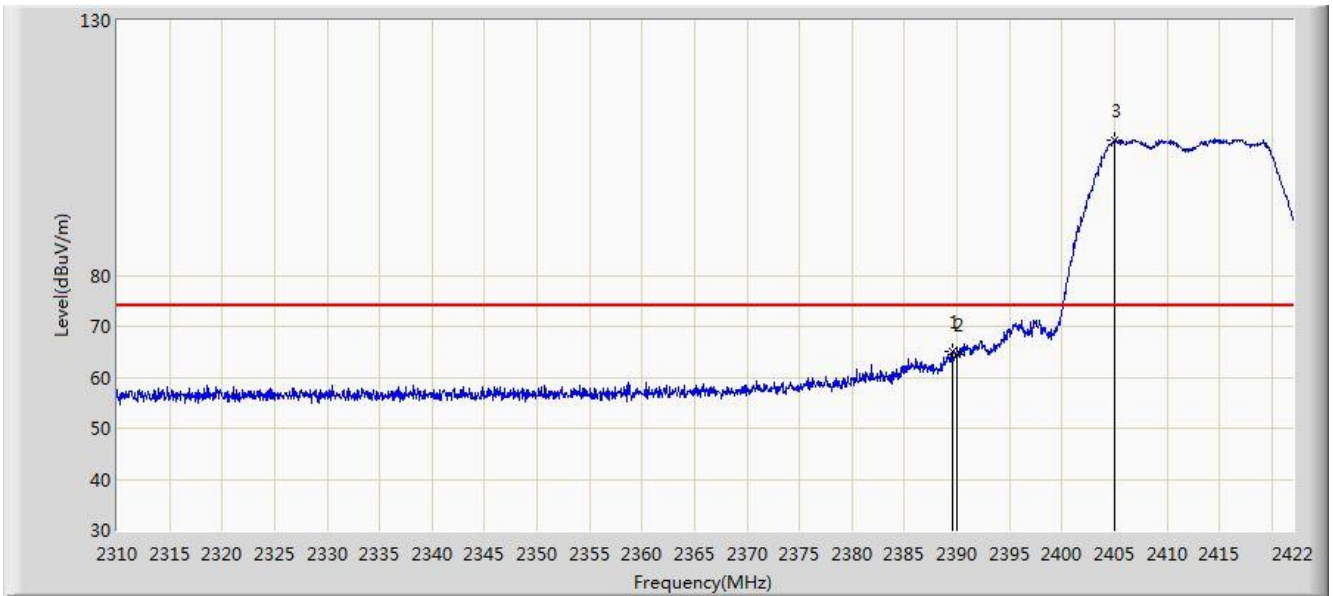


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.576        | 64.958                 | 32.631               | -9.042      | 74.000         | 32.328      | PK   |
| 2  |      |      | 2390.000        | 64.416                 | 32.089               | -9.584      | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2405.032        | 106.595                | 74.297               | N/A         | N/A            | 32.298      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:14 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz |                          |

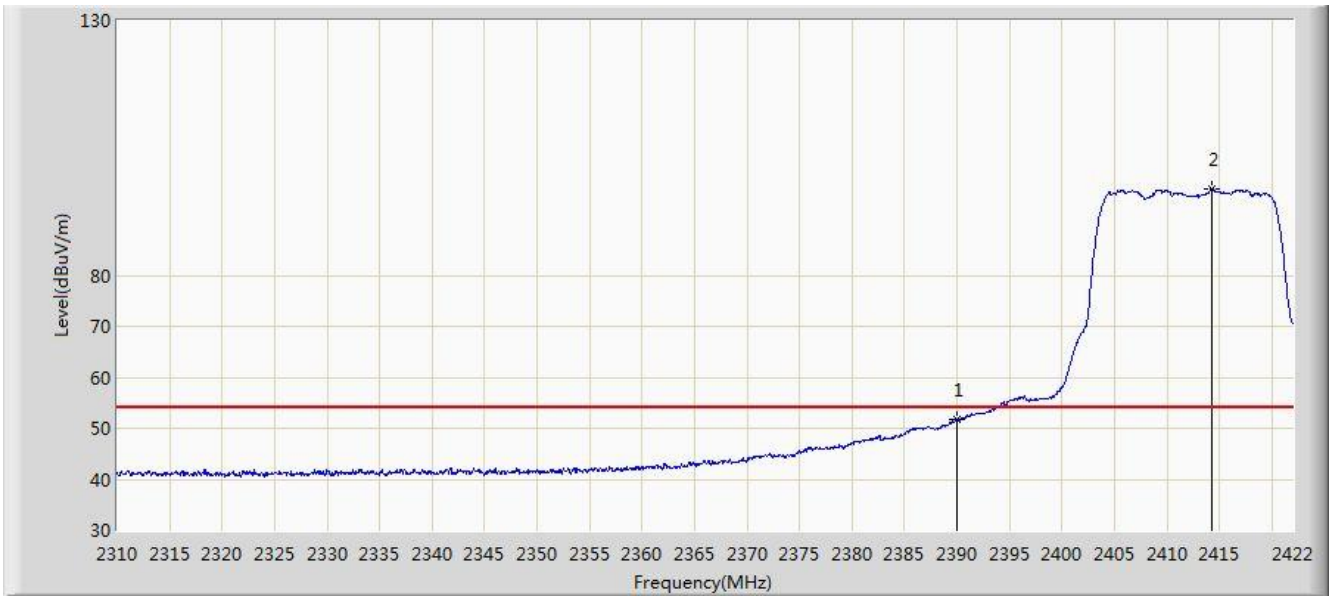

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 51.606                 | 19.279               | -2.394      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2414.328        | 96.991                 | 64.707               | N/A         | N/A            | 32.283      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:31 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2467.696        | 106.563                | 74.270               | N/A         | N/A            | 32.293      | PK   |
| 2  |      |      | 2483.500        | 67.606                 | 35.267               | -6.394      | 74.000         | 32.340      | PK   |
| 3  |      |      | 2483.560        | 68.996                 | 36.657               | -5.004      | 74.000         | 32.340      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:32 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz |                          |

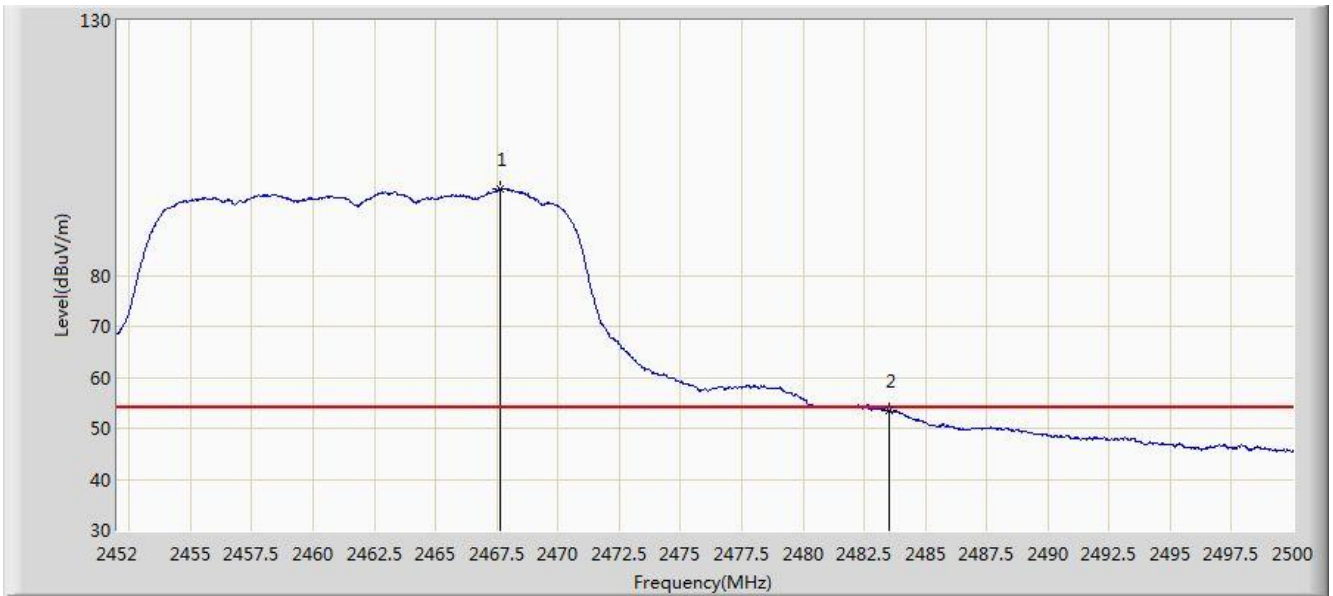


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2467.648        | 96.970                 | 64.677               | N/A         | N/A            | 32.293      | AV   |
| 2  |      |      | 2483.500        | 53.462                 | 21.123               | -0.538      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:30 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz |                          |

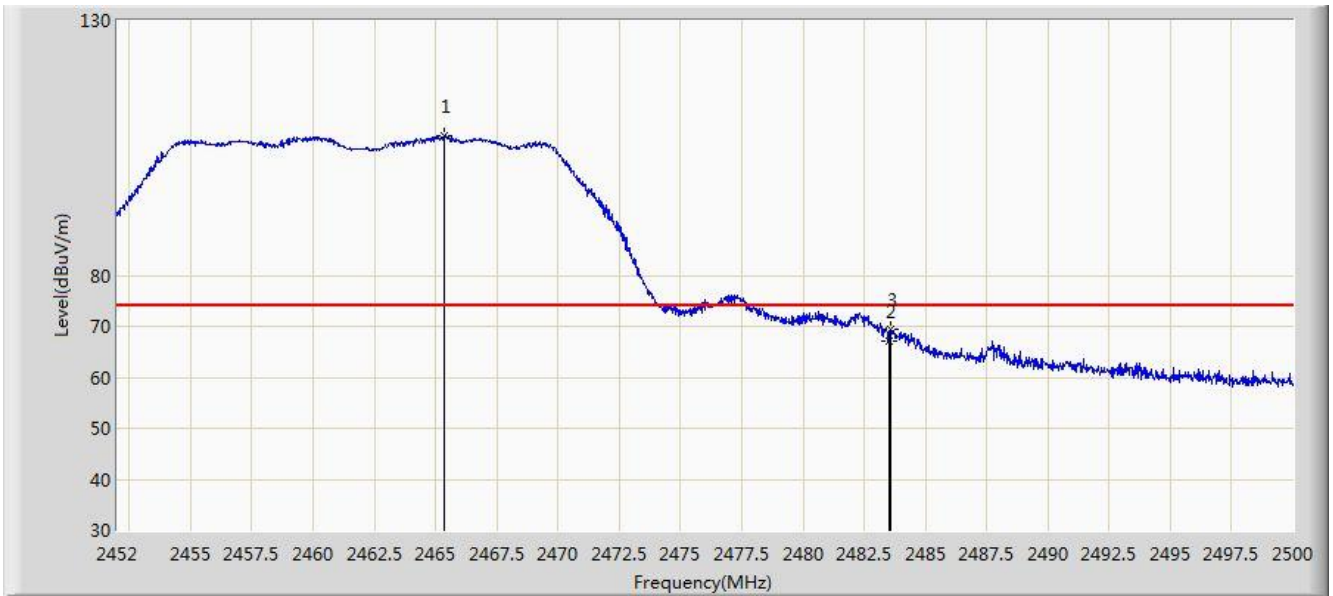


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2465.344        | 107.329                | 75.042               | N/A         | N/A            | 32.287      | PK   |
| 2  |      |      | 2483.500        | 67.080                 | 34.741               | -6.920      | 74.000         | 32.340      | PK   |
| 3  |      |      | 2483.560        | 69.526                 | 37.187               | -4.474      | 74.000         | 32.340      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/02/27 - 02:28 |
| Limit: FCC_Part15.209_RE(3m)                      | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz |                          |

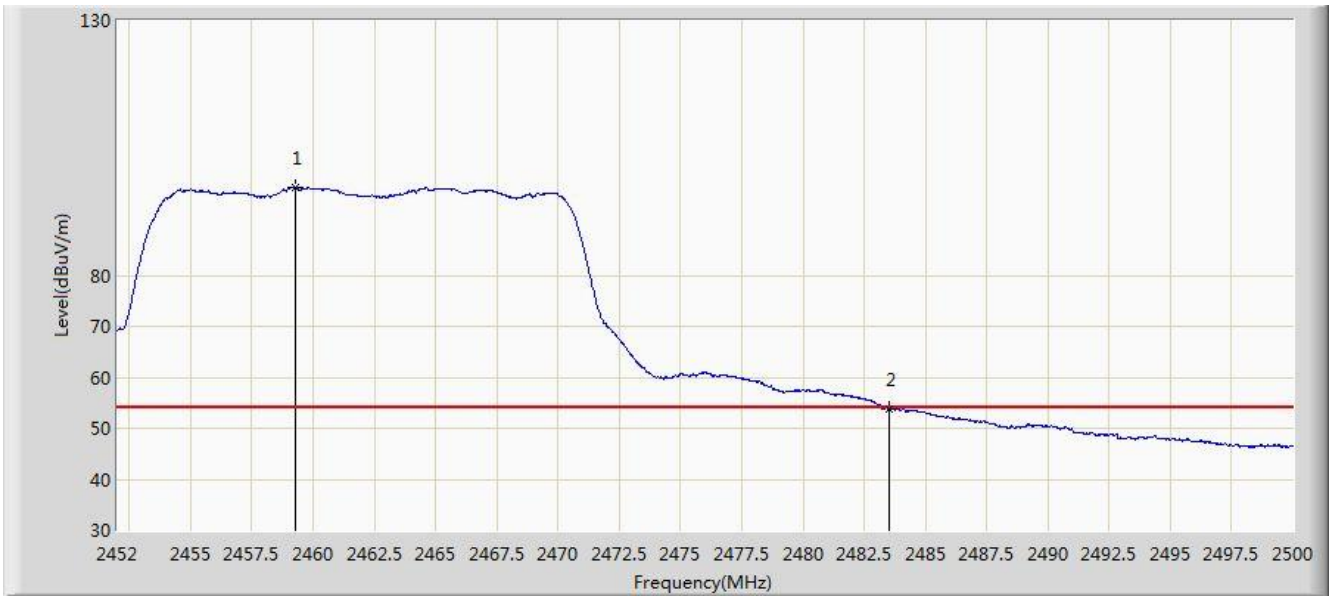


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2459.272        | 97.316                 | 65.041               | N/A         | N/A            | 32.275      | AV   |
| 2  |      |      | 2483.500        | 53.714                 | 21.375               | -0.286      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/02/27 - 02:34 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz |                          |

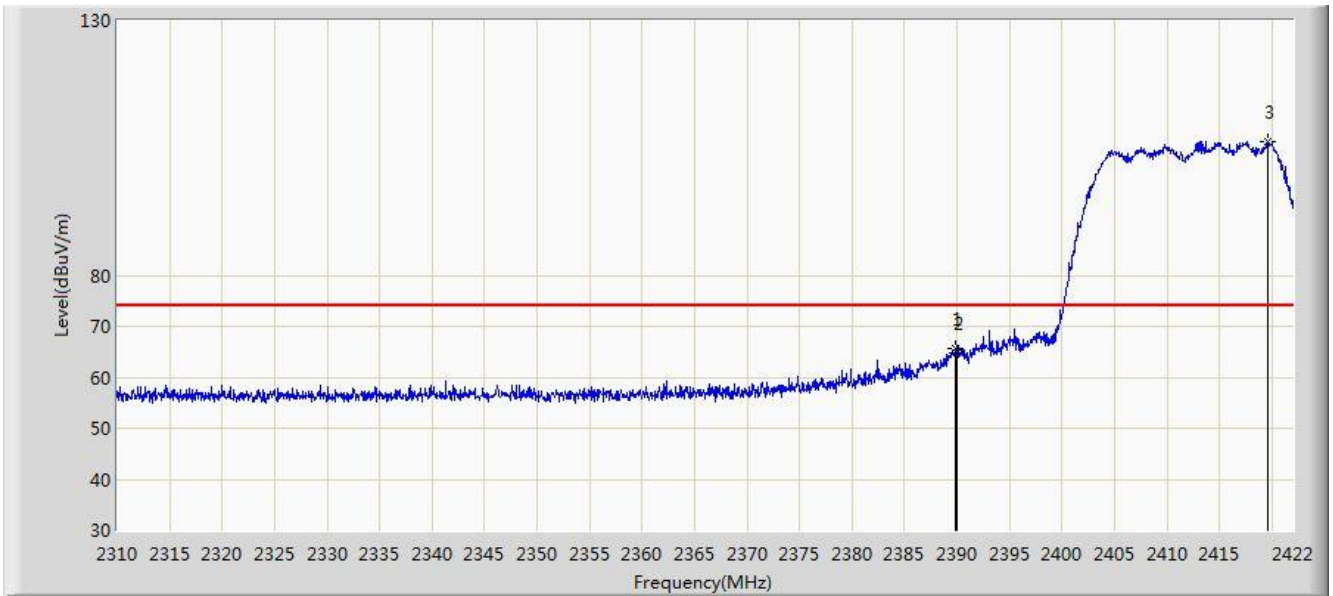


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.912        | 65.574                 | 33.247               | -8.426      | 74.000         | 32.327      | PK   |
| 2  |      |      | 2390.000        | 64.855                 | 32.528               | -9.145      | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2419.648        | 106.367                | 74.085               | N/A         | N/A            | 32.282      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/02/27 - 02:36 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz |                          |

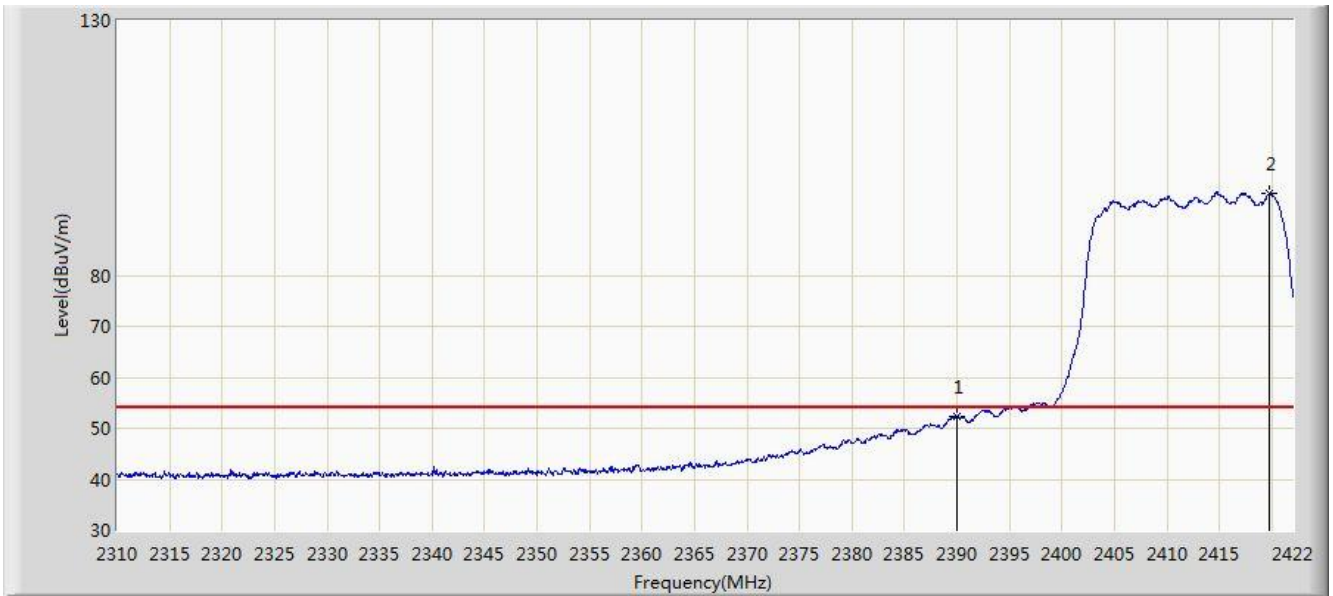


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 52.371                 | 20.044               | -1.629      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2419.760        | 96.060                 | 63.778               | N/A         | N/A            | 32.282      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/02/27 - 02:37 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz |                          |

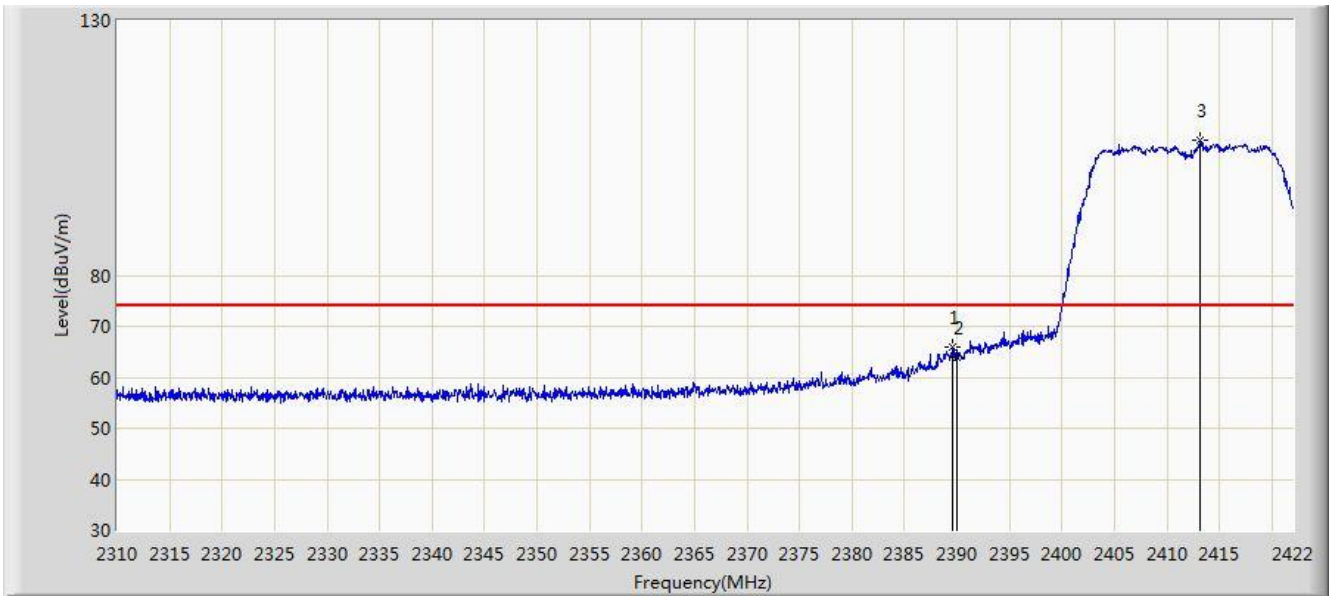


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.632        | 66.047                 | 33.720               | -7.953      | 74.000         | 32.328      | PK   |
| 2  |      |      | 2390.000        | 63.955                 | 31.628               | -10.045     | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2413.096        | 106.421                | 74.137               | N/A         | N/A            | 32.284      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/02/27 - 02:38 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz |                          |

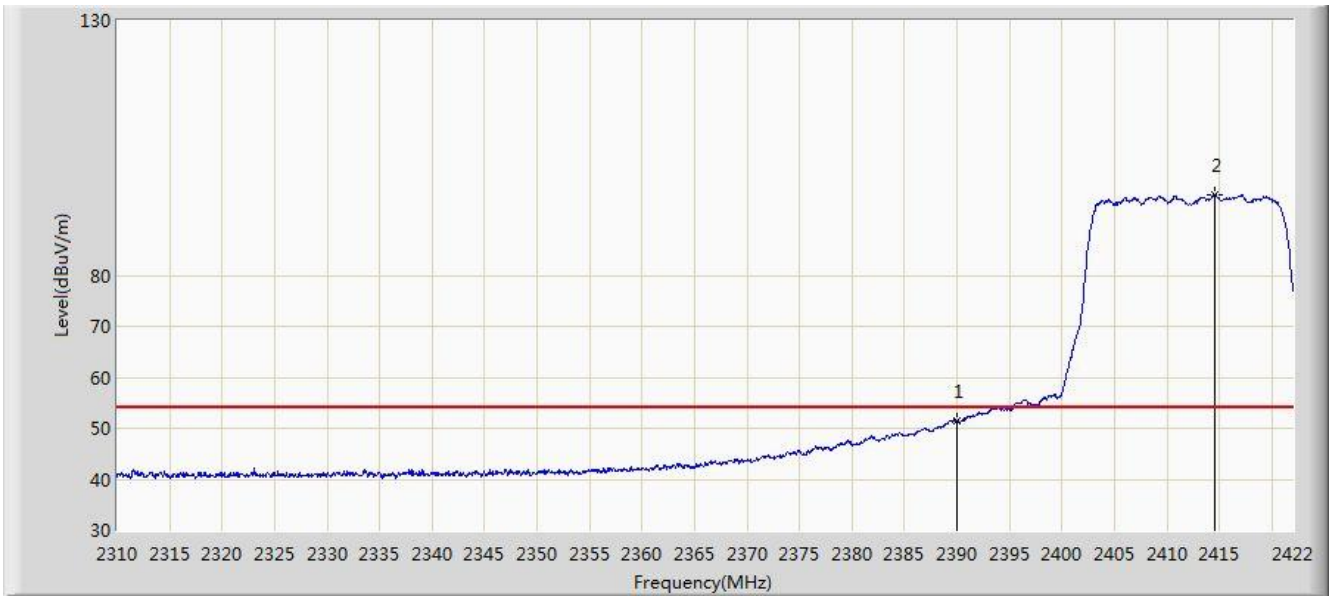


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 51.501                 | 19.174               | -2.499      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2414.496        | 95.767                 | 63.483               | N/A         | N/A            | 32.284      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/02/27 - 02:47 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz |                          |

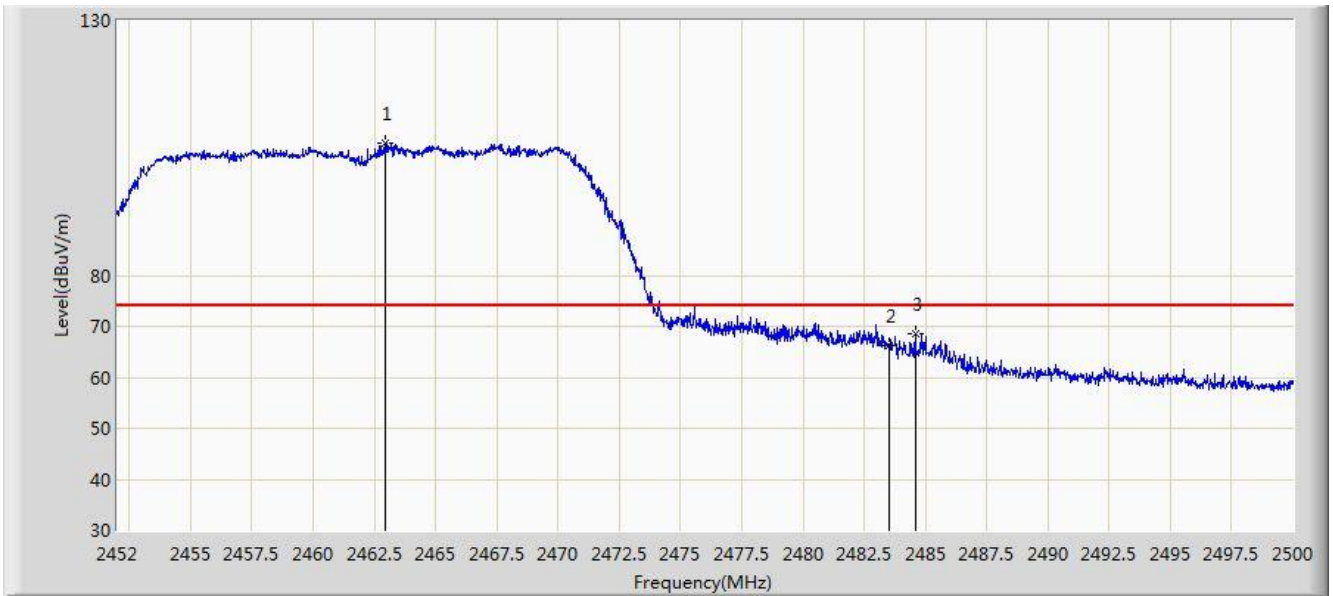


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2462.944        | 105.995                | 73.713               | N/A         | N/A            | 32.282      | PK   |
| 2  |      |      | 2483.500        | 66.348                 | 34.009               | -7.652      | 74.000         | 32.340      | PK   |
| 3  |      |      | 2484.592        | 68.428                 | 36.085               | -5.572      | 74.000         | 32.344      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/02/27 - 02:49 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz |                          |

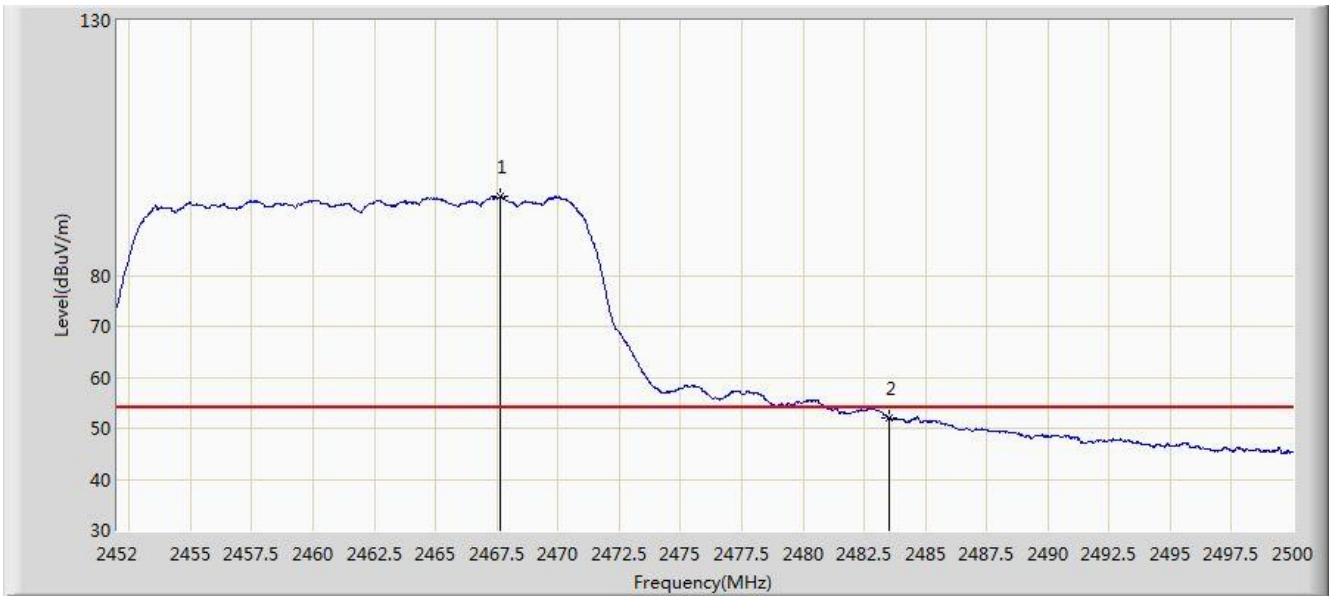


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2467.648        | 95.451                 | 63.158               | N/A         | N/A            | 32.293      | AV   |
| 2  |      |      | 2483.500        | 52.125                 | 19.786               | -1.875      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/02/27 - 02:49 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz |                          |

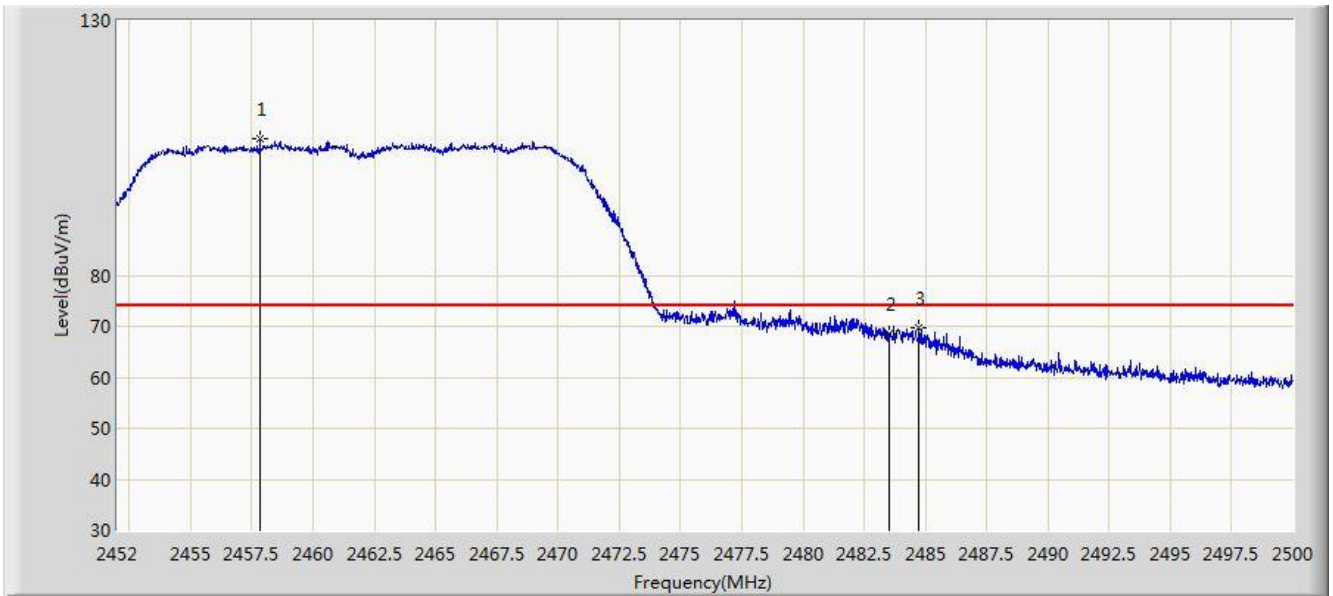


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2457.832        | 106.725                | 74.453               | N/A         | N/A            | 32.272      | PK   |
| 2  |      |      | 2483.500        | 68.527                 | 36.188               | -5.473      | 74.000         | 32.340      | PK   |
| 3  |      |      | 2484.736        | 69.845                 | 37.501               | -4.155      | 74.000         | 32.344      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/02/27 - 02:51 |
| Limit: FCC_Part15.209_RE(3m)                           | Engineer: David Lv       |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz |                          |

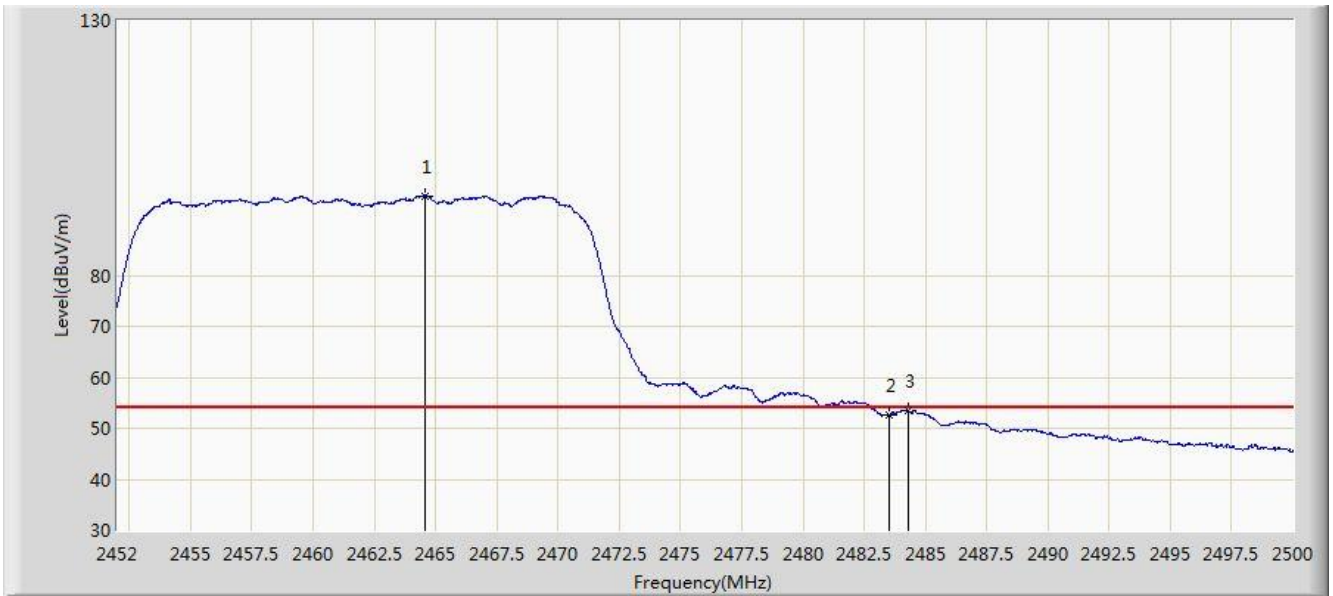

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2464.600        | 95.506                 | 63.221               | N/A         | N/A            | 32.285      | AV   |
| 2  |      |      | 2483.500        | 52.515                 | 20.176               | -1.485      | 54.000         | 32.340      | AV   |
| 3  |      |      | 2484.280        | 53.529                 | 21.187               | -0.471      | 54.000         | 32.342      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 ~ 0.50                                   | 66 ~ 56   | 56 ~ 46   |
| 0.50 ~ 5.0                                    | 56        | 46        |
| 5.0 ~ 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

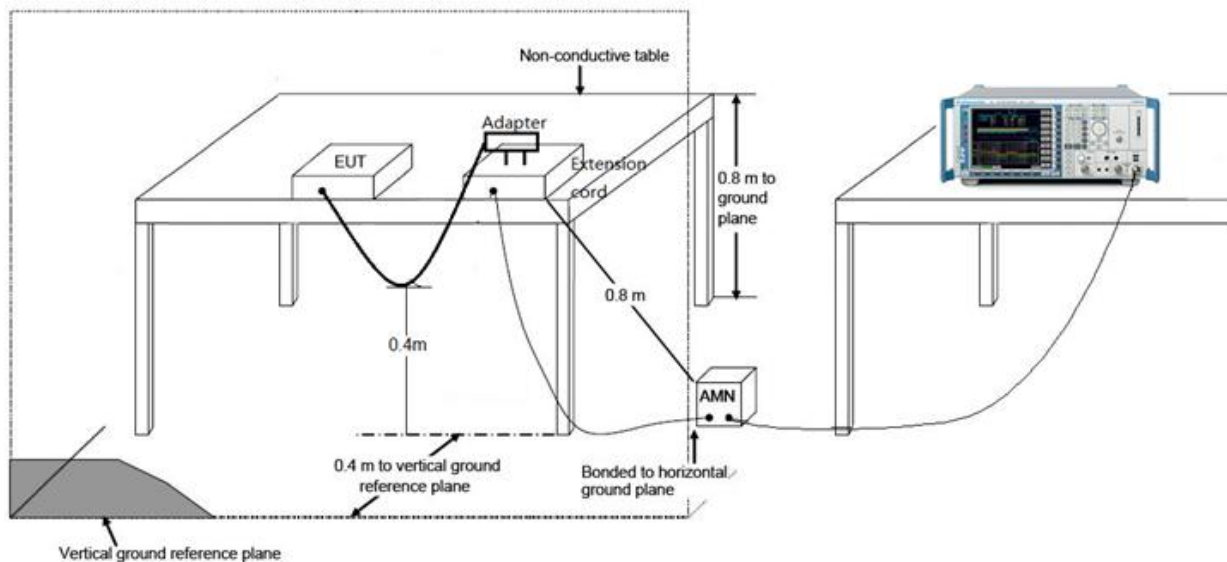

### 7.8.3.Test Result

|                                   |                          |
|-----------------------------------|--------------------------|
| Site: SR2                         | Time: 2019/03/12 - 18:29 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Liz Yuan       |
| Probe: ENV216_101683_Filter On    | Polarity: Line           |
| EUT: WIFI+BT Combo Module         | Power: AC 120V/60Hz      |
| Test Mode: Worst Case (2.4G)      |                          |

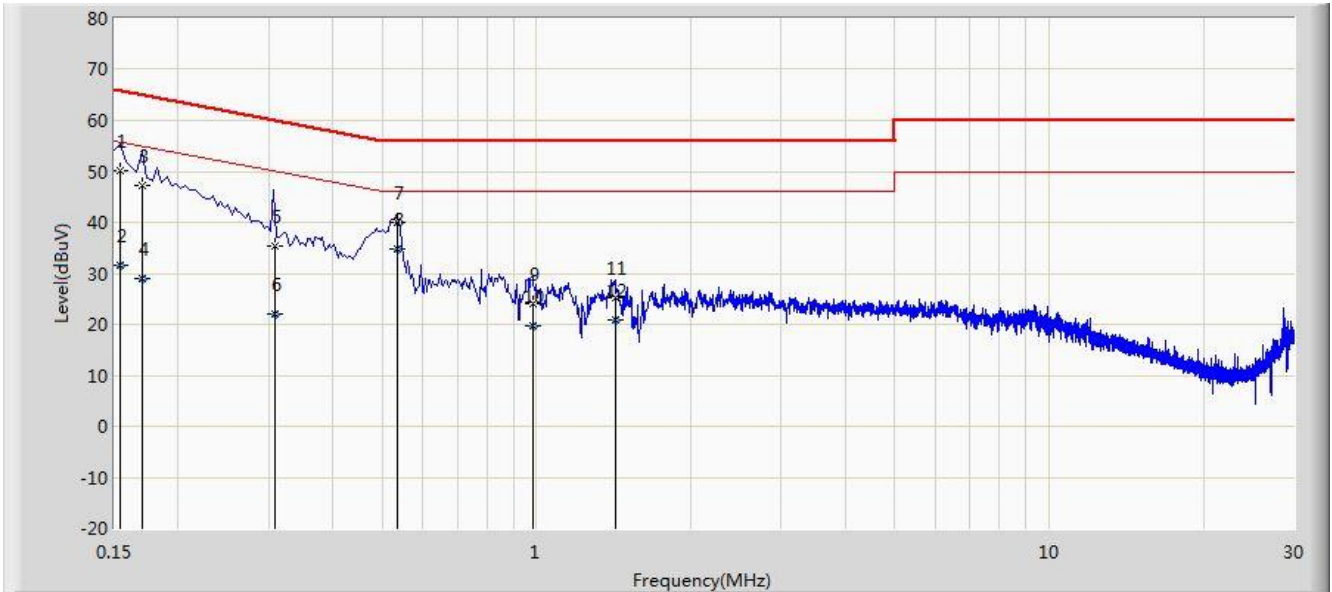


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.154           | 50.169               | 39.429               | -15.612     | 65.781       | 10.740      | QP   |
| 2  |      |      | 0.154           | 31.655               | 20.915               | -24.126     | 55.781       | 10.740      | AV   |
| 3  |      |      | 0.170           | 47.137               | 37.059               | -17.824     | 64.960       | 10.078      | QP   |
| 4  |      |      | 0.170           | 28.963               | 18.886               | -25.997     | 54.960       | 10.078      | AV   |
| 5  |      |      | 0.309           | 35.468               | 25.456               | -24.528     | 59.996       | 10.011      | QP   |
| 6  |      |      | 0.309           | 21.963               | 11.951               | -28.033     | 49.996       | 10.011      | AV   |
| 7  |      |      | 0.534           | 40.041               | 29.892               | -15.959     | 56.000       | 10.149      | QP   |
| 8  |      | *    | 0.534           | 34.786               | 24.637               | -11.214     | 46.000       | 10.149      | AV   |
| 9  |      |      | 0.982           | 24.138               | 14.220               | -31.862     | 56.000       | 9.917       | QP   |
| 10 |      |      | 0.982           | 19.789               | 9.871                | -26.211     | 46.000       | 9.917       | AV   |
| 11 |      |      | 1.422           | 25.192               | 15.300               | -30.808     | 56.000       | 9.892       | QP   |
| 12 |      |      | 1.422           | 20.851               | 10.959               | -25.149     | 46.000       | 9.892       | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

|                                   |                          |
|-----------------------------------|--------------------------|
| Site: SR2                         | Time: 2019/03/12 - 18:34 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Liz Yuan       |
| Probe: ENV216_101683_Filter On    | Polarity: Neutral        |
| EUT: WIFI+BT Combo Module         | Power: AC 120V/60Hz      |
| Test Mode: Worst Case (2.4G)      |                          |

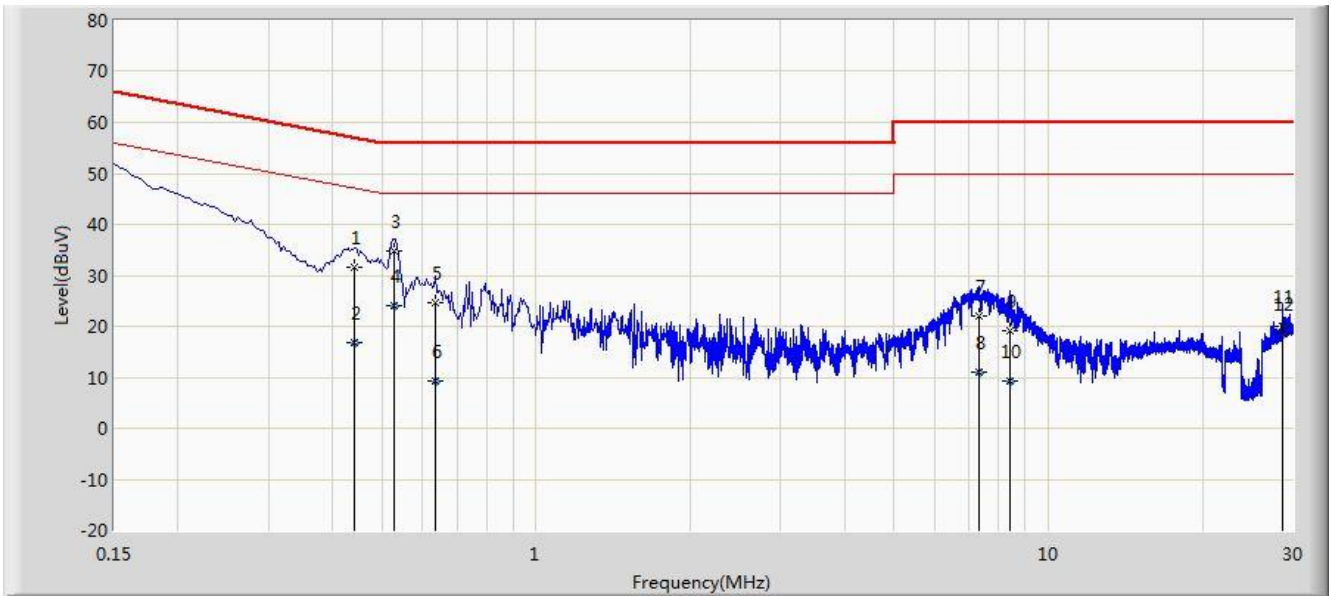

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.442           | 31.498               | 21.354               | -25.526     | 57.024       | 10.144      | QP   |
| 2  |      |      | 0.442           | 16.854               | 6.710                | -30.170     | 47.024       | 10.144      | AV   |
| 3  |      | *    | 0.528           | 34.671               | 24.500               | -21.329     | 56.000       | 10.170      | QP   |
| 4  |      |      | 0.528           | 24.171               | 14.000               | -21.829     | 46.000       | 10.170      | AV   |
| 5  |      |      | 0.634           | 24.603               | 14.491               | -31.397     | 56.000       | 10.112      | QP   |
| 6  |      |      | 0.634           | 9.161                | -0.951               | -36.839     | 46.000       | 10.112      | AV   |
| 7  |      |      | 7.322           | 22.027               | 11.846               | -37.973     | 60.000       | 10.181      | QP   |
| 8  |      |      | 7.322           | 11.091               | 0.911                | -38.909     | 50.000       | 10.181      | AV   |
| 9  |      |      | 8.418           | 19.091               | 8.902                | -40.909     | 60.000       | 10.189      | QP   |
| 10 |      |      | 8.418           | 9.371                | -0.818               | -40.629     | 50.000       | 10.189      | AV   |
| 11 |      |      | 28.686          | 19.969               | 9.555                | -40.031     | 60.000       | 10.414      | QP   |
| 12 |      |      | 28.686          | 18.423               | 8.009                | -31.577     | 50.000       | 10.414      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC rules and ISED rules.

---

The End

## **Appendix A - Test Setup Photograph**

Refer to “1902RSU013-UT” file.

## **Appendix B - EUT Photograph**

Refer to “1902RSU013-UE” file.