



FCC / ISSED Test Report

FOR: Digi Wireless Design Services, Inc.

Model Name: 51914

Product Description: Accepts wireless transfer of end node sensor data. Uploads data to remote server periodically for tracking purposes.

FCC ID: 2AQVA-ONVAHUB51914

IC ID: 24318-ONVHUB51914

Applied Rules and Standards:

47 CFR Part 15.247 (DTS)

RSS-247 Issue 2 (DTSS) & RSS-Gen Issue 5

REPORT #: EMC_DIGII_047_18001_FCC_15.247_ISSED_BLE_DTS

DATE: 01/20/2019



A2LA Accredited

**IC recognized #
3462B-2**

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecom.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	ASSESSMENT	3
2	ADMINISTRATIVE DATA.....	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER	4
3	EQUIPMENT UNDER TEST (EUT)	5
3.1	EUT SPECIFICATIONS	5
3.2	EUT SAMPLE DETAILS	6
3.3	ACCESSORY EQUIPMENT (AE) DETAILS	6
3.4	TEST SAMPLE CONFIGURATION.....	6
3.5	MODE OF OPERATION DETAILS.....	7
3.6	JUSTIFICATION FOR WORST CASE MODE OF OPERATION.....	7
4	SUBJECT OF INVESTIGATION	8
5	MEASUREMENT RESULTS SUMMARY.....	8
6	MEASUREMENT UNCERTAINTY	9
6.1	ENVIRONMENTAL CONDITIONS DURING TESTING:.....	9
6.2	DATES OF TESTING:	9
7	MEASUREMENT PROCEDURES.....	10
7.1	RADIATED MEASUREMENT	10
7.2	RF CONDUCTED MEASUREMENT PROCEDURE	12
8	TEST RESULT DATA.....	13
8.1	EMISSION BANDWIDTH 6dB AND 99% OCCUPIED BANDWIDTH	13
8.2	POWER SPECTRAL DENSITY	27
8.3	MAXIMUM PEAK CONDUCTED OUTPUT POWER	35
8.4	BAND EDGE COMPLIANCE.....	43
8.5	RADIATED TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS.....	52
9	TEST SETUP PHOTOS	66
10	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING	69
11	REVISION HISTORY	69

1 Assessment

The following device as further described in section 3 of this report was evaluated for radiated and conducted spurious emissions for unlicensed radio according to criteria specified in FCC rules 15.247 of Title 47 of the Code of Federal Regulations and the relevant ISED Canada standard RSS-GEN and RSS-247.

No deviations were ascertained.

Company	Description	Model #
Digi Wireless Design Services, Inc.	Accepts wireless transfer of end node sensor data. Uploads data to remote server periodically for tracking purposes.	51914

Responsible for Testing Laboratory:

01/20/2019	Compliance	Cindy Li (Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

01/20/2019	Compliance	Issa Ghanma (EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Street Address:	411 Dixon Landing Road
City/Zip Code	Milpitas, CA 95035
Country	USA
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Lab Manager:	Cindy Li
Responsible Project Leader:	Sangeetha Sivaraman

2.2 Identification of the Client

Applicant's Name:	Digi Wireless Design Services, Inc.
Street Address:	11001 Bren Rd E
City/Zip Code	Minnetonka, MN 55343
Country	USA

2.3 Identification of the Manufacturer

Manufacturer's Name:	Kimberly-Clark Professional
Manufacturers Address:	1400 Holcomb Bridge Road
City/Zip Code	Roswell, GA 30076
Country	USA

3 Equipment Under Test (EUT)

3.1 EUT Specifications

Marketing name:	Onvation Hub
Firmware Version Identification Number (FVIN):	1.0
Hardware Version Identification Number (HVIN):	51914
Product Marketing Name (PMN):	HUB
Module name:	Nordic
Model number:	nRF52832
Frequency Range / number of channels:	Nominal band: 2400 MHz – 2483.5 MHz; Center to center: 2402 MHz (ch 0) – 2480 MHz (ch 39), 40 channels
Type(s) of Modulation:	Bluetooth low energy 4.0 GFSK modulation.
Modes of Operation:	Bluetooth LE in both advertising and connected mode of operation
Max. measured output Powers:	3.58 dBm
Antenna Information as declared:	Internal Antenna PCB trace Max Peak Gain 2400 – 2480 MHz: 3.3 dBi Max Peak Gain 2350 – 2690 MHz: 3.72 dBi
Power Supply/ Rated Operating Voltage Range:	Low 12VDC, Nominal 12VDC, High 24VDC
Operating Temperature Range:	Low 0° C, Nominal 27° C, High 50° C
Other Radios included in the device:	LTE, WCDMA, GSM, Bluetooth LE, 2.4GHz Xbee/ZigBee
Sample Revision:	☐ Prototype Unit; ☐ Production Unit; ☒ Pre-Production
EUT Dimensions [cm]:	15 x 15 x 5
Weight:	0.9kg (2 lbs)
EUT Diameter:	☒ < 60 cm ☐ Other _____

3.2 EUT Sample details

EUT #	Serial Number	HW Version	SW Version	Notes / Comments
1	D68	1.0	1.0	Conducted Measurement / -
2	D72	1.0	1.0	Radiated Measurement / -

3.3 Accessory Equipment (AE) details

AE #	Comments
1	TPE-115GI / A (H/W:V1.1R)TRENDNET - Gigabit POE + Injector, S/N: JW16525G0026 - Input: 100-240VAC, 50/60Hz, 1.2A - Output: 53V/0.566A
2	TRIAD Switching Mode Power Supply - P/N: WSX120-2000-13 - Model: WSX120-2000 - Input: 100-240V_50/60Hz 0.8A MAX - Output: 12.0V/2.0A

3.4 Test Sample Configuration

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT#1 + AE#1	Worst case
2	EUT#1 + AE#2	-
3	EUT#2 + AE#1	Worst case
4	EUT#2 + AE#2	-

3.5 Mode of Operation details

Mode of Operation	Description of Operating modes	Additional Information
Op. 1	BLE GFSK	Putty terminal tool and special commands provided by the customer used to configure the EUT to: • Modulated TX carrier. • Low, Mid, High channel. • Max power. • Max duty cycle. • Data rate 1 Mbit/s or 2 Mbit/s. The commands will not be available to the end user. For Radiated measurements: The internal antenna was connected. For Conducted measurements: The measurements equipment was connected to 50 ohm RF port of the EUT.

3.6 Justification for Worst Case Mode of Operation

The worst case mode of operation has been determined by evaluating the conducted results.

During the testing process the EUT was tested with transmitter sets on low, mid and high channels, and worst case mode of duty cycle, output power and data rate.

For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in FCC rules 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 Issue 2 and RSS-GEN Issue 5 of ISED Canada.

This test report is to support a request for new equipment authorization under the:

- FCC ID: 2AQVA-ONVAHUB51914
- IC ID: 24318-ONVHUB51914

Testing procedures are based on 558074 D01 DTS Meas Guidance v04 – “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247” - April 5, 2017, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.

5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	NA	NP	Result
§15.247(a)(2) RSS-247 5.2(a)	Emission Bandwidth	Nominal	BT LE	■	□	□	Complies
§15.247(e) RSS-247 5.2(b)	Power Spectral Density	Nominal	BT LE	■	□	□	Complies
§15.247(b)(3) RSS-247 5.4(d)	Maximum Conducted Output Power and EIRP	Nominal	BT LE	■	□	□	Complies
§15.247(d) RSS-247 5.5	Band edge compliance Unrestricted Band Edges	Nominal	BT LE	■	□	□	Complies
§15.247; 15.209; 15.205 RSS-247 5.5; Gen 8.9; 8.10	Band edge compliance Restricted Band Edges	Nominal	BT LE	■	□	□	Complies
§15.247(d); §15.209 RSS-Gen 6.13	TX Spurious emissions- Radiated	Nominal	BT LE	■	□	□	Complies
§15.207(a) RSS Gen 8.8	AC Conducted Emissions	Nominal	BT LE	■	□	□	Complies

Note1: NA= Not Applicable; NP= Not Performed.

6 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=1.

Radiated measurement

9 kHz to 30 MHz	± 2.5 dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	± 2.0 dB (Biconilog Antenna)
1 GHz to 40 GHz	± 2.3 dB (Horn Antenna)

Conducted measurement

150 kHz to 30 MHz	± 0.7 dB (LISN)
-------------------	---------------------

RF conducted measurement	± 0.5 dB
--------------------------	--------------

According to TR 102 273 a multiplicative propagation of error is assumed for RF measurement systems. For this reason the RMS method is applied to dB values and not to linear values as appropriate for additive propagation of error. Also used: <http://physics.nist.gov/cuu/Uncertainty/typeb.html>. The above calculated uncertainties apply to direct application of the Substitution method. The Substitution method is always used when the EUT comes closer than 3 dB to the limit.

6.1 Environmental Conditions During Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25° C
- Relative humidity: 40-60%

6.2 Dates of Testing:


11/28/2018 – 12/19/2018

7 Measurement Procedures


7.1 Radiated Measurement

The radiated measurement is performed according to ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

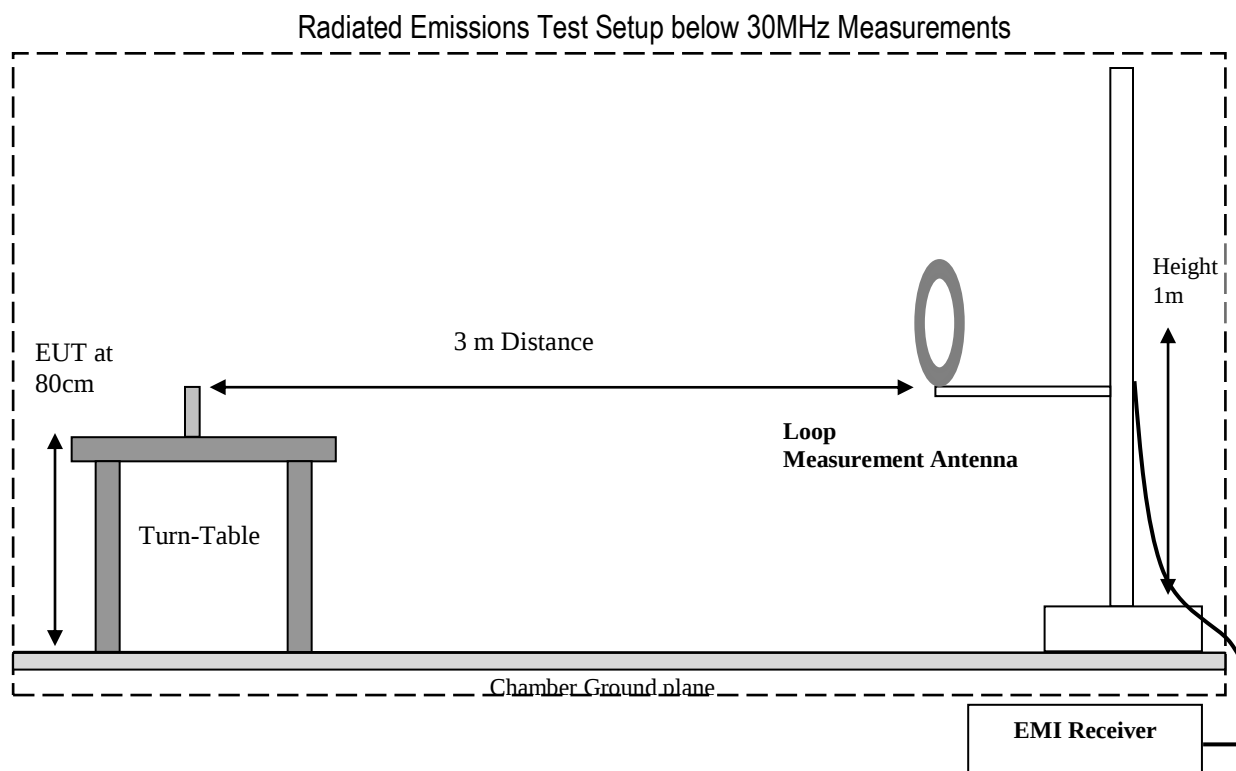

Radiated Emissions Test Setup 30MHz-1GHz Measurements

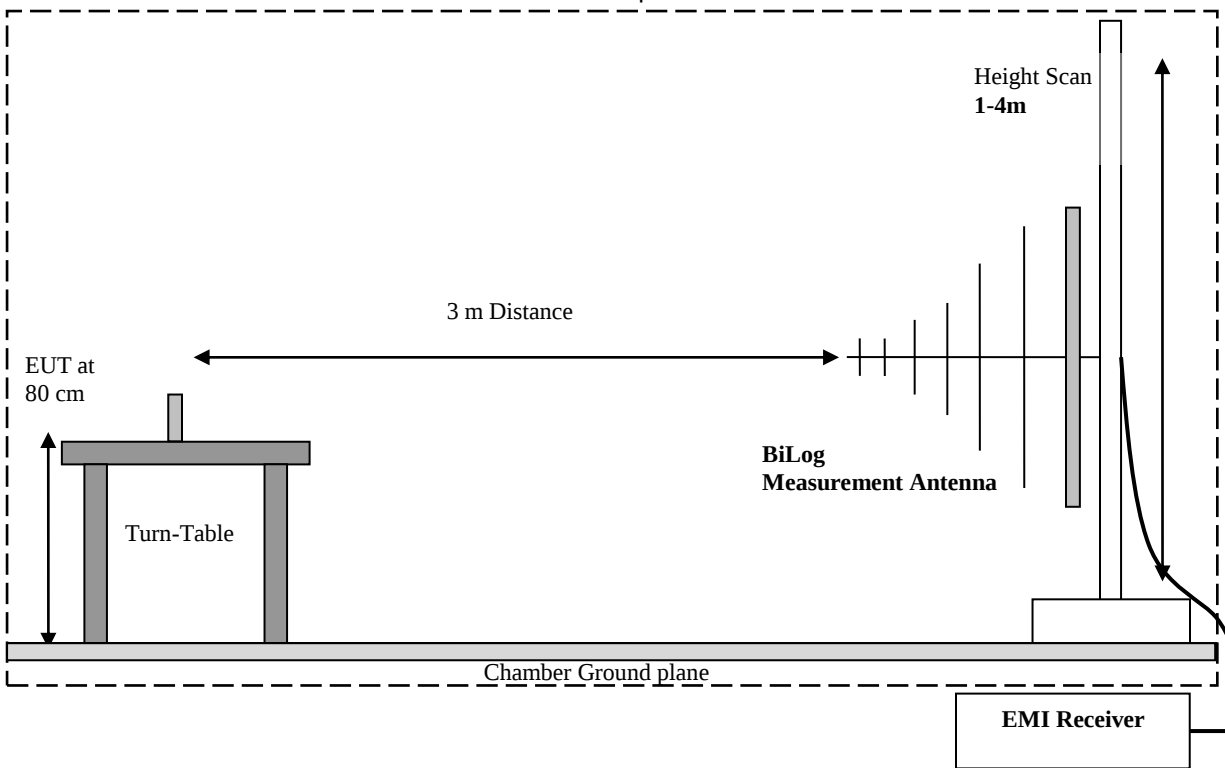

Radiated Emissions Test Setup above 1GHz Measurements

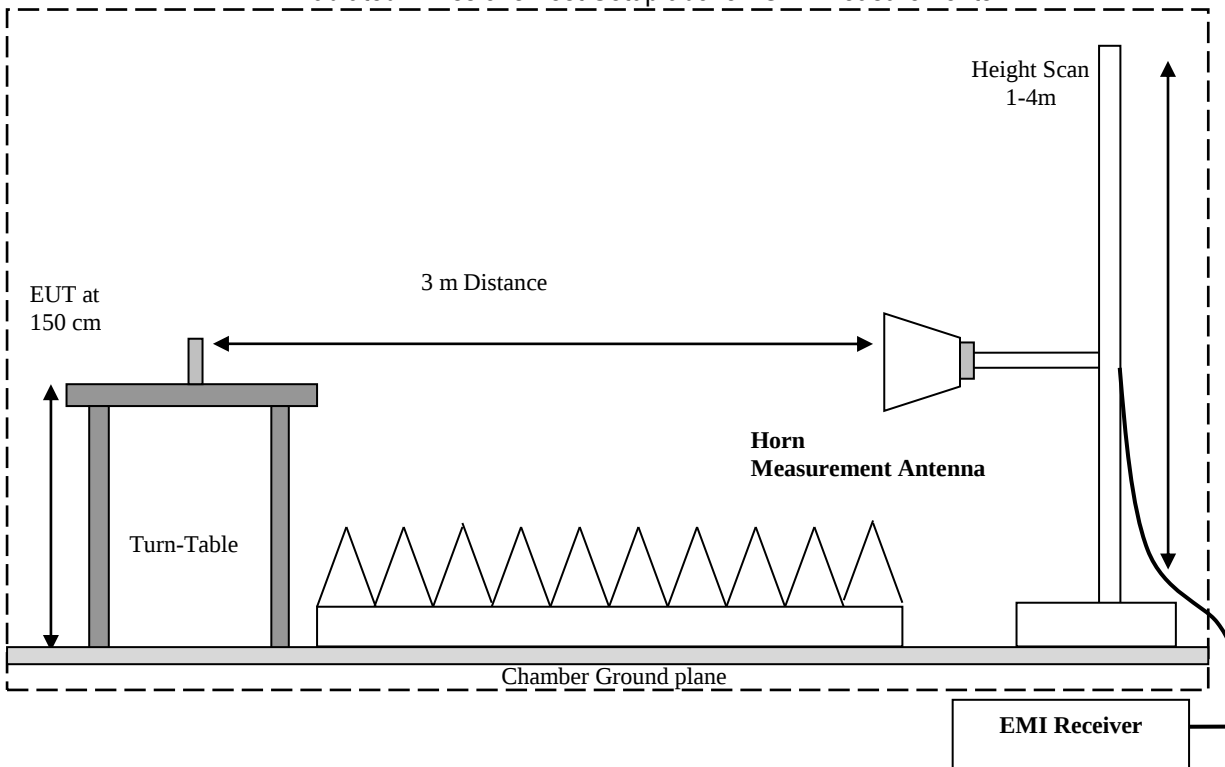

7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:


$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0

7.2 RF Conducted Measurement Procedure

Testing procedures are based on 558074 D01 DTS Meas Guidance v04 – “GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247” - April 5, 2017, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.



- Connect the equipment as shown in the above diagram.
- Adjust the settings of the SA (Rohde-Schwarz Spectrum Analyzer) to connect the EUT at the required mode of test.
- Measurements are to be performed with the EUT set to the low, middle and high channels and for worst case modulation schemes.

8 Test Result Data

8.1 Emission Bandwidth 6dB and 99% Occupied Bandwidth

8.1.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v04

Spectrum Analyzer settings:

- Set RBW = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep = Auto couple
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.1.2 Limits:

- FCC §15.247(a) (2):
 - Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
- RSS-247 5.2:
 - DTSs include systems that employ digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to the bands 902-928 MHz and 2400-2483.5 MHz:
 - a. The minimum 6 dB bandwidth shall be 500 kHz.


8.1.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
22° C	1	Op.1	12v DC

8.1.4 Measurement result:


Plot #	Frequency (MHz)	Data Rate (Mbit/s)	6dB Emissions Bandwidth (MHz)	Limit (MHz)	Result
1	2402	1	0.72	> 0.5	Pass
2	2440	1	0.73	> 0.5	Pass
3	2480	1	0.71	> 0.5	Pass
4	2402	2	0.86	> 0.5	Pass
5	2440	2	0.84	> 0.5	Pass
6	2480	2	0.86	> 0.5	Pass


Plot #	Frequency (MHz)	Data Rate (Mbit/s)	99% Occupied Bandwidth (MHz)	Limit (MHz)	Result
7	2402	1	1.07	> 0.5	Pass
8	2440	1	1.08	> 0.5	Pass
9	2480	1	1.08	> 0.5	Pass
10	2402	2	1.90	> 0.5	Pass
11	2440	2	1.85	> 0.5	Pass
12	2480	2	1.91	> 0.5	Pass

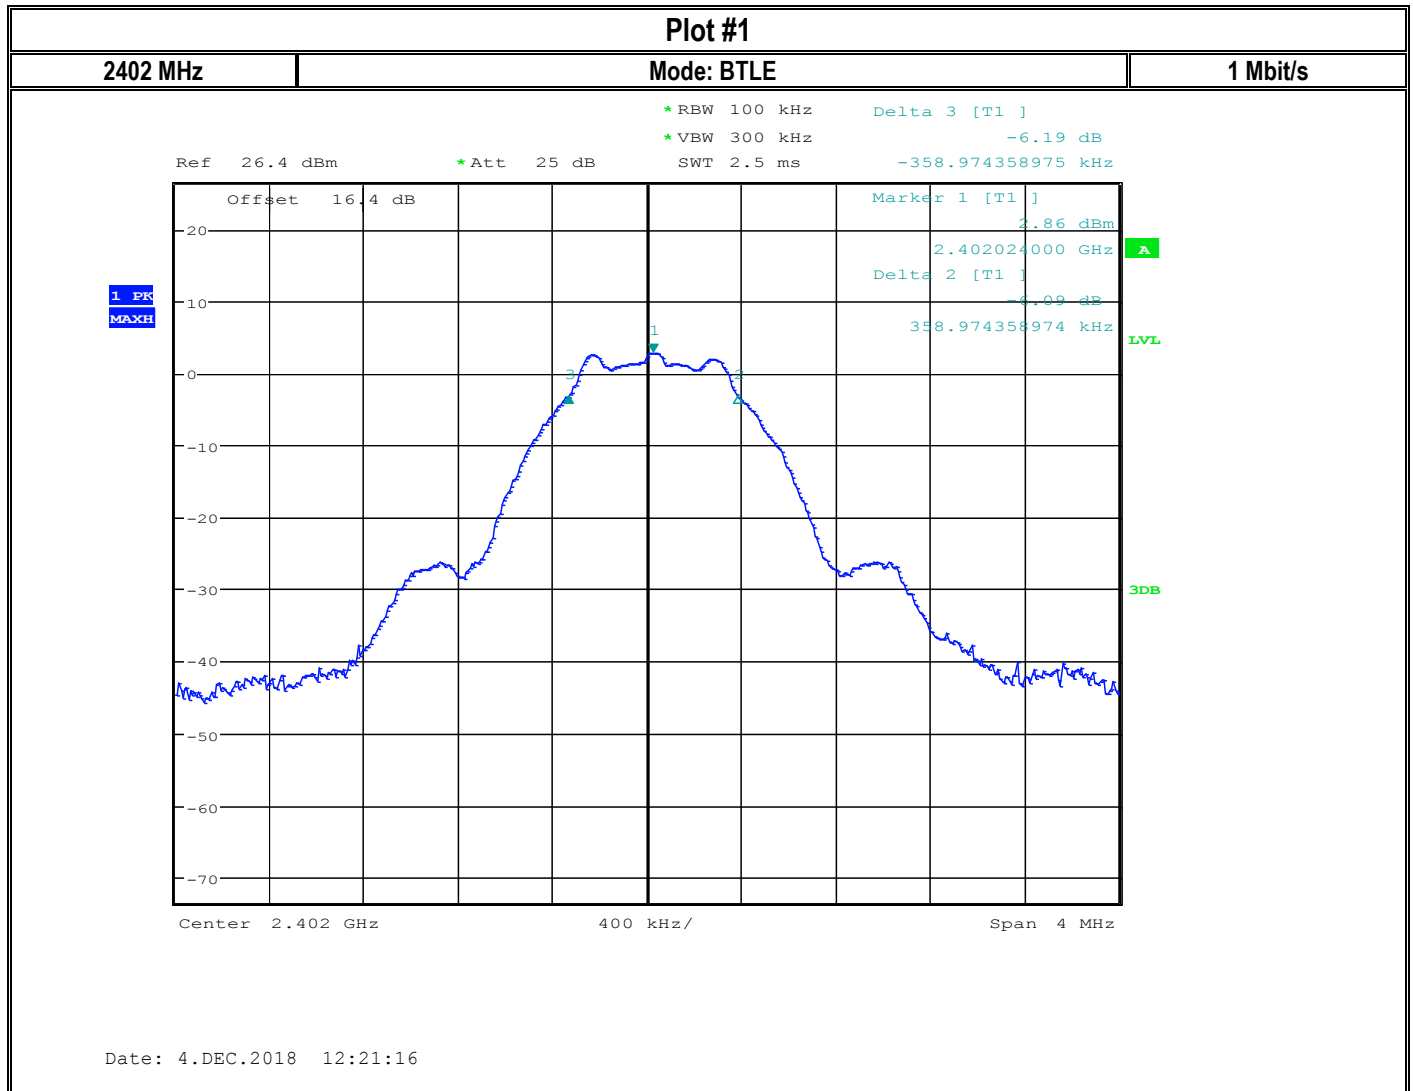8.1.5 Measurement Plots:**1 PK
MAXH****A****LVL****3DB**

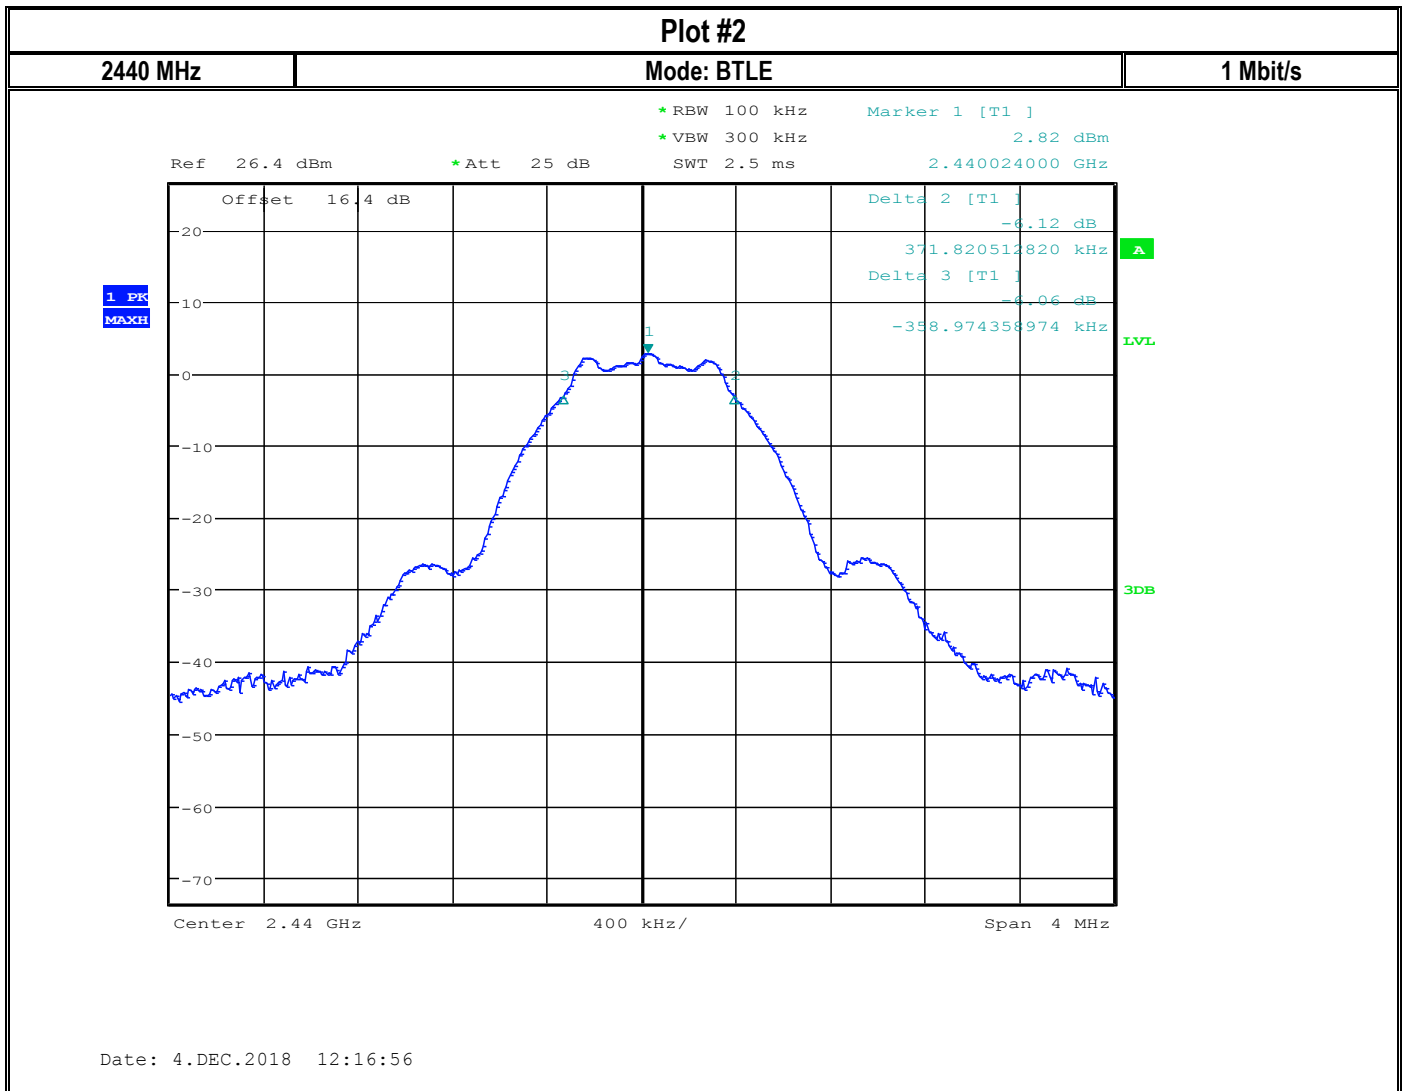

Date: 4.DEC.2018 12:16:56

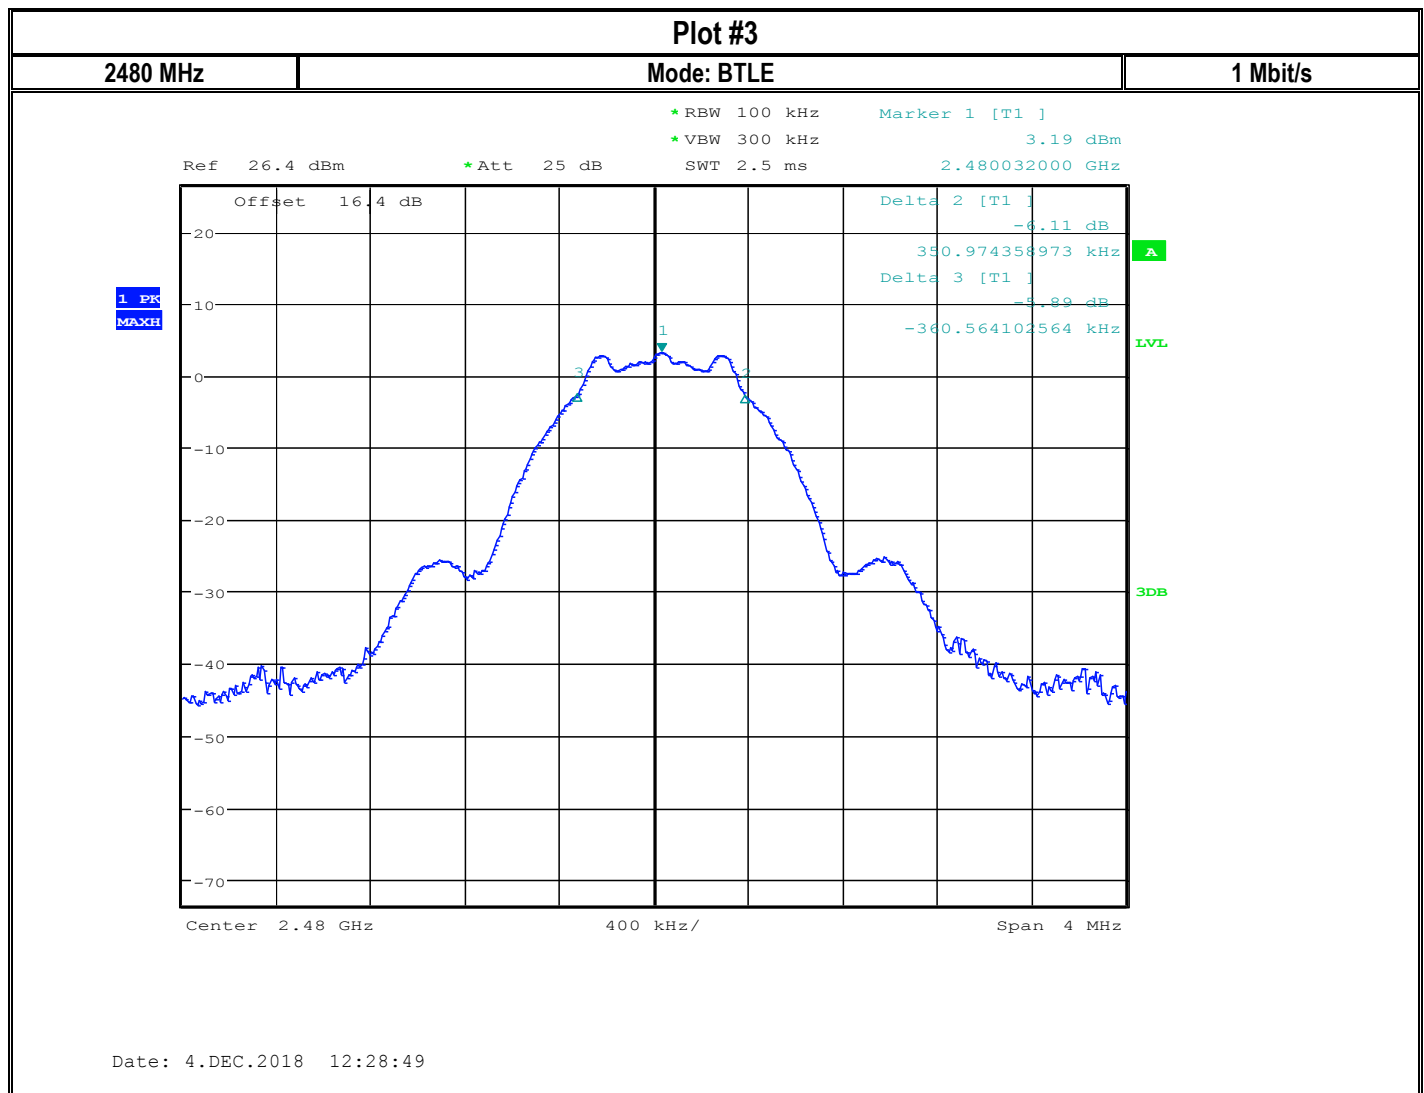

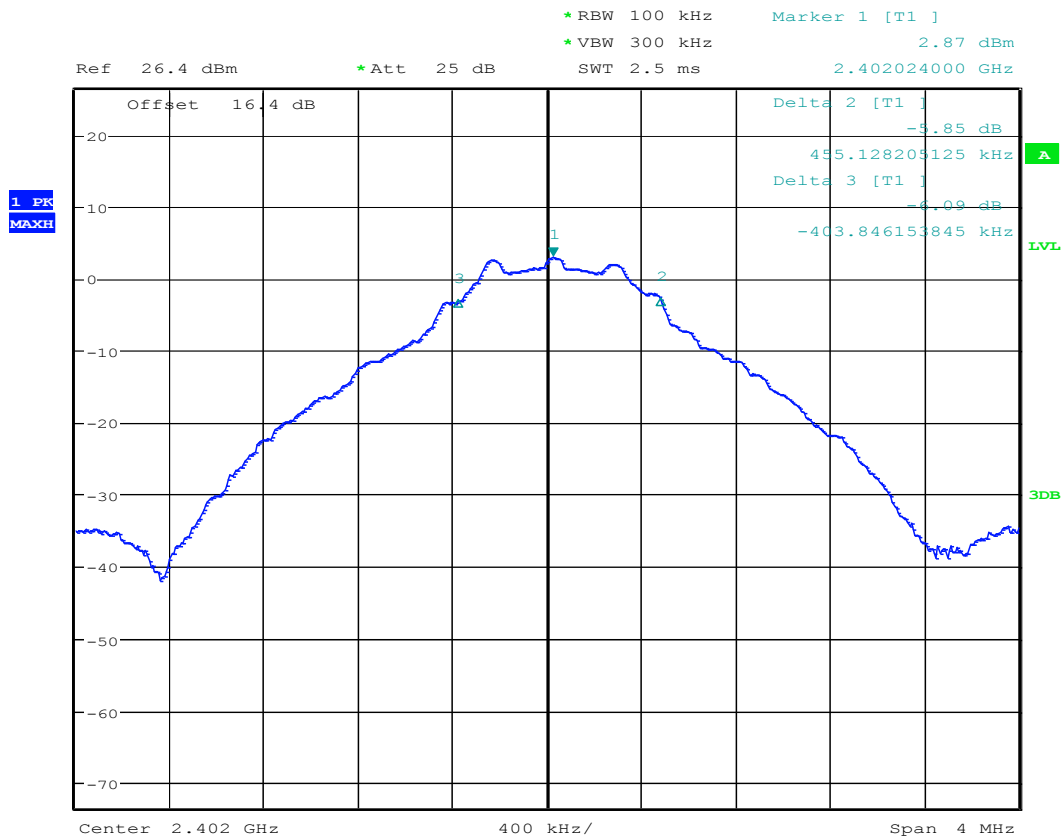Plot #4**2402 MHz****Mode: BTLE****2 Mbit/s**

Date: 4.DEC.2018 12:24:16




Plot #5

2440 MHz

Mode: BTLE

2 Mbit/s

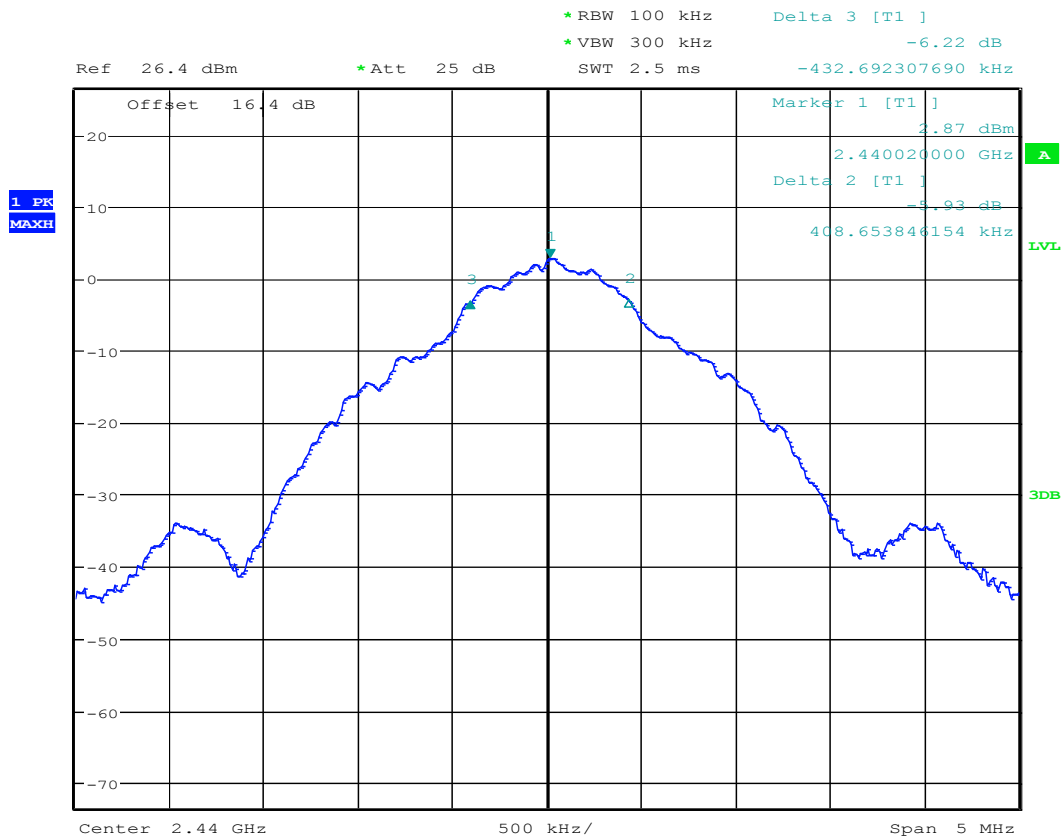

Date: 4.DEC.2018 12:08:44




Plot #6

2480 MHz

Mode: BTLE

2 Mbit/s

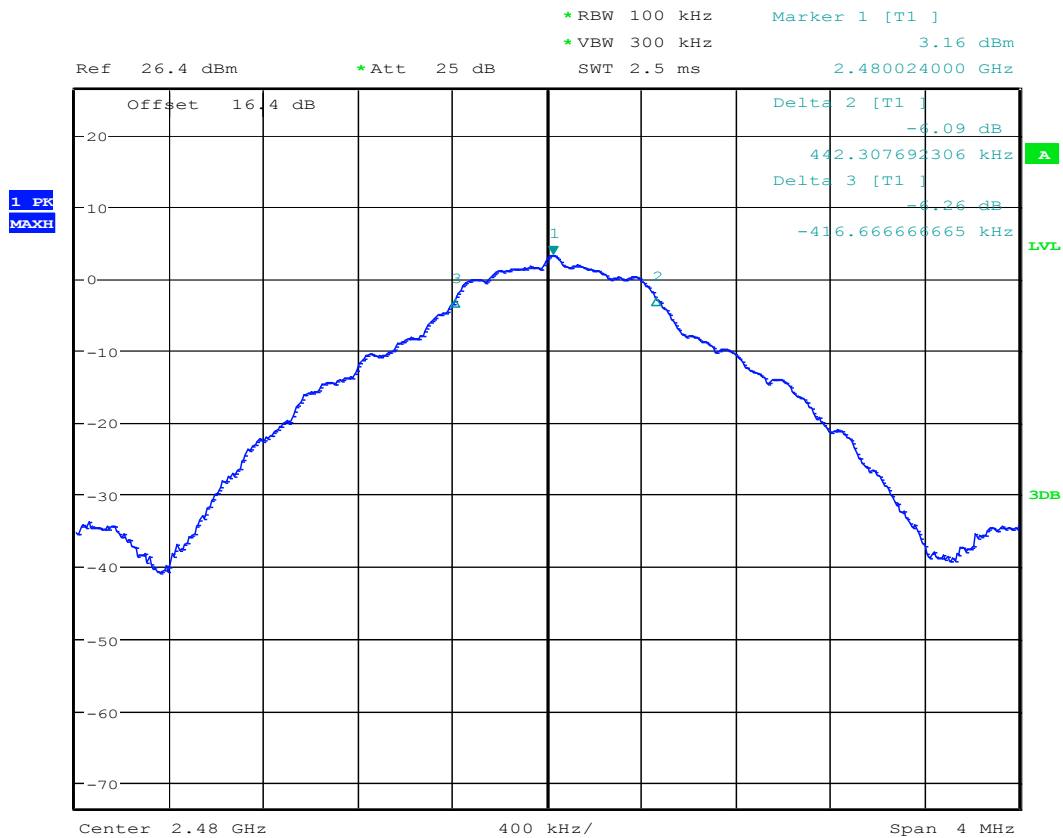

Date: 4.DEC.2018 12:26:45




Plot #7


2402 MHz


Mode: BTLE


1 Mbit/s

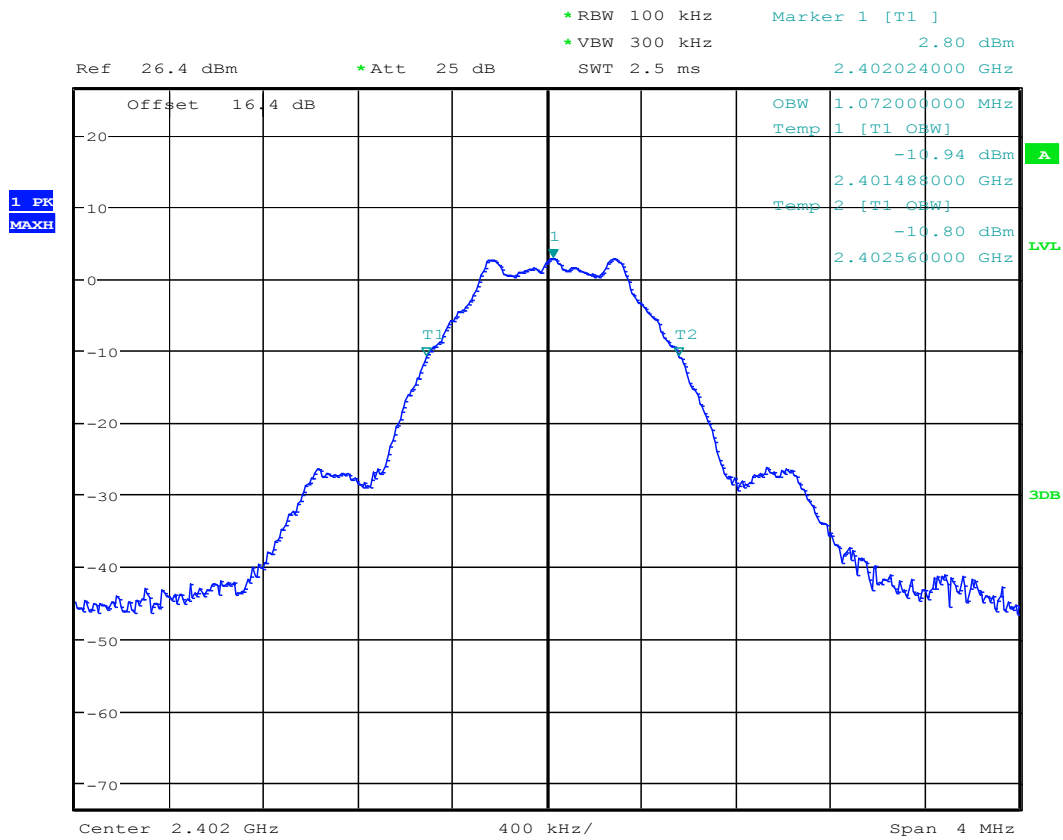

Date: 4.DEC.2018 12:38:48

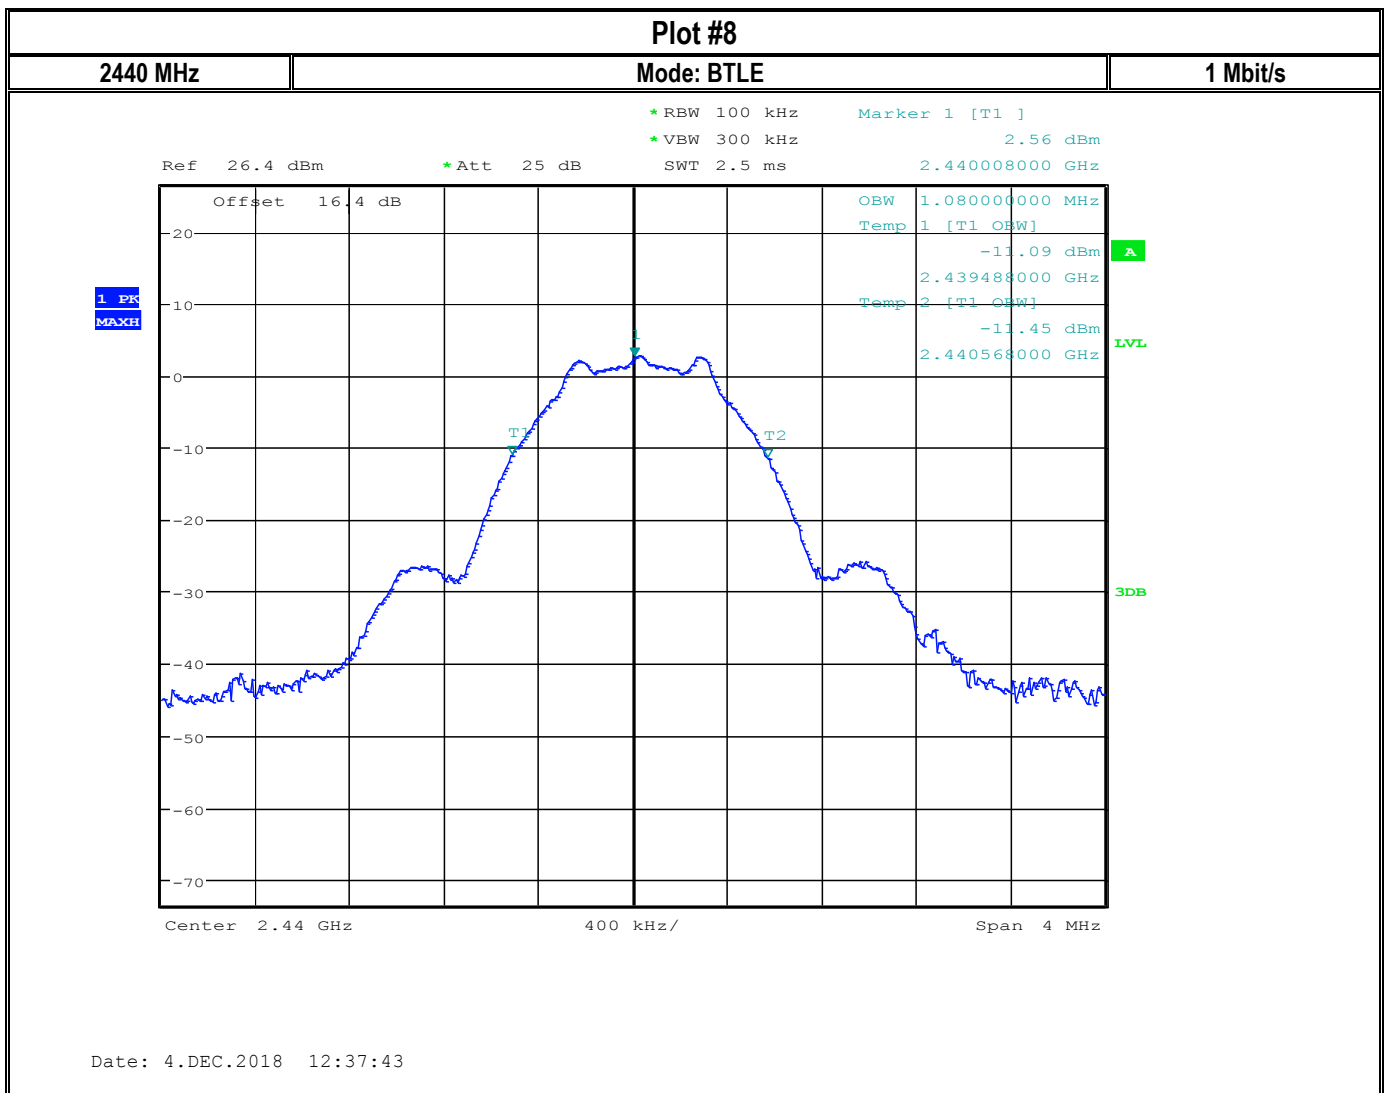

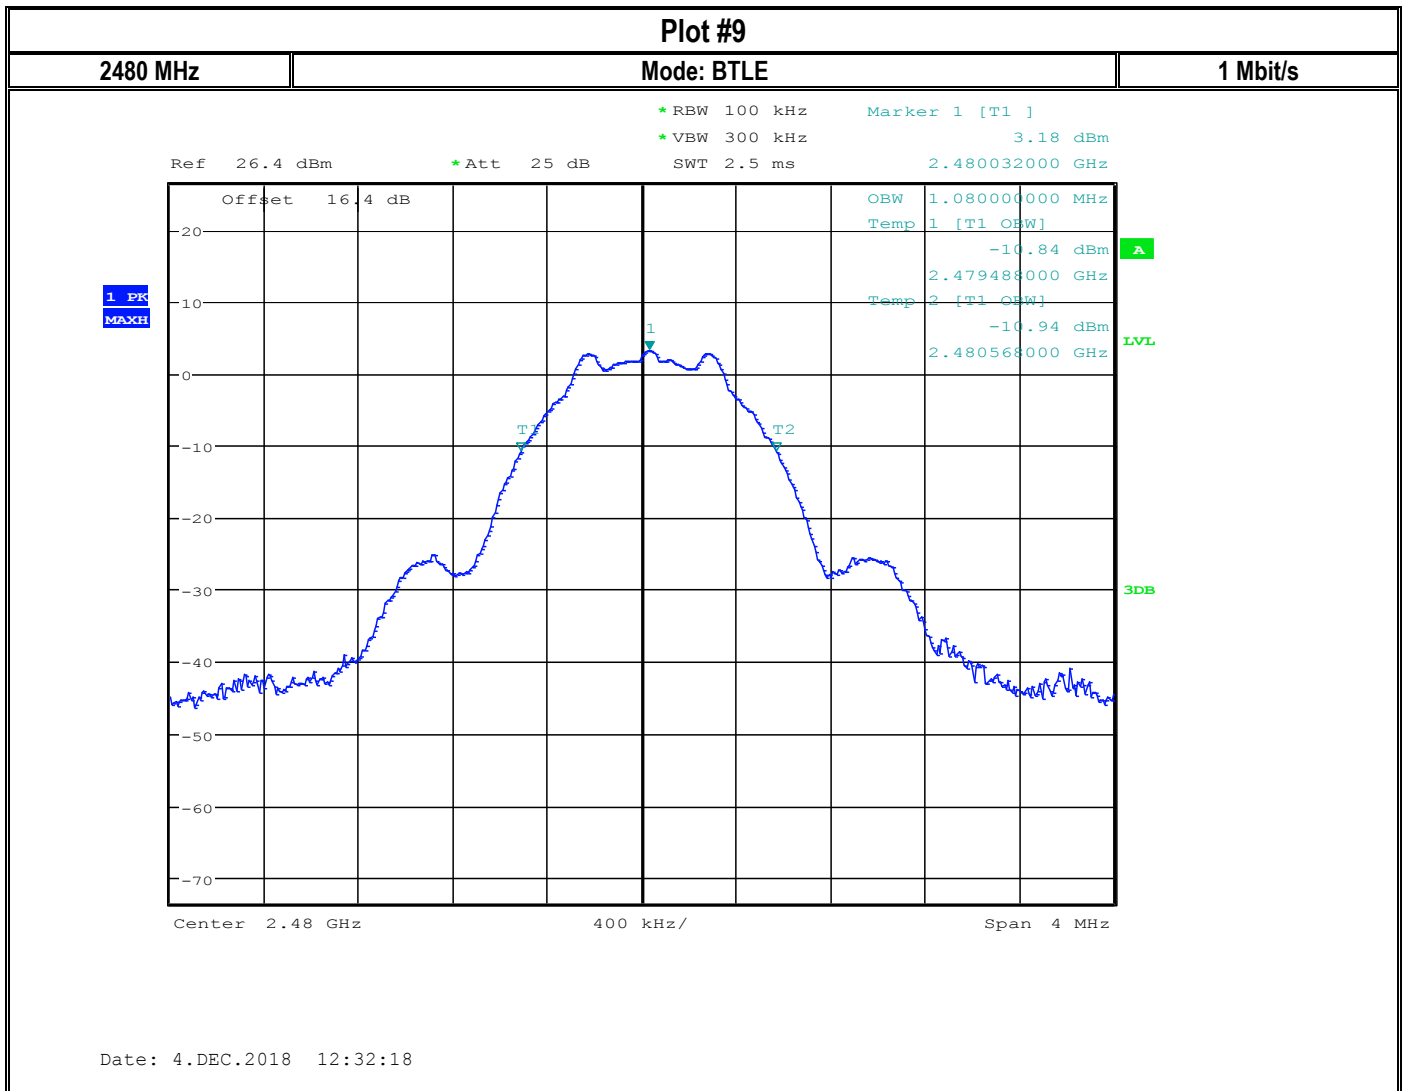

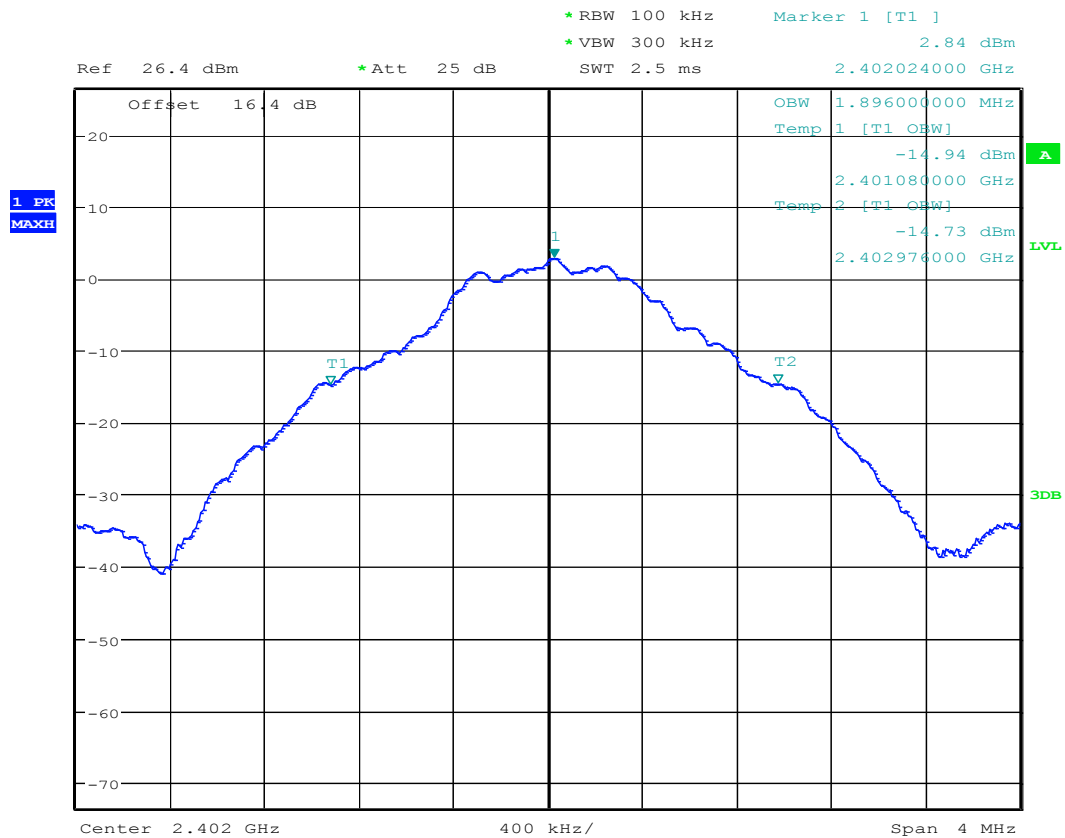Plot #10**2402 MHz****Mode: BTLE****2 Mbit/s**


Date: 4.DEC.2018 12:50:49

Plot #11

2440 MHz

Mode: BTLE

2 Mbit/s

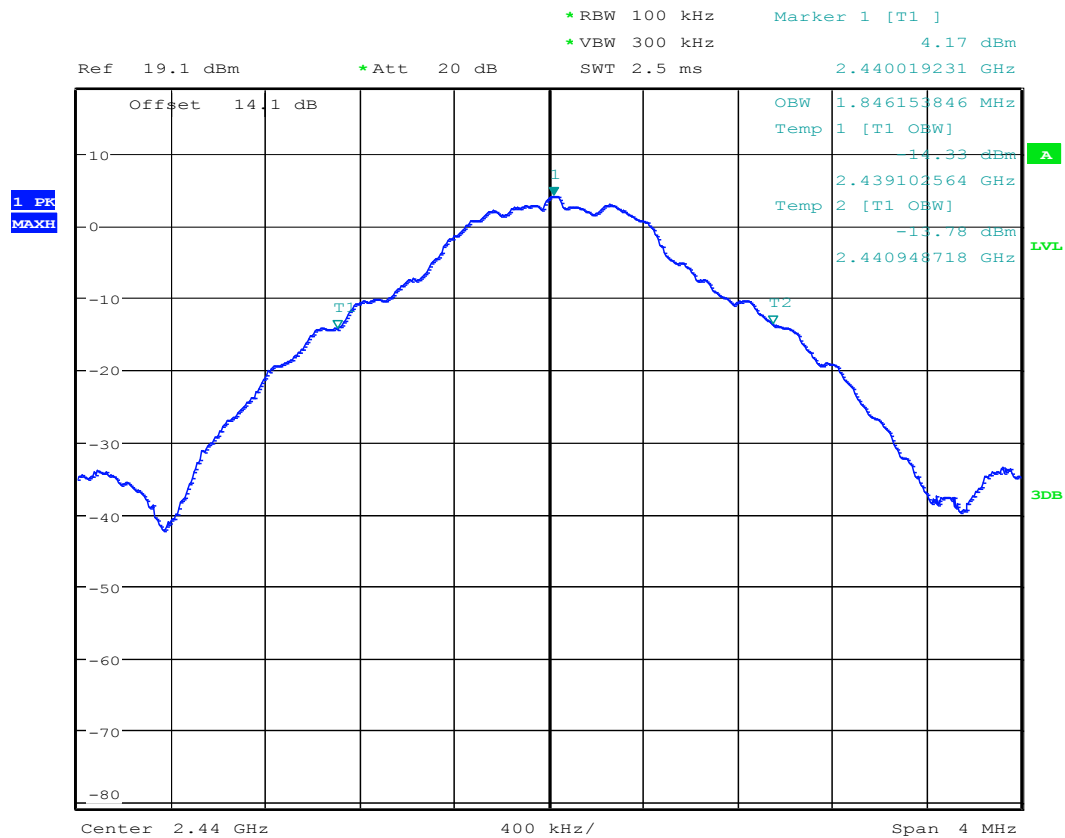


Date: 18.DEC.2018 18:30:38

Plot #12

2480 MHz

Mode: BTLE

2 Mbit/s

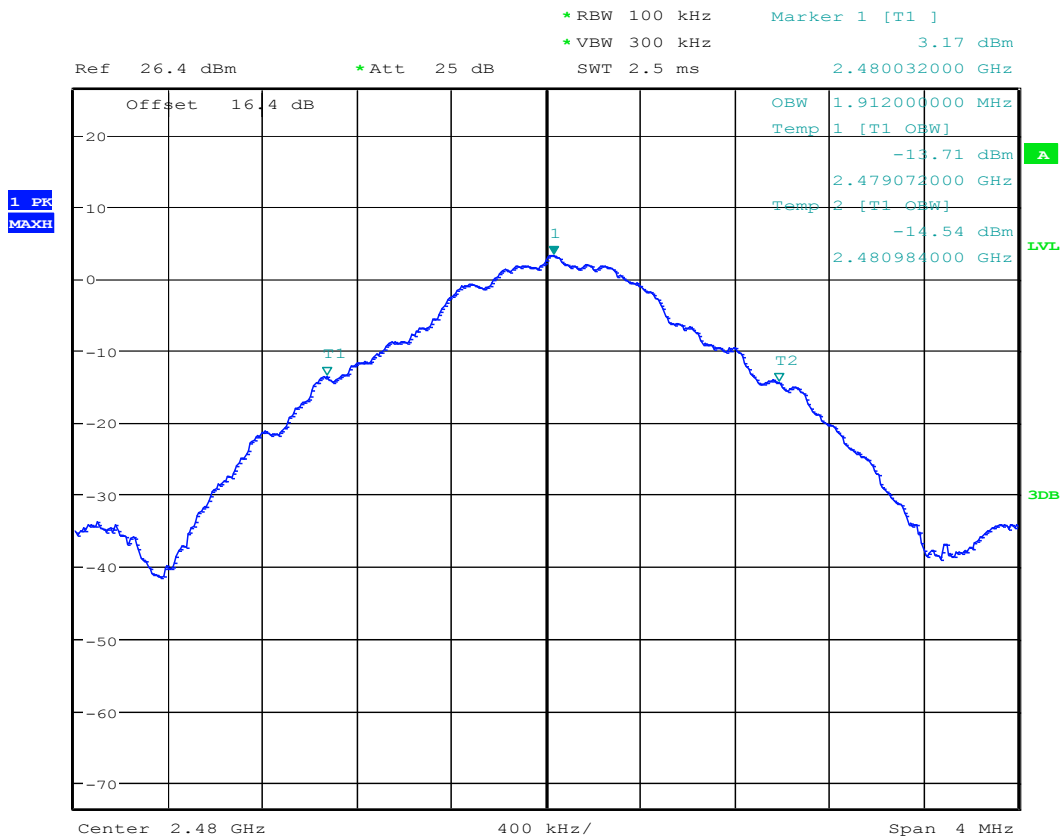

Date: 4.DEC.2018 12:34:59

8.2 Power Spectral Density

8.2.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v04

Spectrum Analyzer settings for Peak PSD method:

- Set analyzer center frequency to DTS channel center frequency
- Set the span to 1.5 x DTS bandwidth
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- Set the VBW $\geq 3 \times \text{RBW}$
- Detector = Peak
- Sweep time = Auto couple
- Trace mode = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level within the RBW
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

8.2.2 Limits:


- FCC§15.247
 - (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
- RSS-247 5.2
 - b. The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).


8.2.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
22° C	1	Op.1	12 VDC	3.72 dBi


8.2.4 Measurement result:


Plot #	Frequency (MHz)	Data Rate (Mbit/s)	Maximum Power Spectral Density (dBm/3 kHz)	PSD Adjusted for Antenna Gain (dBm/3 kHz)	Limit (dBm / 3 kHz)	Result
1	2402	1	-10.01	-6.29	8	Pass
2	2441	1	-10.66	-6.94	8	Pass
3	2480	1	-9.90	-6.18	8	Pass
4	2402	2	-10.53	-6.81	8	Pass
5	2441	2	-9.80	-6.08	8	Pass
6	2480	2	-10.11	-6.39	8	Pass

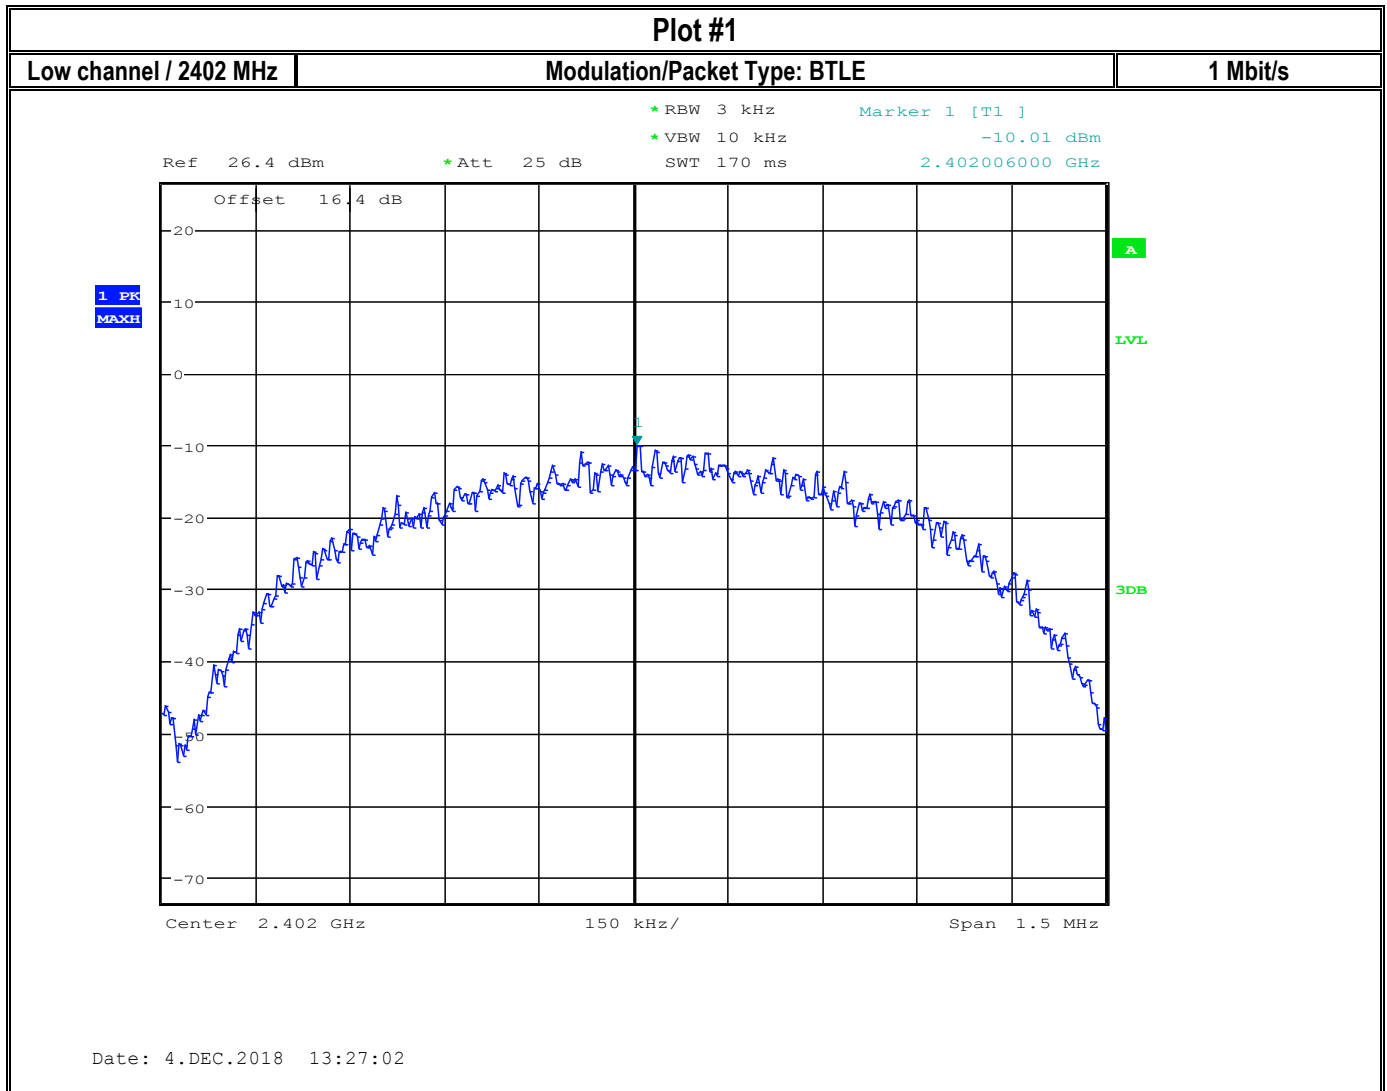8.2.5 Measurement Plots:

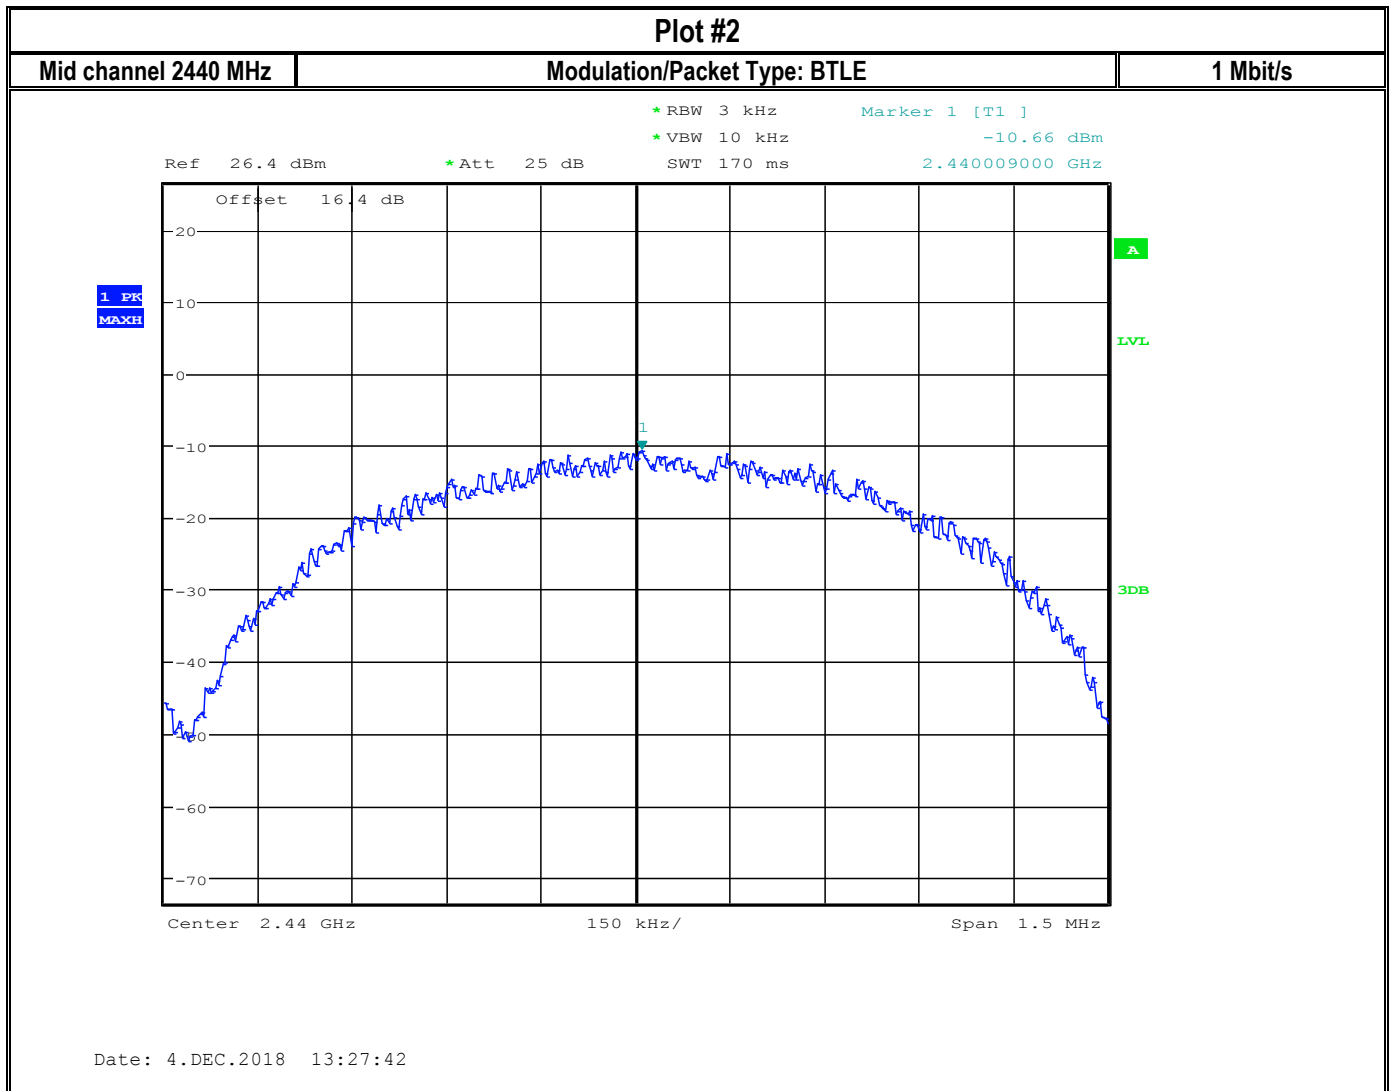

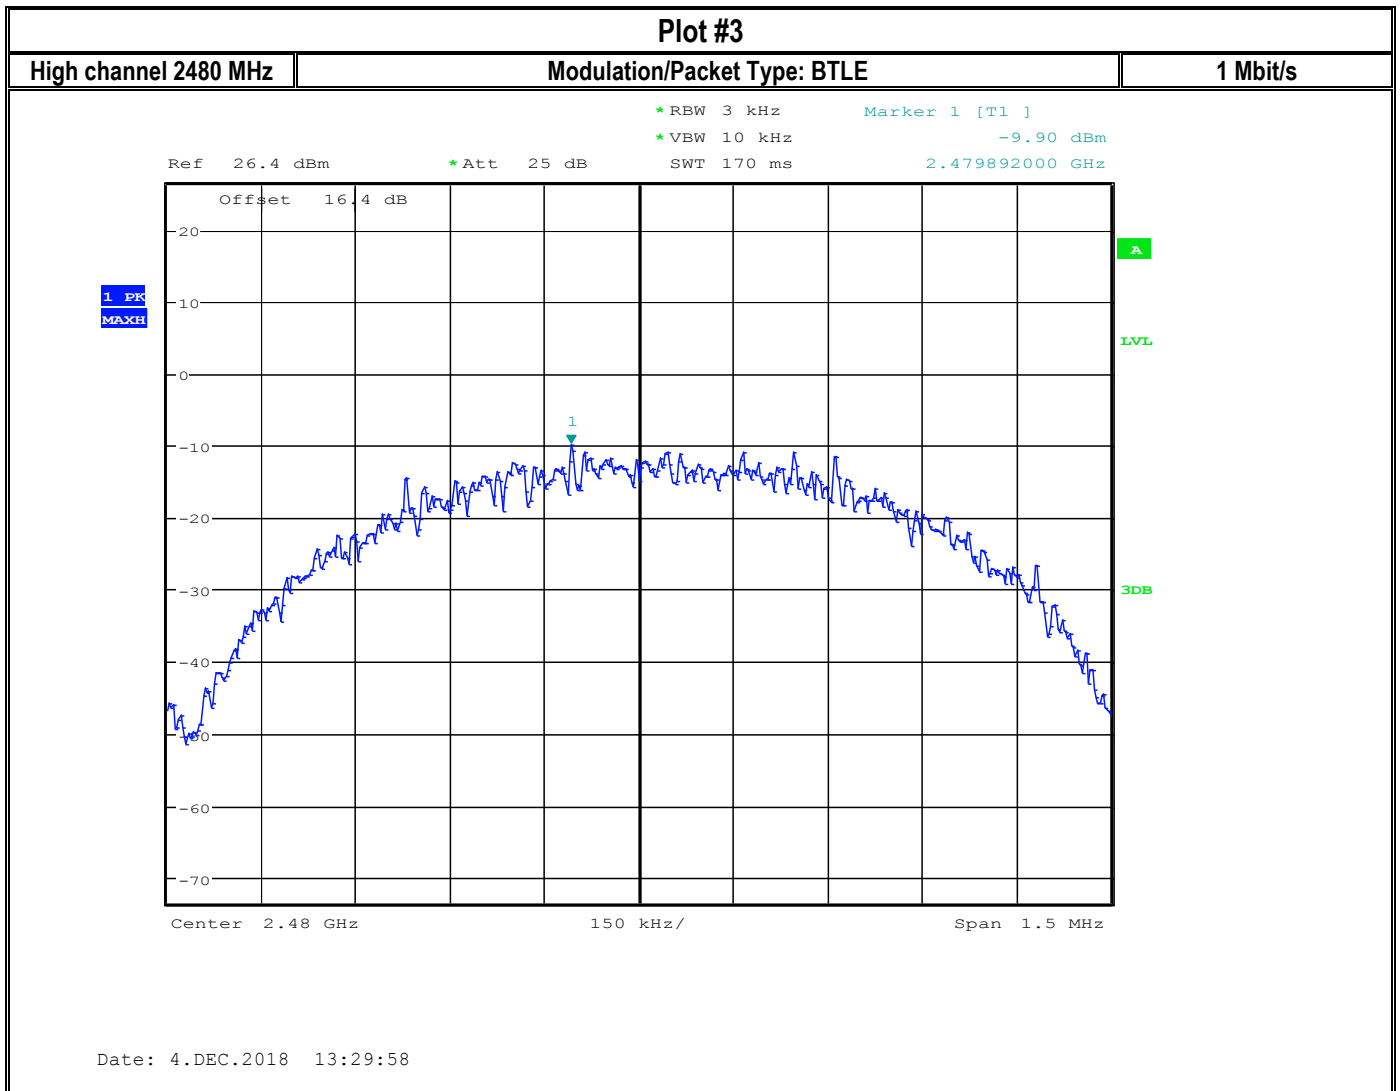

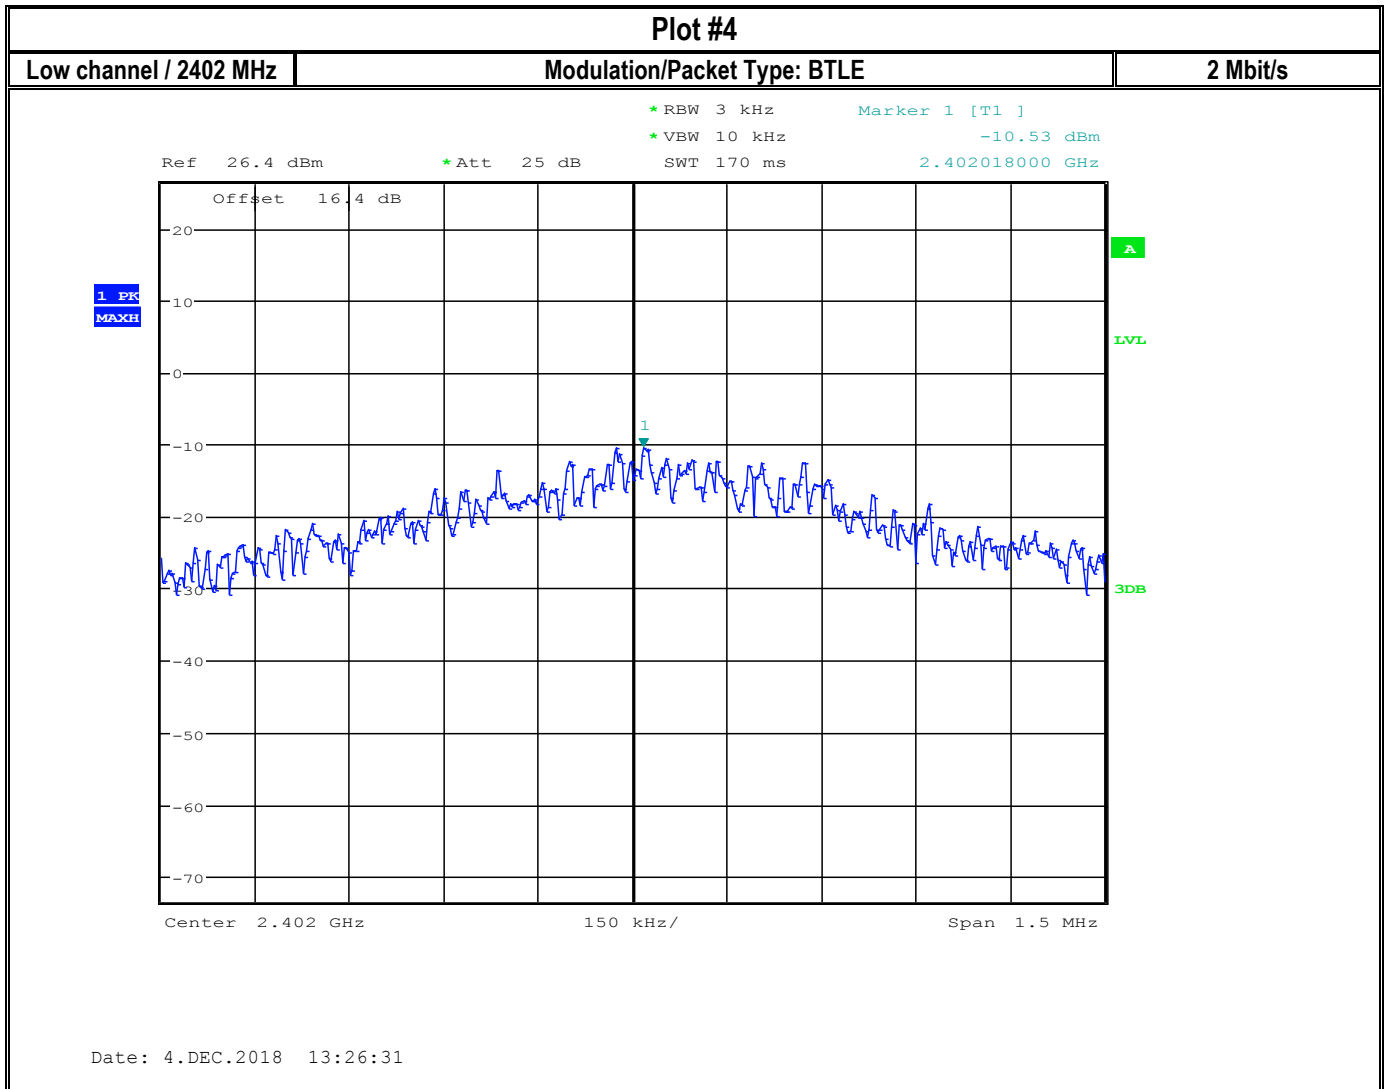

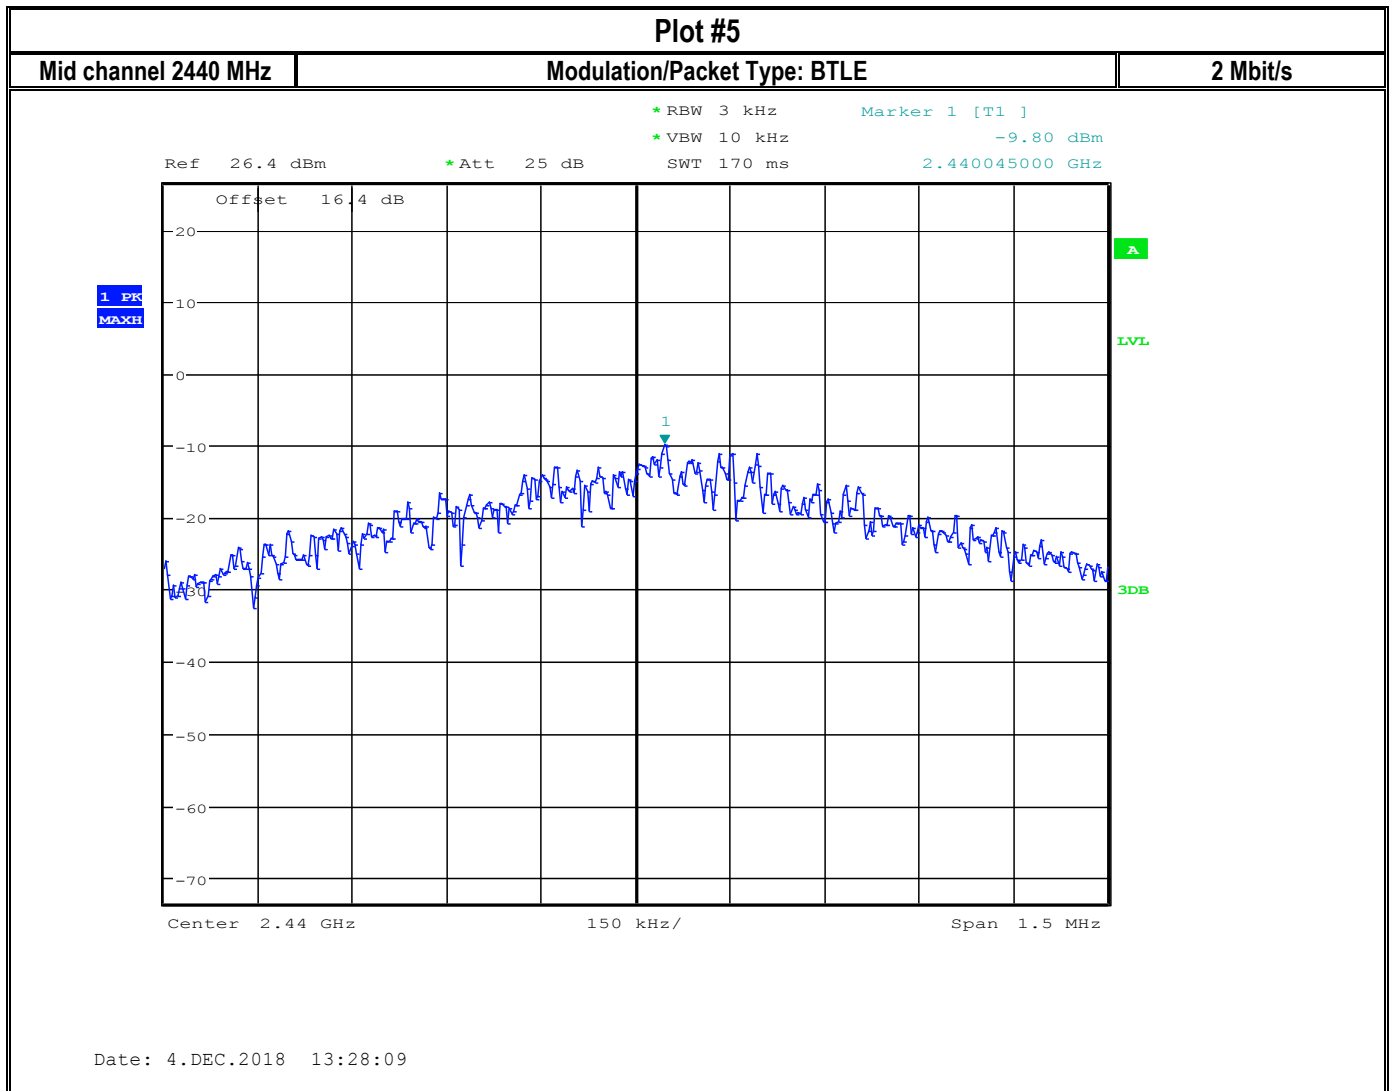




Plot #6

High channel 2480 MHz

Modulation/Package Type: BTLE

2 Mbit/s

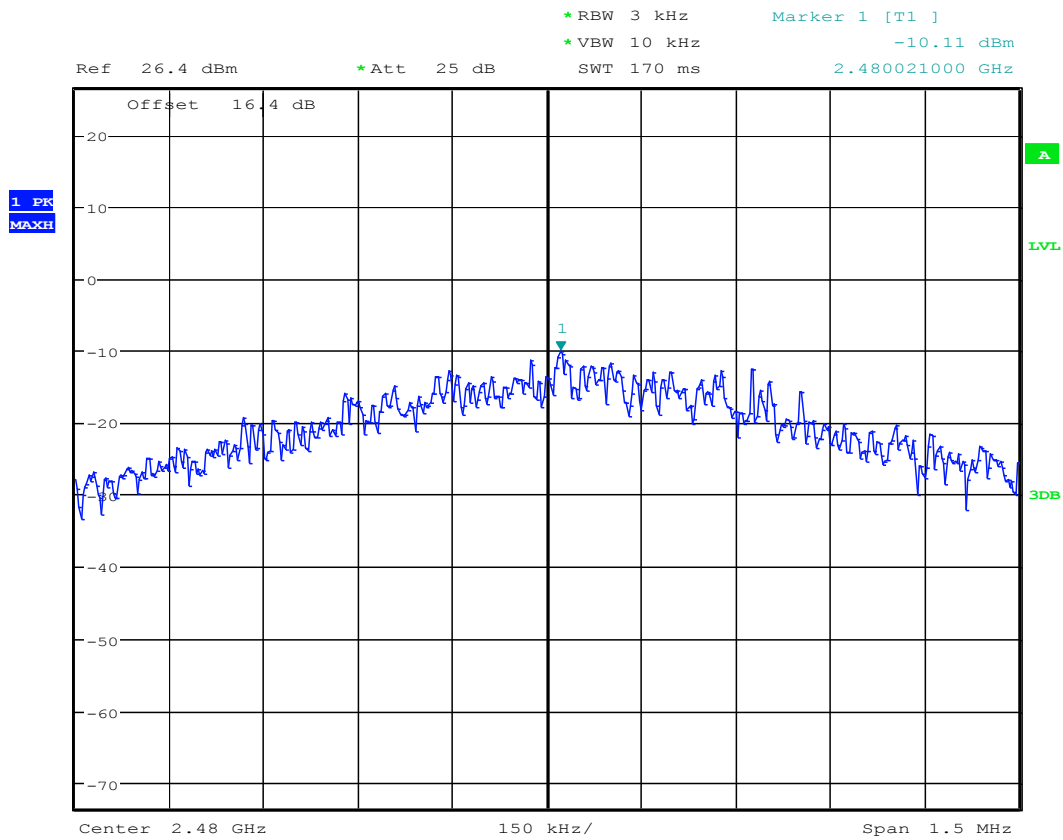

Date: 4.DEC.2018 13:28:58

8.3 Maximum Peak Conducted Output Power

8.3.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v04

Spectrum Analyzer settings:

- $RBW \geq$ DTS bandwidth
- $VBW \geq 3 \times RBW$
- $Span \geq 3 \times RBW$
- Sweep = Auto couple
- Detector function = Peak
- Trace = Max hold
- Use peak marker function to determine the peak amplitude level

8.3.2 Limits:

Maximum Peak Output Power:

- FCC §15.247 (b):
 - (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
- IC RSS-247 5.4:
 - d. For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).
 - As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.


8.3.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
22° C	1	Op.1	12 VDC	3.72 dBi

8.3.4 Measurement result:

Plot #	Frequency (MHz)	Data Rate (Mbit/s)	Maximum Peak Conducted Output Power (dBm)	EIRP (dBm)	Limit (dBm)	Result
1	2402	1	3.24	6.96	30 (Pk) / 36 (EIRP)	Pass
2	2441	1	3.21	6.93	30 (Pk) / 36 (EIRP)	Pass
3	2480	1	3.57	7.29	30 (Pk) / 36 (EIRP)	Pass
4	2402	2	3.25	6.97	30 (Pk) / 36 (EIRP)	Pass
5	2441	2	3.22	6.94	30 (Pk) / 36 (EIRP)	Pass
6	2480	2	3.58	7.30	30 (Pk) / 36 (EIRP)	Pass

8.3.5 Measurement Plots:

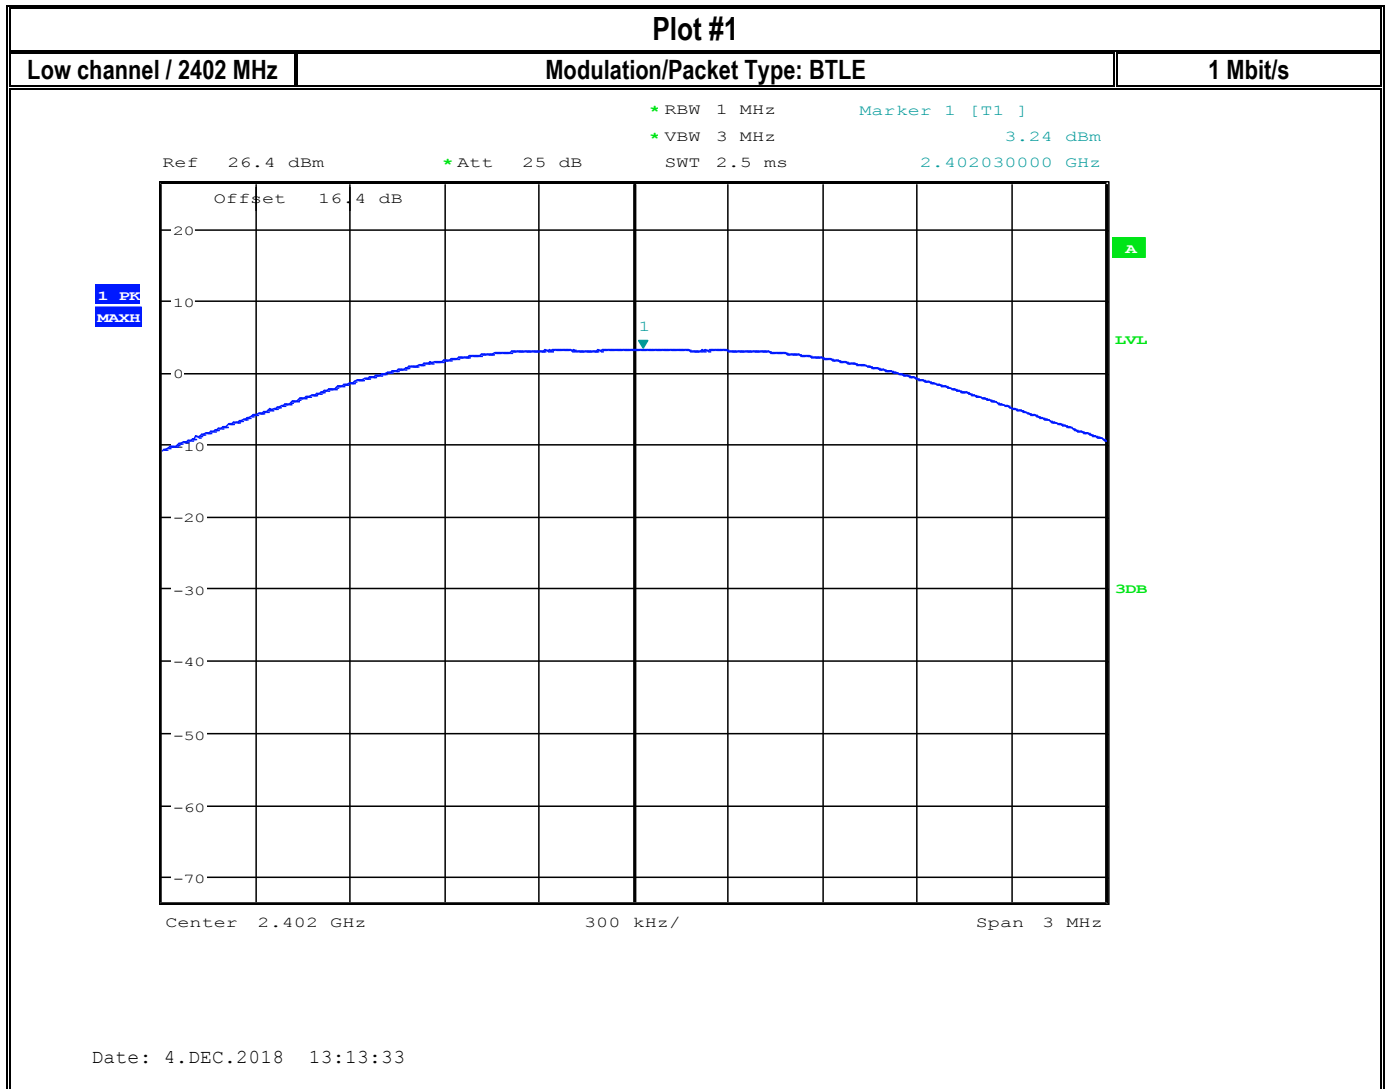




Plot #2

Mid channel 2440 MHz

Modulation/Packet Type: BTLE

1 Mbit/s

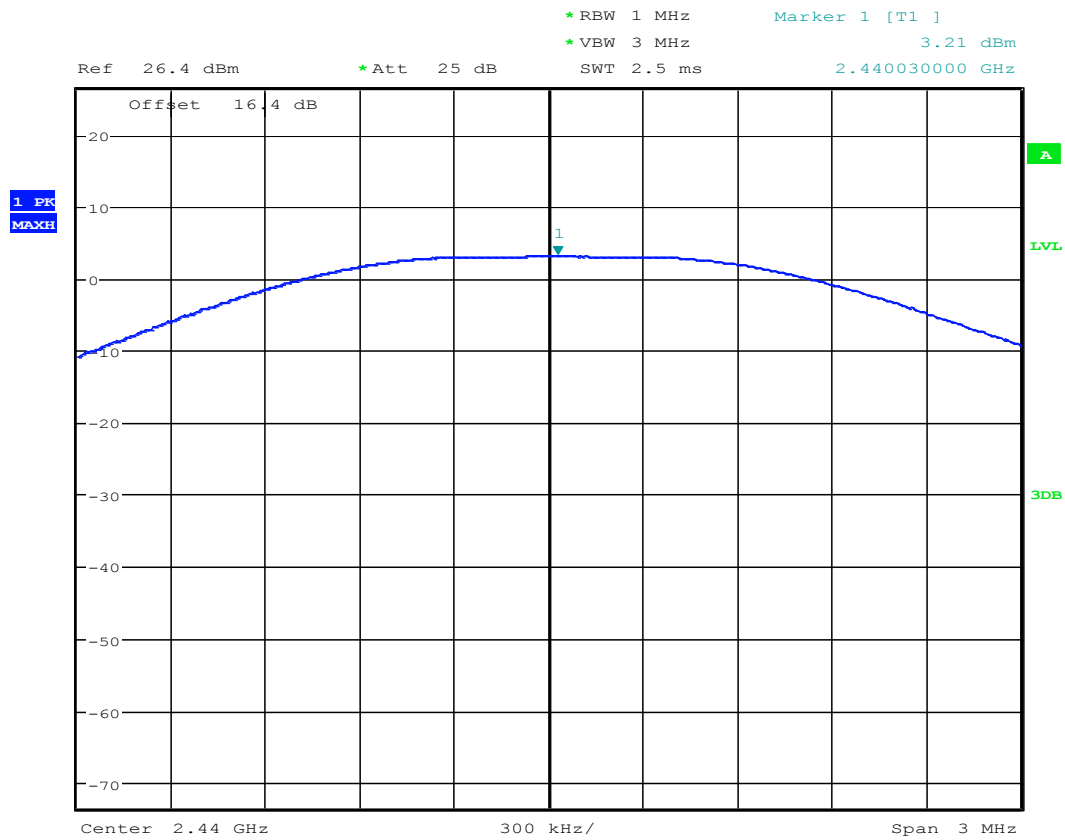

Date: 4.DEC.2018 13:14:59




Plot #3

High channel 2480 MHz

Modulation/Packet Type: BTLE

1 Mbit/s

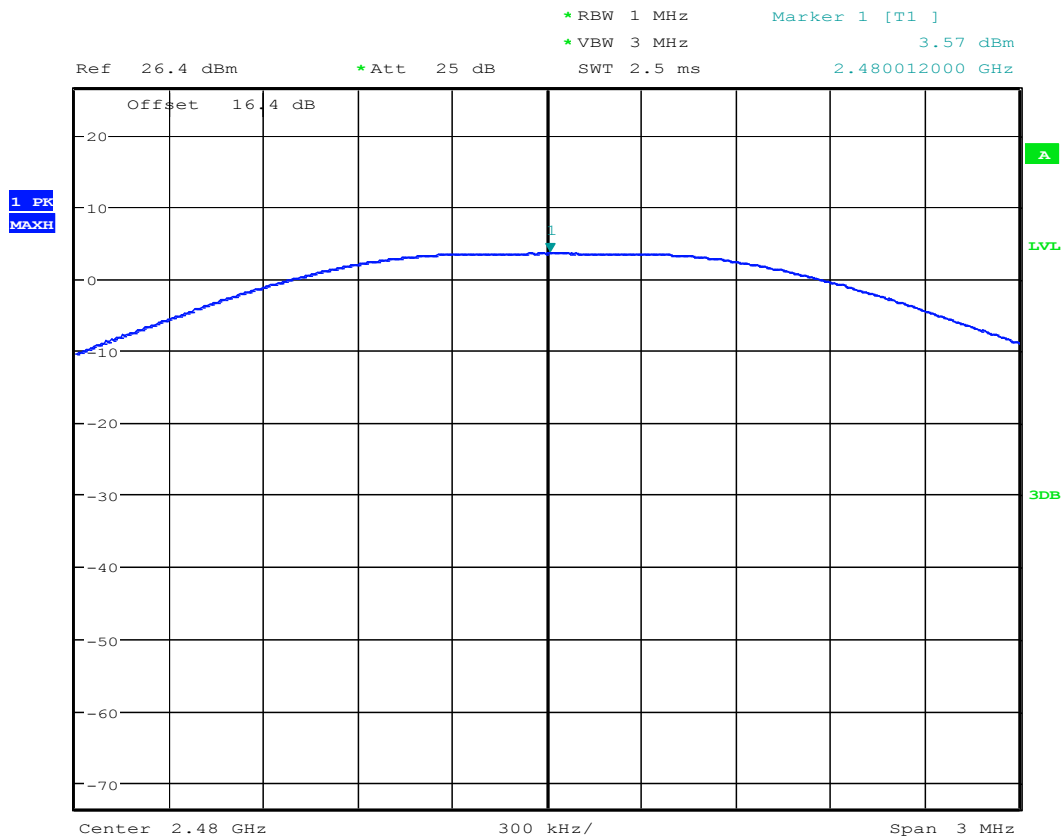


Date: 4.DEC.2018 13:17:53

Plot #4

Low channel / 2402 MHz

Modulation/Packet Type: BTLE

2 Mbit/s

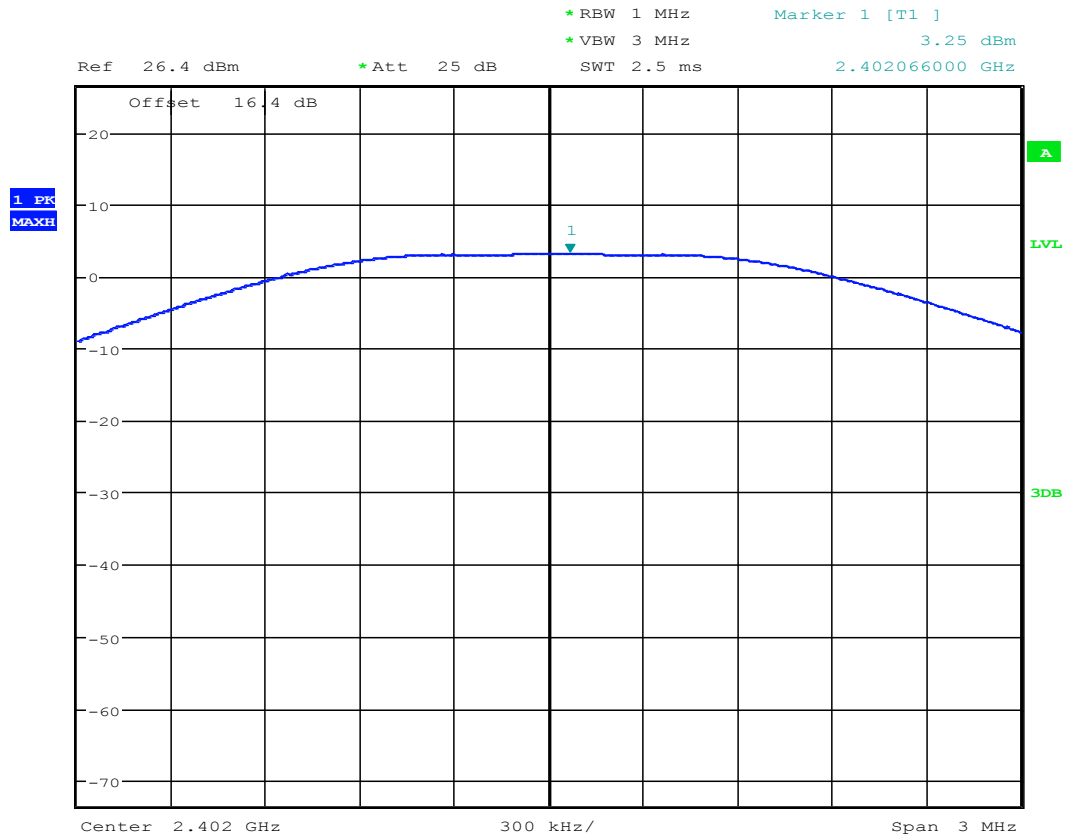

Date: 4.DEC.2018 13:10:57




Plot #5

Mid channel 2440 MHz

Modulation/Packet Type: BTLE

2 Mbit/s

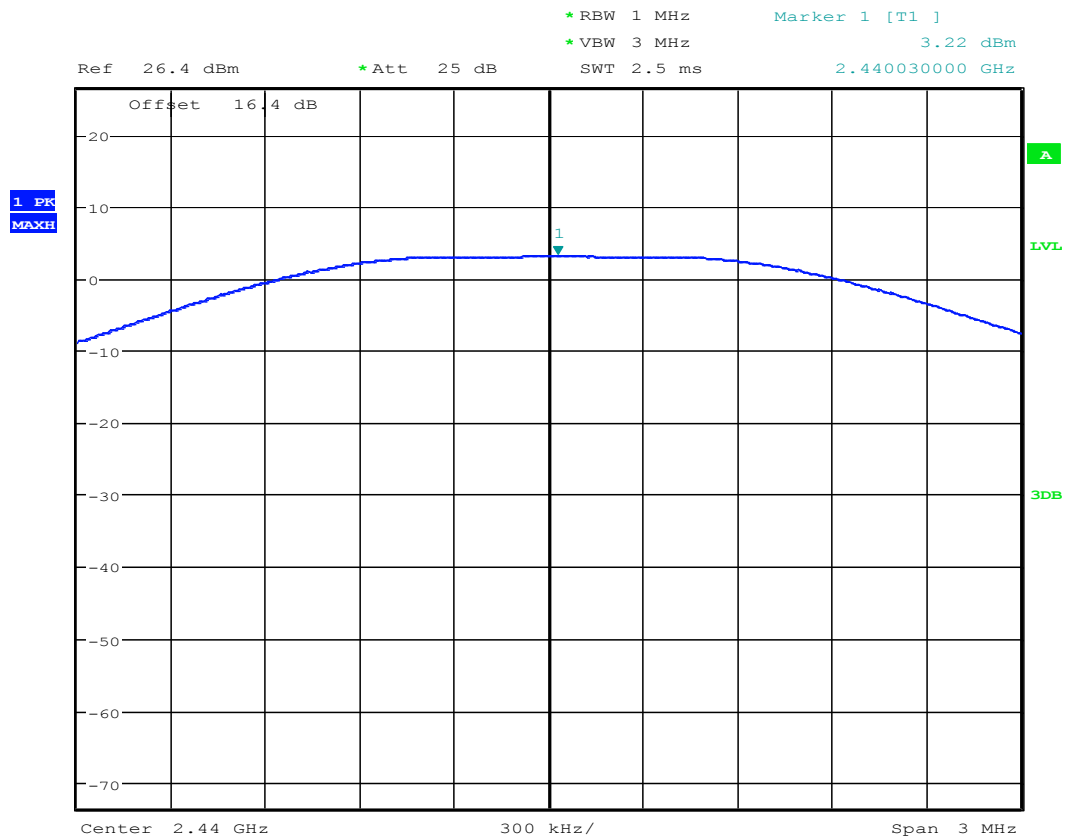

Date: 4.DEC.2018 13:15:48




Plot #6

High channel 2480 MHz

Modulation/Package Type: BTLE

2 Mbit/s

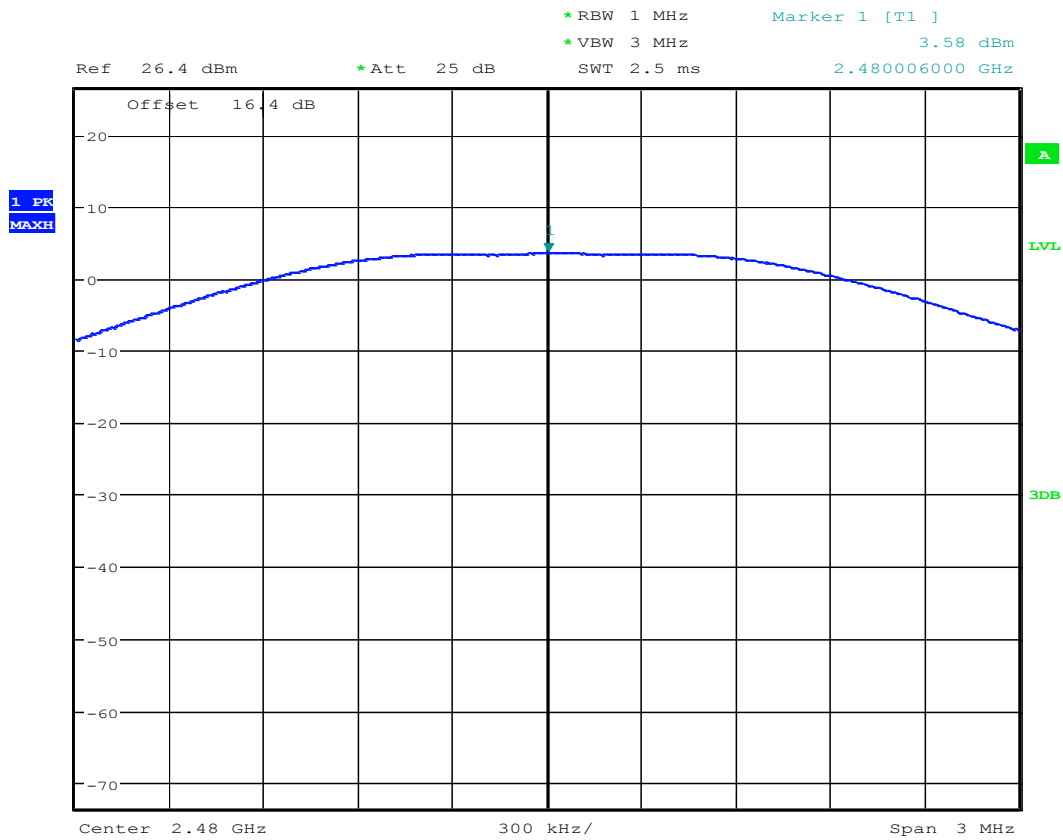

Date: 4.DEC.2018 13:17:27

8.4 Band Edge Compliance

8.4.1 Measurement according to FCC 558074 D01 DTS Meas Guidance v04

Spectrum Analyzer settings for band edge:


- Set the center frequency and span to encompass frequency range to be measured
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW
- Sweep Time: Auto couple
- Detector = Peak
- Trace = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level
- Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge

8.4.2 Limits non restricted band:

- FCC§15.247
 - (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
- RSS-247 5.5
 - In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.

8.4.3 Measurement result:

Plot #	EUT Set-Up #	EUT operating mode	Data Rate (Mbps)	Band Edge	Band Edge Delta (dBc)	Limit (dBc)
1	1	Op.1	1	Lower, Non-restricted	46.31	>20
2	1	Op.1	2	Lower, Non-restricted	38.14	>20

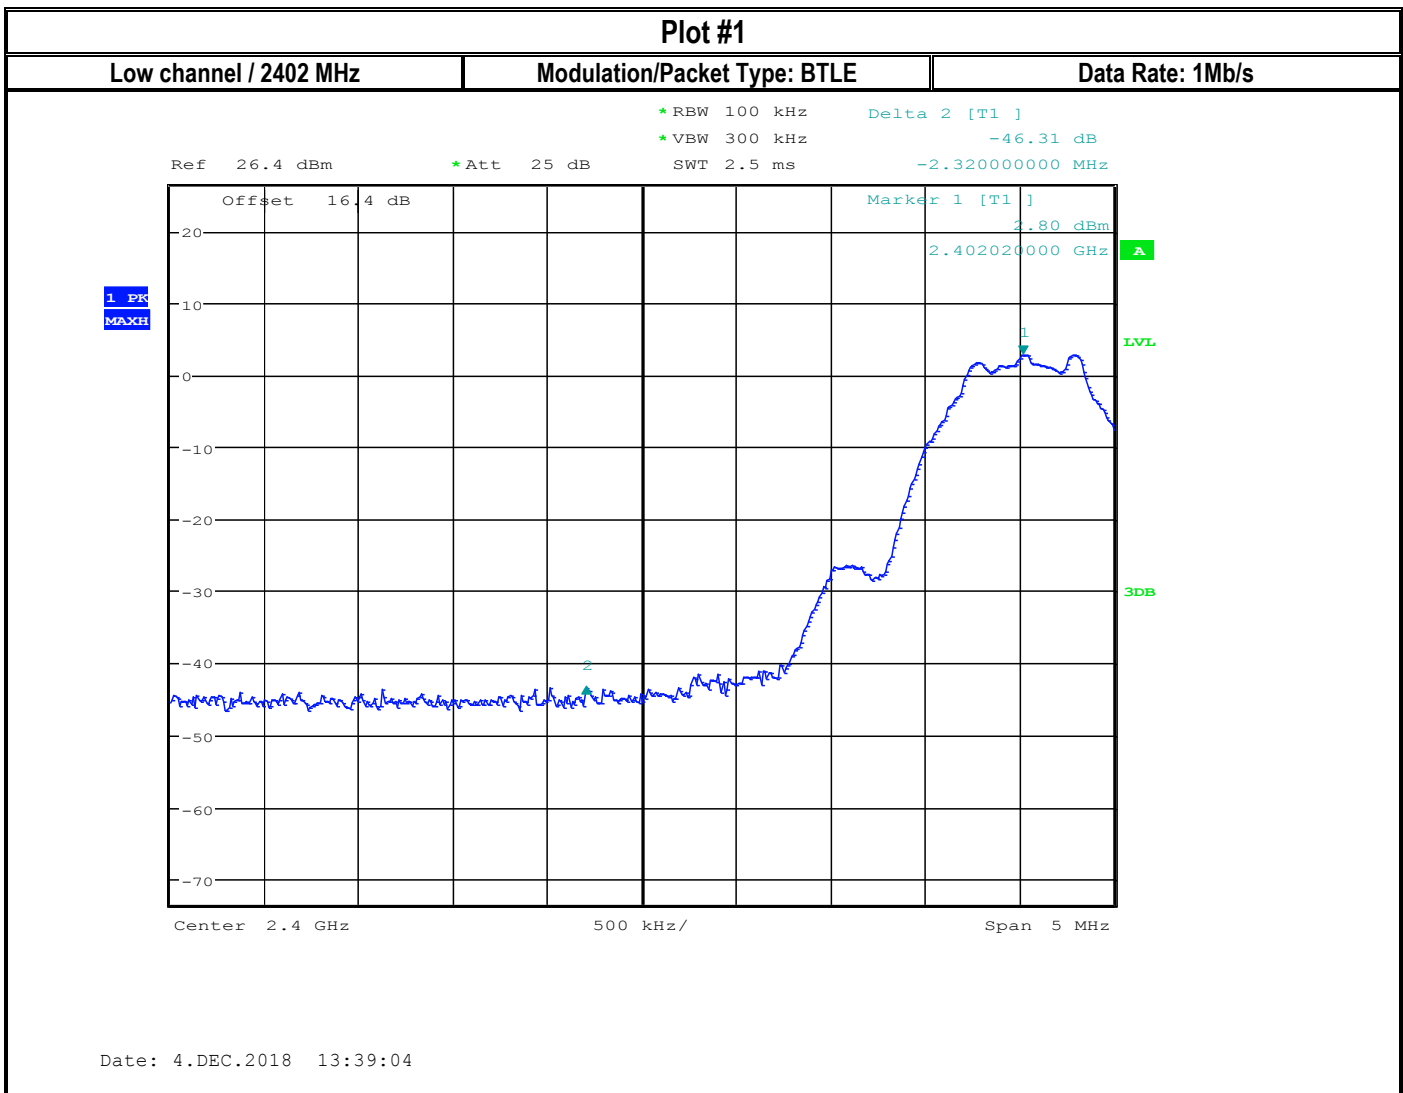
8.4.4 Measurement plots

Plot #2

Low channel / 2402 MHz

Modulation/Packet Type: BTLE

Data Rate: 2Mb/s

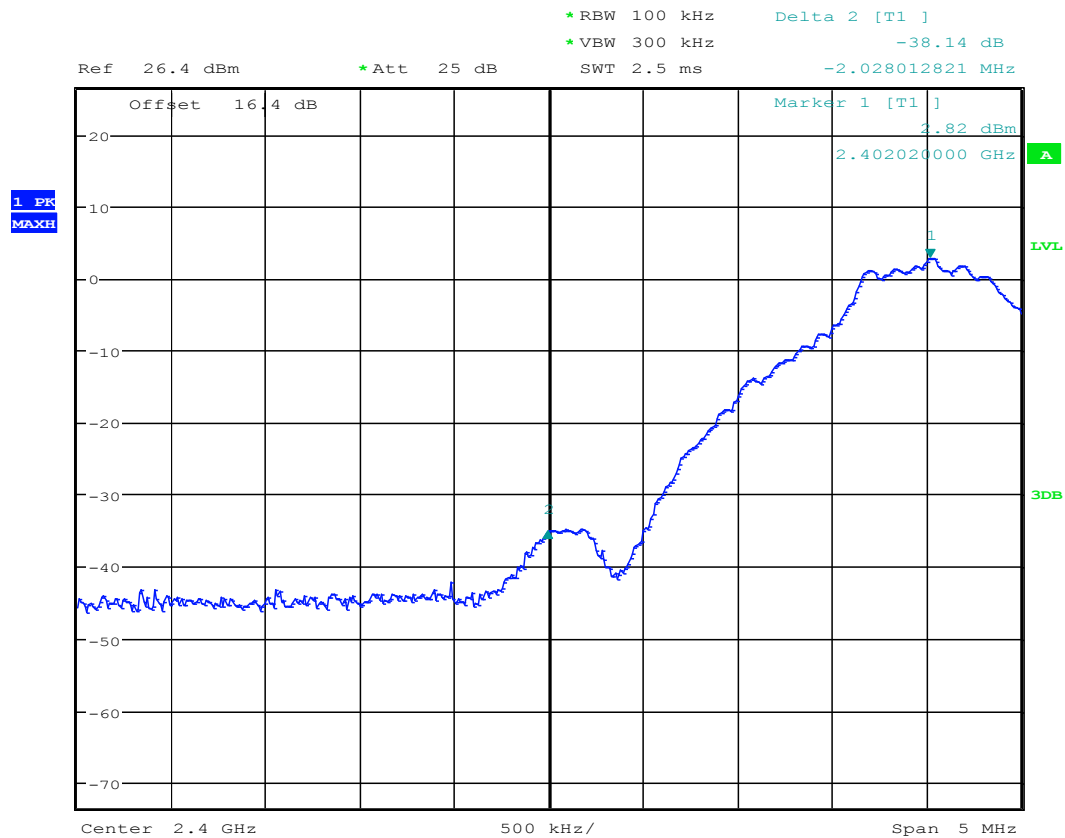

Date: 4.DEC.2018 13:41:47

Spectrum Analyzer settings for restricted band:

- Peak measurements are made using a peak detector and RBW=1 MHz

8.4.5 Limits restricted band §15.247/15.209/15.205

- *PEAK LIMIT= 74 dB μ V/m @3m =-21.23 dBm
- *AVG. LIMIT= 54 dB μ V/m @3m =-41.23 dBm
- Start frequency & stop frequency according to frequency range specified in the restricted band table in FCC section 15.205 & RSS-Gen 8.10
- Measurements with a peak detector were used to show compliance to average limits, thus showing compliance to both peak and average limits.

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

8.4.6 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input	Antenna Gain
22° C	1	Op.1	12 VDC	3.72 dBi

8.4.7 Measurement result :

Plot #	Band Edge	Measured Peak, Average Values (dBm)	Data Rate (Mbps)	Corrected by Antenna Gain (dBm)	Limit (dBm)	Result
1	Upper Restricted Peak	-32.37	1	-28.65	-21.23 Peak	Pass
2	Upper Restricted Average	-52.37	1	-48.65	-41.23 AVG	Pass
3	Upper Restricted Peak	-36.02	2	-32.30	-21.23 Peak	Pass
4	Upper Restricted Average	-50.31	2	-46.59	-41.23 AVG	Pass

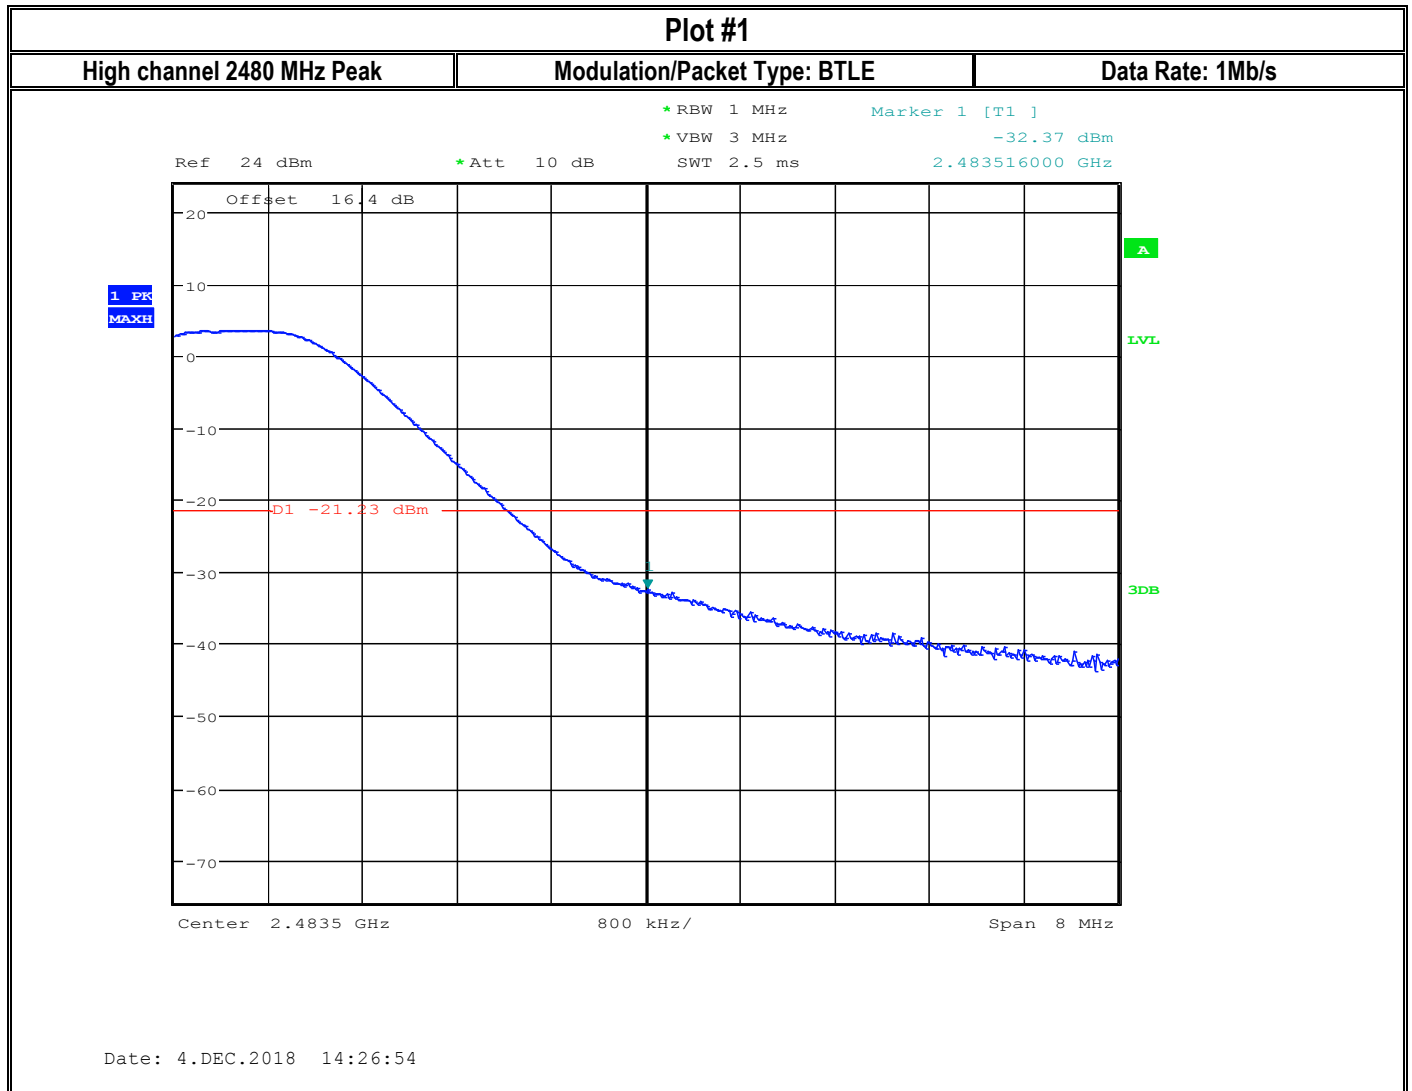
8.4.8 Measurement plot:

Plot #2

High channel 2480 MHz AVG

Modulation/Packet Type: BTLE

Data Rate: 1Mb/s

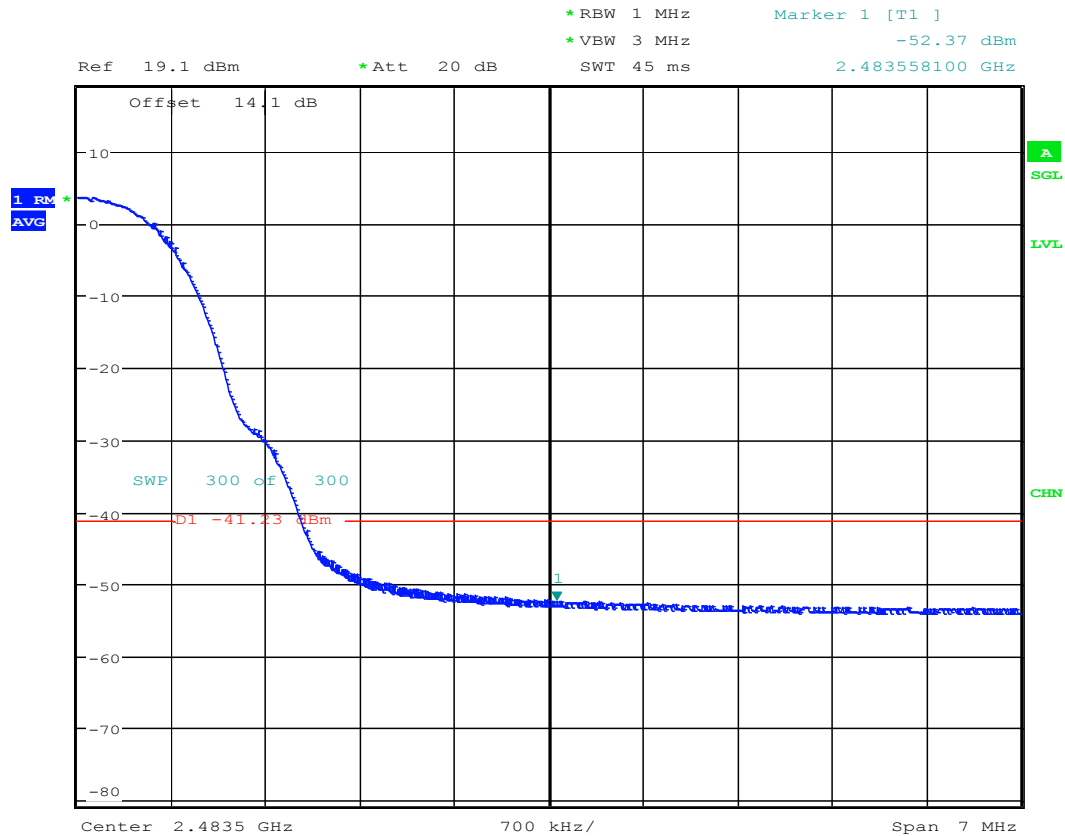


Date: 18.DEC.2018 18:10:48

Plot #3

High channel 2480 MHz Peak

Modulation/Packet Type: BTLE

Data Rate: 2Mb/s

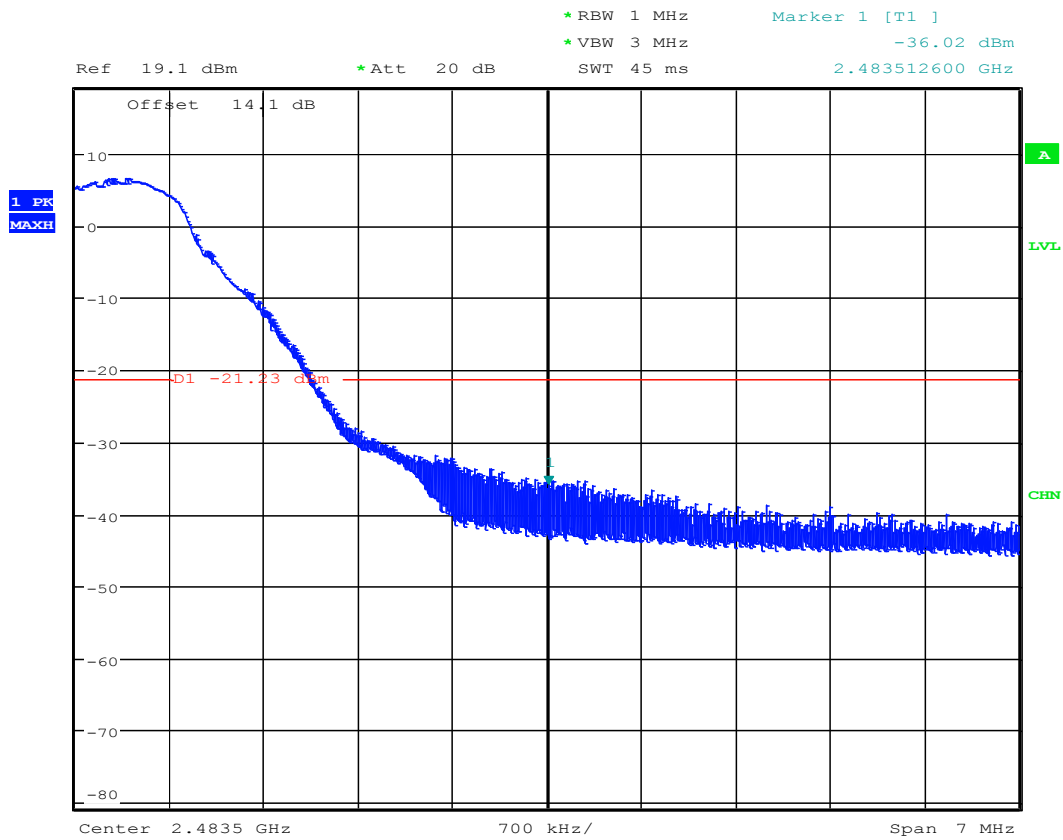


Date: 18.DEC.2018 18:23:45

Plot #4

High channel 2480 MHz AVG

Modulation/Packet Type: BTLE

Data Rate: 2Mb/s

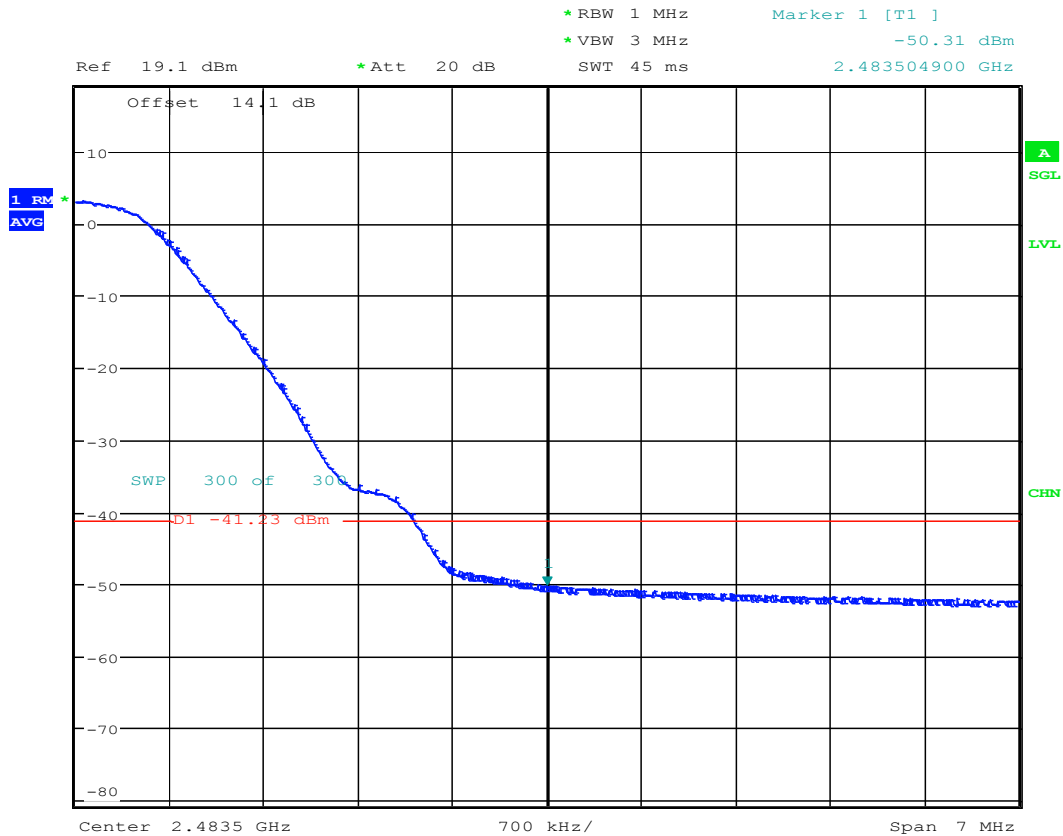

Date: 18.DEC.2018 18:13:35

8.5 Radiated Transmitter Spurious Emissions and Restricted Bands

8.5.1 Measurement according to ANSI C63.10 (2013)

Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak

- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW= 120 KHz (<1GHz)

- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1 MHz

- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation factor as follow: Conversion factor (CF) = $40 \log (D/d) = 40 \log (300\text{m} / 3\text{m}) = 80\text{dB}$

8.5.2 Limits:

FCC §15.247

- d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Measurement Distance (m)	Field strength @ 3m ($\text{dB}\mu\text{V/m}$)
0.009–0.490	2400/F(kHz) / -----	300	-
0.490–1.705	24000/F(kHz) / -----	30	-
1.705–30.0	30 / (29.5)	30	-
30–88	100	3	40 $\text{dB}\mu\text{V/m}$
88–216	150	3	43.5 $\text{dB}\mu\text{V/m}$
216–960	200	3	46 $\text{dB}\mu\text{V/m}$
Above 960	500	3	54 $\text{dB}\mu\text{V/m}$

FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
 *PEAK LIMIT= 74 $\text{dB}\mu\text{V/m}$
 *AVG. LIMIT= 54 $\text{dB}\mu\text{V/m}$

8.5.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
23° C	3	Op.1	12 VDC

8.5.4 Measurement result:


Plot #	Channel #	Scan Frequency	Highest emission in dBuV/m	Frequency of highest emission in MHz	Limit	Result
1 – 3	Low	30 MHz – 18 GHz	49.66	4804.07	See section 8.5.2	Pass
4 – 8	Mid	9 kHz – 40 GHz	71.12	0.52	See section 8.5.2	Pass
9 – 11	High	30 MHz – 18 GHz	53.77	4959.90	See section 8.5.2	Pass

8.5.5 Measurement Plots:

Plot #1 Radiated Emissions: 30MHz – 1GHz**Modulation: BT LE****Channel: Low**

Final Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
51.814350	34.72	40.00	5.28	100.0	100.000	124.0	V	-19.3	11:55:56 AM - 11/29/2018
54.684600	34.95	40.00	5.05	100.0	100.000	145.0	V	-20.5	11:58:45 AM - 11/29/2018
915.068550	28.32	46.00	17.68	100.0	100.000	267.0	V	-6.0	12:01:36 PM - 11/29/2018

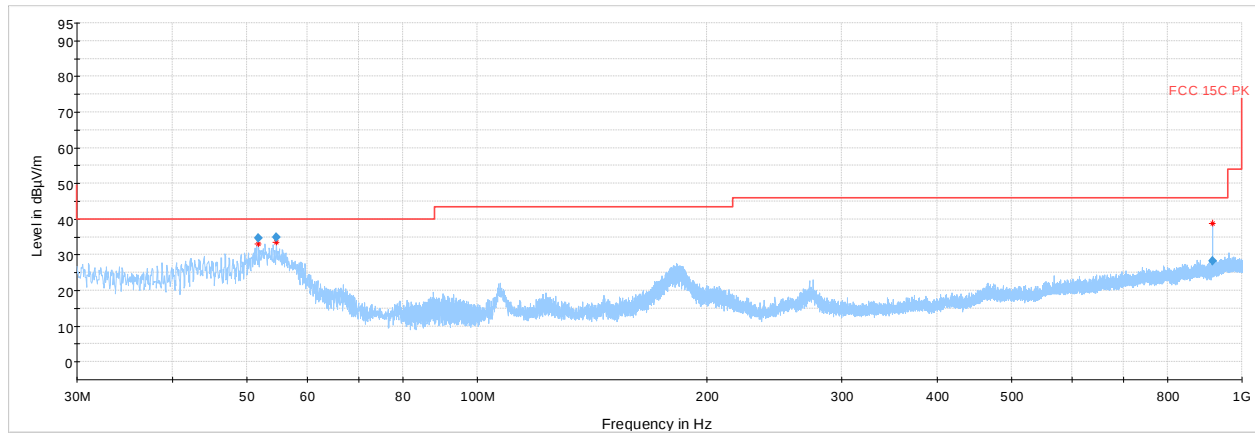


Preview Result 2-RMS Preview Result 1-PK+ Critical_Freqs RMS Critical_Freqs PK+

FCC 15C PK Final_Result PK+ Final_Result RMS

Plot # 2 Radiated Emissions: 1 – 3GHz

Modulation: BT LE

Channel: Low

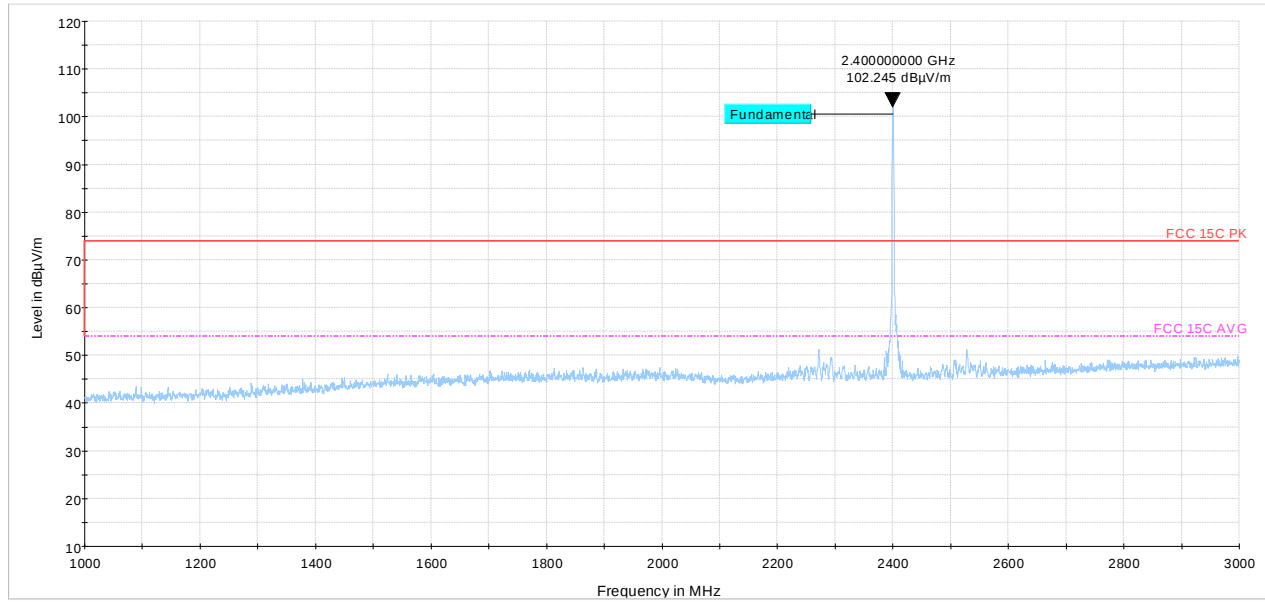

— Preview Result 2-RMS
 — Preview Result 1-PK+
 + Critical_Freqs RMS
 + Critical_Freqs PK+
— FCC 15C PK
— FCC 15C AVG
♦ Final_Result PK+
♦ Final_Result RMS


Plot # 3 Radiated Emissions: 3 – 18GHz

Modulation: BT LE

Channel: Low

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
4804.078833	---	41.95	53.98	12.02	200.0	1000.000	120.0	V	118.0	-33.5	6:24:17 PM - 11/28/2018
4804.078833	49.66	---	73.99	24.33	200.0	1000.000	120.0	V	118.0	-33.5	6:24:17 PM - 11/28/2018

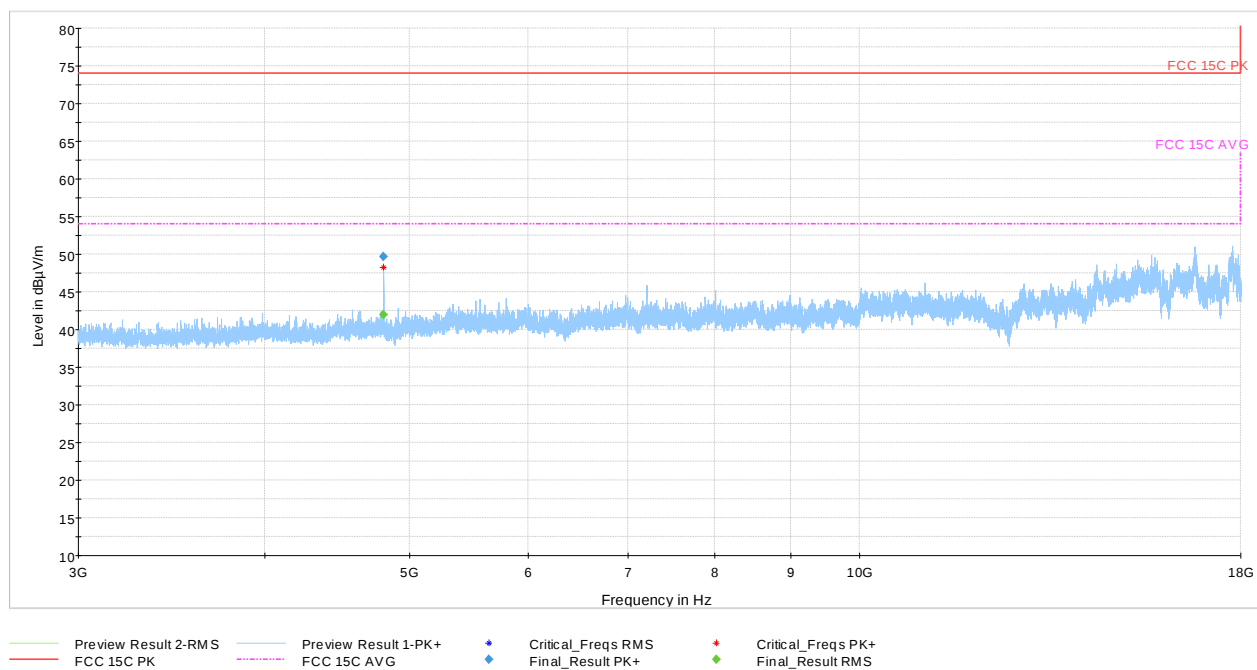


Plot # 4 Radiated Emissions: 9KHz – 30MHz

Modulation: BT LE

Channel: Mid

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
0.528470	71.12	73.15	2.02	500.0	9.000	175.0	H	198.0	52.3	1:46:16 PM - 11/29/2018
1.898530	68.14	70.00	1.86	500.0	9.000	107.0	H	47.0	43.5	1:48:51 PM - 11/29/2018

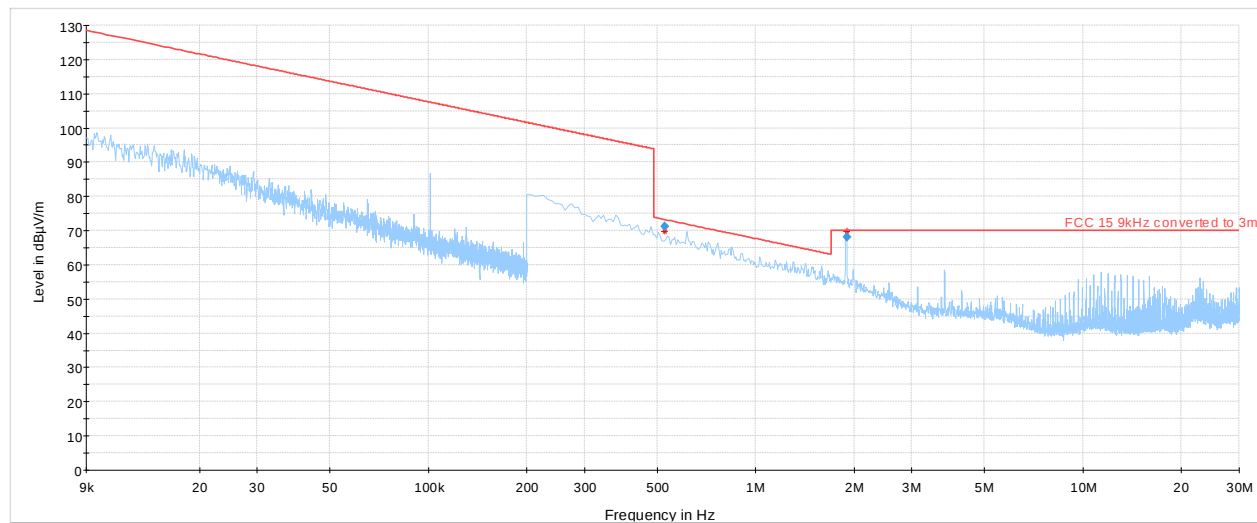

Preview Result 2-RMS
FCC 15 9kHz converted to 3m
Preview Result 1-PK+
Final Result PK+
Critical_Freqs RMS
Final Result RMS
Critical_Freqs PK+


Plot #5 Radiated Emissions: 30MHz – 1GHz

Modulation: BT LE

Channel: Mid

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
51.256850	33.71	40.00	6.29	100.0	100.000	124.0	V	340.0	-19.2	11:28:02 AM - 11/29/2018
53.466950	31.54	40.00	8.46	100.0	100.000	100.0	V	264.0	-20.0	11:30:44 AM - 11/29/2018
58.543600	31.59	40.00	8.41	100.0	100.000	235.0	V	40.0	-22.3	11:33:44 AM - 11/29/2018
342.229200	17.60	46.00	28.40	100.0	100.000	256.0	V	181.0	-16.7	11:36:25 AM - 11/29/2018
374.038850	18.52	46.00	27.48	100.0	100.000	117.0	V	69.0	-15.5	11:39:33 AM - 11/29/2018
681.594500	25.39	46.00	20.61	100.0	100.000	228.0	V	64.0	-9.2	11:42:20 AM - 11/29/2018

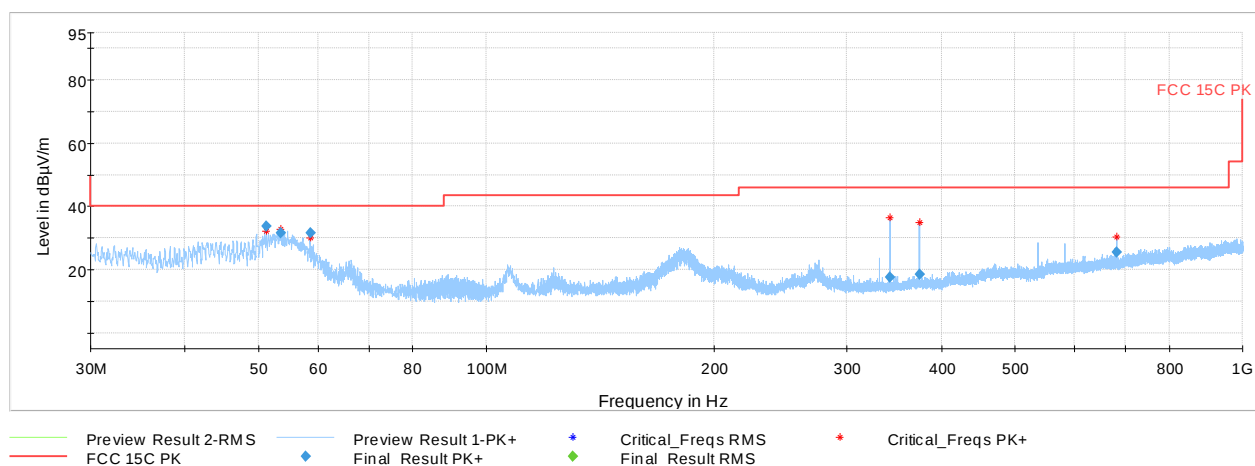

Plot #6 Radiated Emissions: 1 – 3GHz

Modulation: BT LE

Channel: Mid

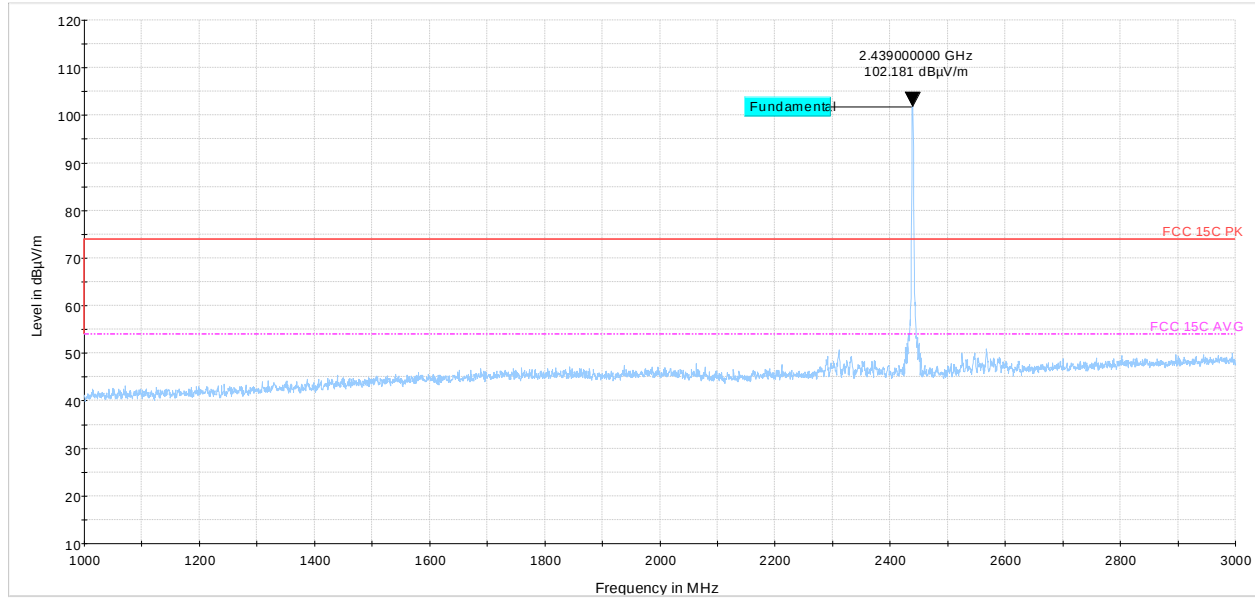

Preview Result 2-RMS	Preview Result 1-PK+	Critical_Freqs RMS	Critical_Freqs PK+
FCC 15C PK	FCC 15C AVG	Final_Result PK+	Final_Result RMS


Plot #7 Radiated Emissions: 3 – 18GHz

Modulation: BT LE

Channel: Mid

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB)	Comment
4879.415500	---	42.97	53.98	11.01	200.0	1000.000	204.0	V	14.0	-33.4	6:13:09 PM - 11/28/2018
4879.415500	49.78	---	73.99	24.20	200.0	1000.000	204.0	V	14.0	-33.4	6:13:09 PM - 11/28/2018

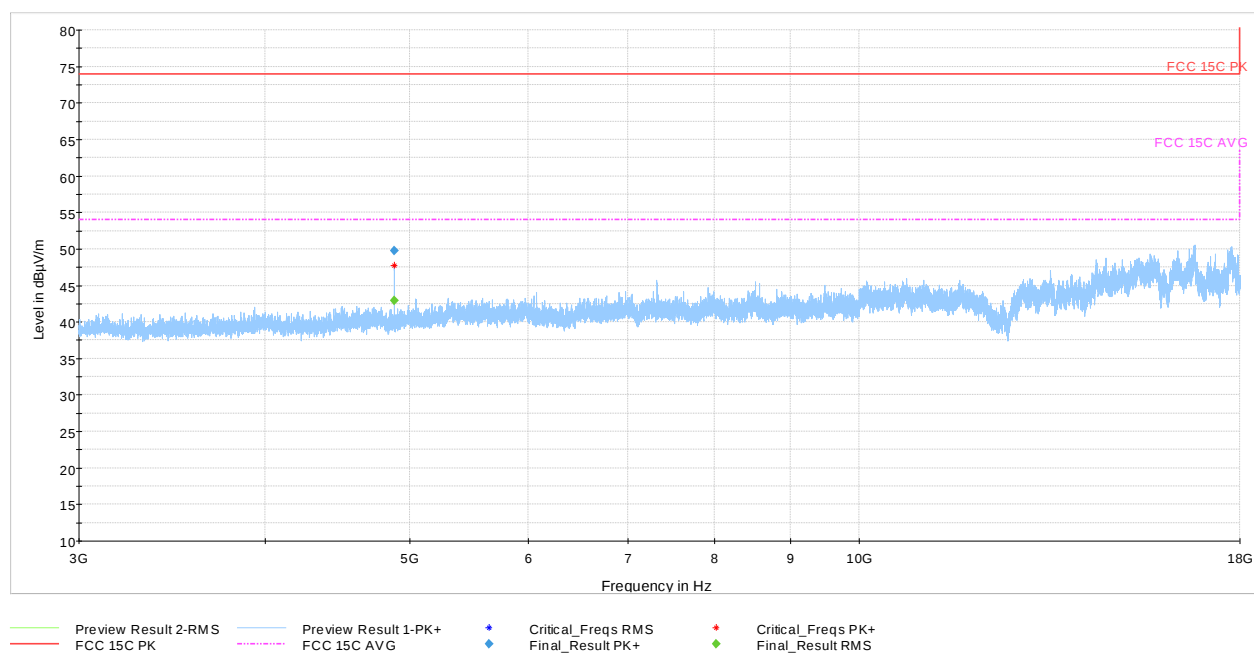

Plot #8 Radiated Emissions: 18 – 40GHz

Modulation: BT LE

Channel: Mid

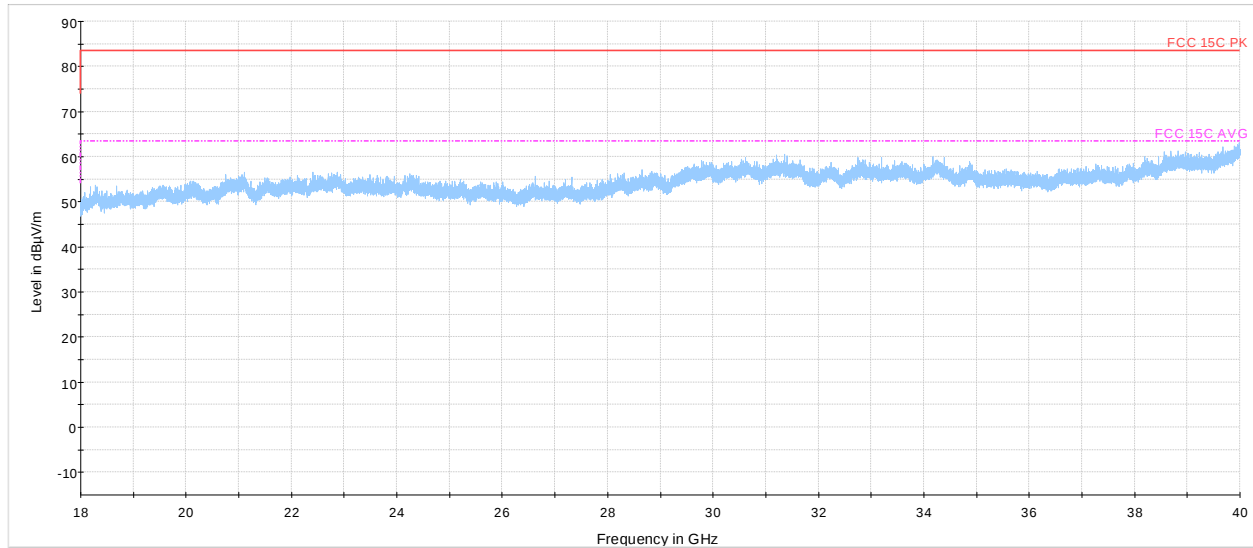

— Preview Result 2-RMS
 — Preview Result 1-PK+
 ◆ Critical_Freqs RMS
 ◆ Critical_Freqs PK+
— FCC 15C PK
- - - FCC 15C AVG
◆ Final_Result PK+
◆ Final_Result RMS


Plot #9 Radiated Emissions: 30MHz – 1GHz

Modulation: BT LE

Channel: High

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
46.896550	31.00	40.00	9.00	100.0	100.000	100.0	V	0.0	-17.6	12:14:54 PM - 11/29/2018
48.722100	29.30	40.00	10.70	100.0	100.000	100.0	V	269.0	-18.5	12:17:56 PM - 11/29/2018
51.823100	34.26	40.00	5.74	100.0	100.000	166.0	V	9.0	-19.3	12:12:02 PM - 11/29/2018

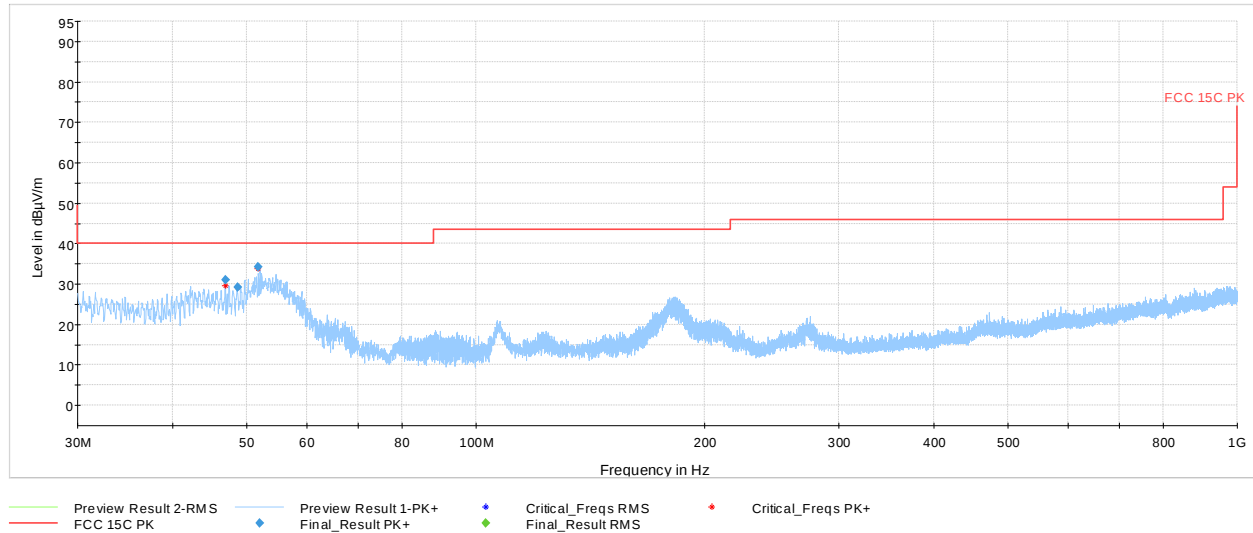

Plot # 10 Radiated Emissions: 1 – 3GHz

Modulation: BT LE

Channel: High

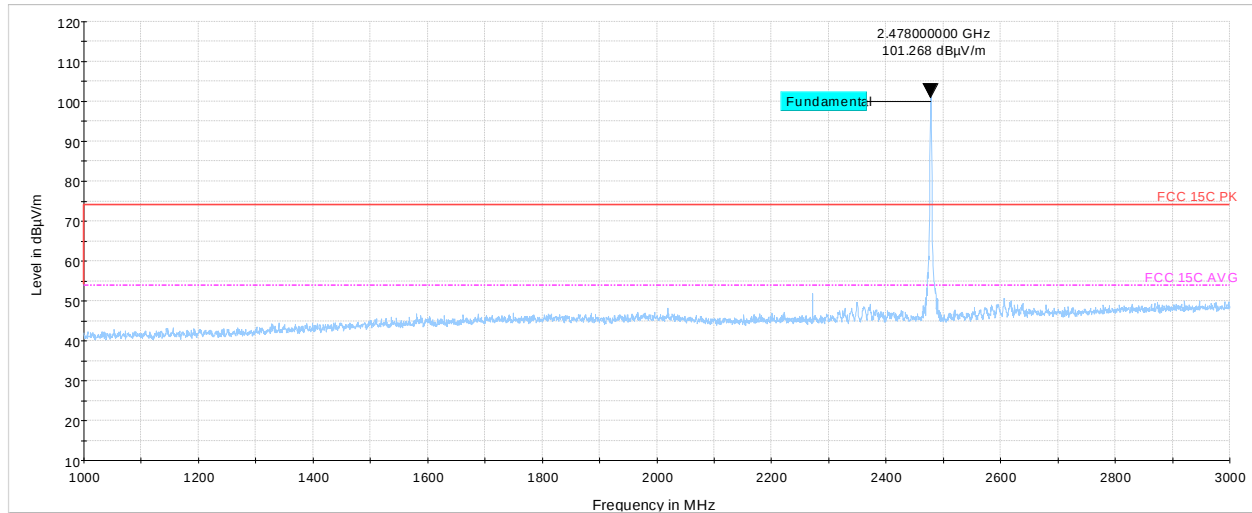

— Preview Result 2-RMS — Preview Result 1-PK+ ♦ Critical_Freqs RMS + Critical_Freqs PK+ — FCC 15C PK
— FCC 15C AVG ♦ Final_Result PK+ ♦ Final_Result RMS x MaxPeak-PK+ (Single) + RMS (Single)


Plot #11 Radiated Emissions: 3 – 18GHz

Modulation: BT LE

Channel: High

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB)	Comment
4959.908800	---	47.58	53.98	6.40	200.0	1000.000	162.0	V	81.0	-33.1	5:47:40 PM - 11/28/2018
4959.908800	53.77	---	73.99	20.22	200.0	1000.000	162.0	V	81.0	-33.1	5:47:40 PM - 11/28/2018

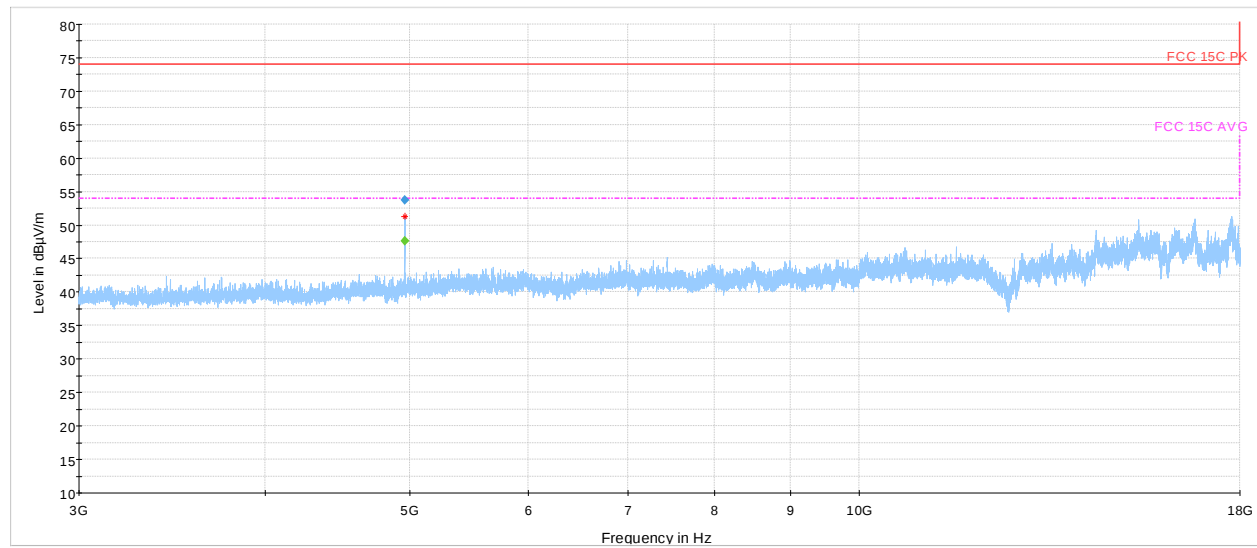

8.6 AC Power Line Conducted Emissions

8.6.1 Measurement according to ANSI C63.4

Analyzer Settings:

- RBW = 9 KHz (CISPR Bandwidth)
- Detector: Peak / Average for Pre-scan
- Quasi-Peak/Average for Final Measurements

8.6.2 Limits: §15.207 & RSS-Gen 8.8

FCC §15.207(a) & RSS-Gen 8.8

- Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

8.6.3 Test conditions and setup:

Ambient Temperature $^{\circ}$	Power line (L1, L2, L3, N)	Power Input
22 $^{\circ}$ C	Line & Neutral	110V / 60Hz

8.6.4 Measurement Result:

Plot #	Port	EUT Set-Up #:	EUT operating mode	Scan Frequency	Limit	Result
1	POE	3	Op.1	150 kHz – 30 MHz	See section 8.6.2	Pass
2	AC Mains	4	Op.1	150 kHz – 30 MHz	See section 8.6.2	Pass

8.6.5 Measurement Plots:

Plot # 1


EUT Information

EUT Name: Onvation Hub
 Manufacturer: Kimberly-Clark Professional
 Unit Number: D72
 IMEI: 3598650700744440
 Comment: DC/PowerOverEthernet+(802.3at)

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)	Comment
0.382000	---	42.18	48.24	6.06	500.0	9.000	L1	GND	10.3	12:23:02 PM - 12/14/2018
0.406000	---	46.39	47.73	1.34	500.0	9.000	L1	GND	10.4	12:23:05 PM - 12/14/2018
0.410000	51.39	---	57.65	6.26	500.0	9.000	L1	GND	10.3	12:22:38 PM - 12/14/2018
0.426000	---	43.89	47.33	3.44	500.0	9.000	L1	GND	10.3	12:23:08 PM - 12/14/2018
0.434000	45.46	---	57.18	11.71	500.0	9.000	L1	GND	10.2	12:22:42 PM - 12/14/2018
0.850000	---	37.98	46.00	8.02	500.0	9.000	L1	GND	10.3	12:23:11 PM - 12/14/2018
1.302000	40.51	---	56.00	15.49	500.0	9.000	L1	GND	10.3	12:22:46 PM - 12/14/2018
1.418000	40.75	---	56.00	15.25	500.0	9.000	L1	GND	10.3	12:22:51 PM - 12/14/2018
1.418000	---	38.40	46.00	7.60	500.0	9.000	L1	GND	10.3	12:23:14 PM - 12/14/2018
1.986000	41.70	---	56.00	14.30	500.0	9.000	L1	GND	10.3	12:22:55 PM - 12/14/2018
2.554000	---	38.11	46.00	7.89	500.0	9.000	L1	GND	10.2	12:23:17 PM - 12/14/2018
2.554000	40.67	---	56.00	15.33	500.0	9.000	L1	GND	10.2	12:22:59 PM - 12/14/2018

Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.

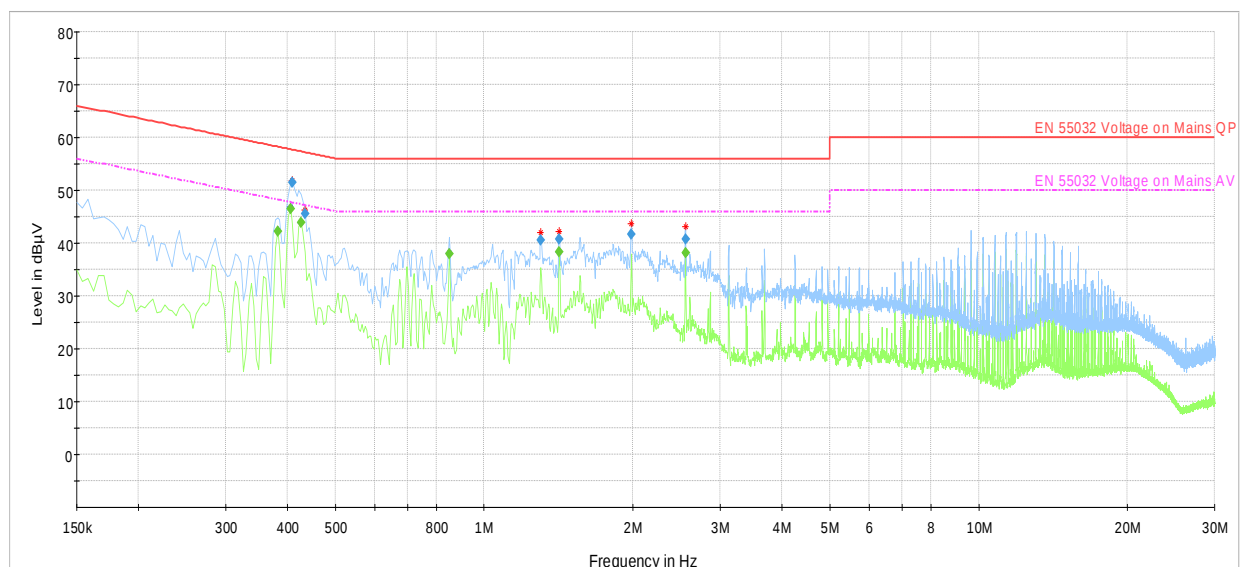

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG Critical_Freqs PK+
 EN 55032 Voltage on Mains QP EN 55032 Voltage on Mains AV Final_Result QPK Final_Result AVG

Plot # 2


EUT Information

EUT Name: Onvation Hub
 Manufacturer: Kimberly-Clark Professional
 Unit Number: D72
 IMEI: 3598650700744440
 Comment: AC/DC Power supply

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)	Comment
0.154000	51.35	---	65.78	14.43	500.0	9.000	L1	GND	10.7	12:34:28 PM - 12/14/2018
0.410000	---	42.61	47.65	5.04	500.0	9.000	L1	GND	10.3	12:36:00 PM - 12/14/2018
0.414000	45.28	---	57.57	12.29	500.0	9.000	L1	GND	10.3	12:34:32 PM - 12/14/2018
0.430000	46.54	---	57.25	10.71	500.0	9.000	N	GND	10.3	12:35:08 PM - 12/14/2018
0.438000	---	39.87	47.10	7.23	500.0	9.000	N	GND	10.3	12:38:10 PM - 12/14/2018
0.438000	45.61	---	57.10	11.49	500.0	9.000	N	GND	10.3	12:35:12 PM - 12/14/2018
0.842000	---	38.22	46.00	7.78	500.0	9.000	L1	GND	10.3	12:36:03 PM - 12/14/2018
0.842000	40.17	---	56.00	15.83	500.0	9.000	L1	GND	10.3	12:34:36 PM - 12/14/2018
1.406000	---	38.55	46.00	7.45	500.0	9.000	L1	GND	10.3	12:36:05 PM - 12/14/2018
1.406000	39.66	---	56.00	16.34	500.0	9.000	L1	GND	10.3	12:34:40 PM - 12/14/2018
1.966000	---	36.97	46.00	9.03	500.0	9.000	L1	GND	10.3	12:36:08 PM - 12/14/2018
2.530000	---	37.41	46.00	8.59	500.0	9.000	L1	GND	10.1	12:36:11 PM - 12/14/2018

Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.

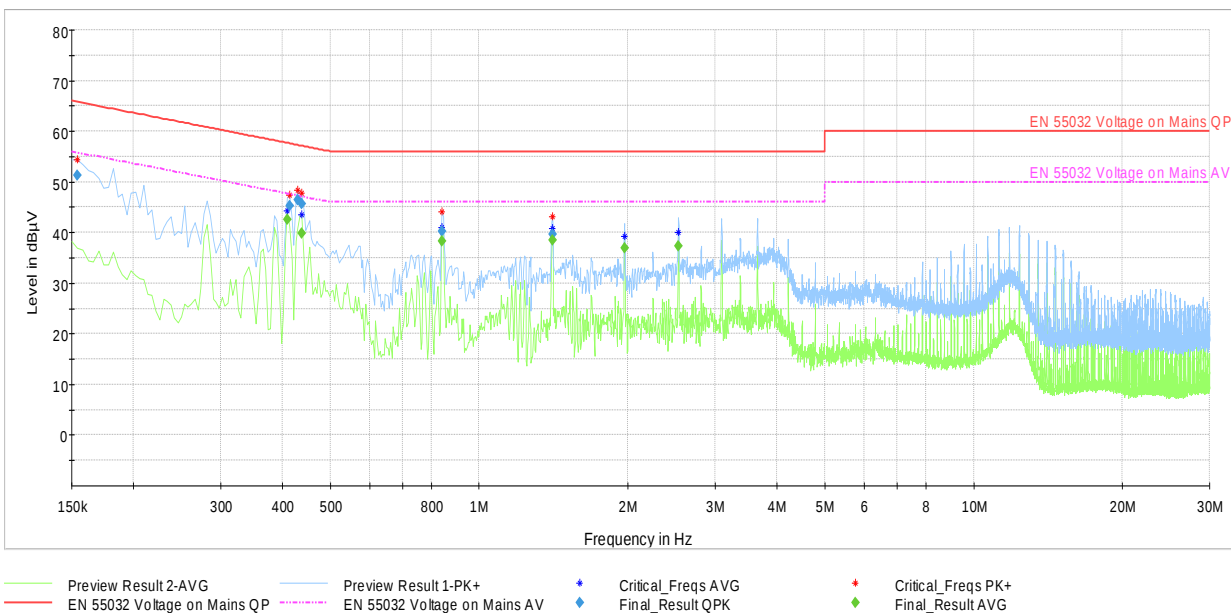

9 Test setup photos

Setup photos are included in supporting file name: "EMC_DIGII_047_18001_FCC_ISED_Setup_Photos.pdf"

10 Test Equipment And Ancillaries Used For Testing

Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
PASSIVE LOOP	ETS.LINDGREN	6512	00164698	3 YEARS	08/08/2017
BILOG ANTENNA	TESEO	CBL 6141B	41106	3 YEARS	11/01/2017
HORN ANTENNA	ETS.LINDGREN	3115	00035114	3 YEARS	07/31/2017
HORN ANTENNA	ETS.LINDGREN	3117	0167061	3 YEARS	08/08/2017
HORN ANTENNA	ETS.LINDGREN	3116C	00166821	3 YEARS	09/24/2017
SIGNAL ANALYZER	R&S	FSU26	200065	2 YEARS	07/03/2017
SIGNAL ANALYZER	R&S	FSV 40	101022	3 YEARS	07/05/2017
TEST RECEIVER	R&S	ESU.EMI	100256	3 YEARS	01/31/2018
COMPACT DIGITAL BAROMETER	CONTROL COMPANY	35519-055	91119547	2 YEARS	06/20/2017
THRMOMETER HUMIDIY	DICKSON	TM320	16253639	3 YEARS	11/02/2017
LINE IMPEDANCE STABILIZATION NETWORK	FCC	FCC-LISN-50-25-2-08	08014	3 YEARS	11/10/2016

Note: Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.

Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

11 Revision History

Date	Report Name	Changes to report	Report prepared by
01/20/2019	EMC_DIGII_047_18001_FCC_15.247_ISED_BLE_DTS	Initial Version	Issa Ghanma