



# FCC Part 15C Test Report

## FCC ID: 2ALYRHG-F01A

Product Name:	AMIGO INTELLIGENT FLIGHT CAMERA STORAGE DEVICE
Trademark:	 高巨创新 HIGH GREAT
Model Name :	HG-F01A
Prepared For :	<b>Shenzhen HighGreat Innovation Technology Development Co., Ltd.</b>
Address :	NO.6 Yuanlingzai Park, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, China
Prepared By :	<b>Shenzhen BCTC Technology Co., Ltd.</b>
Address :	No.101, Yousong Road, Longhua New District, Shenzhen,China
Test Date:	Jun. 22 – Jul. 03, 2017
Date of Report :	Jul. 03, 2017
Report No.:	<b>BCTC-LH170702836-2E</b>



## VERIFICATION OF COMPLIANCE

**Applicant's name**.....: **Shenzhen HighGreat Innovation Technology Development Co., Ltd.**

**Address** .....: NO.6 Yuanlingzai Park, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, China

**Manufacture's Name** .....: **Shenzhen HighGreat Innovation Technology Development Co., Ltd.**

**Address** .....: NO.6 Yuanlingzai Park, Henggang Town, Longgang District, Shenzhen City, Guangdong Province, China

### Product description

**Product name** .....: AMIGO INTELLIGENT FLIGHT CAMERA STORAGE DEVICE

**Trademark:**



**Model Name:** HG-F01A

**Standards:** FCC Part15.249  
ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

**Test Result** .....: **Pass**

**Prepared by(Engineer):** Eric Yang

**Reviewer(Supervisor):** Jade Yang

**Approved(Manager):** Carson Zhang





Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
<b>2 . GENERAL INFORMATION</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	8
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
<b>3 . EMC EMISSION TEST</b>	<b>11</b>
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 RADIATED EMISSION LIMITS	15
3.2.2 TEST PROCEDURE	16
3.2.3 DEVIATION FROM TEST STANDARD	16
3.2.4 TEST SETUP	17
3.2.5 EUT OPERATING CONDITIONS	18
3.2.6 TEST RESULTS	19
<b>4 . BANDWIDTH TEST</b>	<b>32</b>
4.1 APPLIED PROCEDURES / LIMIT	32
4.1.1 TEST PROCEDURE	32
4.1.2 DEVIATION FROM STANDARD	32
4.1.3 TEST SETUP	32
4.1.4 EUT OPERATION CONDITIONS	32
4.1.5 TEST RESULTS	33
<b>5 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>36</b>
5.1 DEVIATION FROM STANDARD	37
5.2 TEST SETUP	37
5.3 EUT OPERATION CONDITIONS	37



<b>Table of Contents</b>	<b>Page</b>
<b>5.4 TEST RESULTS</b>	<b>37</b>
<b>6 . ANTENNA REQUIREMENT</b>	<b>39</b>
<b>6.1 STANDARD REQUIREMENT</b>	<b>39</b>
<b>6.2 EUT ANTENNA</b>	<b>39</b>
<b>7 . EUT TEST PHOTO</b>	<b>40</b>
<b>8 . EUT PHOTO</b>	<b>42</b>



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207(a)	Conducted Emission	PASS	
15.209(a)&&15.249(a) &15.249(c)&15.205(a)	Fundamental &Radiated Spurious Emission Measurement	PASS	
15.215(c)	Bandwidth	PASS	
15.249(d)	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

### 1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registration No.:187086

### 1.2 MEASUREMENT UNCERTAINTY


The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	AMIGO INTELLIGENT FLIGHT CAMERA STORAGE DEVICE	
Trade Name	 高巨创新 HIGH GREAT	
Model Name	HG-F01A	
Serial Model	N/A	
Model Difference	N/A	
Product Description	Operation Frequency:	5745-5810MHz
	Modulation Type:	GFSK
	Number Of Channel	3 CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Battery	DC 11.4V	
Connecting I/O Port(s)	Please refer to the User's Manual	
hardware version	-	
Software version	-	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel	Frequency (MHz)
01	5745
02	5777
03	5810

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Integrated antenna	N/A	0dBi	



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK
Mode 2	CH02	
Mode 3	CH03	
Mode 4	Link mode	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test


## 2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters


Frequency	5745 MHz	5777 MHz	5810 MHz
Channel	Low	Middle	High

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission





## 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AMIGO INTELLIGENT FLIGHT CAMERA STORAGE DEVICE	 高巨创新 HIGH GREAT	HG-F01A	N/A	EUT
E-2	Adapter	N/A	HK-X388-ADH	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.8M	USB cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Conduction test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-1 01165-ha	2016.08.27	2017.08.26
2	LISN	SCHWARZBECK	NSLK8127	8127739	2016.08.27	2017.08.26
3	LISN	R&S	NSLK8126	8126487	2016.08.27	2017.08.26
4	RF cables	R&S	R204	R20X	2016.08.27	2017.08.26
5	Attenuator	R&S	ESH3-Z2	143206	2016.08.27	2017.08.26

### Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2016.08.27	2017.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2016.08.27	2017.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2016.08.27	2017.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2016.09.03	2017.09.03
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2016.09.03	2017.09.03
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2016.08.27	2017.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2016.08.27	2017.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2016.08.27	2017.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2016.09.03	2017.09.03
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2016.08.27	2017.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2016.08.27	2017.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2016.08.27	2017.08.26
13	Power Metter	ANRITSU	ML2487A	6K00001568	2016.08.27	2017.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2016.08.27	2017.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2016.08.27	2017.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2016.08.27	2017.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2016.08.27	2017.08.26



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


##### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

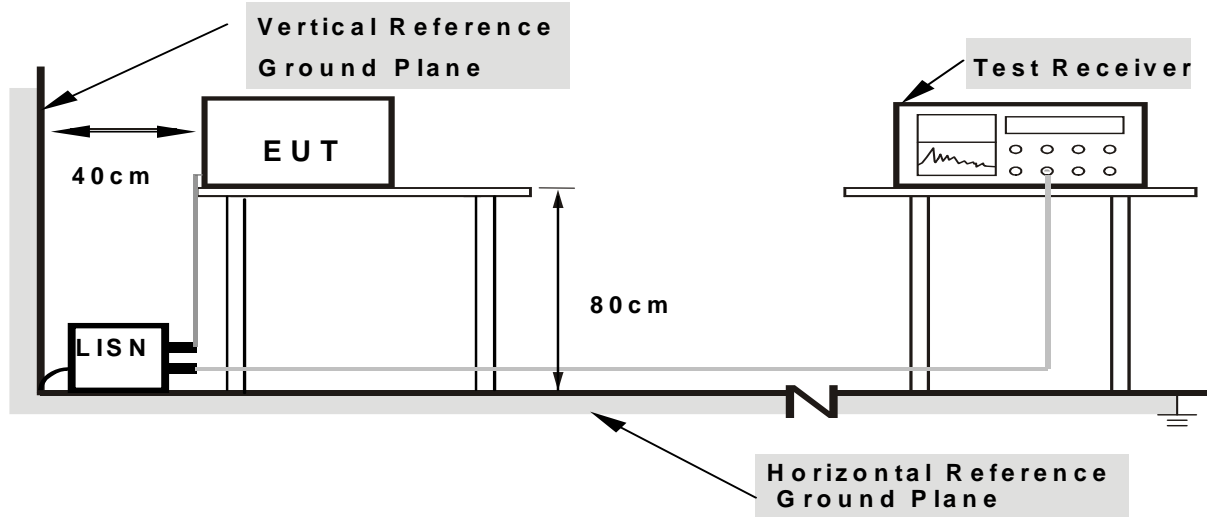

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**


### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



### 3.1.6 TEST RESULTS

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

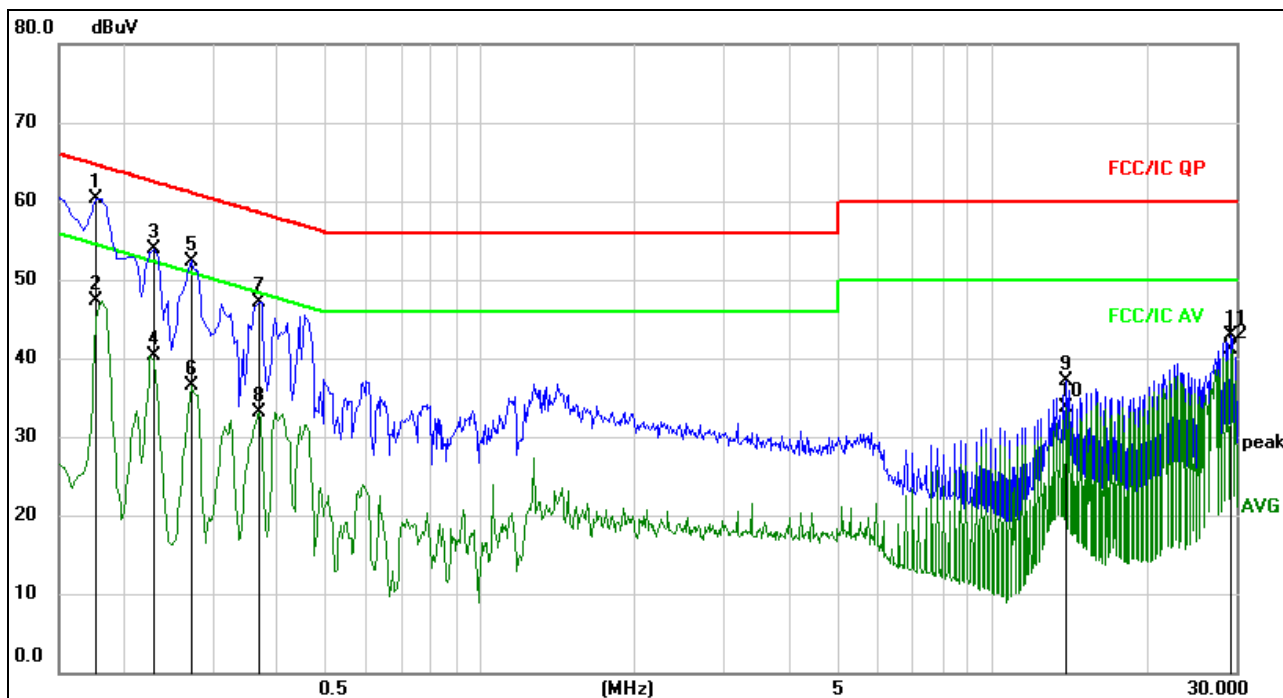


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1770	50.59	9.66	60.25	64.63	-4.38	QP	
2		0.1770	37.65	9.66	47.31	54.63	-7.32	AVG	
3		0.2310	44.33	9.65	53.98	62.41	-8.43	QP	
4		0.2310	30.56	9.65	40.21	52.41	-12.20	AVG	
5		0.2714	42.74	9.66	52.40	61.07	-8.67	QP	
6		0.2714	26.83	9.66	36.49	51.07	-14.58	AVG	
7		0.3704	37.50	9.67	47.17	58.49	-11.32	QP	
8		0.3704	23.42	9.67	33.09	48.49	-15.40	AVG	
9		13.9875	27.35	9.85	37.20	60.00	-22.80	QP	
10		13.9875	23.85	9.85	33.70	50.00	-16.30	AVG	
11		29.2470	33.10	9.86	42.96	60.00	-17.04	QP	
12		29.2470	31.30	9.86	41.16	50.00	-8.84	AVG	



Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

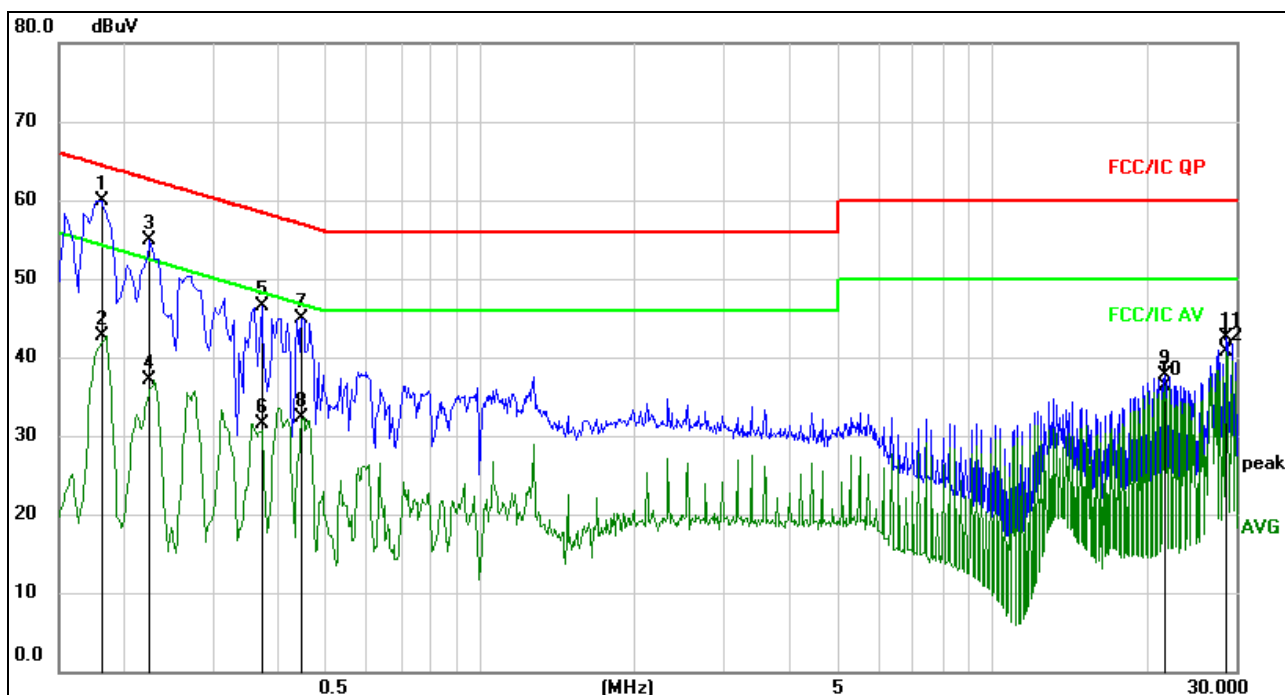

#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1815	50.32	9.66	59.98	64.42	-4.44	QP	
2		0.1815	32.95	9.66	42.61	54.42	-11.81	AVG	
3		0.2265	45.16	9.65	54.81	62.58	-7.77	QP	
4		0.2265	27.38	9.65	37.03	52.58	-15.55	AVG	
5		0.3750	36.89	9.67	46.56	58.39	-11.83	QP	
6		0.3750	21.92	9.67	31.59	48.39	-16.80	AVG	
7		0.4470	35.23	9.67	44.90	56.93	-12.03	QP	
8		0.4470	22.55	9.67	32.22	46.93	-14.71	AVG	
9		21.8265	27.93	9.85	37.78	60.00	-22.22	QP	
10		21.8265	26.50	9.85	36.35	50.00	-13.65	AVG	
11		28.6080	32.66	9.86	42.52	60.00	-17.48	QP	
12		28.6080	30.77	9.86	40.63	50.00	-9.37	AVG	



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

- For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

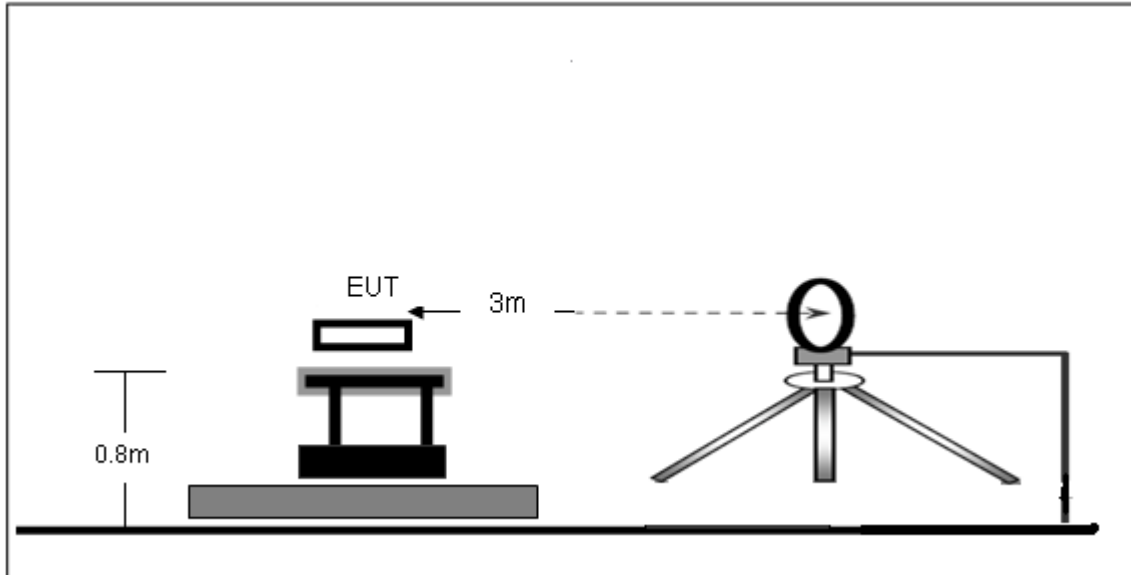

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

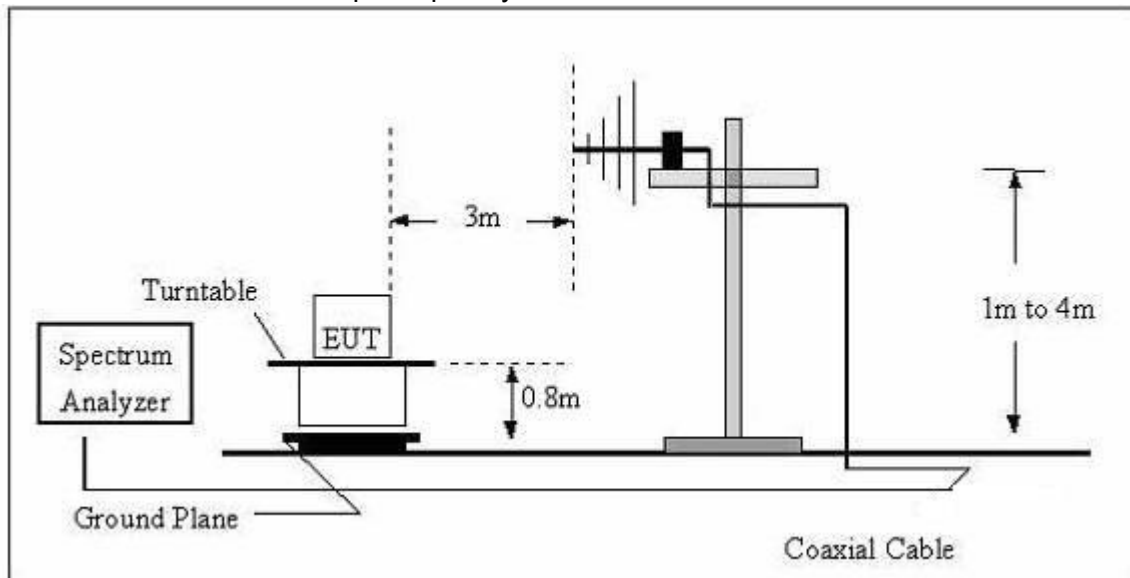

(C) Radiated Emission Test-Up Frequency Above 1GHz

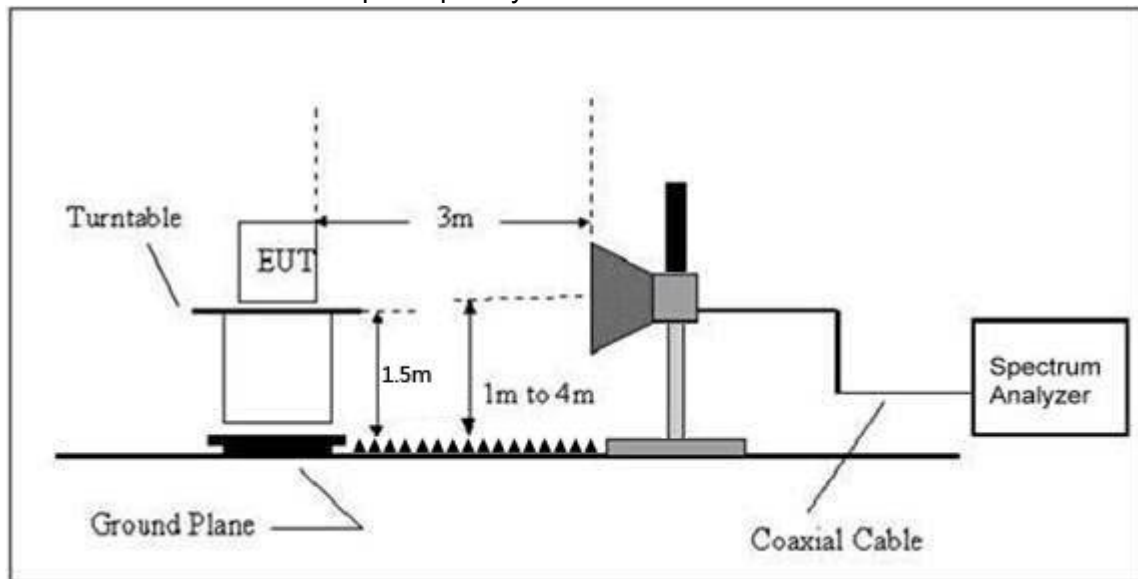

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.6 TEST RESULTS

Radiated Spurious Emission (Below 30MHz )

Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 11.4V		
Test Mode :	Mode 4		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Radiated Spurious Emission (Between 30MHz – 1GHz)

Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 11.4V		
Test Mode : (Worst)	Mode 4		

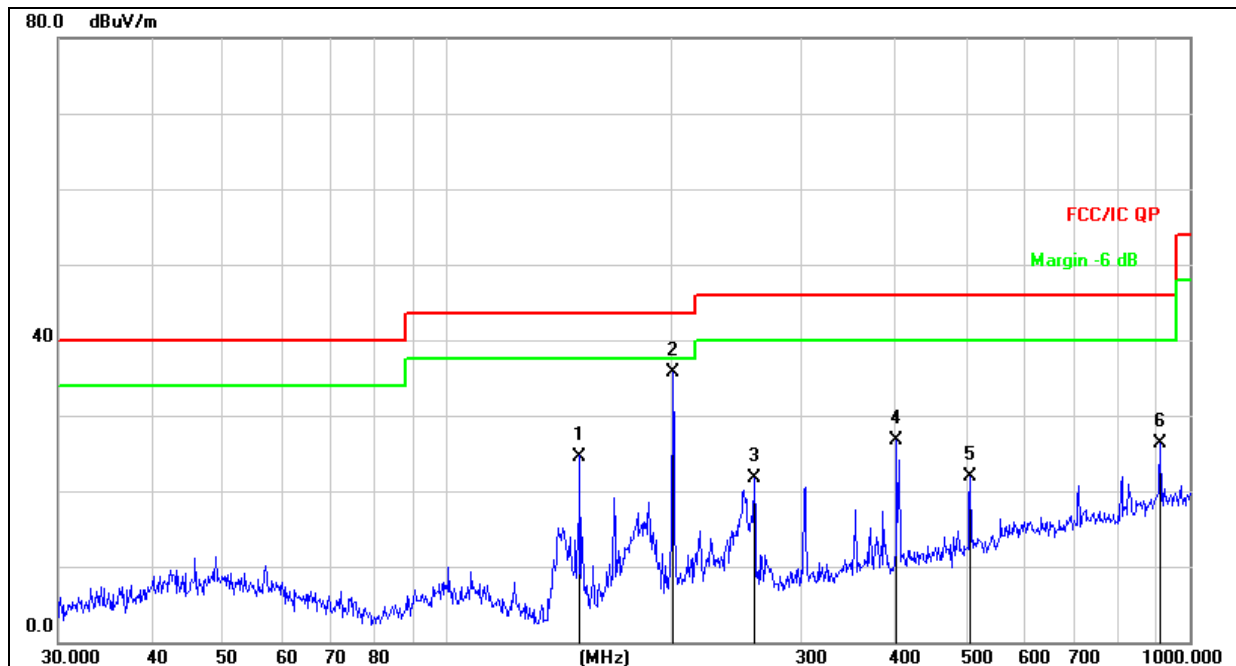


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		151.0666	43.58	-18.98	24.60	43.50	-18.90	QP
2	*	201.3930	51.93	-16.27	35.66	43.50	-7.84	QP
3		259.2338	36.64	-15.03	21.61	46.00	-24.39	QP
4		403.2500	38.67	-11.87	26.80	46.00	-19.20	QP
5		506.4791	31.05	-9.22	21.83	46.00	-24.17	QP
6		912.8620	28.68	-2.28	26.40	46.00	-19.60	QP



Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 11.4V		
Test Mode : (Worst)	Mode 4		

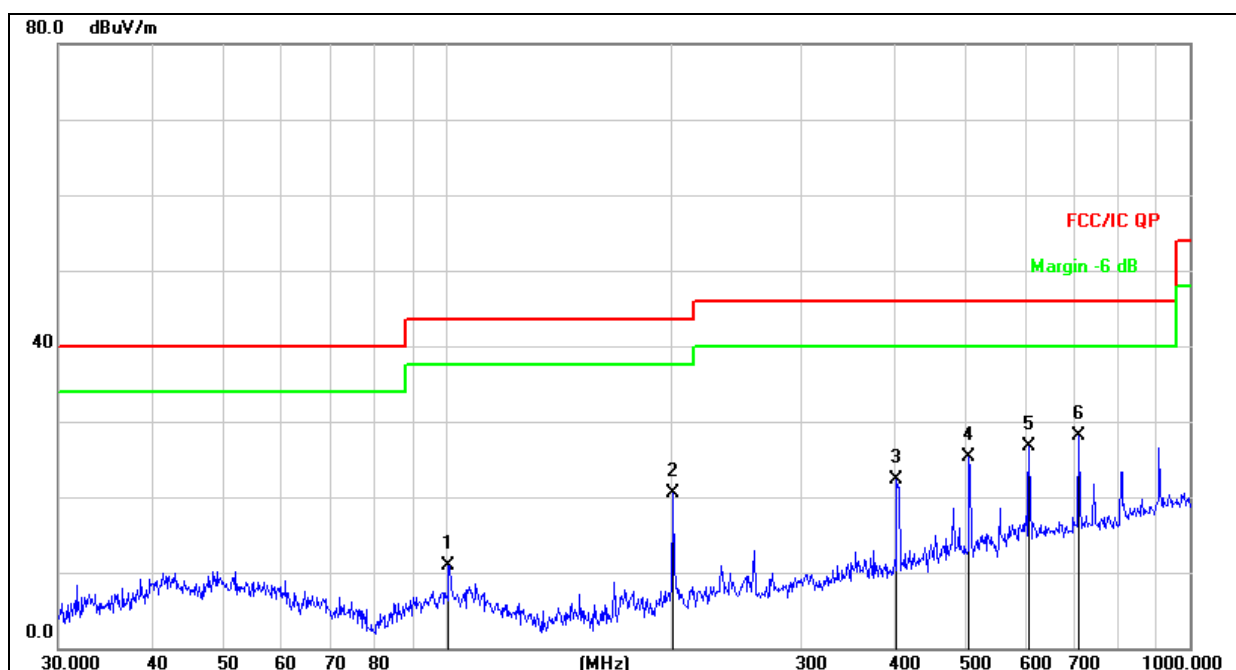

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		100.5806	26.44	-15.55	10.89	43.50	-32.61	QP
2		201.3930	36.72	-16.27	20.45	43.50	-23.05	QP
3		403.2500	34.22	-11.87	22.35	46.00	-23.65	QP
4		504.7062	34.63	-9.23	25.40	46.00	-20.60	QP
5		607.7867	33.42	-6.65	26.77	46.00	-19.23	QP
6	*	709.1823	33.57	-5.47	28.10	46.00	-17.90	QP


Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)

	Freq.	Receiver Reading	Detector	Polar	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limit	margin	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)		
Lower Channel 5745MHz	5745.00	108.27	PK	H	38.11	7.44	20.36	97.78	114	-16.22	Pass
	5745.00	92.07	Ave	H	38.11	7.44	20.36	81.58	94	-12.42	Pass
	11490.00	41.78	PK	H	34.25	6.48	29.46	43.47	74.00	-30.53	Pass
	11490.00	32.79	Ave	H	33.25	6.48	29.46	35.48	54.00	-18.52	Pass
	17235.00	43.50	PK	H	34.83	6.96	26.88	42.51	74.00	-31.49	Pass
	17235.00	32.83	Ave	H	34.83	6.96	26.88	31.84	54.00	-22.16	Pass
	5745.00	109.19	PK	V	38.11	7.44	20.36	98.70	114	-15.30	Pass
	5745.00	93.03	Ave	V	38.11	7.44	20.36	82.54	94	-11.46	Pass
	11490.00	41.48	PK	V	34.25	6.48	29.46	43.17	74.00	-30.83	Pass
	11490.00	32.62	Ave	V	33.25	6.48	29.46	35.31	54.00	-18.69	Pass
	17235.00	43.75	PK	V	34.83	6.96	26.88	42.76	74.00	-31.24	Pass
	17235.00	32.63	Ave	V	34.83	6.96	26.88	31.64	54.00	-22.36	Pass
Middle Channel 5777MHz	5777.00	108.74	PK	H	38.11	7.44	20.36	98.43	114	-15.57	Pass
	5777.00	91.82	Ave	H	38.11	7.44	20.36	81.51	94	-12.49	Pass
	11554.00	42.49	PK	H	33.95	6.89	29.36	44.79	74.00	-29.21	Pass
	11554.00	33.03	Ave	H	33.95	6.89	29.36	35.33	54.00	-18.67	Pass
	17331.00	43.10	PK	H	35.25	7.10	27.22	42.17	74.00	-31.83	Pass
	17331.00	33.50	Ave	H	35.25	7.10	27.22	32.57	54.00	-21.43	Pass
	5777.00	112.47	PK	V	38.11	7.44	20.36	102.16	114	-11.84	Pass
	5777.00	91.46	Ave	V	38.11	7.44	20.36	81.15	94	-12.85	Pass
	11554.00	42.42	PK	V	33.95	6.89	29.36	44.72	74.00	-29.28	Pass
	11554.00	32.81	Ave	V	33.95	6.89	29.36	35.11	54.00	-18.89	Pass
	17331.00	43.99	PK	V	35.25	7.10	27.22	43.06	74.00	-30.94	Pass
	17331.00	32.55	Ave	V	35.25	7.10	27.22	31.62	54.00	-22.38	Pass
Upper Channel 5810MHz	5810.00	108.16	PK	H	38.17	7.47	20.51	97.97	114	-16.03	Pass
	5810.00	90.25	Ave	H	38.17	7.47	20.51	80.06	94	-13.94	Pass
	11620.00	42.10	PK	H	34.35	7.15	30.15	45.05	74.00	-28.95	Pass
	11620.00	31.02	Ave	H	34.35	7.15	30.15	33.97	54.00	-20.03	Pass



	17430.00	44.73	PK	H	35.75	7.45	28.54	44.97	74.00	-29.03	Pass
	17430.00	33.10	Ave	H	35.75	7.45	28.54	33.34	54.00	-20.66	Pass
	5810.00	110.02	PK	V	38.17	7.47	20.51	99.83	114	-14.17	Pass
	5810.00	88.62	Ave	V	38.17	7.47	20.51	78.43	94	-15.57	Pass
	11620.00	43.41	PK	V	34.35	7.15	30.15	46.36	74.00	-27.64	Pass
	11620.00	32.09	Ave	V	34.35	7.15	30.15	35.04	54.00	-18.96	Pass
	17430.00	44.19	PK	V	35.75	7.45	28.54	44.43	74.00	-29.57	Pass
	17430.00	33.22	Ave	V	35.75	7.45	28.54	33.46	54.00	-20.54	Pass

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit


Other harmonics emissions are lower than 20dB below the allowable limit.



### 5745MHz Horizontal

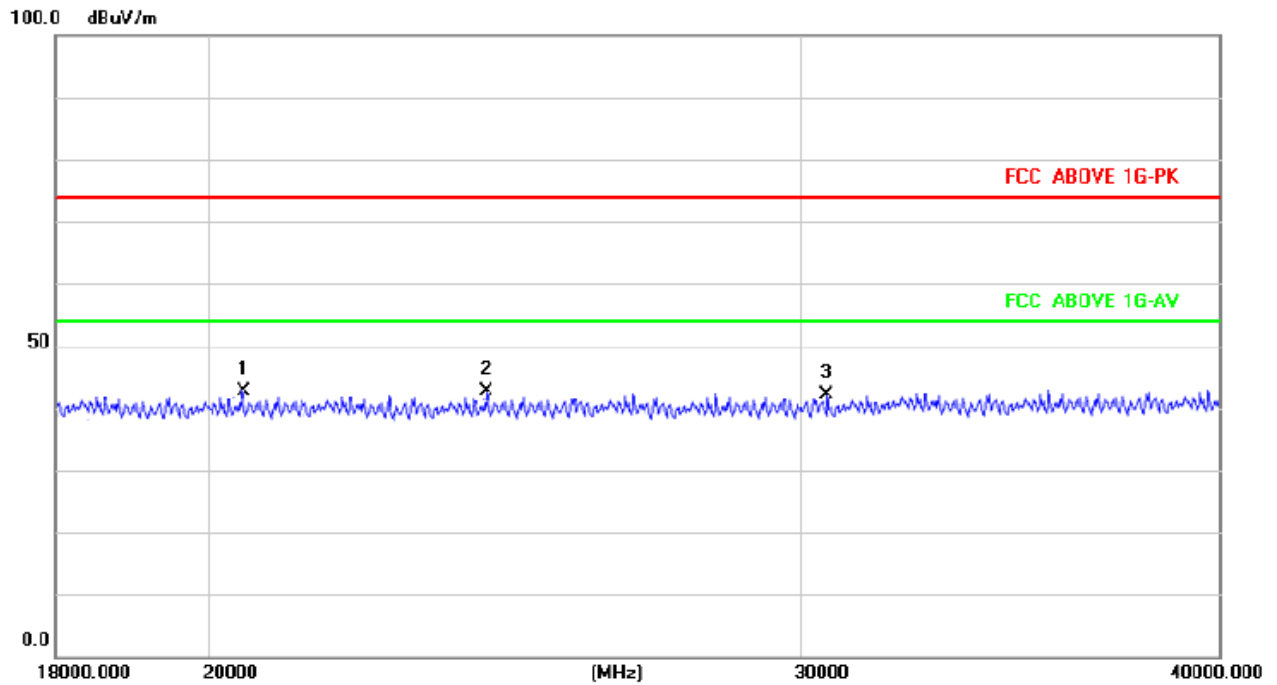


### 5745MHz Vertical

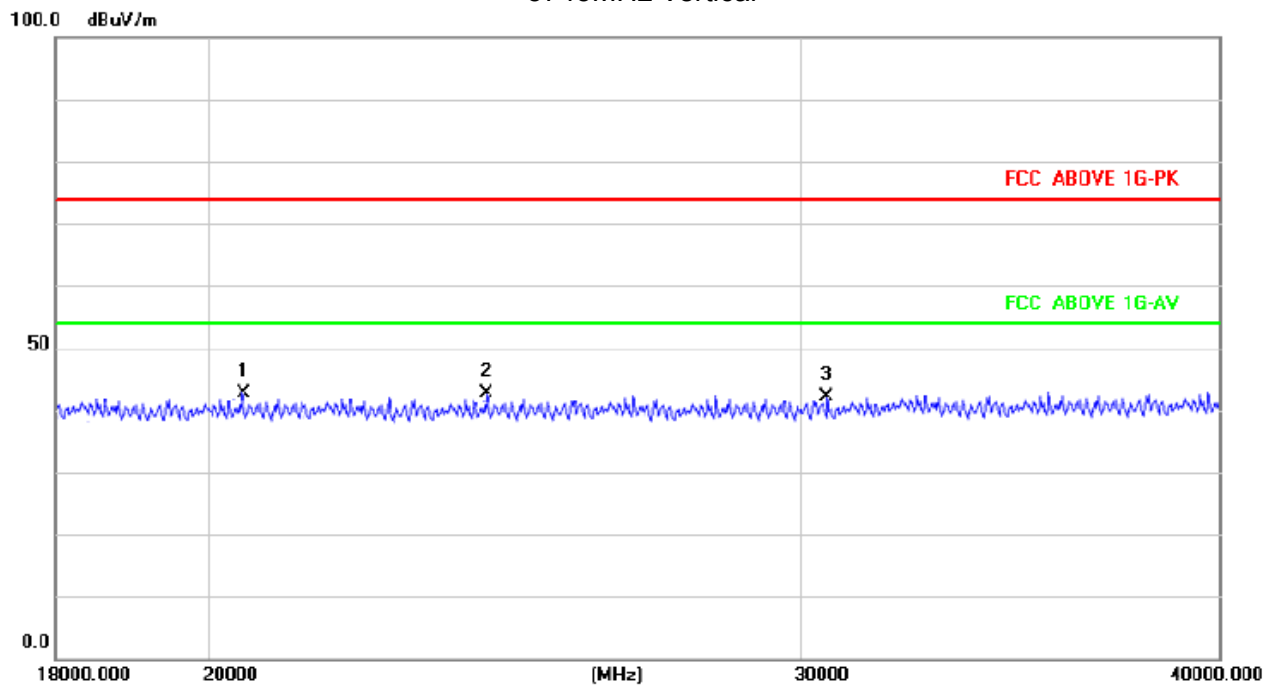






### 5777MHz Horizontal

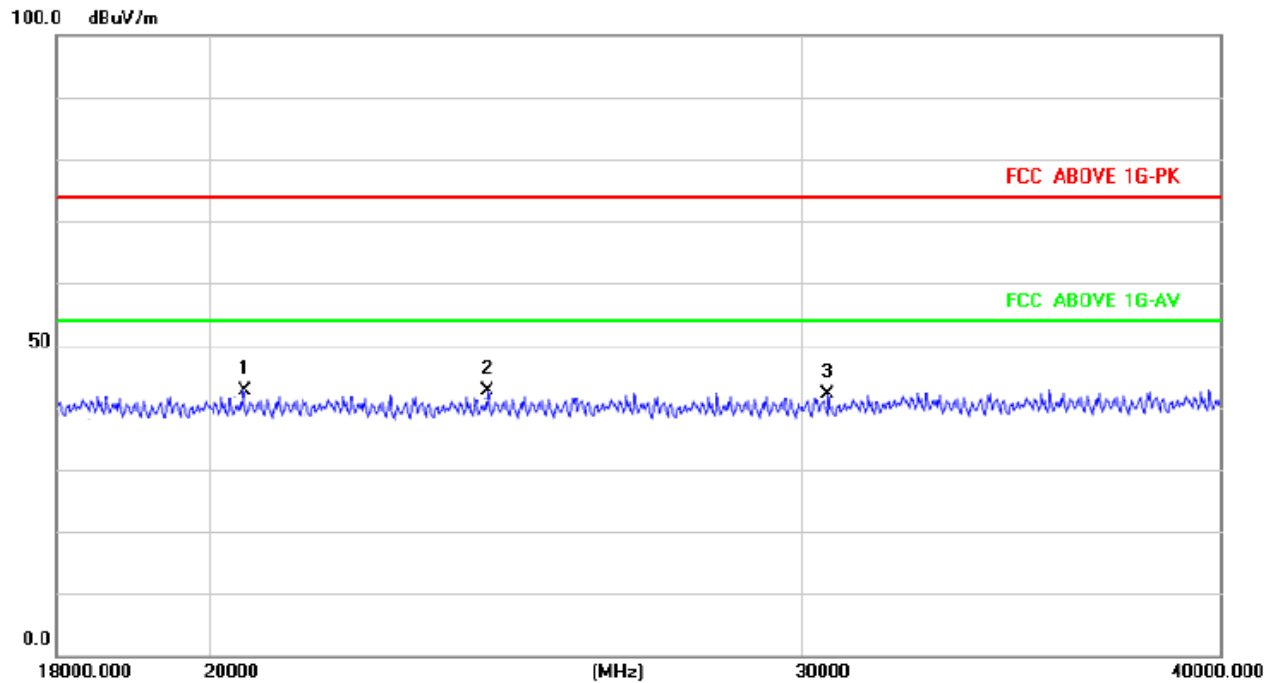


### 5777MHz Vertical

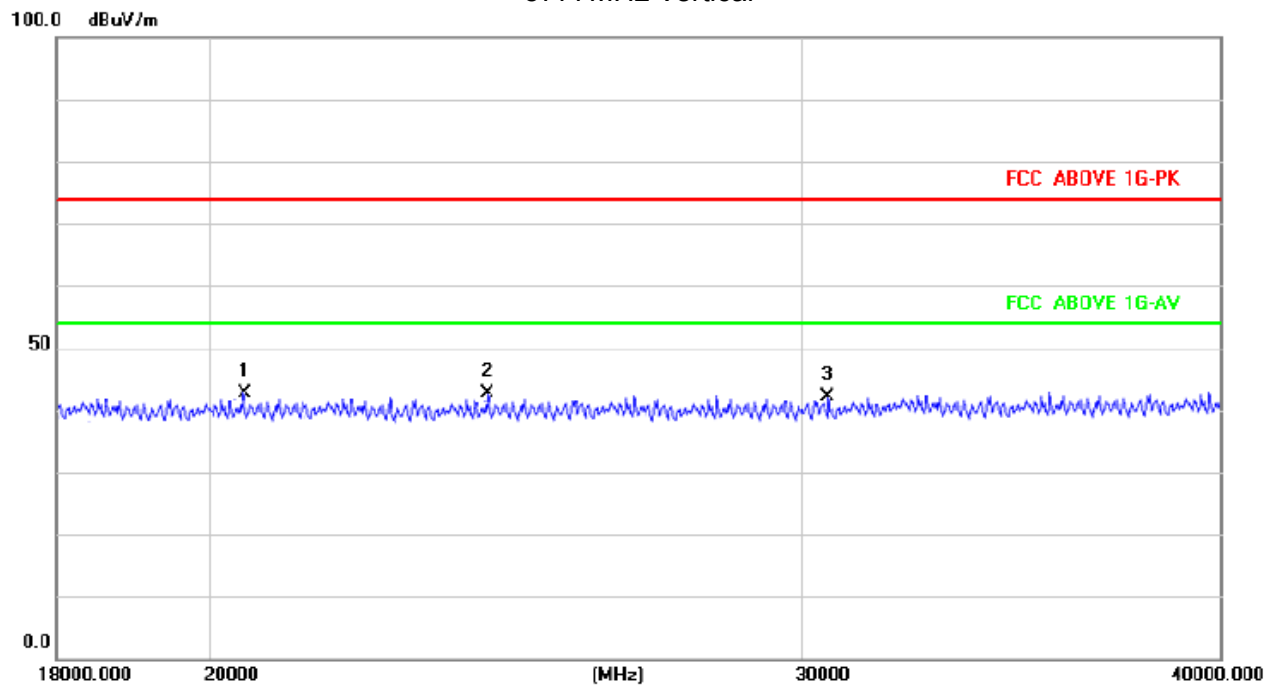

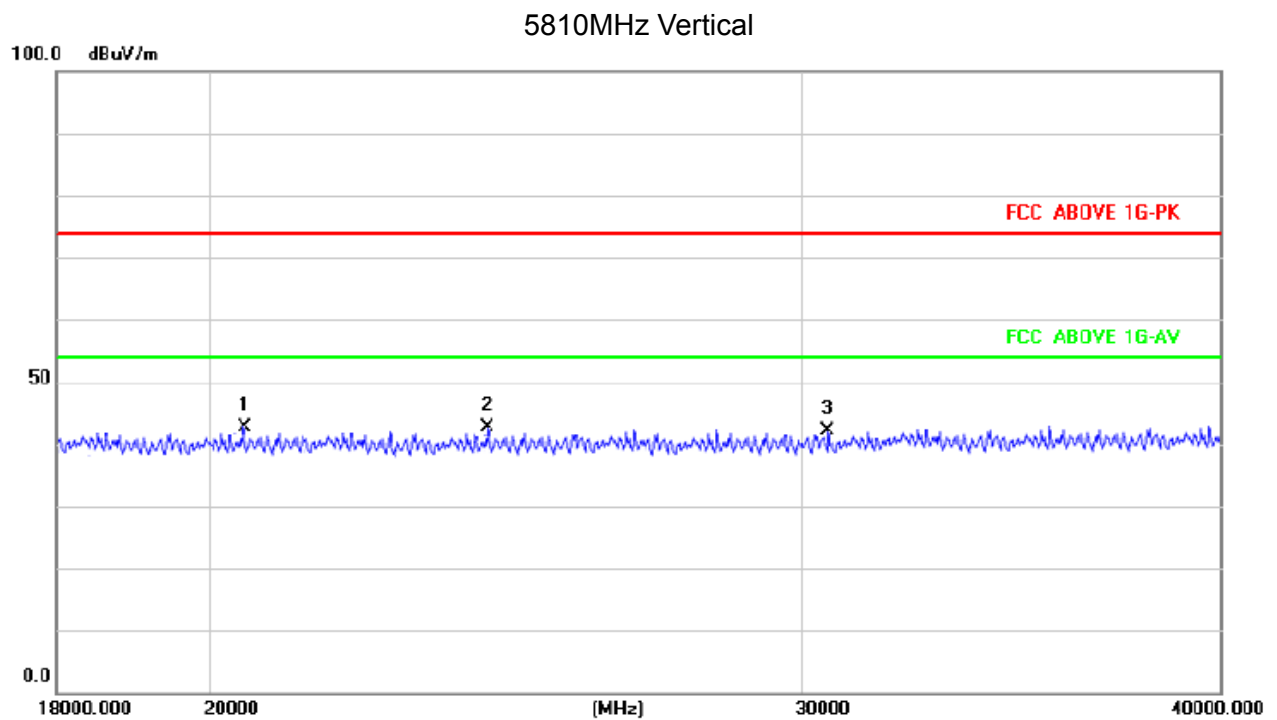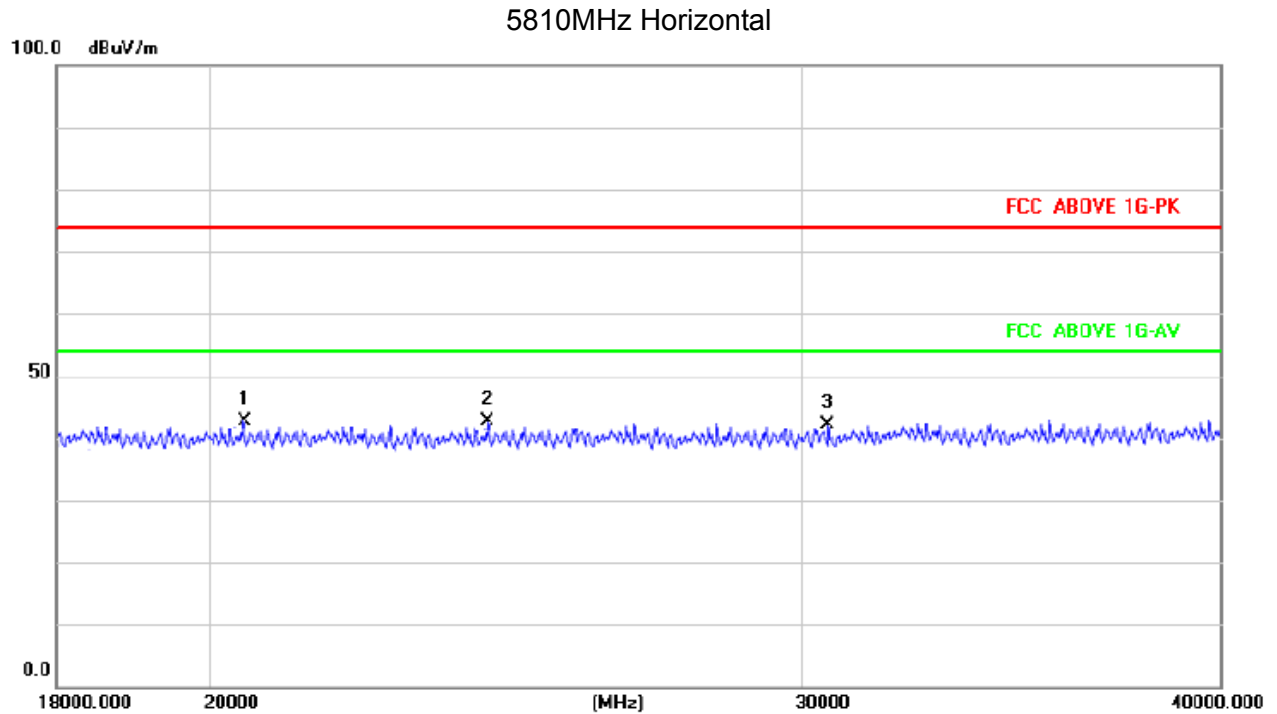




### 5810MHz Horizontal

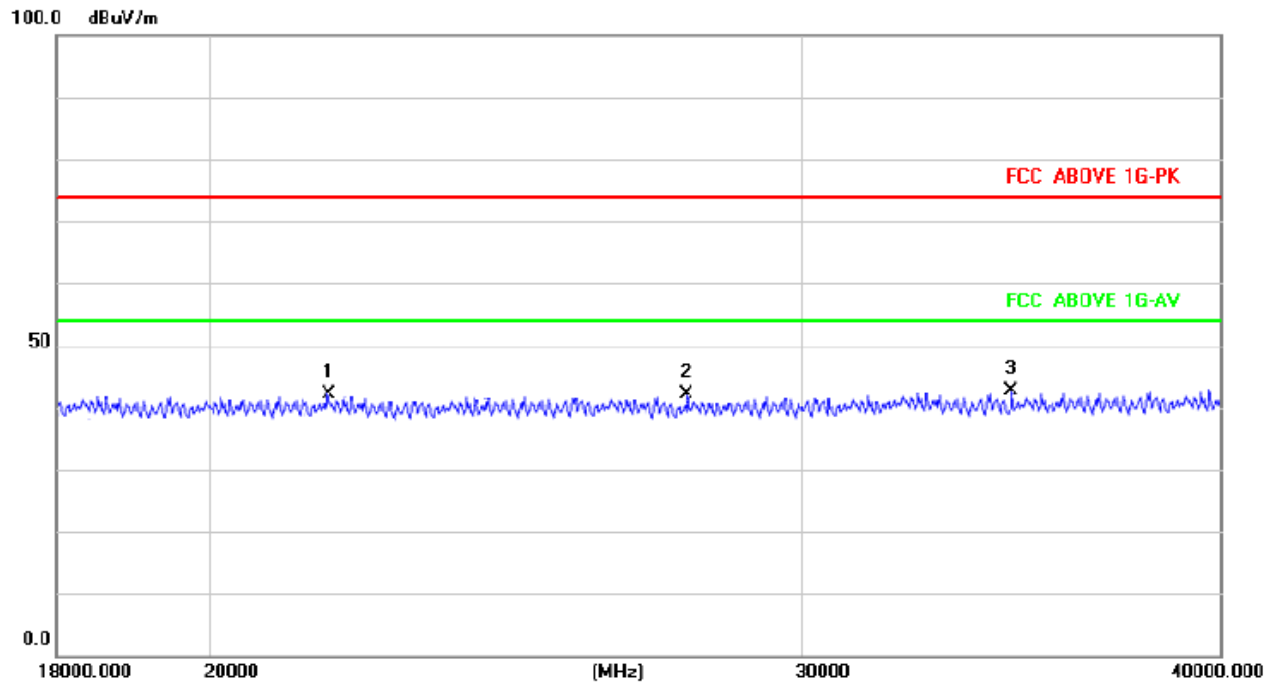

### 5810MHz Vertical

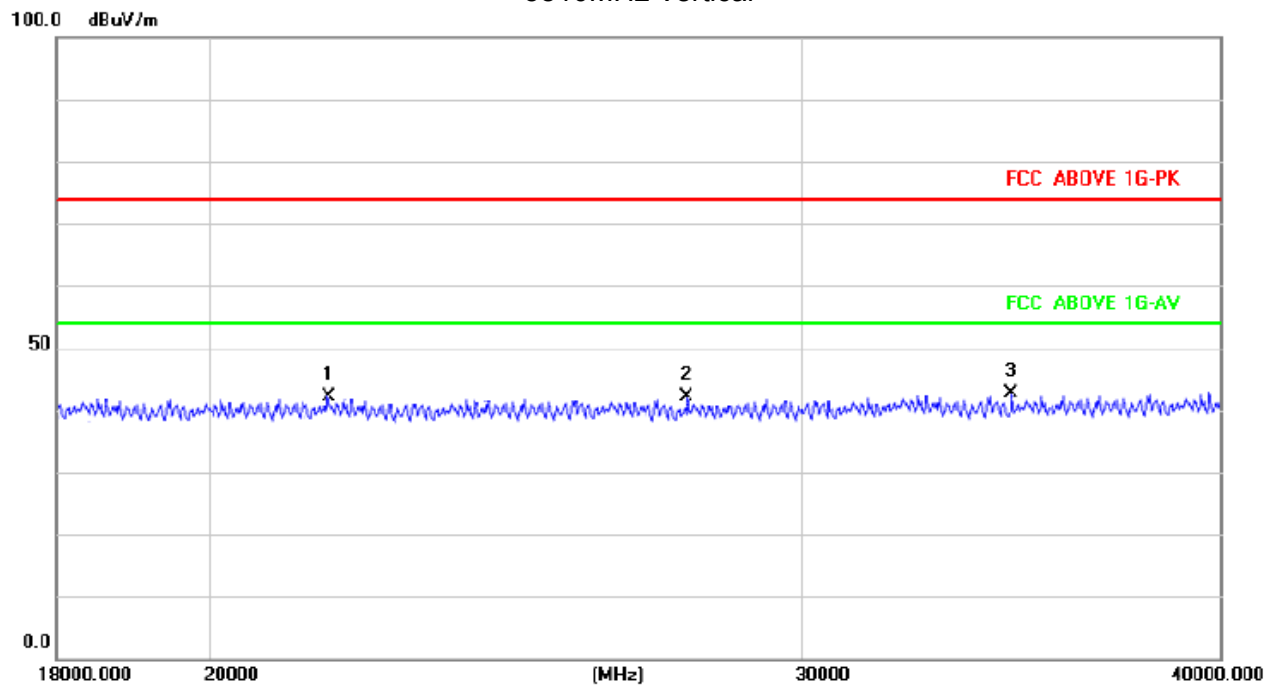



### 3.3 RADIATED BAND EMISSION MEASUREMENT

#### 3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	5375 MHz
Stop Frequency	5820 MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

#### 3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

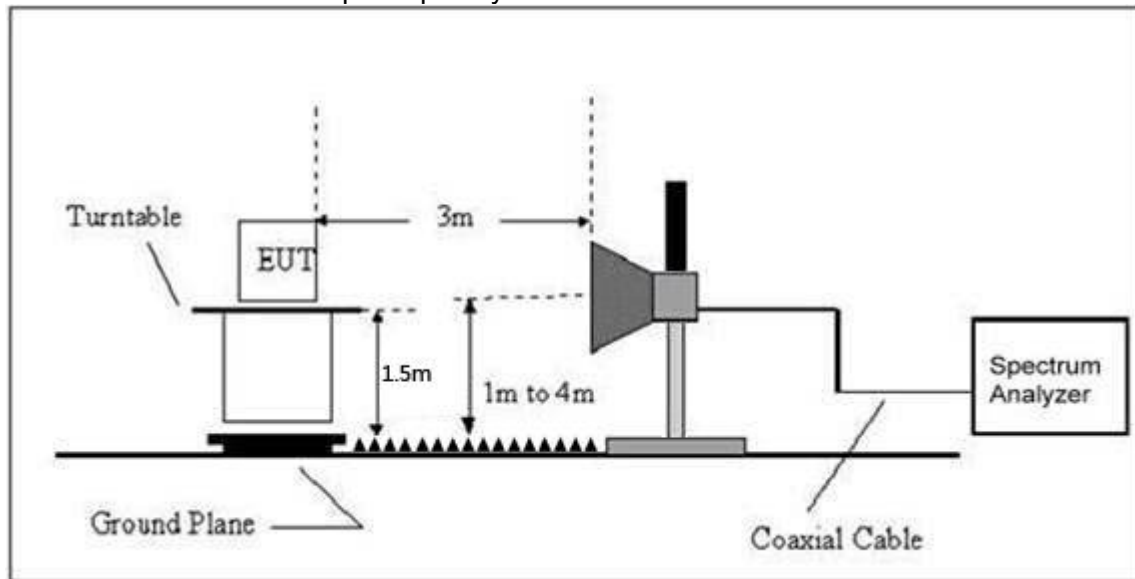

### 3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
						PK	PK	AV	
Low Channel 5745MHz									
H	5740.00	55.34	38.06	7.42	20.15	44.85	74.00	54.00	PASS
H	5742.89	59.59	38.06	7.42	20.15	49.10	74.00	54.00	PASS
V	5740.00	54.05	38.06	7.42	20.15	43.56	74.00	54.00	PASS
V	5742.89	57.88	38.06	7.42	20.15	47.39	74.00	54.00	PASS

**Remark:**


1. Emission Level = Meter Reading + Factor, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Horizontal**

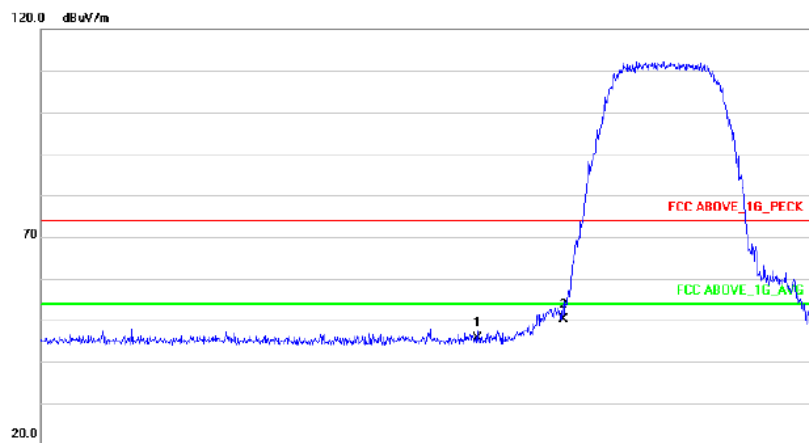

5735~5750MHz

**Vertical**

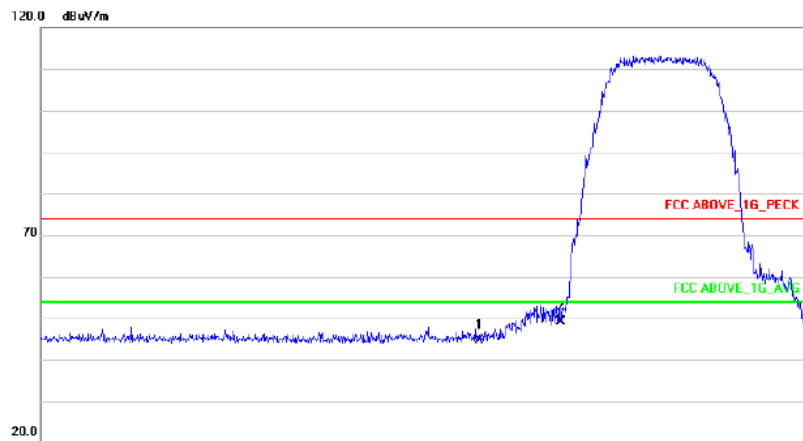


5735~5750MHz




Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
						PK	PK	AV	
High Channel 5810MHz									
H	5813.50	54.85	38.17	7.42	20.51	44.61	74.00	54.00	PASS
H	5814.50	58.36	38.17	7.42	20.51	48.12	74.00	54.00	PASS
V	5813.50	52.97	38.2	7.45	20.54	42.76	74.00	54.00	PASS
V	5814.50	55.71	38.2	7.45	20.54	45.50	74.00	54.00	PASS

### Horizontal

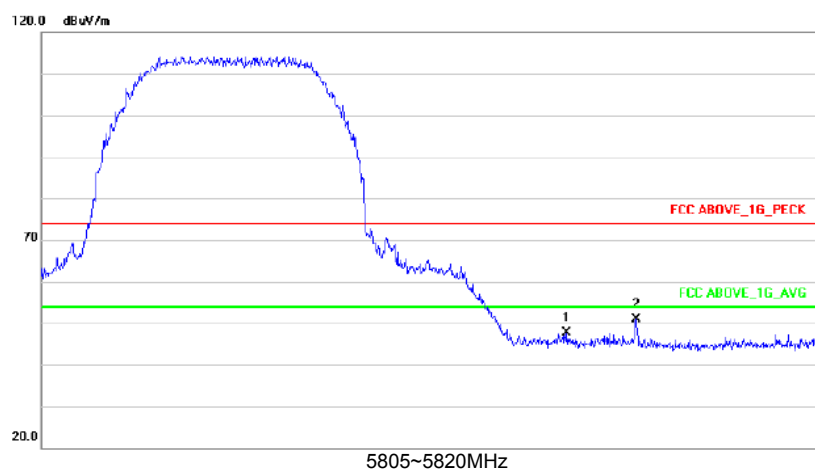

### Vertical

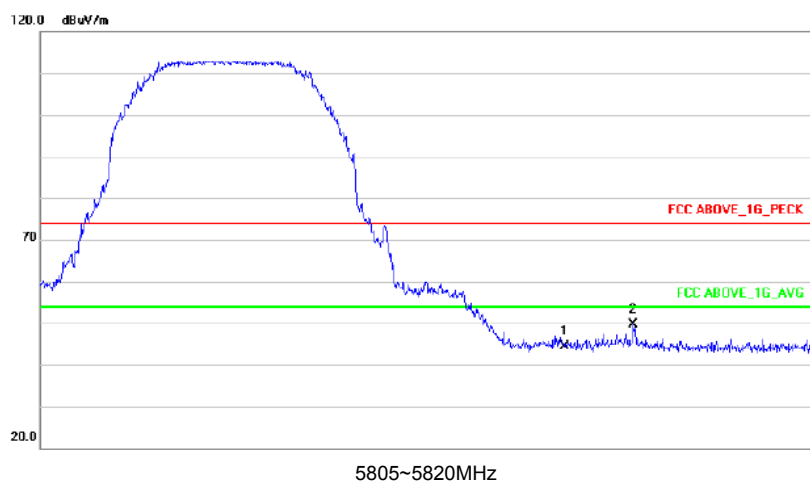



## 4. BANDWIDTH TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.249	Bandwidth	(20dB bandwidth)	5745-5810	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100KHz
VB	$\geq$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW $\geq$  RBW, Sweep time = Auto.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP



#### 4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



#### 4.1.5 TEST RESULTS

EUT :	AMIGO INTELLIGENT FLIGHT CAMERA STORAGE DEVICE	Model Name :	HG-F01A
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1012 hPa	Test Voltage :	DC 11.4V
Test Mode :	CH01 / CH02 /C03		

	Frequency	20dB Bandwidth (MHz)	Result
GFSK	5745 MHz	2.159	<b>PASS</b>
	5777 MHz	2.092	<b>PASS</b>
	5810 MHz	2.080	<b>PASS</b>




## CH01



## CH02



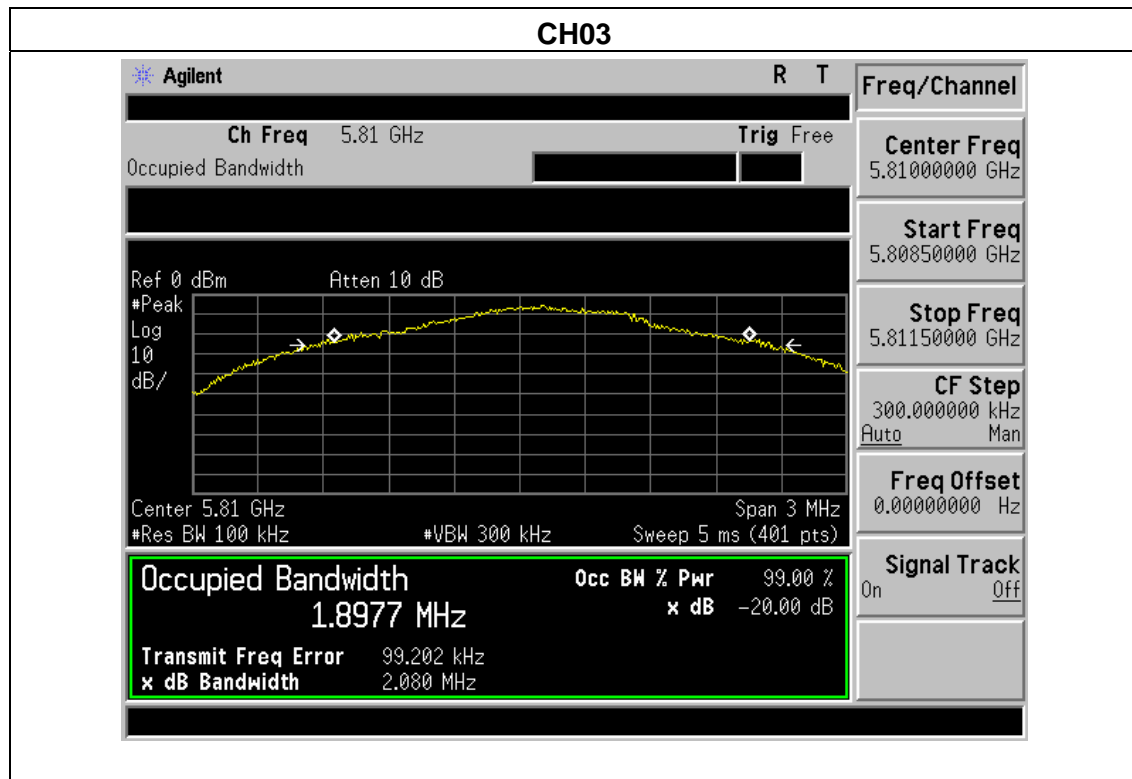



## 5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)(c)

### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 1 MHz and VBW of spectrum analyzer to 3 MHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

#### Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



## 5.1 DEVIATION FROM STANDARD

No deviation.

## 5.2 TEST SETUP

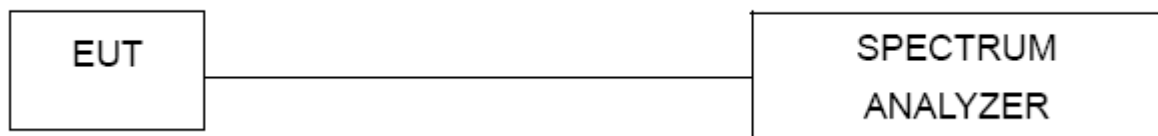


## 5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.4 TEST RESULTS


Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 11.4V
Test Mode :	CH01/ CH03		

CH01

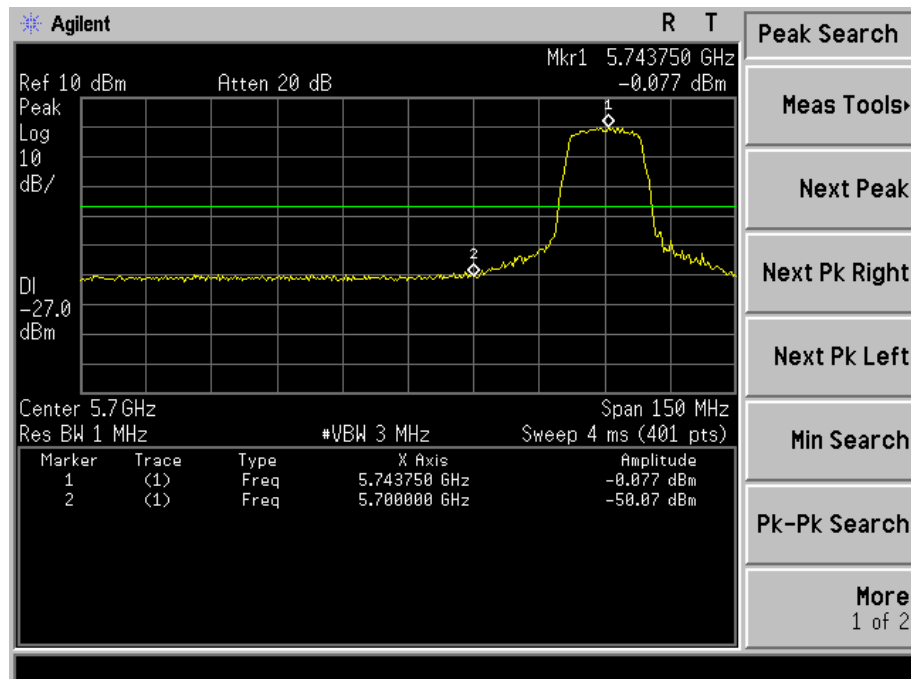



## CH03

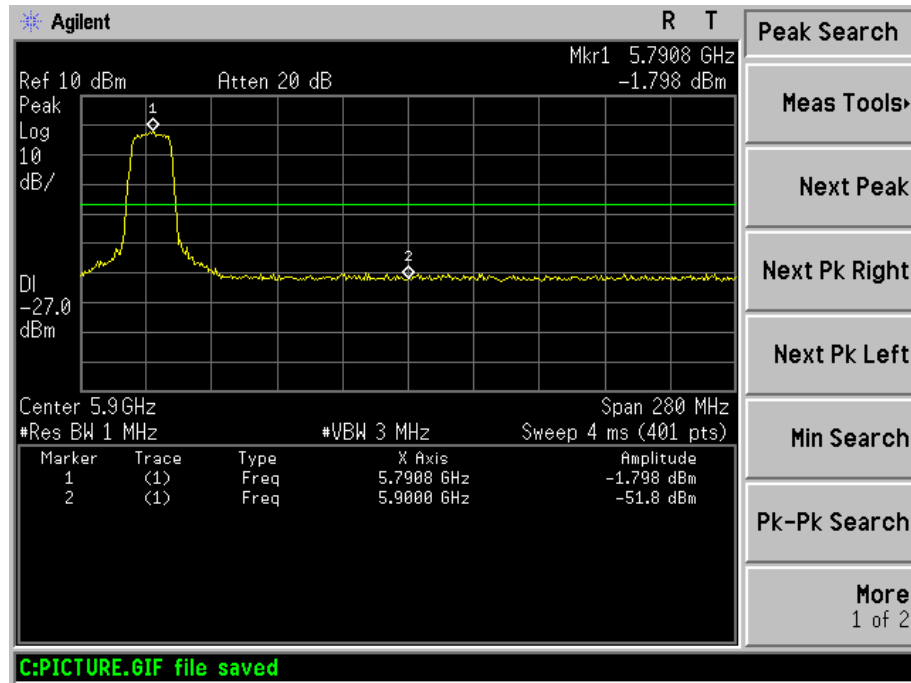



## **6. ANTENNA REQUIREMENT**

### **6.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2 EUT ANTENNA**

The EUT antenna is Integrated antenna. It complies with the standard requirement.


## 7. EUT TEST PHOTO

### Conducted Measurement Photos





### Radiated Measurement Photos

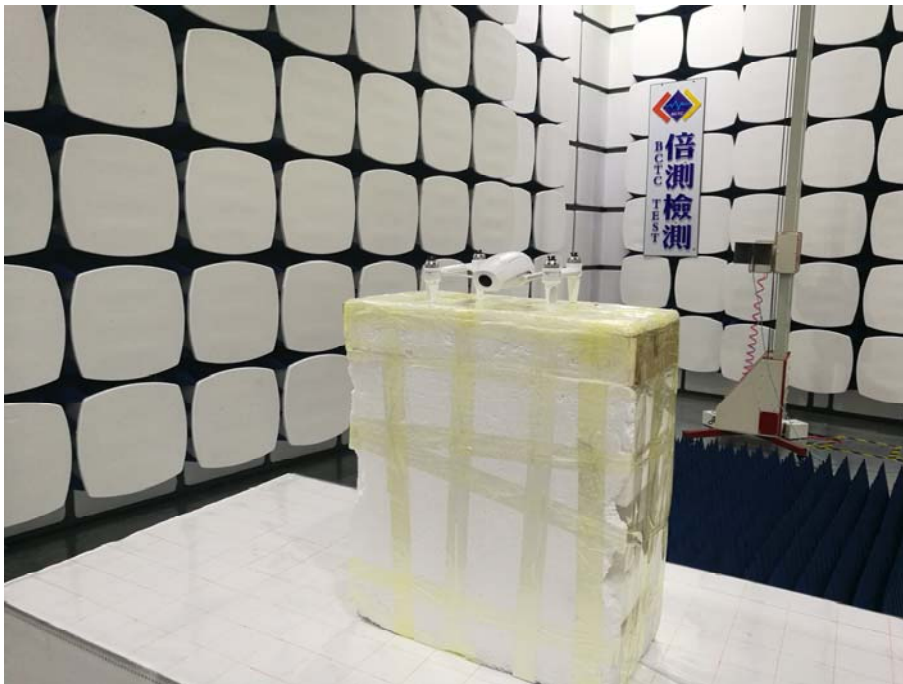

## 8. EUT PHOTO



\*\*\*\*\* END OF REPORT \*\*\*\*\*