

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

Below 1GHz Test Setup:

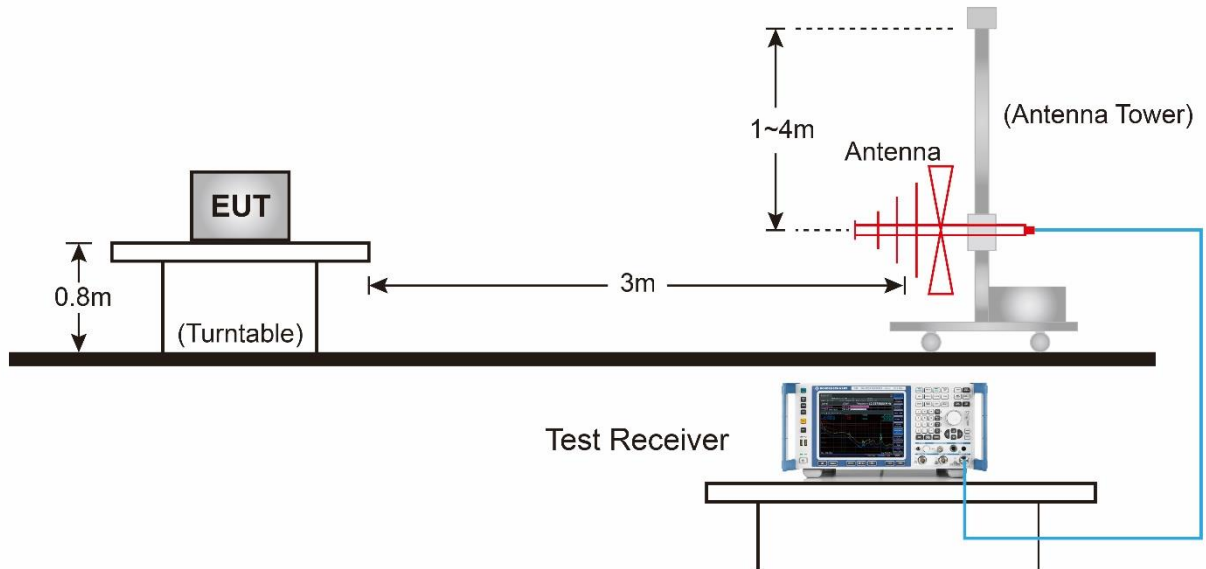


Above 1GHz Test Setup:

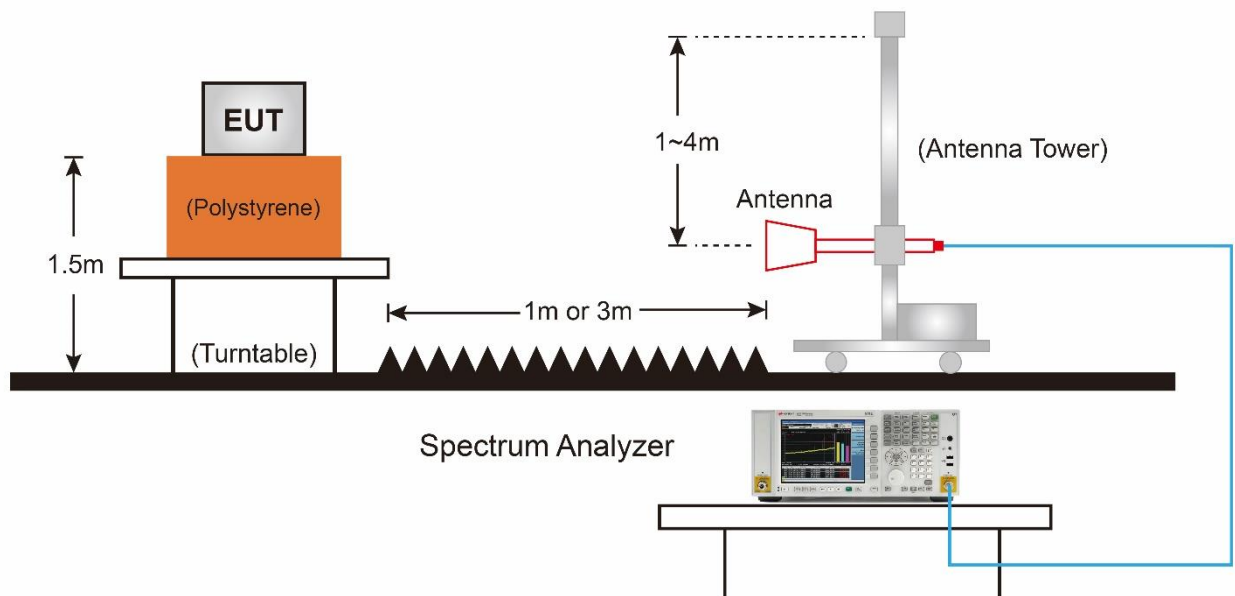

7.7.5.Test Result

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	VULB 9162	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

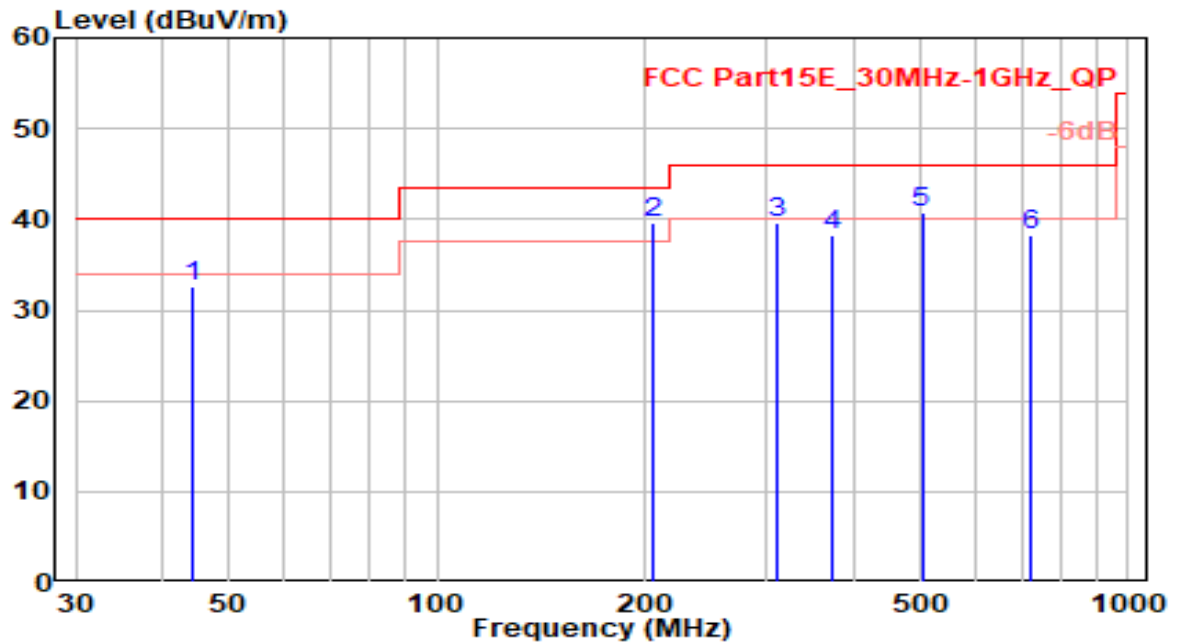


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	44.300	11.35	21.33	32.69	-7.31	40.00	100	320	QP
2	* 204.520	20.87	18.68	39.54	-3.96	43.50	100	40	QP
3	310.460	17.92	21.69	39.62	-6.38	46.00	100	20	QP
4	373.360	14.85	23.46	38.31	-7.69	46.00	100	65	QP
5	502.750	14.95	25.76	40.71	-5.29	46.00	120	15	QP
6	725.120	9.03	29.26	38.30	-7.70	46.00	100	275	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	VULB 9162	Temp. / Humidity	25°C /6%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

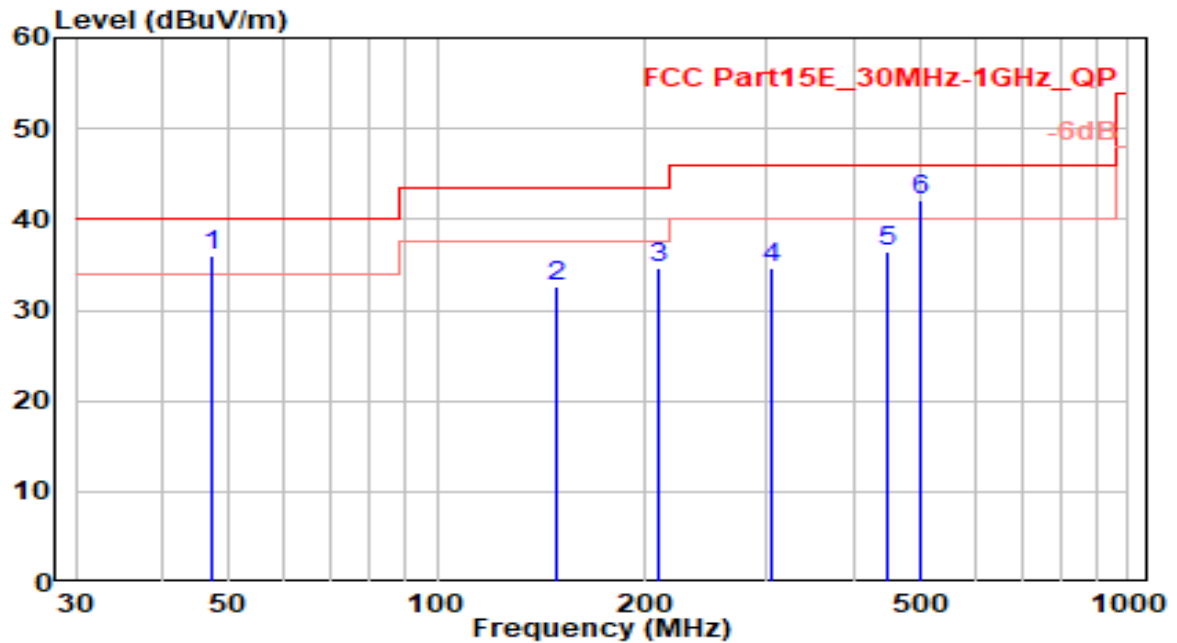


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	47.210	14.53	21.53	36.06	-3.94	40.00	100	35	QP
2	148.260	16.84	15.73	32.57	-10.93	43.50	100	295	QP
3	209.580	15.99	18.64	34.62	-8.88	43.50	100	90	QP
4	304.490	13.13	21.50	34.63	-11.37	46.00	100	145	QP
5	446.490	11.96	24.40	36.36	-9.64	46.00	100	20	QP
6	* 499.110	16.41	25.70	42.11	-3.89	46.00	100	10	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

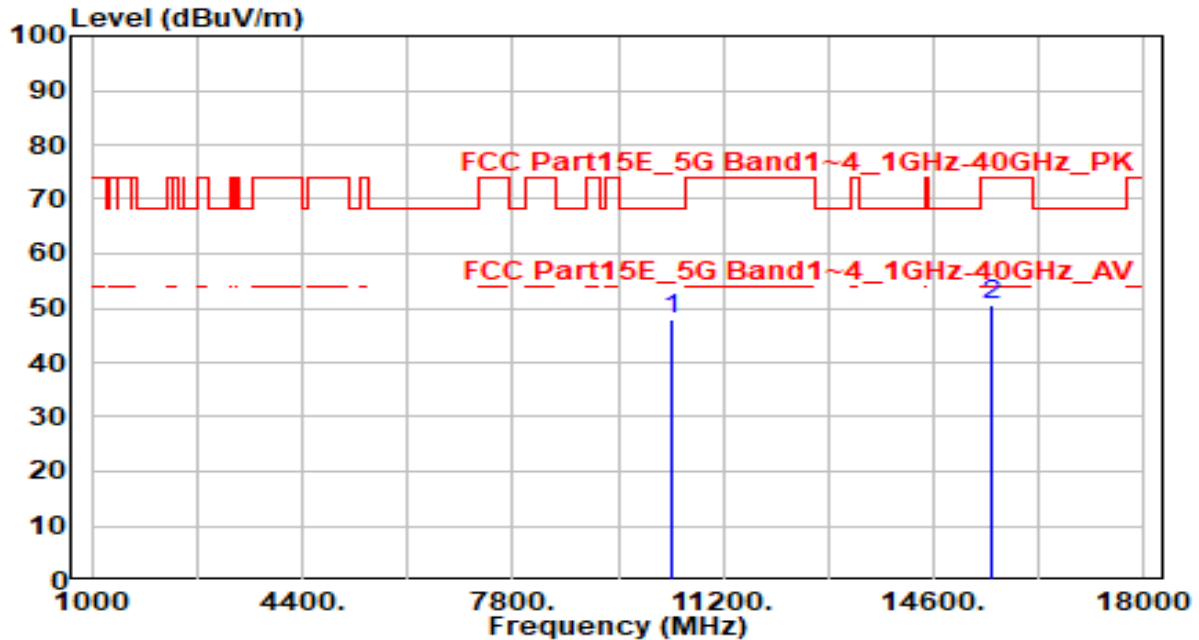


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.52	5.29	47.82	-20.38	68.20	200	285	Peak
2		15540.000	44.12	6.41	50.53	-23.47	74.00	285	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

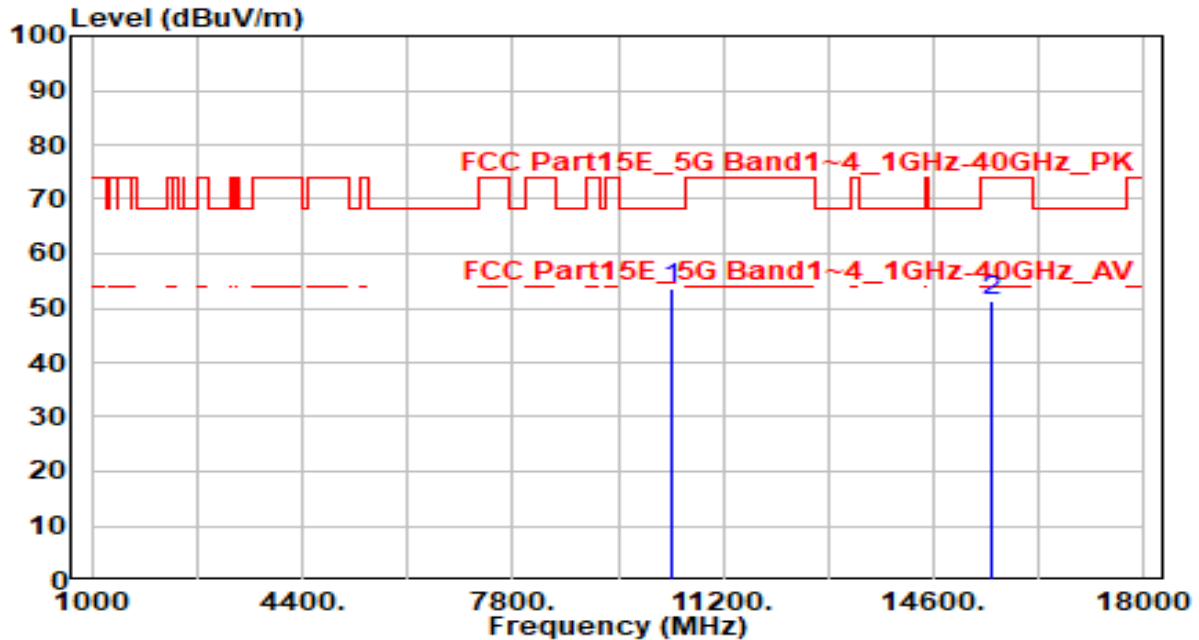


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	48.47	5.29	53.77	-14.43	68.20	150	360	Peak
2		15540.000	45.08	6.41	51.49	-22.51	74.00	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

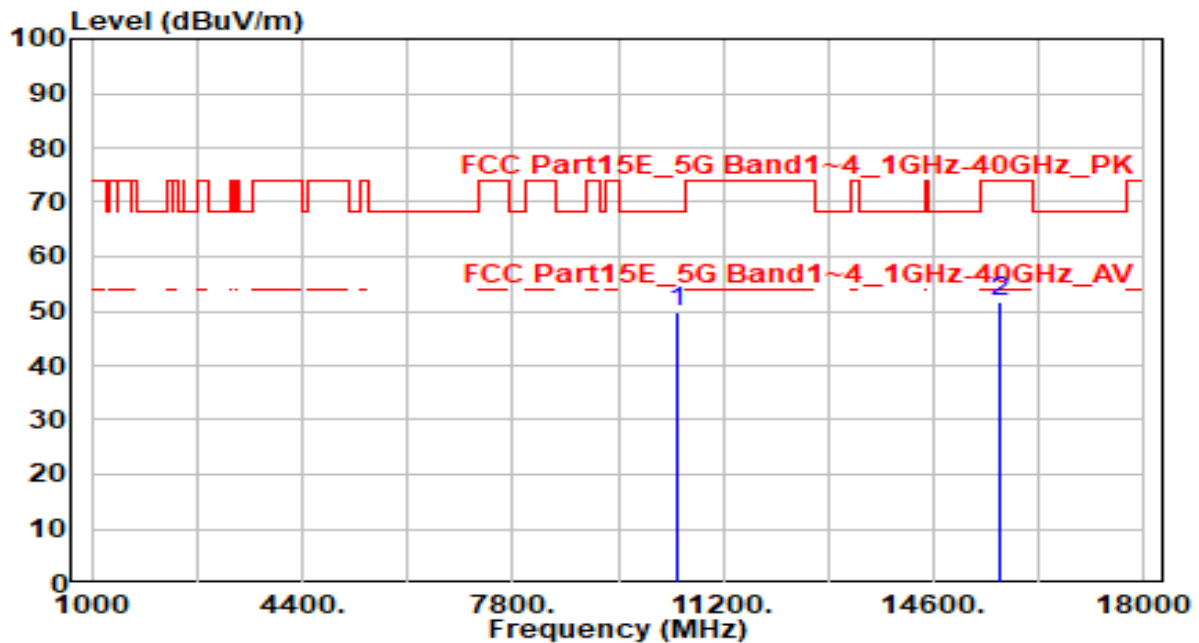


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	44.50	5.28	49.78	-18.42	68.20	100	330	Peak
2		15660.000	45.32	6.56	51.88	-22.12	74.00	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

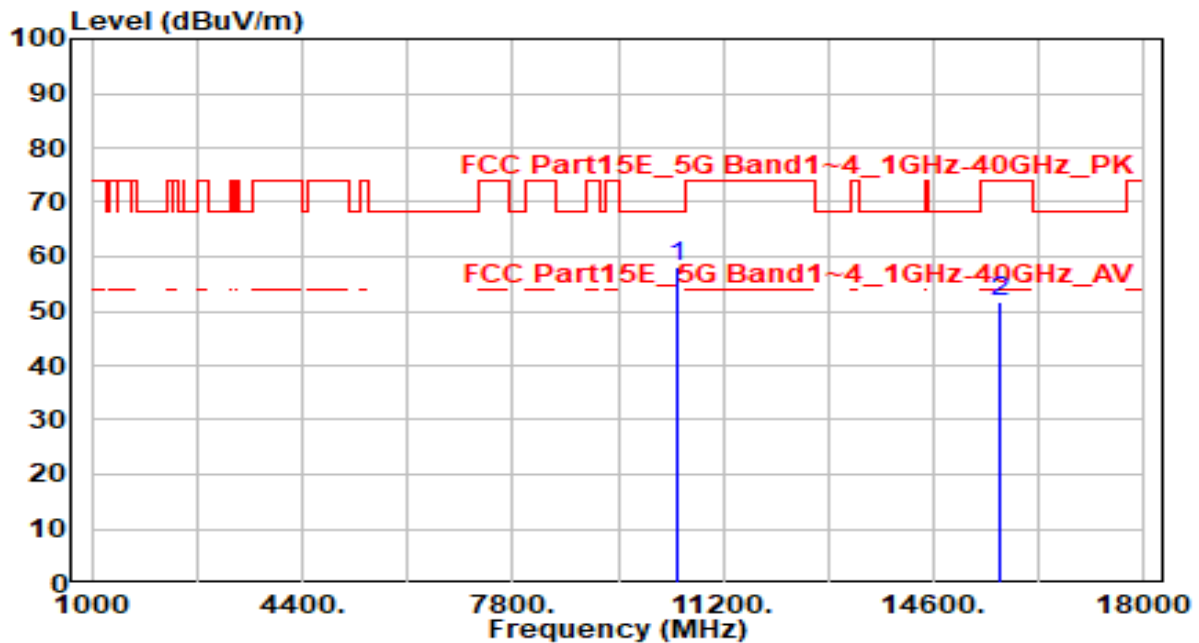


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	52.79	5.28	58.06	-10.14	68.20	100	290	Peak
2		15660.000	45.17	6.56	51.73	-22.27	74.00	100	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

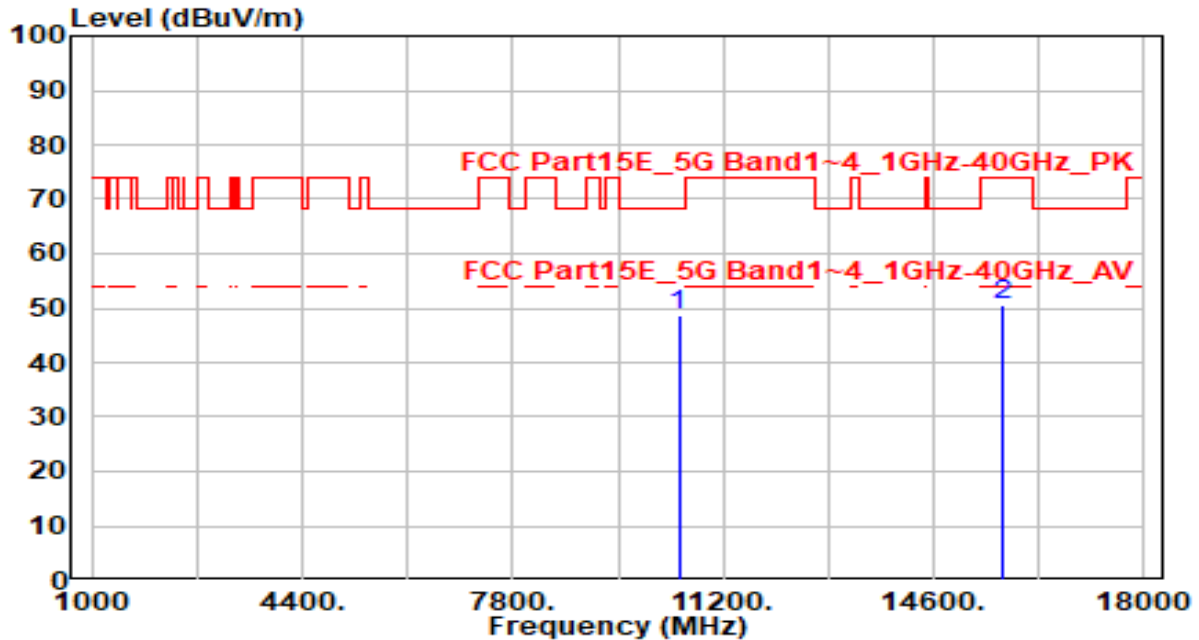


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	43.28	5.26	48.53	-19.67	68.20	100	150	Peak
2		15720.000	44.00	6.69	50.69	-23.31	74.00	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

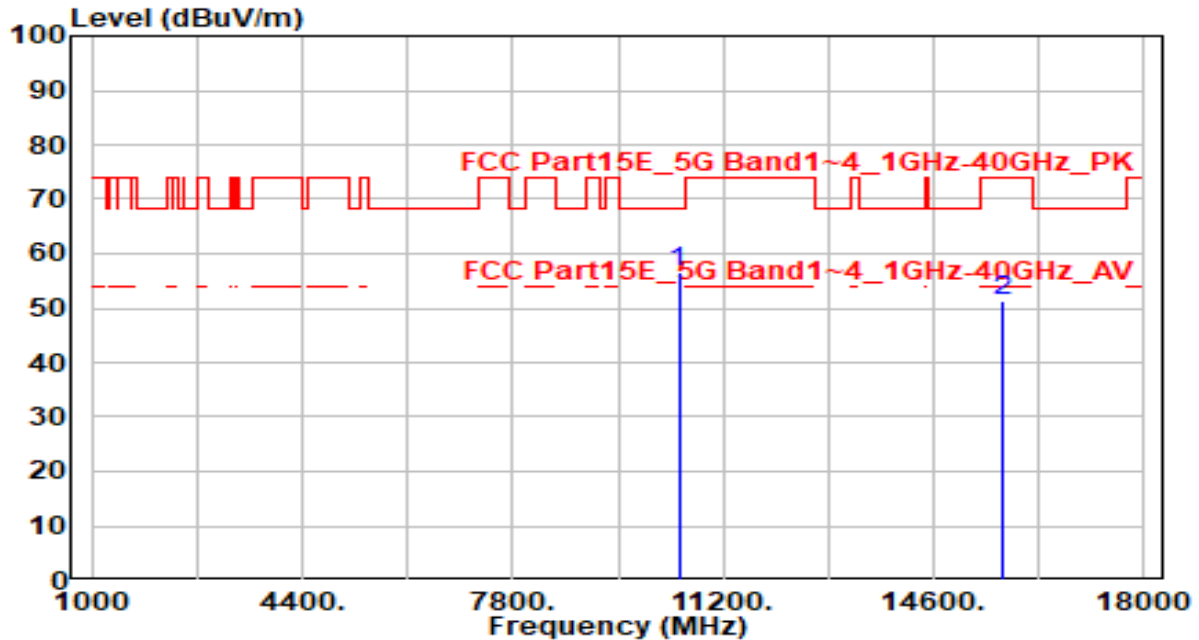


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	51.39	5.26	56.65	-11.55	68.20	100	305	Peak
2		15720.000	44.48	6.69	51.18	-22.82	74.00	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

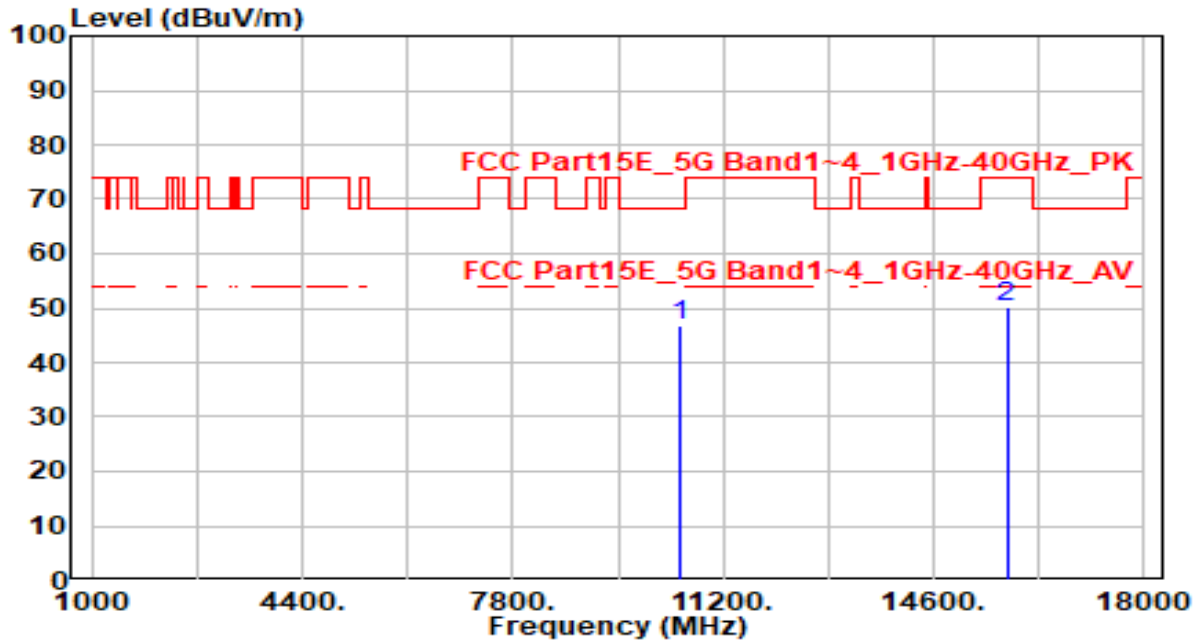


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.47	5.25	46.72	-21.48	68.20	100	305	Peak
2		15780.000	43.54	6.83	50.37	-23.63	74.00	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

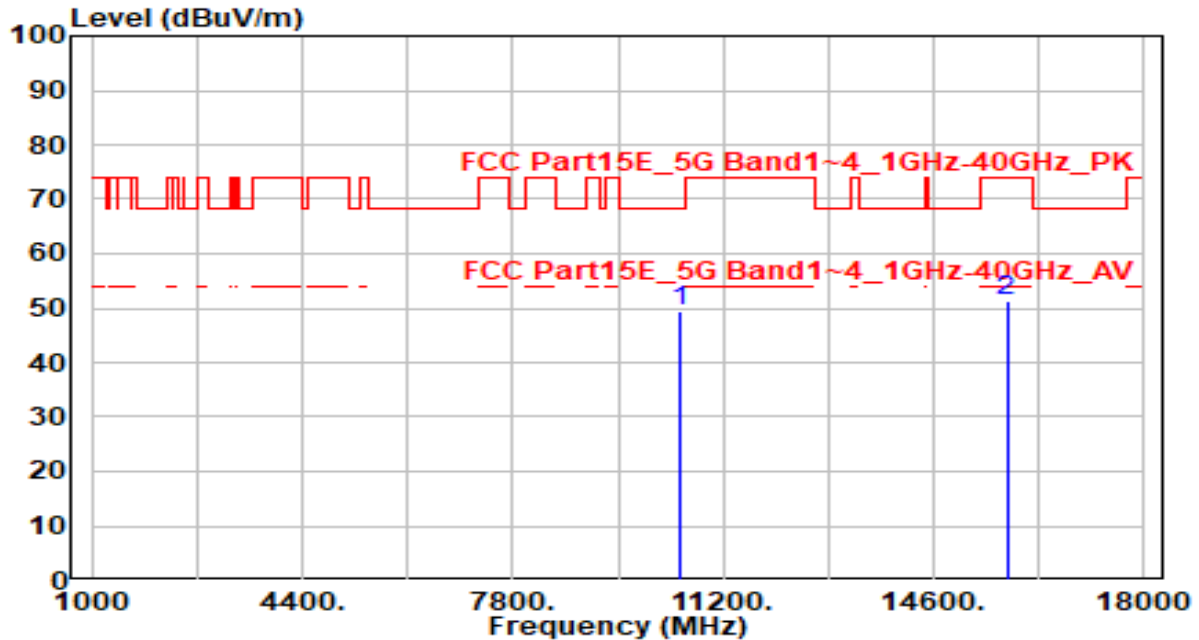


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	44.10	5.25	49.35	-18.85	68.20	100	320	Peak
2		15780.000	44.62	6.83	51.45	-22.55	74.00	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

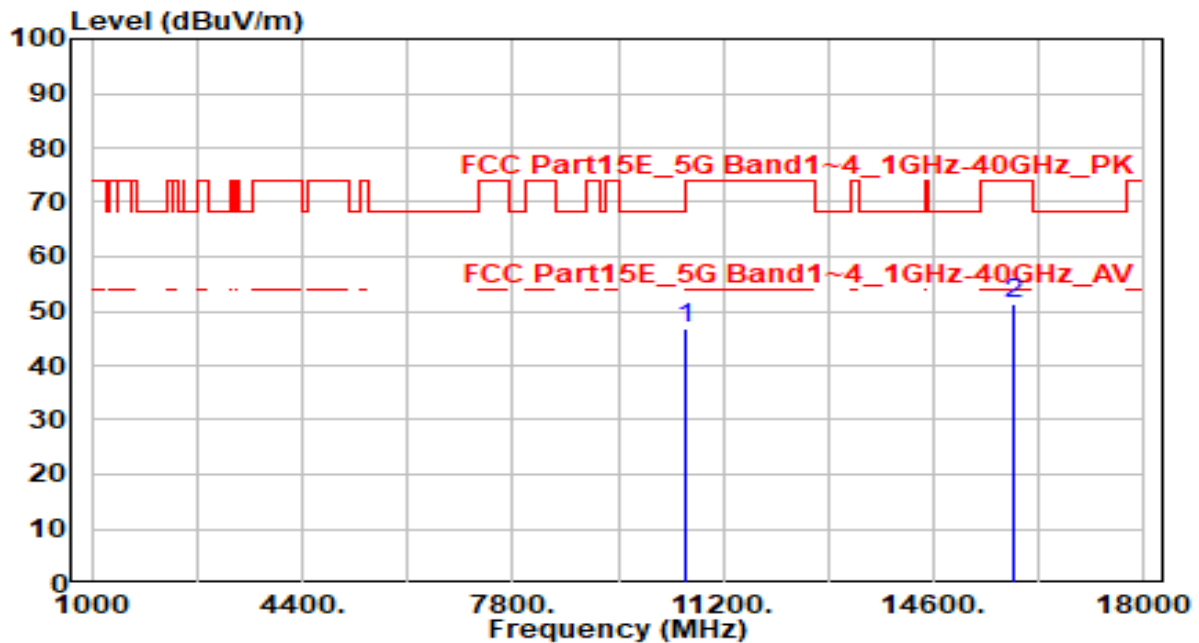


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	41.71	5.25	46.96	-21.24	68.20	100	360	Peak
2		15900.000	44.42	6.95	51.38	-22.62	74.00	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

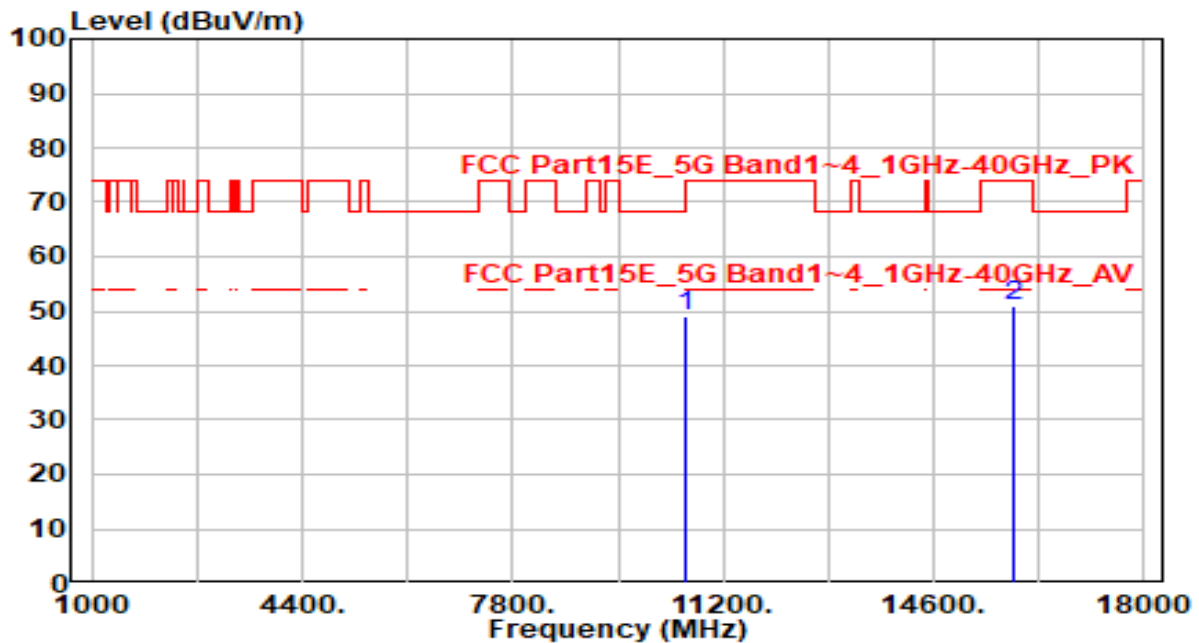


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	43.84	5.25	49.09	-19.11	68.20	100	320	Peak
2		15900.000	44.10	6.95	51.06	-22.94	74.00	100	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

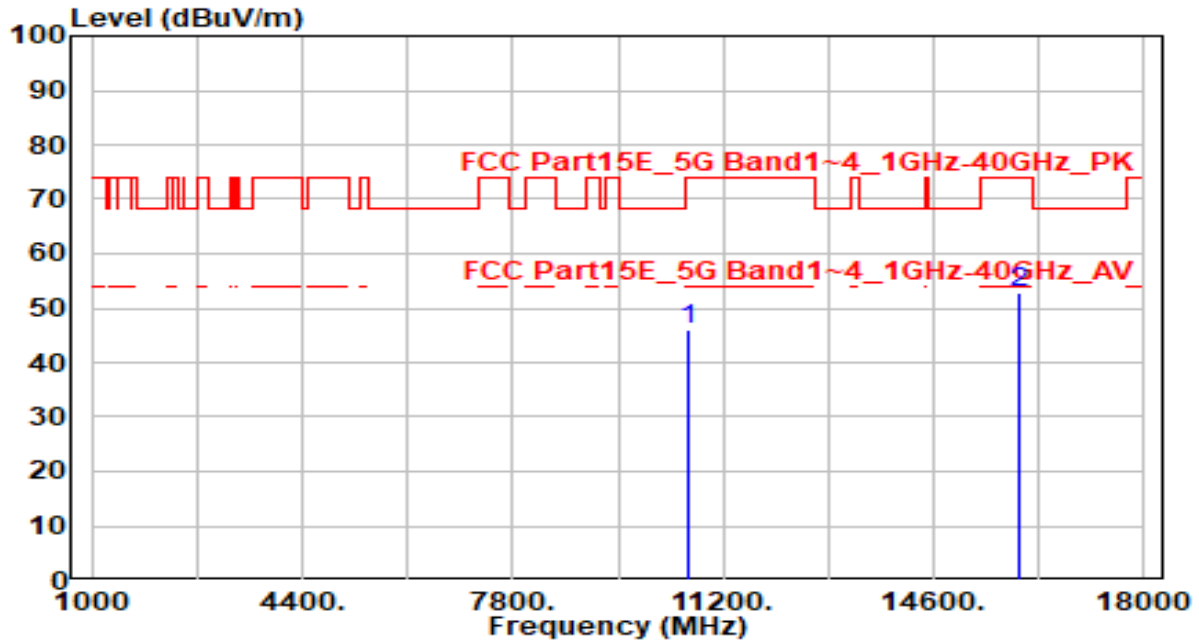


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	40.92	5.27	46.19	-27.81	74.00	100	340	Peak
2	*	15960.000	45.78	7.00	52.78	-21.22	74.00	100	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

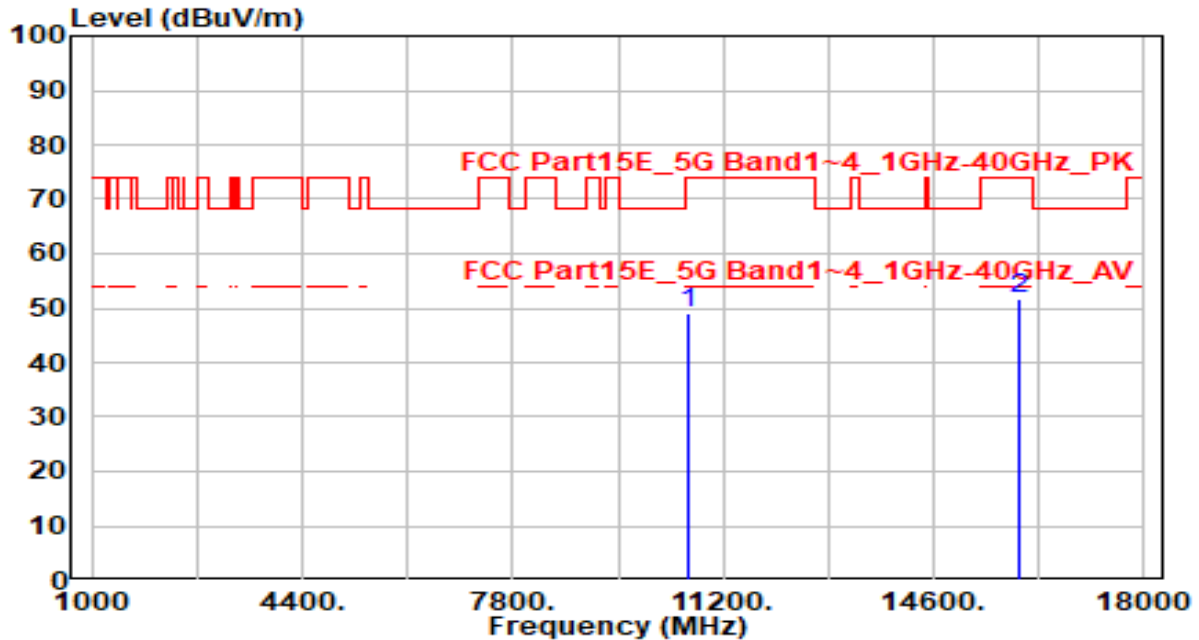


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	43.85	5.27	49.12	-24.88	74.00	100	220	Peak
2	*	15960.000	44.64	7.00	51.64	-22.36	74.00	100	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

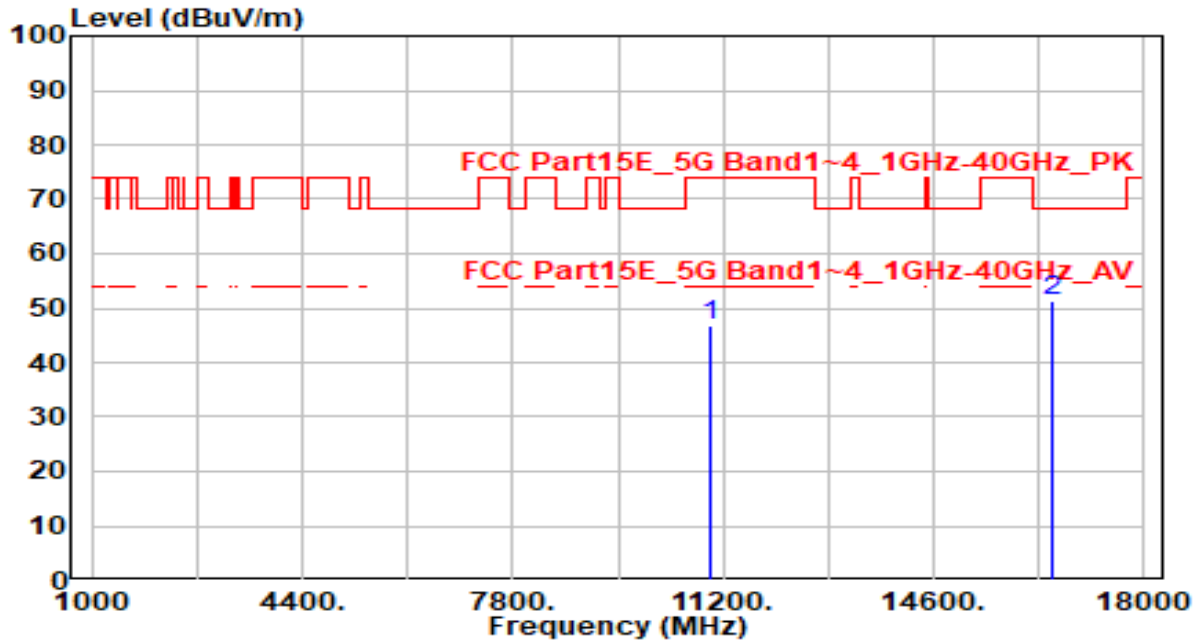


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	41.38	5.56	46.94	-27.06	74.00	100	75	Peak
2	*	16500.000	43.93	7.34	51.27	-16.93	68.20	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

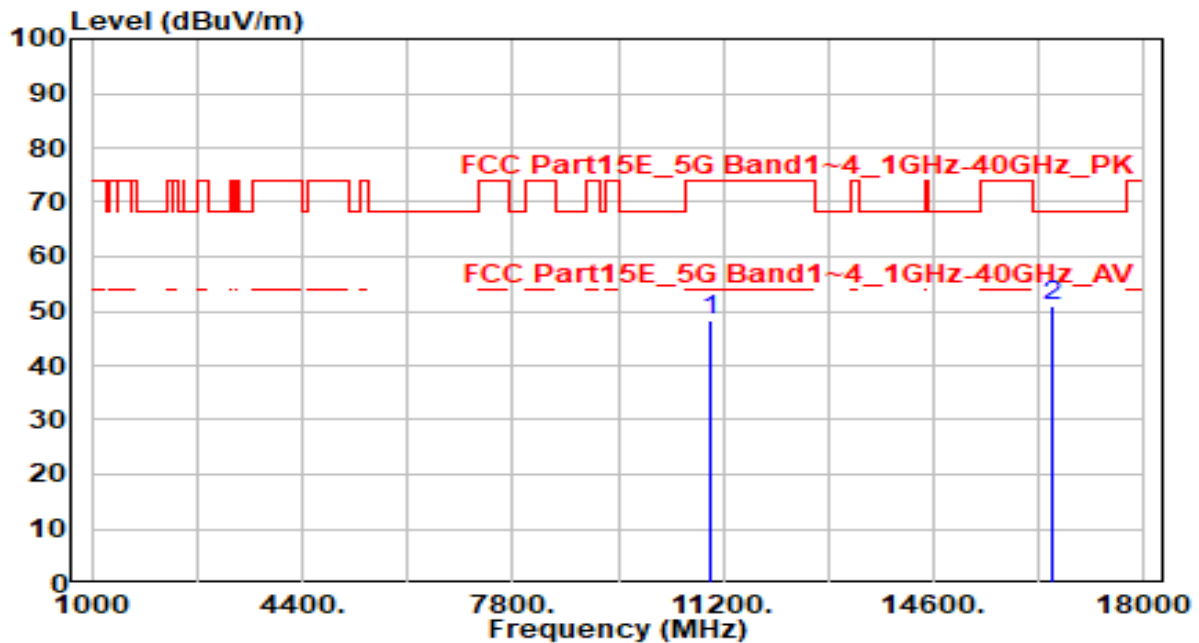


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.67	5.56	48.23	-25.77	74.00	100	330	Peak
2	*	16500.000	43.43	7.34	50.77	-17.43	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

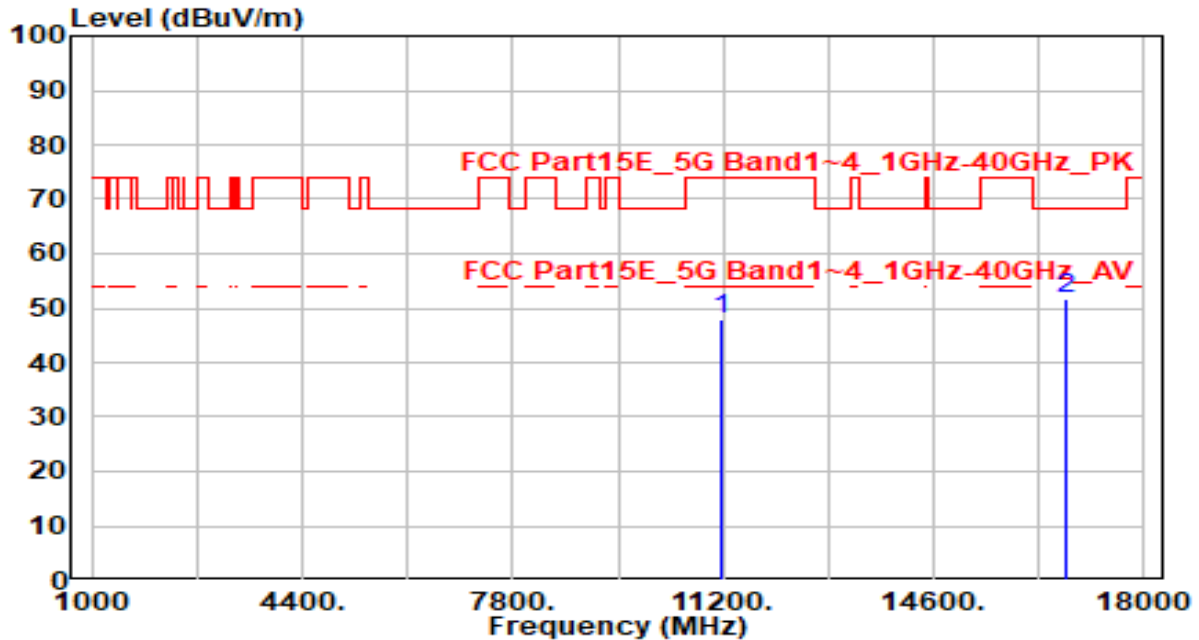


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	42.31	5.73	48.04	-25.96	74.00	100	260	Peak
2	*	16740.000	44.03	7.72	51.74	-16.46	68.20	100	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

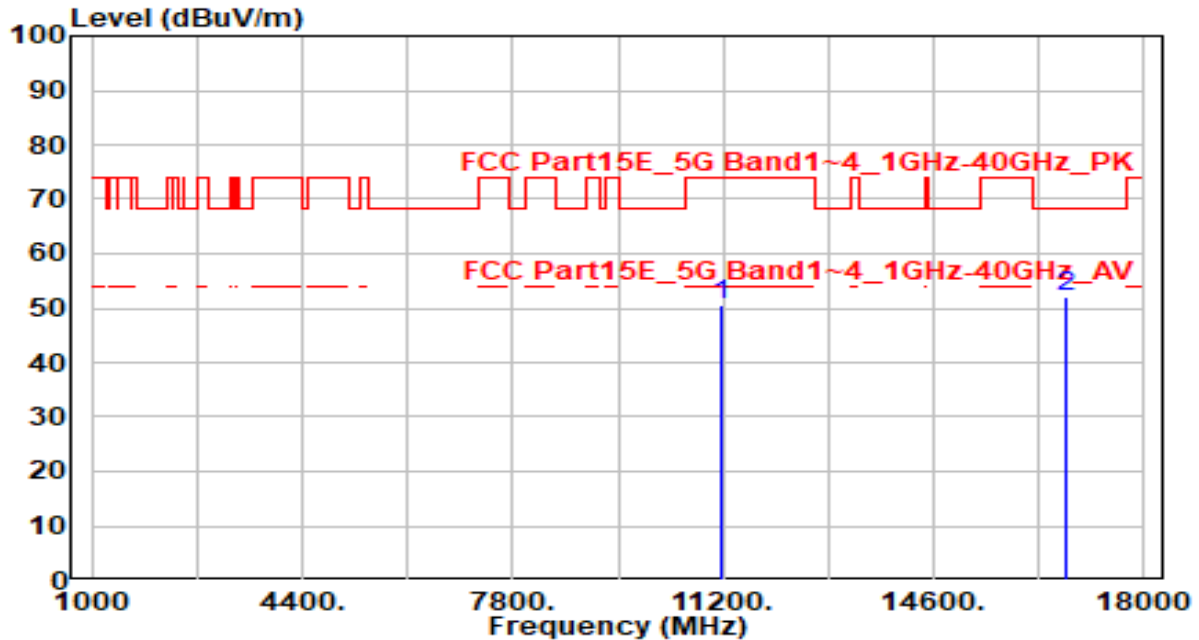


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	44.88	5.73	50.61	-23.39	74.00	100	345	Peak
2	*	16740.000	44.21	7.72	51.93	-16.27	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

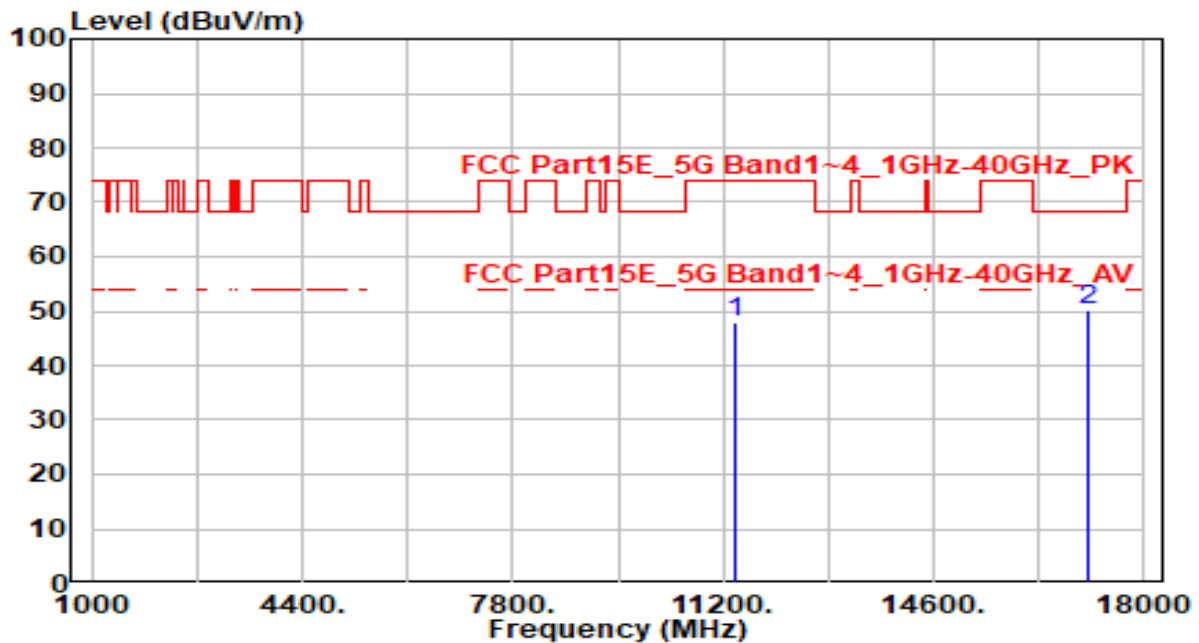


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	41.96	5.98	47.94	-26.06	74.00	100	135	Peak
2	*	17100.000	44.11	6.16	50.27	-17.93	68.20	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

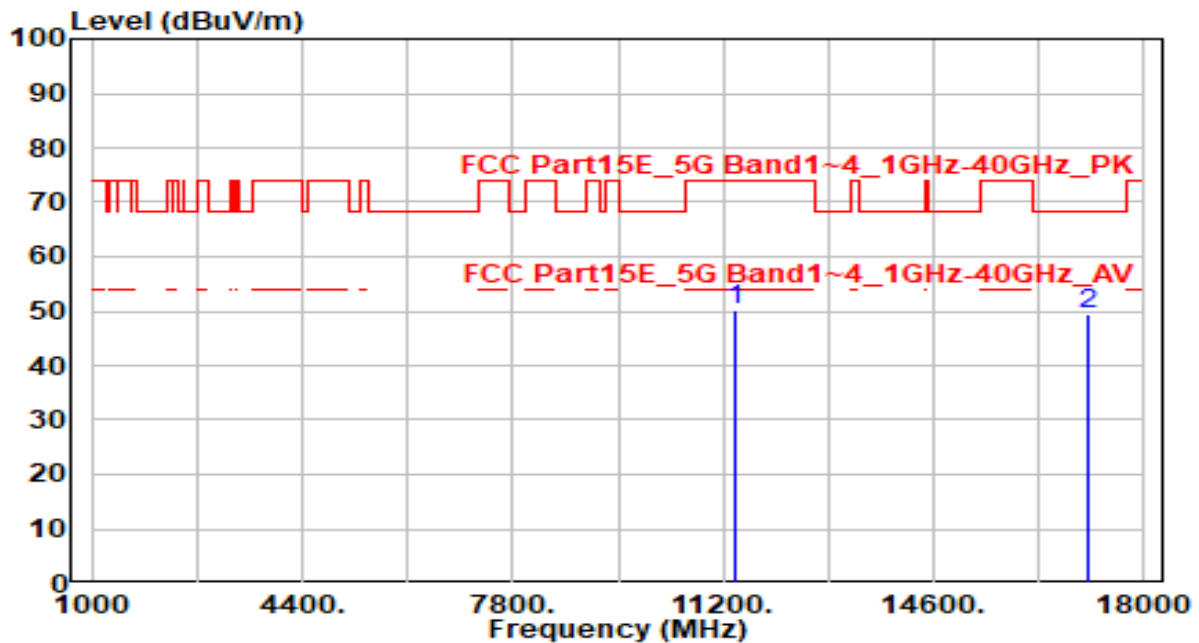


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	44.15	5.98	50.13	-23.87	74.00	100	0	Peak
2	*	17100.000	43.14	6.16	49.30	-18.90	68.20	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

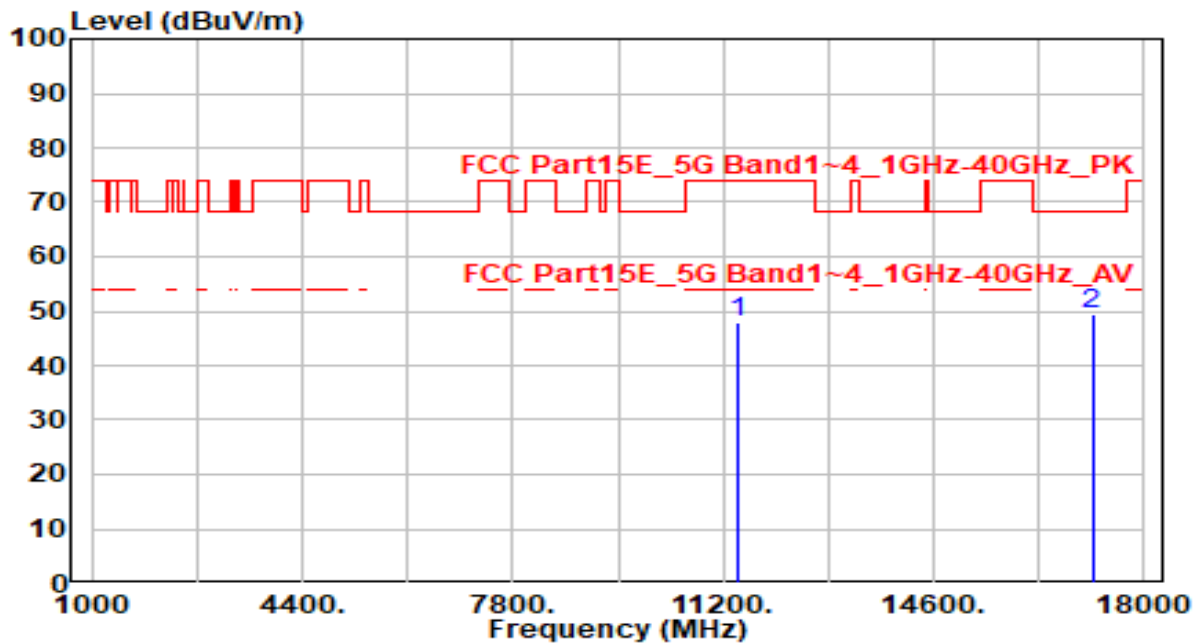


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	42.13	5.97	48.10	-25.90	74.00	100	315	Peak
2	*	17160.000	43.45	5.98	49.43	-18.77	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

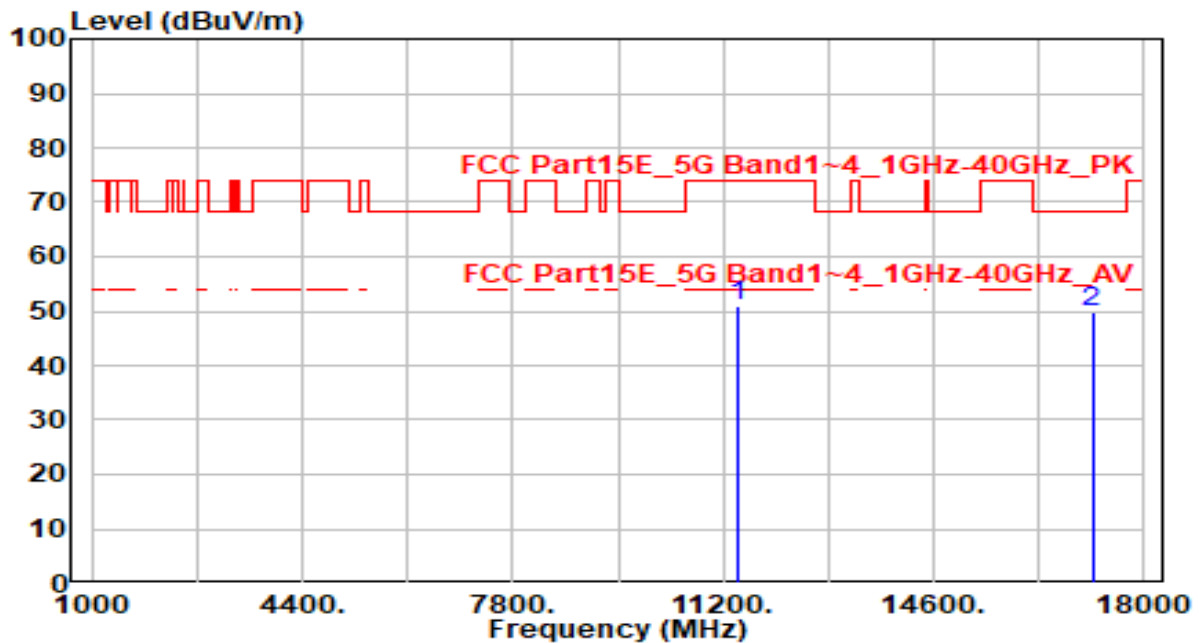


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	44.81	5.97	50.78	-23.22	74.00	100	345	Peak
2	*	17160.000	43.84	5.98	49.82	-18.38	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

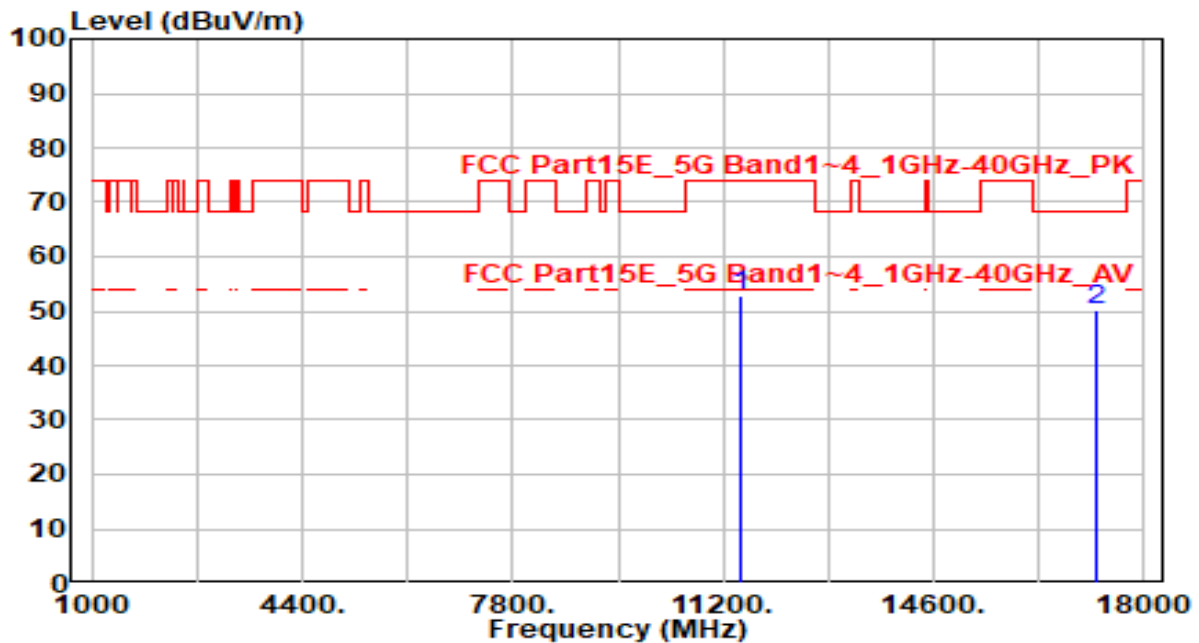


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	47.05	5.94	52.99	-21.01	74.00	100	95	Peak
2	*	17235.000	44.45	5.78	50.24	-17.96	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

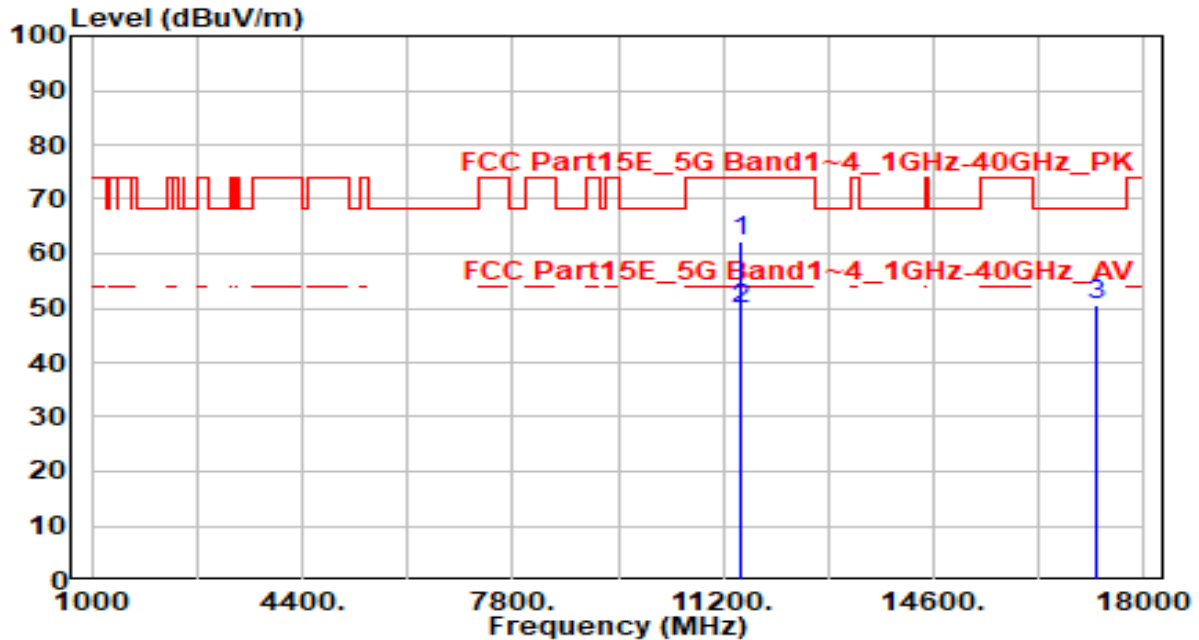


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11490.000	56.44	5.94	62.39	-11.61	74.00	100	185	Peak
2	*	11490.000	44.00	5.94	49.94	-4.06	54.00	100	185	Average
3		17235.000	44.72	5.78	50.50	-17.70	68.20	100	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

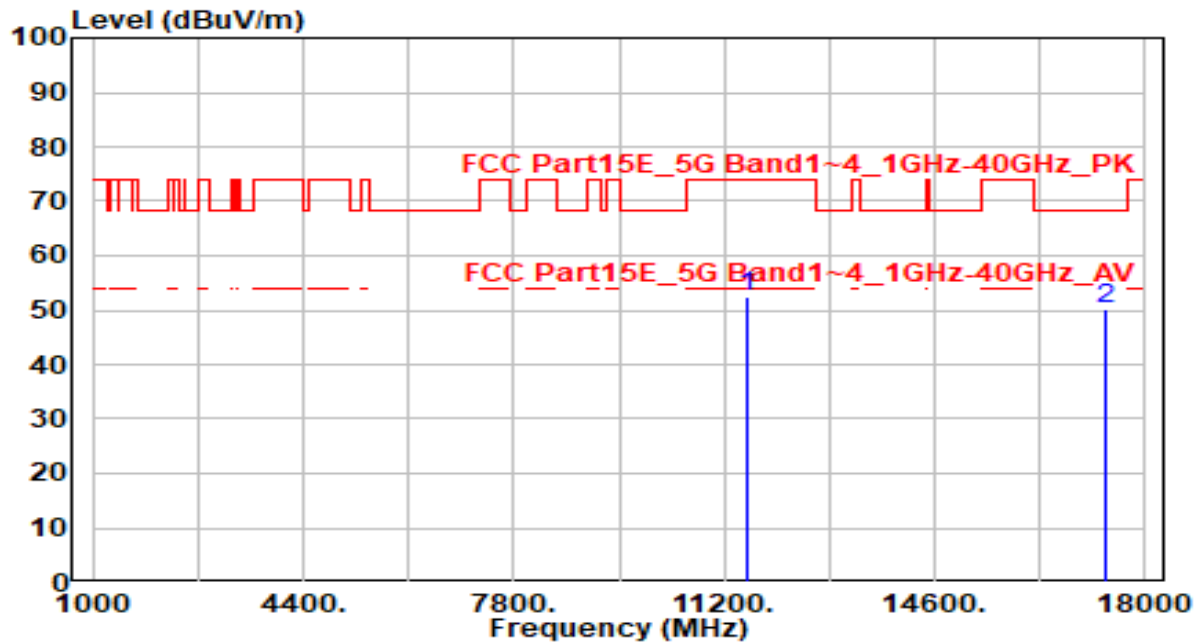


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	46.71	5.91	52.62	-21.38	74.00	100	225	Peak
2	* 17355.000	44.49	5.54	50.03	-18.17	68.20	100	270	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

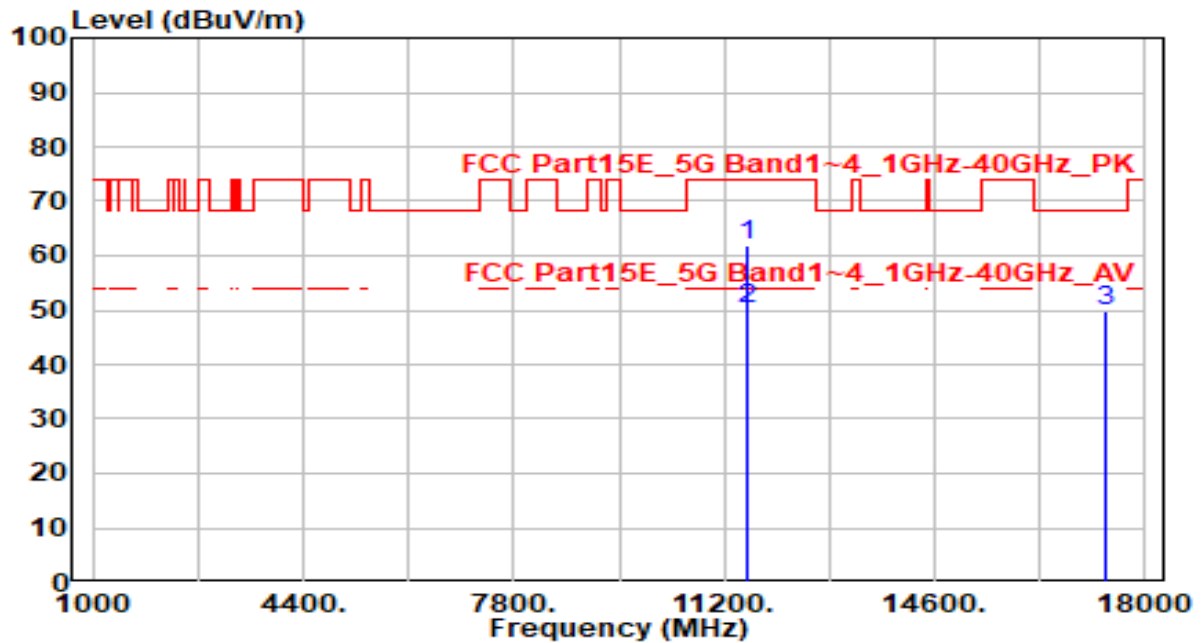


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11570.000	56.12	5.91	62.03	-11.97	74.00	100	195	Peak
2	*	11570.000	44.15	5.91	50.06	-3.94	54.00	100	195	Average
3		17355.000	44.33	5.54	49.87	-18.33	68.20	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

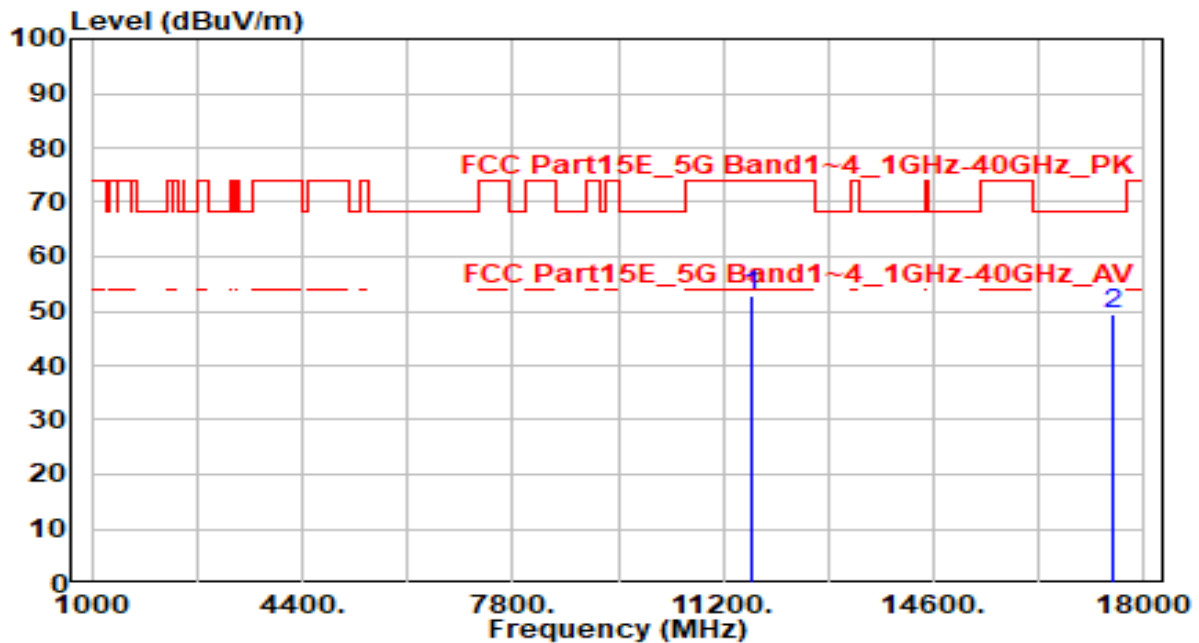


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	46.91	5.86	52.77	-21.23	74.00	100	160	Peak
2	*	17475.000	43.86	5.44	49.30	-18.90	68.20	100	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

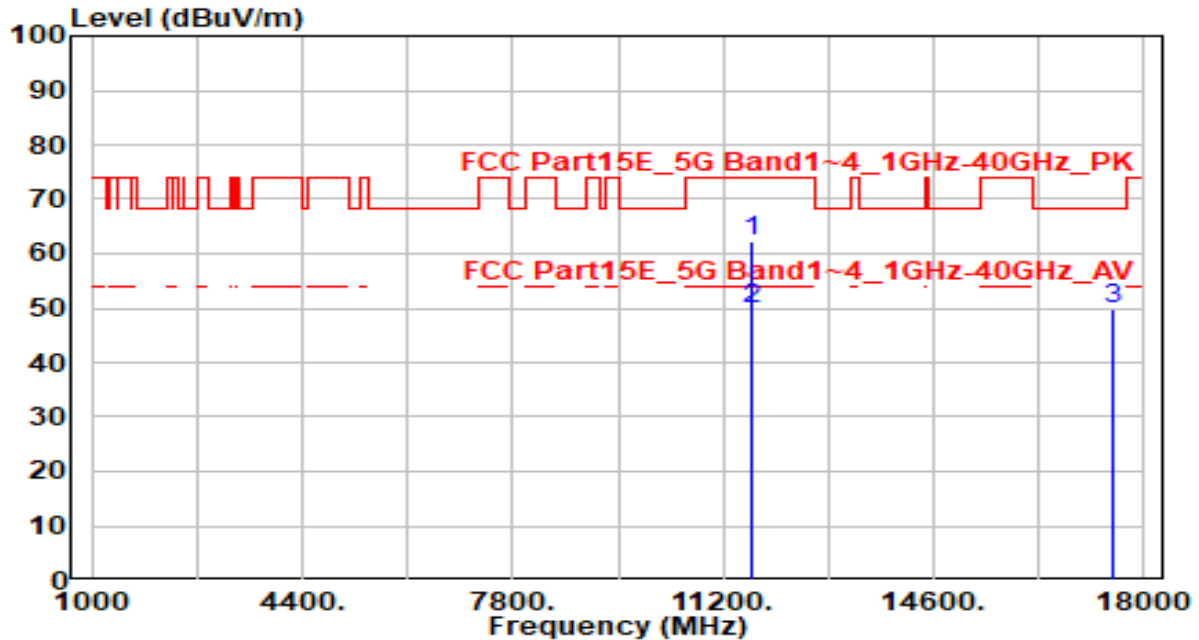


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11650.000	56.33	5.86	62.18	-11.82	74.00	100	305	Peak
2	*	11650.000	43.93	5.86	49.79	-4.22	54.00	100	305	Average
3		17475.000	44.30	5.44	49.74	-18.46	68.20	100	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

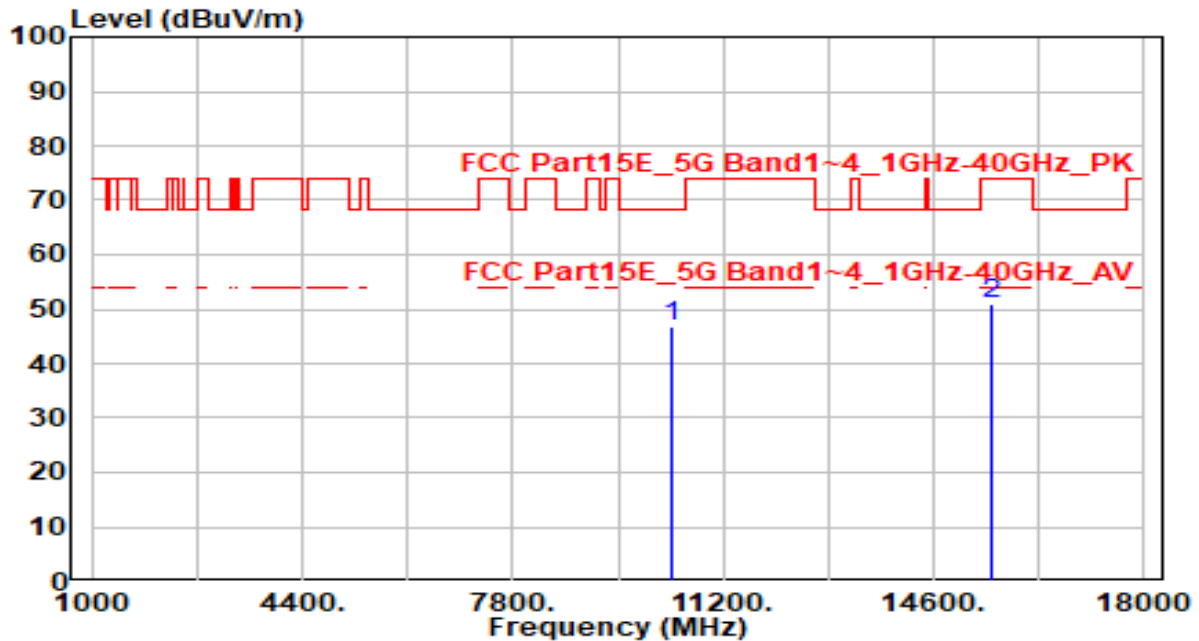


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	41.38	5.29	46.68	-21.52	68.20	100	50	Peak
2		15540.000	44.37	6.41	50.78	-23.22	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

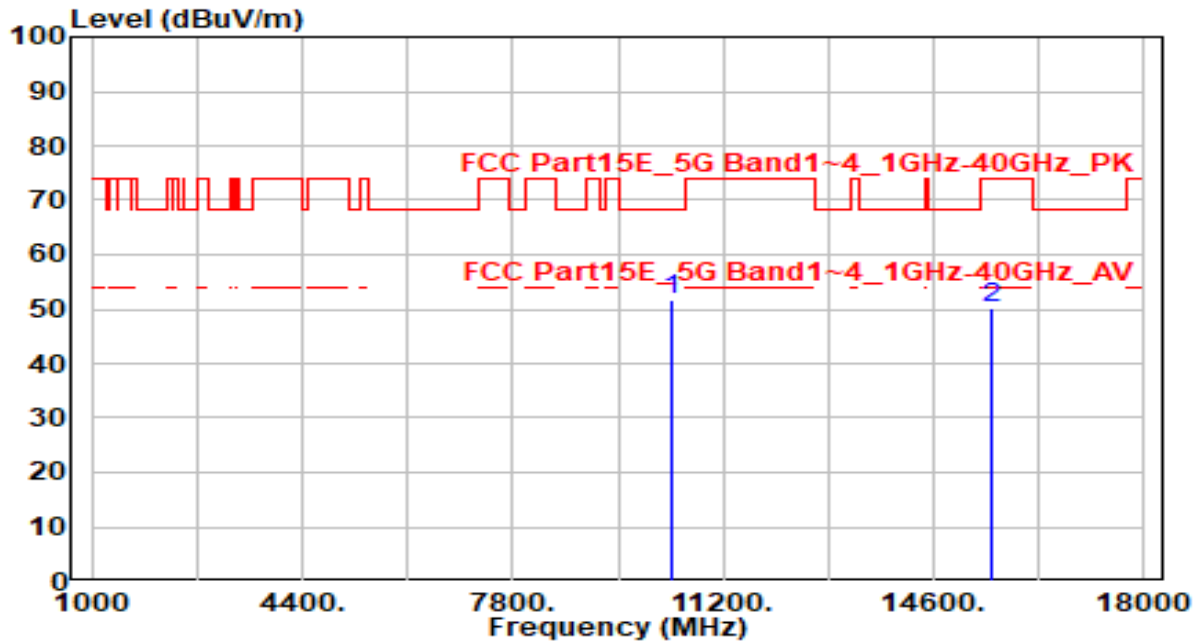


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	46.53	5.29	51.83	-16.37	68.20	100	305	Peak
2		15540.000	43.78	6.41	50.19	-23.81	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

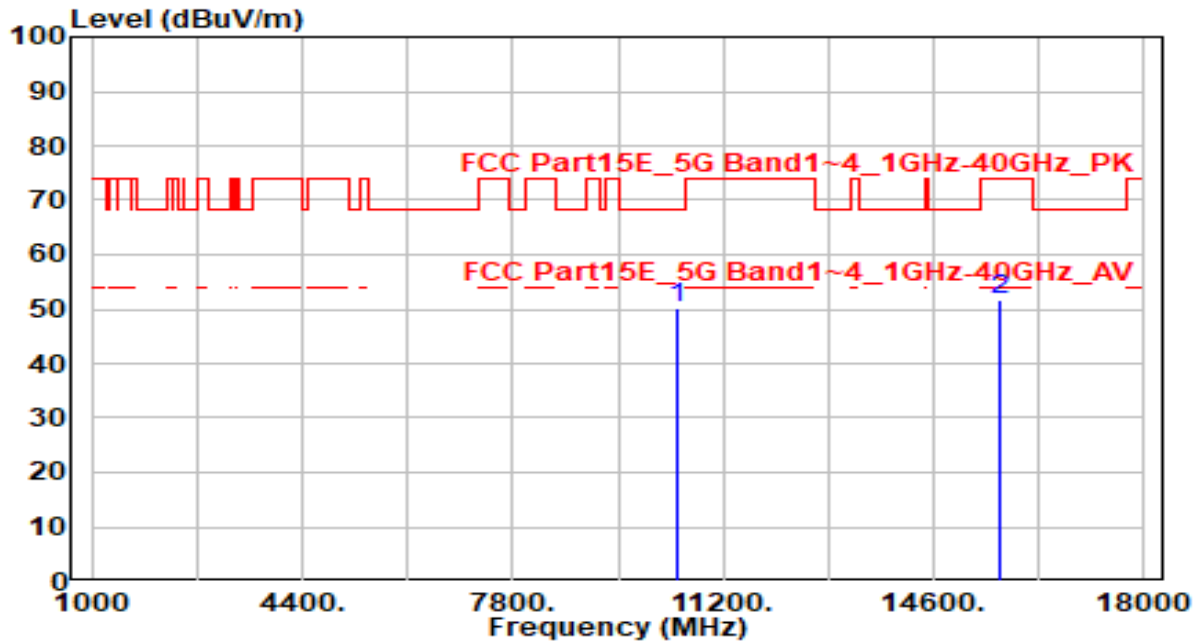


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	44.88	5.28	50.16	-18.04	68.20	100	50	Peak
2		15660.000	45.32	6.56	51.88	-22.12	74.00	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

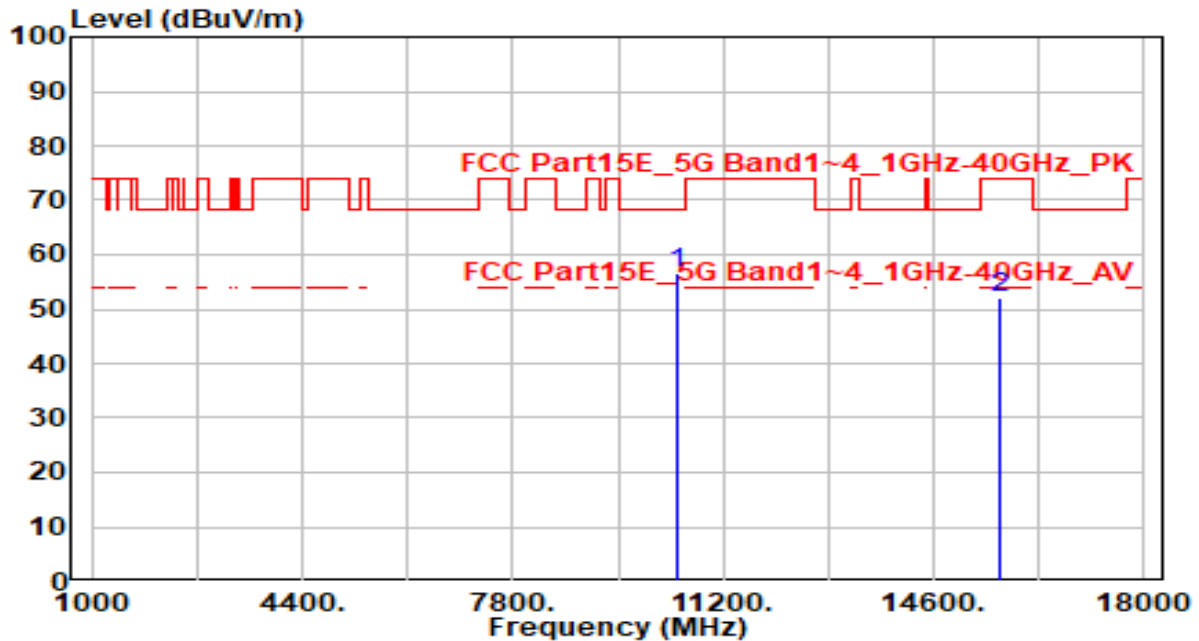


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	51.49	5.28	56.76	-11.44	68.20	100	65	Peak
2		15660.000	45.68	6.56	52.24	-21.76	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

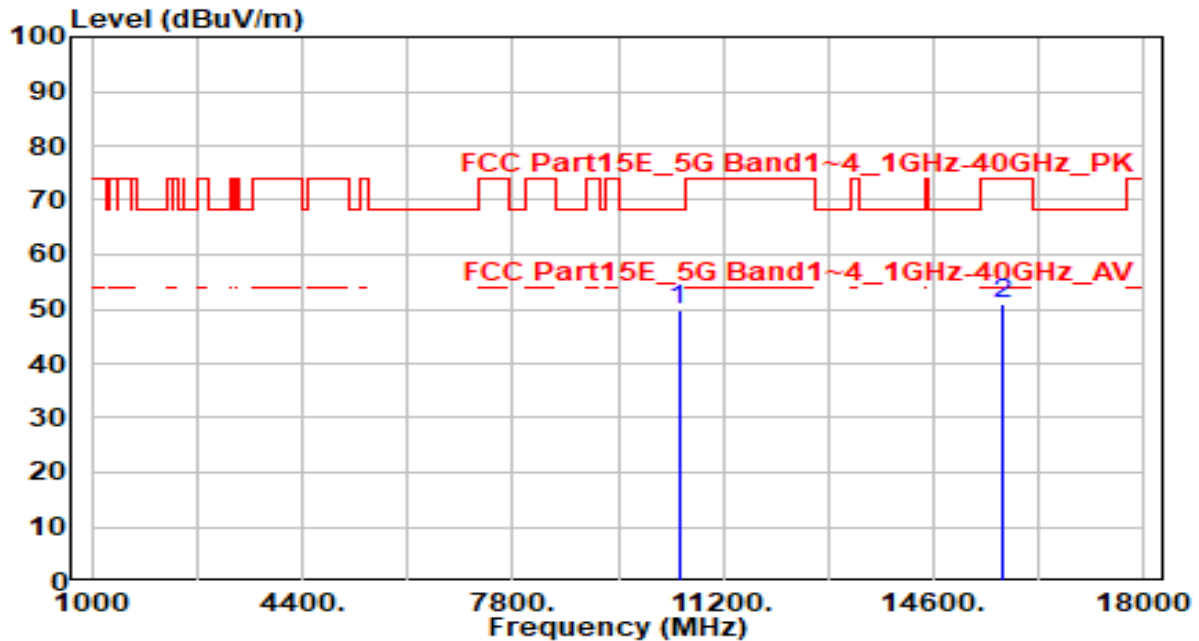


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	44.48	5.26	49.74	-18.46	68.20	100	335	Peak
2		15720.000	44.35	6.69	51.04	-22.96	74.00	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

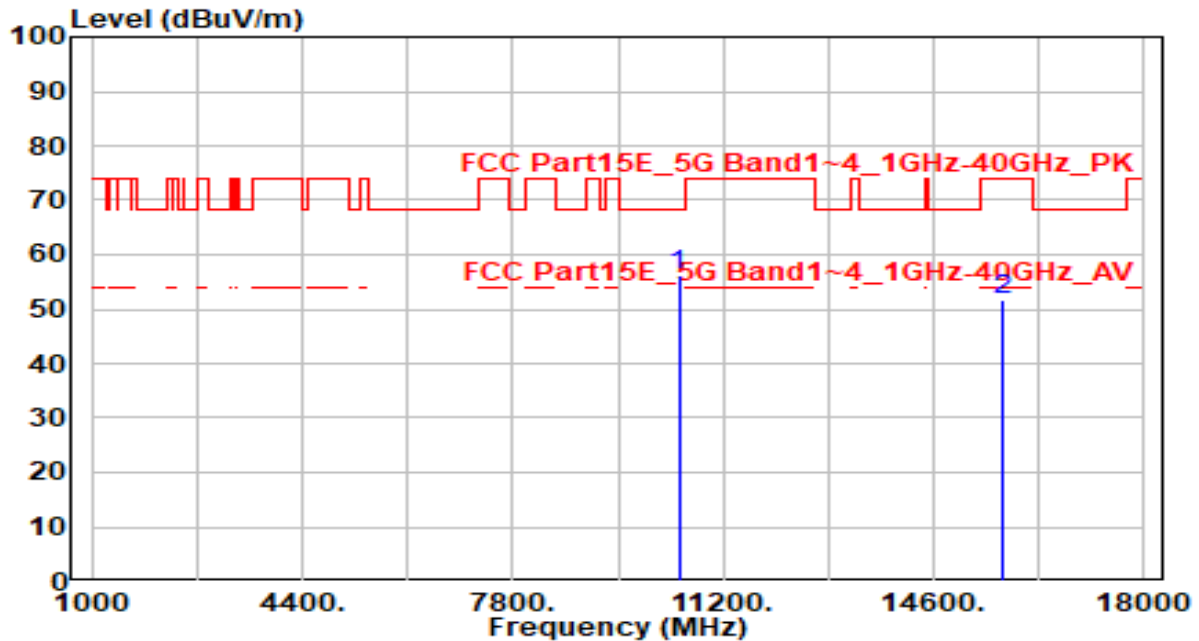


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	50.96	5.26	56.22	-11.98	68.20	100	290	Peak
2		15720.000	45.06	6.69	51.76	-22.24	74.00	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

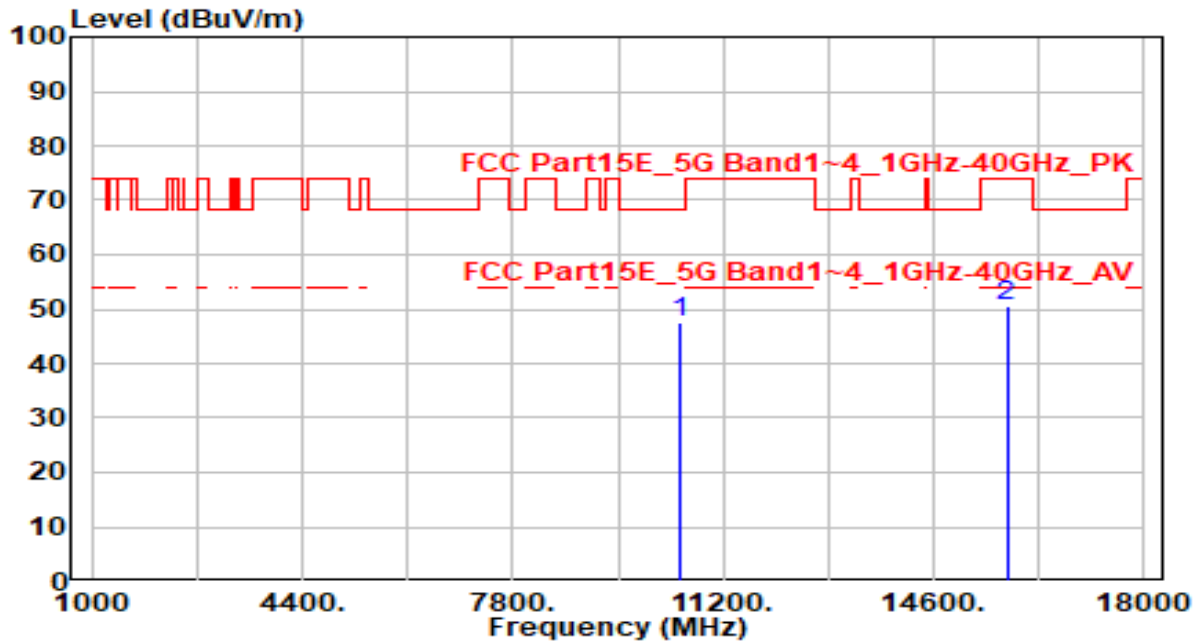


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.12	5.25	47.37	-20.83	68.20	100	75	Peak
2		15780.000	43.62	6.83	50.45	-23.55	74.00	100	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

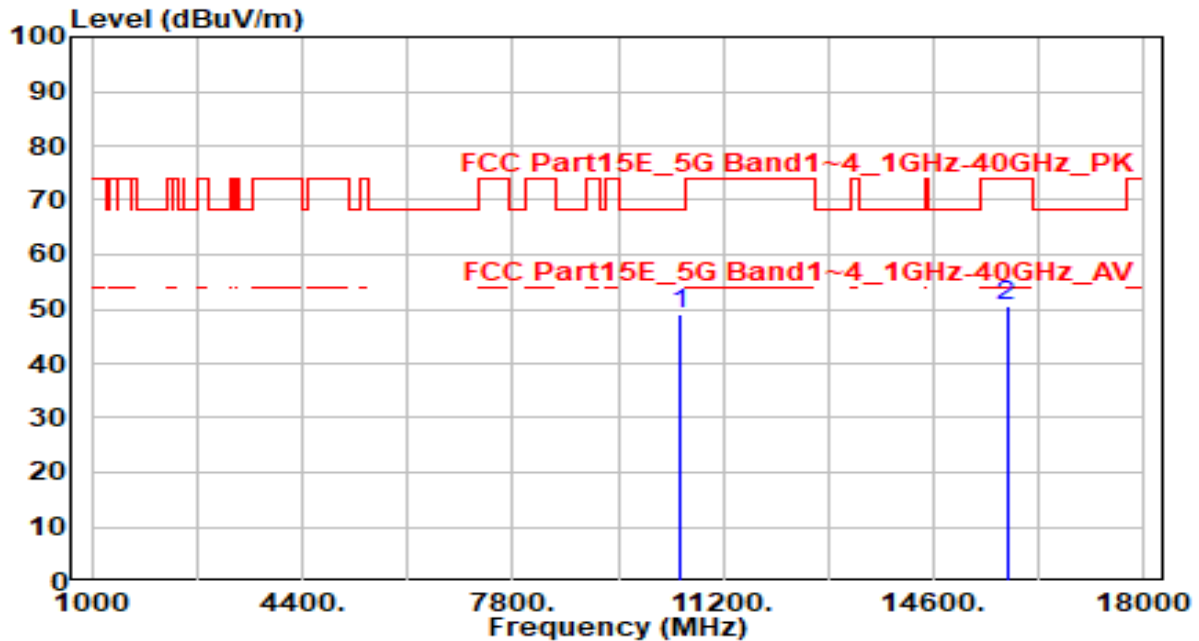


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	43.80	5.25	49.05	-19.15	68.20	100	320	Peak
2		15780.000	43.55	6.83	50.38	-23.62	74.00	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

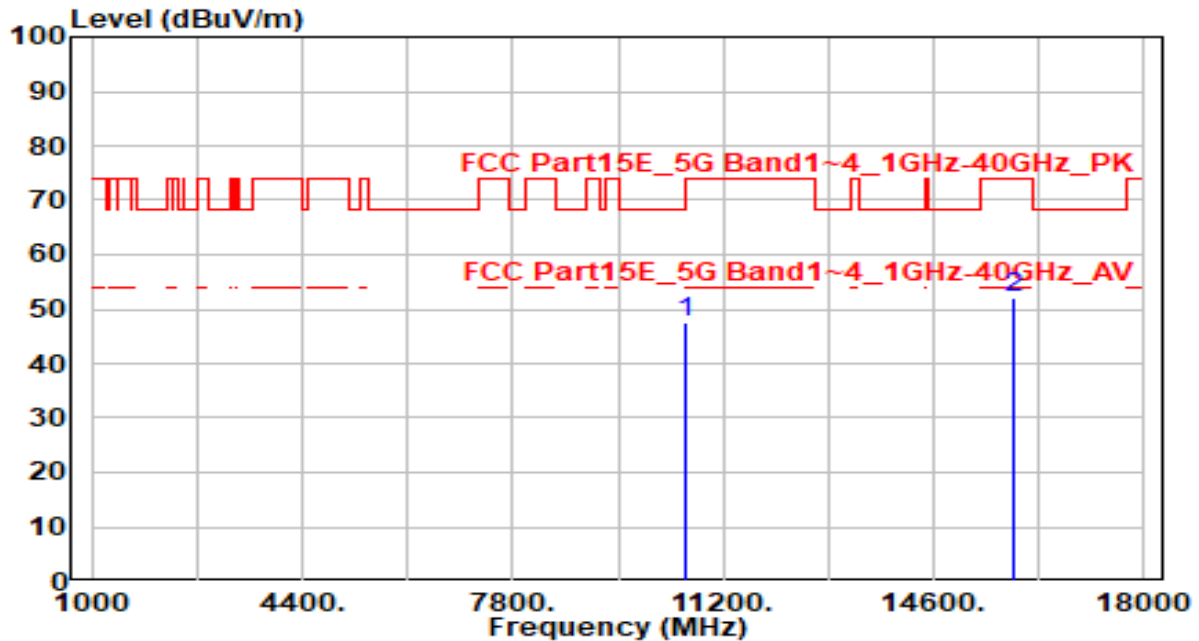


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.11	5.25	47.36	-20.84	68.20	100	0	Peak
2		15900.000	45.03	6.95	51.98	-22.02	74.00	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

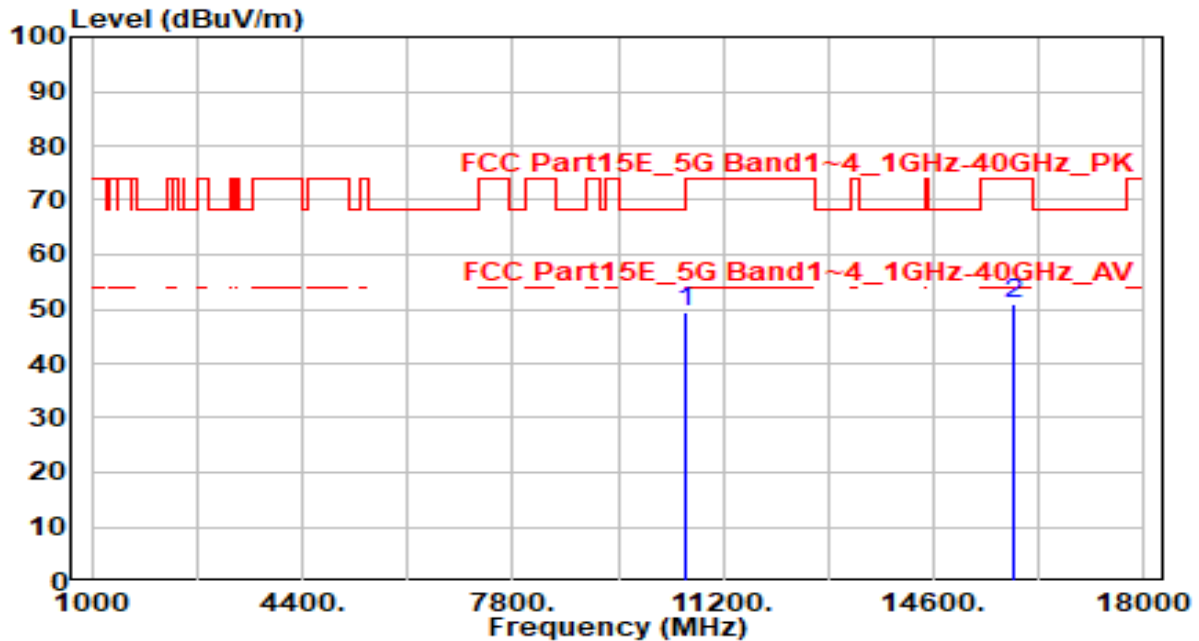


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	44.12	5.25	49.37	-18.83	68.20	100	290	Peak
2		15900.000	43.81	6.95	50.76	-23.24	74.00	100	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

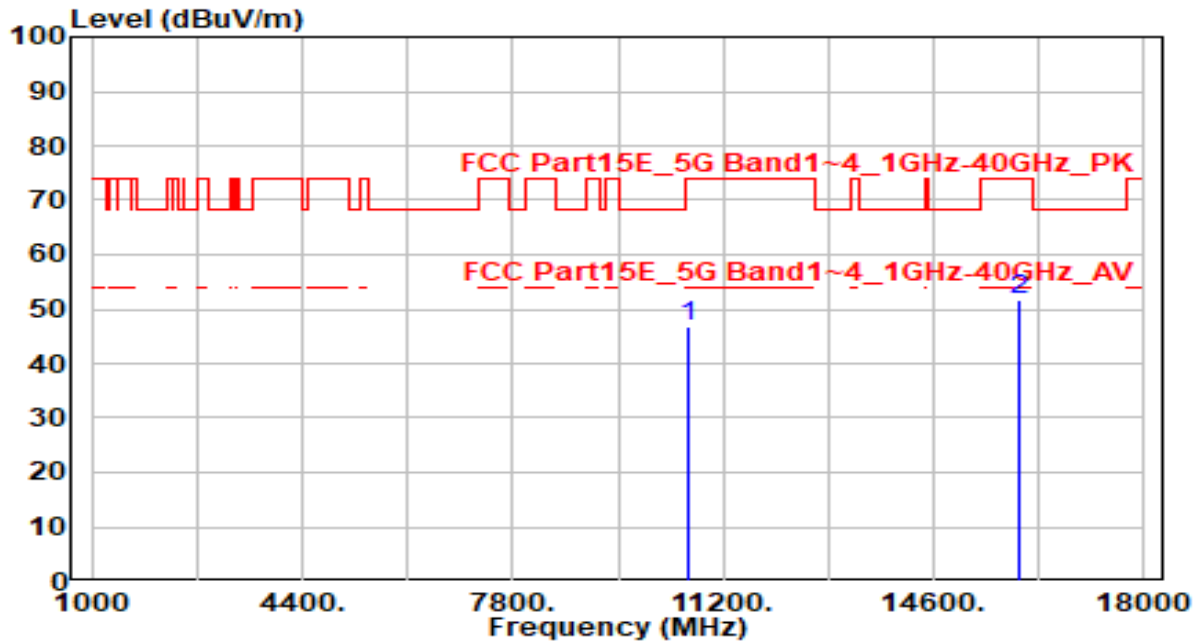


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.66	5.27	46.94	-27.06	74.00	100	225	Peak
2	* 15960.000	44.60	7.00	51.60	-22.40	74.00	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

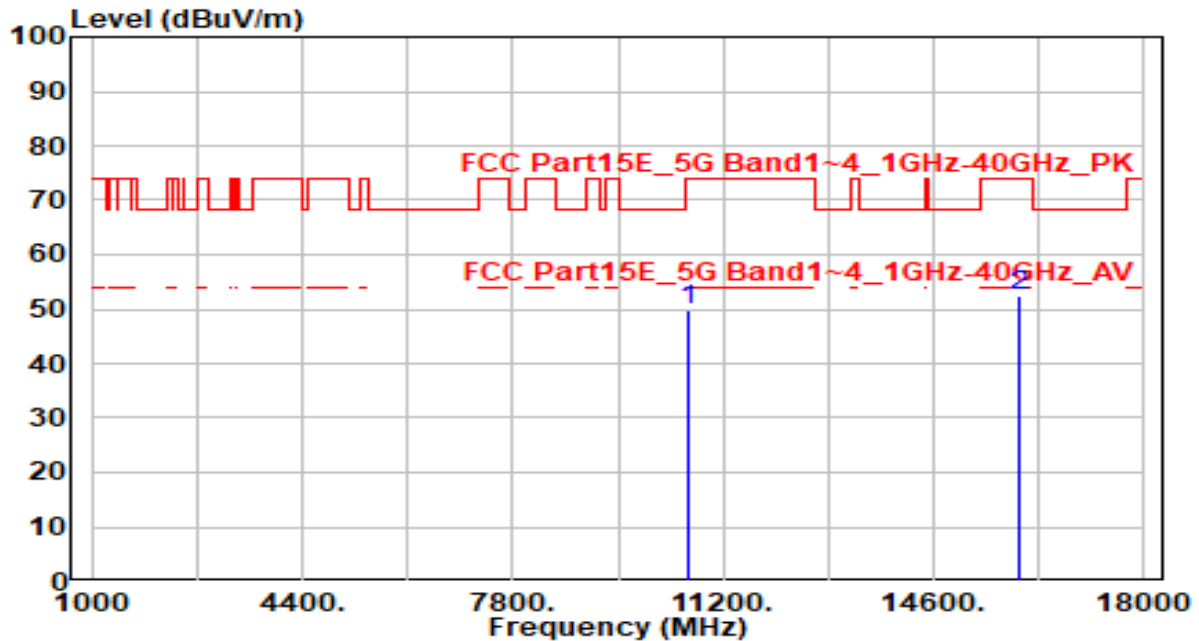


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	44.43	5.27	49.71	-24.29	74.00	100	25	Peak
2	* 15960.000	45.32	7.00	52.32	-21.68	74.00	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

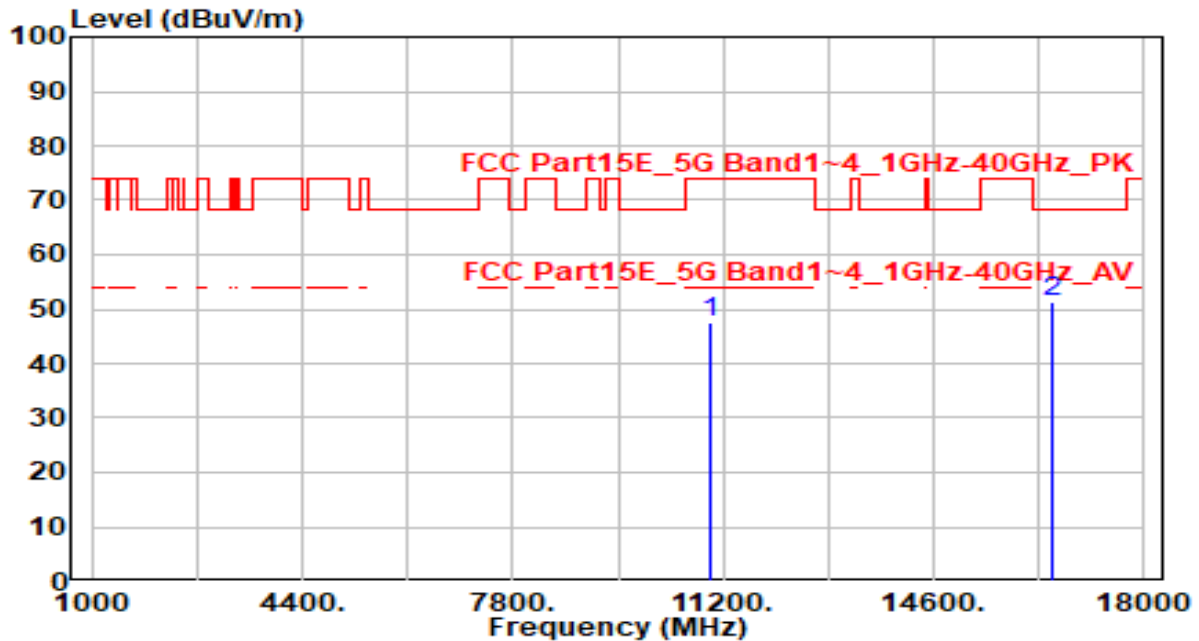


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.91	5.56	47.47	-26.53	74.00	100	0	Peak
2	* 16500.000	44.04	7.34	51.38	-16.82	68.20	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

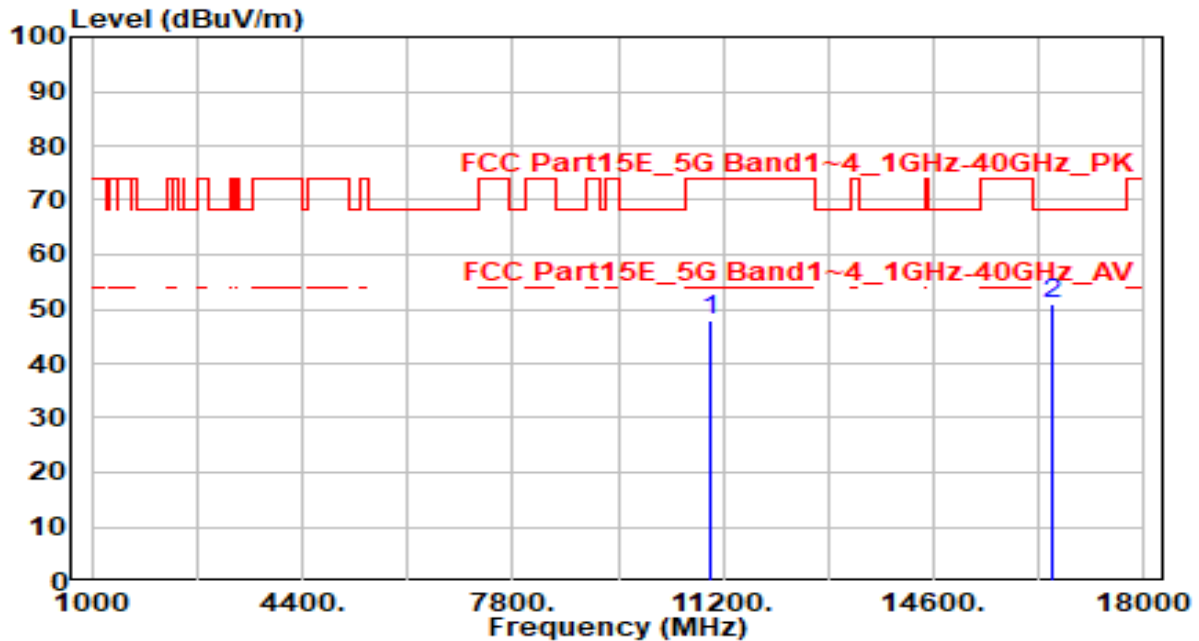


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.29	5.56	47.85	-26.15	74.00	100	335	Peak
2	* 16500.000	43.77	7.34	51.11	-17.09	68.20	100	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

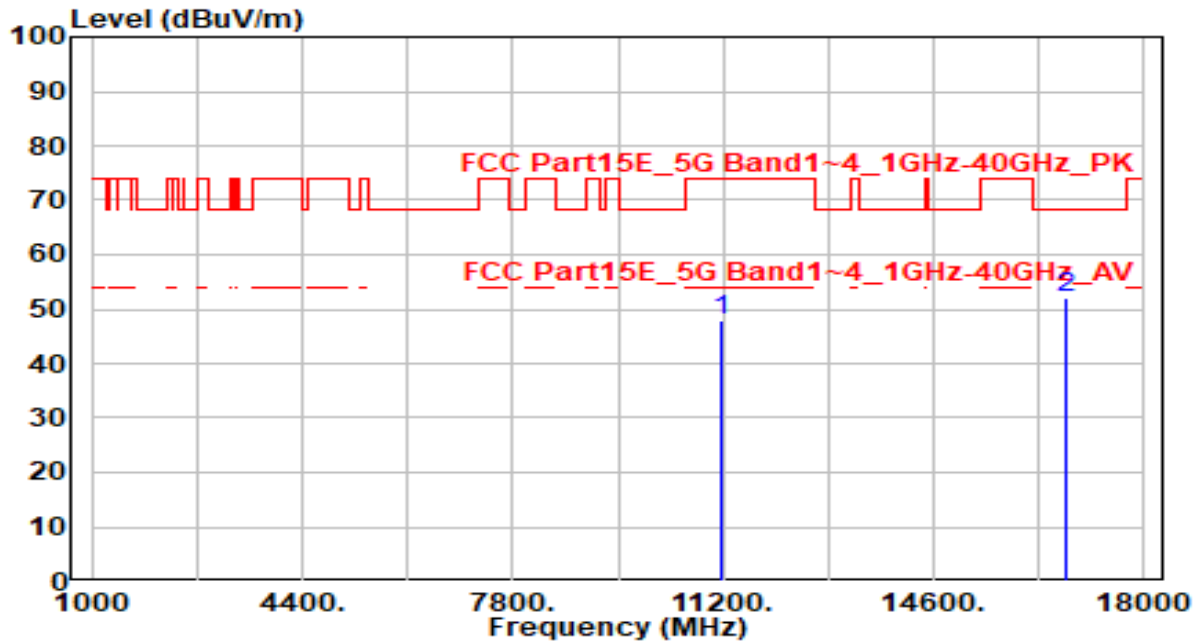


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.38	5.73	48.11	-25.89	74.00	100	180	Peak
2	* 16740.000	44.34	7.72	52.06	-16.14	68.20	100	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

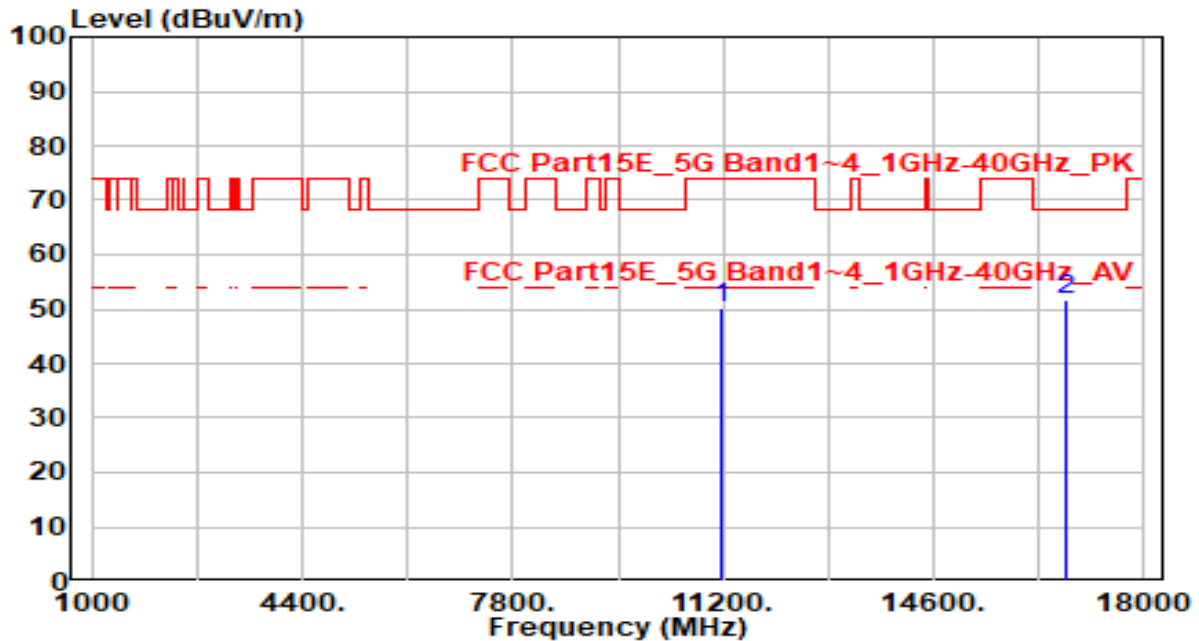


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	44.48	5.73	50.21	-23.79	74.00	100	345	Peak
2	* 16740.000	43.81	7.72	51.53	-16.67	68.20	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

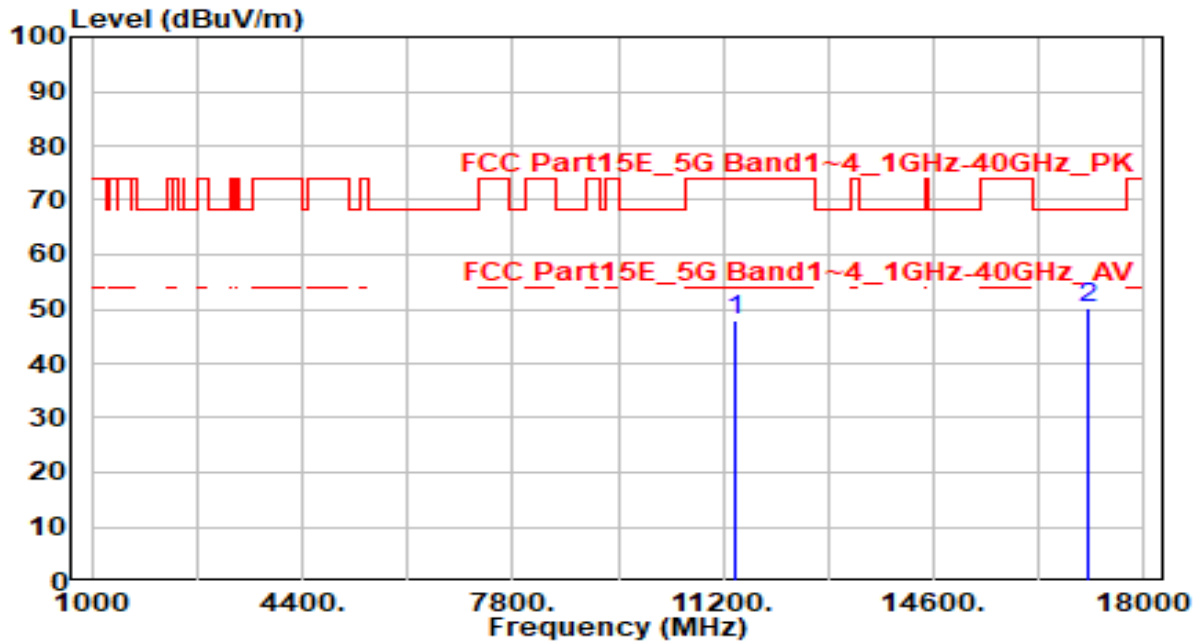


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.02	5.98	48.01	-25.99	74.00	100	0	Peak
2	* 17100.000	44.07	6.16	50.23	-17.97	68.20	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

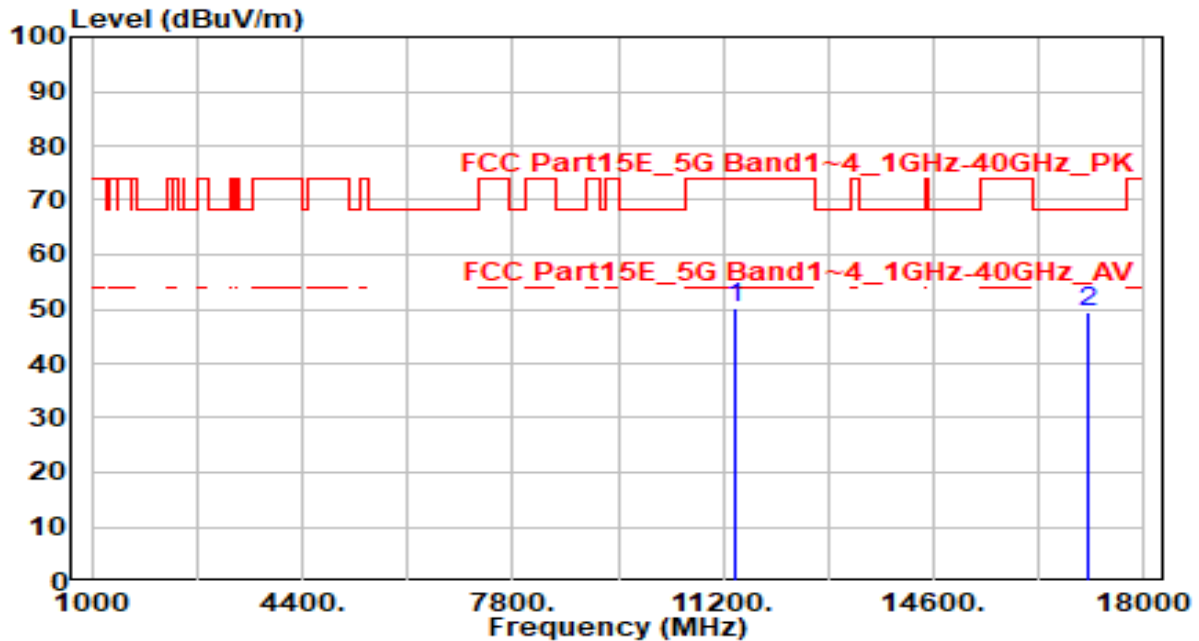


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	44.24	5.98	50.23	-23.77	74.00	100	360	Peak
2	* 17100.000	43.40	6.16	49.56	-18.64	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

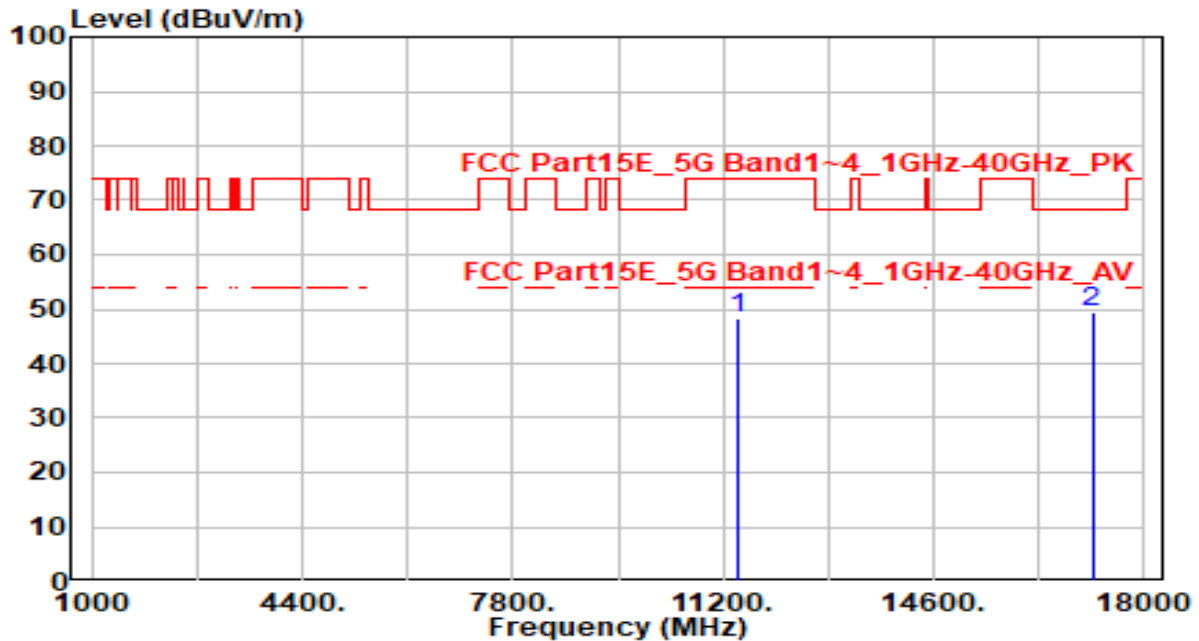


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.52	5.97	48.48	-25.52	74.00	100	355	Peak
2	* 17160.000	43.60	5.98	49.58	-18.62	68.20	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

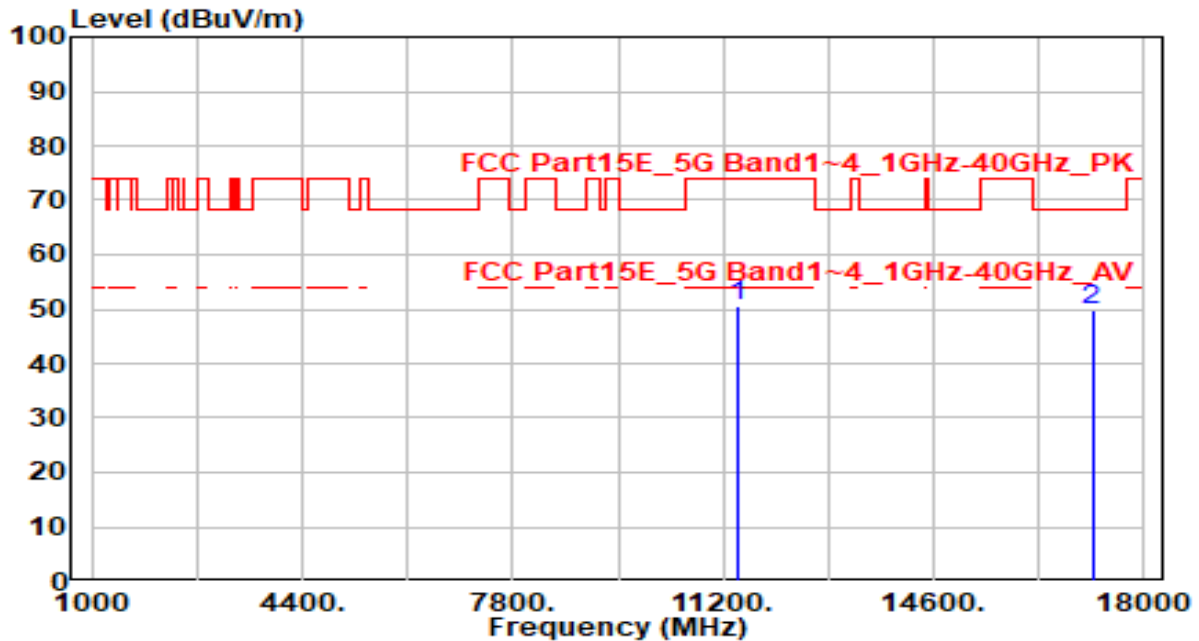


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	44.73	5.97	50.70	-23.30	74.00	100	190	Peak
2	* 17160.000	43.67	5.98	49.65	-18.55	68.20	100	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

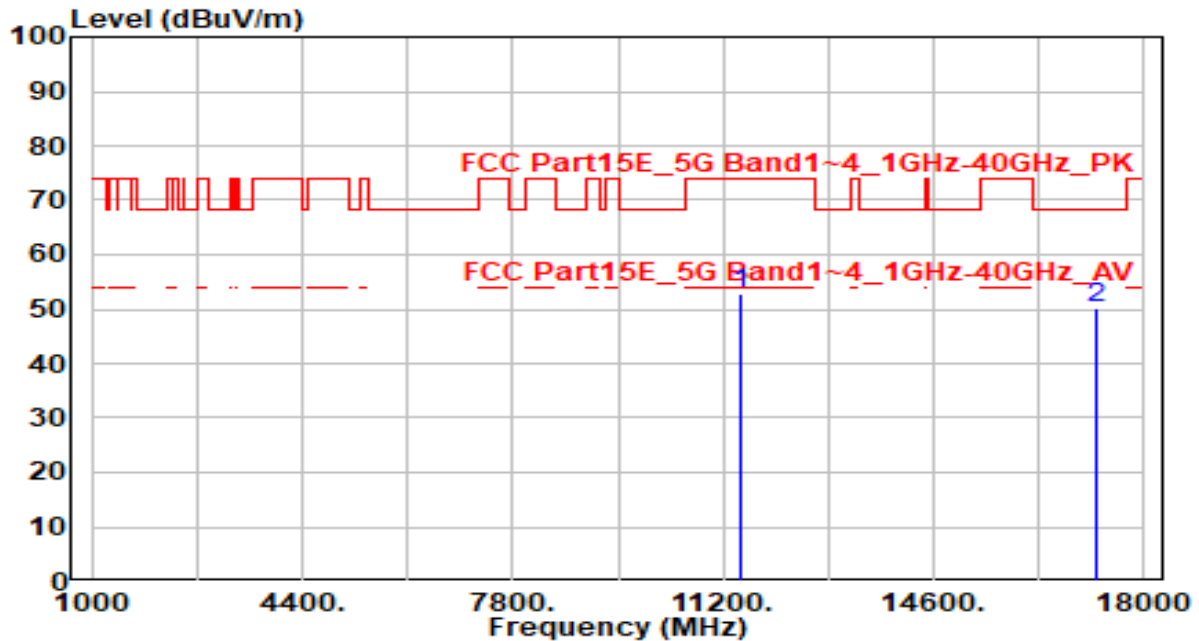


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	46.89	5.94	52.83	-21.17	74.00	100	155	Peak
2	* 17235.000	44.30	5.78	50.09	-18.11	68.20	100	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

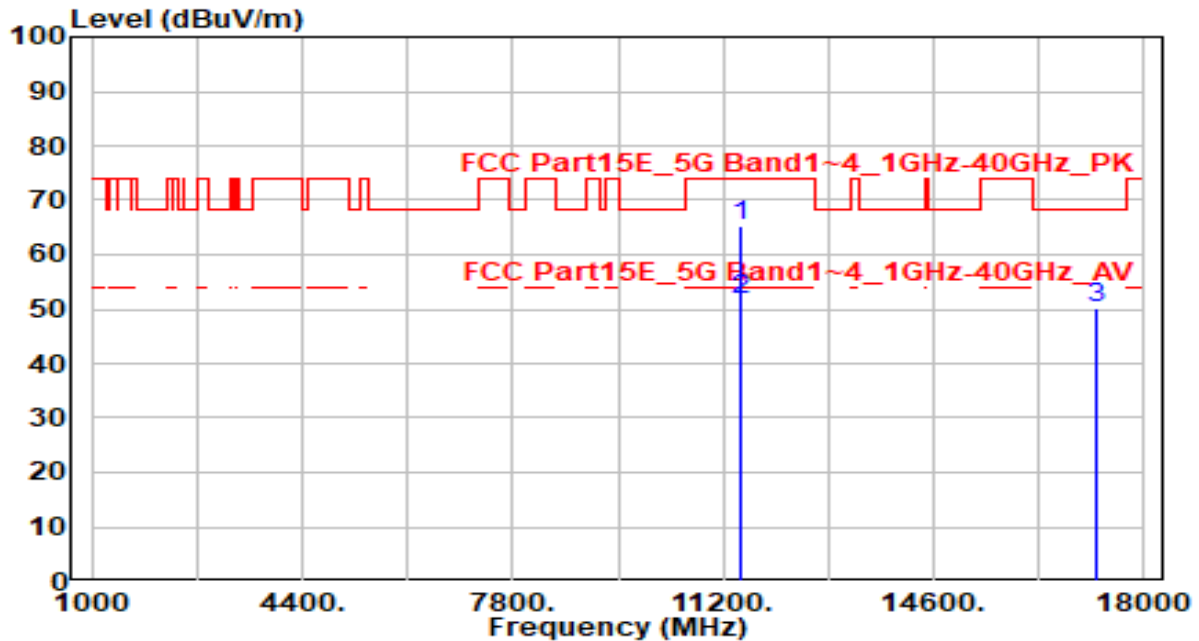


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11490.000	59.46	5.94	65.40	-8.60	74.00	200	220	Peak
2	*	11490.000	45.89	5.94	51.83	-2.17	54.00	200	220	Average
3		17235.000	44.57	5.78	50.35	-17.85	68.20	100	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

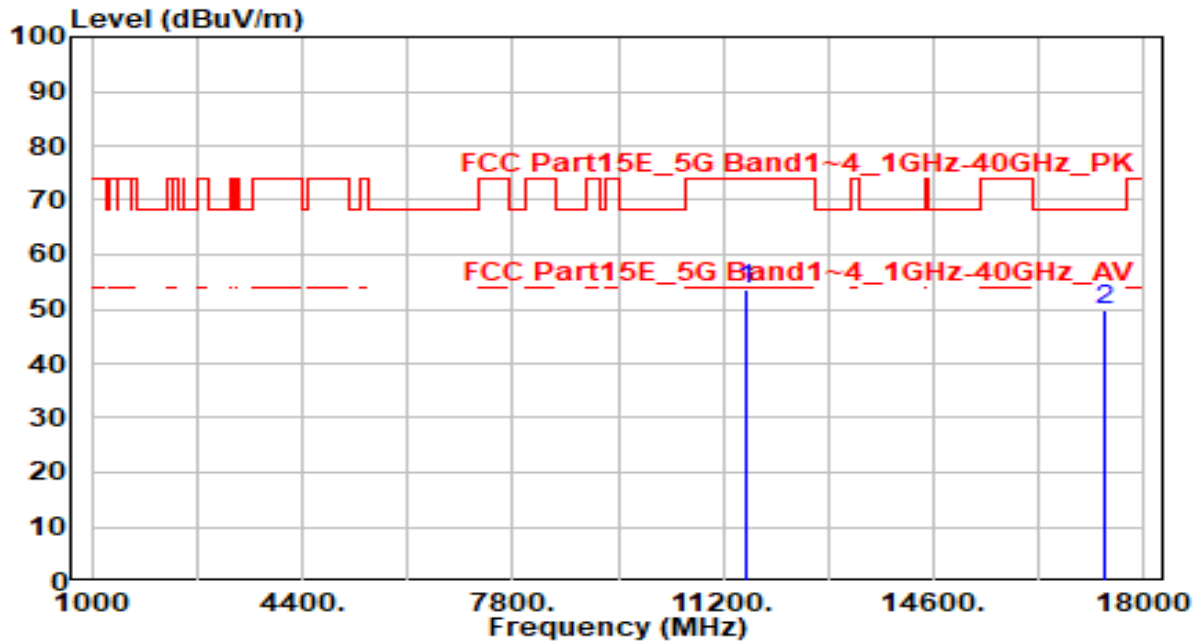


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	47.68	5.91	53.59	-20.41	74.00	100	230	Peak
2	* 17355.000	44.26	5.54	49.79	-18.41	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

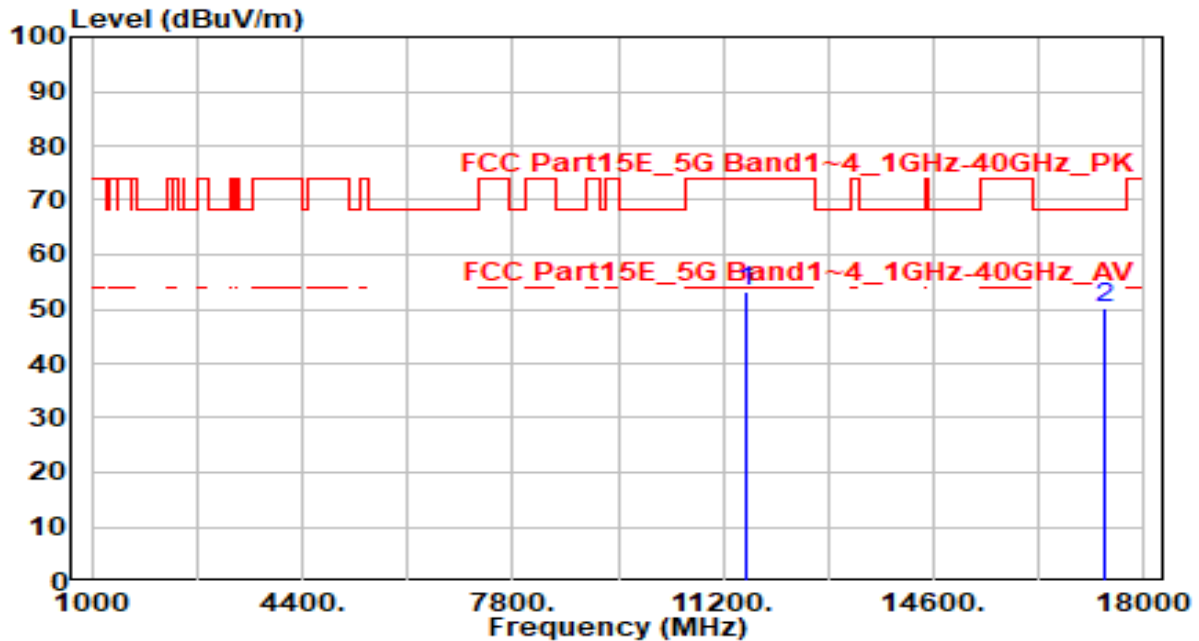


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	47.43	5.91	53.34	-20.66	74.00	100	0	Peak
2	* 17355.000	44.70	5.54	50.24	-17.96	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

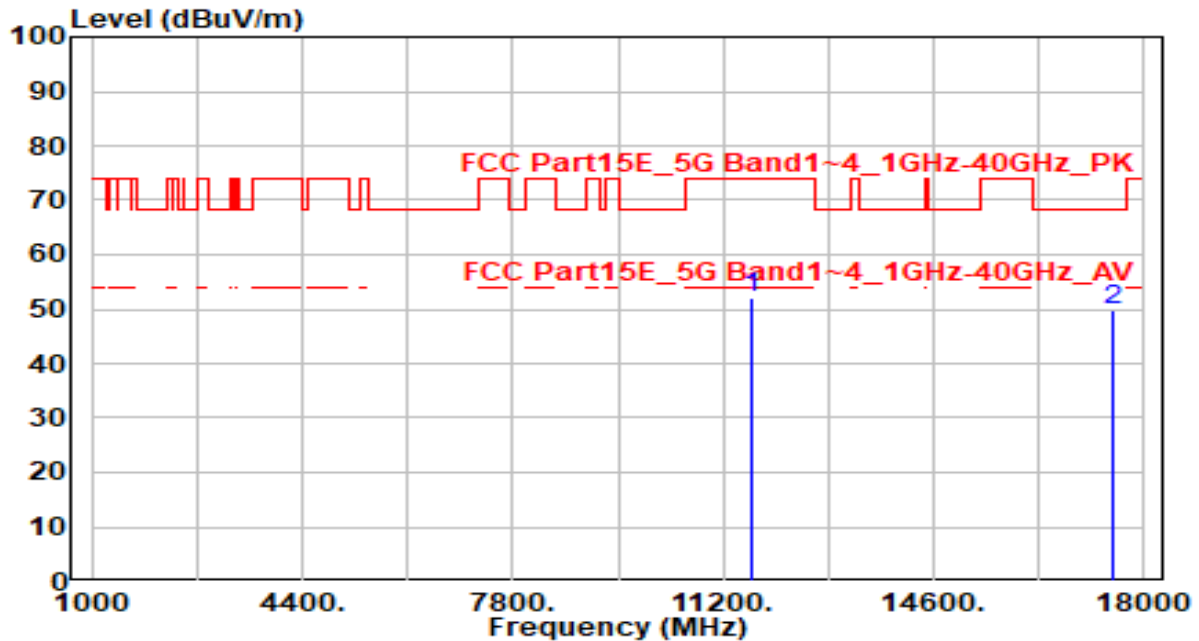


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	46.17	5.86	52.03	-21.97	74.00	100	165	Peak
2	* 17475.000	44.42	5.44	49.86	-18.34	68.20	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

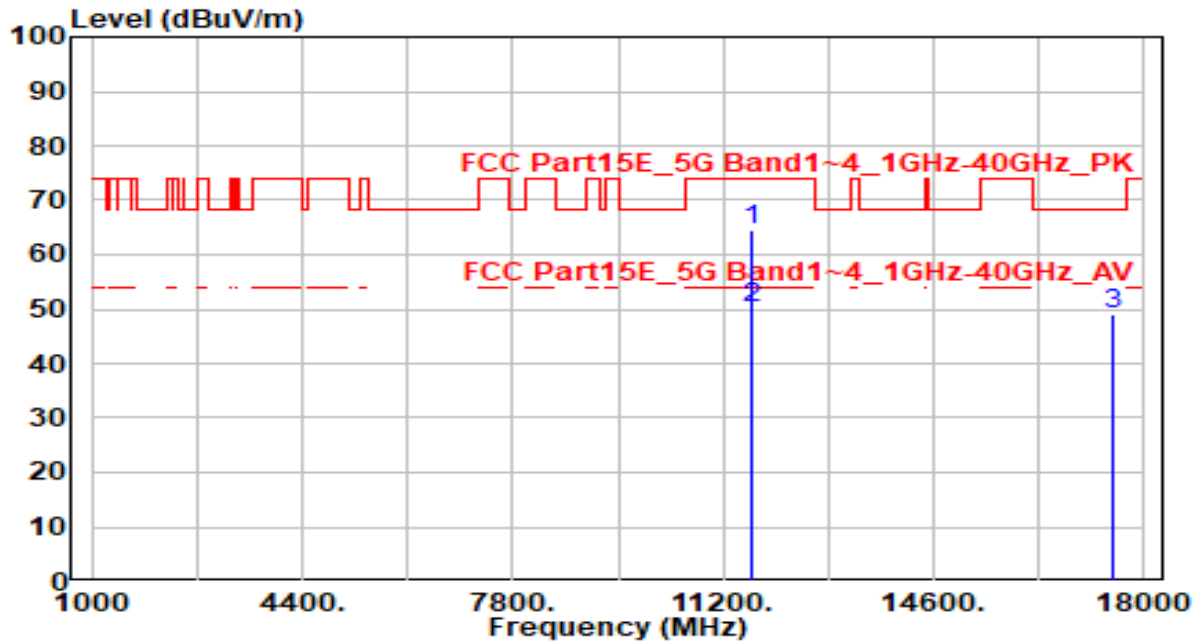


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11650.000	58.62	5.86	64.48	-9.52	74.00	200	360	Peak
2	*	11650.000	44.22	5.86	50.08	-3.92	54.00	200	360	Average
3		17475.000	43.73	5.44	49.17	-19.03	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

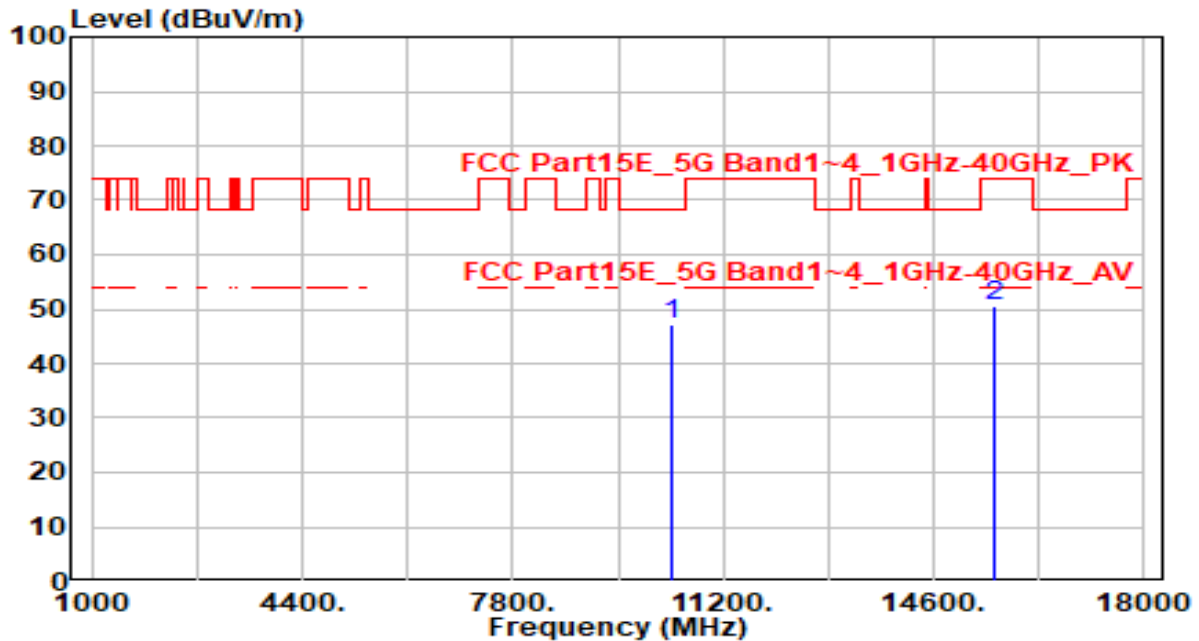


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	42.02	5.30	47.31	-20.89	68.20	100	350	Peak
2		15570.000	44.20	6.41	50.62	-23.38	74.00	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

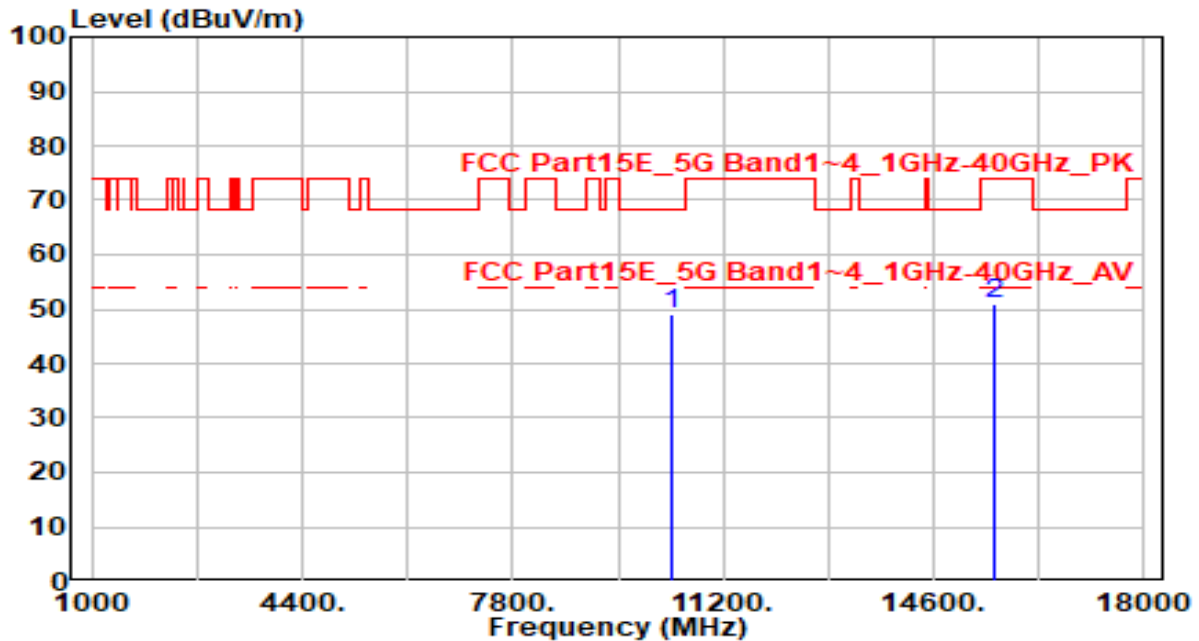


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	43.66	5.30	48.95	-19.25	68.20	100	25	Peak
2		15570.000	44.50	6.41	50.91	-23.09	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

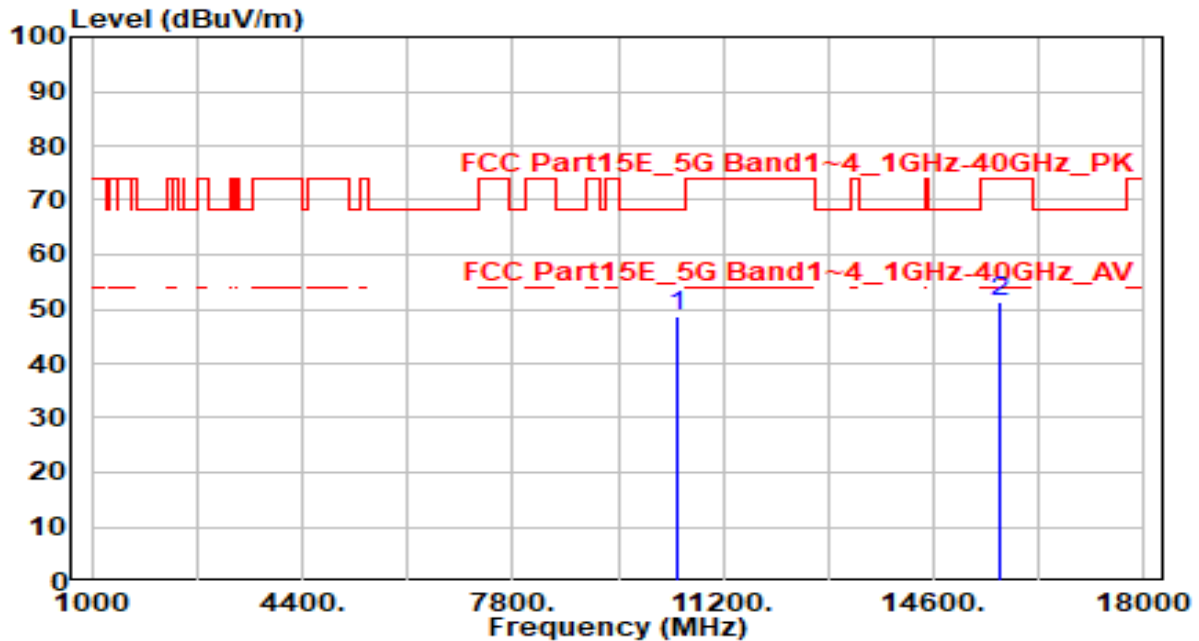


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	43.24	5.27	48.51	-19.69	68.20	100	65	Peak
2		15690.000	44.85	6.63	51.47	-22.53	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

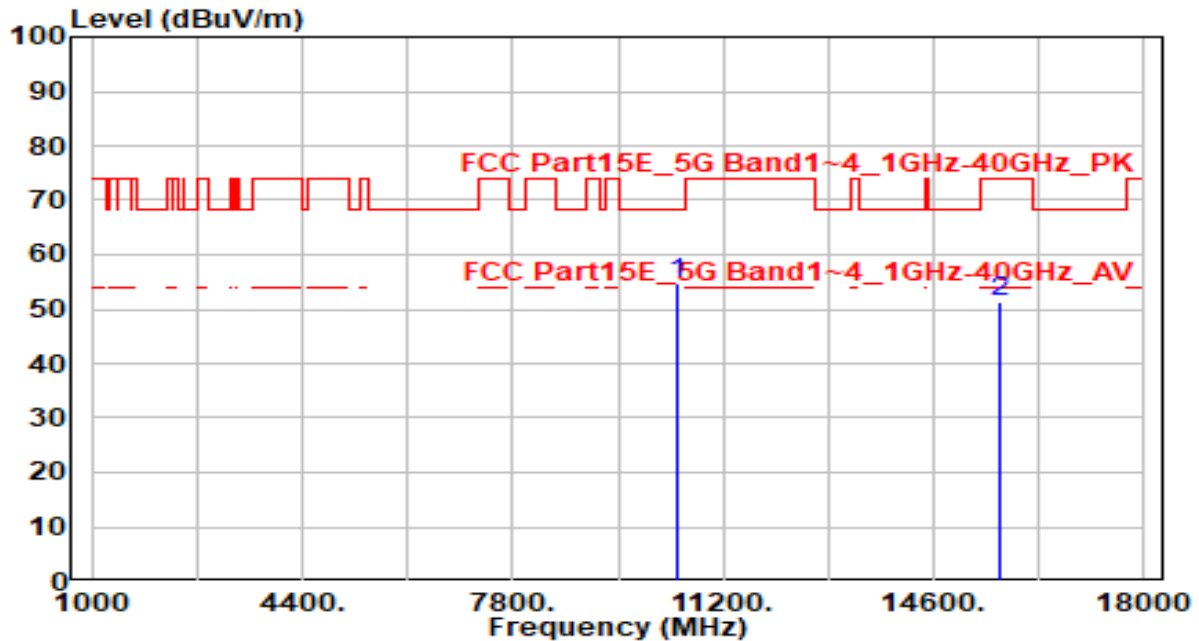


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	49.26	5.27	54.53	-13.67	68.20	100	185	Peak
2		15690.000	44.59	6.63	51.21	-22.79	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

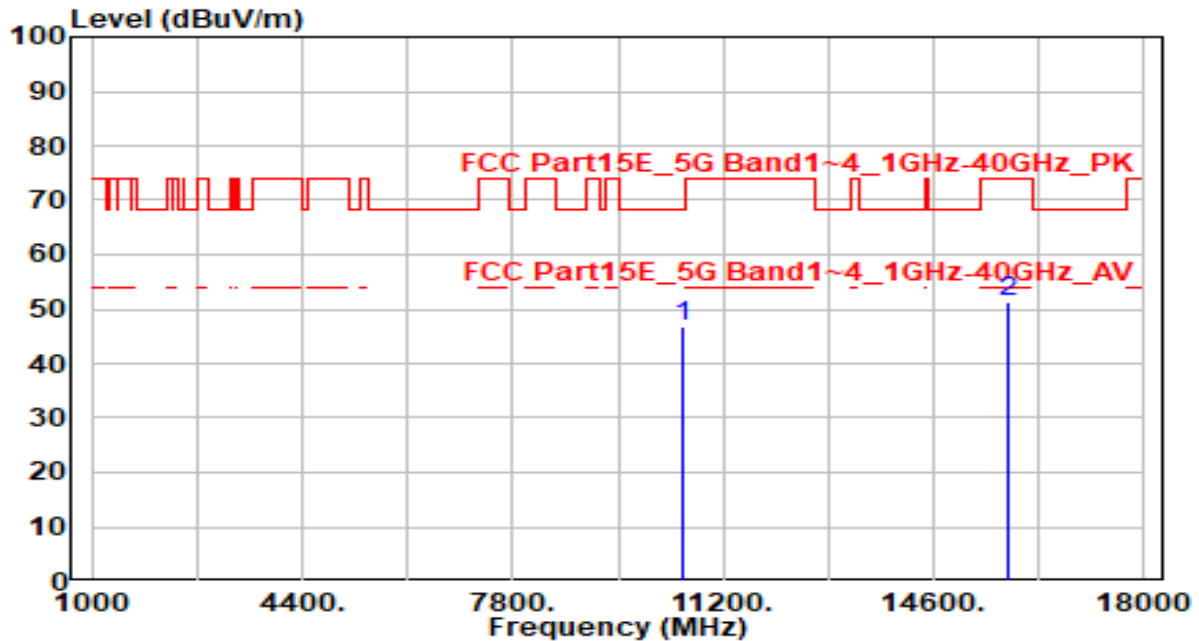


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.36	5.25	46.61	-21.59	68.20	100	0	Peak
2		15810.000	44.39	6.88	51.28	-22.72	74.00	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

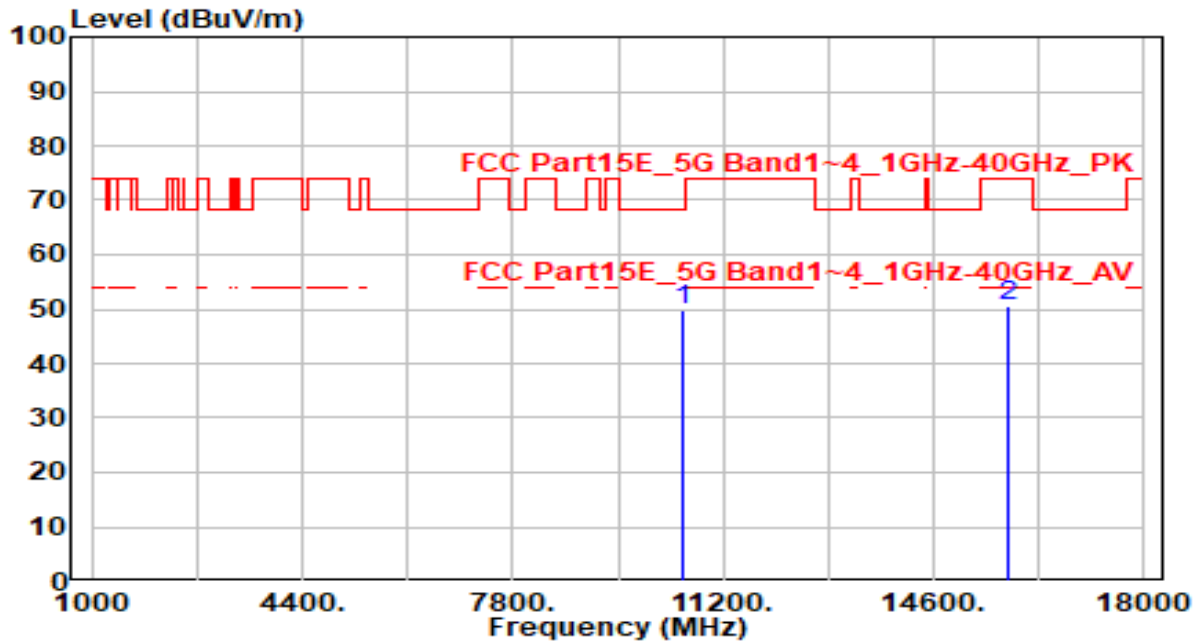


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	44.74	5.25	50.00	-18.20	68.20	100	30	Peak
2		15810.000	43.78	6.88	50.66	-23.34	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

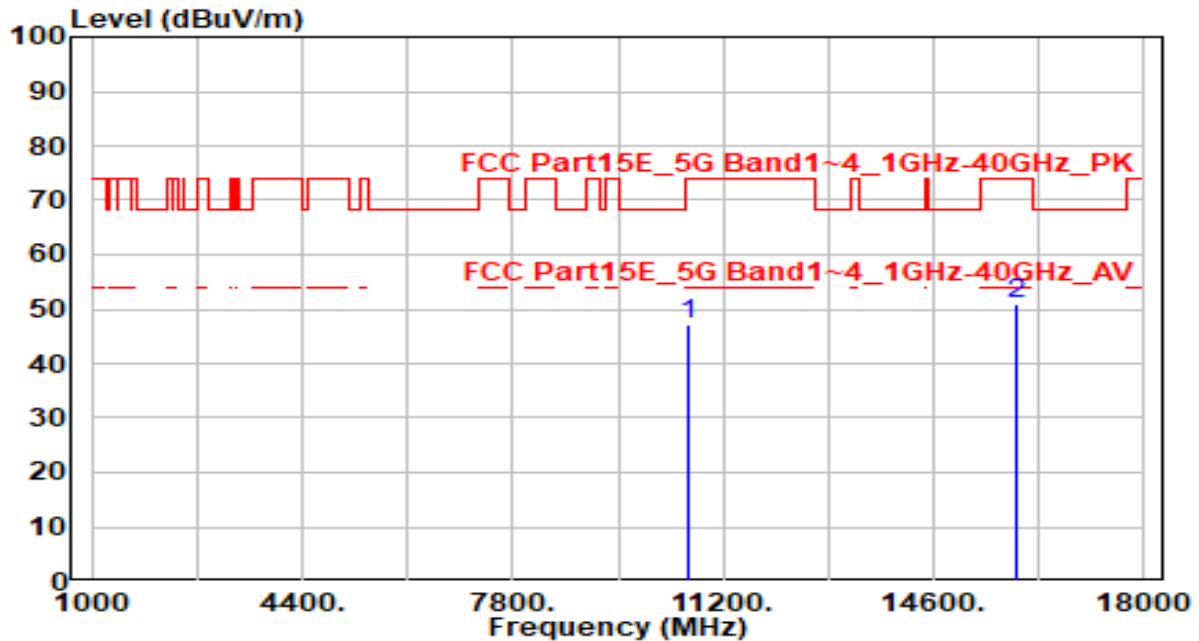


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.73	5.26	46.99	-27.01	74.00	100	155	Peak
2	* 15930.000	44.09	6.98	51.07	-22.93	74.00	100	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

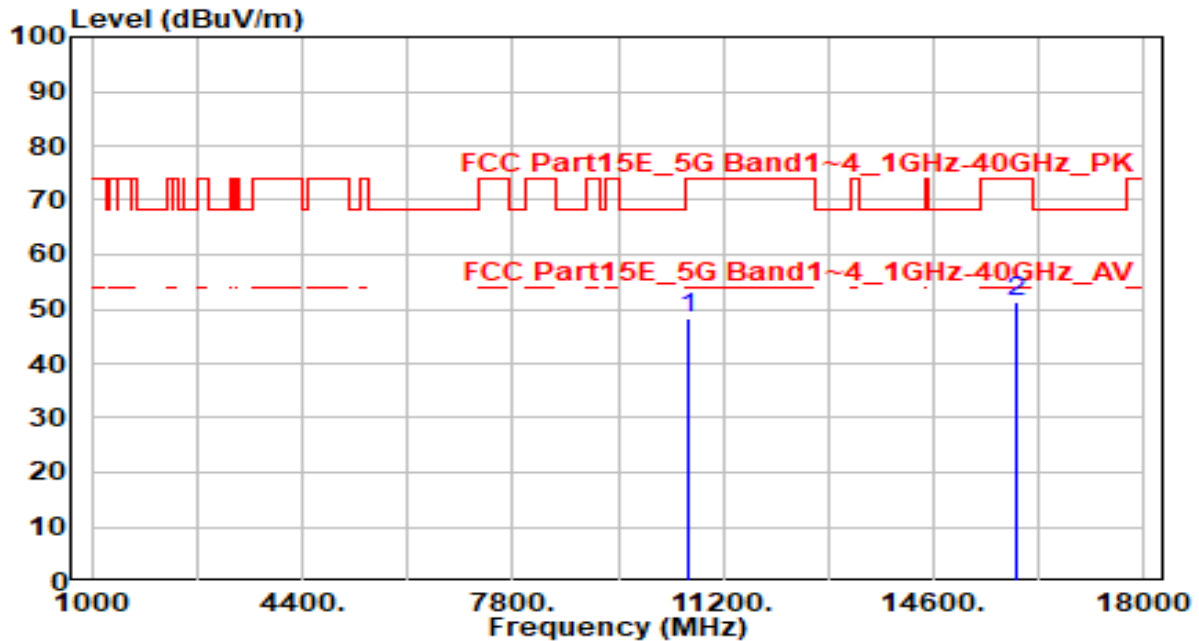


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	43.13	5.26	48.39	-25.61	74.00	100	30	Peak
2	* 15930.000	44.25	6.98	51.23	-22.77	74.00	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

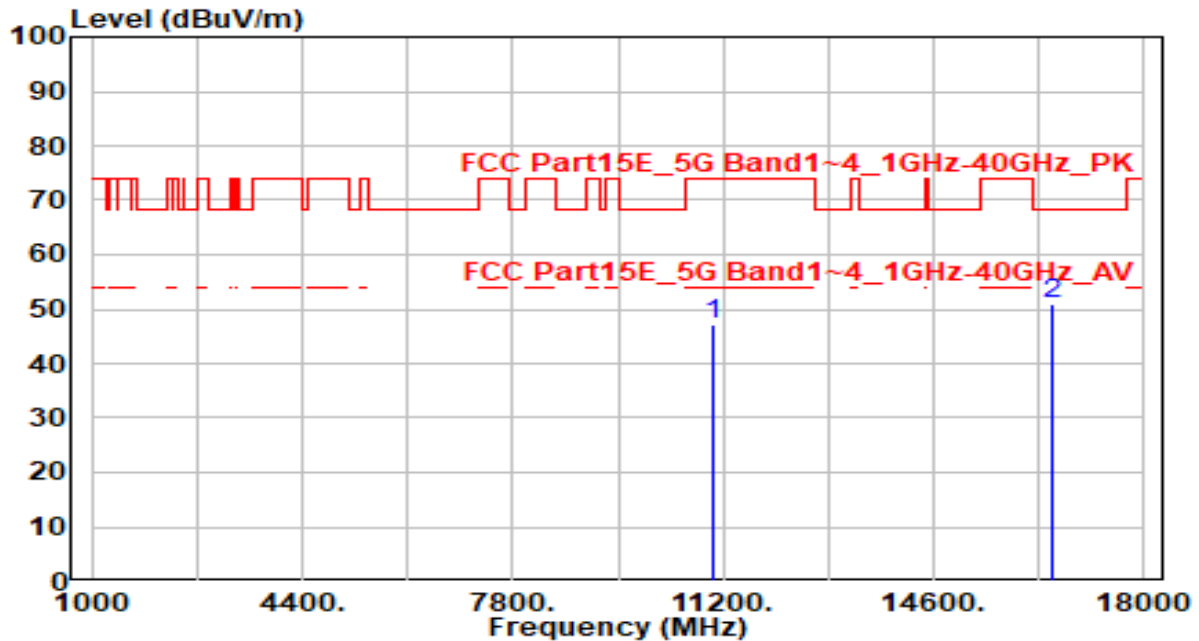


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.70	5.58	47.28	-26.72	74.00	100	330	Peak
2	* 16530.000	43.73	7.39	51.12	-17.08	68.20	100	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

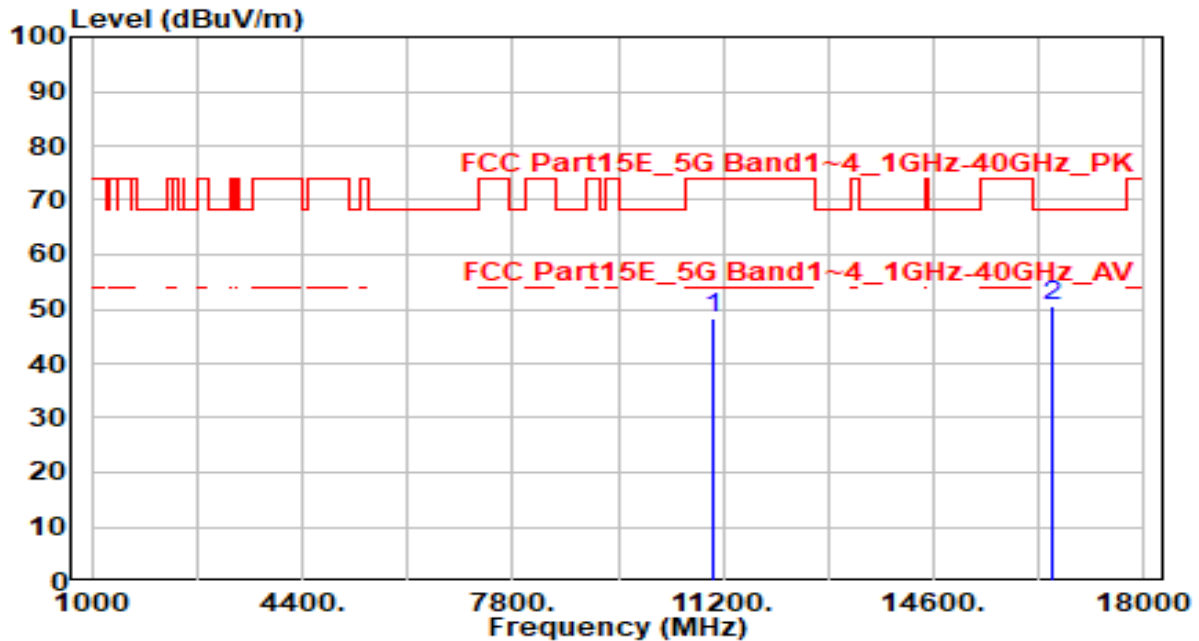


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	42.89	5.58	48.47	-25.53	74.00	100	340	Peak
2	* 16530.000	43.11	7.39	50.50	-17.70	68.20	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

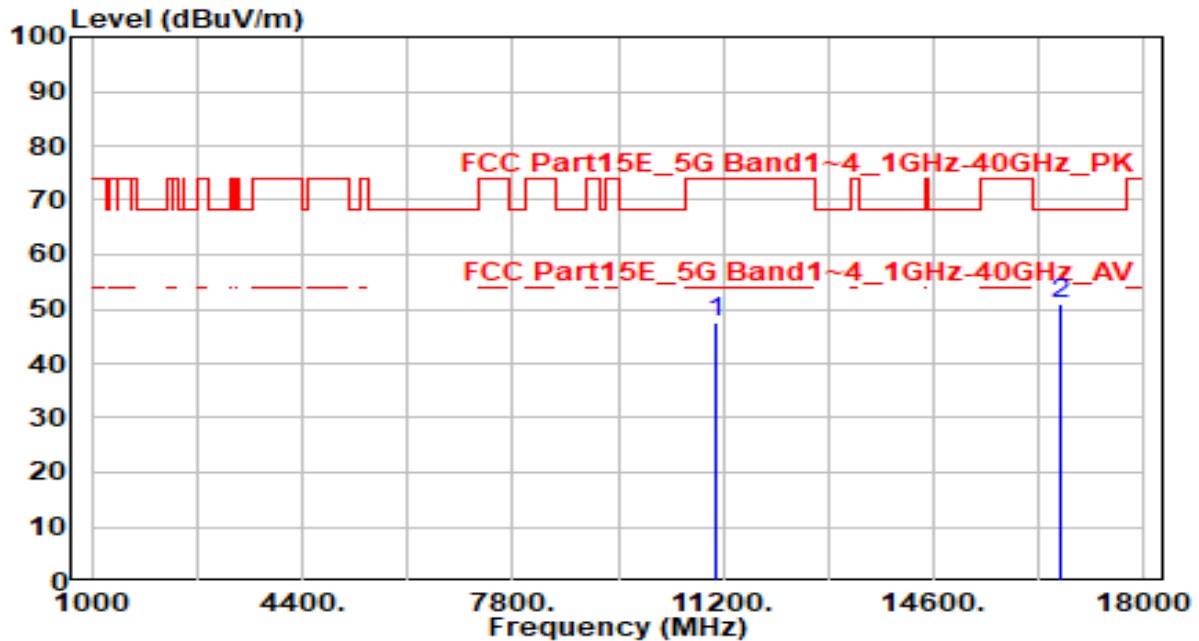


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.94	5.67	47.61	-26.39	74.00	100	75	Peak
2	* 16650.000	43.44	7.58	51.02	-17.18	68.20	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

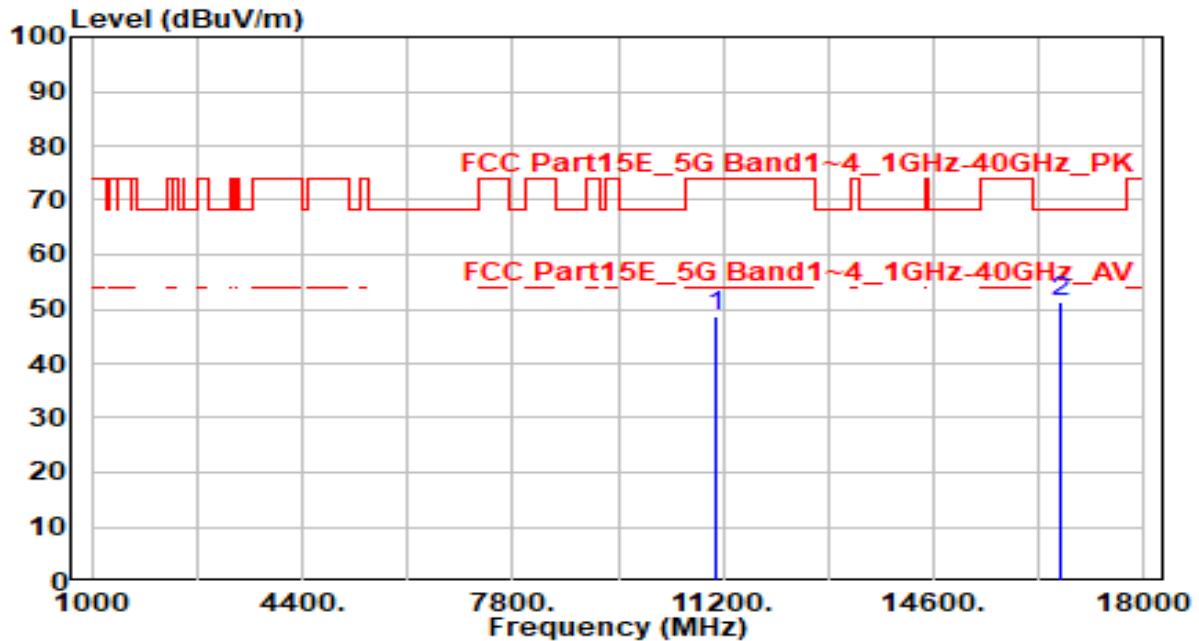


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	42.94	5.67	48.60	-25.40	74.00	100	35	Peak
2	* 16650.000	43.82	7.58	51.40	-16.80	68.20	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

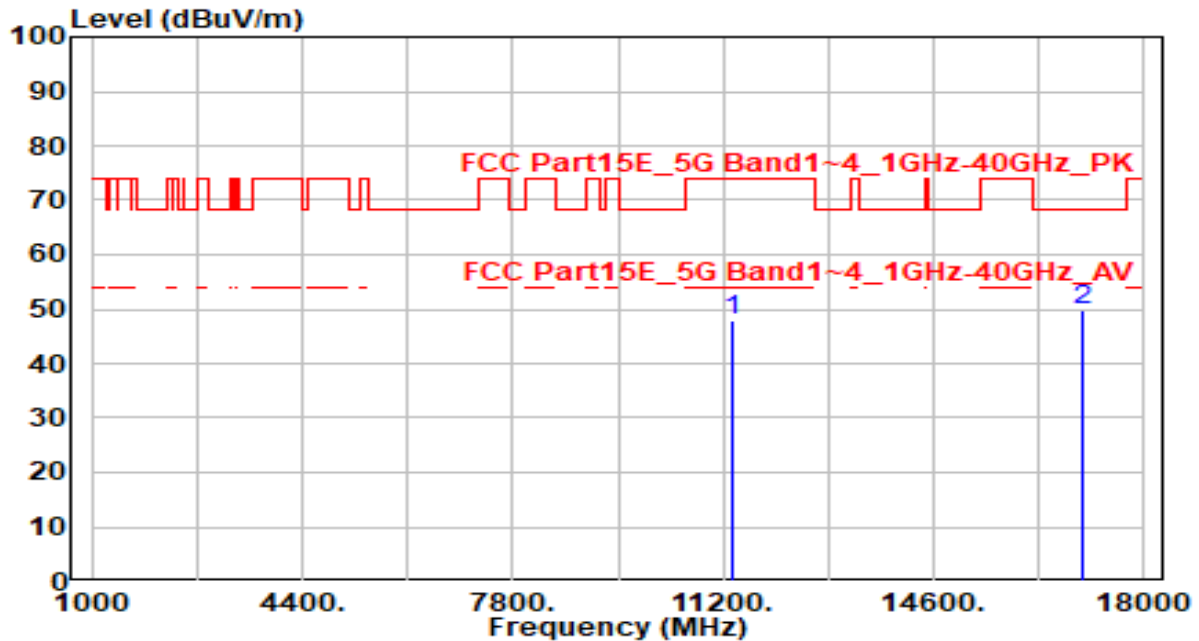


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.88	5.92	47.80	-26.20	74.00	100	260	Peak
2	* 17010.000	43.20	6.44	49.64	-18.56	68.20	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

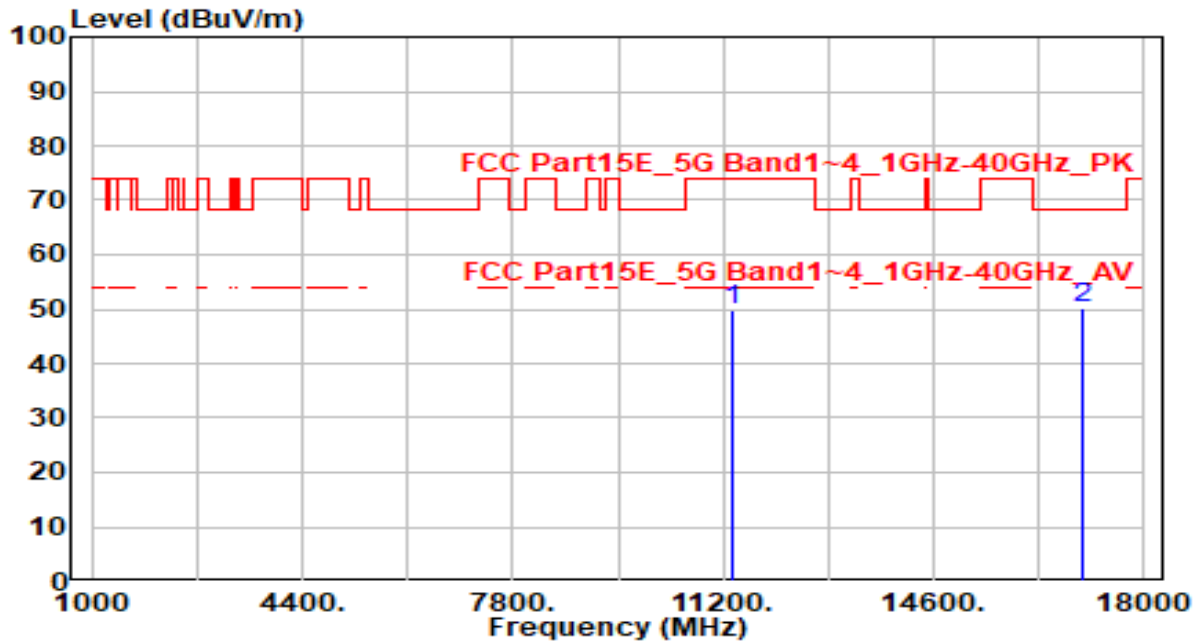


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	43.84	5.92	49.76	-24.24	74.00	100	15	Peak
2	* 17010.000	43.82	6.44	50.26	-17.94	68.20	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

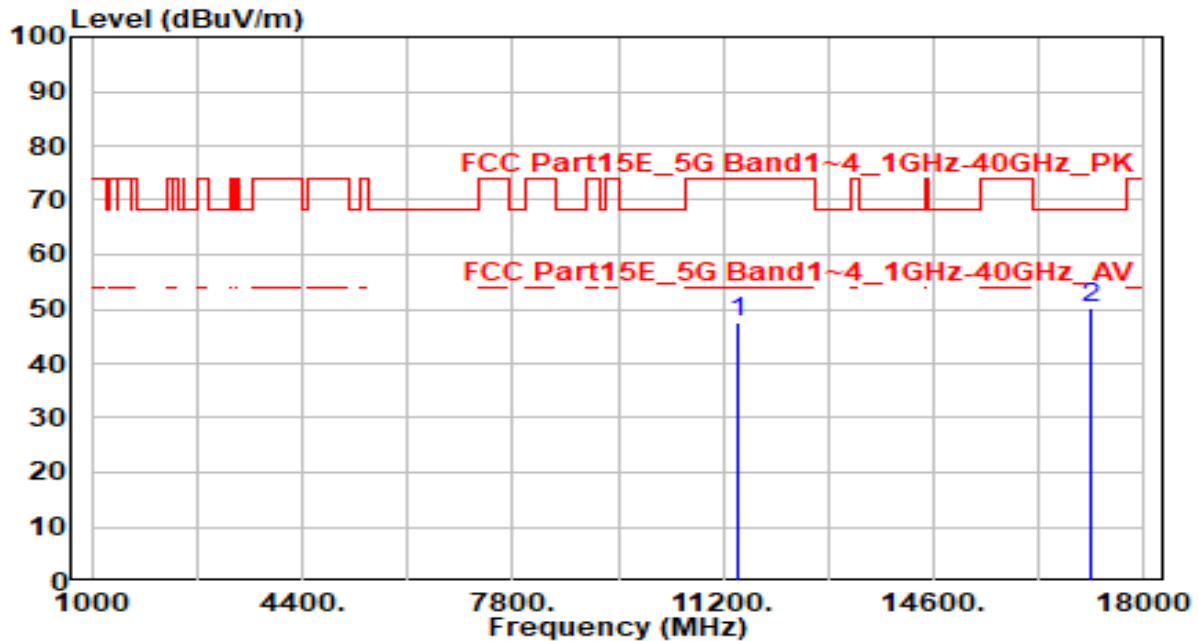


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.74	5.98	47.72	-26.28	74.00	100	135	Peak
2	* 17130.000	44.07	6.07	50.14	-18.06	68.20	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

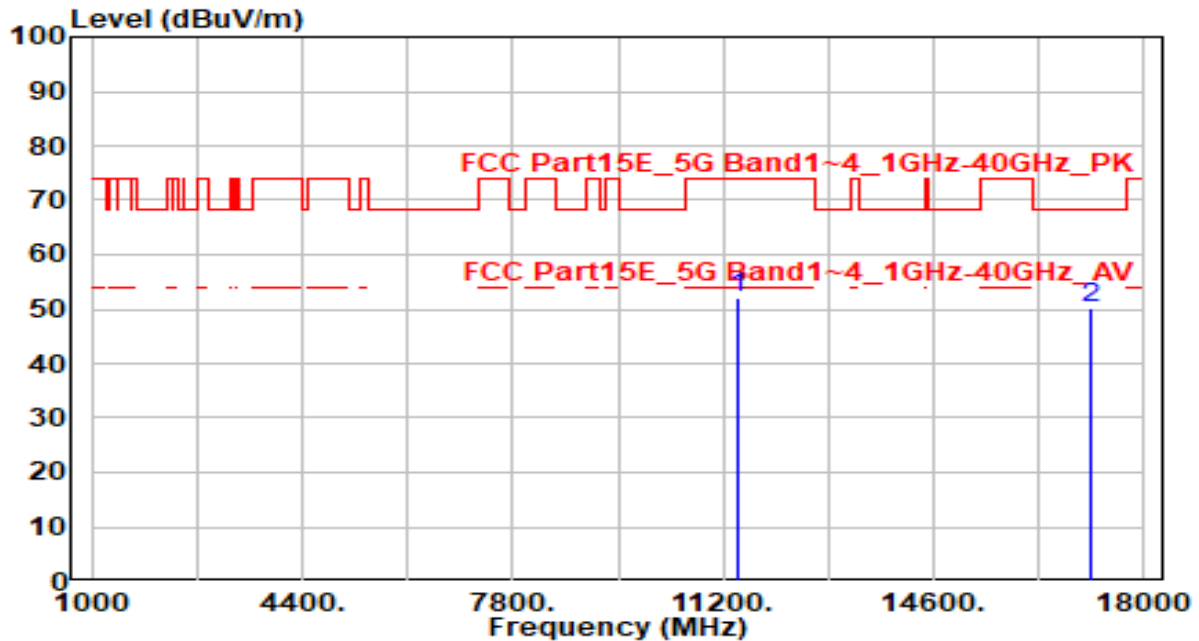


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	46.28	5.98	52.25	-21.75	74.00	100	360	Peak
2	* 17130.000	44.28	6.07	50.35	-17.85	68.20	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

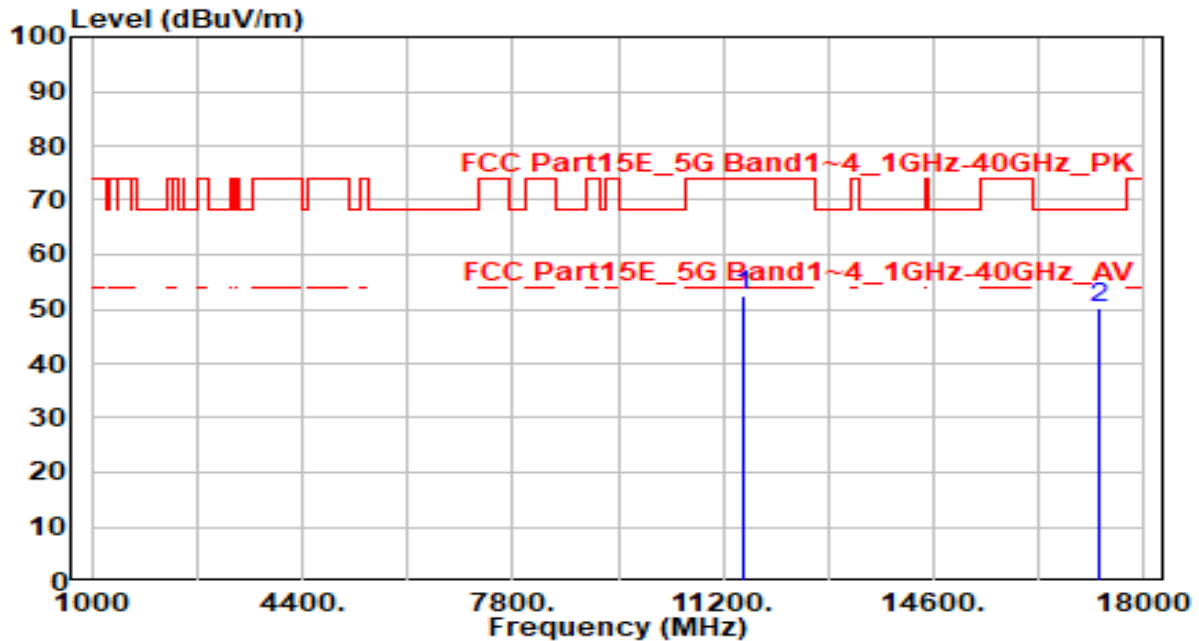


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	46.42	5.94	52.36	-21.64	74.00	100	50	Peak
2	* 17265.000	44.35	5.72	50.07	-18.13	68.20	100	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

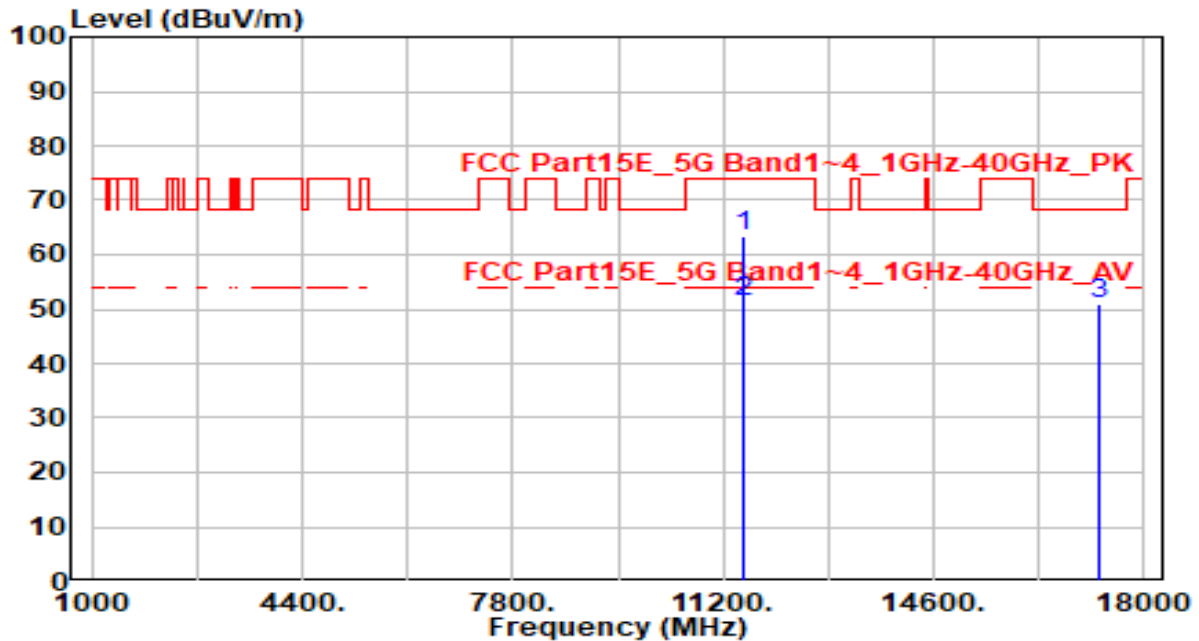


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11510.000	57.45	5.94	63.39	-10.61	74.00	210	360	Peak
2	*	11510.000	45.34	5.94	51.28	-2.72	54.00	210	360	Average
3		17265.000	45.16	5.72	50.88	-17.32	68.20	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

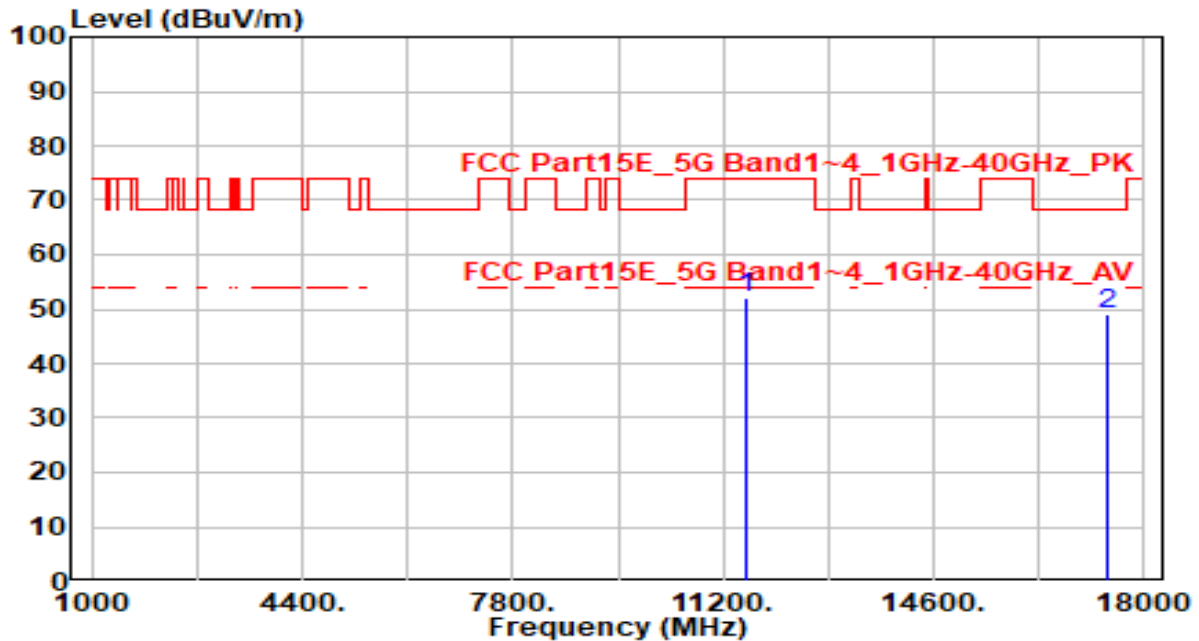


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	46.02	5.90	51.92	-22.08	74.00	100	165	Peak
2	* 17385.000	43.45	5.47	48.92	-19.28	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

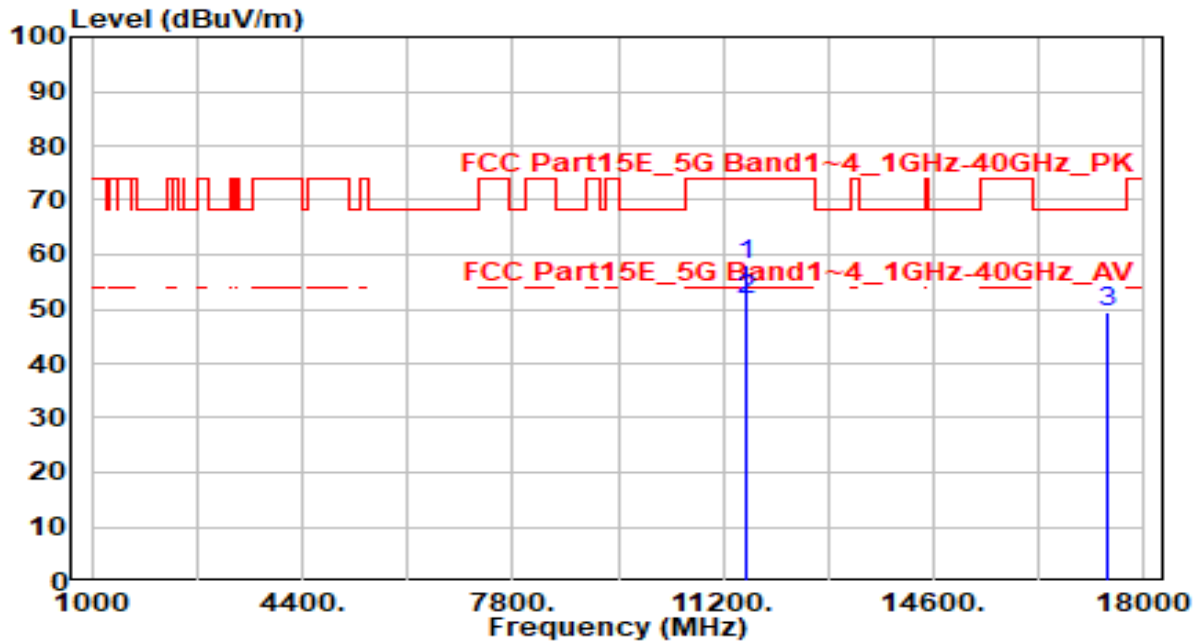


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11590.000	52.17	5.90	58.07	-15.93	74.00	210	360	Peak
2	*	11590.000	45.88	5.90	51.78	-2.22	54.00	210	360	Average
3		17385.000	44.13	5.47	49.60	-18.60	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

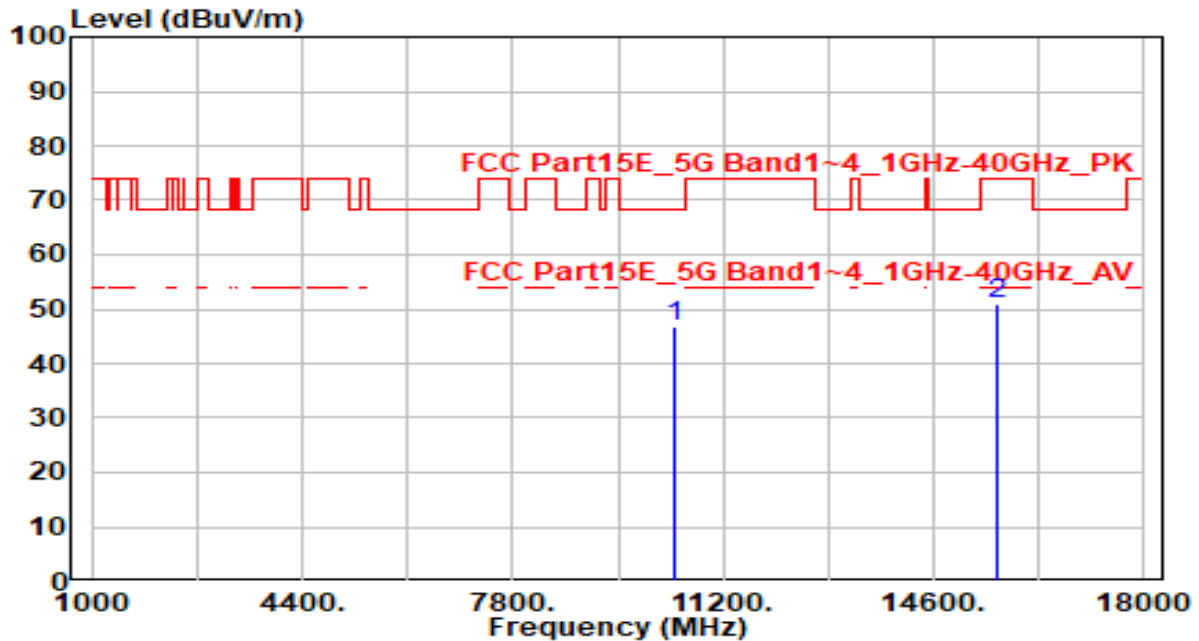


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.56	5.29	46.85	-21.35	68.20	100	330	Peak
2		15630.000	44.57	6.49	51.06	-22.94	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

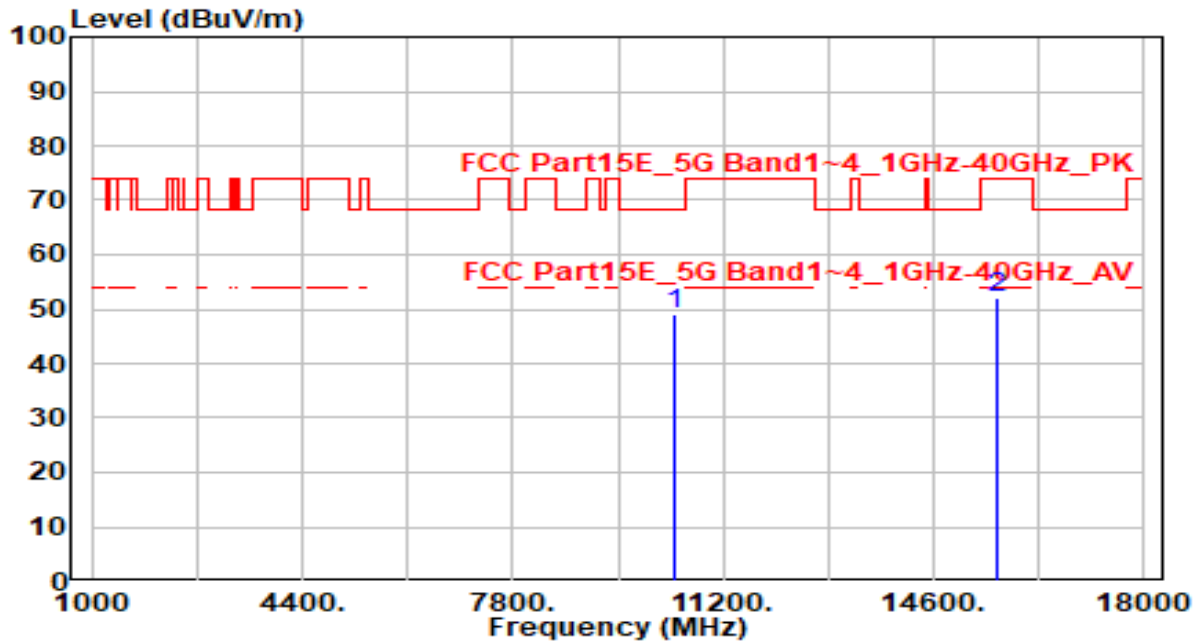


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	43.64	5.29	48.92	-19.28	68.20	100	315	Peak
2		15630.000	45.67	6.49	52.16	-21.84	74.00	100	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

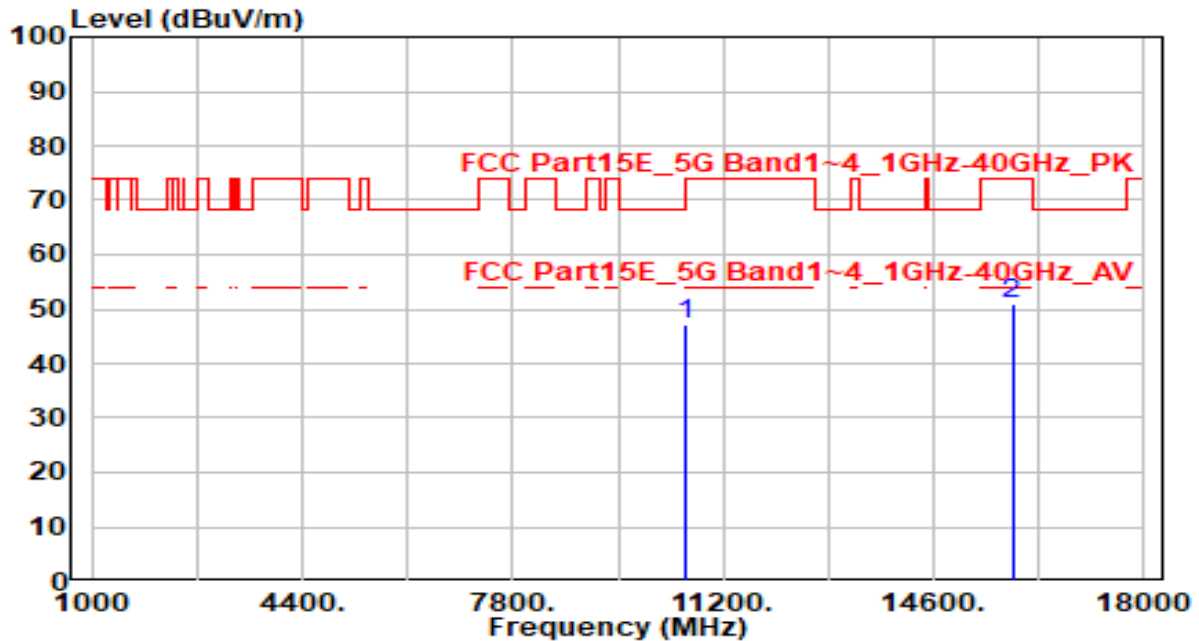


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.77	5.25	47.02	-21.18	68.20	100	350	Peak
2		15870.000	44.11	6.93	51.04	-22.96	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

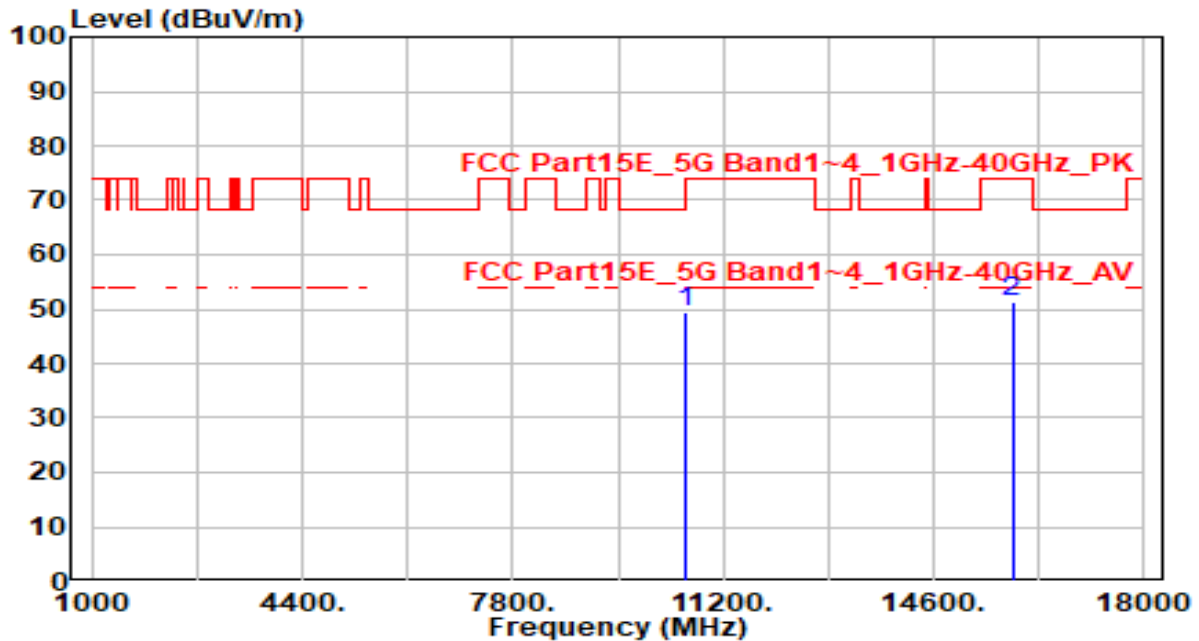


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	44.02	5.25	49.28	-18.92	68.20	100	60	Peak
2		15870.000	44.24	6.93	51.17	-22.83	74.00	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

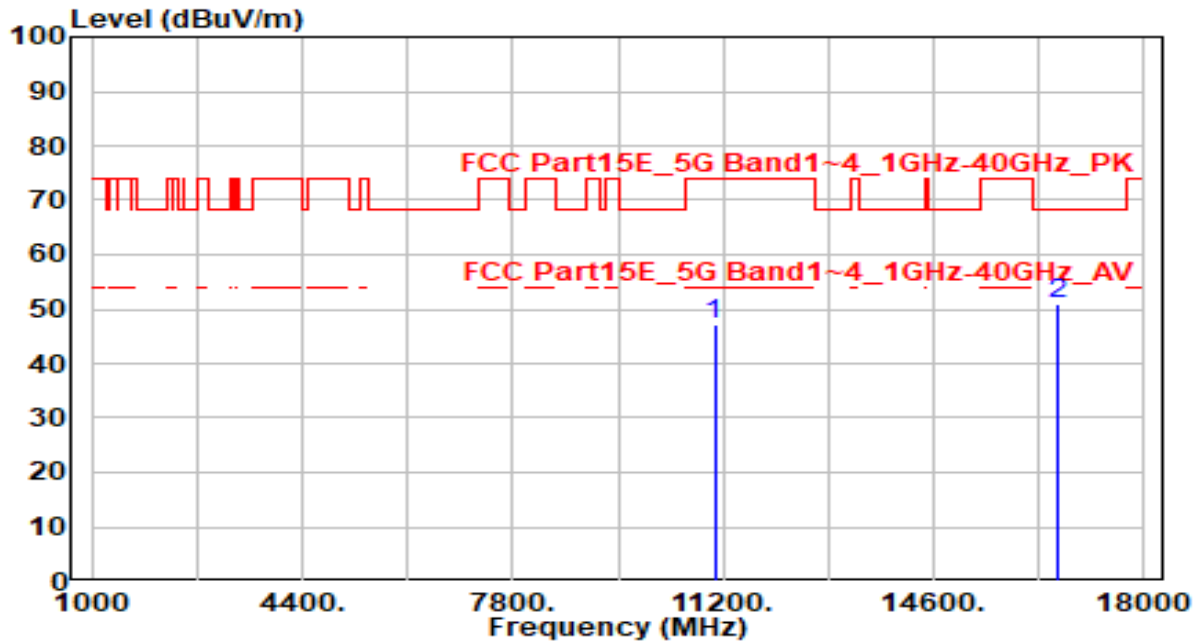


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.69	5.62	47.32	-26.68	74.00	100	265	Peak
2	* 16590.000	43.45	7.48	50.93	-17.27	68.20	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

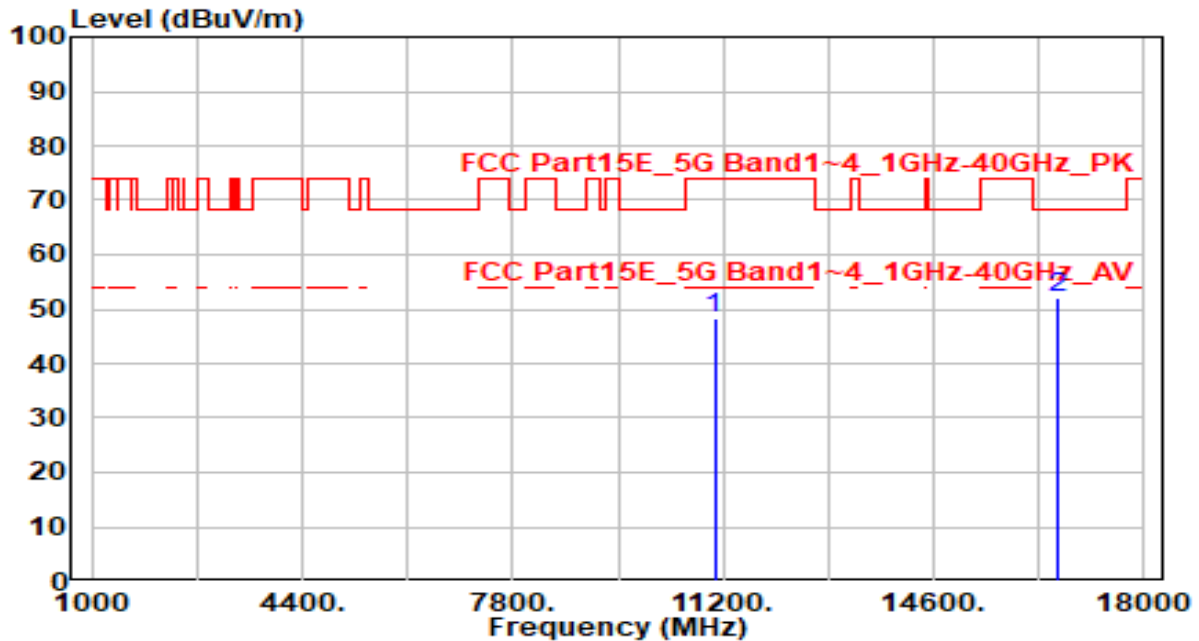


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	42.51	5.62	48.13	-25.87	74.00	100	290	Peak
2	* 16590.000	44.45	7.48	51.93	-16.27	68.20	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

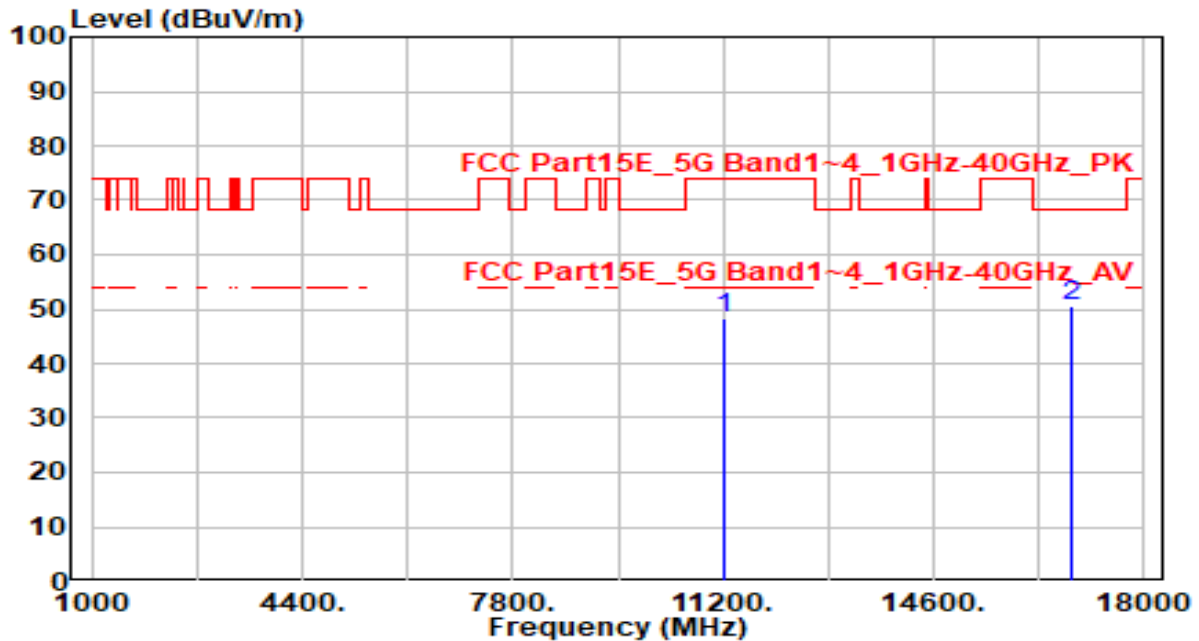


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	42.66	5.79	48.45	-25.55	74.00	100	20	Peak
2	* 16830.000	43.43	7.17	50.61	-17.60	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

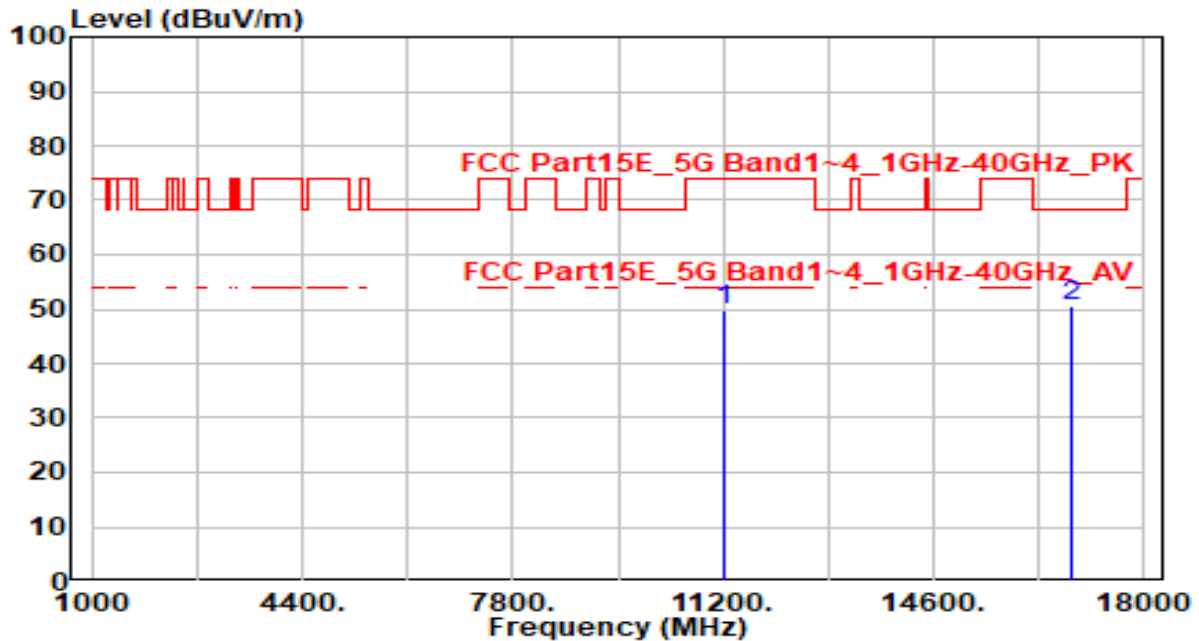


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	43.86	5.79	49.65	-24.35	74.00	100	10	Peak
2	* 16830.000	43.57	7.17	50.74	-17.46	68.20	100	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

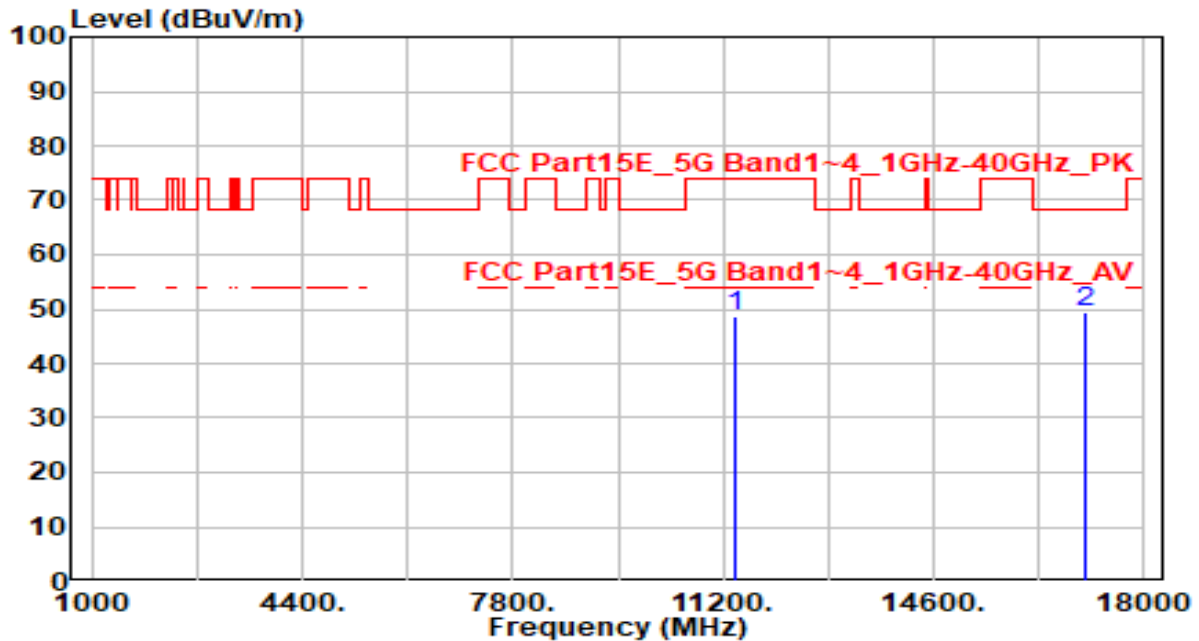


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.67	5.96	48.63	-25.37	74.00	100	255	Peak
2	* 17070.000	43.12	6.26	49.38	-18.82	68.20	100	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

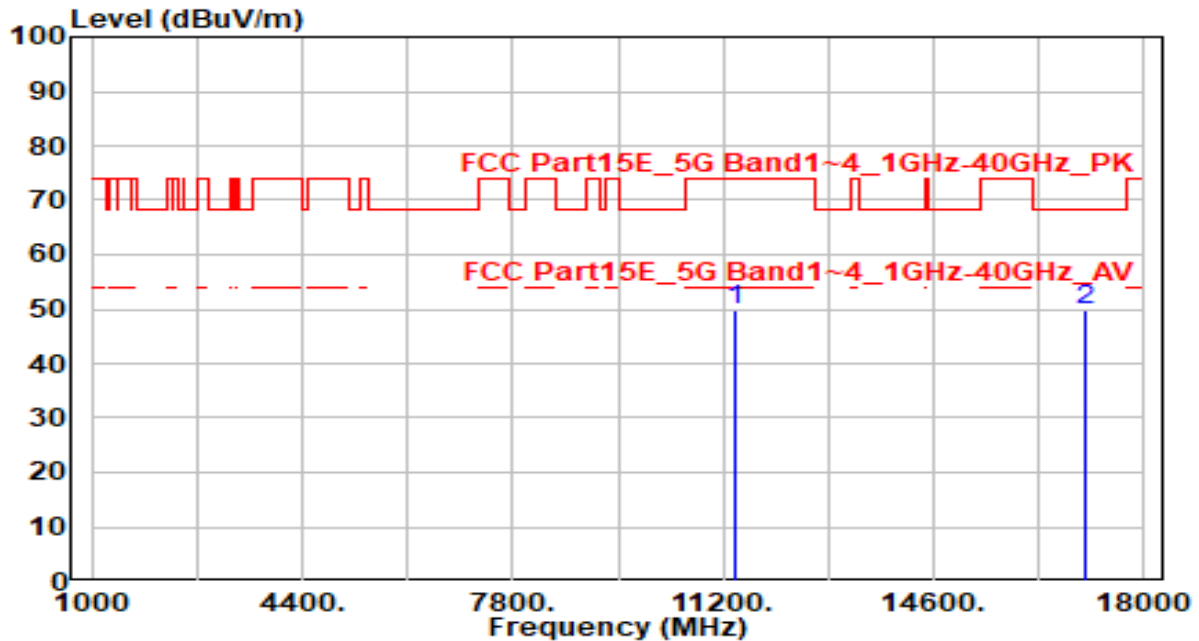


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	43.75	5.96	49.71	-24.29	74.00	100	15	Peak
2	* 17070.000	43.48	6.26	49.74	-18.46	68.20	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

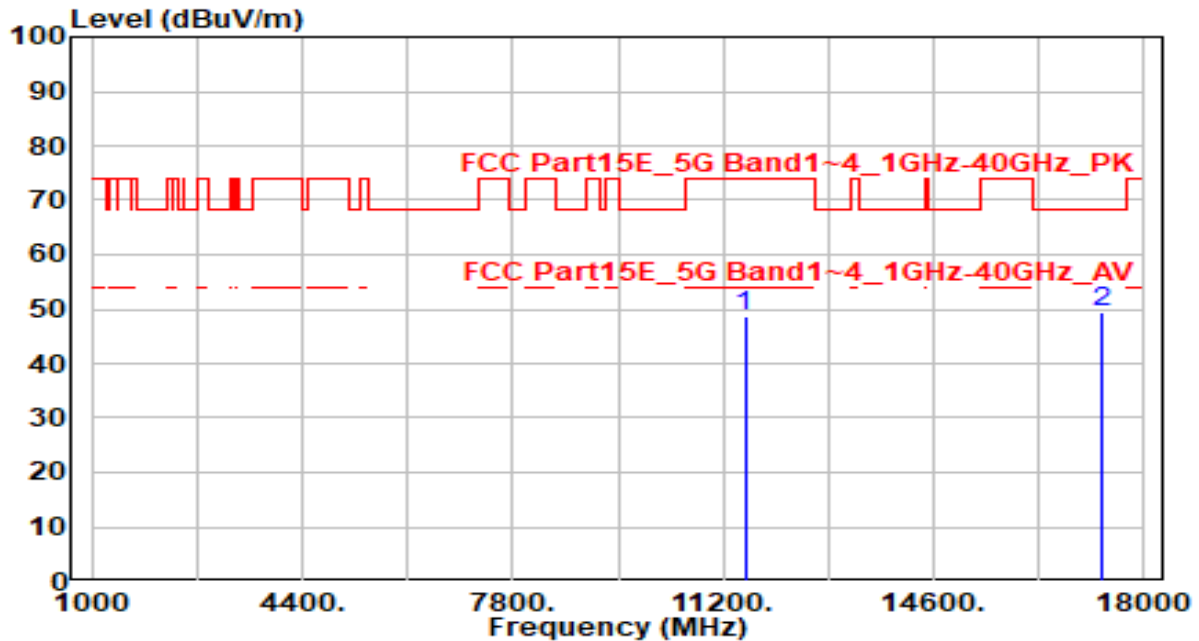


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.88	5.92	48.80	-25.20	74.00	100	180	Peak
2	* 17325.000	43.69	5.60	49.29	-18.91	68.20	100	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

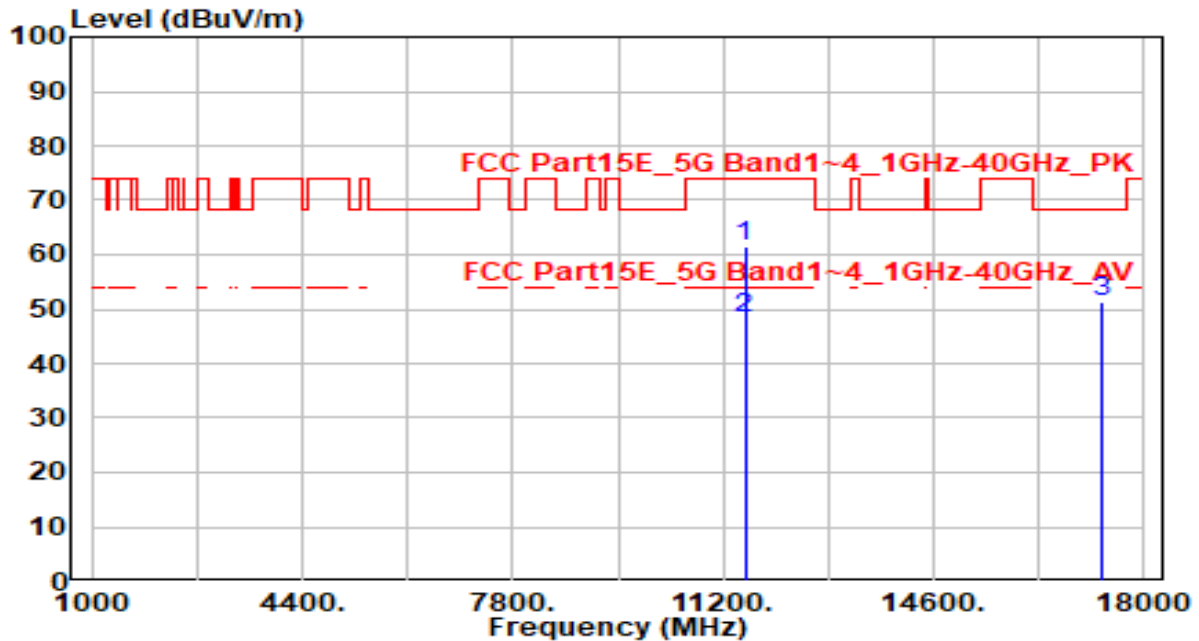


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11550.000	55.51	5.92	61.43	-12.57	74.00	200	360	Peak
2	*	11550.000	42.20	5.92	48.12	-5.88	54.00	200	360	Average
3		17325.000	45.76	5.60	51.35	-16.85	68.20	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

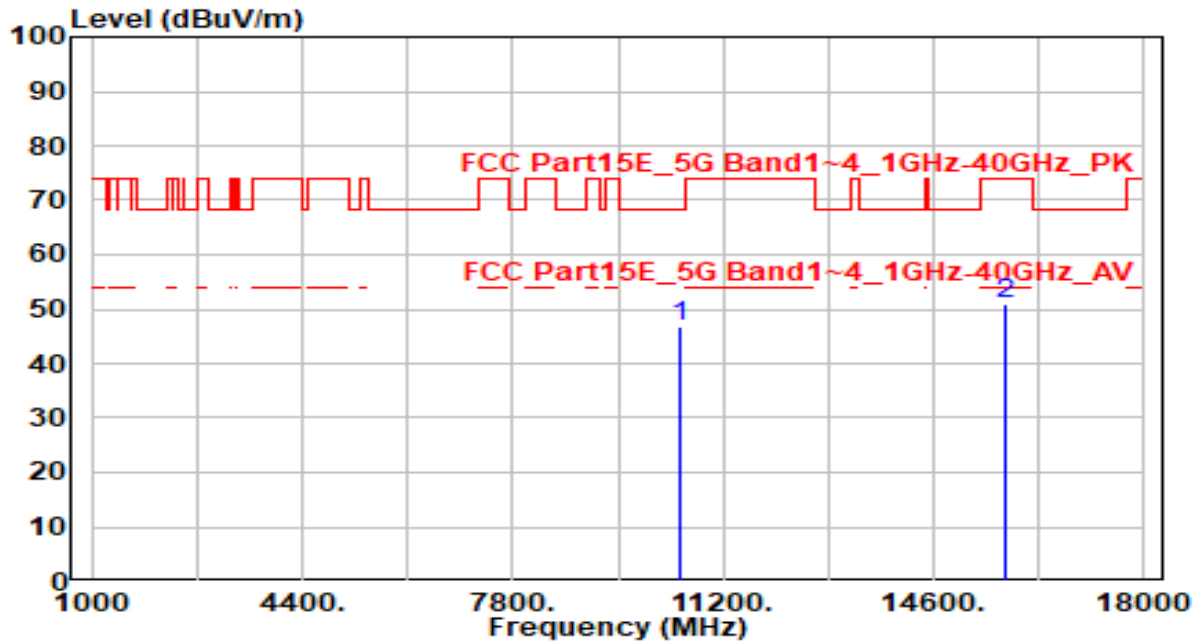


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.43	5.25	46.68	-21.52	68.20	100	190	Peak
2		15750.000	44.18	6.76	50.94	-23.06	74.00	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

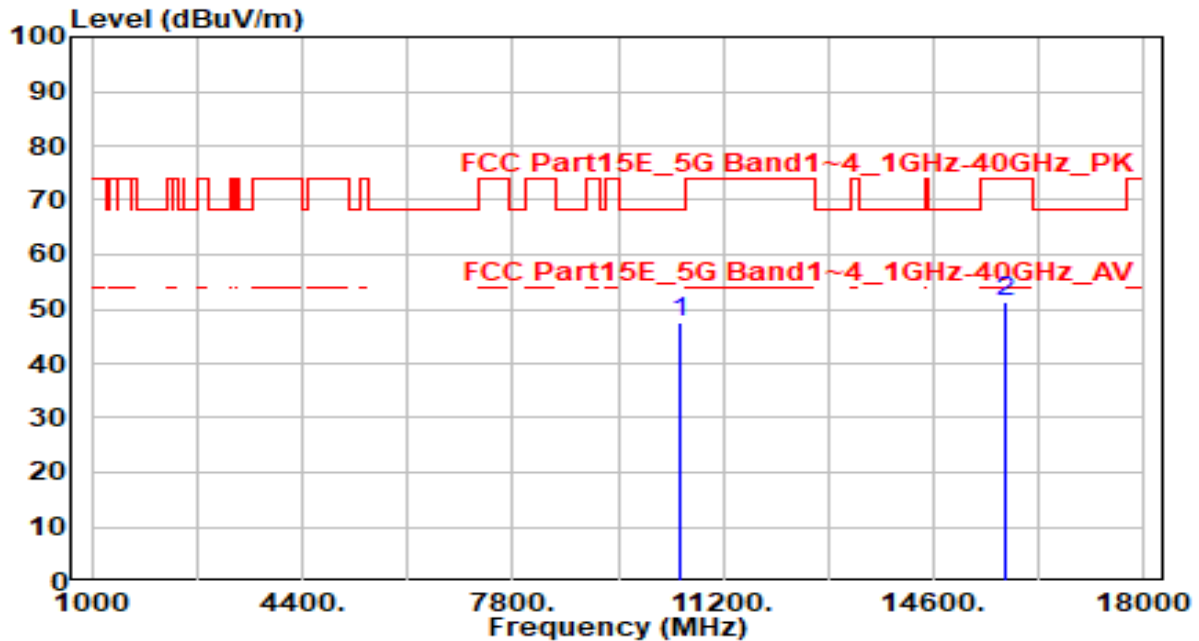


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	42.17	5.25	47.42	-20.78	68.20	100	325	Peak
2		15750.000	44.37	6.76	51.13	-22.87	74.00	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

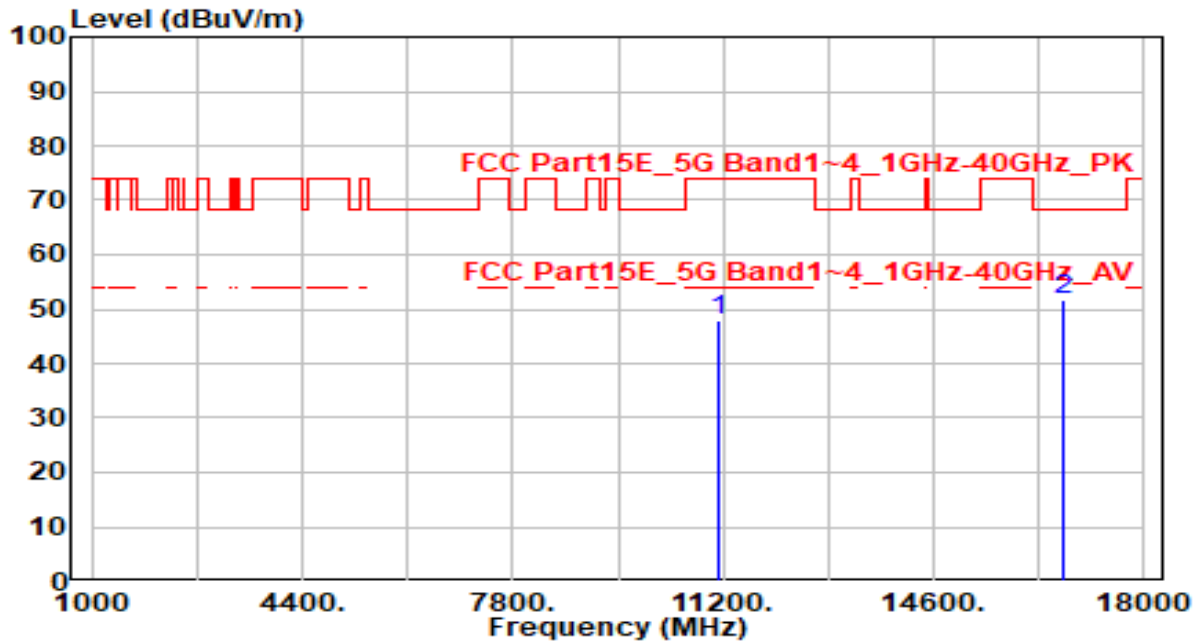


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	42.19	5.71	47.90	-26.10	74.00	100	355	Peak
2	* 16710.000	44.16	7.67	51.83	-16.37	68.20	100	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

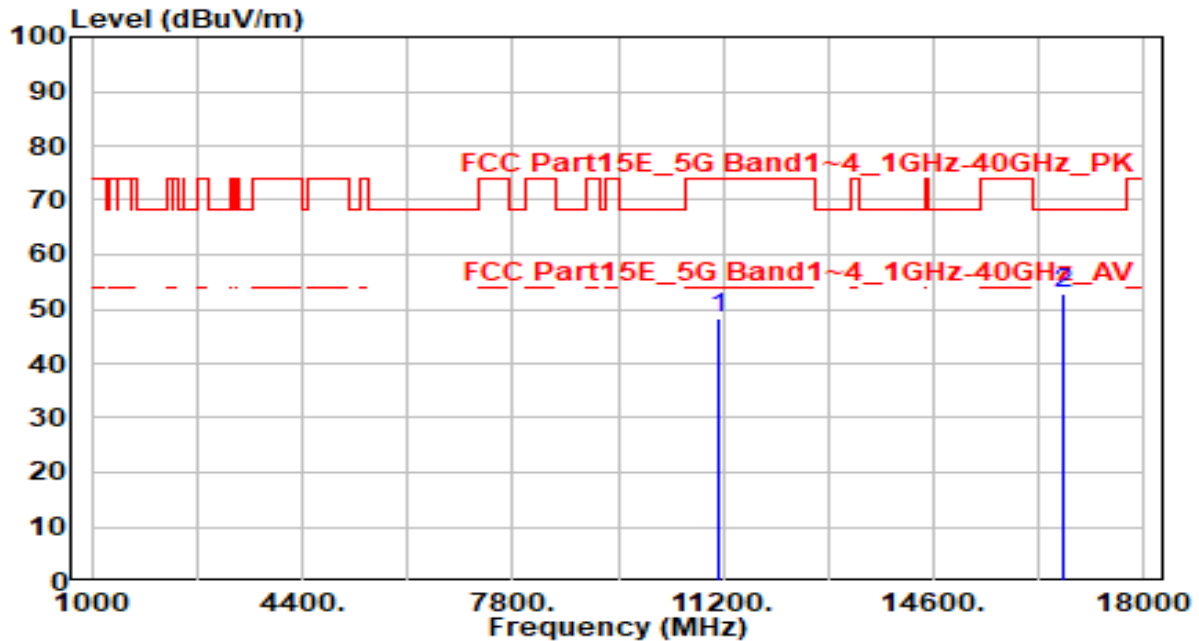


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	42.74	5.71	48.44	-25.56	74.00	100	360	Peak
2	* 16710.000	45.16	7.67	52.83	-15.37	68.20	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

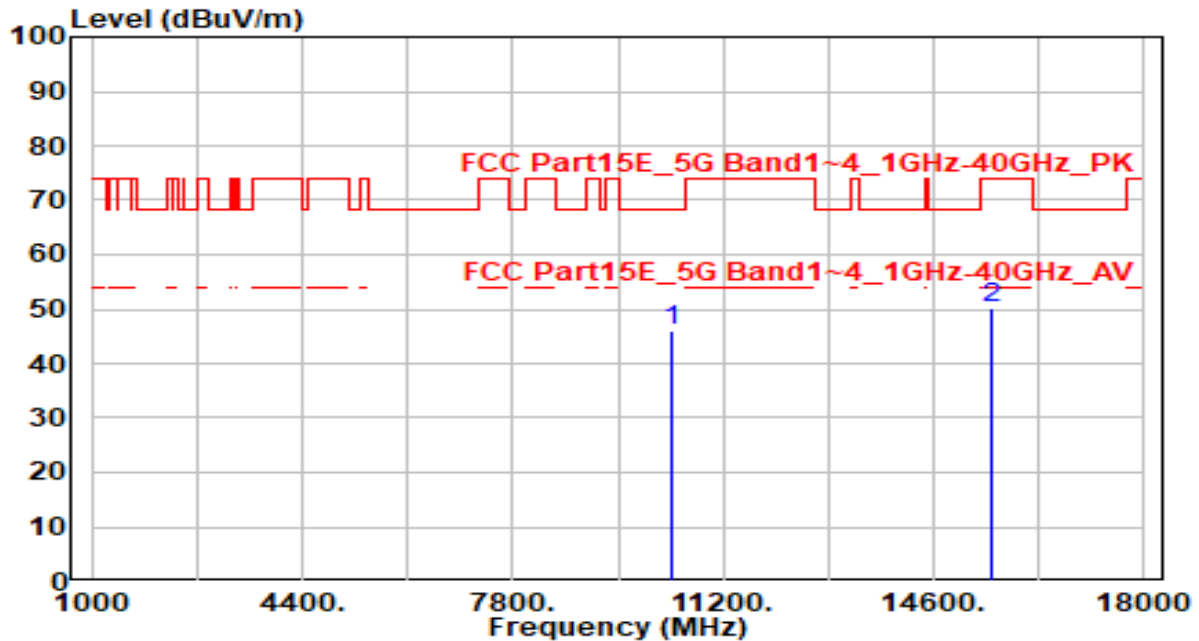


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	40.62	5.29	45.92	-22.28	68.20	100	65	Peak
2		15540.000	43.61	6.41	50.02	-23.98	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

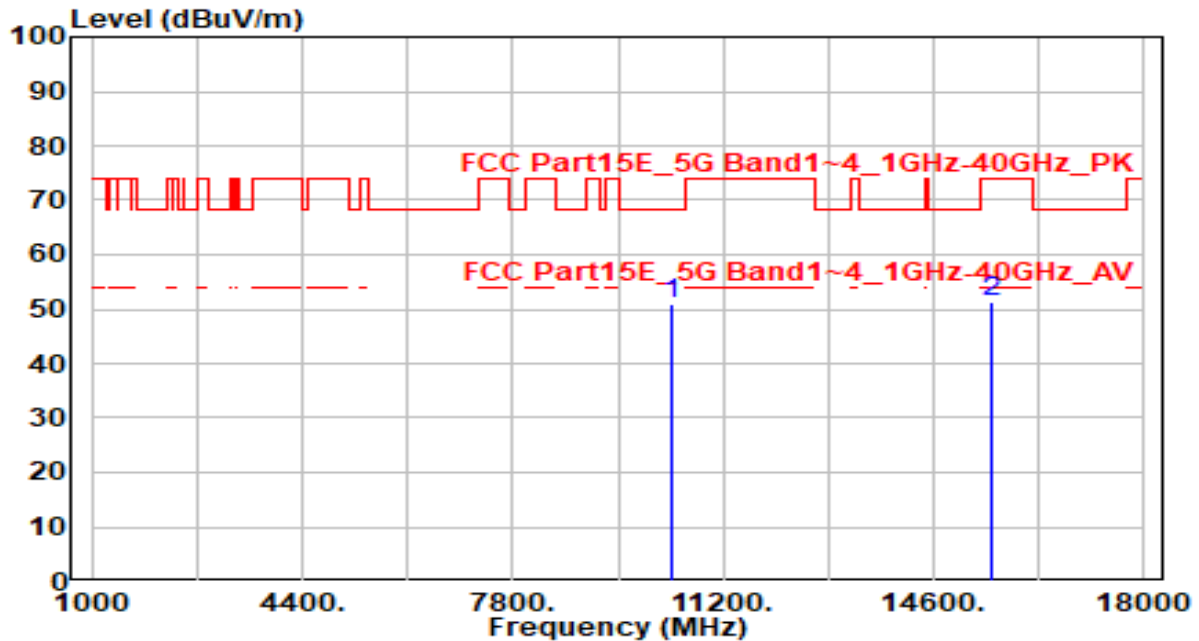


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	45.77	5.29	51.07	-17.13	68.20	100	320	Peak
2		15540.000	45.02	6.41	51.43	-22.57	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

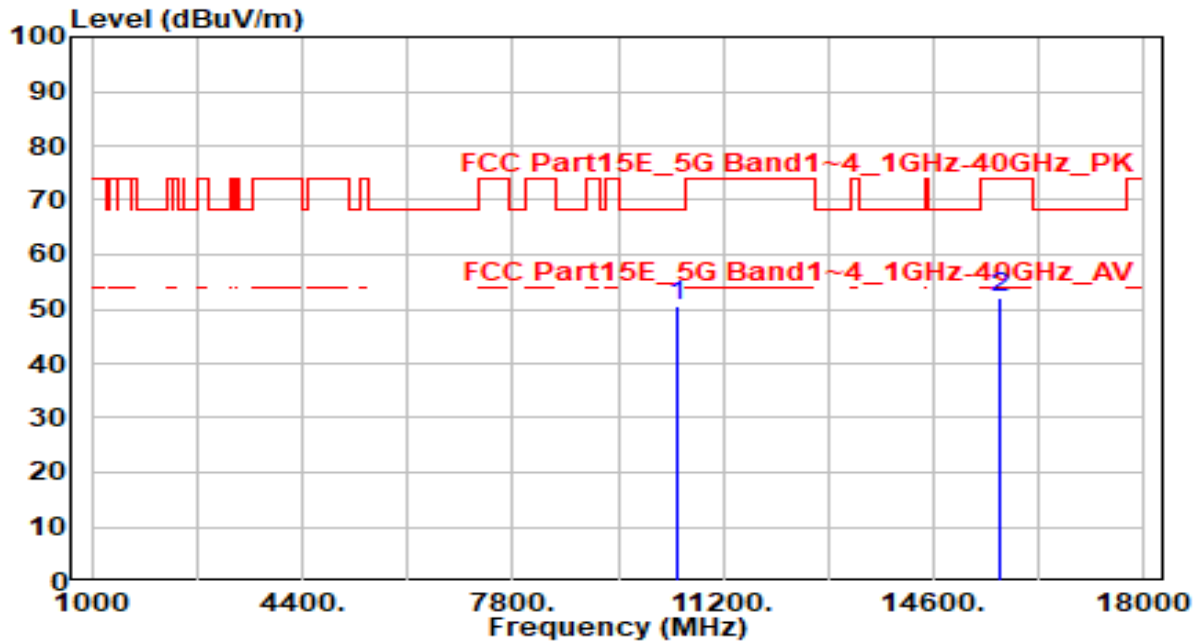


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	45.12	5.28	50.40	-17.80	68.20	100	80	Peak
2		15660.000	45.56	6.56	52.12	-21.88	74.00	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

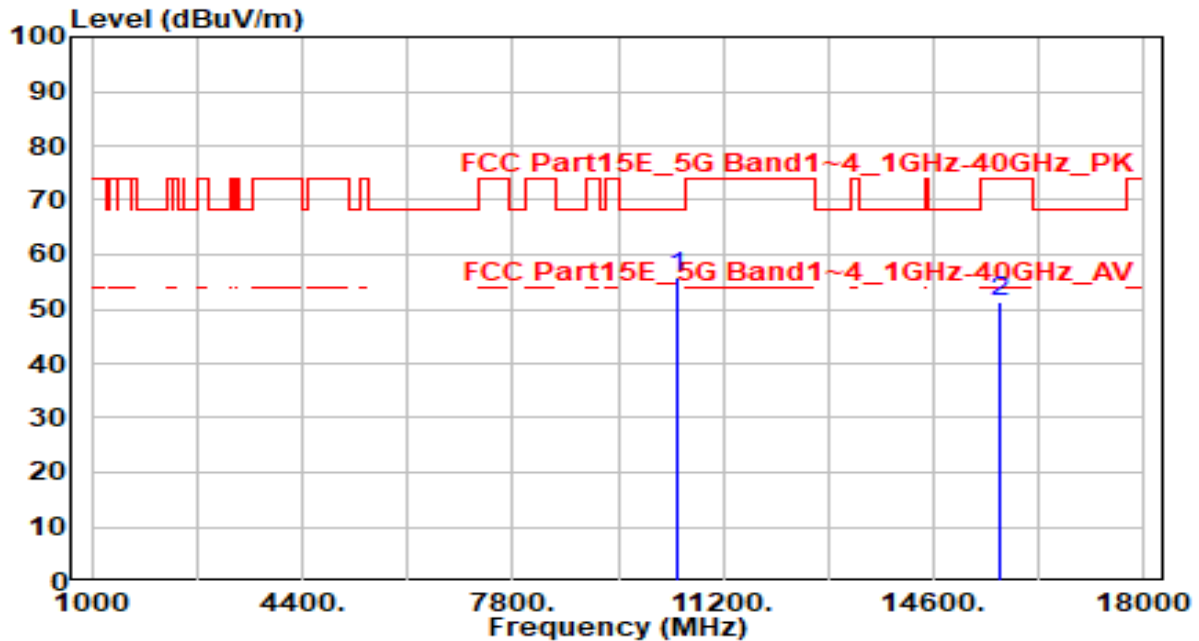


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	50.73	5.28	56.00	-12.20	68.20	100	95	Peak
2		15660.000	44.92	6.56	51.48	-22.52	74.00	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

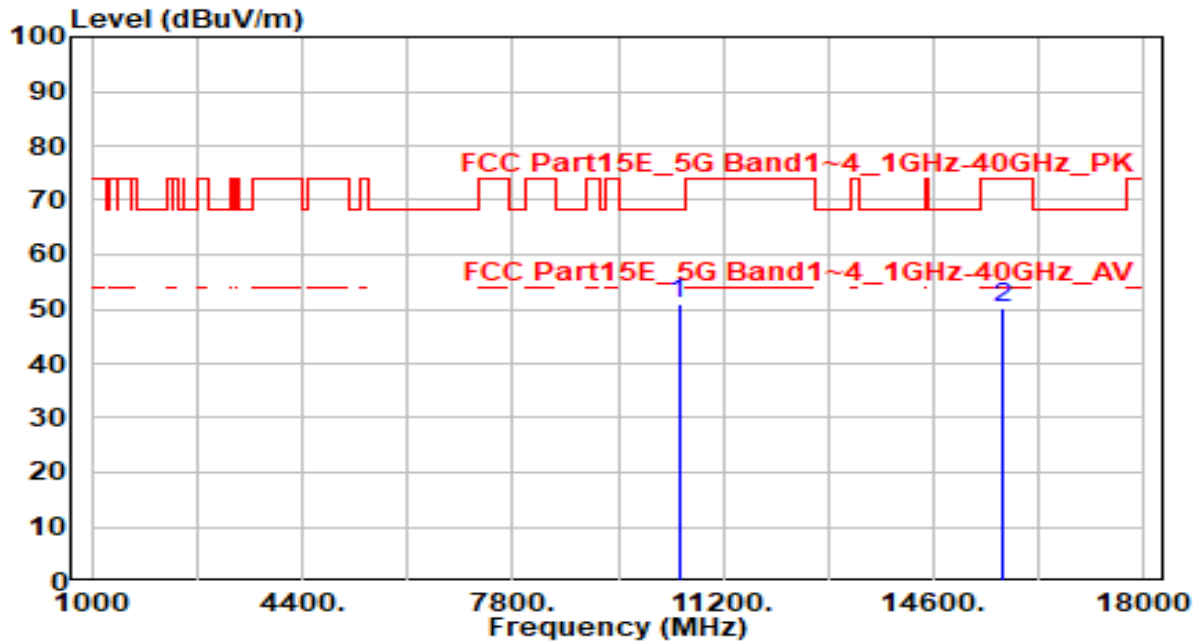


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	45.72	5.26	50.98	-17.22	68.20	100	350	Peak
2		15720.000	43.59	6.69	50.28	-23.72	74.00	100	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

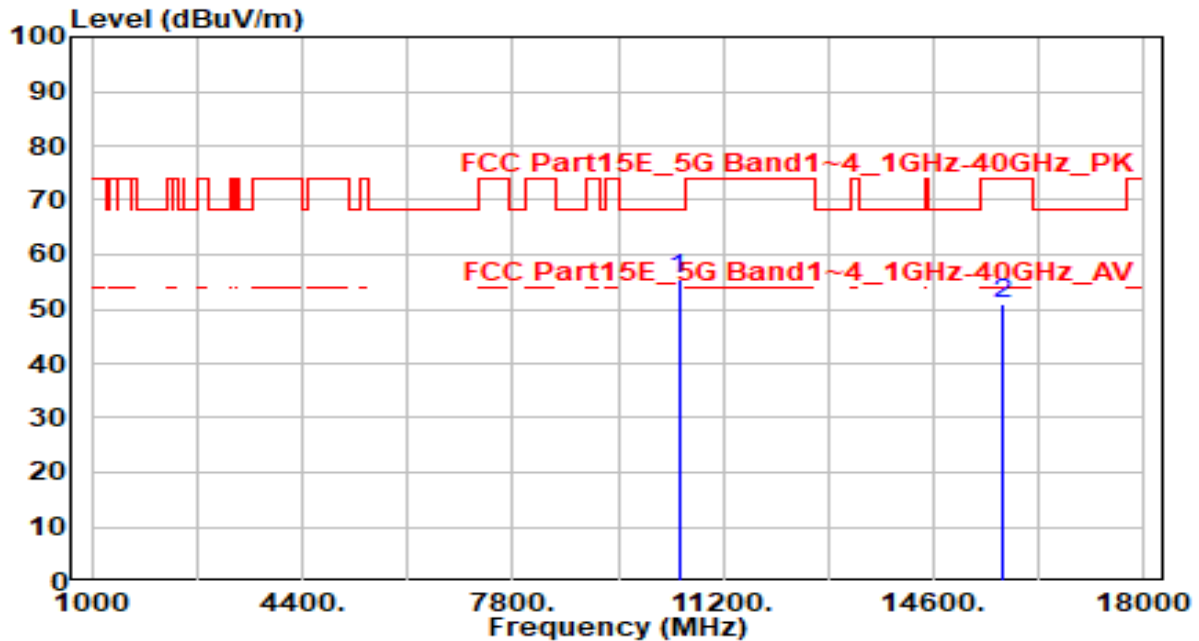


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	50.20	5.26	55.46	-12.74	68.20	100	305	Peak
2		15720.000	44.30	6.69	51.00	-23.00	74.00	100	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

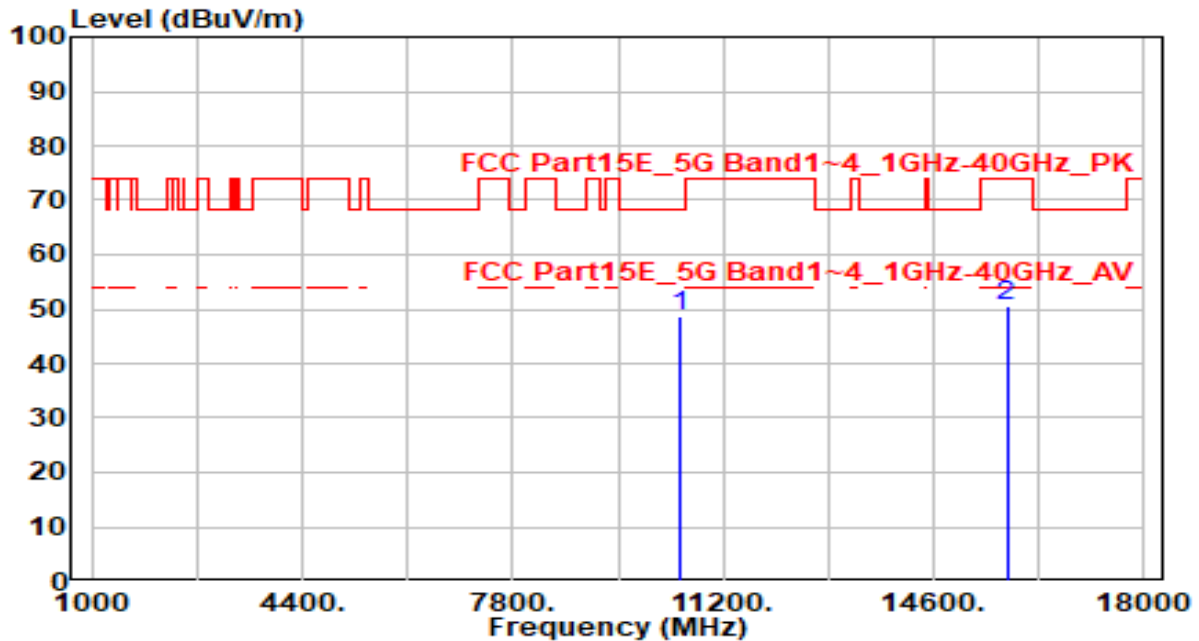


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	43.36	5.25	48.61	-19.59	68.20	100	90	Peak
2		15780.000	43.56	6.83	50.39	-23.61	74.00	100	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

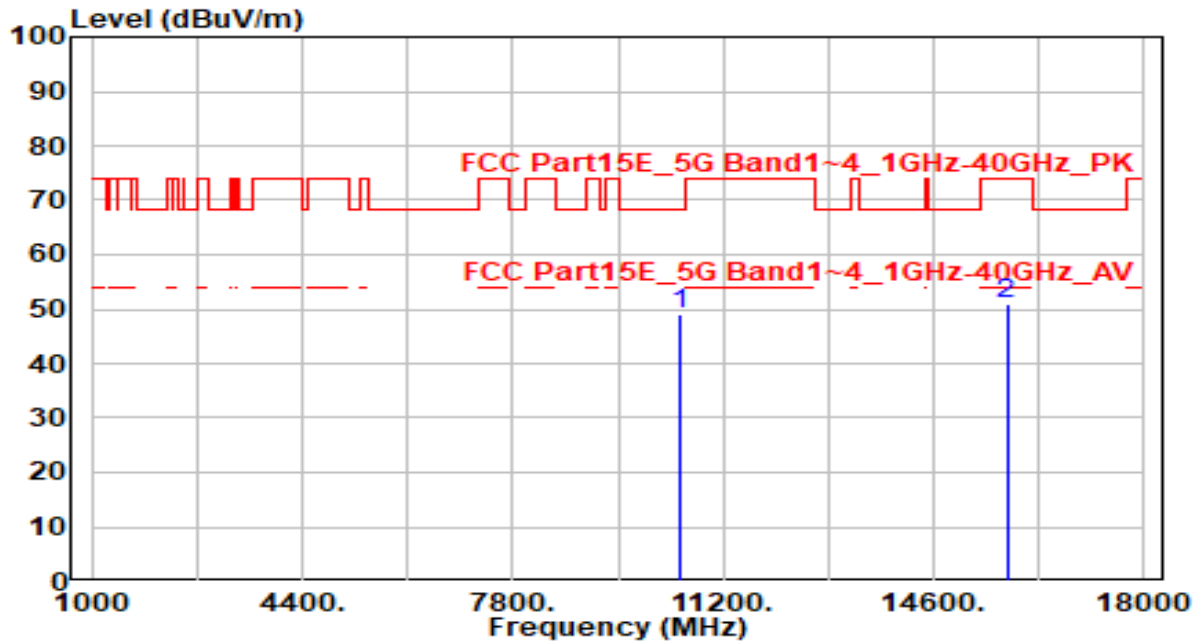


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	43.84	5.25	49.09	-19.11	68.20	100	335	Peak
2		15780.000	43.99	6.83	50.82	-23.18	74.00	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

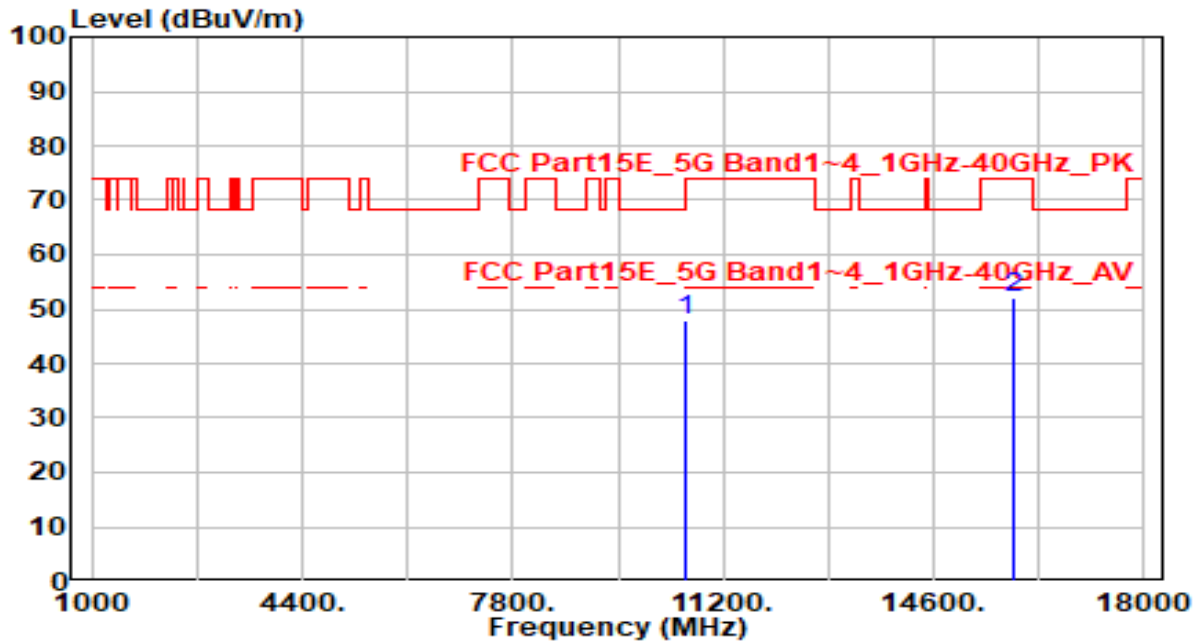


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.55	5.25	47.80	-20.40	68.20	100	15	Peak
2		15900.000	45.17	6.95	52.12	-21.88	74.00	100	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

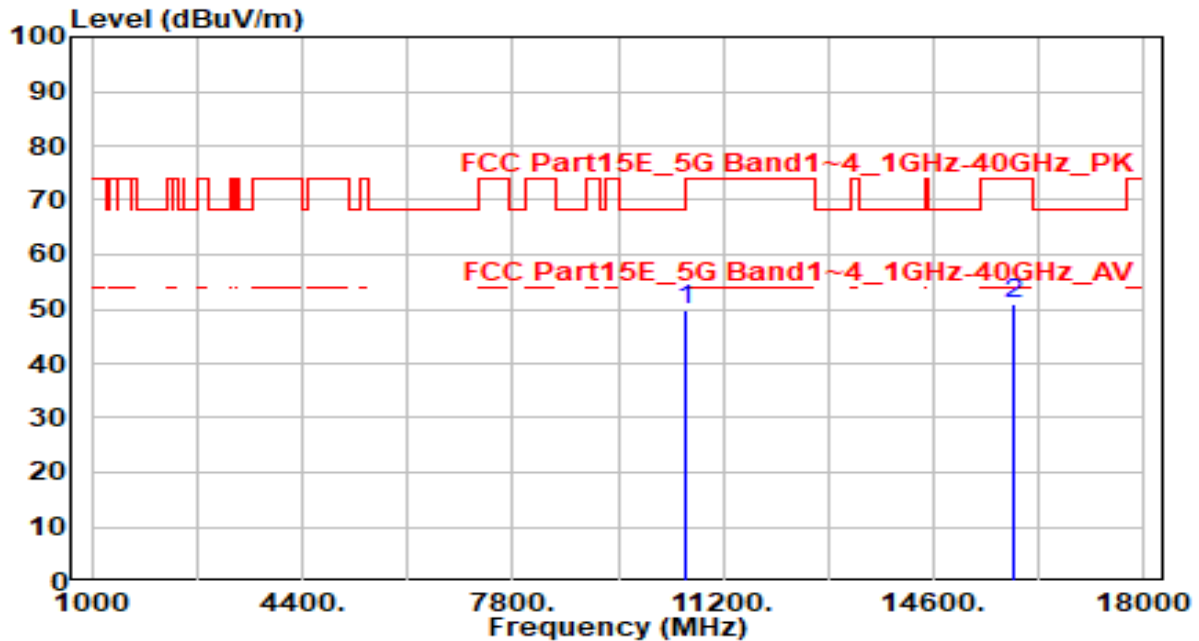


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	44.46	5.25	49.71	-18.49	68.20	100	305	Peak
2		15900.000	43.95	6.95	50.90	-23.10	74.00	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

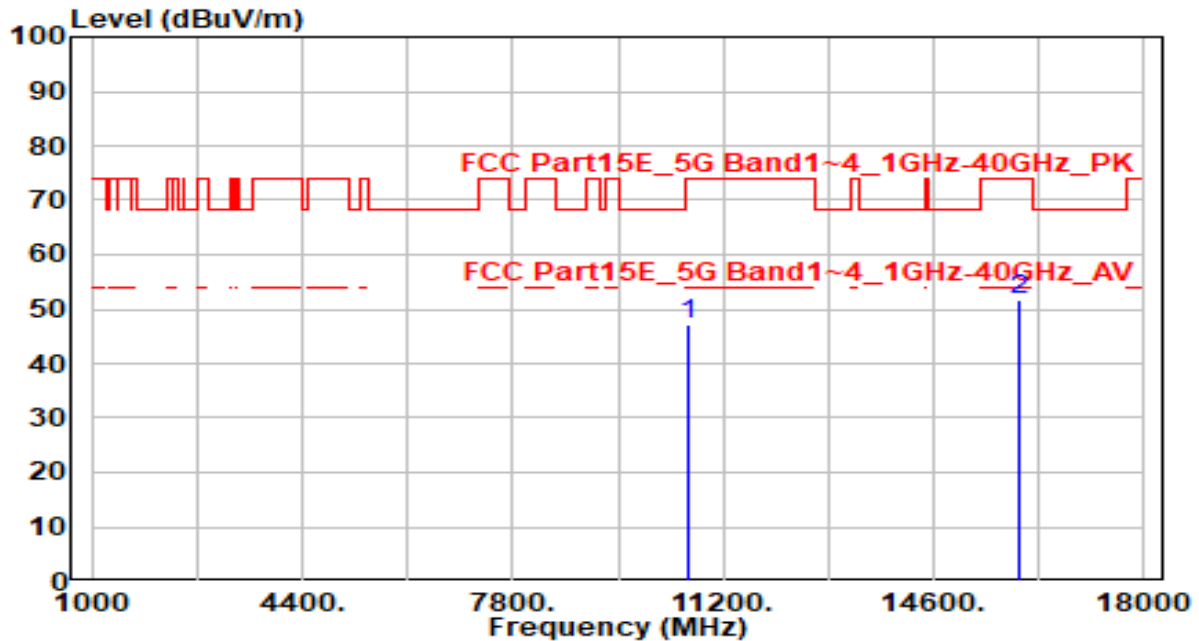


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.90	5.27	47.18	-26.82	74.00	100	240	Peak
2	* 15960.000	44.84	7.00	51.84	-22.16	74.00	100	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

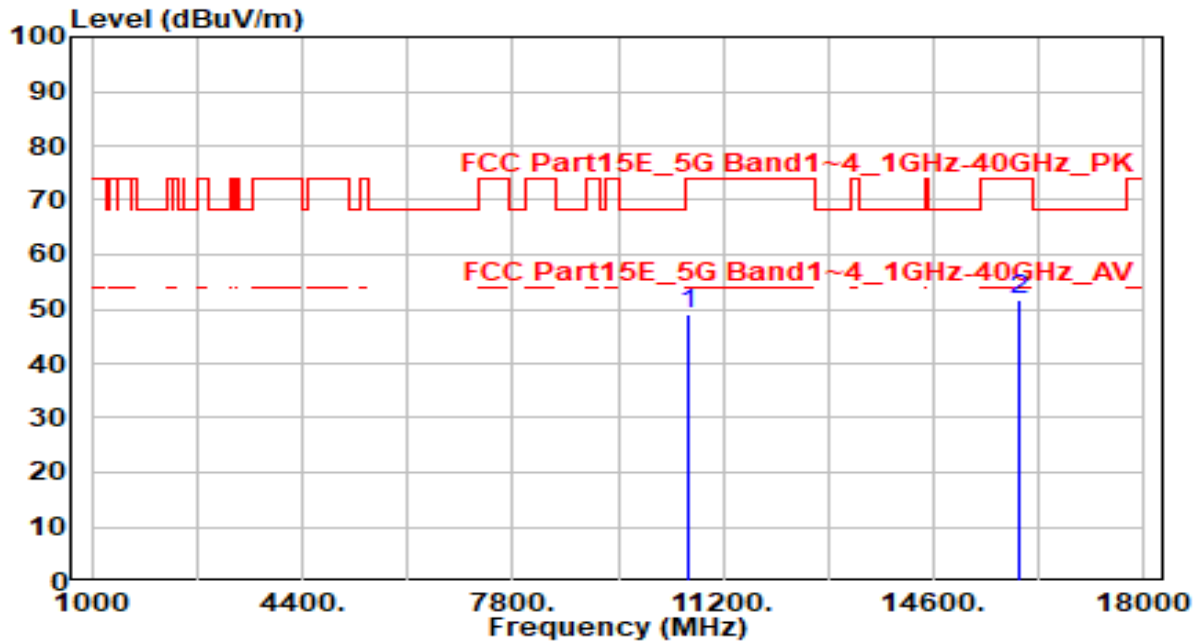


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	43.67	5.27	48.95	-25.05	74.00	100	40	Peak
2	* 15960.000	44.56	7.00	51.56	-22.44	74.00	100	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

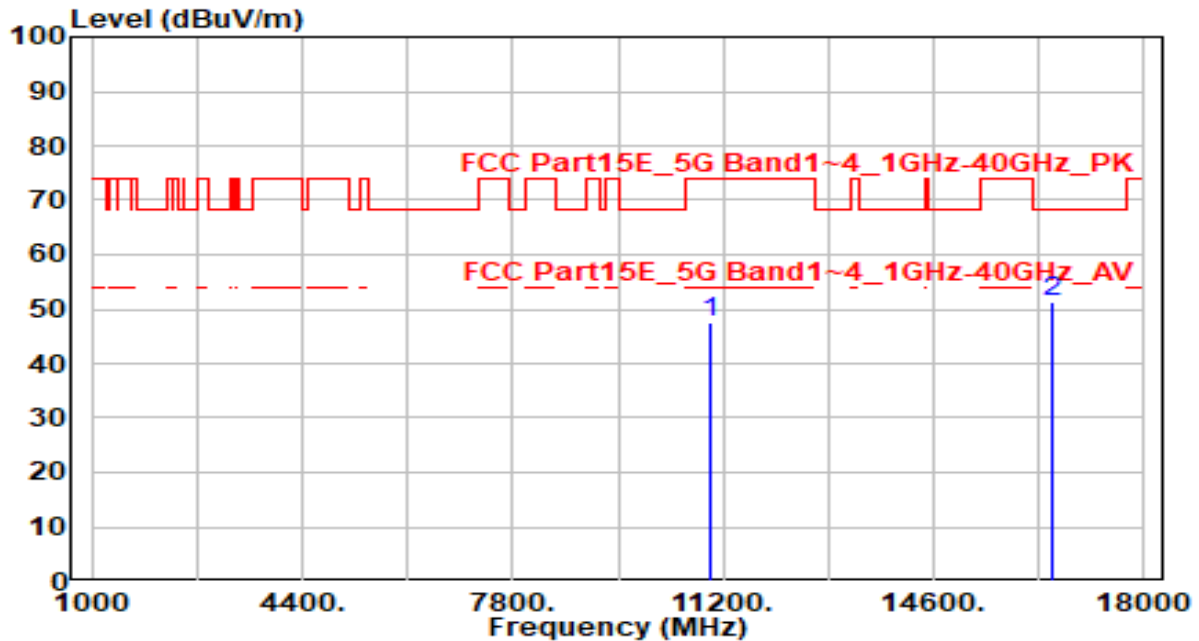


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.15	5.56	47.71	-26.29	74.00	100	15	Peak
2	*	16500.000	44.08	7.34	51.42	-16.78	68.20	100	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

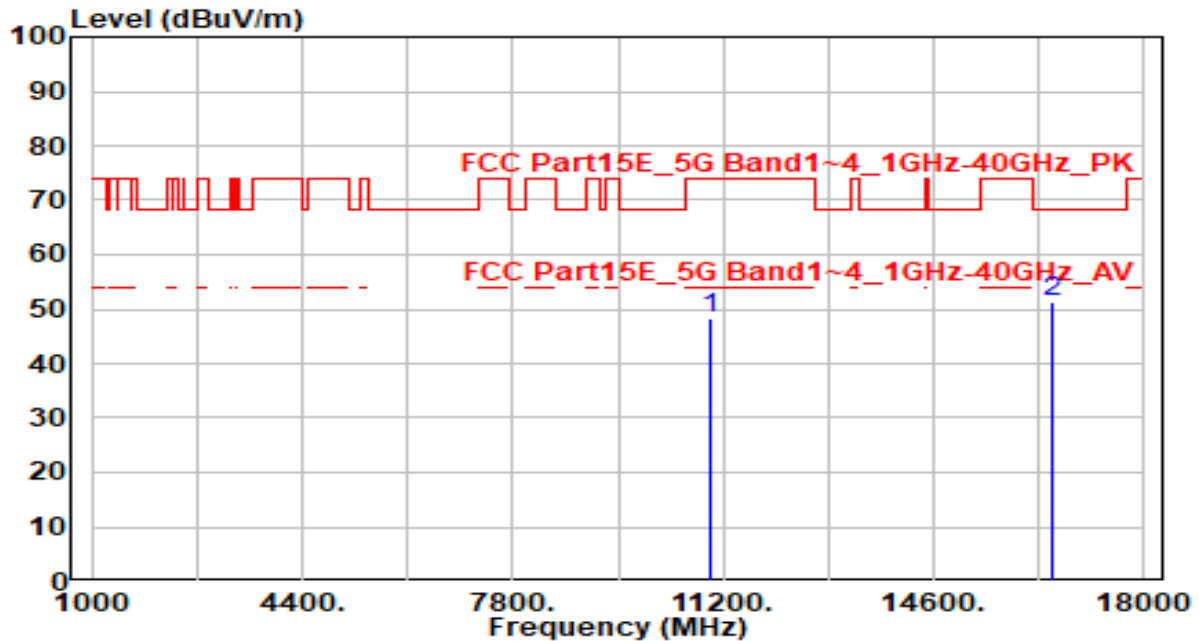


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.63	5.56	48.19	-25.81	74.00	100	350	Peak
2	* 16500.000	43.91	7.34	51.25	-16.95	68.20	100	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

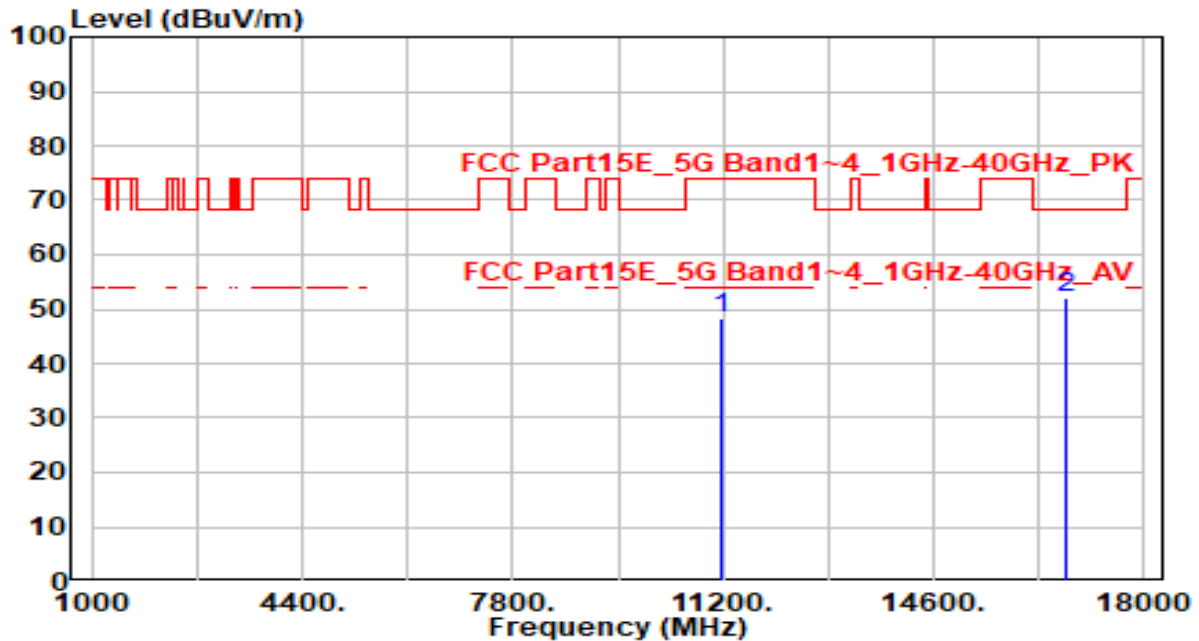


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.72	5.73	48.45	-25.55	74.00	100	195	Peak
2	* 16740.000	44.48	7.72	52.20	-16.00	68.20	100	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

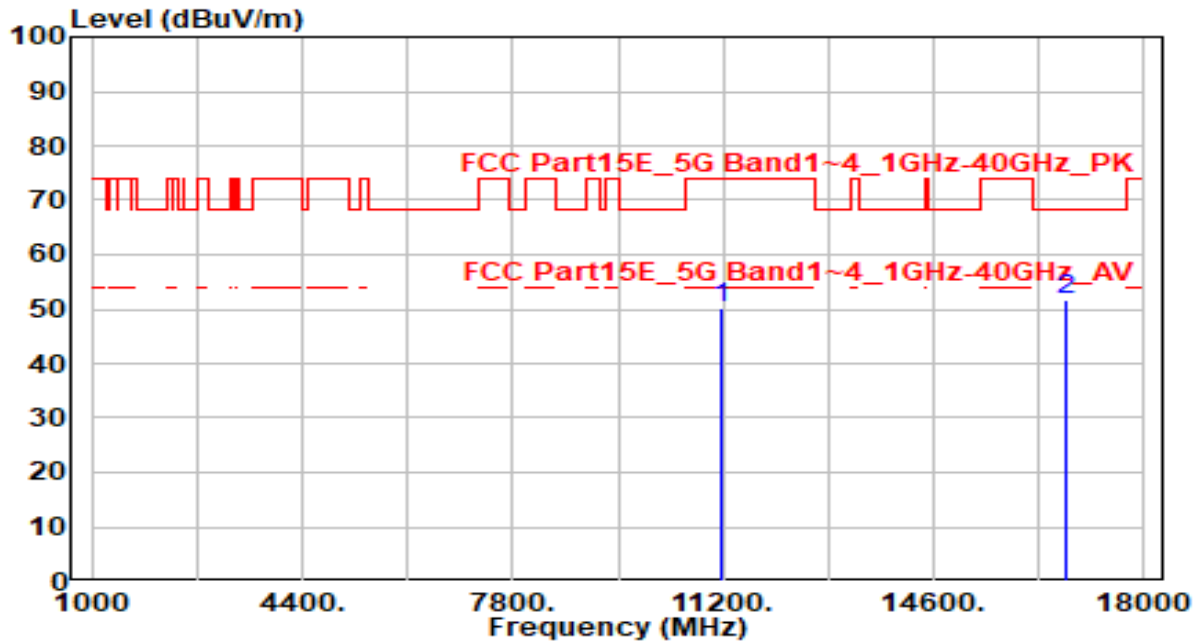


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	44.62	5.73	50.35	-23.65	74.00	100	360	Peak
2	* 16740.000	44.15	7.72	51.87	-16.33	68.20	100	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

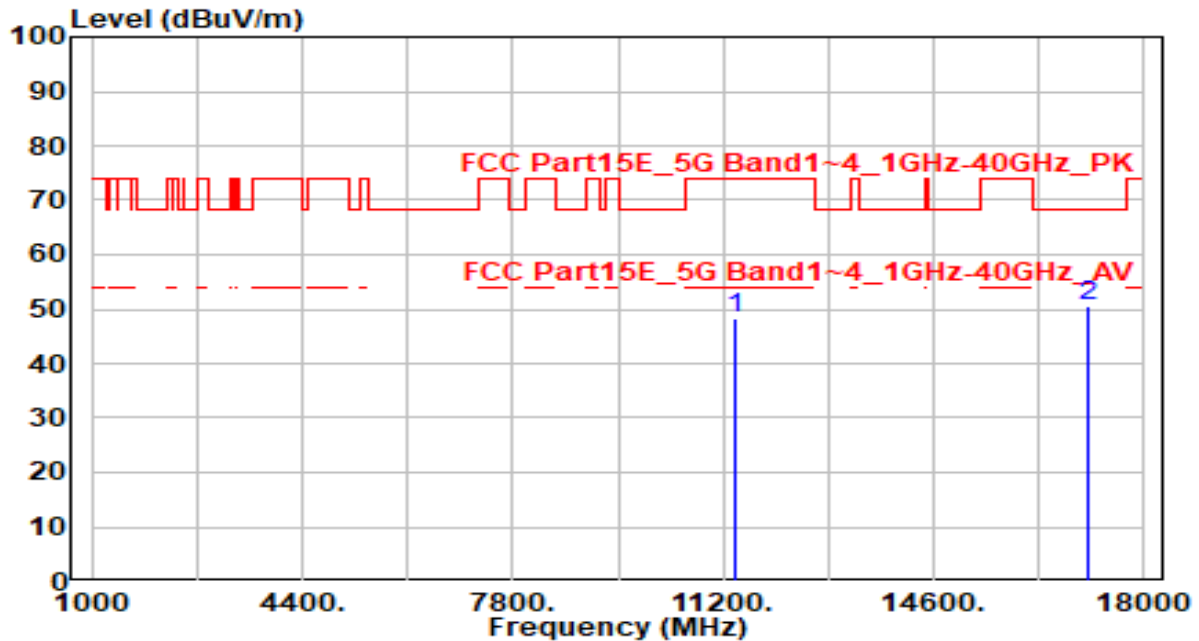


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.16	5.98	48.15	-25.85	74.00	100	15	Peak
2	* 17100.000	44.41	6.16	50.57	-17.63	68.20	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

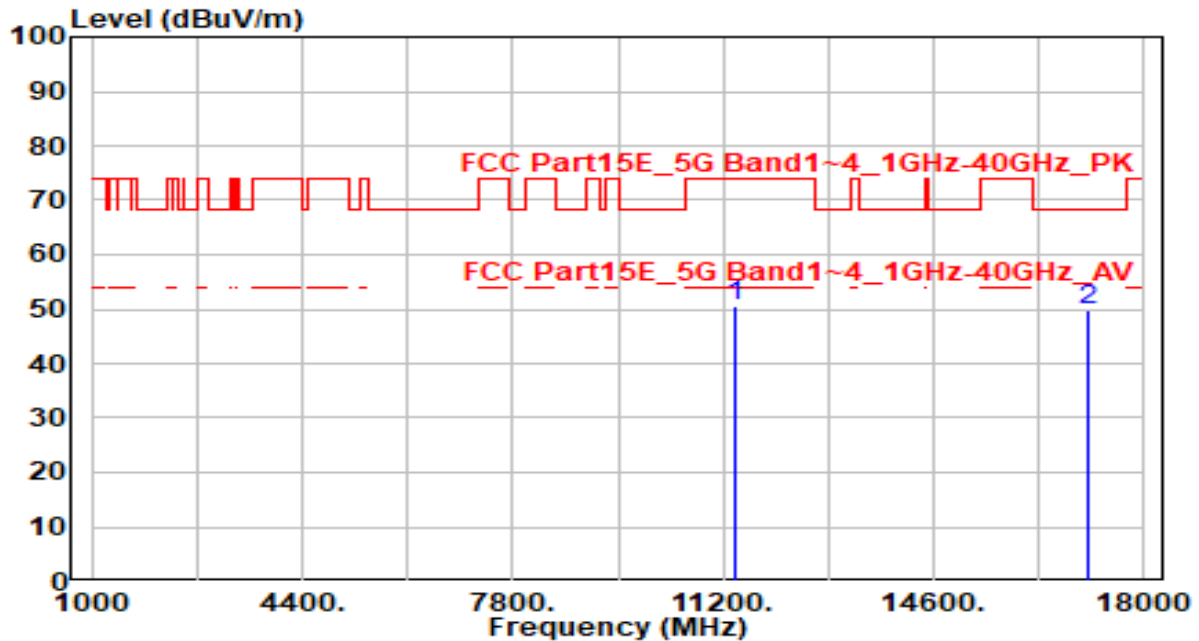


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	44.58	5.98	50.57	-23.43	74.00	100	15	Peak
2	* 17100.000	43.54	6.16	49.70	-18.50	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

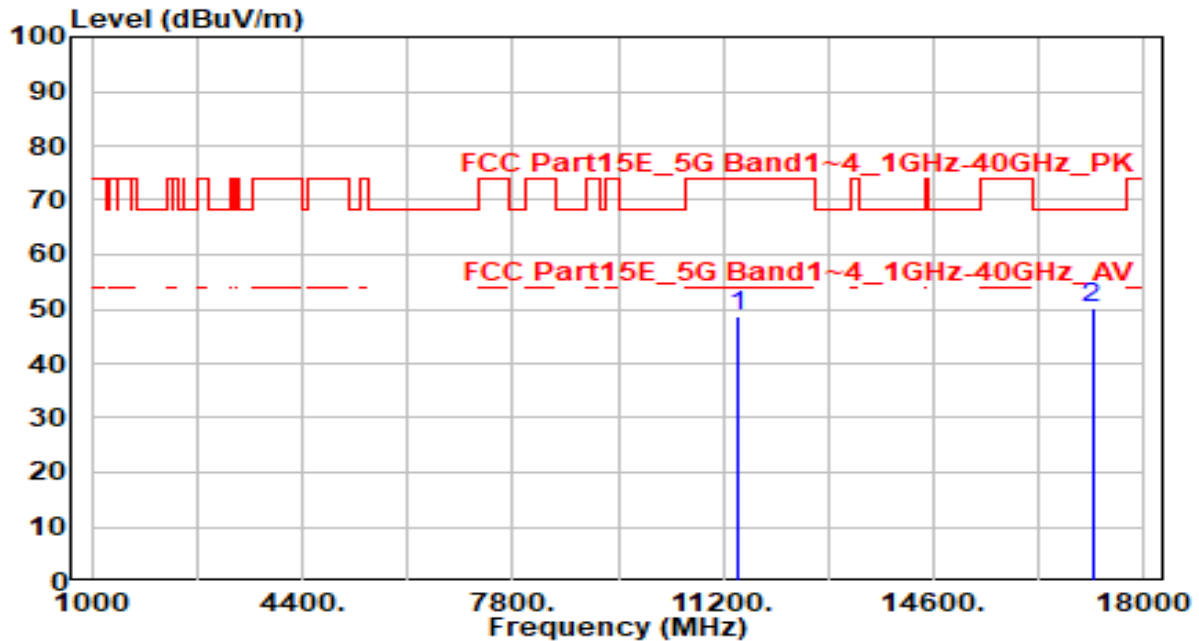


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.66	5.97	48.62	-25.38	74.00	100	10	Peak
2	* 17160.000	44.04	5.98	50.02	-18.18	68.20	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

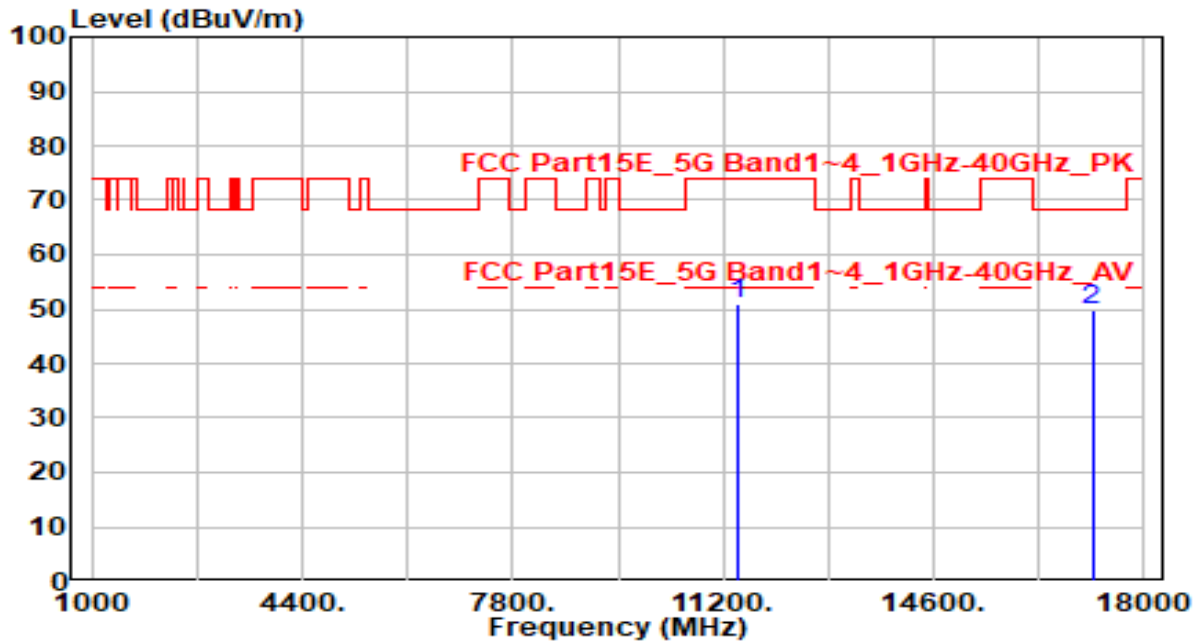


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	44.87	5.97	50.84	-23.16	74.00	100	205	Peak
2	* 17160.000	44.01	5.98	49.99	-18.21	68.20	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

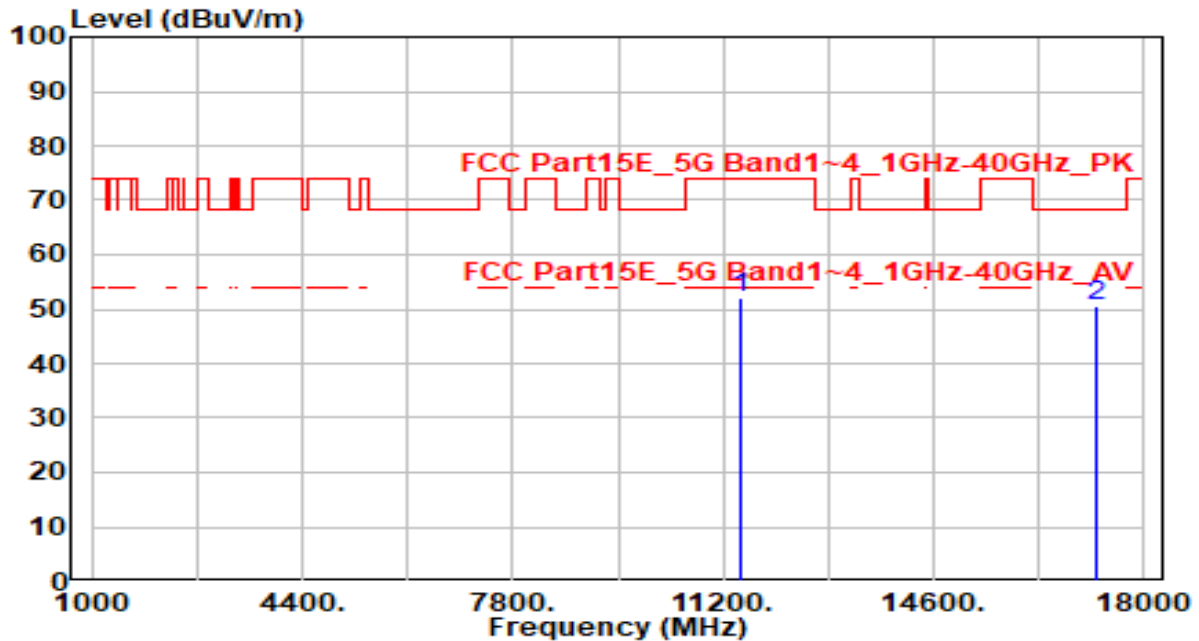


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	46.16	5.94	52.10	-21.90	74.00	100	150	Peak
2	* 17235.000	44.75	5.78	50.53	-17.67	68.20	100	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

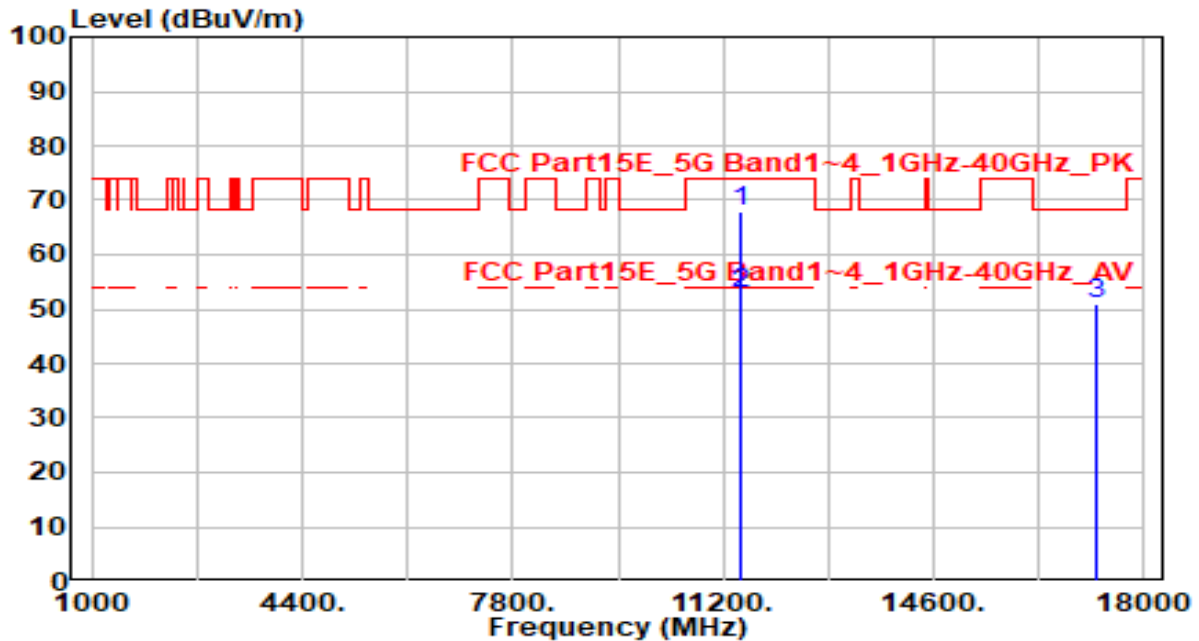


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11490.000	61.91	5.94	67.85	-6.15	74.00	190	205	Peak
2	*	11490.000	46.72	5.94	52.66	-1.34	54.00	190	205	Average
3		17235.000	45.24	5.78	51.03	-17.17	68.20	100	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

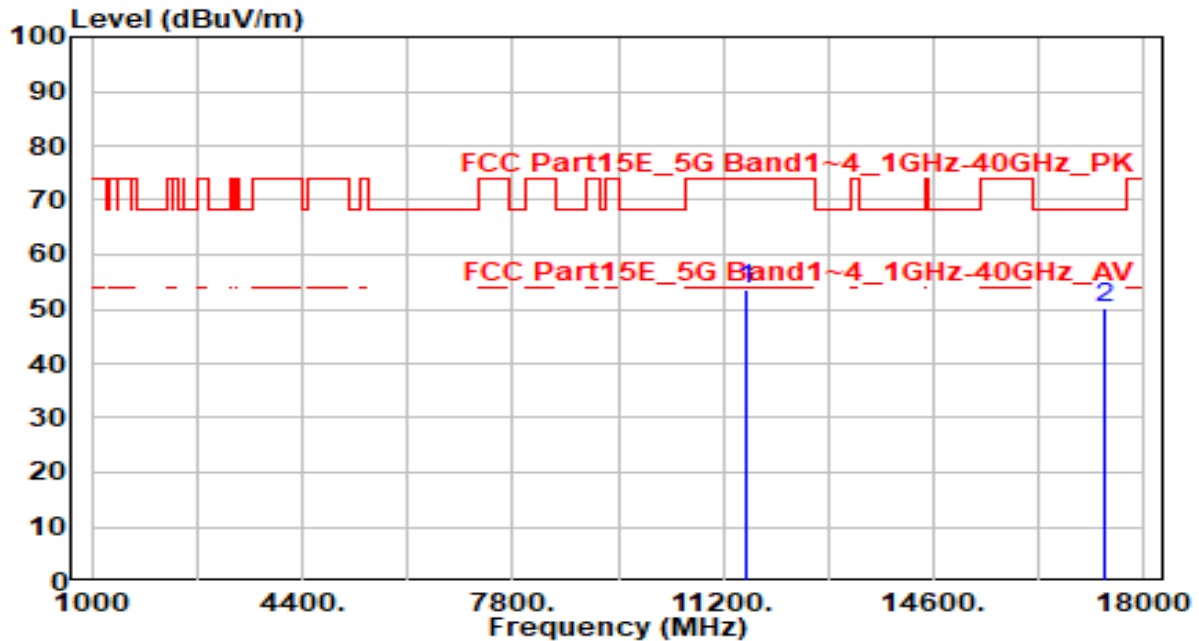


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	47.82	5.91	53.73	-20.27	74.00	100	245	Peak
2	* 17355.000	44.60	5.54	50.13	-18.07	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

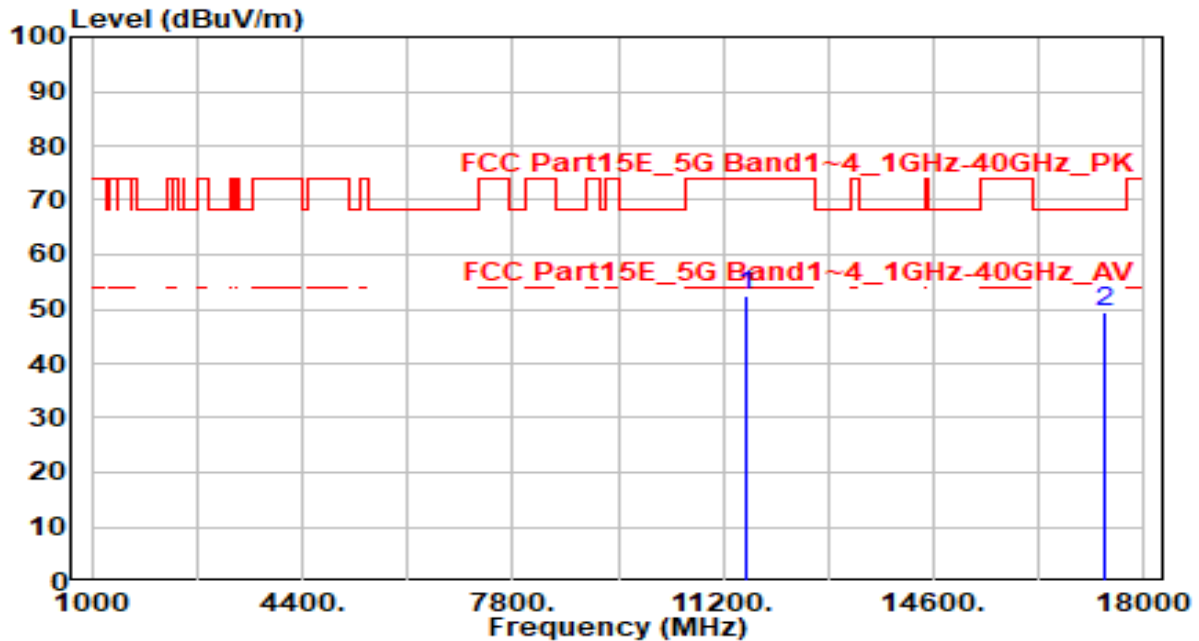


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	46.67	5.91	52.58	-21.42	74.00	100	15	Peak
2	* 17355.000	43.94	5.54	49.48	-18.72	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

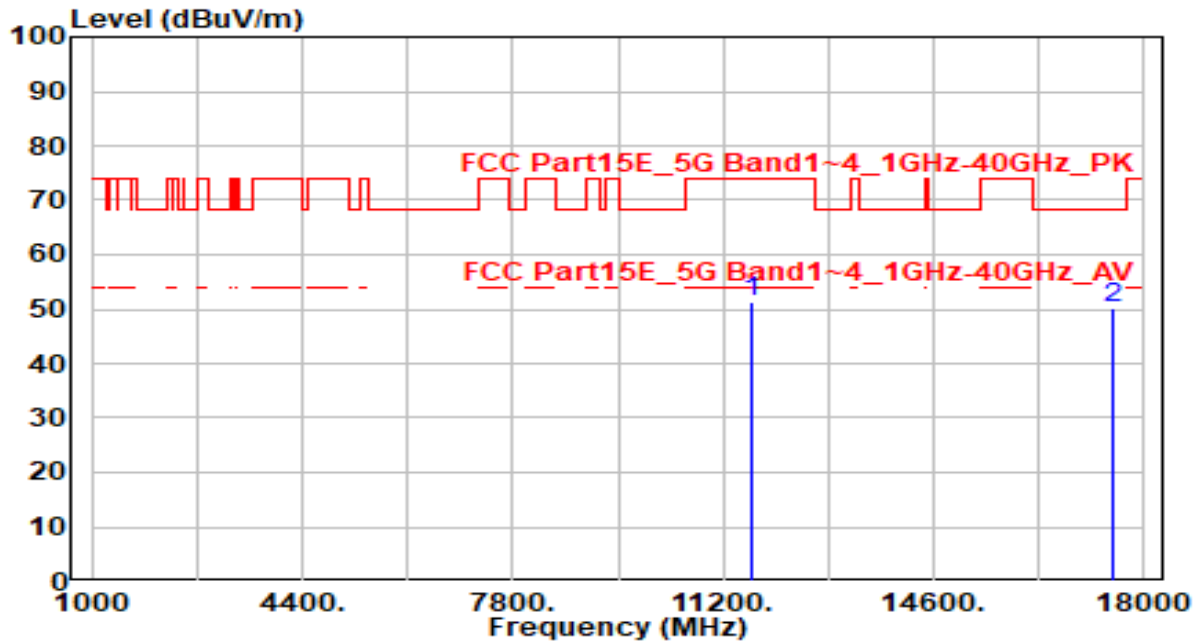


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	45.41	5.86	51.27	-22.73	74.00	100	195	Peak
2	* 17475.000	44.76	5.44	50.20	-18.00	68.20	100	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

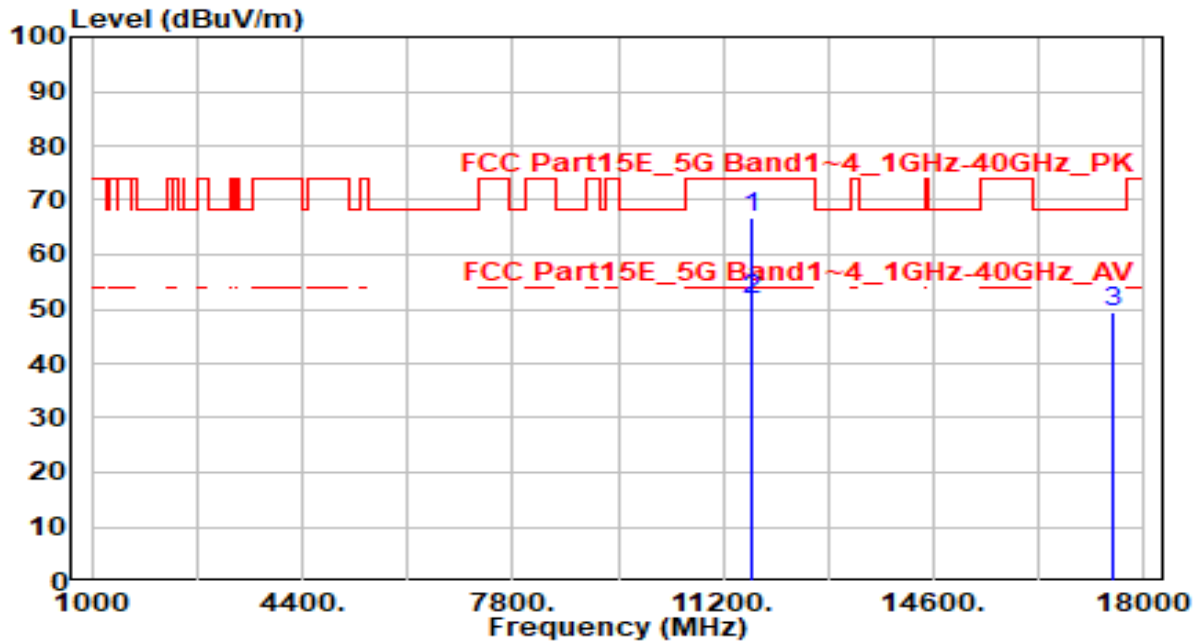


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11650.000	60.96	5.86	66.82	-7.18	74.00	200	30	Peak
2	*	11650.000	45.86	5.86	51.71	-2.29	54.00	200	30	Average
3		17475.000	43.87	5.44	49.31	-18.89	68.20	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

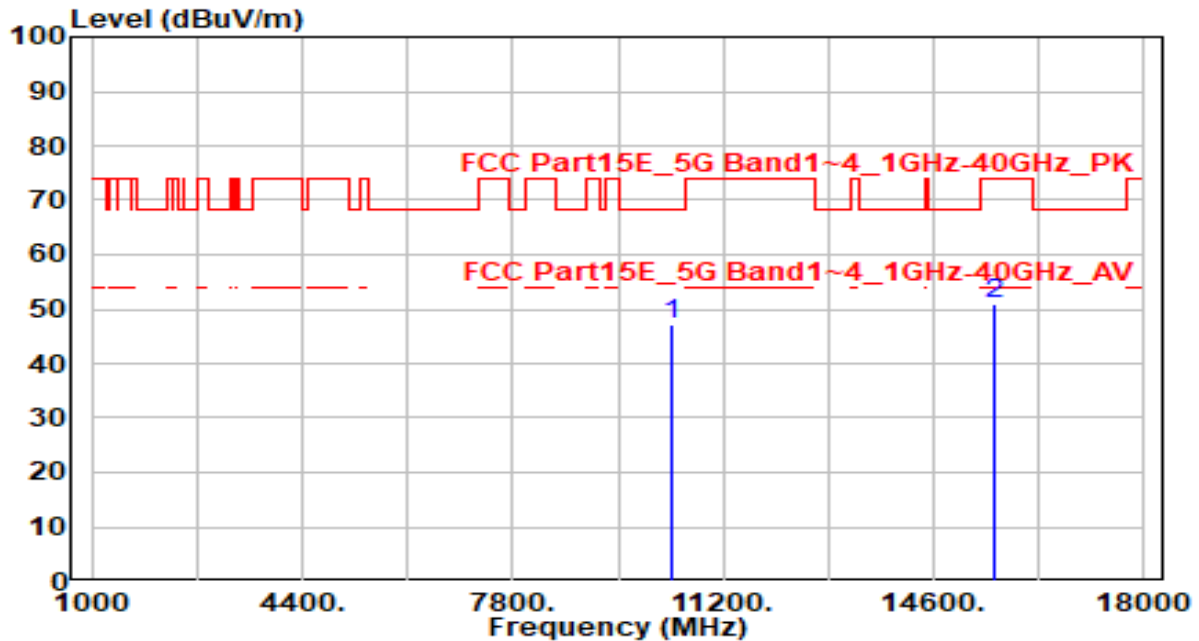


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	42.06	5.30	47.35	-20.85	68.20	100	5	Peak
2		15570.000	44.54	6.41	50.96	-23.04	74.00	100	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

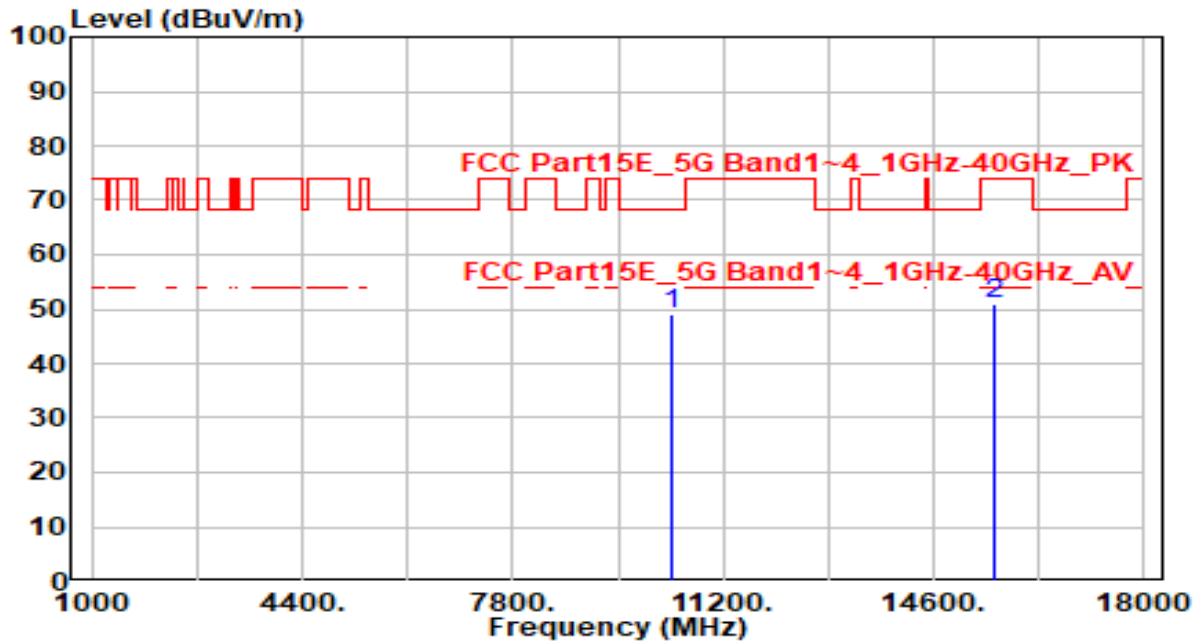


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	43.80	5.30	49.09	-19.11	68.20	100	40	Peak
2		15570.000	44.64	6.41	51.05	-22.95	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

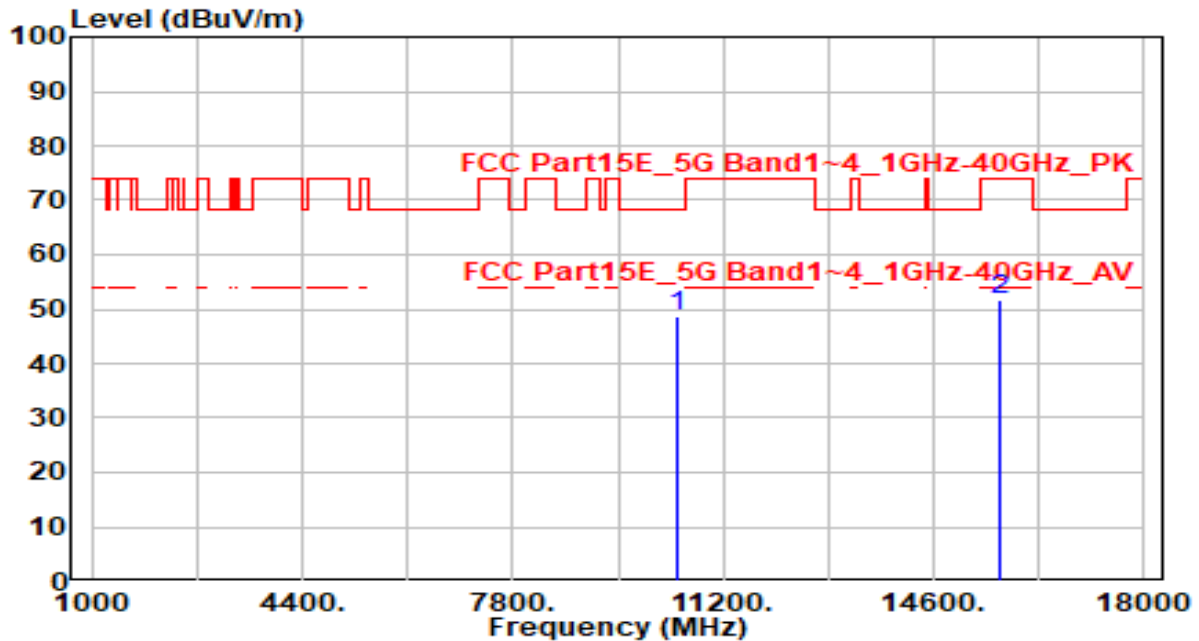


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	43.48	5.27	48.75	-19.45	68.20	100	80	Peak
2		15690.000	45.09	6.63	51.71	-22.29	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

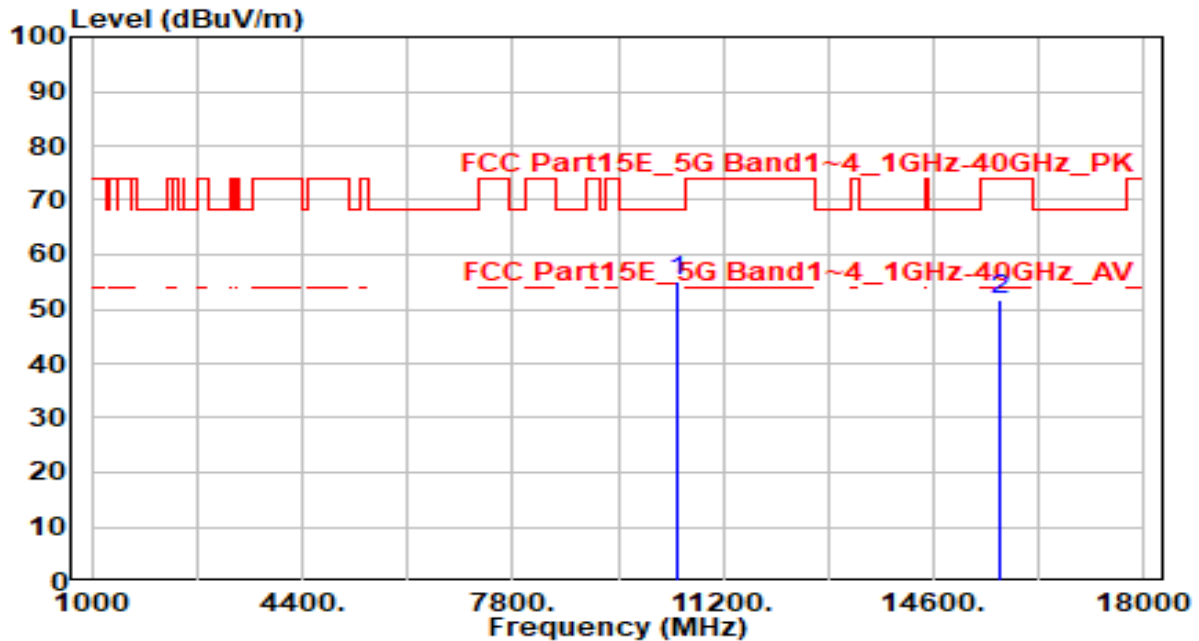


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	49.74	5.27	55.01	-13.19	68.20	100	200	Peak
2		15690.000	45.07	6.63	51.69	-22.31	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

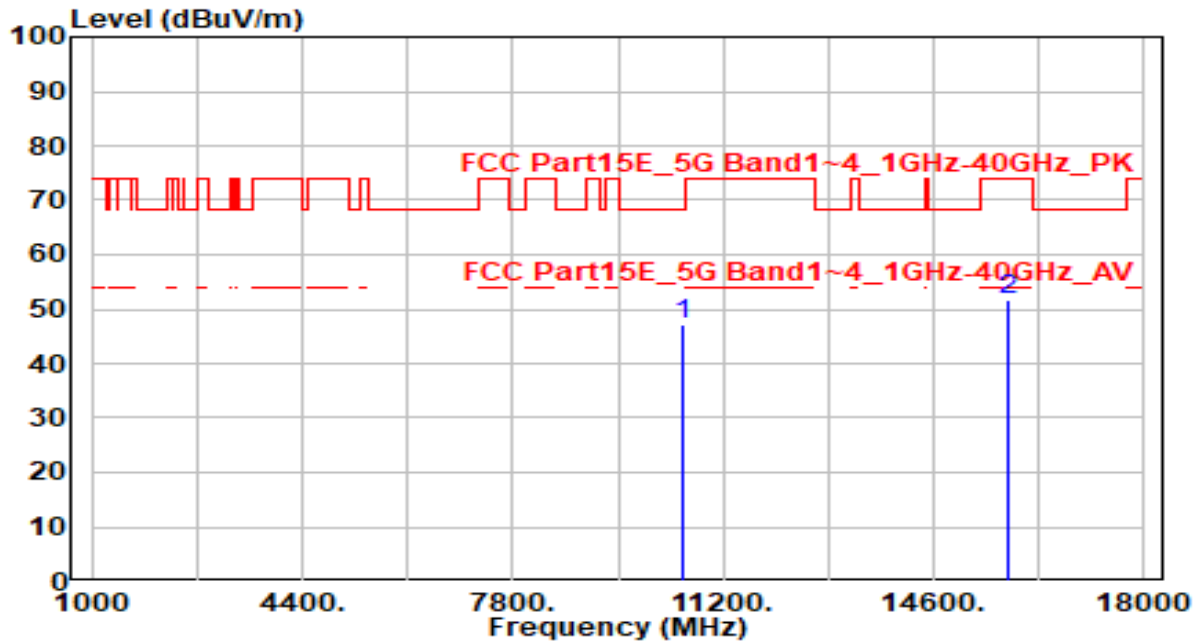


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.84	5.25	47.09	-21.11	68.20	100	15	Peak
2		15810.000	44.87	6.88	51.76	-22.24	74.00	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

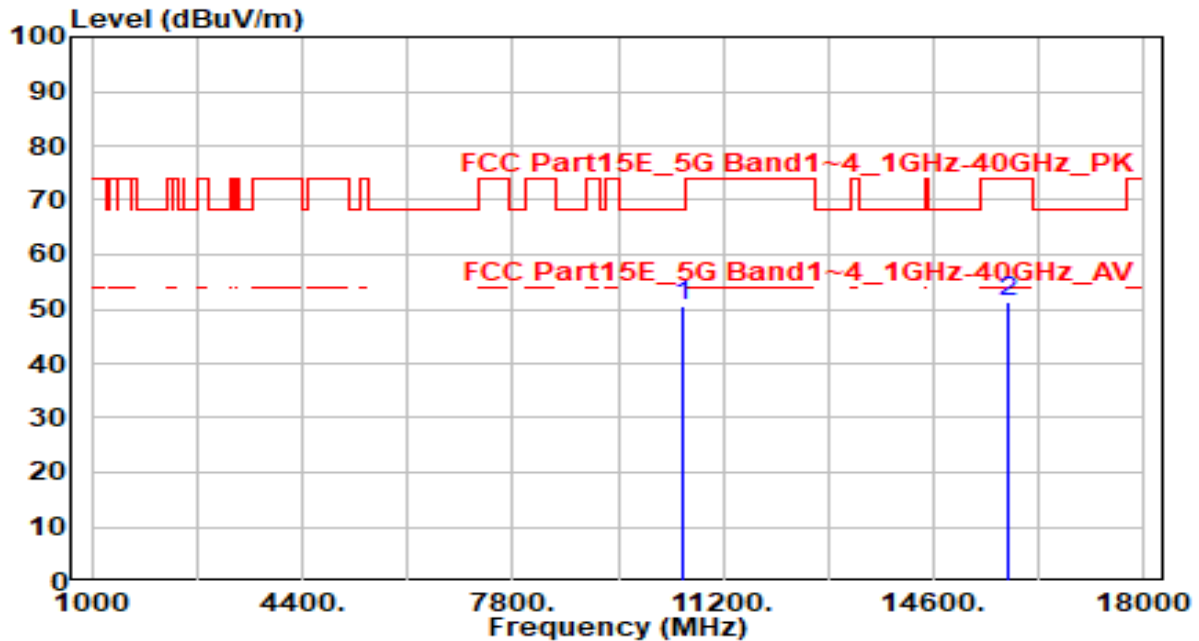


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	45.22	5.25	50.48	-17.72	68.20	100	45	Peak
2		15810.000	44.26	6.88	51.14	-22.86	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

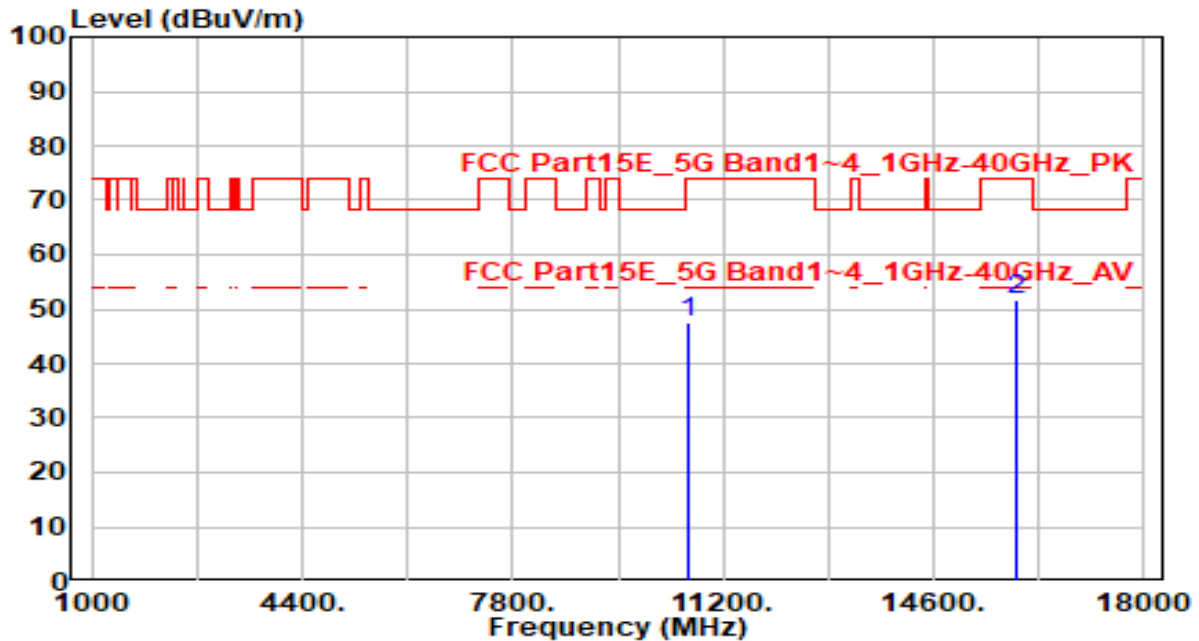


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.21	5.26	47.47	-26.53	74.00	100	170	Peak
2	* 15930.000	44.57	6.98	51.55	-22.45	74.00	100	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

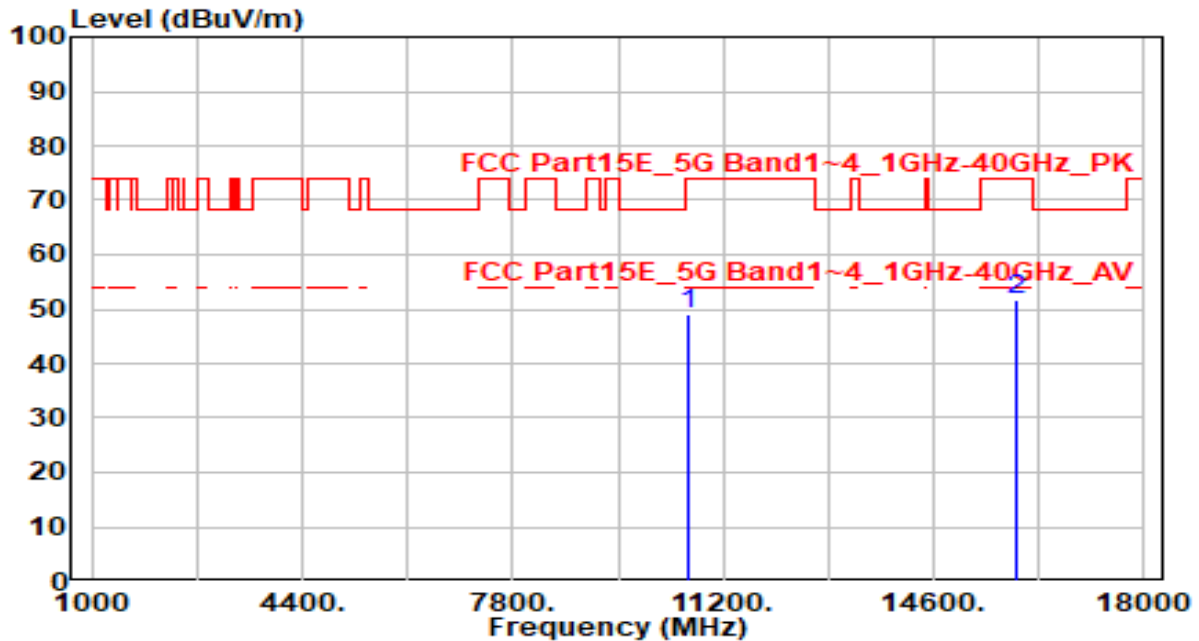


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	43.61	5.26	48.87	-25.13	74.00	100	60	Peak
2	* 15930.000	44.73	6.98	51.71	-22.29	74.00	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

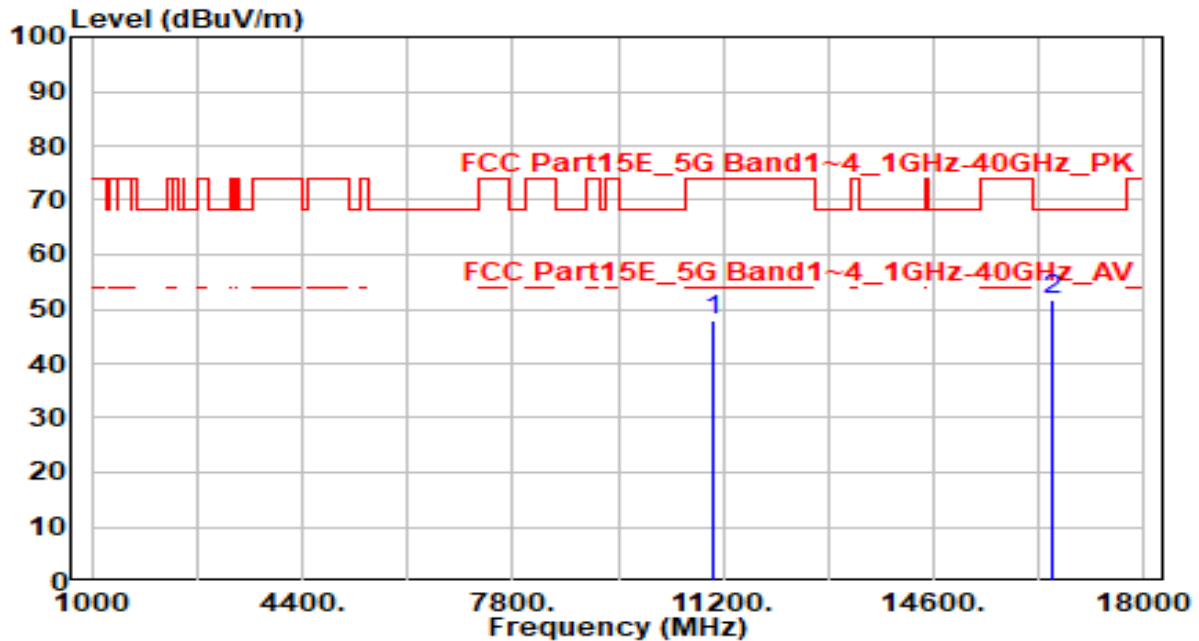


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	42.18	5.58	47.76	-26.24	74.00	100	360	Peak
2	* 16530.000	44.21	7.39	51.60	-16.60	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

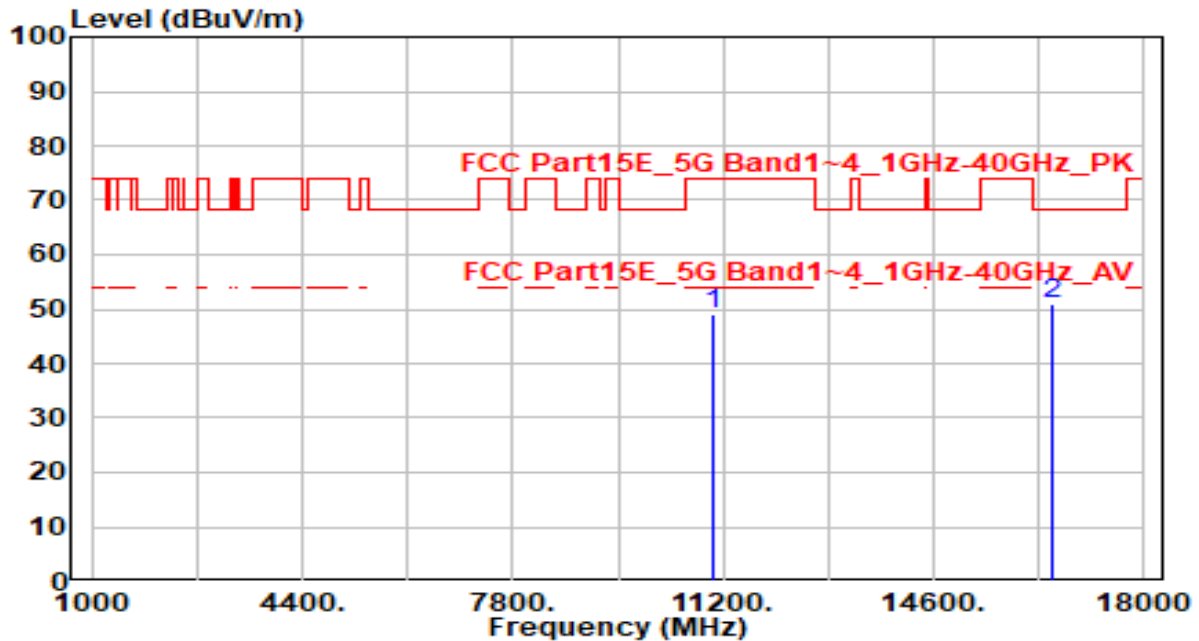


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	43.37	5.58	48.95	-25.05	74.00	100	355	Peak
2	* 16530.000	43.59	7.39	50.98	-17.22	68.20	100	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

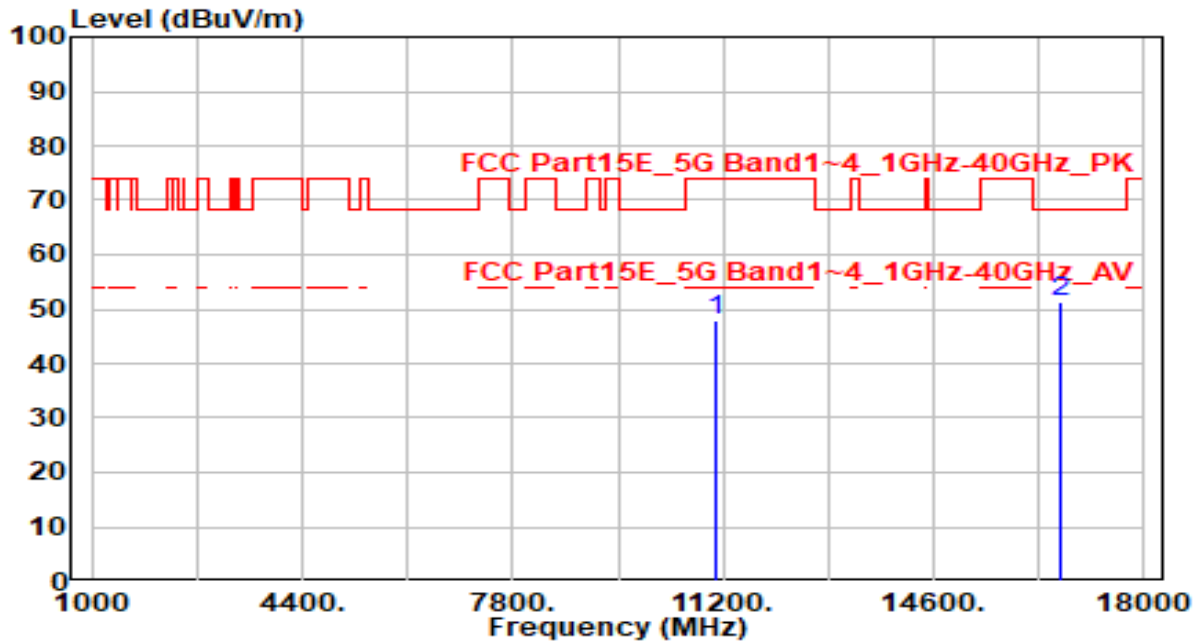


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	42.42	5.67	48.09	-25.91	74.00	100	90	Peak
2	* 16650.000	43.92	7.58	51.50	-16.70	68.20	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

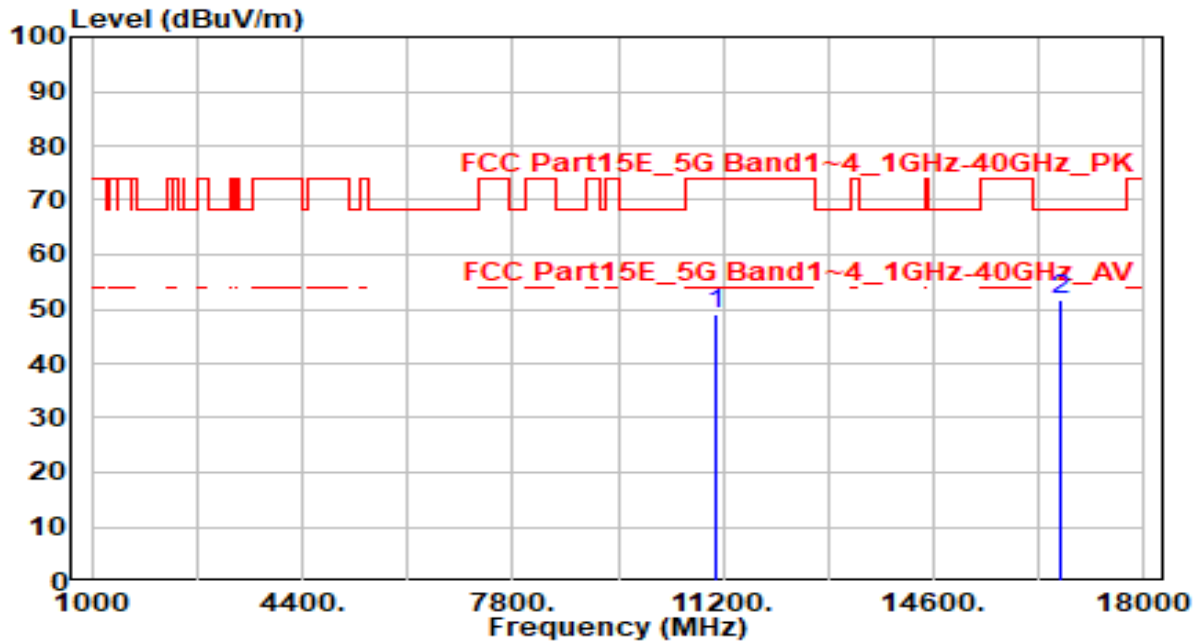


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	43.42	5.67	49.08	-24.92	74.00	100	50	Peak
2	* 16650.000	44.30	7.58	51.88	-16.32	68.20	100	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

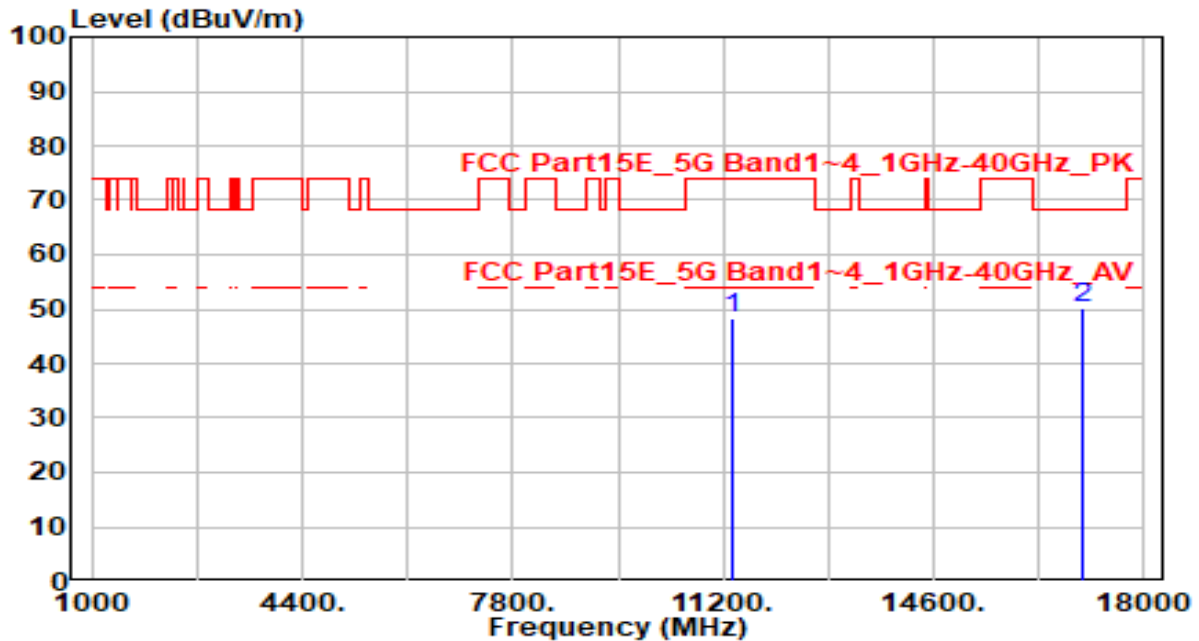


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.36	5.92	48.28	-25.72	74.00	100	290	Peak
2	* 17010.000	43.68	6.44	50.12	-18.08	68.20	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

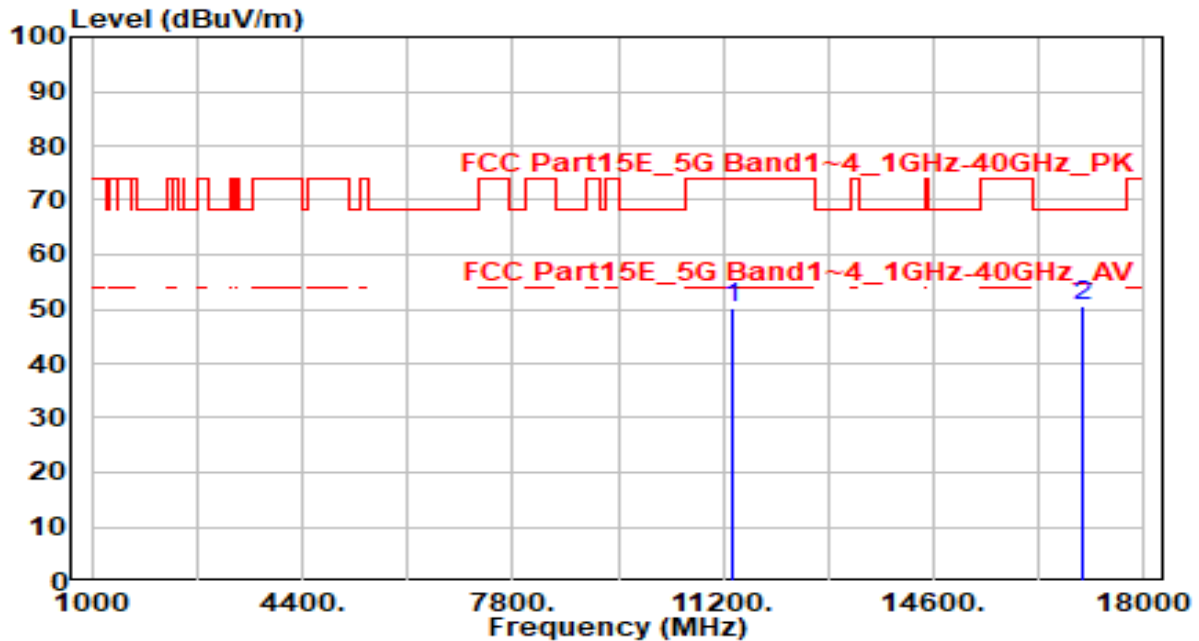


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	44.32	5.92	50.24	-23.76	74.00	100	30	Peak
2	* 17010.000	44.30	6.44	50.74	-17.46	68.20	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

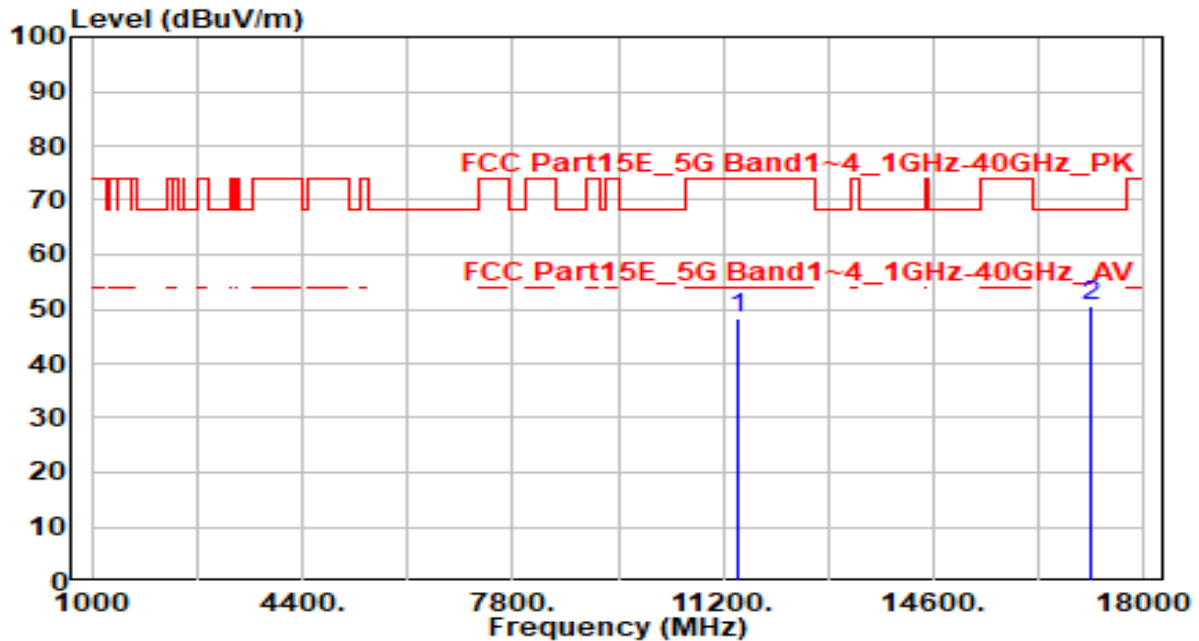


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.22	5.98	48.20	-25.80	74.00	100	150	Peak
2	* 17130.000	44.55	6.07	50.62	-17.58	68.20	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

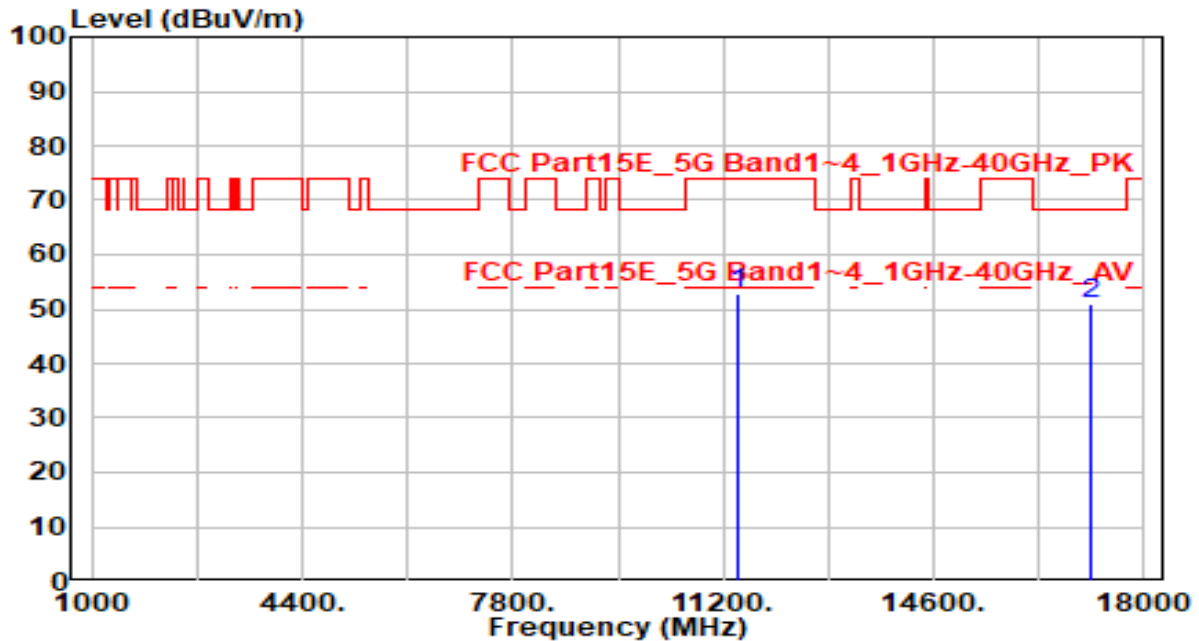


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	46.76	5.98	52.73	-21.27	74.00	100	15	Peak
2	* 17130.000	44.76	6.07	50.83	-17.37	68.20	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

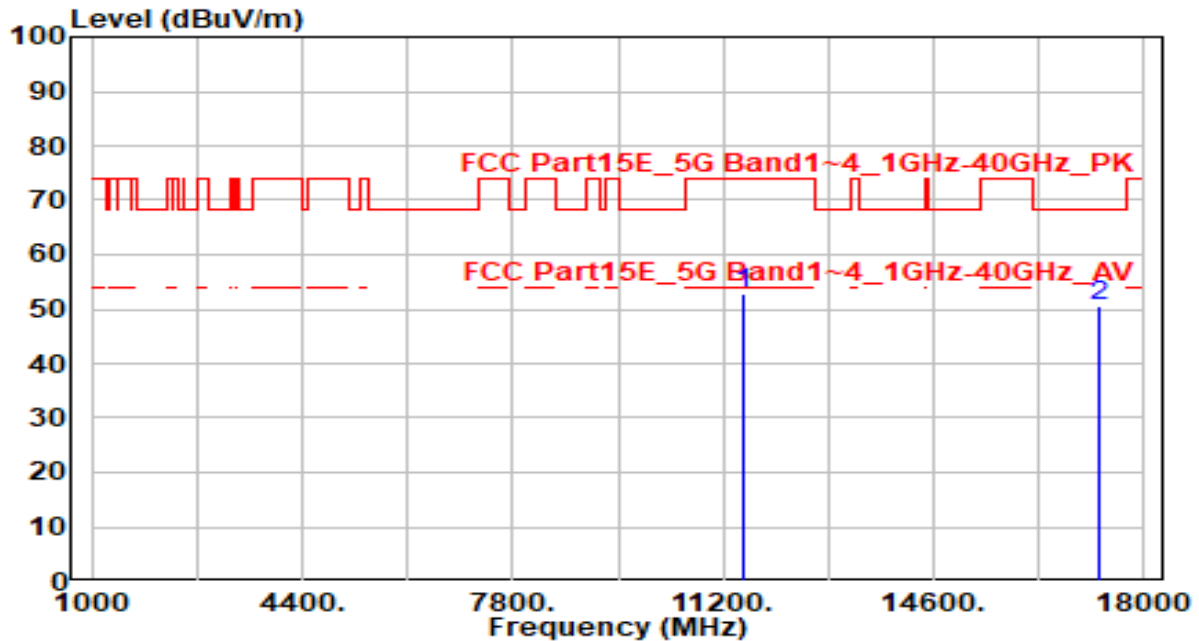


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	46.90	5.94	52.84	-21.16	74.00	100	65	Peak
2	* 17265.000	44.83	5.72	50.55	-17.65	68.20	100	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

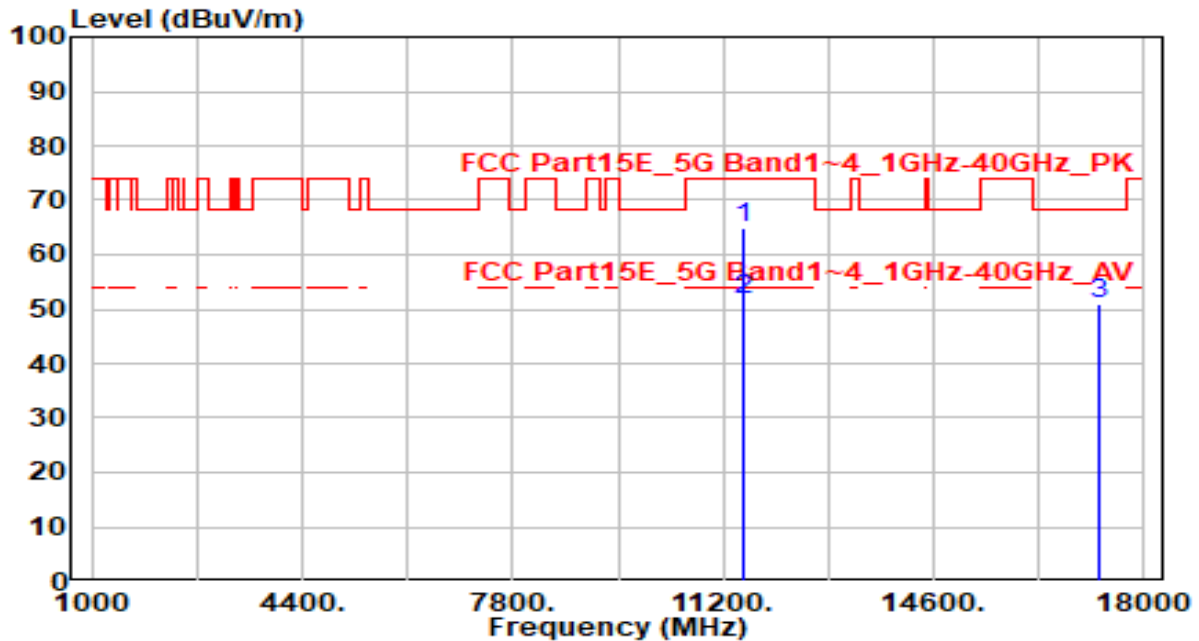


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11510.000	58.93	5.94	64.87	-9.13	74.00	210	15	Peak
2	*	11510.000	45.82	5.94	51.76	-2.24	54.00	210	15	Average
3		17265.000	45.14	5.72	50.86	-17.34	68.20	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

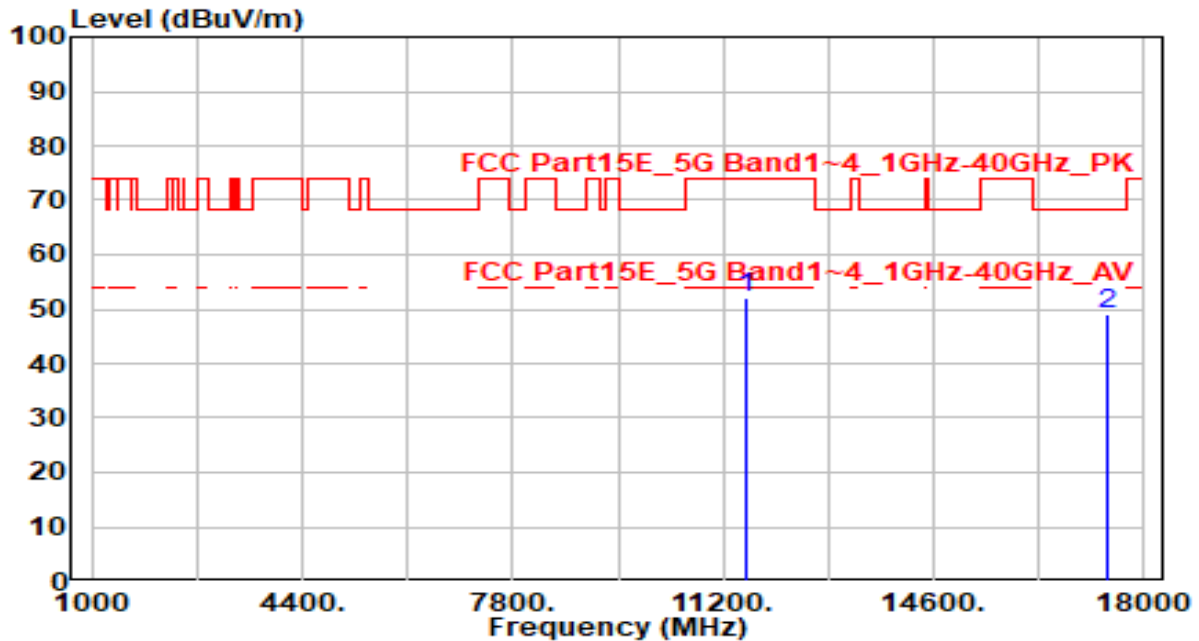


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	46.26	5.90	52.16	-21.84	74.00	100	180	Peak
2	* 17385.000	43.69	5.47	49.16	-19.04	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

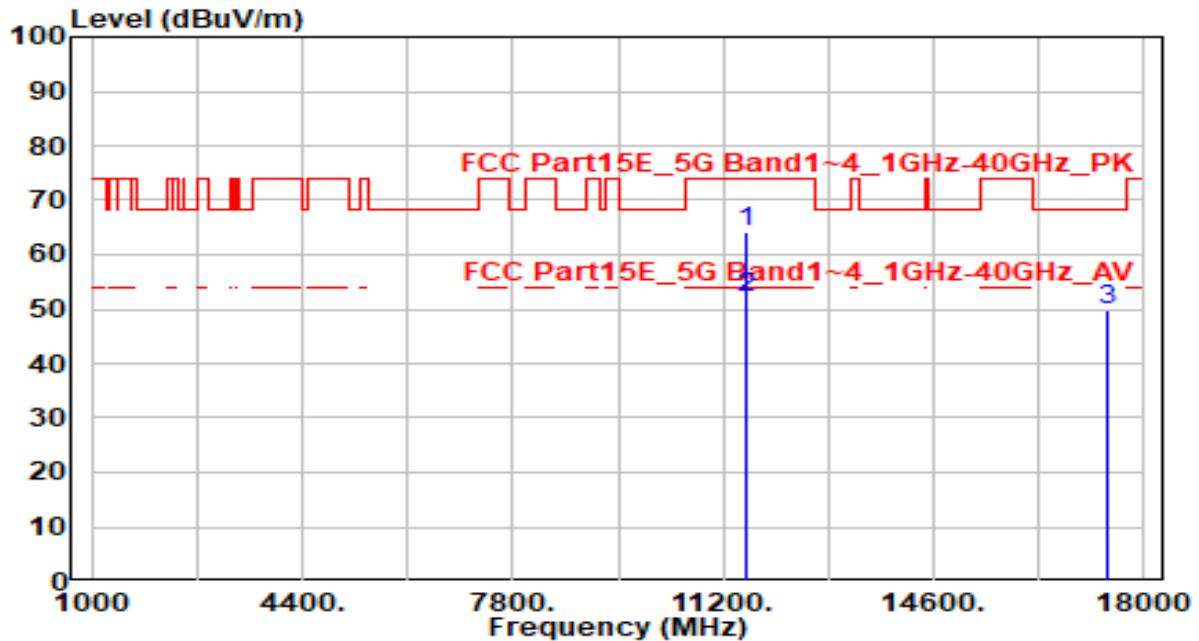


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11590.000	58.41	5.90	64.31	-9.69	74.00	210	15	Peak
2	*	11590.000	46.12	5.90	52.02	-1.98	54.00	210	15	Average
3		17385.000	44.37	5.47	49.84	-18.36	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

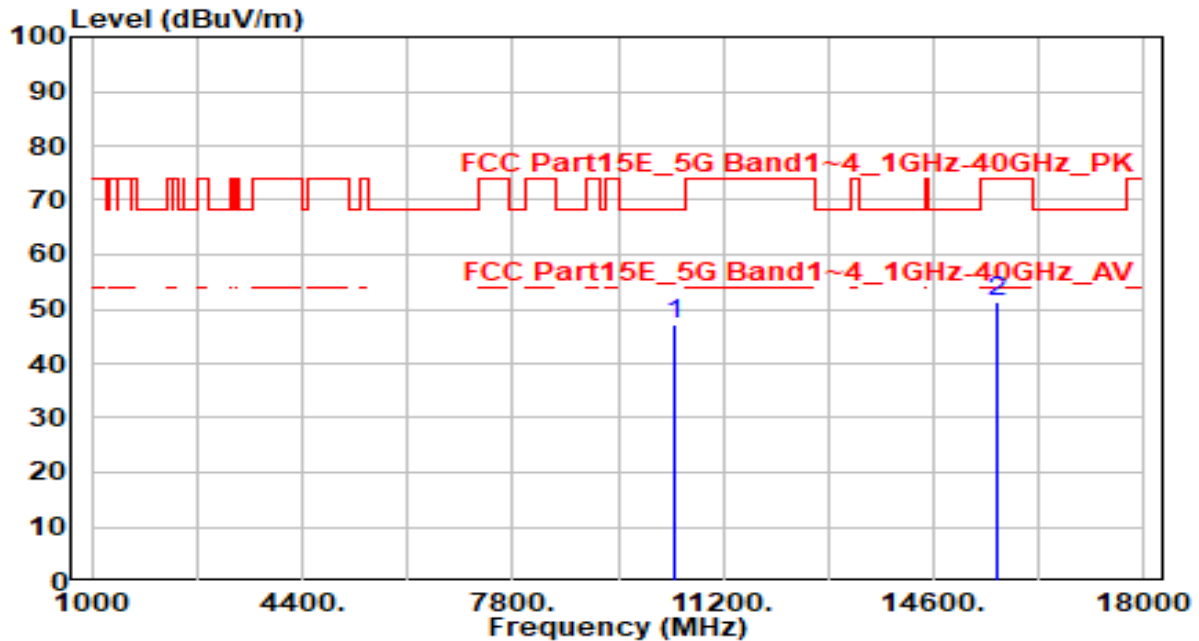


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.80	5.29	47.09	-21.11	68.20	100	345	Peak
2		15630.000	44.81	6.49	51.30	-22.70	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

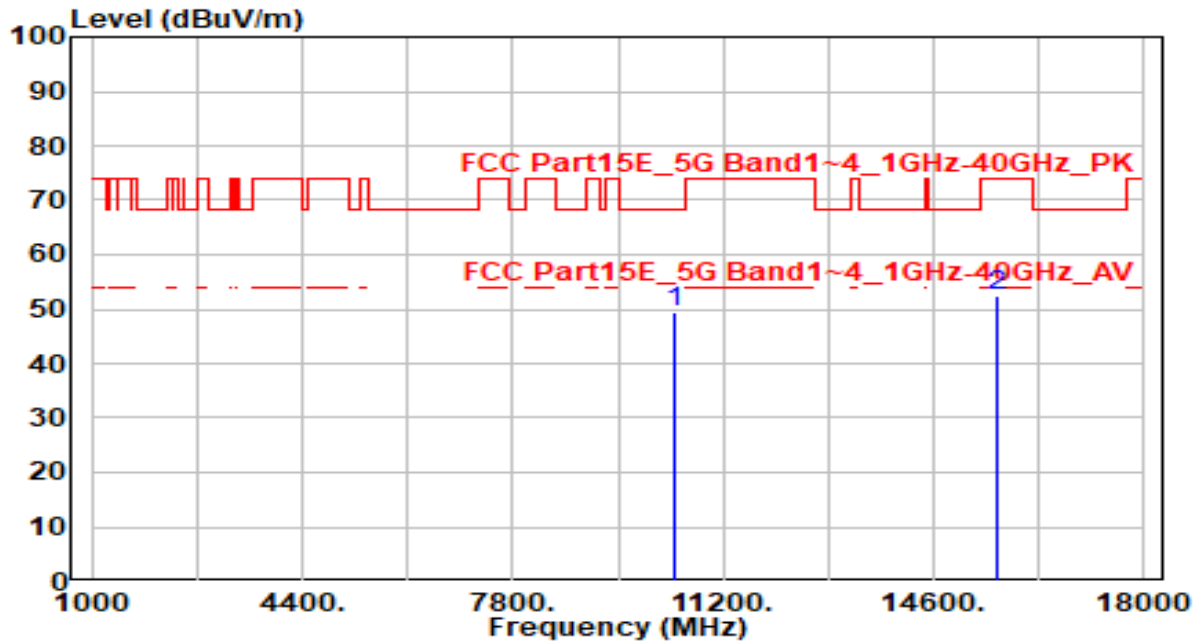


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	44.12	5.29	49.40	-18.80	68.20	100	330	Peak
2		15630.000	46.15	6.49	52.64	-21.36	74.00	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

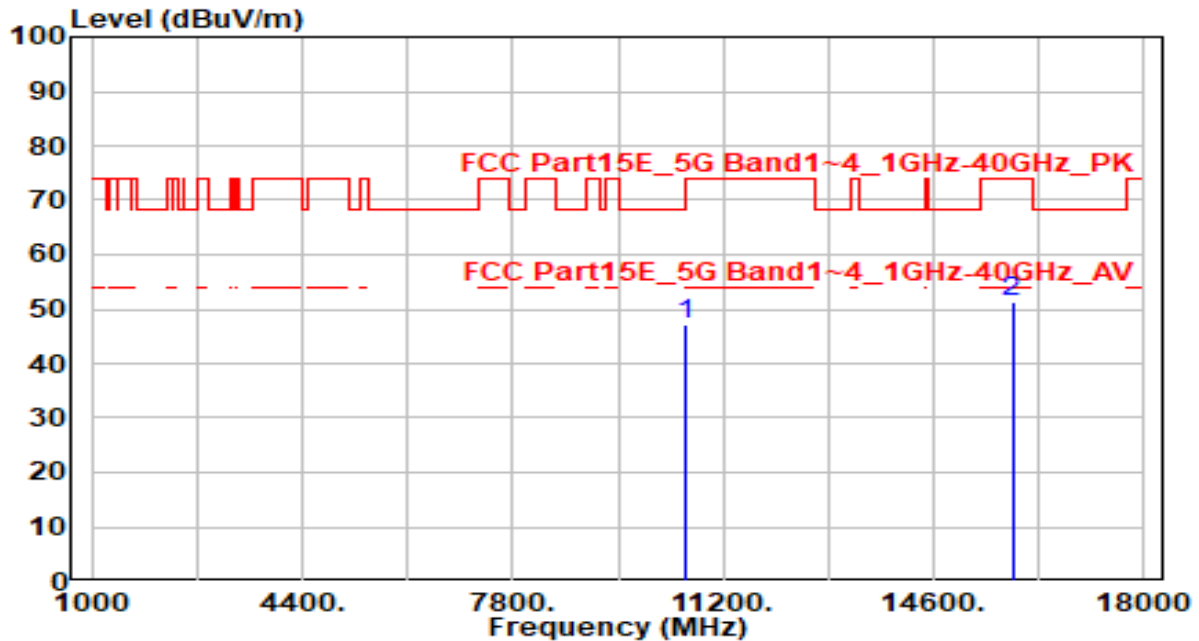


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.01	5.25	47.26	-20.94	68.20	100	5	Peak
2		15870.000	44.35	6.93	51.28	-22.72	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

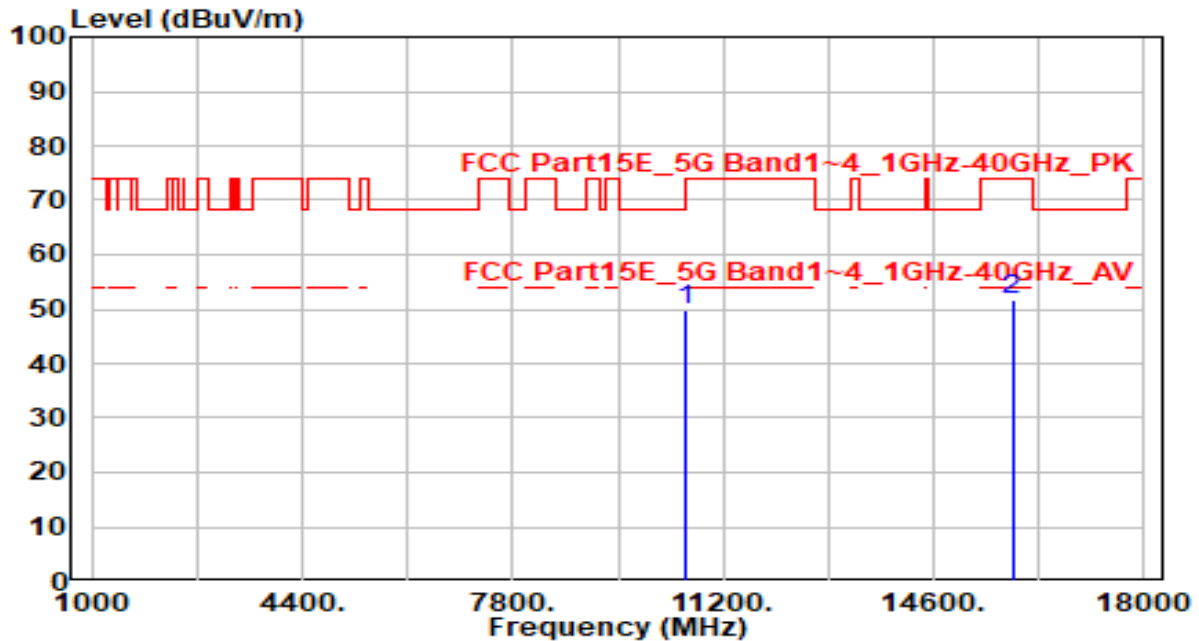


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	44.50	5.25	49.76	-18.44	68.20	100	75	Peak
2		15870.000	44.72	6.93	51.65	-22.35	74.00	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

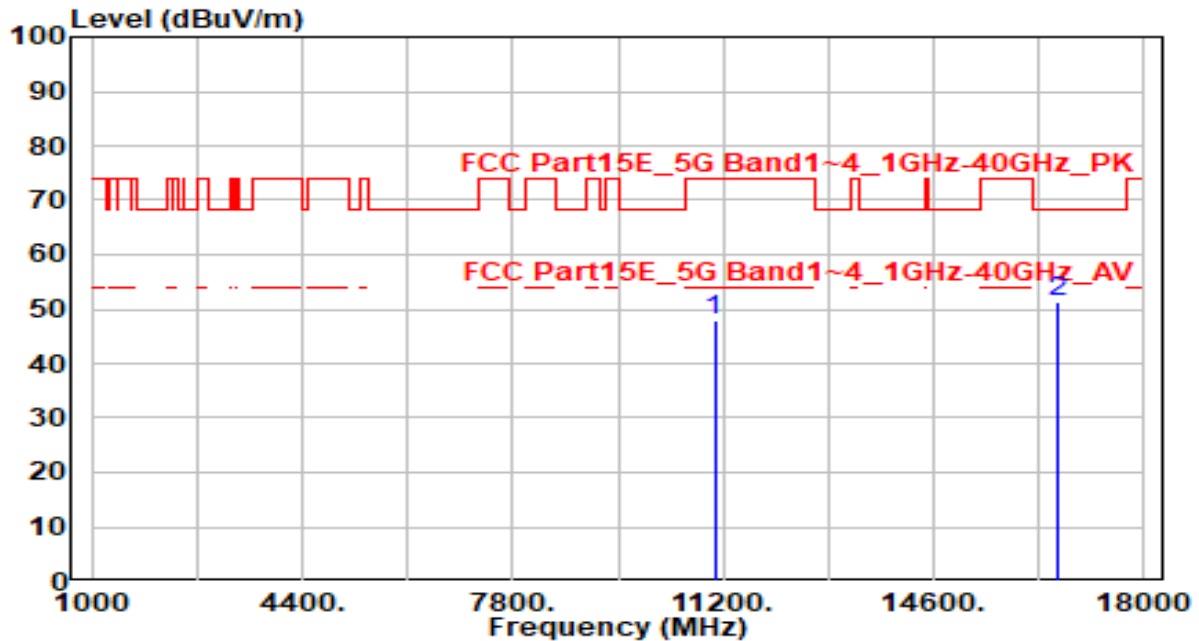


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	42.17	5.62	47.80	-26.20	74.00	100	280	Peak
2	* 16590.000	43.93	7.48	51.41	-16.79	68.20	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

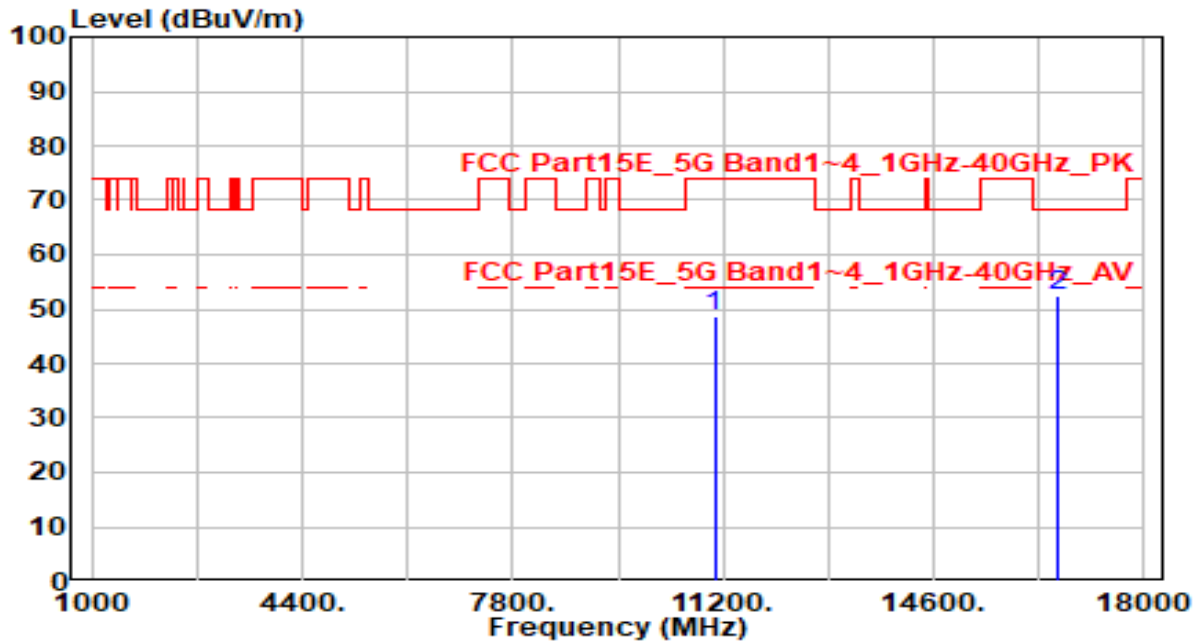


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	42.99	5.62	48.61	-25.39	74.00	100	305	Peak
2	* 16590.000	44.93	7.48	52.41	-15.79	68.20	100	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

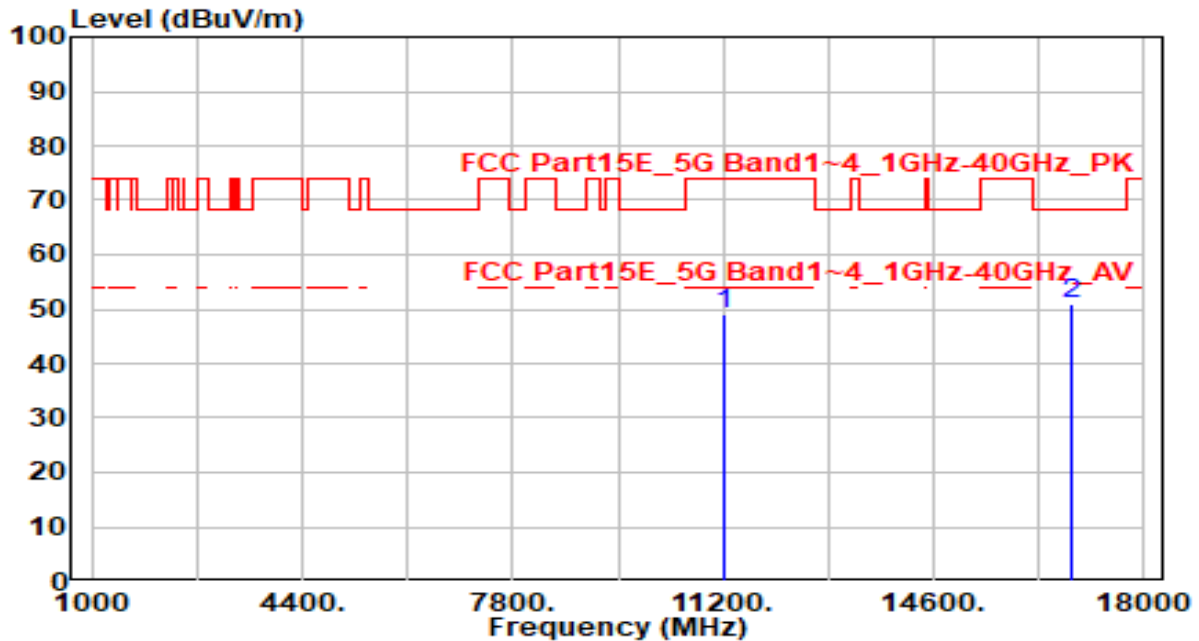


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	43.14	5.79	48.93	-25.07	74.00	100	35	Peak
2	* 16830.000	43.91	7.17	51.09	-17.12	68.20	100	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

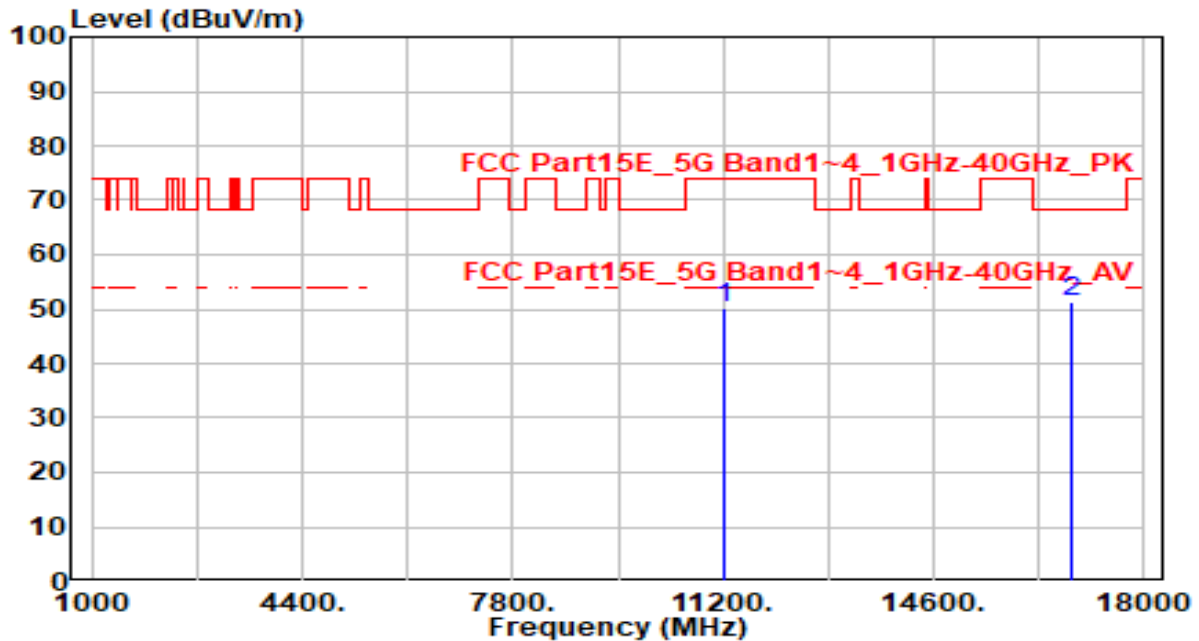


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	44.34	5.79	50.13	-23.87	74.00	100	25	Peak
2	* 16830.000	44.05	7.17	51.22	-16.98	68.20	100	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

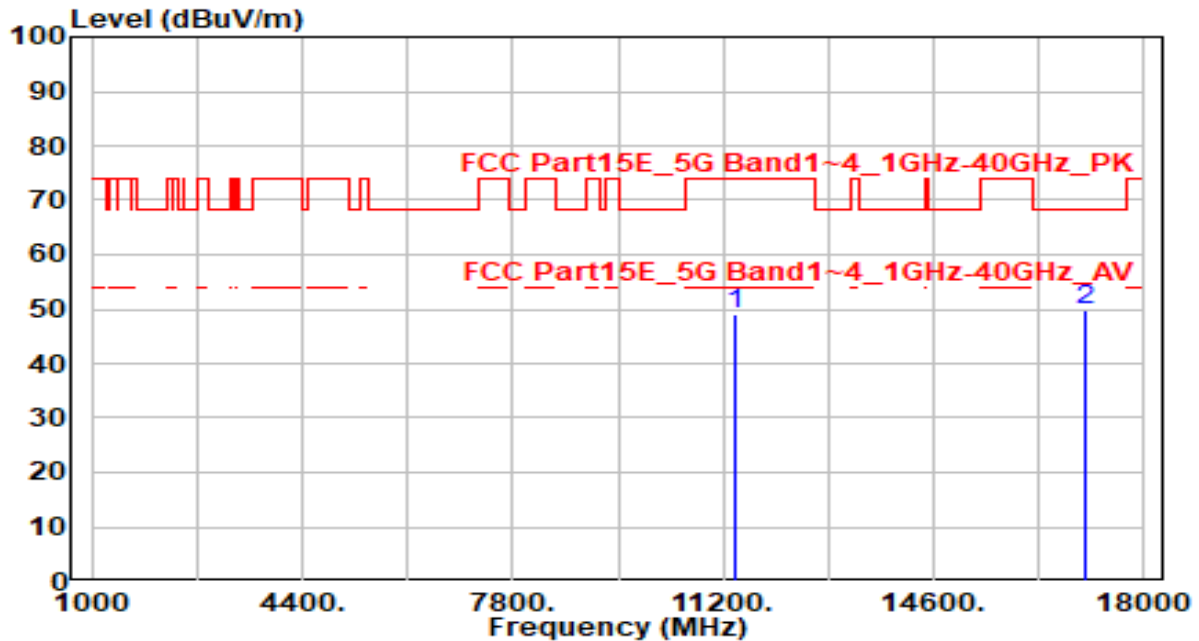


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	43.15	5.96	49.11	-24.89	74.00	100	270	Peak
2	* 17070.000	43.60	6.26	49.86	-18.34	68.20	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

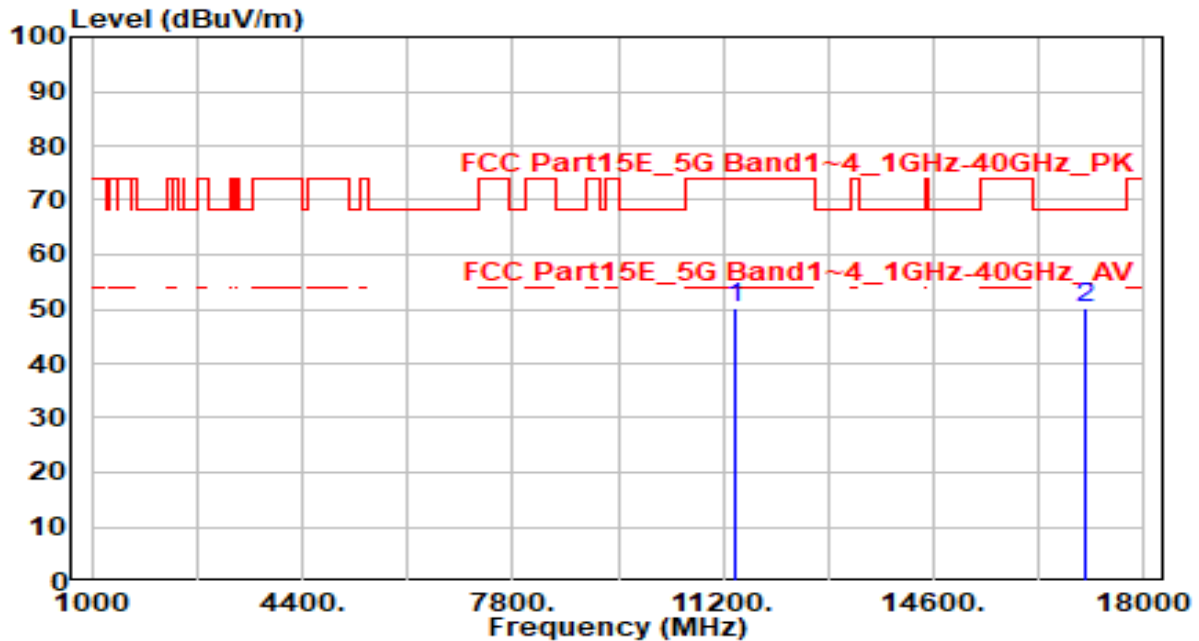


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	44.23	5.96	50.19	-23.81	74.00	100	30	Peak
2	* 17070.000	43.96	6.26	50.22	-17.98	68.20	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

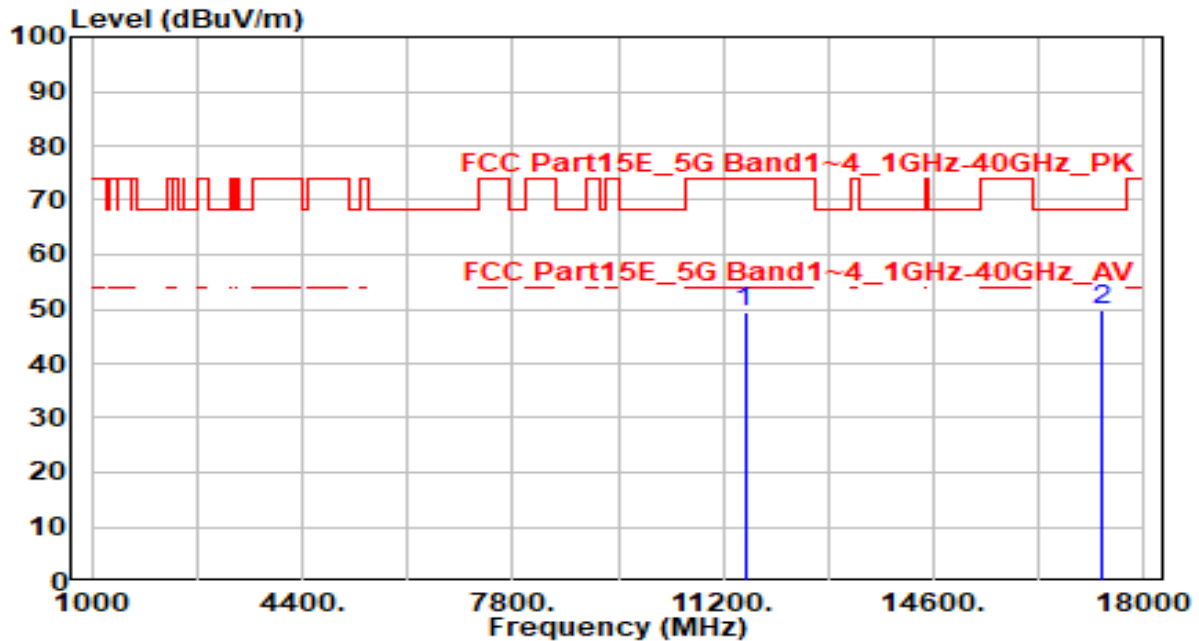


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	43.36	5.92	49.28	-24.72	74.00	100	195	Peak
2	* 17325.000	44.17	5.60	49.77	-18.43	68.20	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

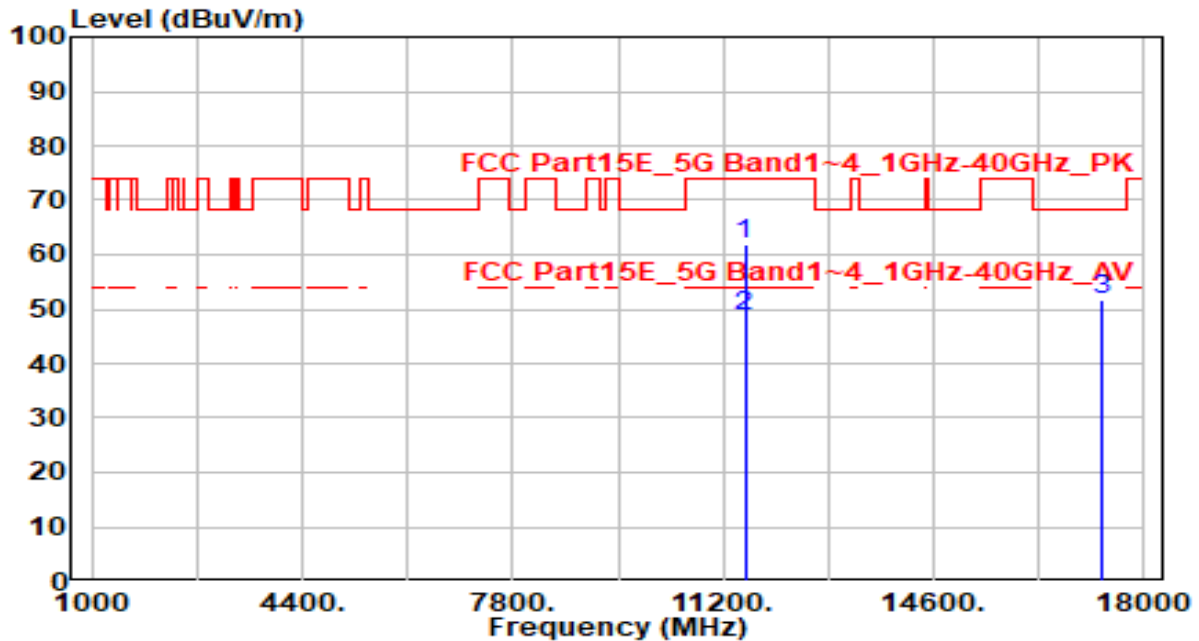


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11550.000	55.99	5.92	61.91	-12.09	74.00	200	15	Peak
2	*	11550.000	42.68	5.92	48.60	-5.40	54.00	200	15	Average
3		17325.000	46.24	5.60	51.83	-16.37	68.20	100	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

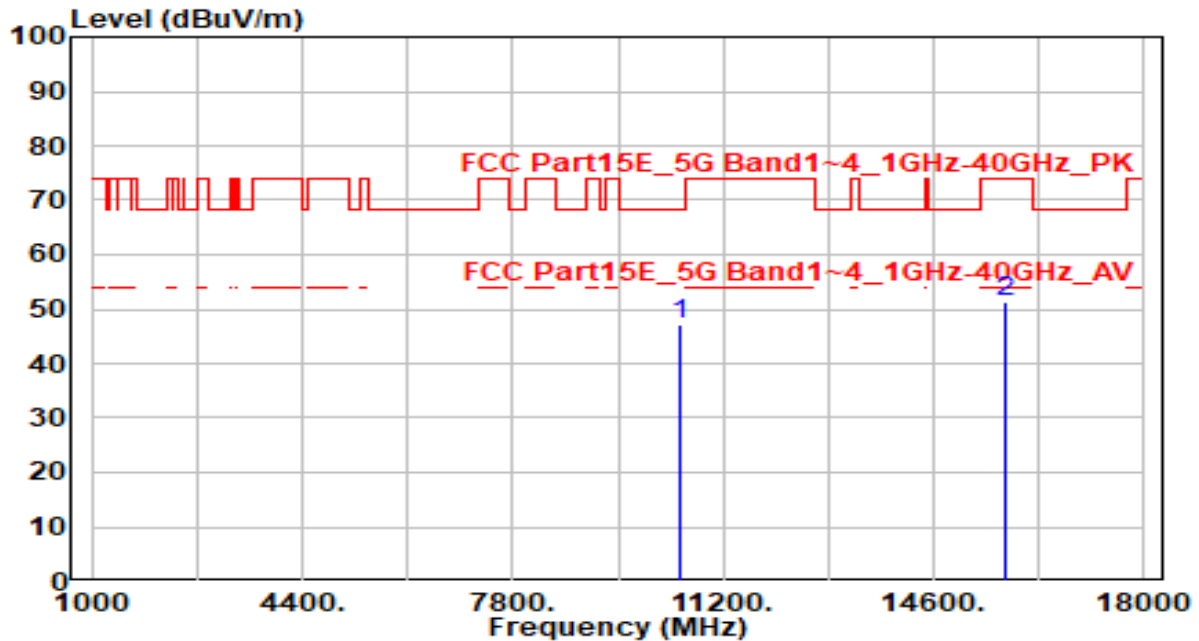


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.91	5.25	47.16	-21.04	68.20	100	205	Peak
2		15750.000	44.66	6.76	51.42	-22.58	74.00	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

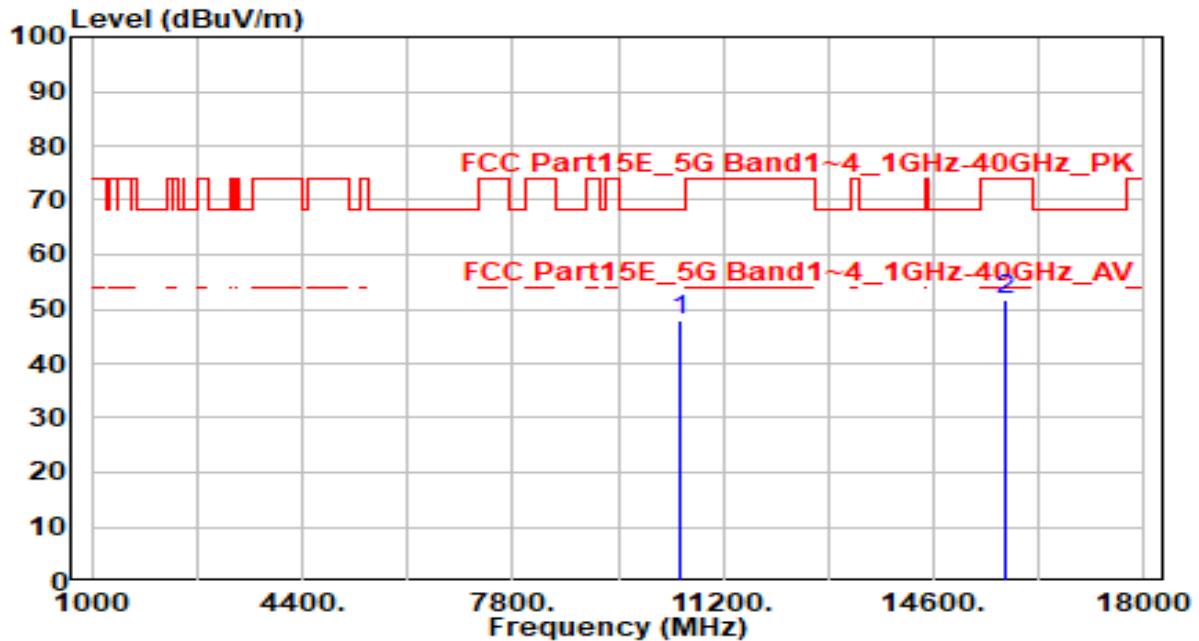


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	42.65	5.25	47.90	-20.30	68.20	100	340	Peak
2		15750.000	44.85	6.76	51.61	-22.39	74.00	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

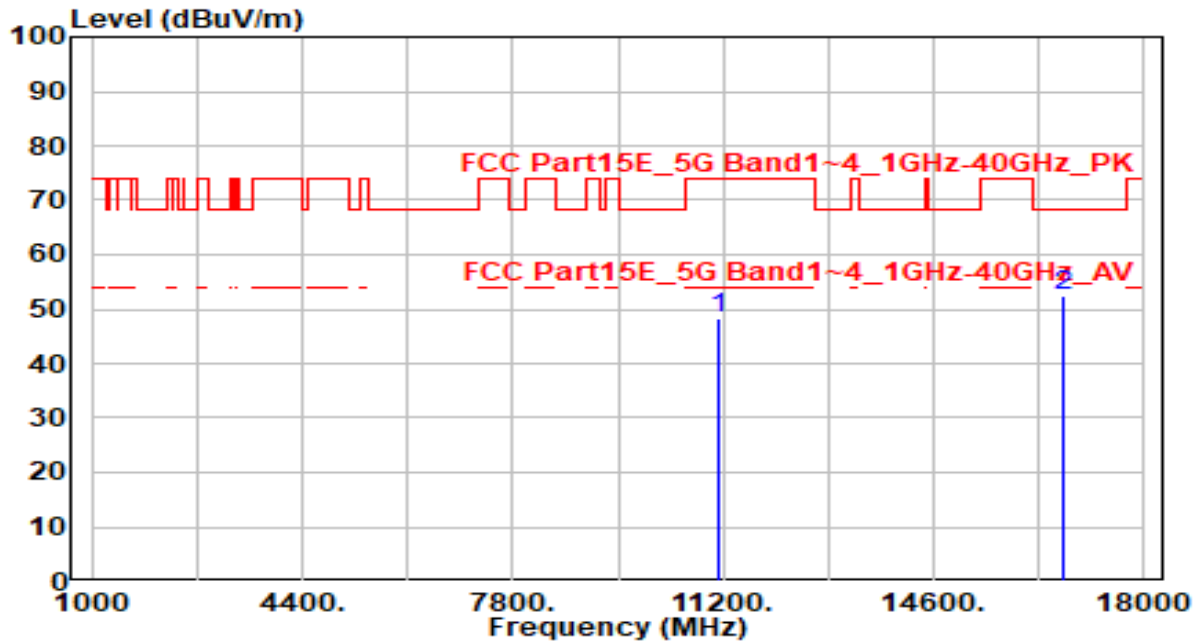


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	42.67	5.71	48.38	-25.62	74.00	100	10	Peak
2	* 16710.000	44.64	7.67	52.31	-15.89	68.20	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

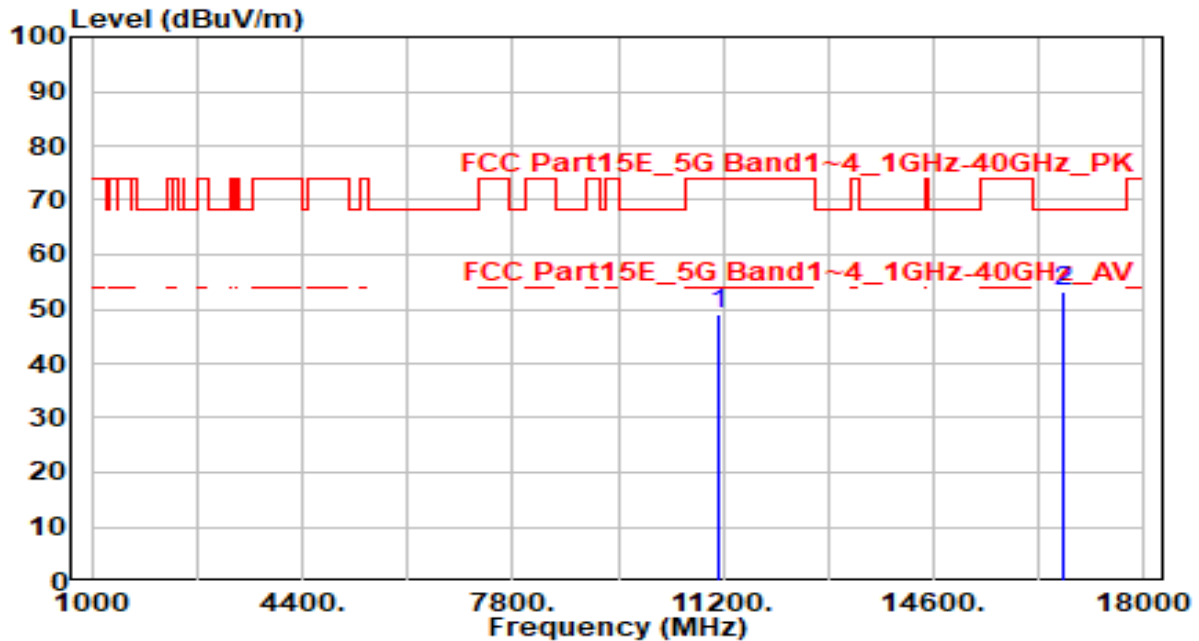


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	43.22	5.71	48.92	-25.08	74.00	100	15	Peak
2	* 16710.000	45.64	7.67	53.31	-14.89	68.20	100	300	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-20
Factor	BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

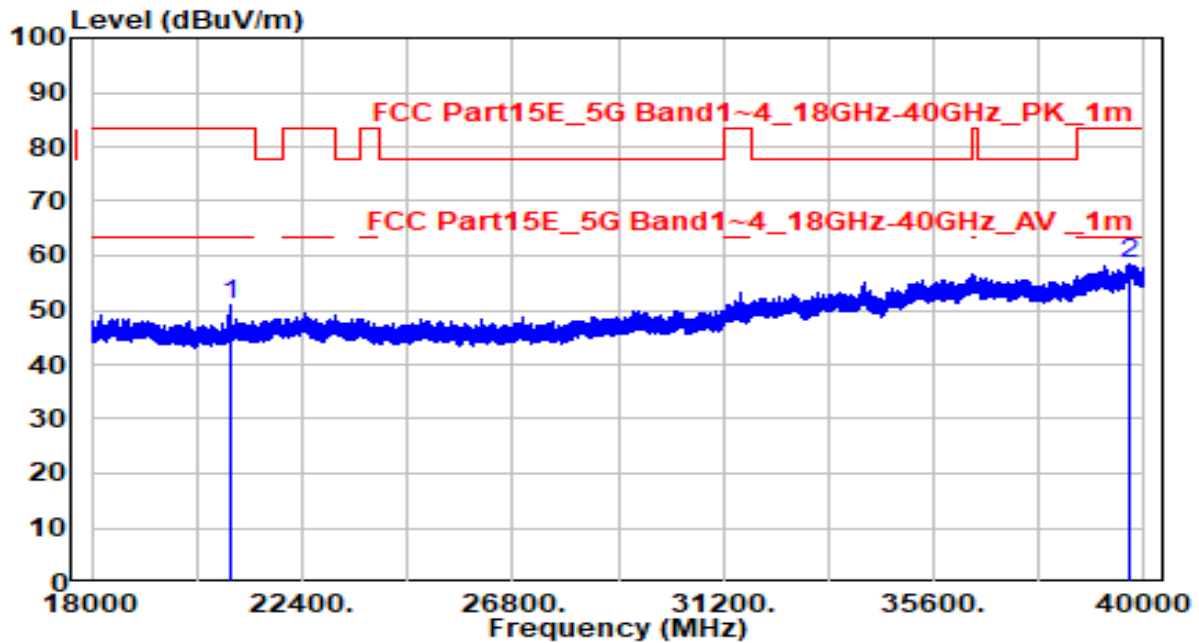


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		20891.630	40.29	10.84	51.13	-32.37	83.50	100	360	Peak
2	*	39671.380	34.49	23.94	58.43	-25.07	83.50	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-20
Factor	BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

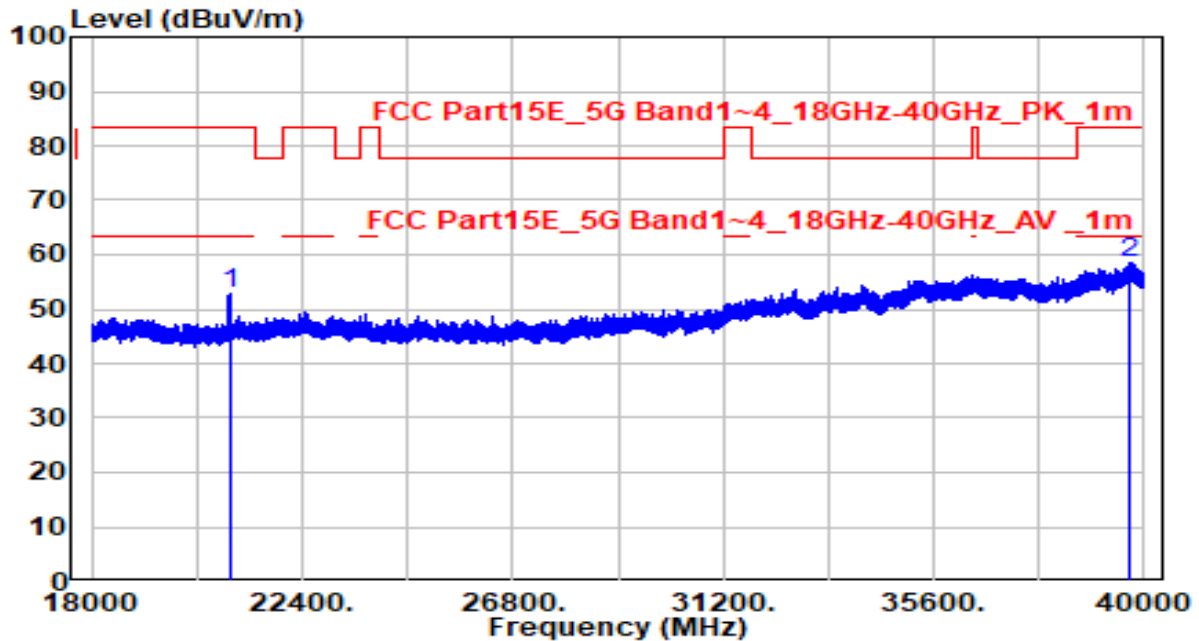

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	20879.250	41.84	10.83	52.67	-30.83	83.50	100	360	Peak
2	* 39712.630	34.60	23.99	58.58	-24.92	83.50	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing

linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2.Test Procedure Used

KDB 789033 D02v02r01- Section II) G

7.8.3.Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.8.4.Test Setup

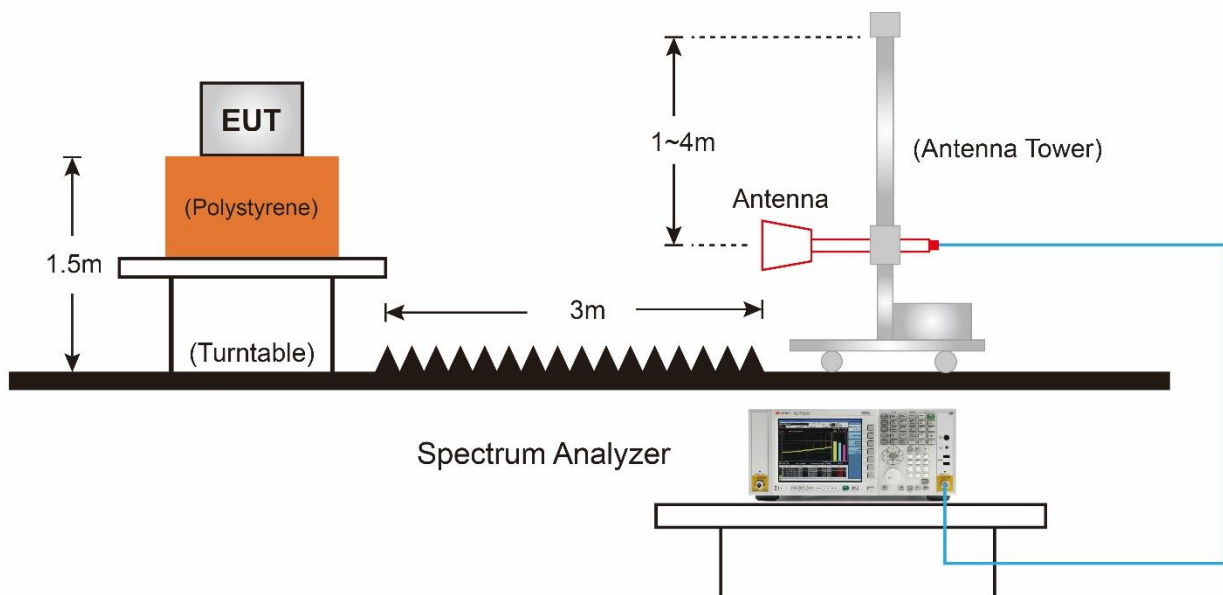

7.8.5. Test Result

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

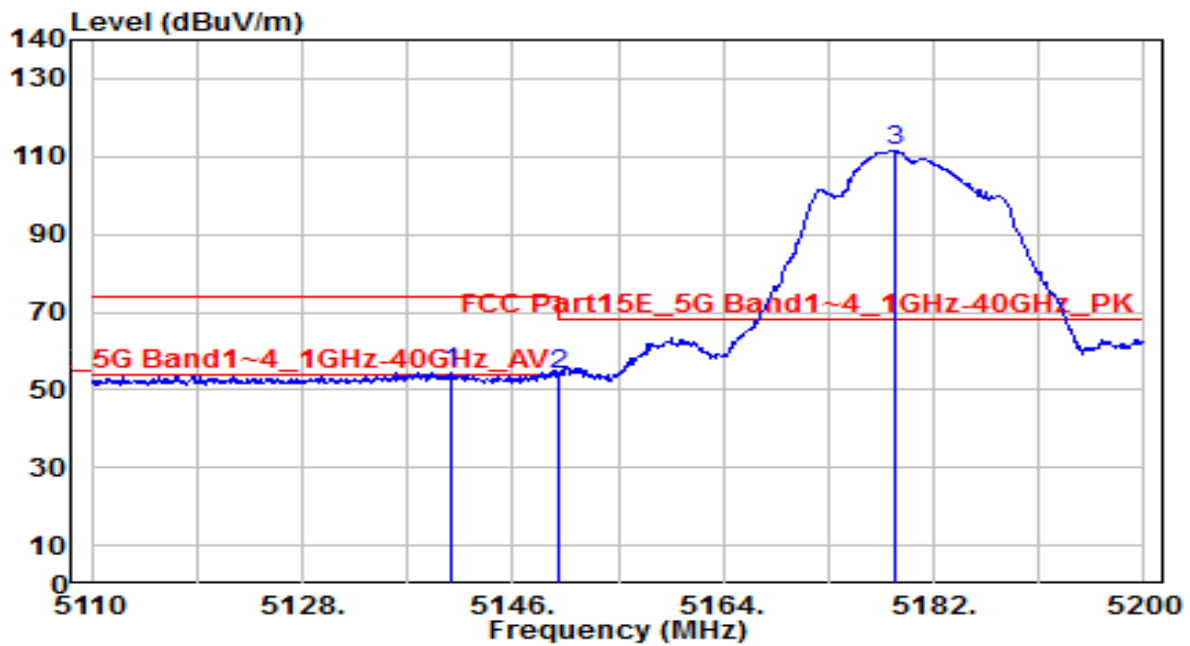


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.780	53.85	0.78	54.64	-19.36	74.00	285	95	Peak
2		5150.000	53.35	0.80	54.14	-19.86	74.00	285	95	Peak
3		5178.760	110.76	0.83	111.59	N/A	N/A	285	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

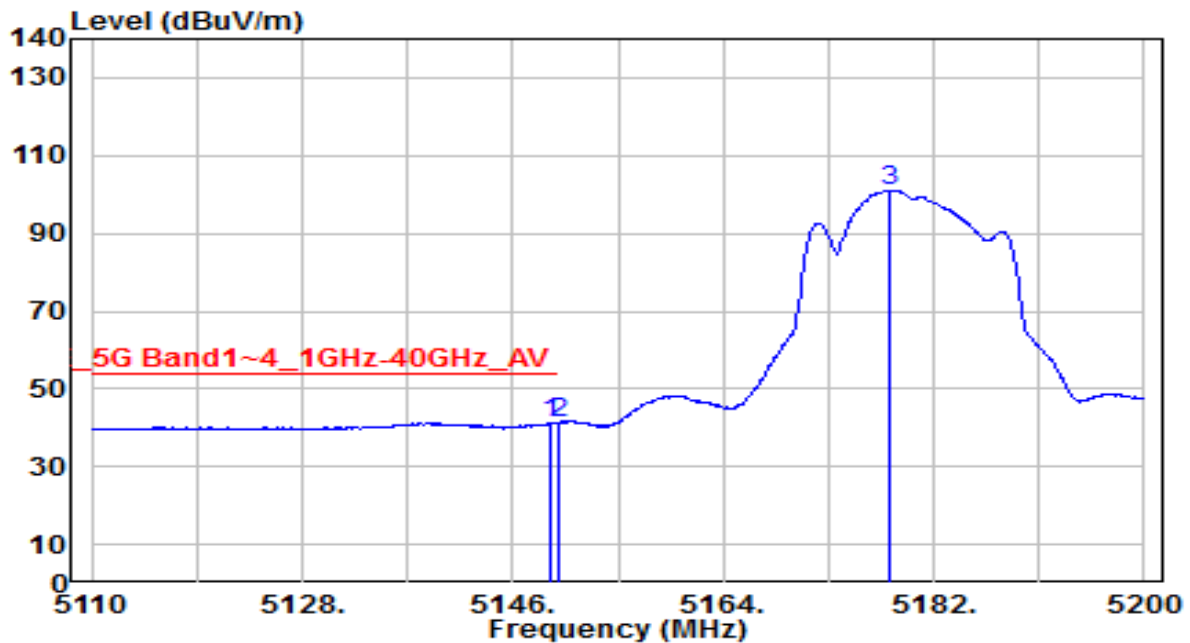


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	40.50	0.80	41.30	-12.70	54.00	285	95	Average
2		5150.000	40.37	0.80	41.17	-12.83	54.00	285	95	Average
3		5178.130	100.22	0.83	101.05	N/A	N/A	285	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

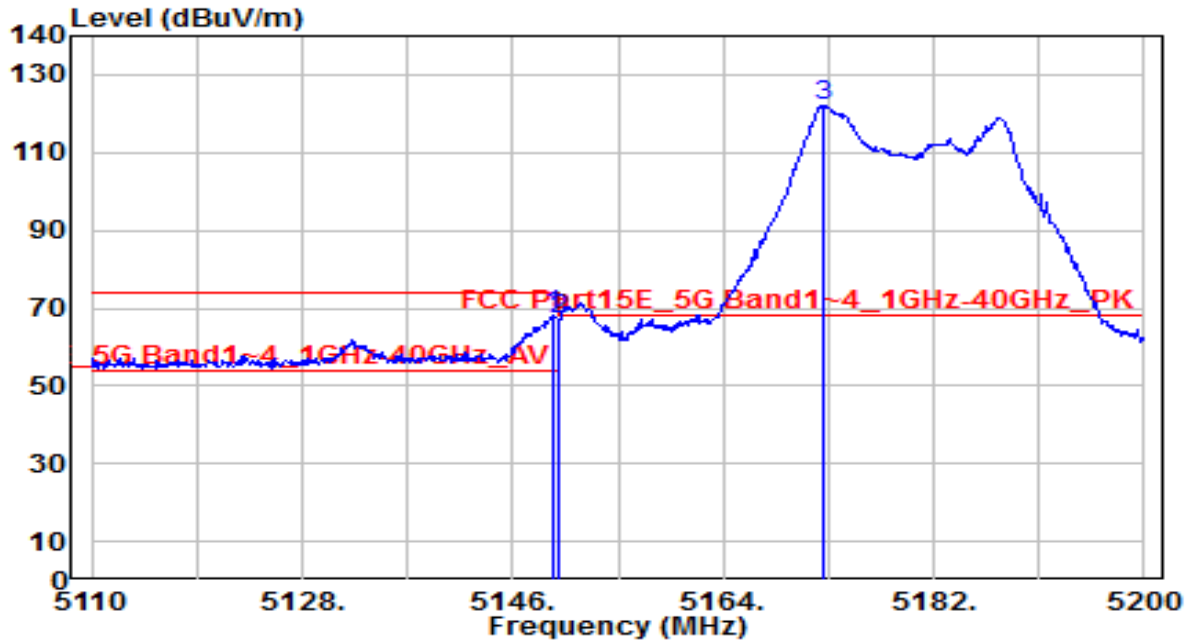


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	67.47	0.80	68.27	-5.73	74.00	100	340	Peak
2		5150.000	66.26	0.80	67.06	-6.94	74.00	100	340	Peak
3		5172.550	121.26	0.82	122.09	N/A	N/A	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

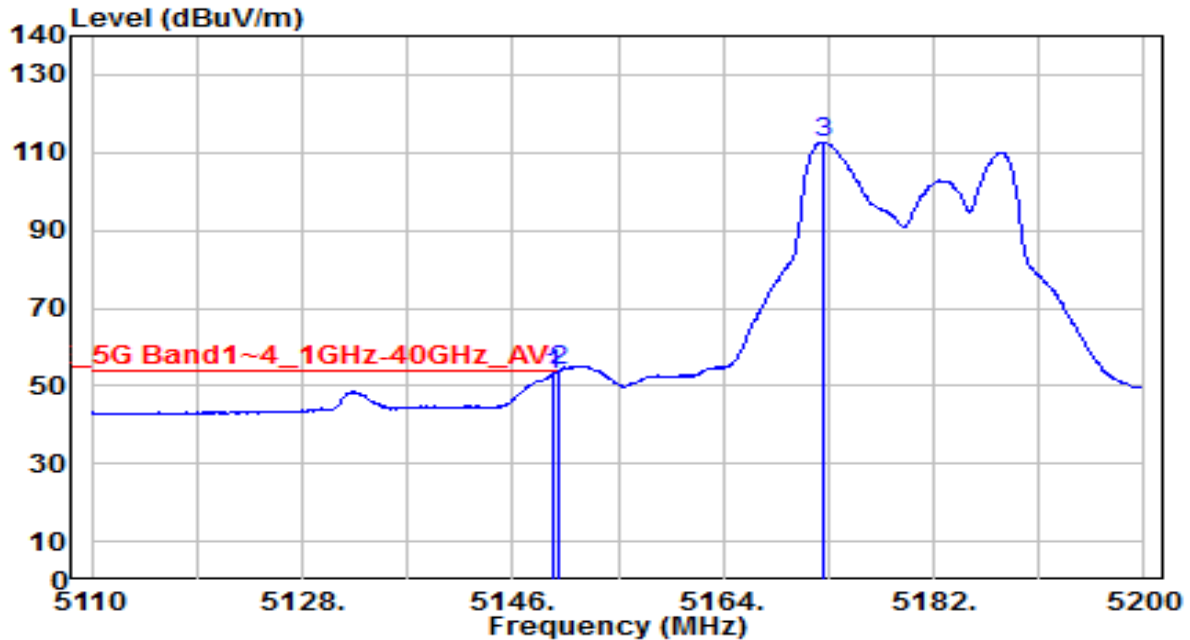


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	52.11	0.80	52.90	-1.10	54.00	100	340	Average
2	*	5150.000	53.05	0.80	53.85	-0.15	54.00	100	340	Average
3		5172.550	111.97	0.82	112.79	N/A	N/A	100	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

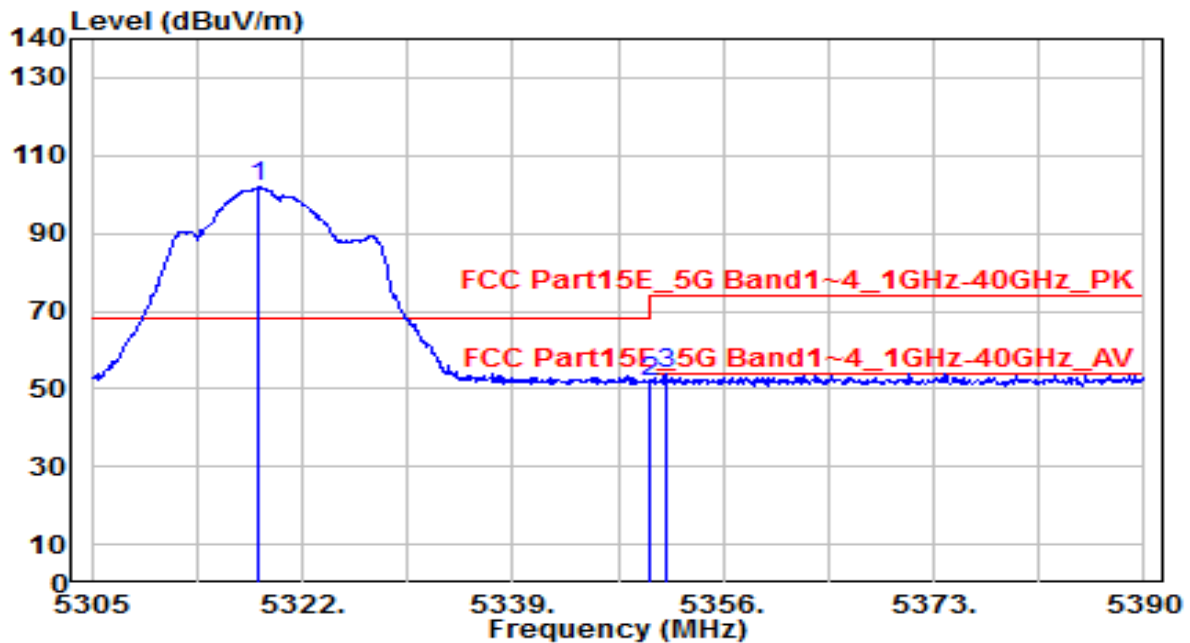


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.515	101.18	0.65	101.82	N/A	N/A	290	95	Peak
2	5350.000	50.92	0.59	51.52	-22.48	74.00	290	95	Peak
3	* 5351.325	53.47	0.59	54.06	-19.94	74.00	290	95	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

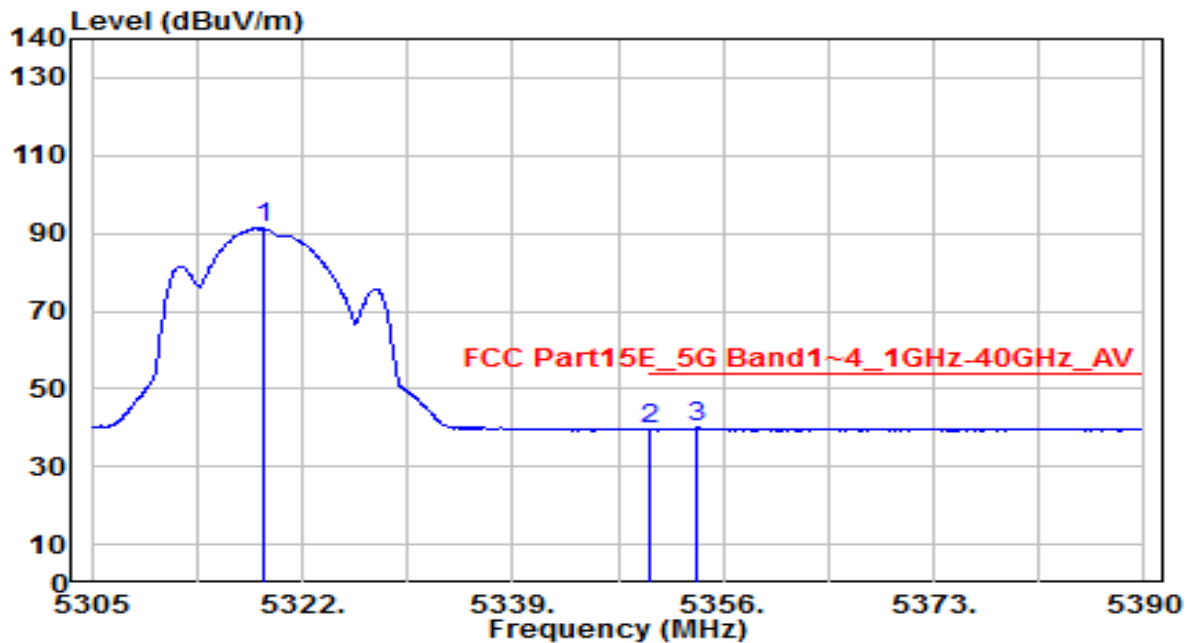


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.940	90.63	0.65	91.28	N/A	N/A	290	95	Average
2	5350.000	39.07	0.59	39.66	-14.34	54.00	290	95	Average
3	* 5353.875	39.51	0.59	40.10	-13.90	54.00	290	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

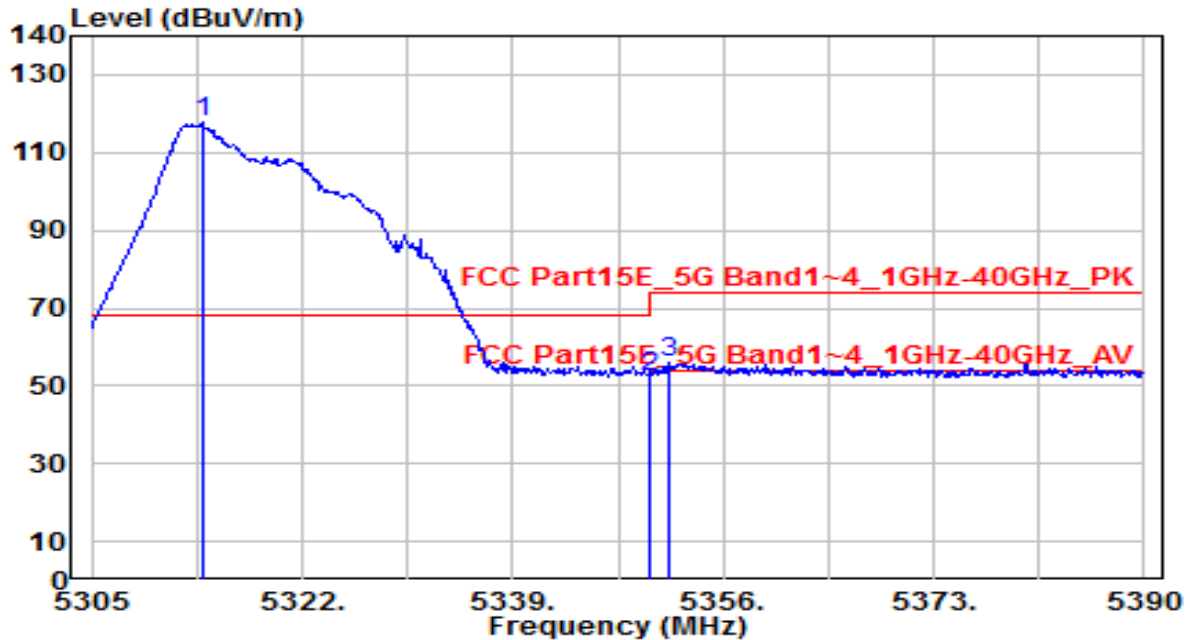


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.925	116.99	0.66	117.65	N/A	N/A	130	335	Peak
2	5350.000	51.88	0.59	52.47	-21.53	74.00	130	335	Peak
3	* 5351.665	55.47	0.59	56.06	-17.94	74.00	130	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

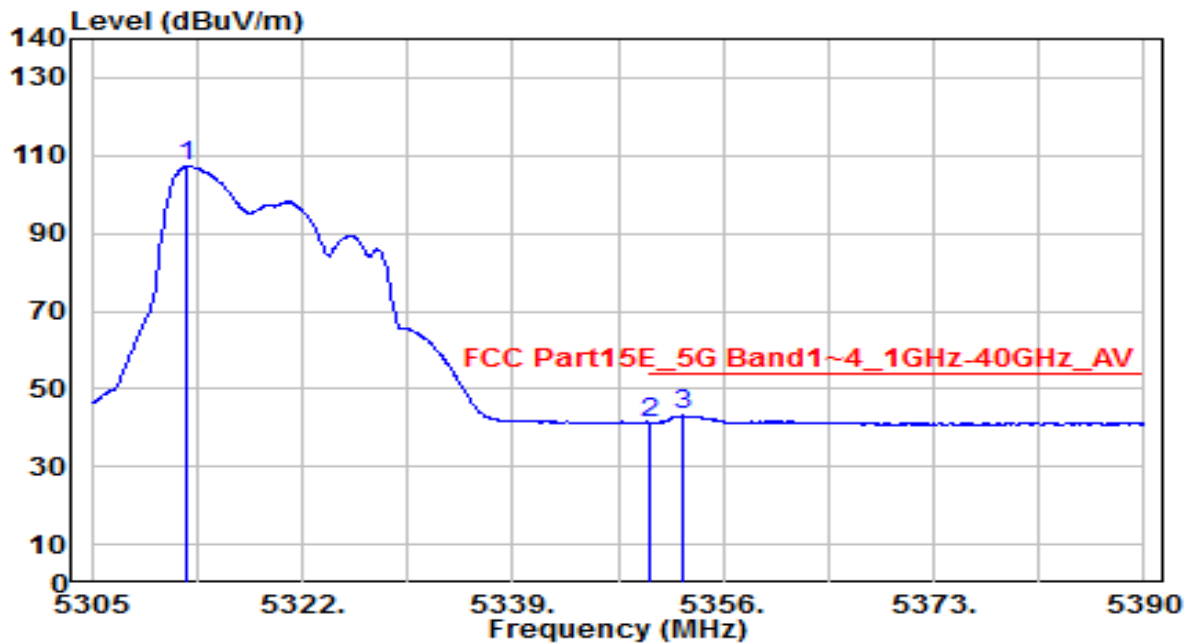


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.735	106.65	0.66	107.31	N/A	N/A	130	335	Average
2	5350.000	40.79	0.59	41.39	-12.61	54.00	130	335	Average
3	* 5352.685	42.58	0.59	43.16	-10.84	54.00	130	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

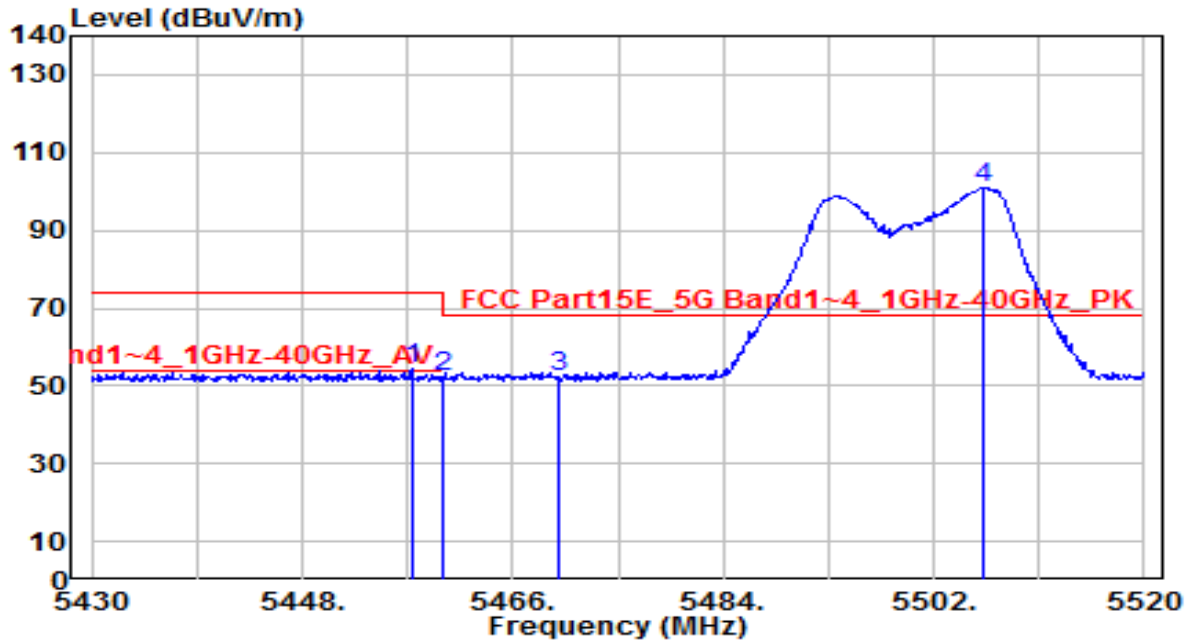


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.360	53.50	0.75	54.25	-19.75	74.00	115	125	Peak
2	5460.000	51.40	0.76	52.16	-21.84	74.00	115	125	Peak
3	* 5470.000	51.30	0.80	52.10	-16.10	68.20	115	125	Peak
4	5506.320	100.04	0.96	101.00	N/A	N/A	115	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

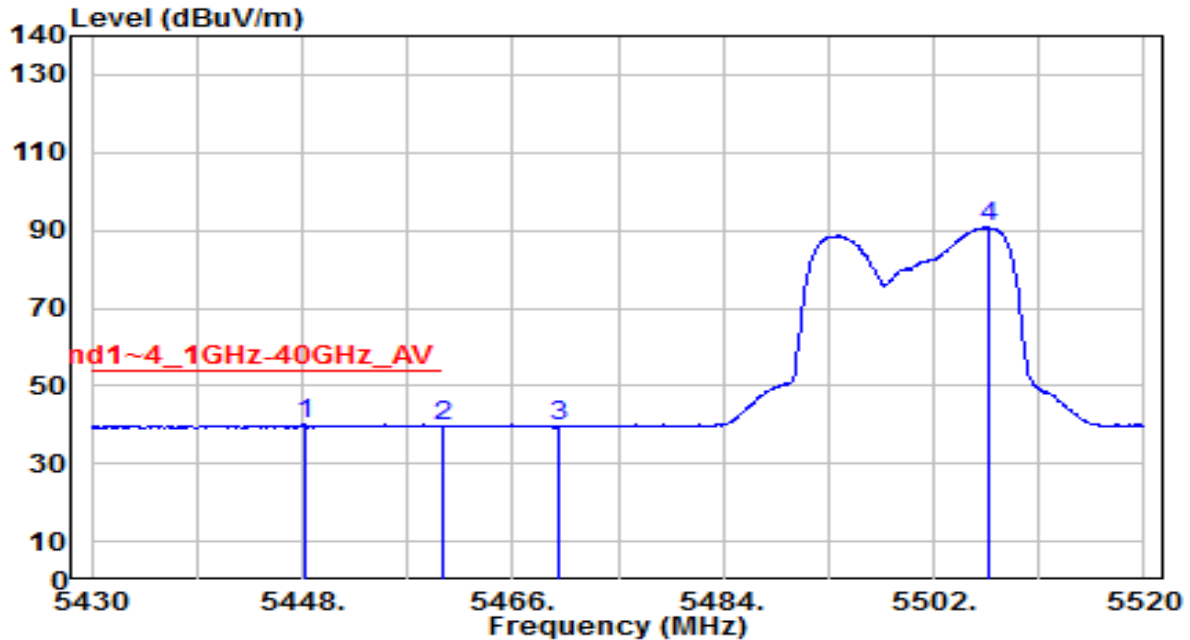


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.180	39.28	0.71	39.99	-14.01	54.00	115	125	Average
2		5460.000	38.98	0.76	39.74	-14.26	54.00	115	125	Average
3		5470.000	38.78	0.80	39.58	N/A	N/A	115	125	Average
4		5506.770	89.79	0.96	90.75	N/A	N/A	115	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

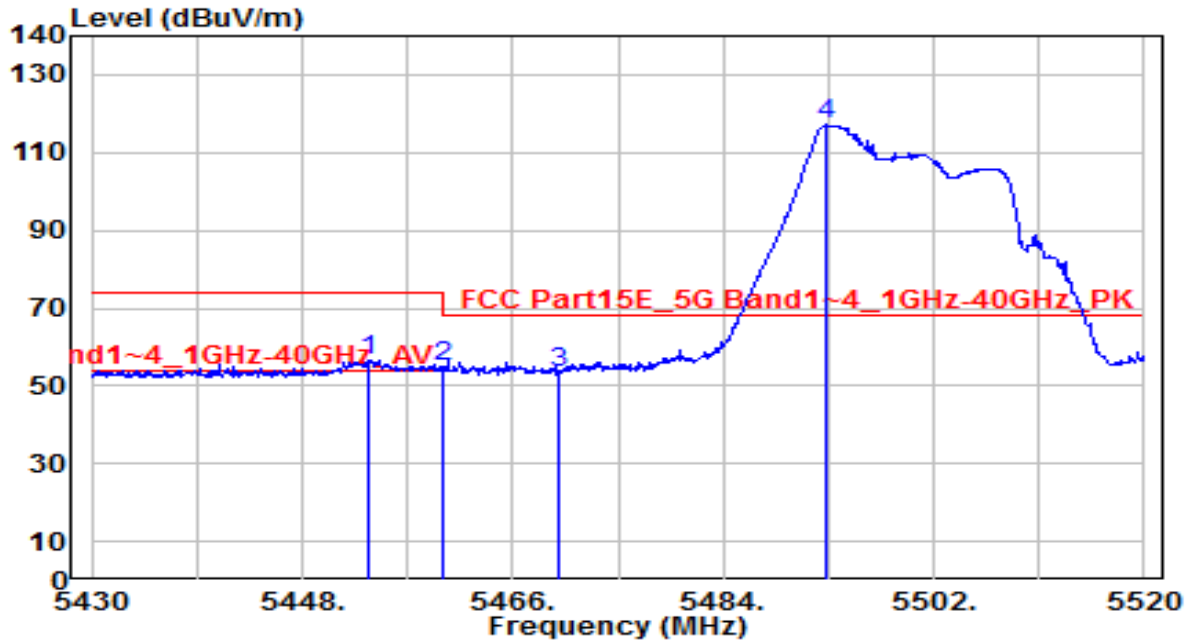


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.760	56.04	0.73	56.77	-17.23	74.00	155	160	Peak
2	5460.000	54.05	0.76	54.81	-19.19	74.00	155	160	Peak
3	* 5470.000	52.77	0.80	53.57	-14.63	68.20	155	160	Peak
4	5492.910	116.28	0.90	117.18	N/A	N/A	155	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

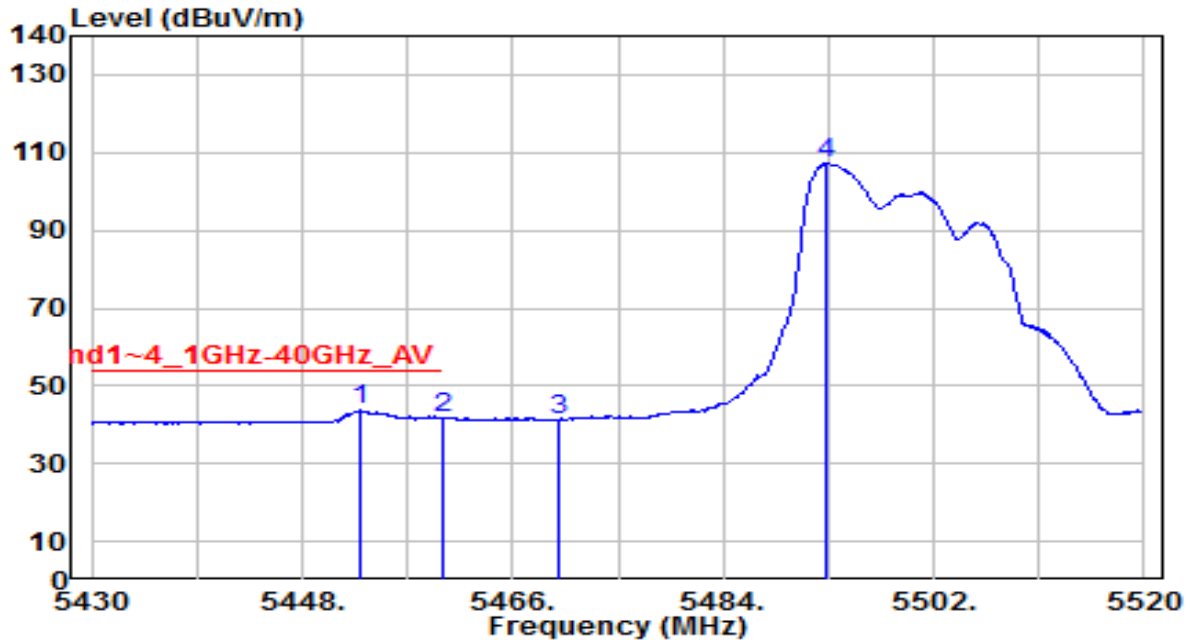


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.950	42.88	0.73	43.61	-10.39	54.00	155	160	Average
2		5460.000	41.16	0.76	41.92	-12.08	54.00	155	160	Average
3		5470.000	40.52	0.80	41.32	N/A	N/A	155	160	Average
4		5492.910	106.24	0.90	107.14	N/A	N/A	155	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

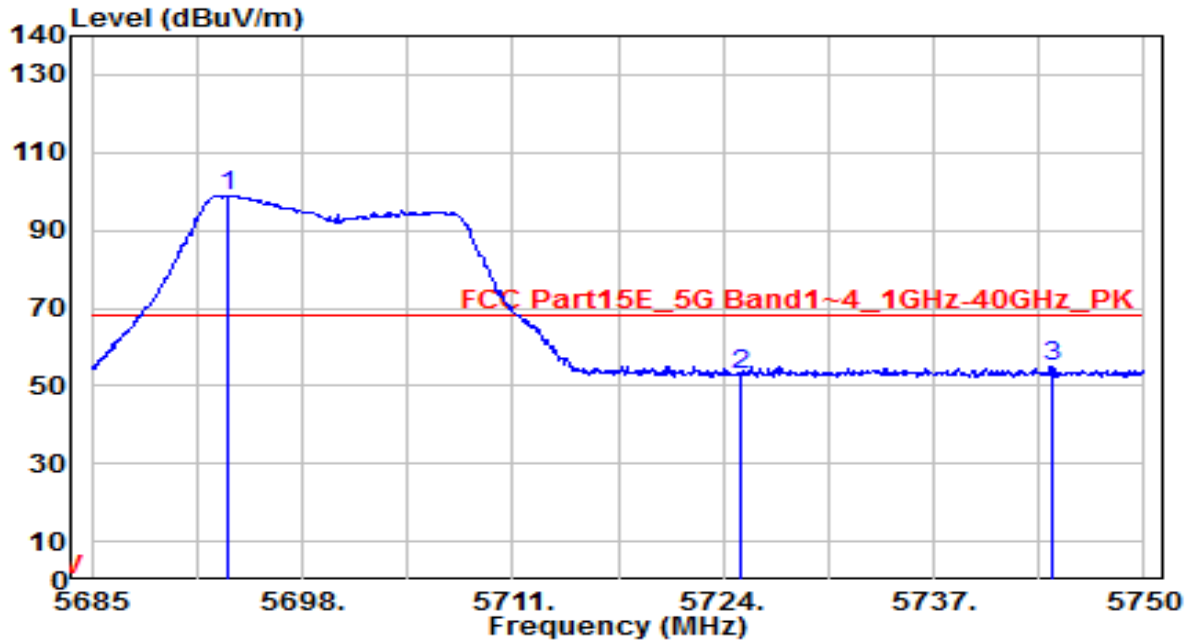


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.450	97.17	1.76	98.93	N/A	N/A	100	120	Peak
2	5725.000	50.70	1.89	52.59	-15.61	68.20	100	120	Peak
3	* 5744.280	52.99	1.97	54.96	-13.24	68.20	100	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

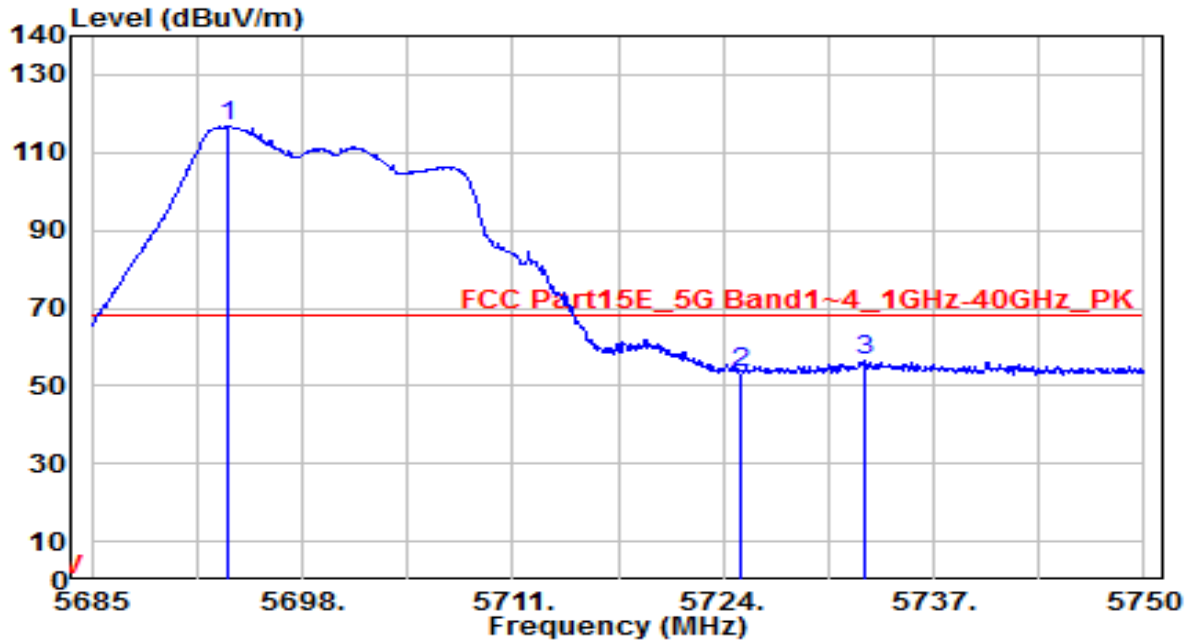


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.450	114.81	1.76	116.57	N/A	N/A	200	155	Peak
2	5725.000	51.63	1.89	53.52	-14.68	68.20	200	155	Peak
3	* 5732.775	54.49	1.92	56.41	-11.79	68.20	200	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

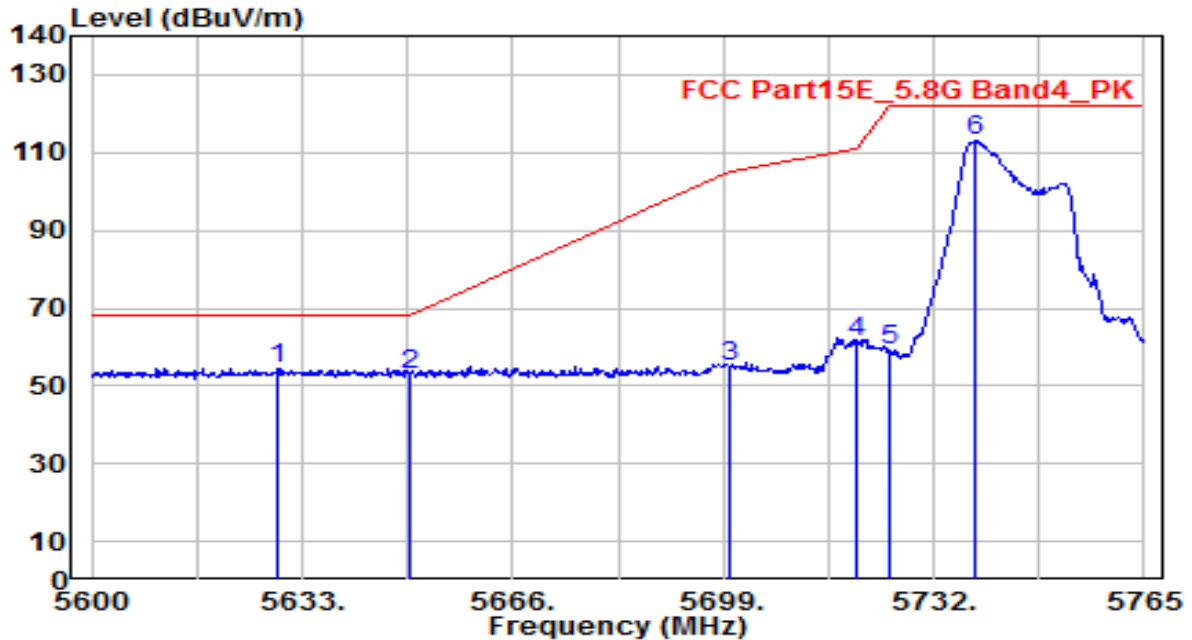


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.205	52.88	1.50	54.38	-13.82	68.20	305	180	Peak
2		5650.000	51.43	1.59	53.02	-15.18	68.20	305	180	Peak
3		5700.000	53.36	1.79	55.14	-50.06	105.20	305	180	Peak
4		5720.000	59.63	1.87	61.50	-49.30	110.80	305	180	Peak
5		5725.000	57.23	1.89	59.12	-63.08	122.20	305	180	Peak
6		5738.600	111.02	1.94	112.96	N/A	N/A	305	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

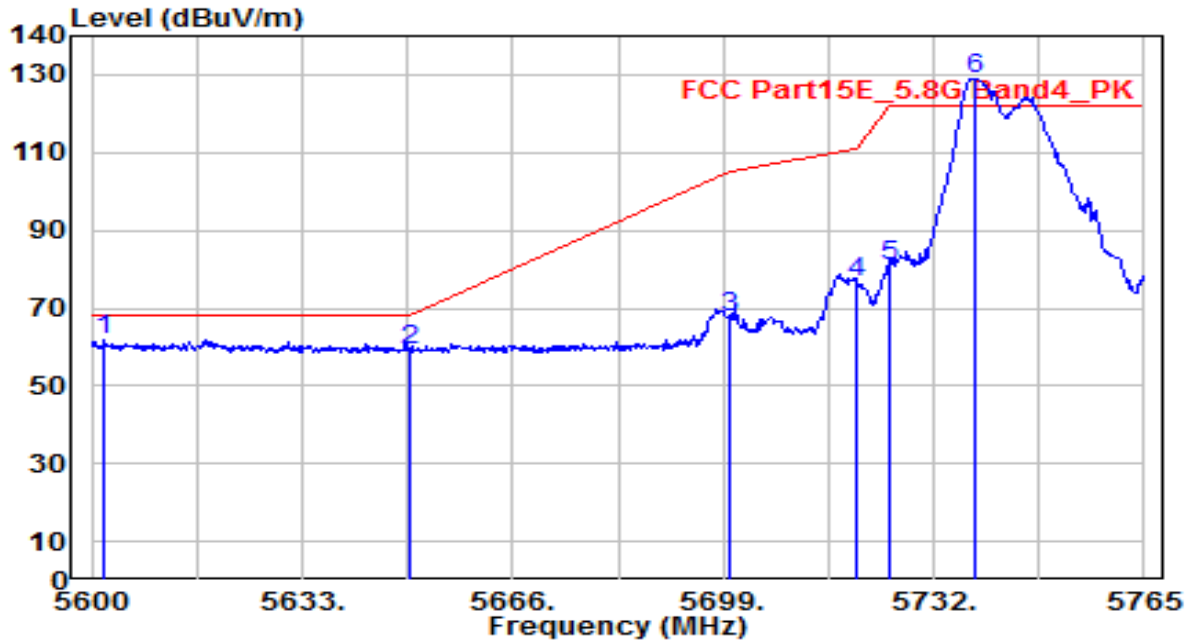


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5601.980	60.54	1.39	61.94	-6.26	68.20	190	155	Peak
2		5650.000	57.75	1.59	59.34	-8.86	68.20	190	155	Peak
3		5700.000	66.09	1.79	67.88	-37.32	105.20	190	155	Peak
4		5720.000	74.89	1.87	76.75	-34.05	110.80	190	155	Peak
5		5725.000	78.84	1.89	80.73	-41.47	122.20	190	155	Peak
6		5738.600	127.08	1.94	129.03	N/A	N/A	190	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

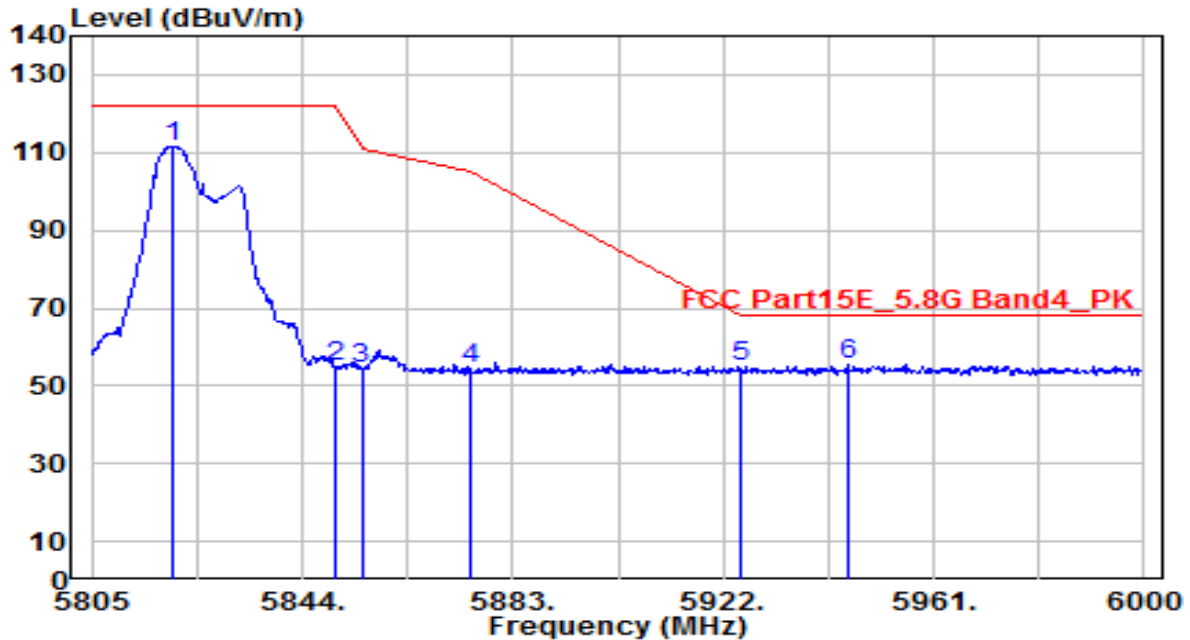


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.015	109.39	2.22	111.62	N/A	N/A	305	185	Peak
2	5850.000	52.83	2.27	55.10	-67.10	122.20	305	185	Peak
3	5855.000	52.33	2.28	54.61	-56.19	110.80	305	185	Peak
4	5875.000	52.18	2.31	54.49	-50.71	105.20	305	185	Peak
5	5925.000	52.72	2.38	55.10	-13.10	68.20	305	185	Peak
6	* 5945.010	53.24	2.42	55.66	-12.54	68.20	305	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

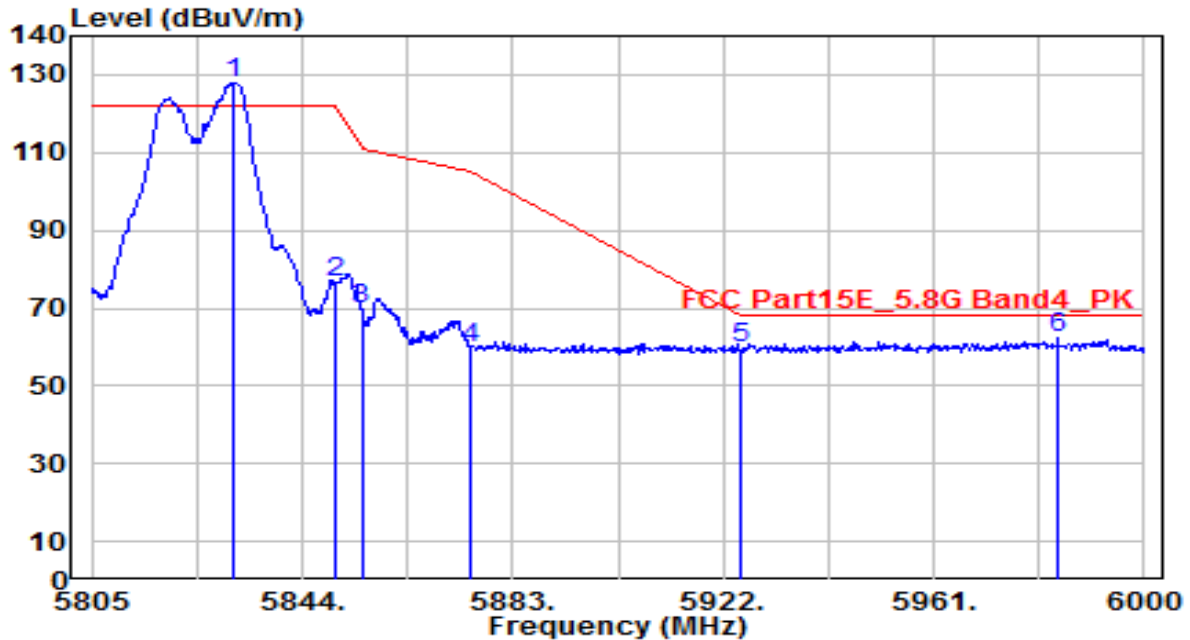


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5831.325	125.86	2.24	128.10	N/A	N/A	160	305	Peak
2	5850.000	74.14	2.27	76.41	-45.79	122.20	160	305	Peak
3	5855.000	67.68	2.28	69.96	-40.84	110.80	160	305	Peak
4	5875.000	57.37	2.31	59.68	-45.52	105.20	160	305	Peak
5	5925.000	57.14	2.38	59.53	-8.67	68.20	160	305	Peak
6	* 5984.010	59.60	2.48	62.08	-6.12	68.20	160	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

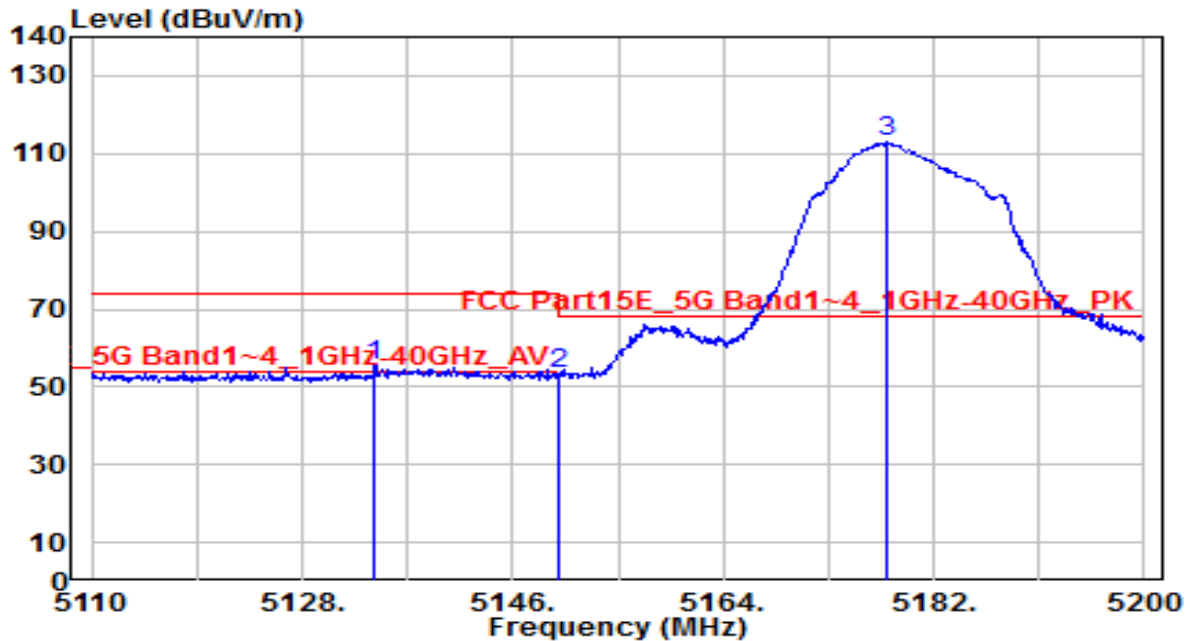


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.210	54.65	0.78	55.43	-18.57	74.00	285	95	Peak
2		5150.000	52.60	0.80	53.40	-20.60	74.00	285	95	Peak
3		5177.950	111.97	0.83	112.80	N/A	N/A	285	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

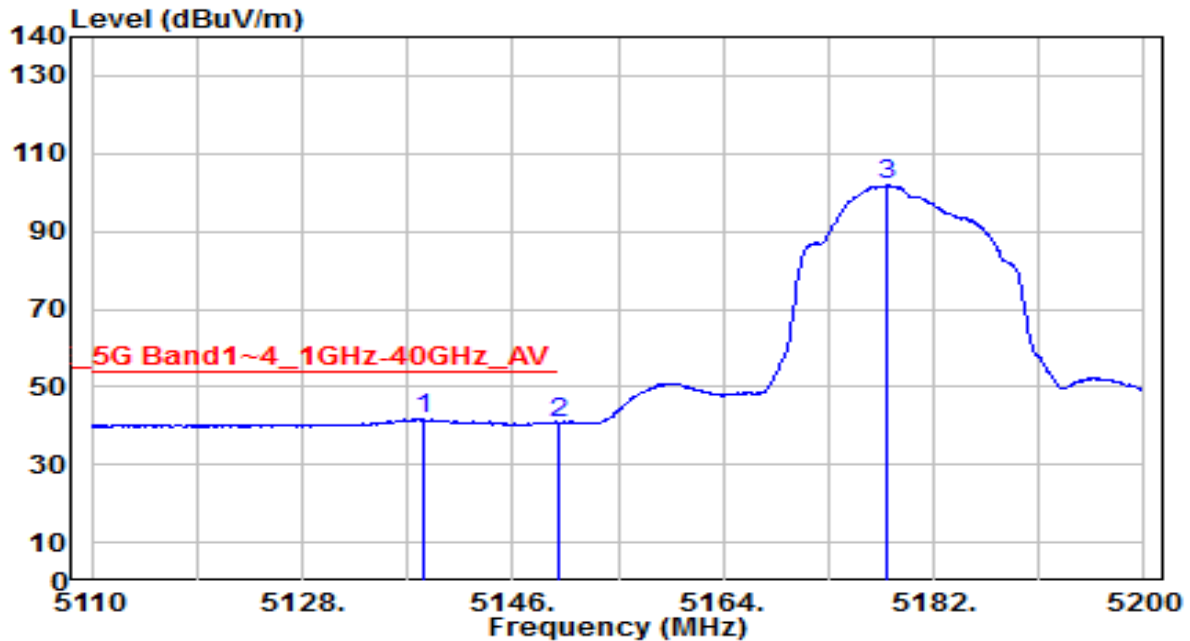


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.350	40.99	0.78	41.77	-12.23	54.00	285	95	Average
2		5150.000	40.12	0.80	40.92	-13.08	54.00	285	95	Average
3		5178.040	101.01	0.83	101.84	N/A	N/A	285	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

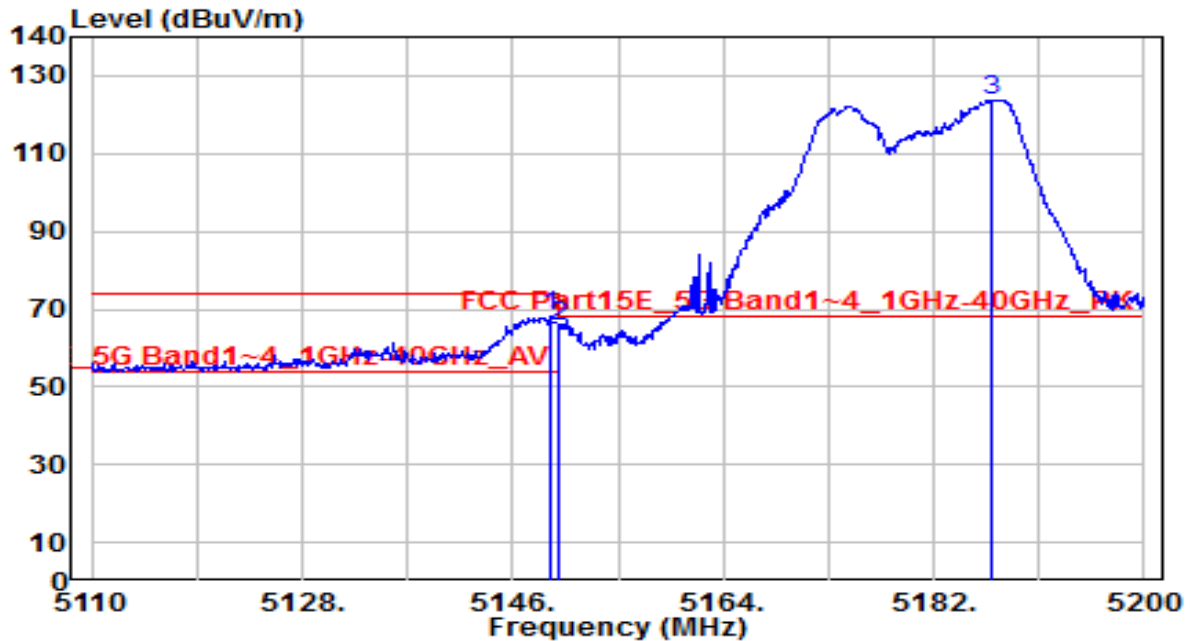


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	67.09	0.80	67.89	-6.11	74.00	100	330	Peak
2		5150.000	64.64	0.80	65.44	-8.56	74.00	100	330	Peak
3		5186.950	123.02	0.84	123.86	N/A	N/A	100	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-27
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

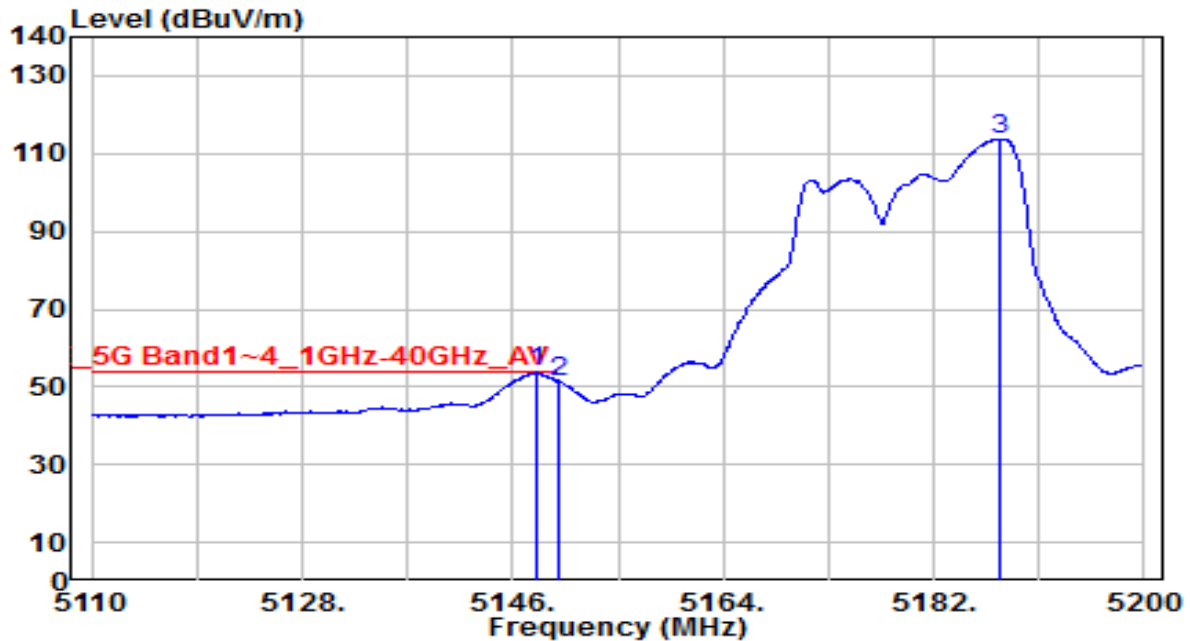


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.160	53.05	0.79	53.84	-0.16	54.00	100	330	Average
2		5150.000	50.62	0.80	51.42	-2.58	54.00	100	330	Average
3		5187.670	112.94	0.84	113.79	N/A	N/A	100	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

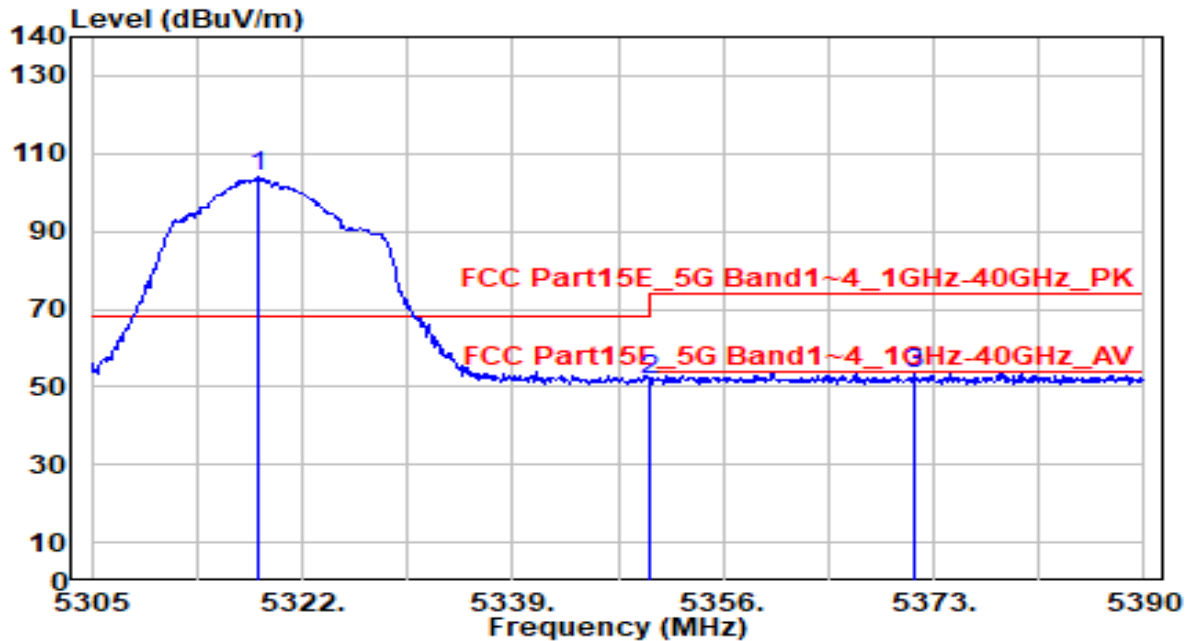


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.515	103.26	0.65	103.91	N/A	N/A	300	95	Peak
2	5350.000	51.08	0.59	51.68	-22.32	74.00	300	95	Peak
3	* 5371.385	52.95	0.56	53.51	-20.49	74.00	300	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

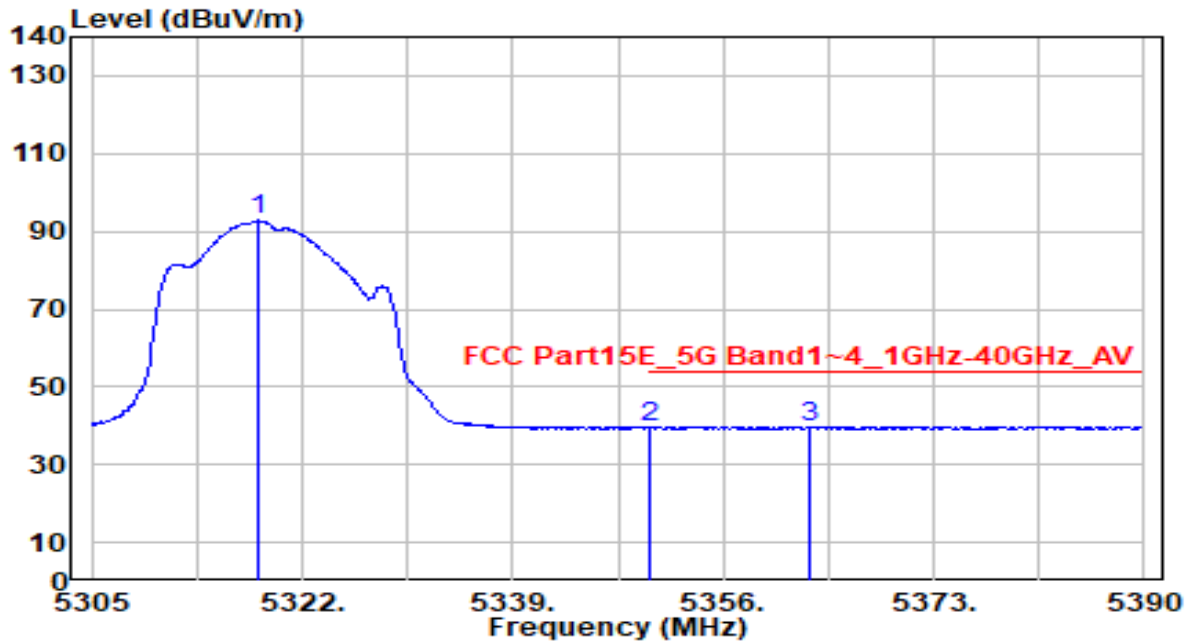


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.345	92.07	0.65	92.72	N/A	N/A	300	95	Average
2	5350.000	38.82	0.59	39.41	-14.59	54.00	300	95	Average
3	* 5362.970	39.29	0.57	39.86	-14.14	54.00	300	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

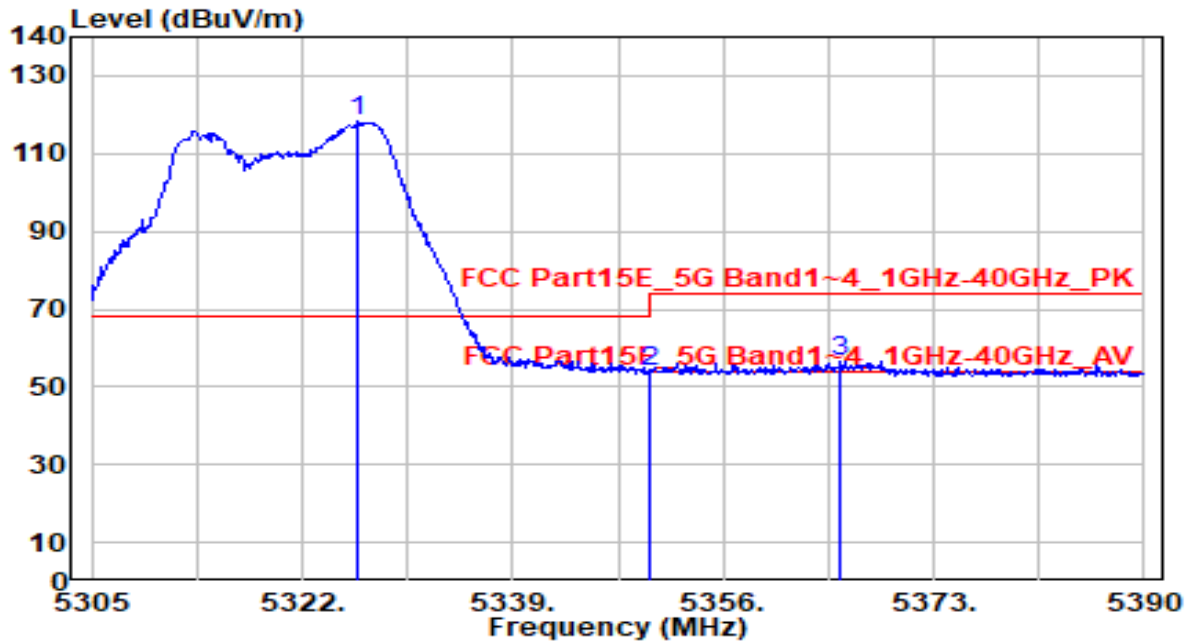


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.505	117.46	0.64	118.09	N/A	N/A	140	335	Peak
2	5350.000	53.30	0.59	53.89	-20.11	74.00	140	335	Peak
3	* 5365.520	56.13	0.57	56.70	-17.30	74.00	140	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

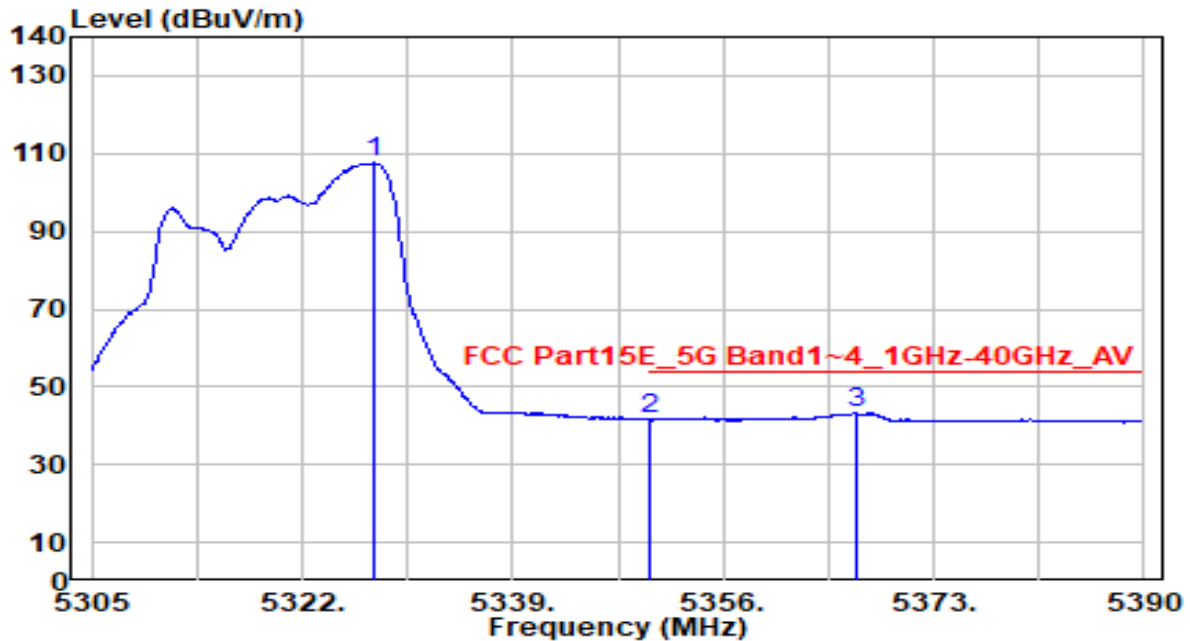


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.695	106.91	0.63	107.54	N/A	N/A	140	335	Average
2	5350.000	41.19	0.59	41.78	-12.22	54.00	140	335	Average
3	* 5366.795	42.67	0.56	43.24	-10.76	54.00	140	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

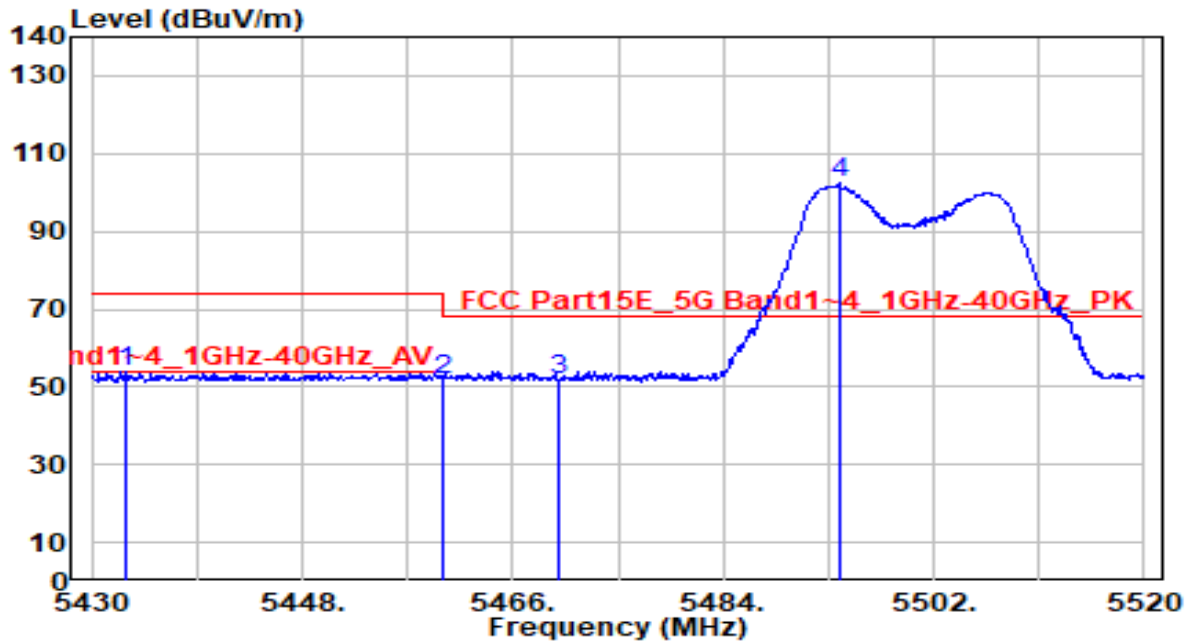


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5432.970	53.21	0.65	53.85	-20.15	74.00	105	125	Peak
2	5460.000	51.11	0.76	51.87	-22.13	74.00	105	125	Peak
3	* 5470.000	51.04	0.80	51.84	-16.36	68.20	105	125	Peak
4	5493.900	101.34	0.90	102.24	N/A	N/A	105	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

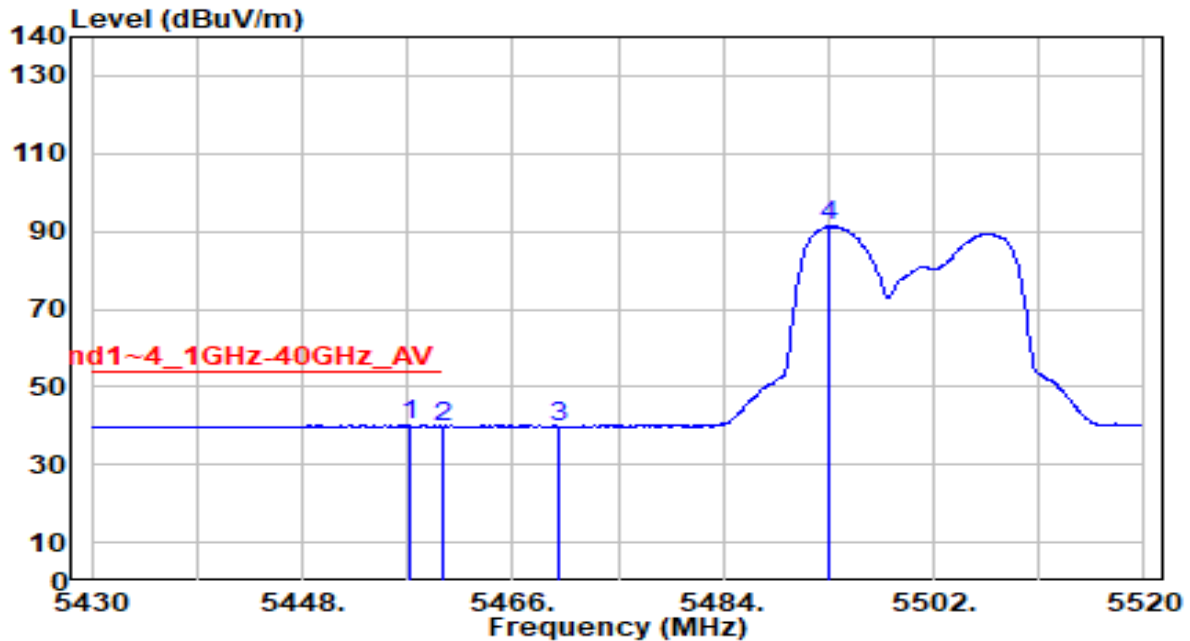


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.180	39.40	0.75	40.15	-13.85	54.00	105	125	Average
2		5460.000	38.93	0.76	39.69	-14.31	54.00	105	125	Average
3		5470.000	39.01	0.80	39.81	N/A	N/A	105	125	Average
4		5493.090	90.37	0.90	91.27	N/A	N/A	105	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

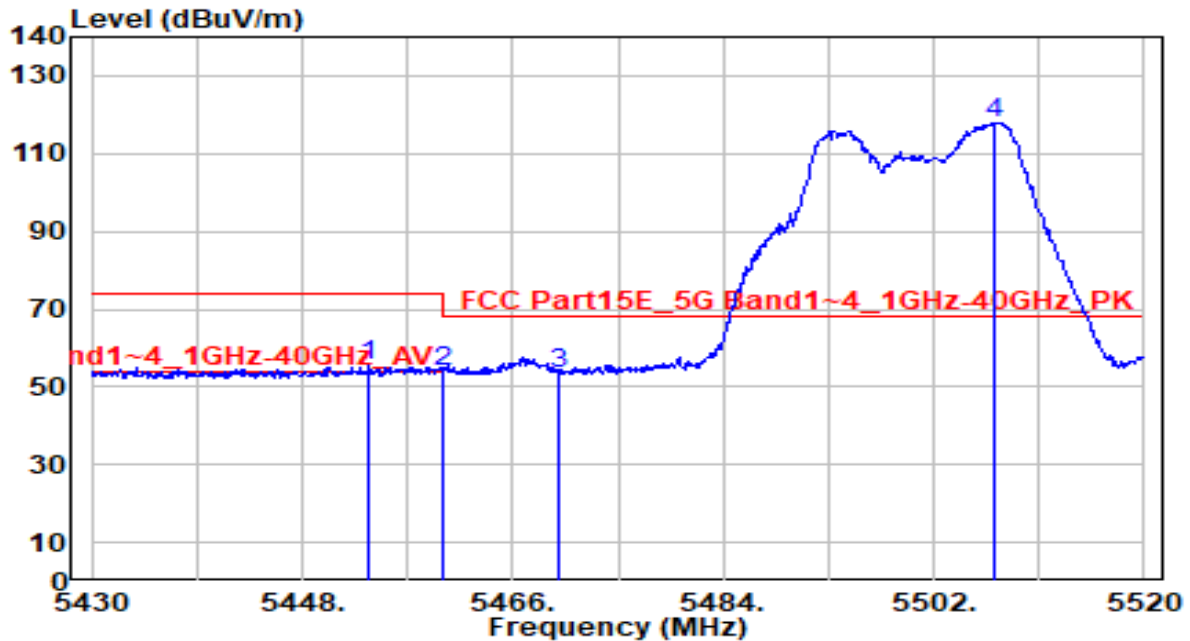


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.760	54.71	0.73	55.44	-18.56	74.00	155	160	Peak
2	5460.000	53.22	0.76	53.98	-20.02	74.00	155	160	Peak
3	* 5470.000	52.69	0.80	53.50	-14.70	68.20	155	160	Peak
4	5507.220	116.80	0.96	117.77	N/A	N/A	155	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

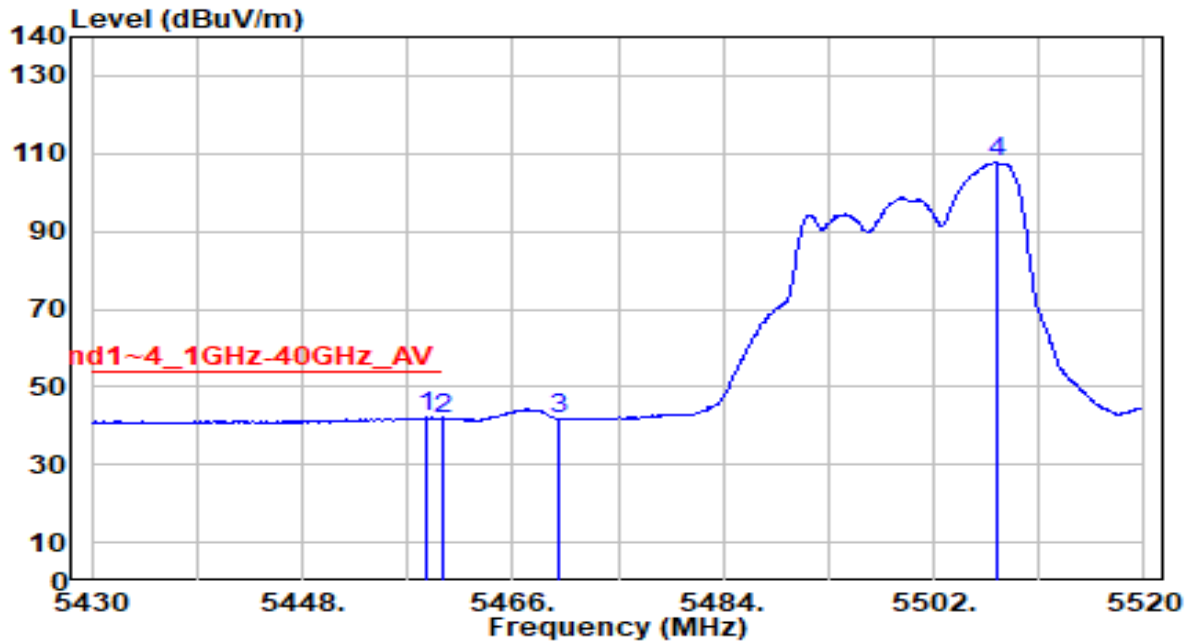


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.620	41.26	0.75	42.02	-11.98	54.00	155	160	Average
2		5460.000	41.06	0.76	41.82	-12.18	54.00	155	160	Average
3		5470.000	40.93	0.80	41.74	N/A	N/A	155	160	Average
4		5507.400	106.72	0.96	107.68	N/A	N/A	155	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

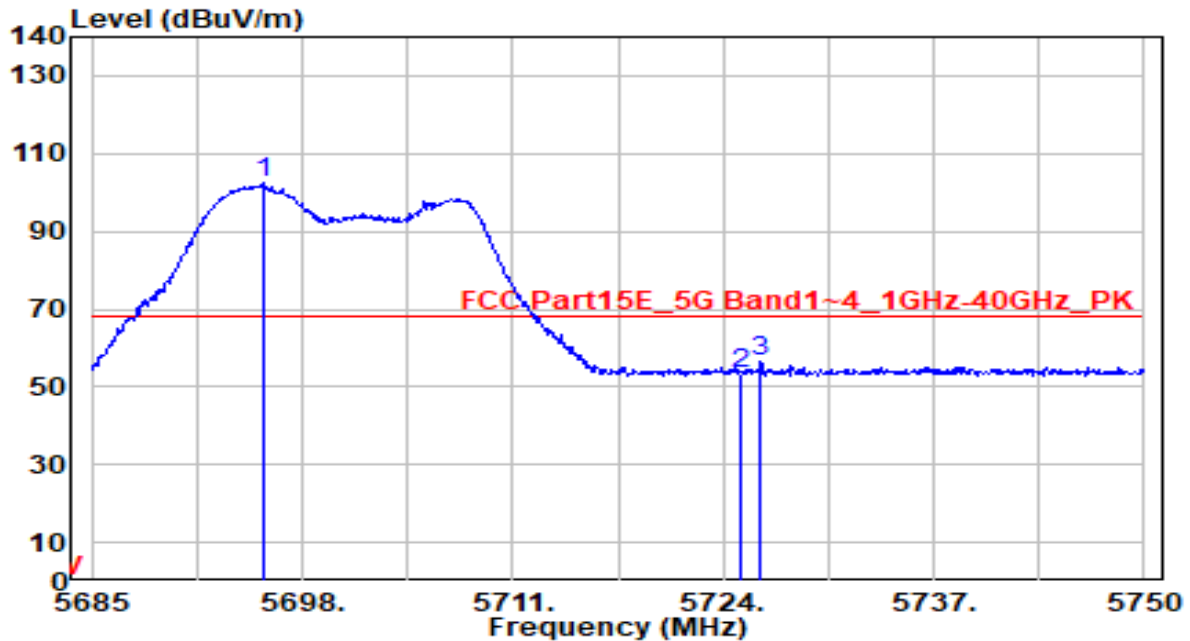


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.595	100.52	1.77	102.29	N/A	N/A	110	170	Peak
2	5725.000	51.52	1.89	53.41	-14.79	68.20	110	170	Peak
3	* 5726.340	54.44	1.89	56.33	-11.87	68.20	110	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

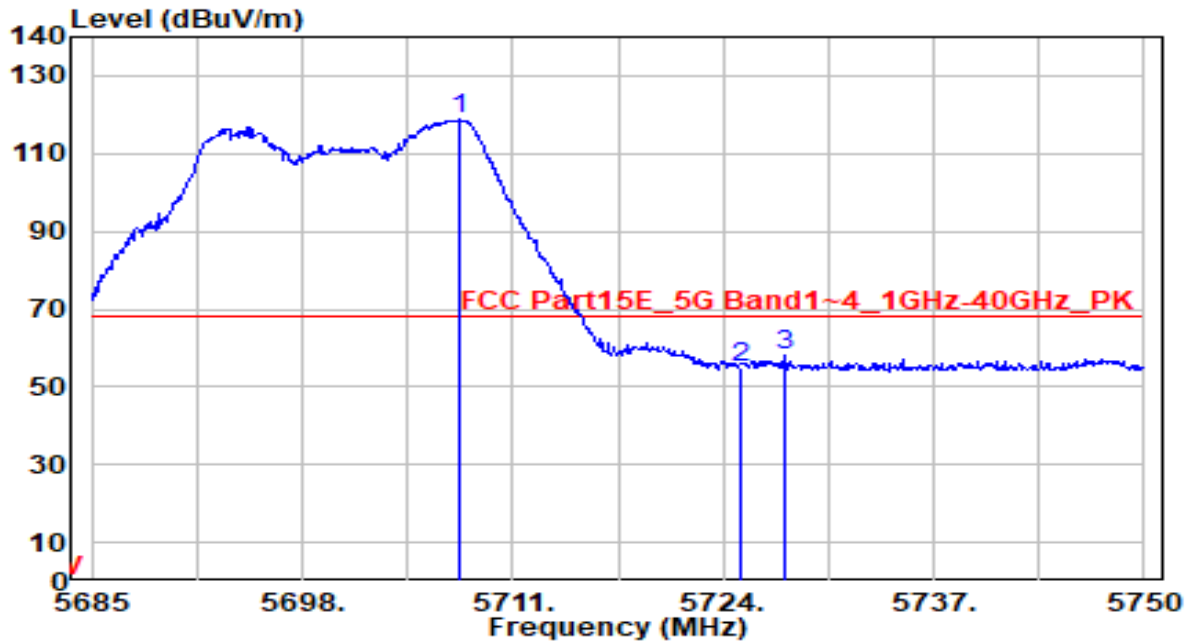


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5707.750	116.82	1.82	118.63	N/A	N/A	175	160	Peak
2	5725.000	53.28	1.89	55.17	-13.03	68.20	175	160	Peak
3	* 5727.770	55.98	1.90	57.88	-10.32	68.20	175	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

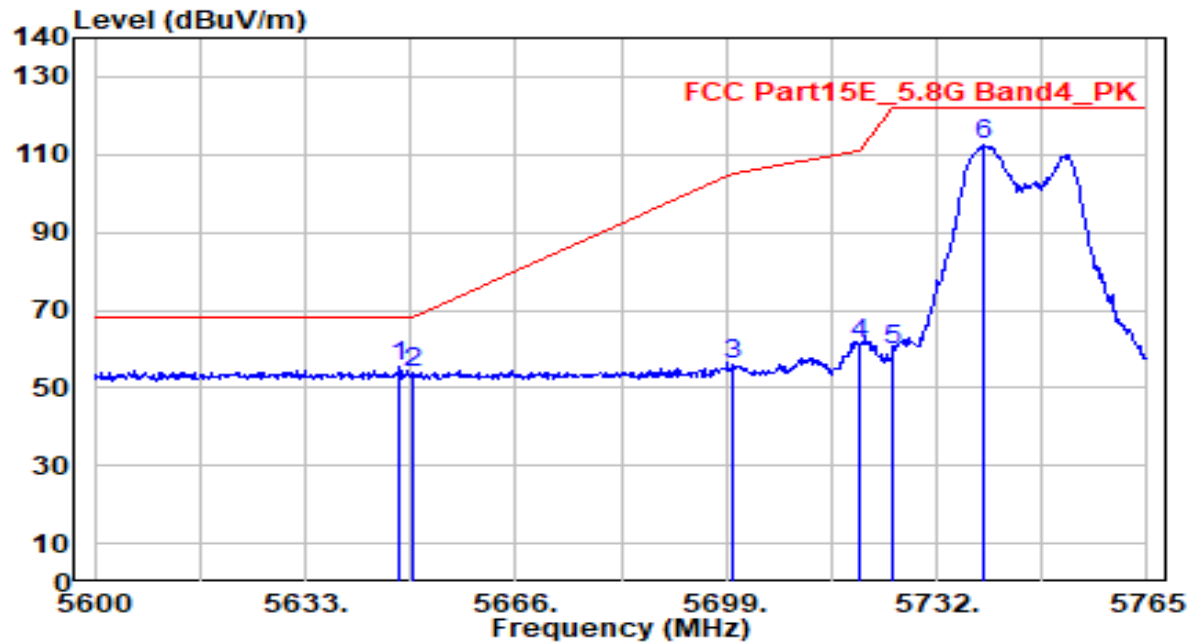


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.685	54.05	1.58	55.63	-12.57	68.20	100	185	Peak
2		5650.000	52.32	1.59	53.91	-14.29	68.20	100	185	Peak
3		5700.000	53.98	1.79	55.77	-49.43	105.20	100	185	Peak
4		5720.000	59.20	1.87	61.07	-49.73	110.80	100	185	Peak
5		5725.000	57.73	1.89	59.62	-62.58	122.20	100	185	Peak
6		5739.425	110.69	1.95	112.64	N/A	N/A	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

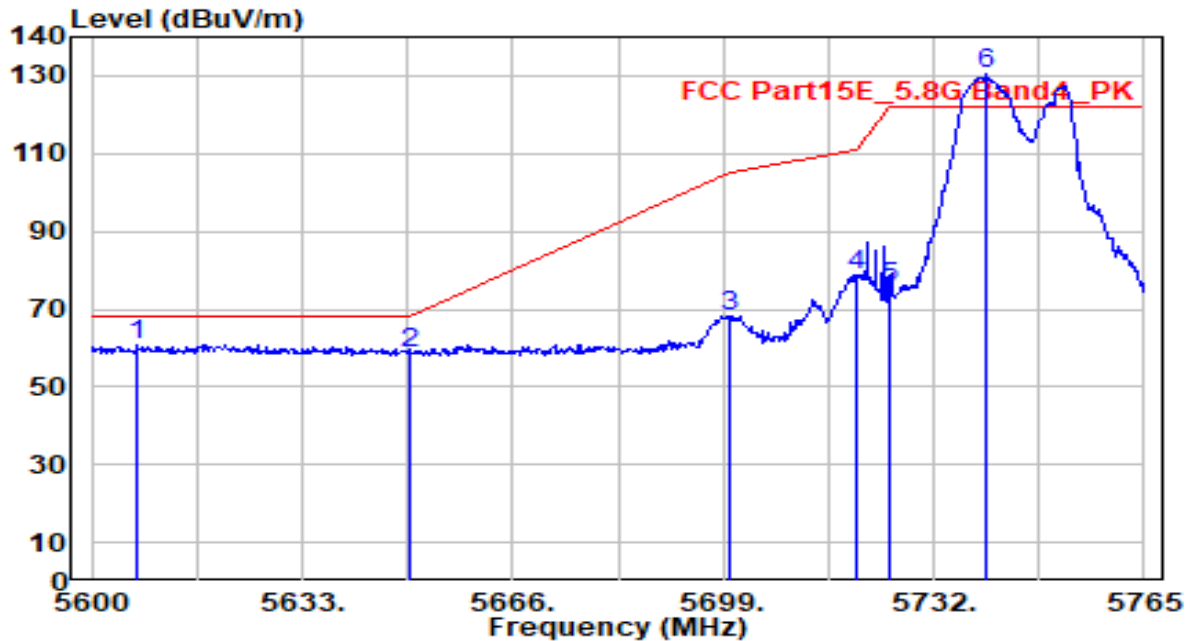


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5607.095	59.51	1.41	60.92	-7.28	68.20	195	350	Peak
2		5650.000	57.19	1.59	58.77	-9.43	68.20	195	350	Peak
3		5700.000	66.29	1.79	68.08	-37.12	105.20	195	350	Peak
4		5720.000	76.99	1.87	78.85	-31.95	110.80	195	350	Peak
5		5725.000	73.47	1.89	75.36	-46.84	122.20	195	350	Peak
6		5740.415	128.32	1.95	130.27	N/A	N/A	195	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

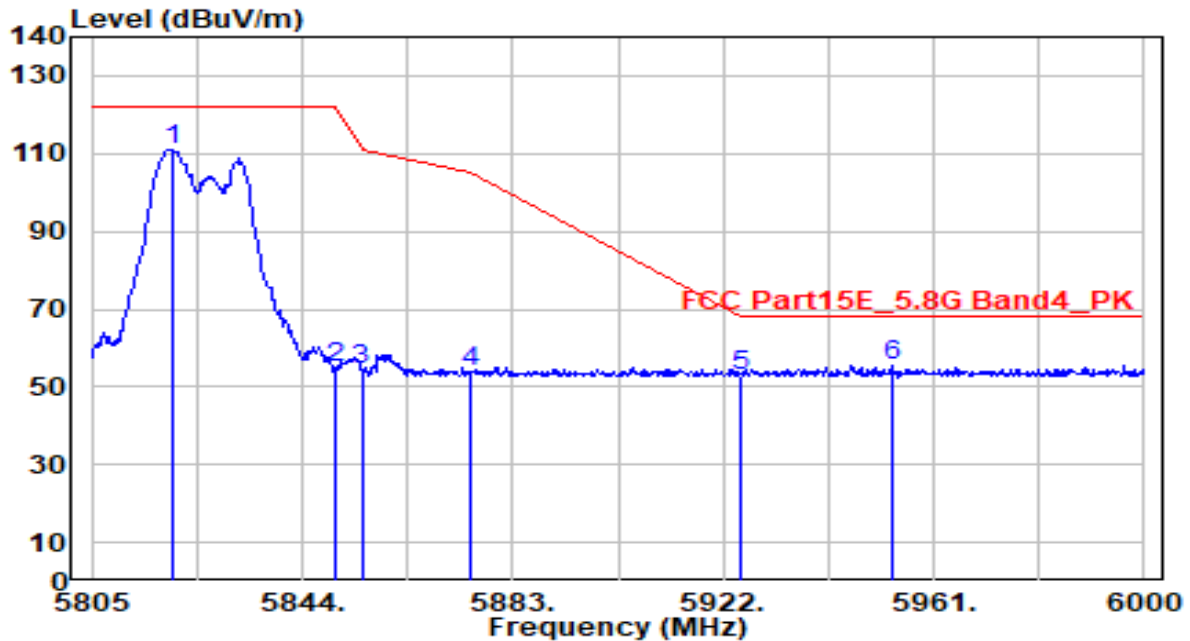


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.015	108.86	2.22	111.08	N/A	N/A	100	185	Peak
2	5850.000	52.57	2.27	54.84	-67.36	122.20	100	185	Peak
3	5855.000	52.32	2.28	54.59	-56.21	110.80	100	185	Peak
4	5875.000	51.36	2.31	53.66	-51.54	105.20	100	185	Peak
5	5925.000	50.47	2.38	52.85	-15.35	68.20	100	185	Peak
6	* 5953.200	53.05	2.43	55.48	-12.72	68.20	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

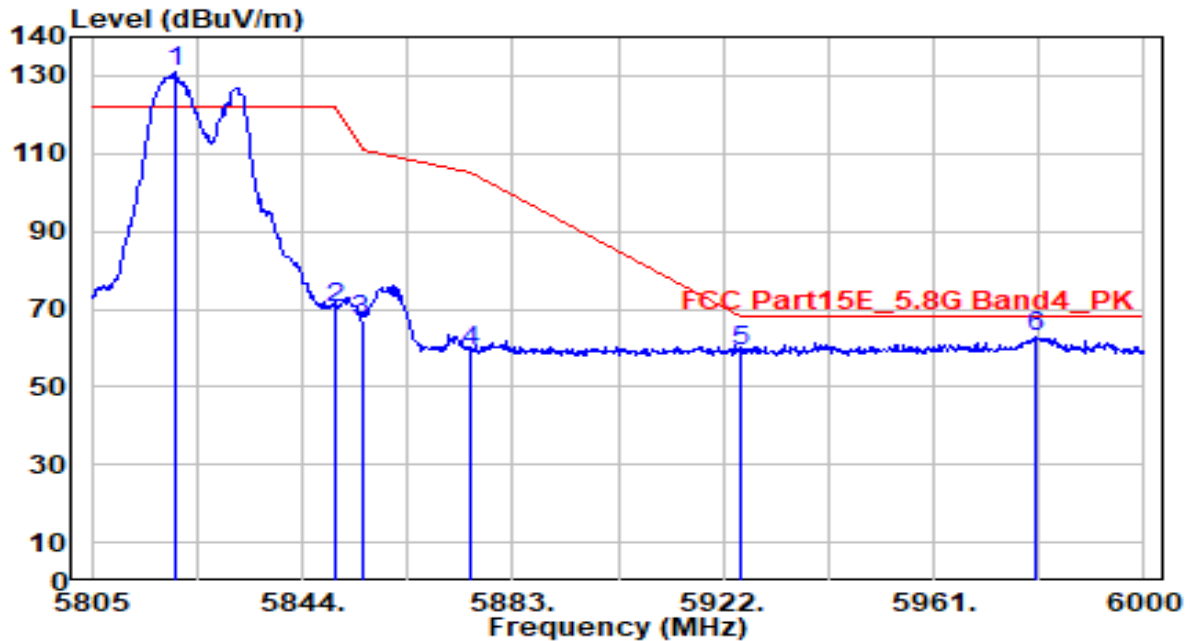


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.600	128.55	2.22	130.77	N/A	N/A	190	350	Peak
2	5850.000	67.92	2.27	70.19	-52.01	122.20	190	350	Peak
3	5855.000	64.83	2.28	67.10	-43.70	110.80	190	350	Peak
4	5875.000	56.68	2.31	58.99	-46.21	105.20	190	350	Peak
5	5925.000	56.81	2.38	59.20	-9.00	68.20	190	350	Peak
6	* 5979.915	60.63	2.47	63.10	-5.10	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

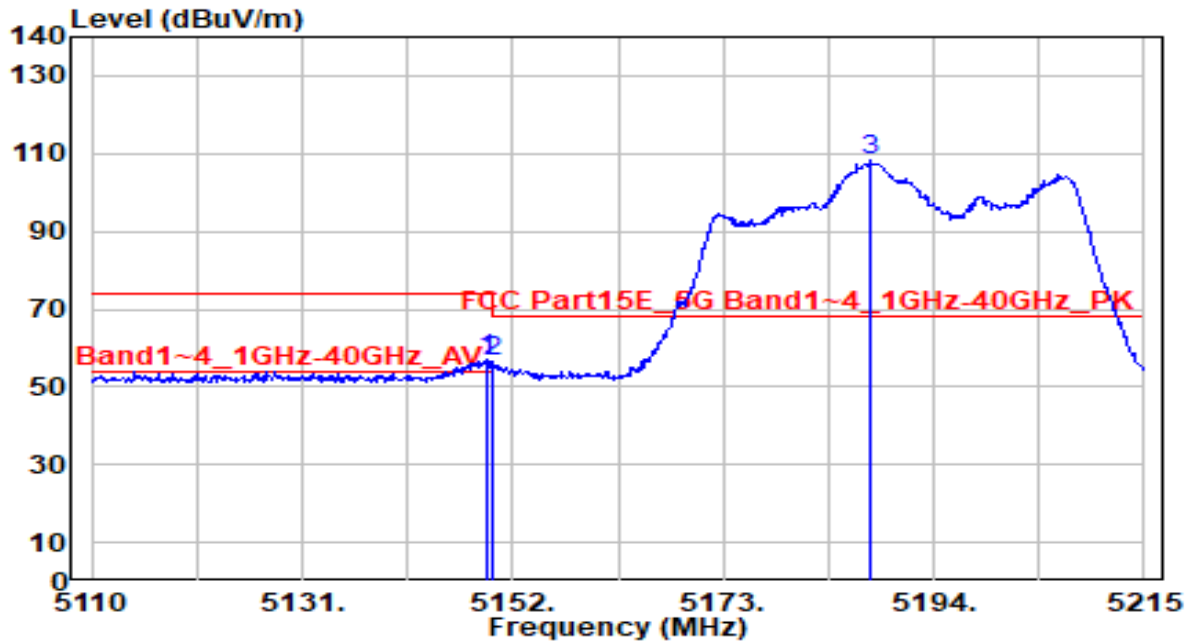


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	56.22	0.80	57.02	-16.98	74.00	300	95	Peak
2		5150.000	55.70	0.80	56.50	-17.50	74.00	300	95	Peak
3		5187.805	107.26	0.84	108.11	N/A	N/A	300	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

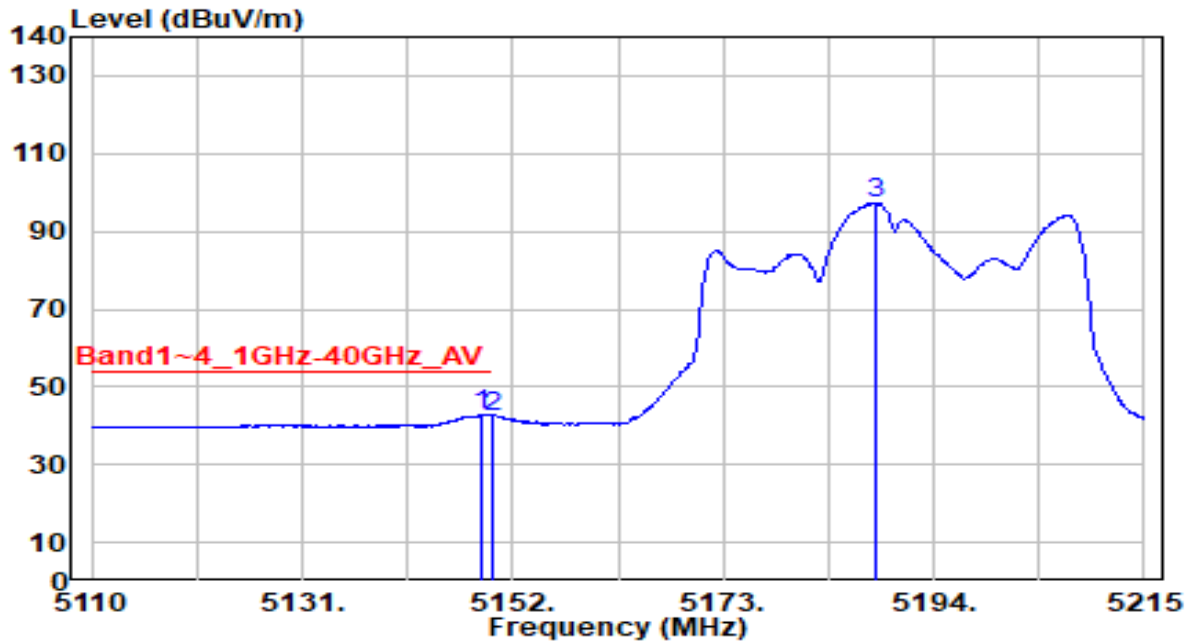


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	41.88	0.79	42.67	-11.33	54.00	300	95	Average
2		5150.000	41.67	0.80	42.47	-11.53	54.00	300	95	Average
3		5188.225	96.26	0.84	97.10	N/A	N/A	300	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

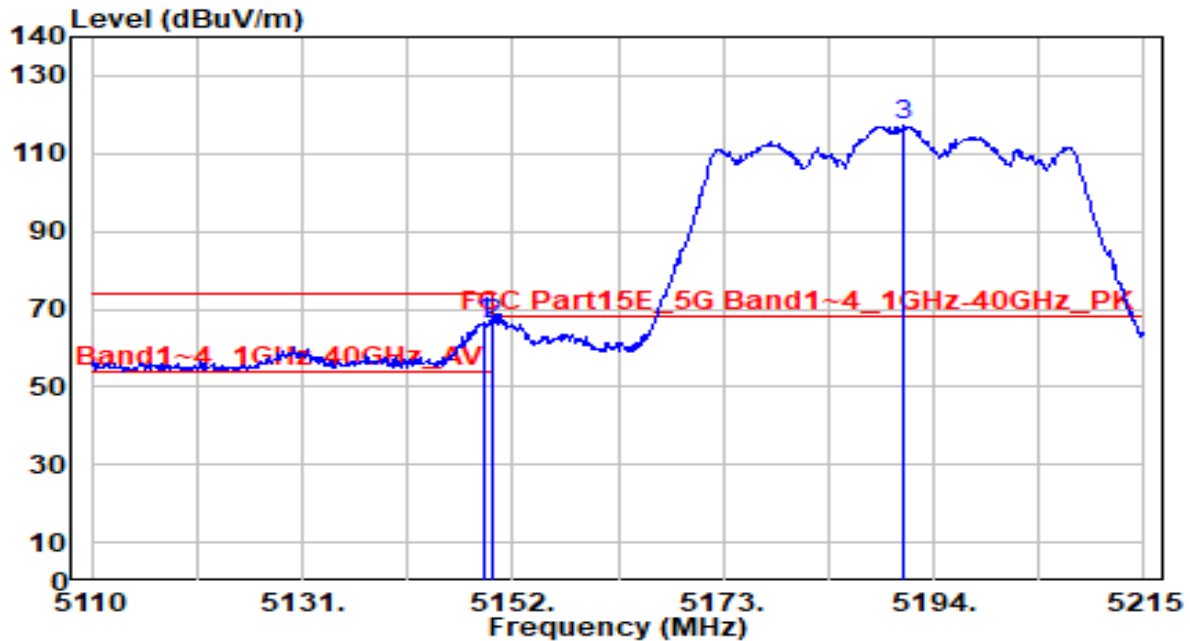


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.165	66.03	0.79	66.82	-7.18	74.00	110	190	Peak
2		5150.000	65.29	0.80	66.09	-7.91	74.00	110	190	Peak
3		5190.850	116.26	0.85	117.11	N/A	N/A	110	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

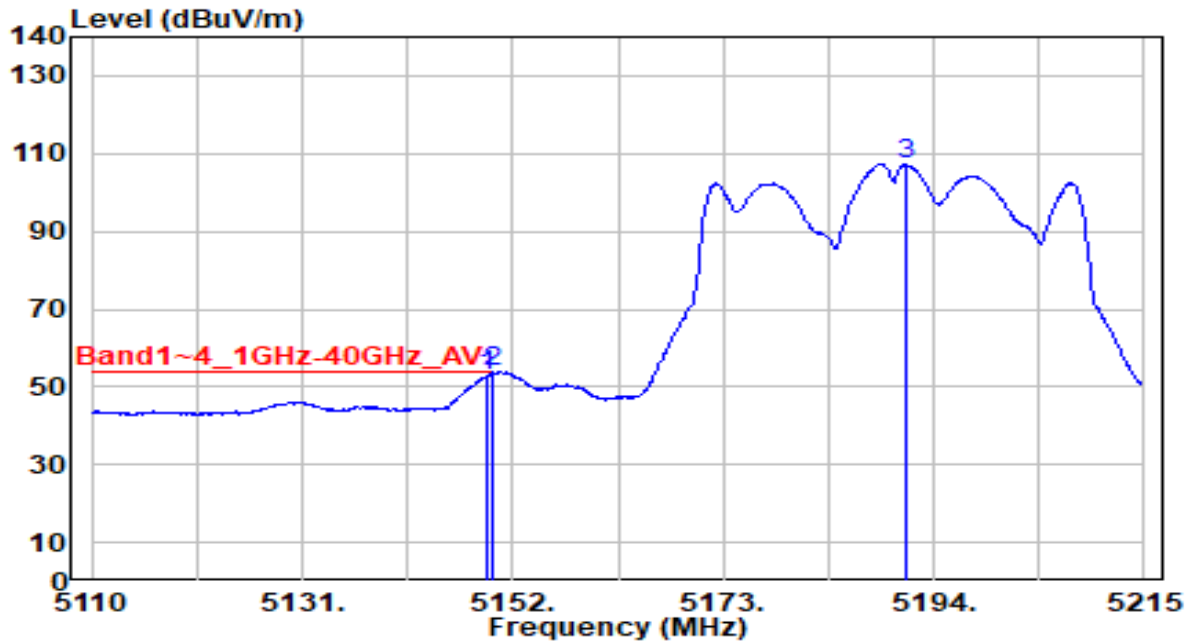


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	52.06	0.80	52.85	-1.15	54.00	110	190	Average
2	*	5150.000	53.10	0.80	53.89	-0.11	54.00	110	190	Average
3		5191.165	106.53	0.85	107.38	N/A	N/A	110	190	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

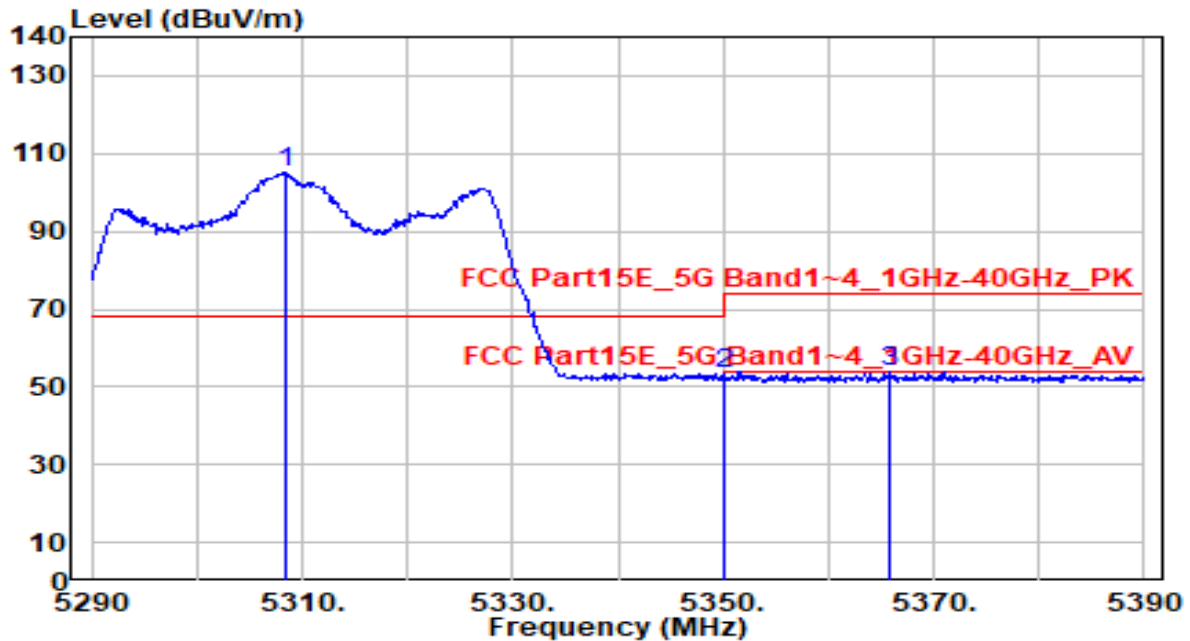


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.400	104.34	0.67	105.01	N/A	N/A	295	95	Peak
2	5350.000	52.73	0.59	53.32	-20.68	74.00	295	95	Peak
3	* 5365.900	53.49	0.57	54.06	-19.94	74.00	295	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

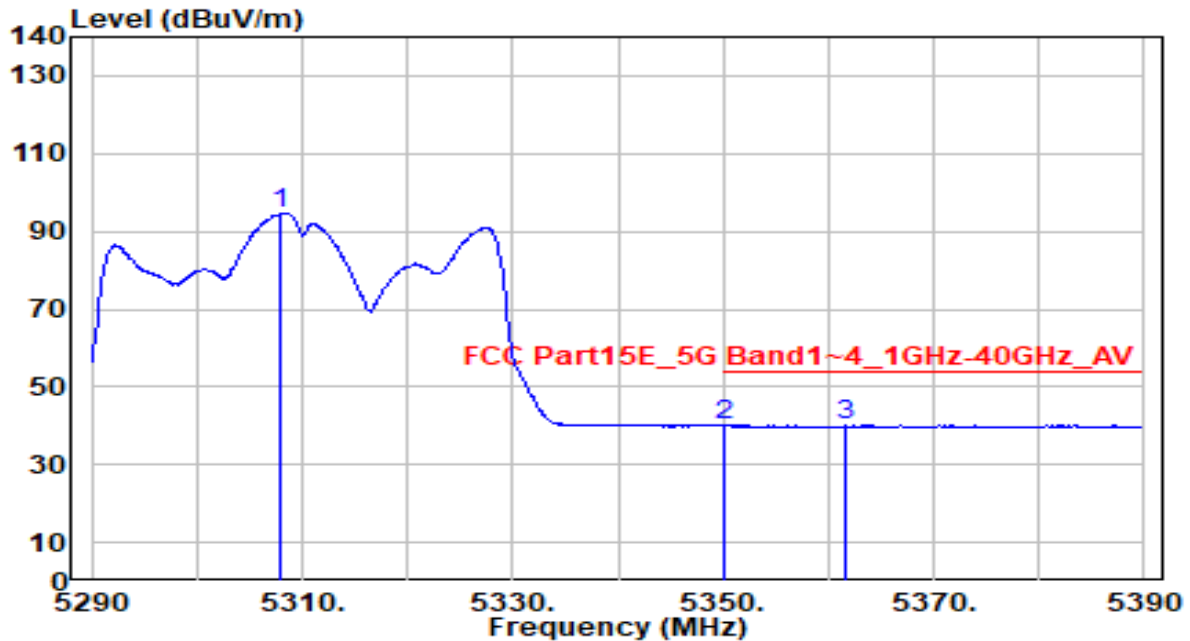


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.900	93.90	0.67	94.57	N/A	N/A	295	95	Average
2	5350.000	39.37	0.59	39.96	-14.04	54.00	295	95	Average
3	* 5361.600	39.49	0.57	40.07	-13.93	54.00	295	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

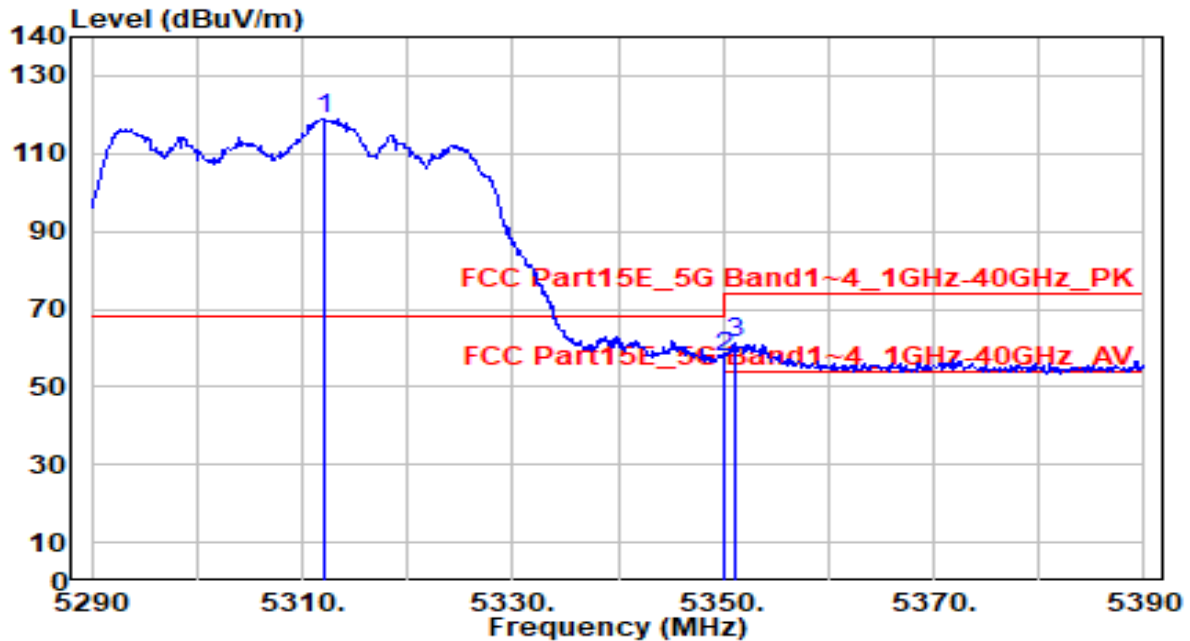


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.000	118.12	0.66	118.78	N/A	N/A	150	10	Peak
2	5350.000	57.00	0.59	57.60	-16.40	74.00	150	10	Peak
3	* 5351.100	60.83	0.59	61.42	-12.58	74.00	150	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

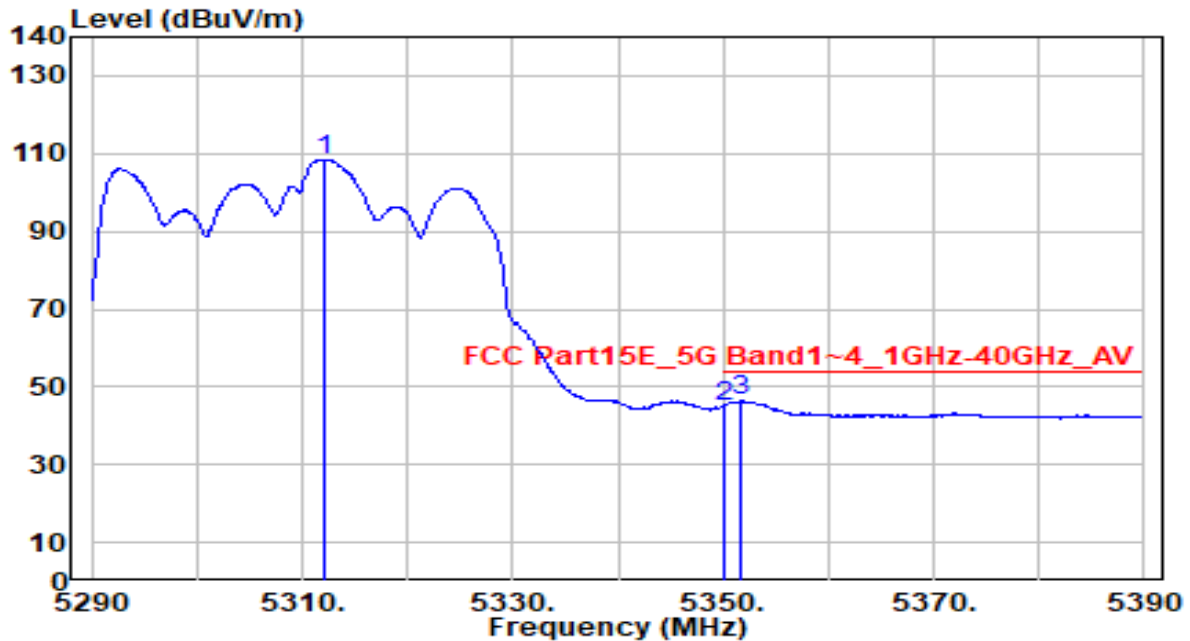


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.100	107.82	0.66	108.48	N/A	N/A	150	10	Average
2	5350.000	44.49	0.59	45.09	-8.91	54.00	150	10	Average
3	* 5351.600	45.82	0.59	46.41	-7.59	54.00	150	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

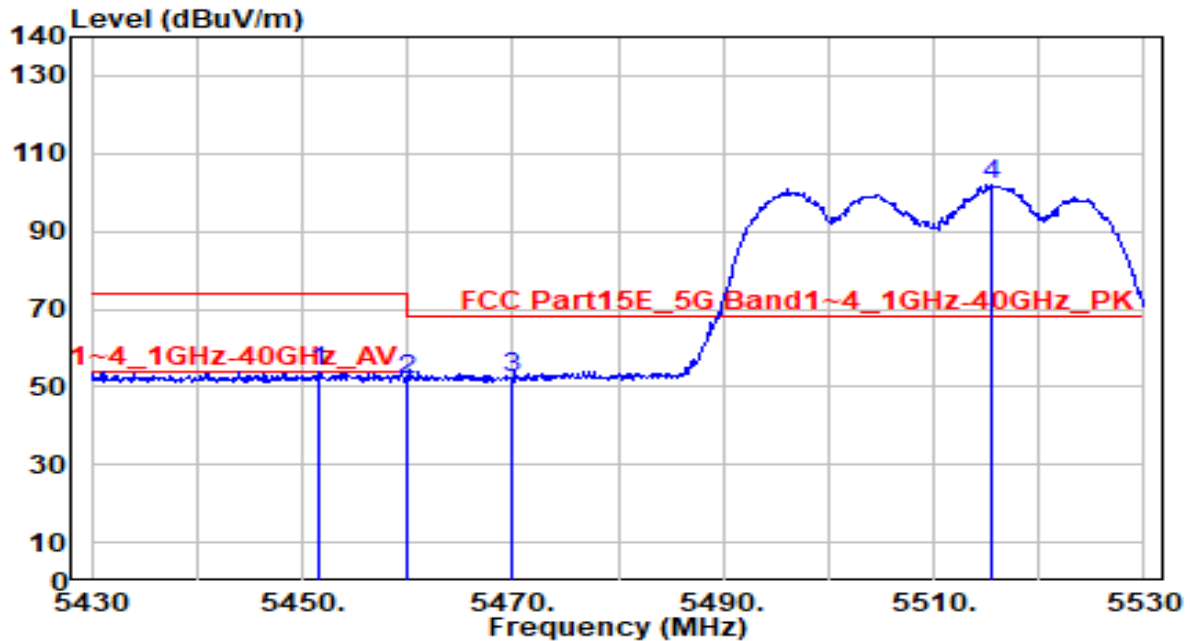


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.700	53.10	0.73	53.83	-20.17	74.00	130	170	Peak
2	5460.000	50.93	0.76	51.69	-22.31	74.00	130	170	Peak
3	* 5470.000	51.75	0.80	52.56	-15.64	68.20	130	170	Peak
4	5515.400	100.83	1.00	101.83	N/A	N/A	130	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

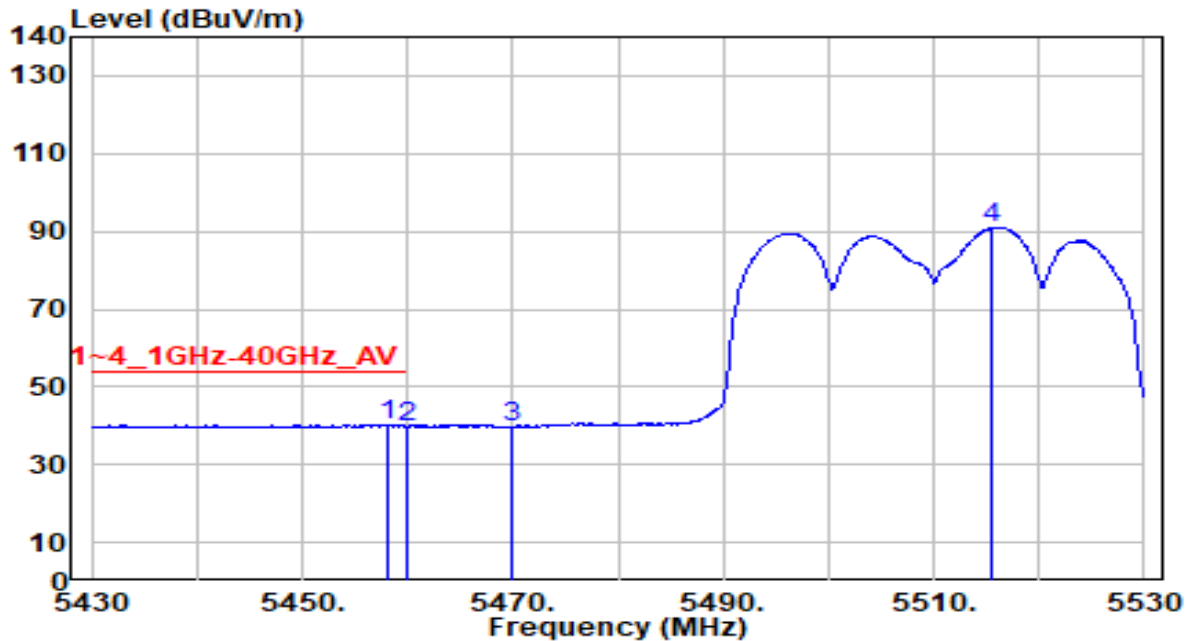


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.100	39.43	0.75	40.19	-13.81	54.00	130	170	Average
2		5460.000	39.10	0.76	39.86	-14.14	54.00	130	170	Average
3		5470.000	38.97	0.80	39.77	N/A	N/A	130	170	Average
4		5515.600	89.99	1.00	90.99	N/A	N/A	130	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

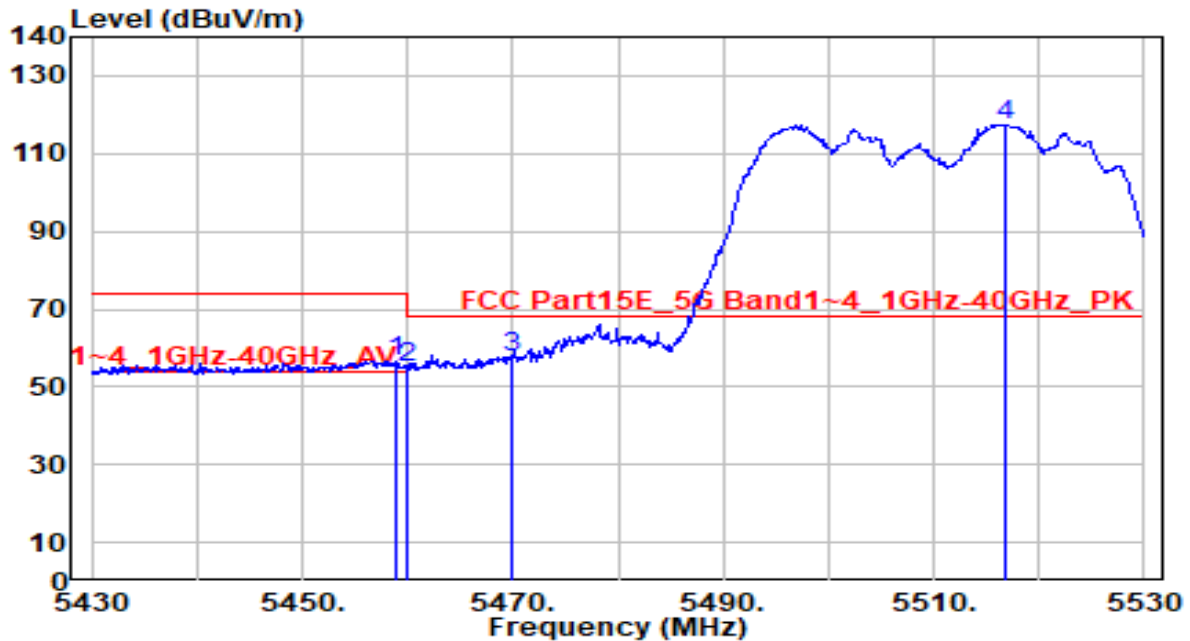


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.000	56.01	0.76	56.77	-17.23	74.00	185	160	Peak
2	5460.000	54.02	0.76	54.78	-19.22	74.00	185	160	Peak
3	* 5470.000	56.74	0.80	57.54	-10.66	68.20	185	160	Peak
4	5516.800	116.52	1.01	117.52	N/A	N/A	185	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

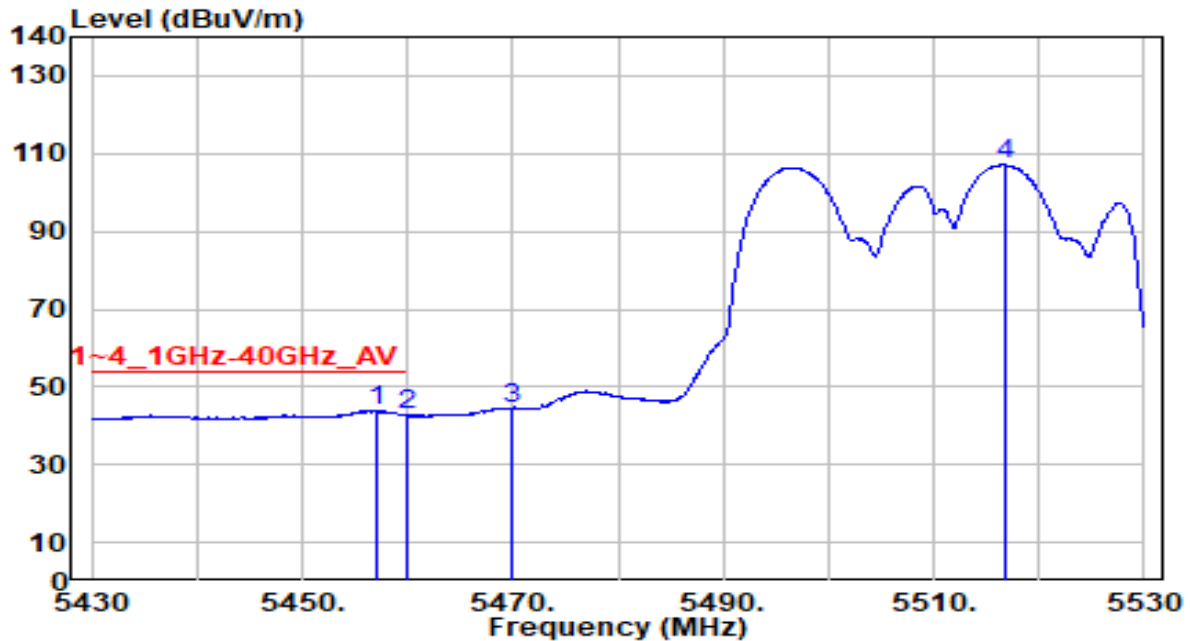


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.200	43.10	0.75	43.85	-10.15	54.00	185	160	Average
2		5460.000	42.09	0.76	42.85	-11.15	54.00	185	160	Average
3		5470.000	43.73	0.80	44.53	N/A	N/A	185	160	Average
4		5516.700	106.21	1.01	107.21	N/A	N/A	185	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

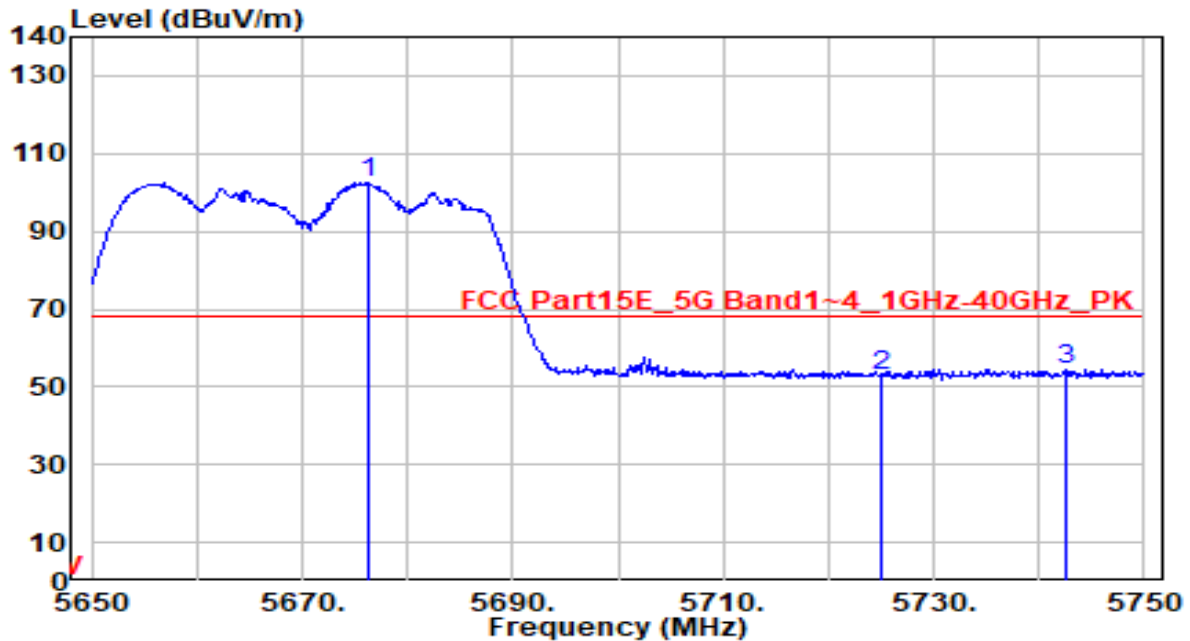


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5676.200	101.06	1.69	102.75	N/A	N/A	225	15	Peak
2	5725.000	50.69	1.89	52.58	-15.62	68.20	225	15	Peak
3	* 5742.500	52.63	1.96	54.59	-13.61	68.20	225	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

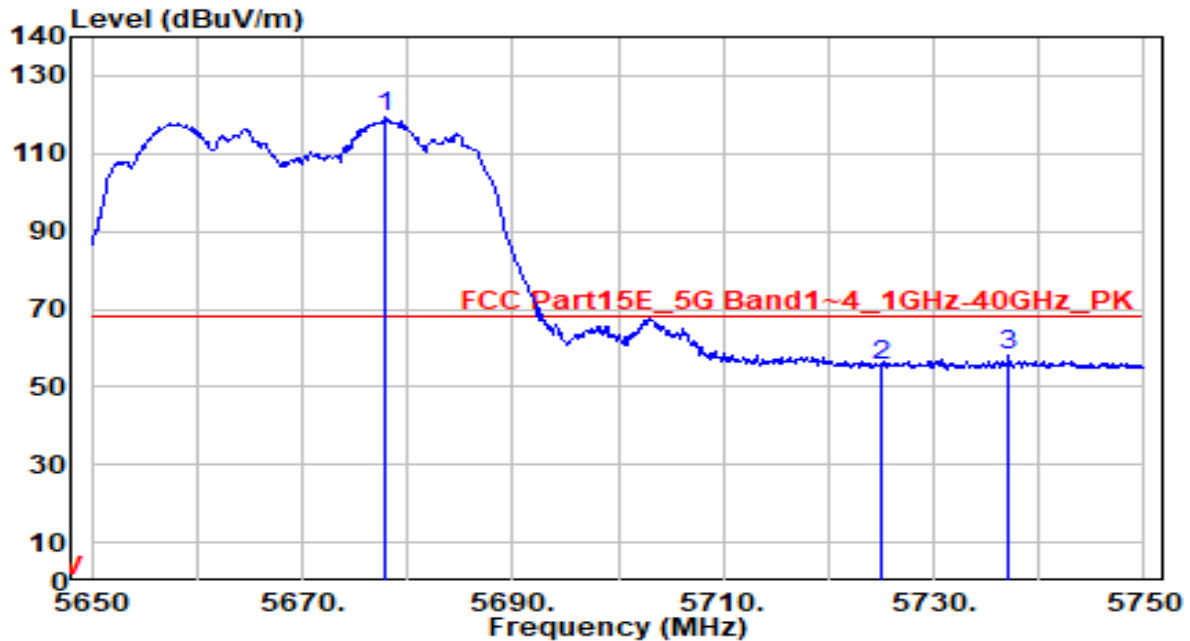


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5677.800	117.63	1.70	119.33	N/A	N/A	170	160	Peak
2	5725.000	53.33	1.89	55.22	-12.98	68.20	170	160	Peak
3	* 5737.100	56.04	1.94	57.98	-10.22	68.20	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

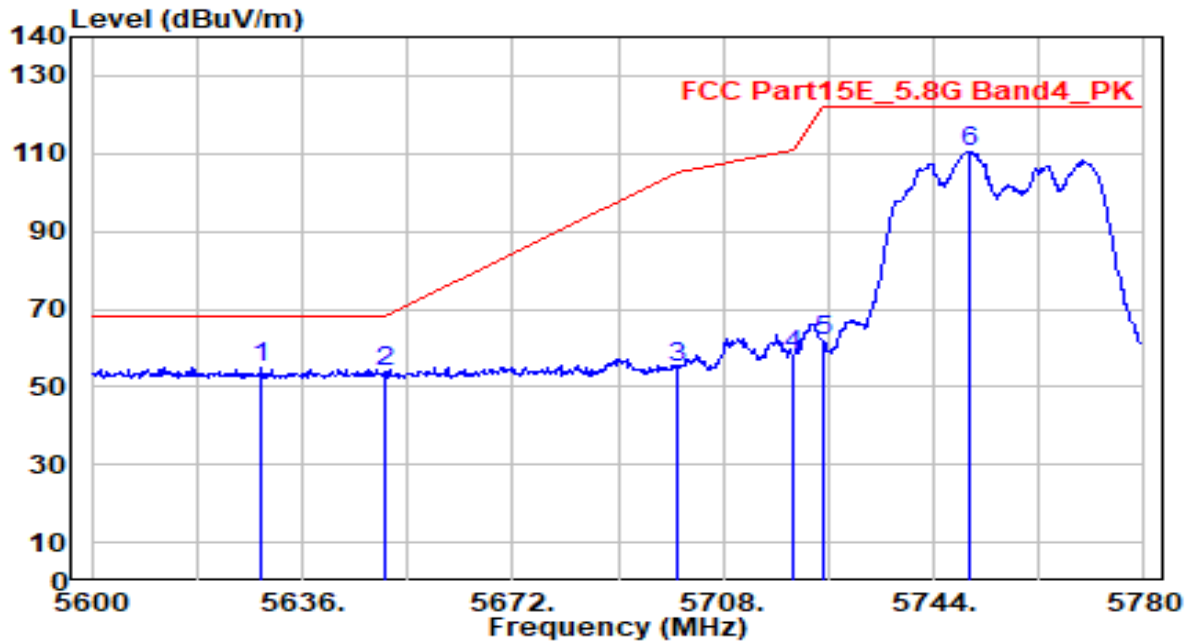


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5628.980	53.65	1.50	55.15	-13.05	68.20	105	185	Peak
2		5650.000	52.29	1.59	53.87	-14.33	68.20	105	185	Peak
3		5700.000	53.38	1.79	55.16	-50.04	105.20	105	185	Peak
4		5720.000	56.09	1.87	57.96	-52.84	110.80	105	185	Peak
5		5725.000	59.79	1.89	61.68	-60.52	122.20	105	185	Peak
6		5749.940	108.59	1.99	110.58	N/A	N/A	105	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

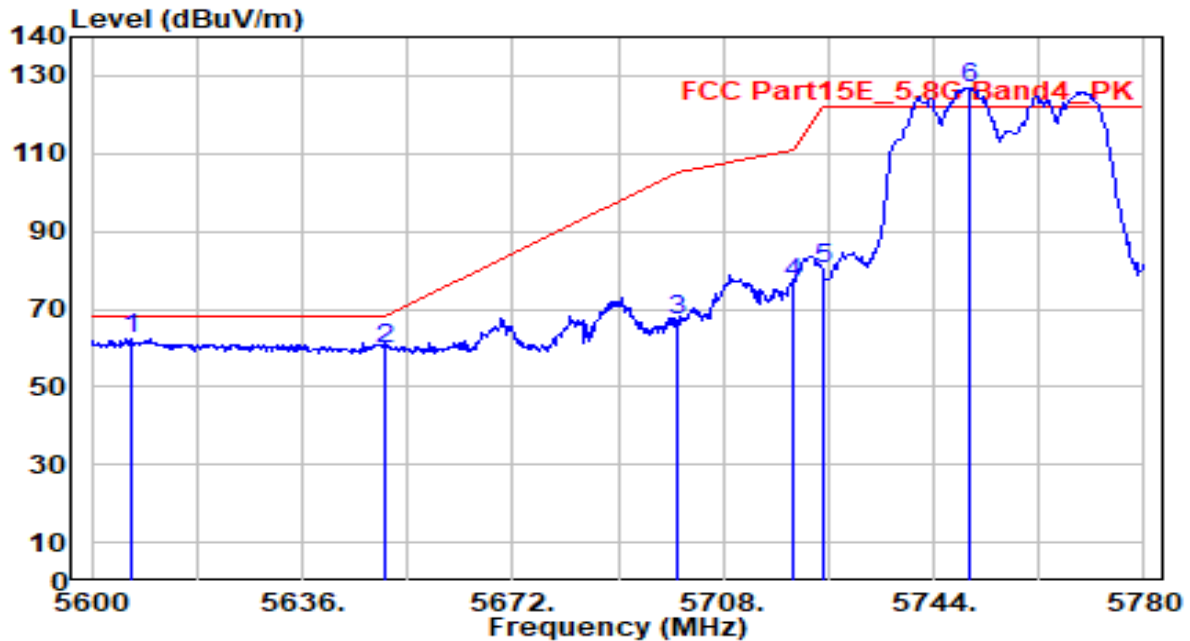


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.660	61.03	1.41	62.44	-5.76	68.20	200	350	Peak
2		5650.000	58.25	1.59	59.83	-8.37	68.20	200	350	Peak
3		5700.000	65.50	1.79	67.28	-37.92	105.20	200	350	Peak
4		5720.000	74.99	1.87	76.86	-33.94	110.80	200	350	Peak
5		5725.000	78.16	1.89	80.05	-42.15	122.20	200	350	Peak
6		5749.940	125.03	1.99	127.02	N/A	N/A	200	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

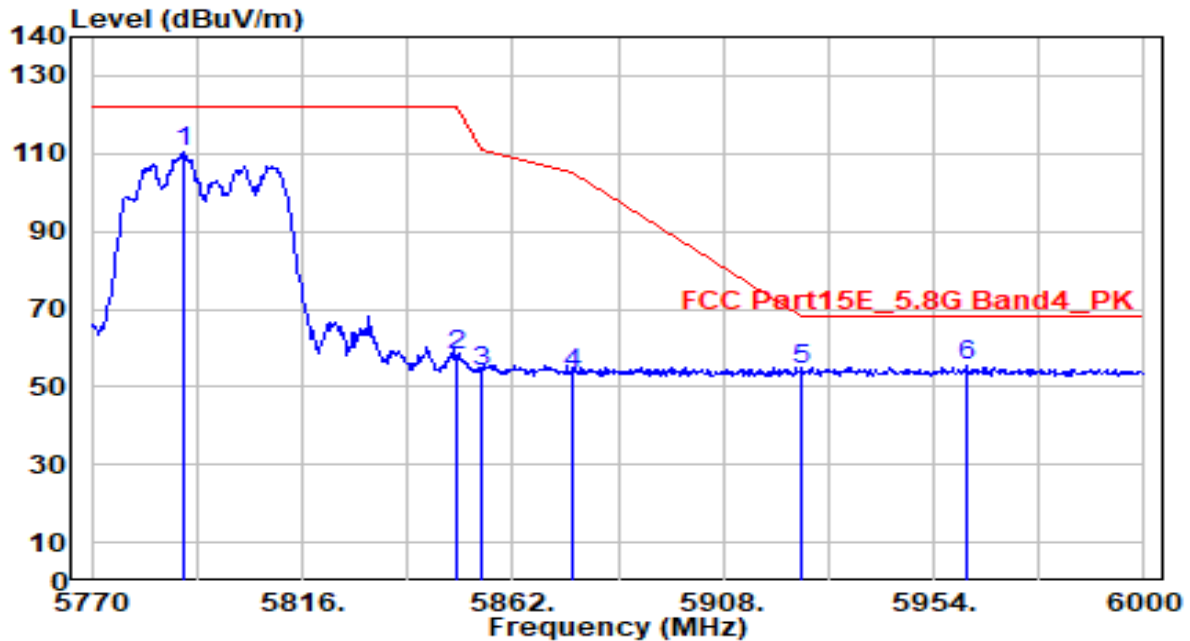


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.240	108.13	2.15	110.28	N/A	N/A	100	185	Peak
2	5850.000	55.87	2.27	58.14	-64.06	122.20	100	185	Peak
3	5855.000	51.80	2.28	54.08	-56.72	110.80	100	185	Peak
4	5875.000	51.08	2.31	53.39	-51.81	105.20	100	185	Peak
5	5925.000	52.16	2.38	54.54	-13.66	68.20	100	185	Peak
6	* 5961.130	52.82	2.44	55.26	-12.94	68.20	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

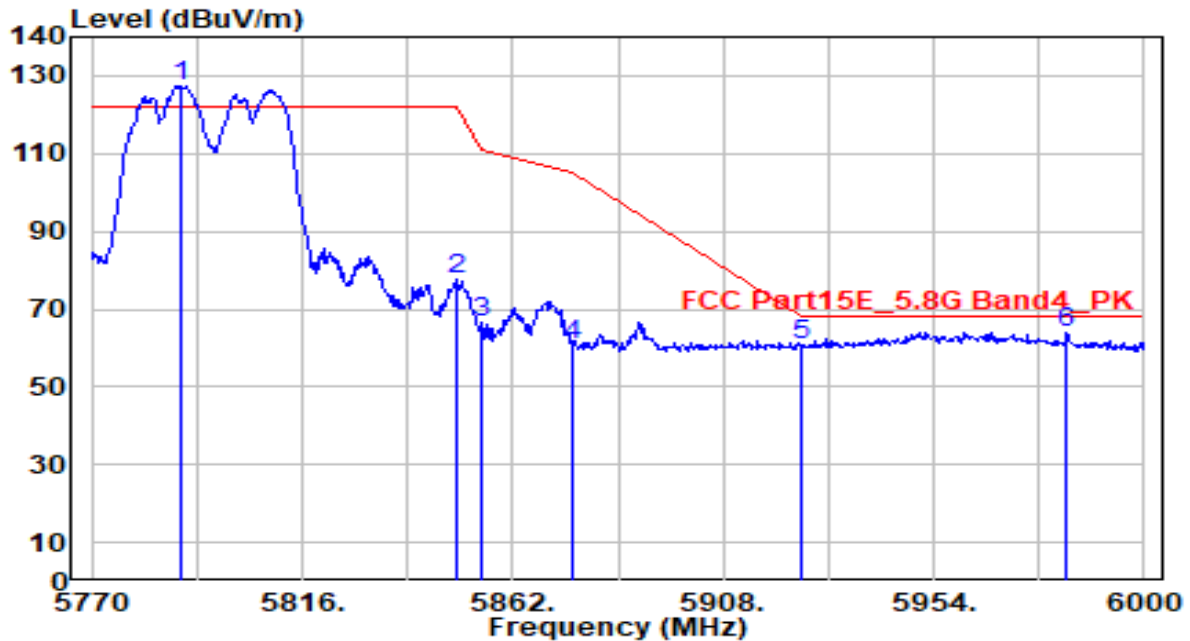


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5789.780	125.25	2.15	127.40	N/A	N/A	190	350	Peak
2	5850.000	75.31	2.27	77.58	-44.62	122.20	190	350	Peak
3	5855.000	64.39	2.28	66.67	-44.13	110.80	190	350	Peak
4	5875.000	58.59	2.31	60.90	-44.30	105.20	190	350	Peak
5	5925.000	58.54	2.38	60.92	-7.28	68.20	190	350	Peak
6	* 5983.210	61.68	2.47	64.15	-4.05	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

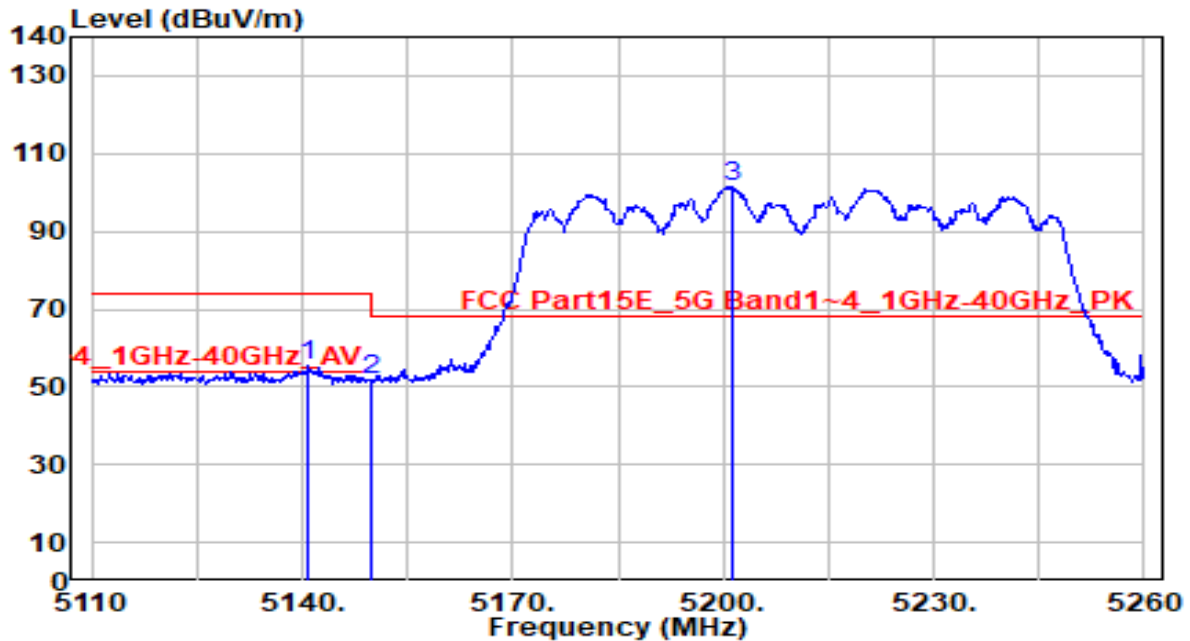


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.750	54.45	0.78	55.23	-18.77	74.00	295	155	Peak
2		5150.000	50.82	0.80	51.61	-22.39	74.00	295	155	Peak
3		5201.200	100.52	0.86	101.38	N/A	N/A	295	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

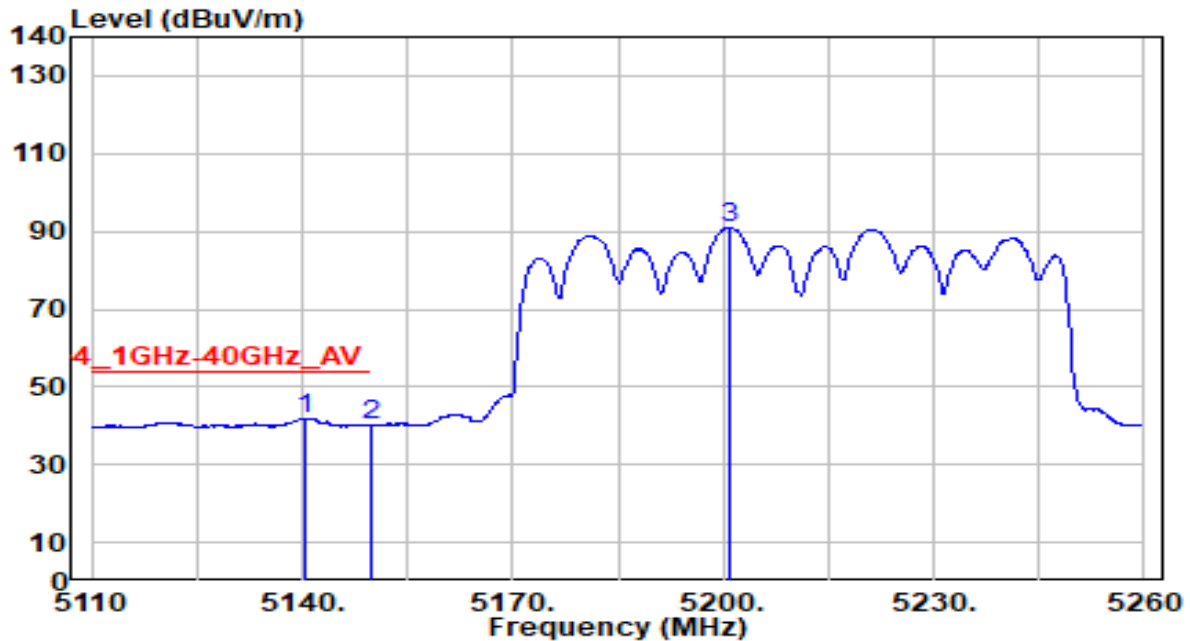


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.300	41.04	0.78	41.82	-12.18	54.00	295	155	Average
2		5150.000	39.15	0.80	39.94	-14.06	54.00	295	155	Average
3		5200.750	90.18	0.86	91.03	N/A	N/A	295	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

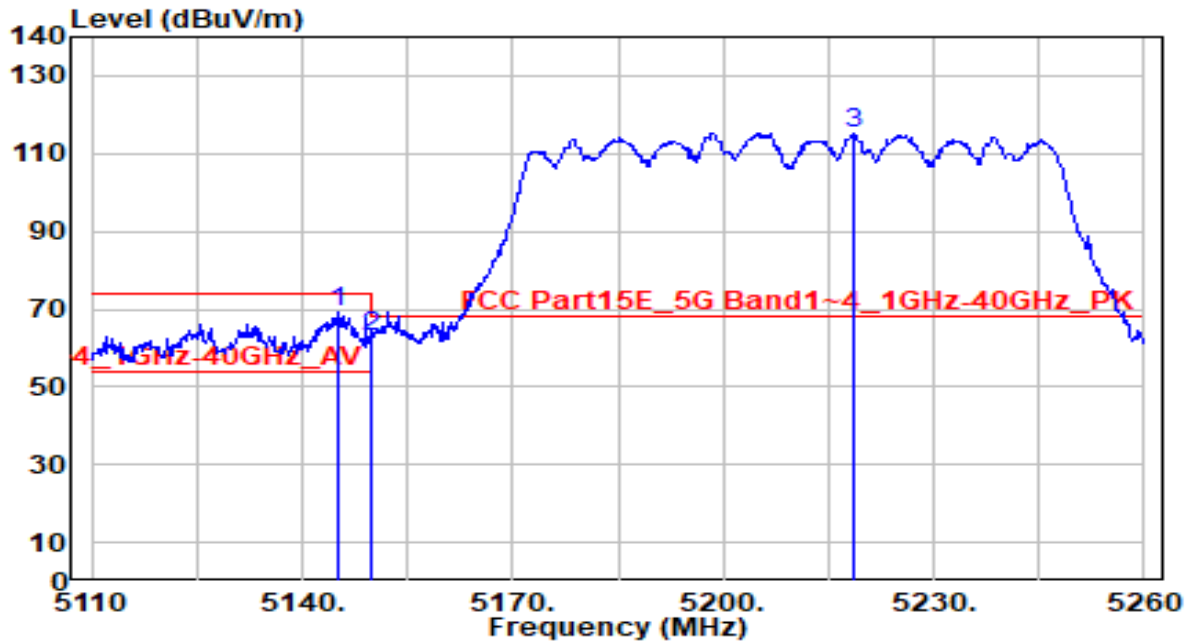


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.250	68.59	0.79	69.38	-4.62	74.00	110	340	Peak
2		5150.000	61.87	0.80	62.67	-11.33	74.00	110	340	Peak
3		5218.600	114.48	0.83	115.31	N/A	N/A	110	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

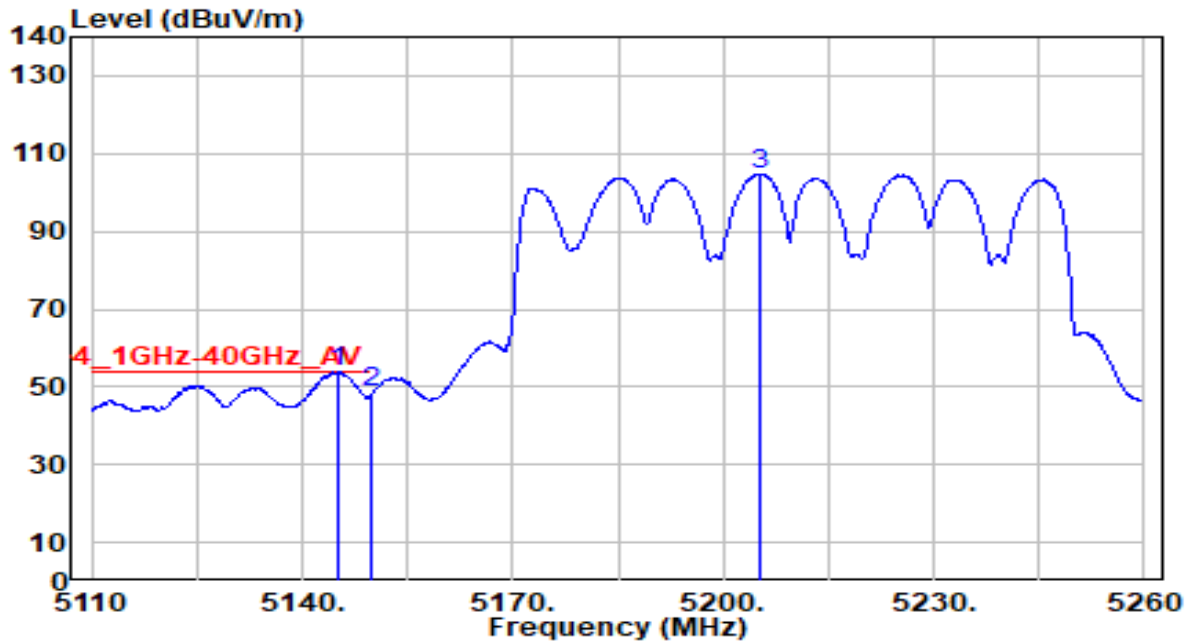


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.950	53.10	0.79	53.89	-0.11	54.00	110	340	Average
2		5150.000	47.55	0.80	48.35	-5.65	54.00	110	340	Average
3		5205.100	103.98	0.85	104.83	N/A	N/A	110	340	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

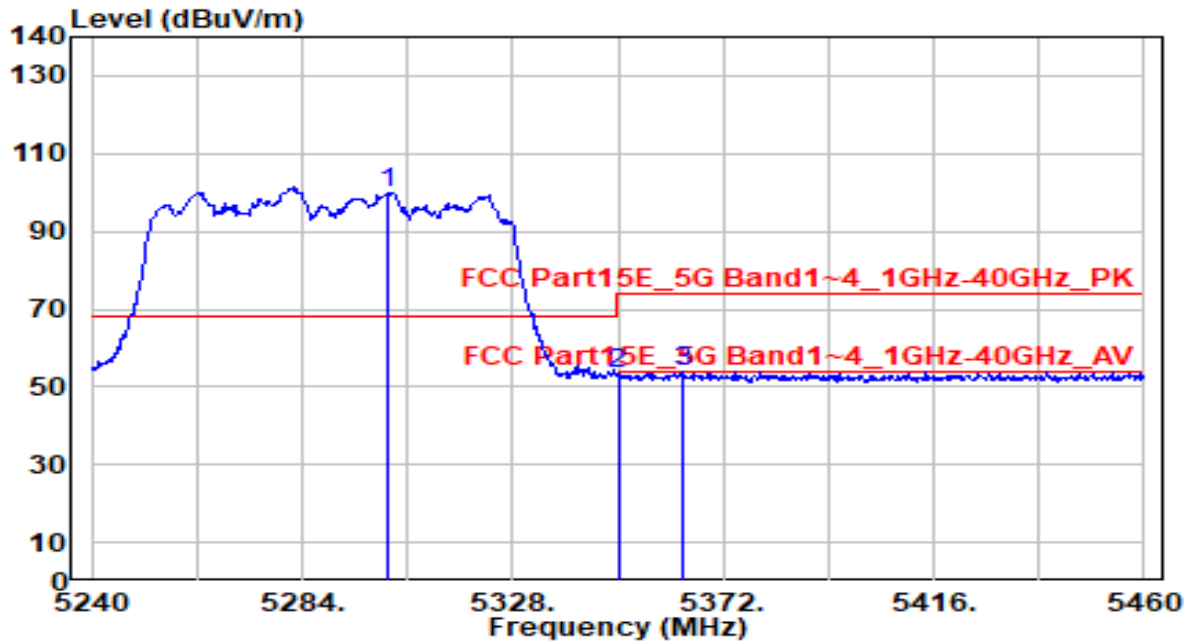


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.820	99.37	0.68	100.05	N/A	N/A	285	160	Peak
2	5350.000	52.69	0.59	53.28	-20.72	74.00	285	160	Peak
3	* 5363.640	53.28	0.57	53.85	-20.15	74.00	285	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

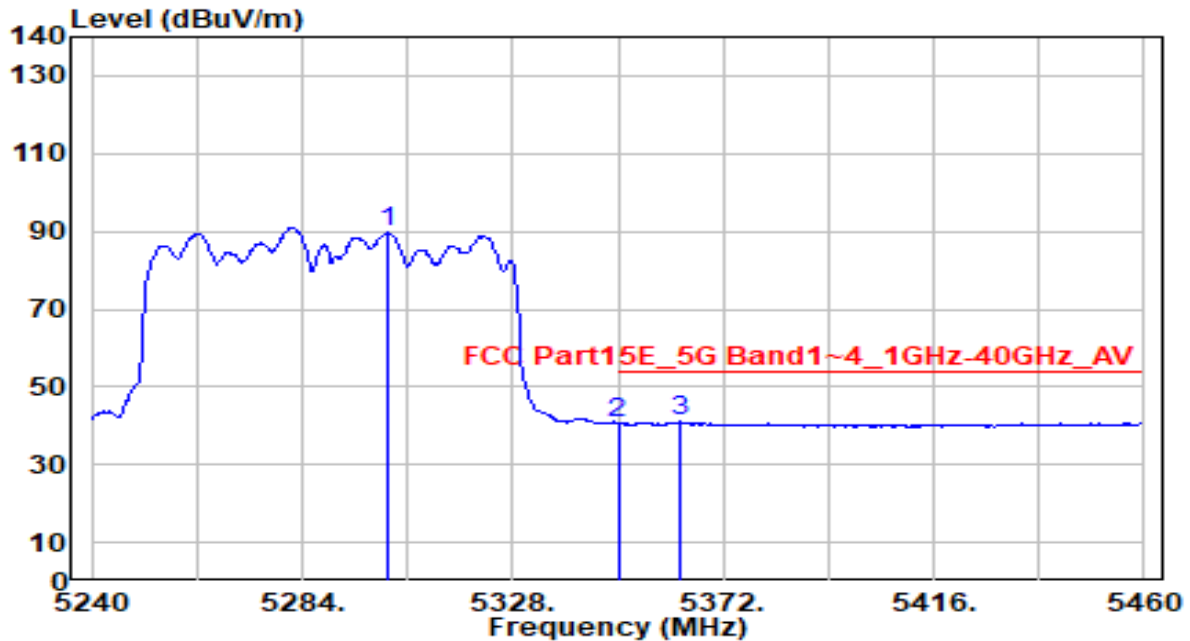


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.820	88.90	0.68	89.58	N/A	N/A	285	160	Average
2	5350.000	40.22	0.59	40.81	-13.19	54.00	285	160	Average
3	* 5362.980	40.44	0.57	41.01	-12.99	54.00	285	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

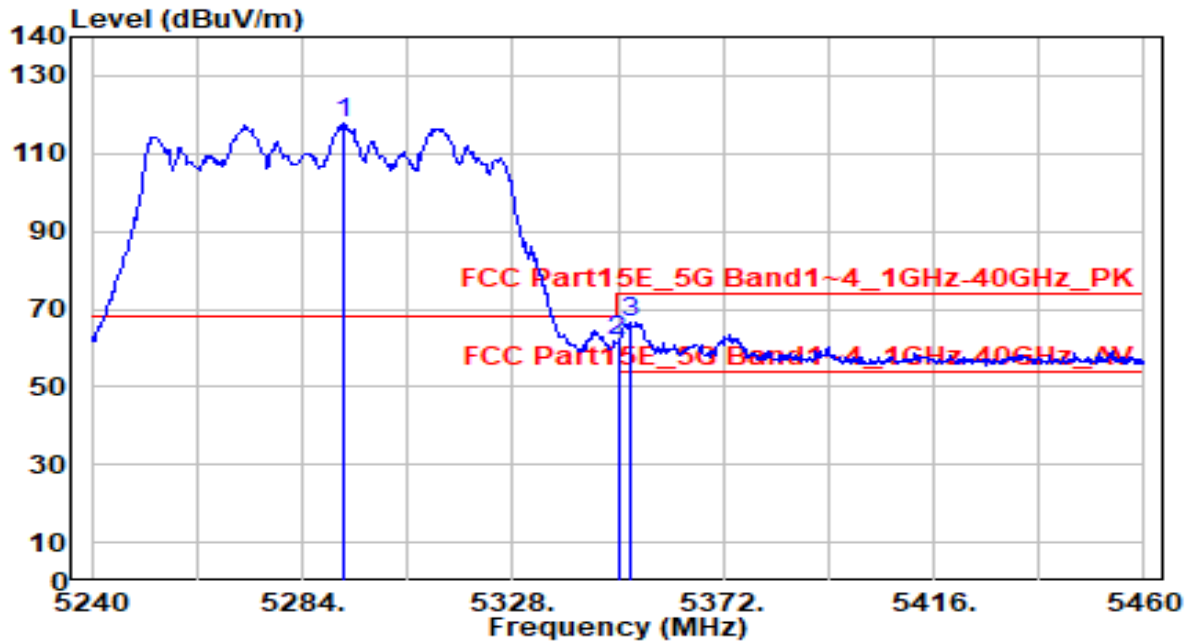


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.580	116.87	0.70	117.56	N/A	N/A	135	10	Peak
2	5350.000	61.44	0.59	62.03	-11.97	74.00	135	10	Peak
3	* 5352.860	65.89	0.59	66.48	-7.52	74.00	135	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

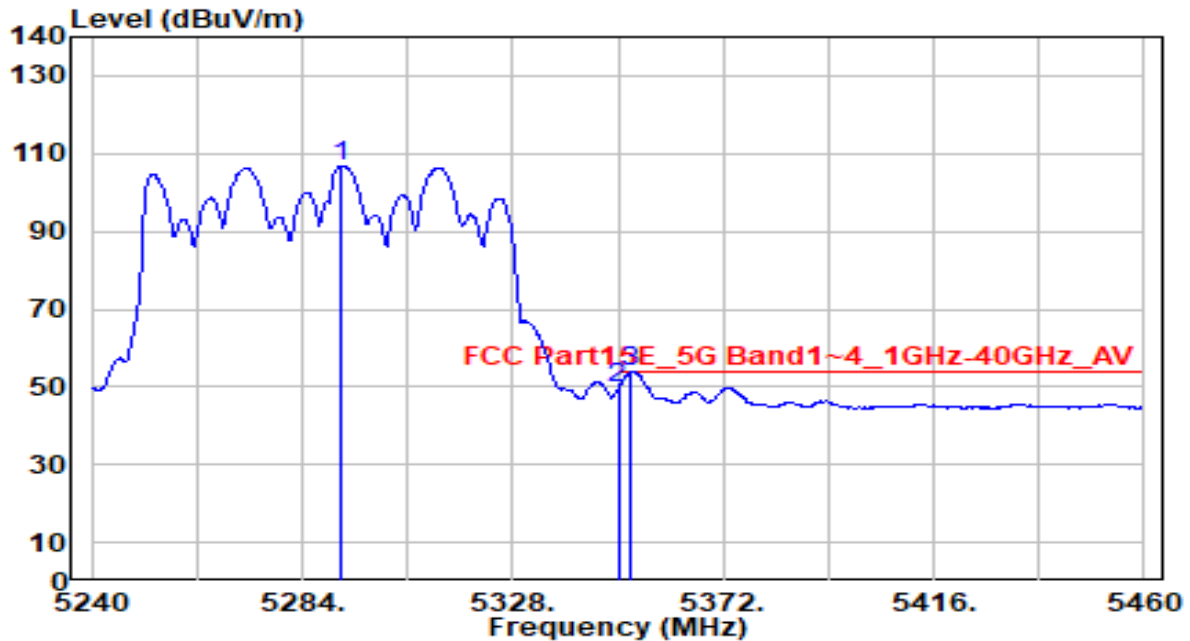


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.360	106.24	0.70	106.94	N/A	N/A	135	10	Average
2	5350.000	48.83	0.59	49.42	-4.58	54.00	135	10	Average
3	* 5352.420	53.28	0.59	53.87	-0.13	54.00	135	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

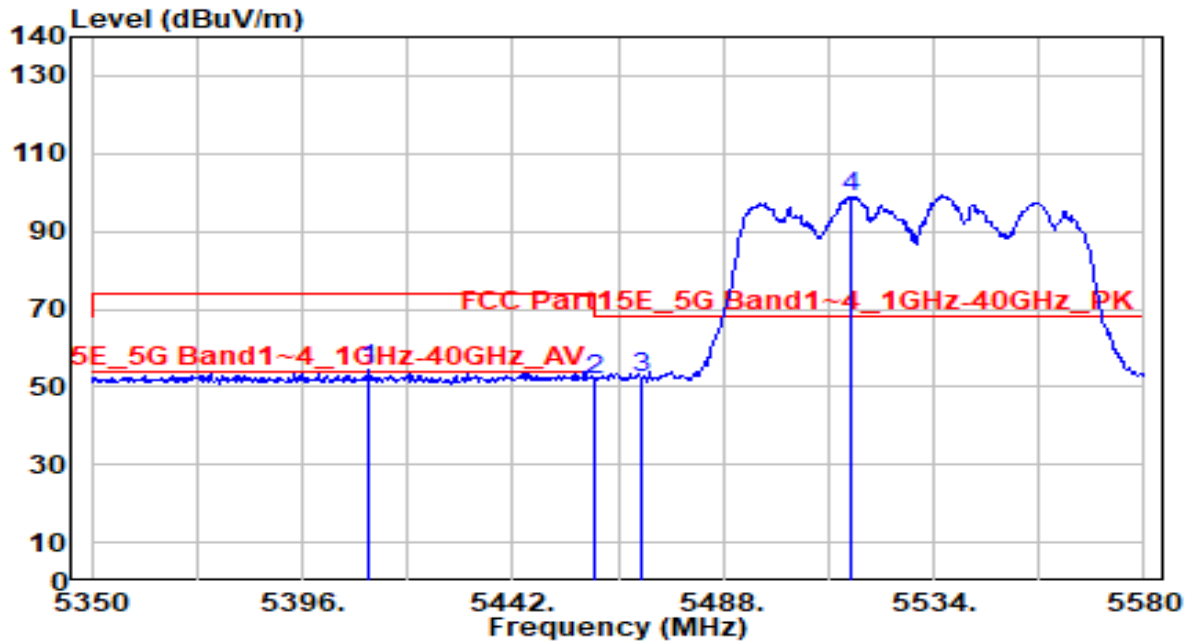


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5410.720	54.03	0.55	54.58	-19.42	74.00	115	25	Peak
2	5460.000	50.99	0.76	51.75	-22.25	74.00	115	25	Peak
3	* 5470.000	51.33	0.80	52.13	-16.07	68.20	115	25	Peak
4	5516.060	97.97	1.00	98.97	N/A	N/A	115	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

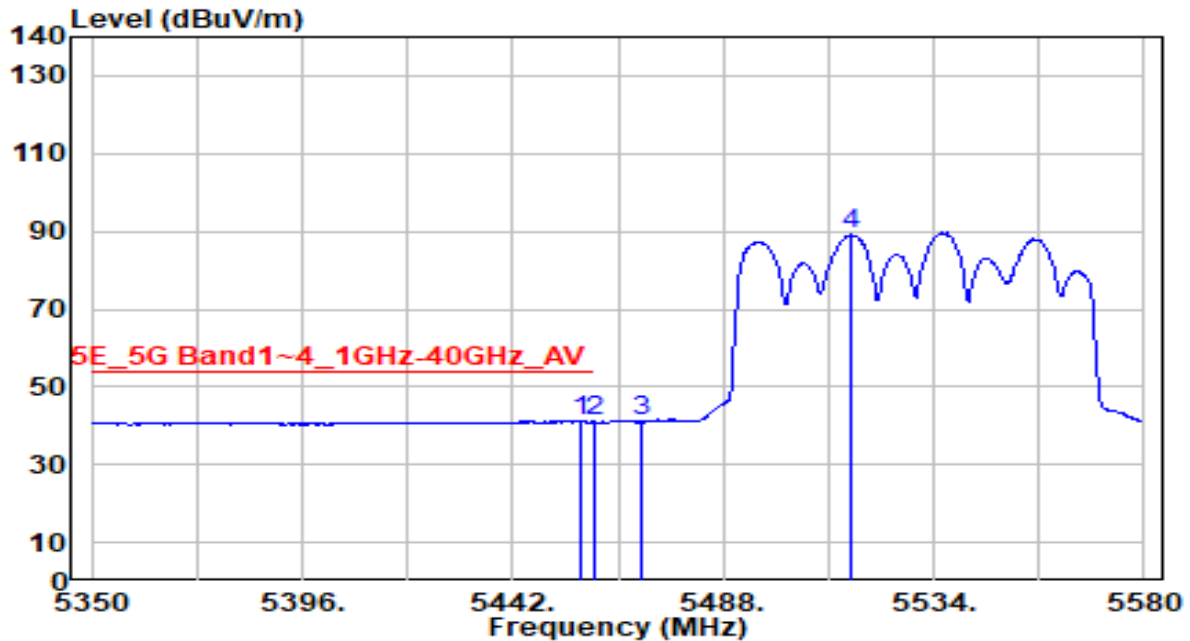


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.950	40.47	0.75	41.22	-12.78	54.00	115	25	Average
2		5460.000	40.23	0.76	40.99	-13.01	54.00	115	25	Average
3		5470.000	40.23	0.80	41.03	N/A	N/A	115	25	Average
4		5516.060	88.09	1.00	89.09	N/A	N/A	115	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

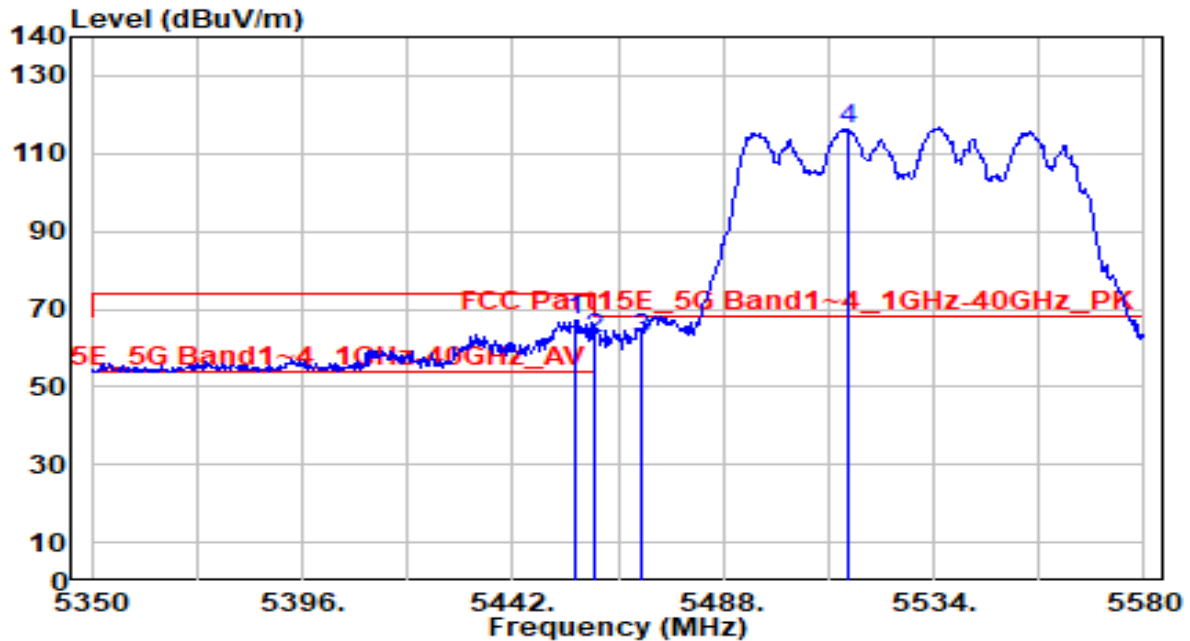


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.800	66.61	0.74	67.36	-6.64	74.00	170	60	Peak
2	5460.000	61.43	0.76	62.19	-11.81	74.00	170	60	Peak
3	* 5470.000	61.61	0.80	62.42	-5.78	68.20	170	60	Peak
4	5515.140	115.44	1.00	116.43	N/A	N/A	170	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

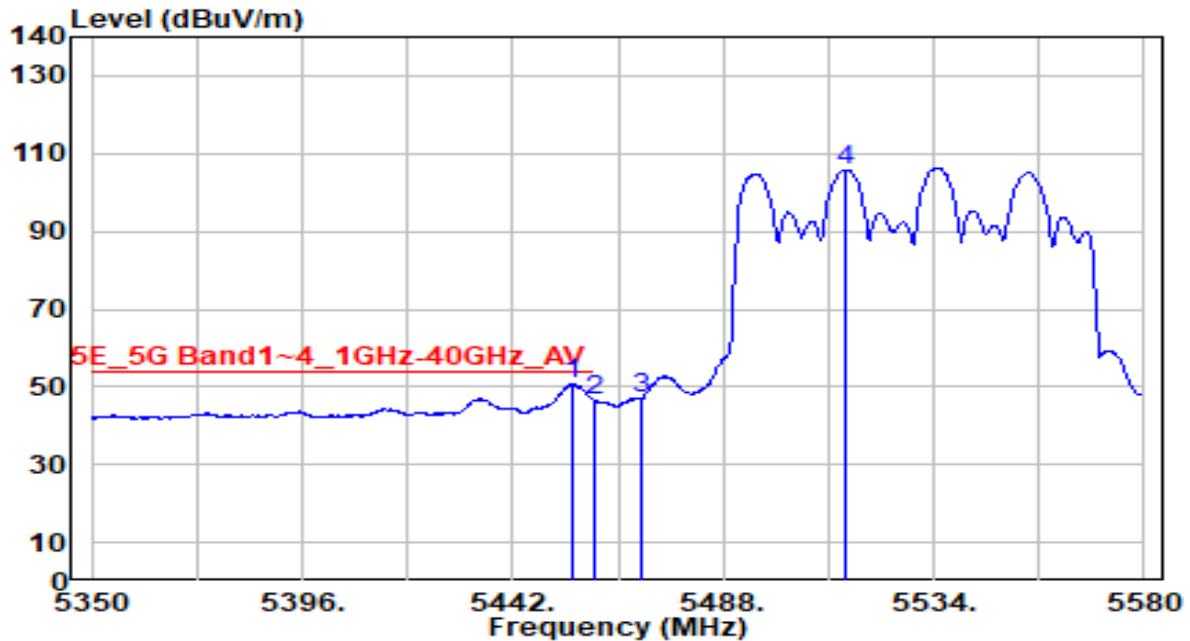


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.110	50.22	0.74	50.96	-3.04	54.00	170	60	Average
2		5460.000	45.77	0.76	46.53	-7.47	54.00	170	60	Average
3		5470.000	46.10	0.80	46.90	N/A	N/A	170	60	Average
4		5514.450	104.81	1.00	105.81	N/A	N/A	170	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

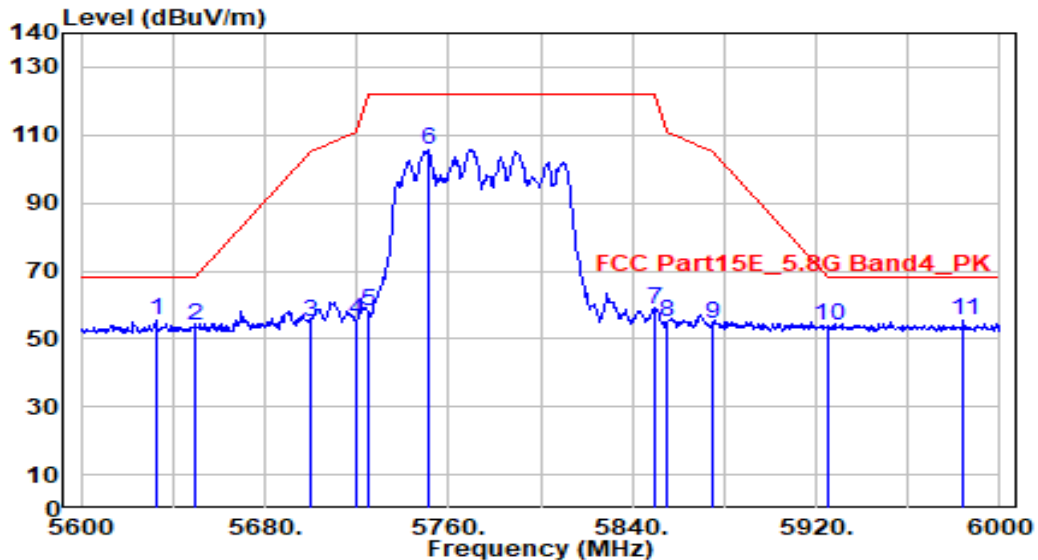


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5632.400	53.72	1.51	55.24	-12.96	68.20	100	185	Peak
2	5650.000	52.30	1.59	53.89	-14.31	68.20	100	185	Peak
3	5700.000	53.15	1.79	54.94	-50.26	105.20	100	185	Peak
4	5720.000	53.37	1.87	55.24	-55.56	110.80	100	185	Peak
5	5725.000	56.31	1.89	58.20	-64.00	122.20	100	185	Peak
6	5750.800	103.46	1.99	105.45	N/A	N/A	100	185	Peak
7	5850.000	56.62	2.27	58.89	-63.31	122.20	100	185	Peak
8	5855.000	52.47	2.28	54.75	-56.05	110.80	100	185	Peak
9	5875.000	51.97	2.31	54.28	-50.92	105.20	100	185	Peak
10	5925.000	51.37	2.38	53.75	-14.45	68.20	100	185	Peak
11	* 5984.400	52.87	2.48	55.35	-12.85	68.20	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

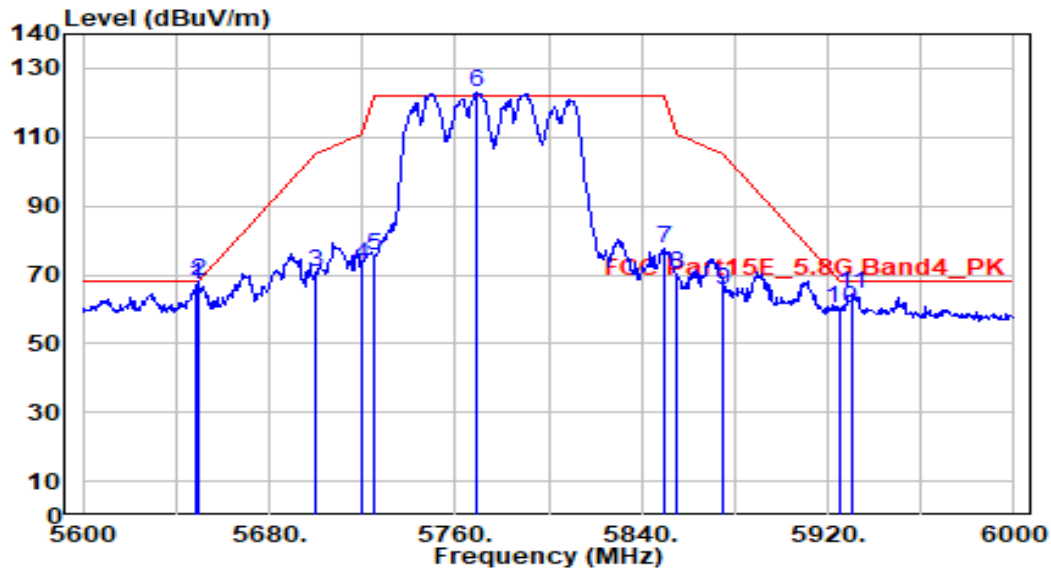


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5648.800	65.51	1.58	67.10	-1.10	68.20	175	350	Peak
2	* 5650.000	66.53	1.59	68.11	-0.09	68.20	175	350	Peak
3	5700.000	68.89	1.79	70.68	-34.52	105.20	175	350	Peak
4	5720.000	71.21	1.87	73.08	-37.72	110.80	175	350	Peak
5	5725.000	73.42	1.89	75.31	-46.89	122.20	175	350	Peak
6	5769.200	120.90	2.07	122.97	N/A	N/A	175	350	Peak
7	5850.000	75.19	2.27	77.46	-44.74	122.20	175	350	Peak
8	5855.000	67.98	2.28	70.26	-40.54	110.80	175	350	Peak
9	5875.000	63.37	2.31	65.68	-39.52	105.20	175	350	Peak
10	5925.000	57.94	2.38	60.33	-7.87	68.20	175	350	Peak
11	5930.400	62.02	2.39	64.41	-3.79	68.20	175	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

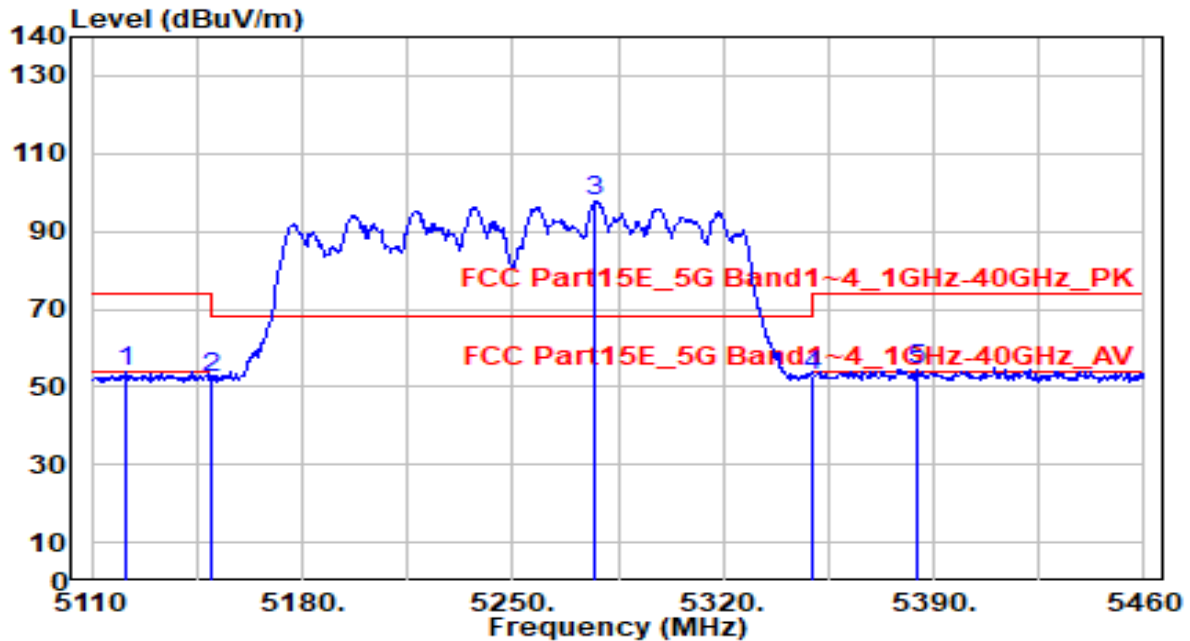


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5121.200	52.95	0.76	53.71	-20.29	74.00	300	105	Peak
2	5150.000	51.29	0.80	52.09	-21.91	74.00	300	105	Peak
3	5277.650	96.84	0.72	97.56	N/A	N/A	300	105	Peak
4	5350.000	52.30	0.59	52.90	-21.10	74.00	300	105	Peak
5	* 5384.400	54.04	0.53	54.58	-19.42	74.00	300	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

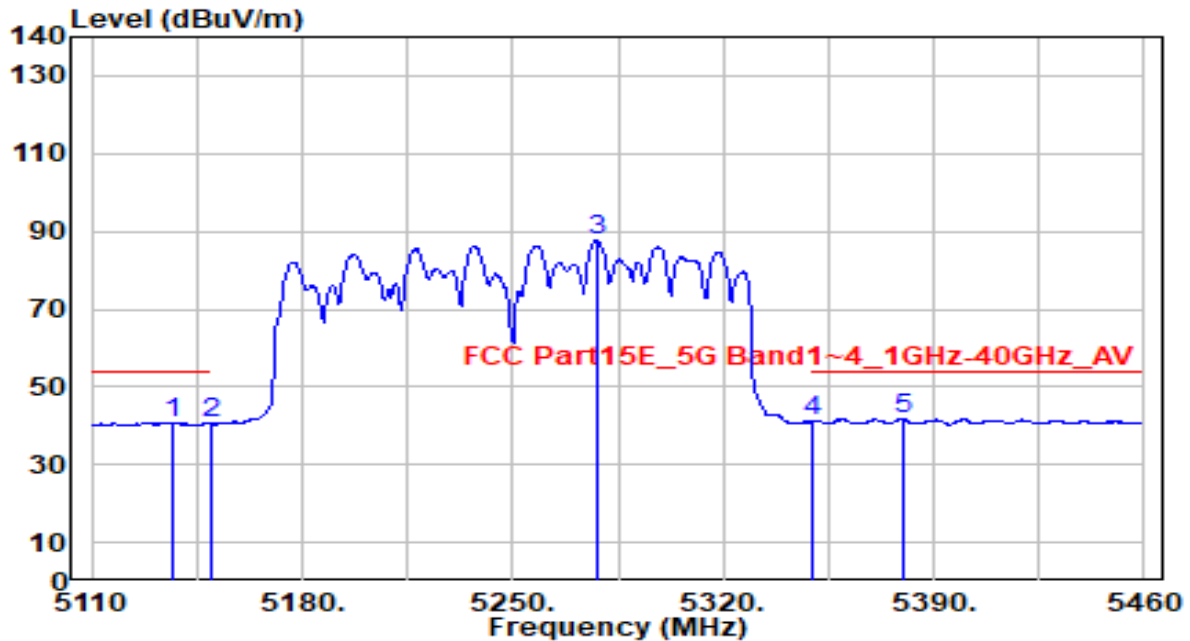


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5137.300	40.03	0.78	40.81	-13.19	54.00	300	105	Average
2	5150.000	39.94	0.80	40.74	-13.26	54.00	300	105	Average
3	5278.000	86.90	0.72	87.63	N/A	N/A	300	105	Average
4	5350.000	40.62	0.59	41.21	-12.79	54.00	300	105	Average
5	* 5379.850	41.31	0.54	41.86	-12.14	54.00	300	105	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

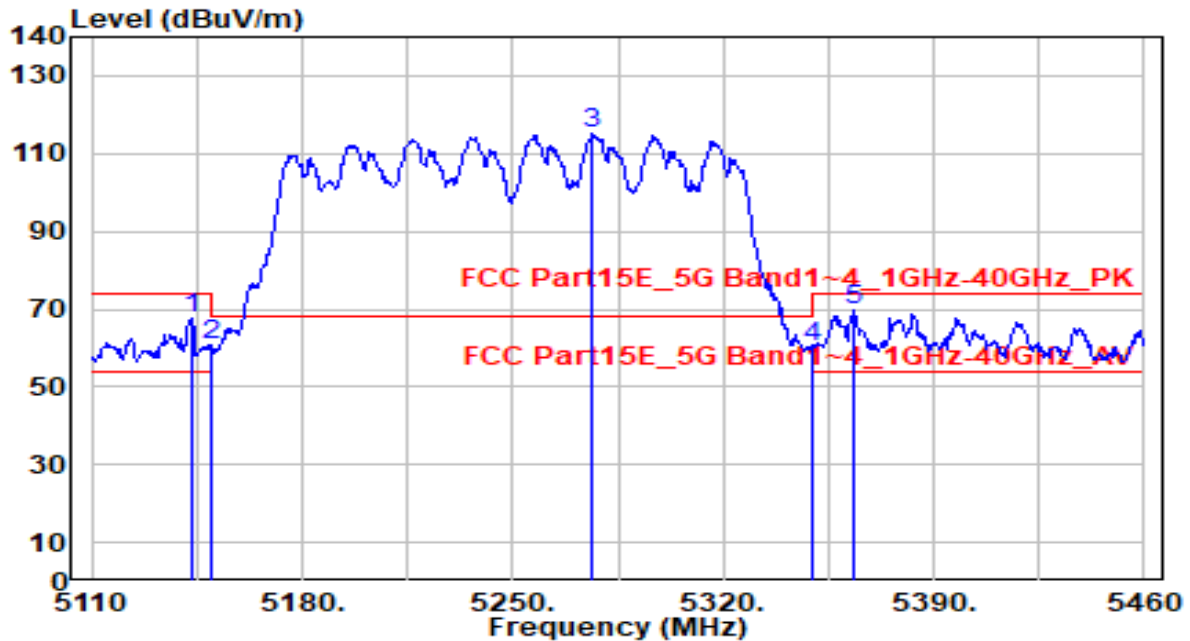


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.250	66.67	0.79	67.46	-6.54	74.00	115	160	Peak
2	5150.000	59.88	0.80	60.68	-13.32	74.00	115	160	Peak
3	5276.600	114.39	0.72	115.12	N/A	N/A	115	160	Peak
4	5350.000	59.48	0.59	60.08	-13.92	74.00	115	160	Peak
5	* 5363.400	69.25	0.57	69.82	-4.18	74.00	115	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

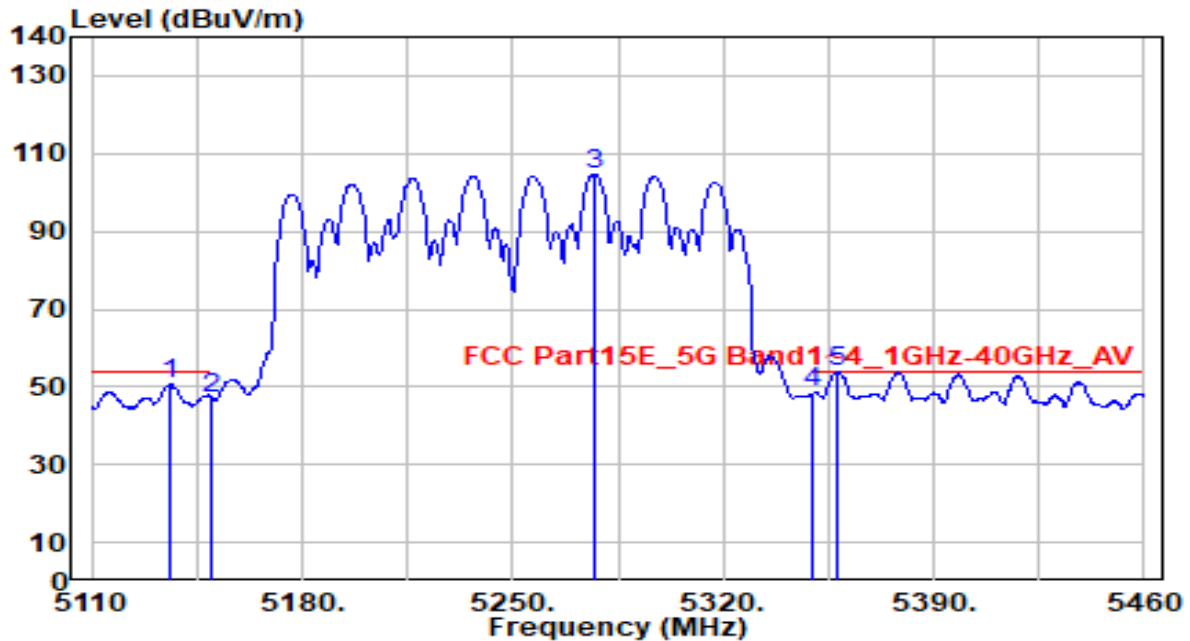


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5135.900	49.78	0.78	50.55	-3.45	54.00	115	160	Average
2	5150.000	46.33	0.80	47.13	-6.87	54.00	115	160	Average
3	5276.950	104.07	0.72	104.79	N/A	N/A	115	160	Average
4	5350.000	47.75	0.59	48.35	-5.65	54.00	115	160	Average
5	* 5358.150	53.27	0.58	53.85	-0.15	54.00	115	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

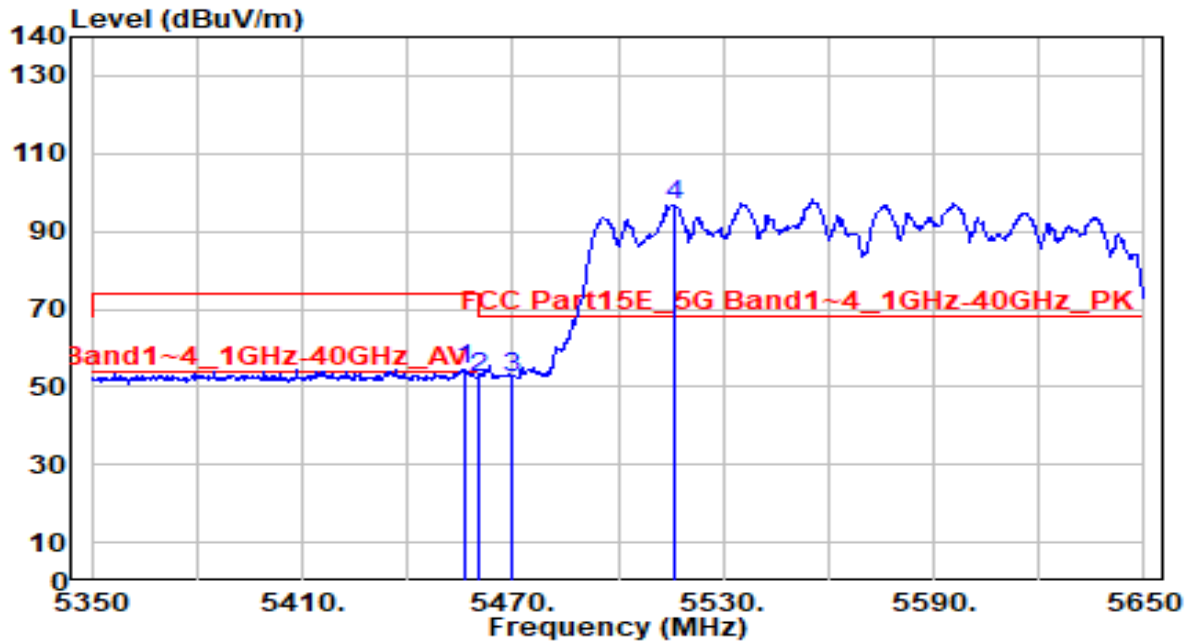


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.200	53.82	0.74	54.56	-19.44	74.00	275	180	Peak
2	5460.000	51.36	0.76	52.12	-21.88	74.00	275	180	Peak
3	* 5470.000	51.48	0.80	52.28	-15.92	68.20	275	180	Peak
4	5515.900	95.93	1.00	96.93	N/A	N/A	275	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

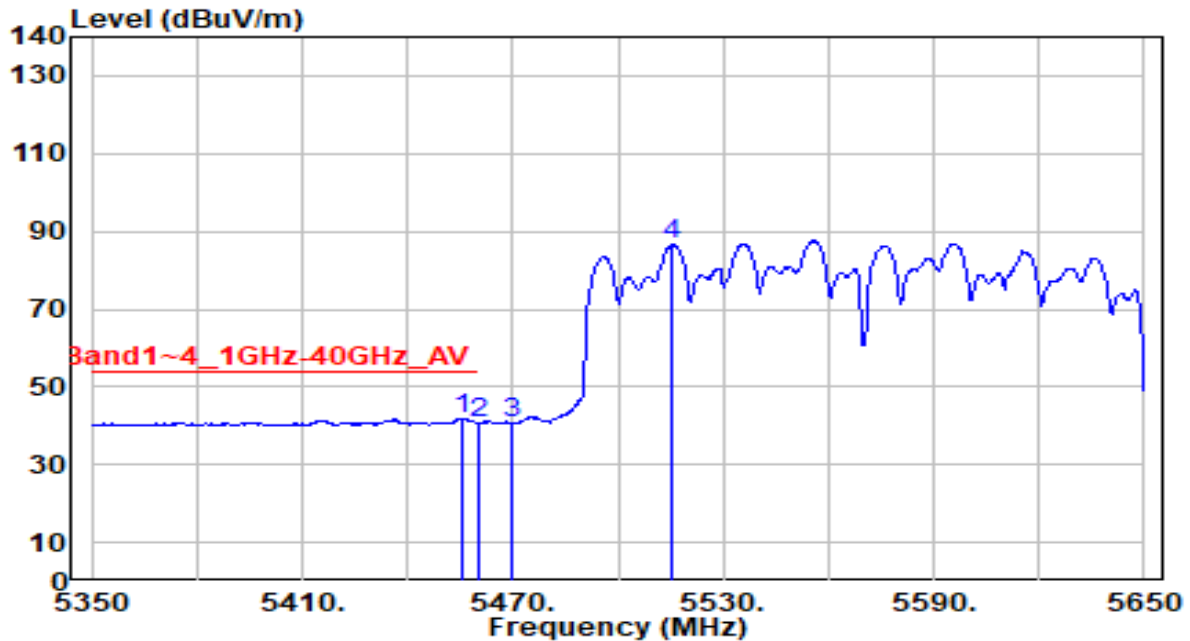


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.300	41.23	0.74	41.97	-12.03	54.00	275	180	Average
2		5460.000	39.85	0.76	40.61	-13.39	54.00	275	180	Average
3		5470.000	39.75	0.80	40.56	N/A	N/A	275	180	Average
4		5515.600	85.66	1.00	86.66	N/A	N/A	275	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

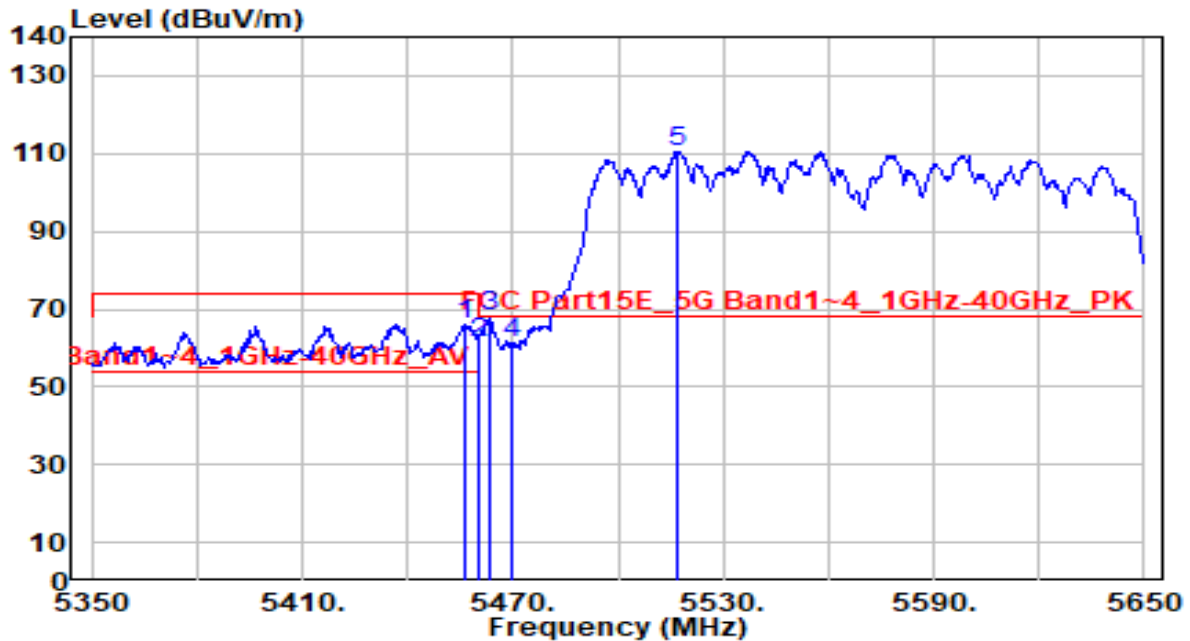


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.500	65.36	0.75	66.10	-7.90	74.00	105	160	Peak
2	5460.000	60.58	0.76	61.34	-12.66	74.00	105	160	Peak
3	* 5463.100	67.31	0.77	68.08	-0.12	68.20	105	160	Peak
4	5470.000	60.50	0.80	61.30	-6.90	68.20	105	160	Peak
5	5517.100	109.63	1.01	110.64	N/A	N/A	105	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

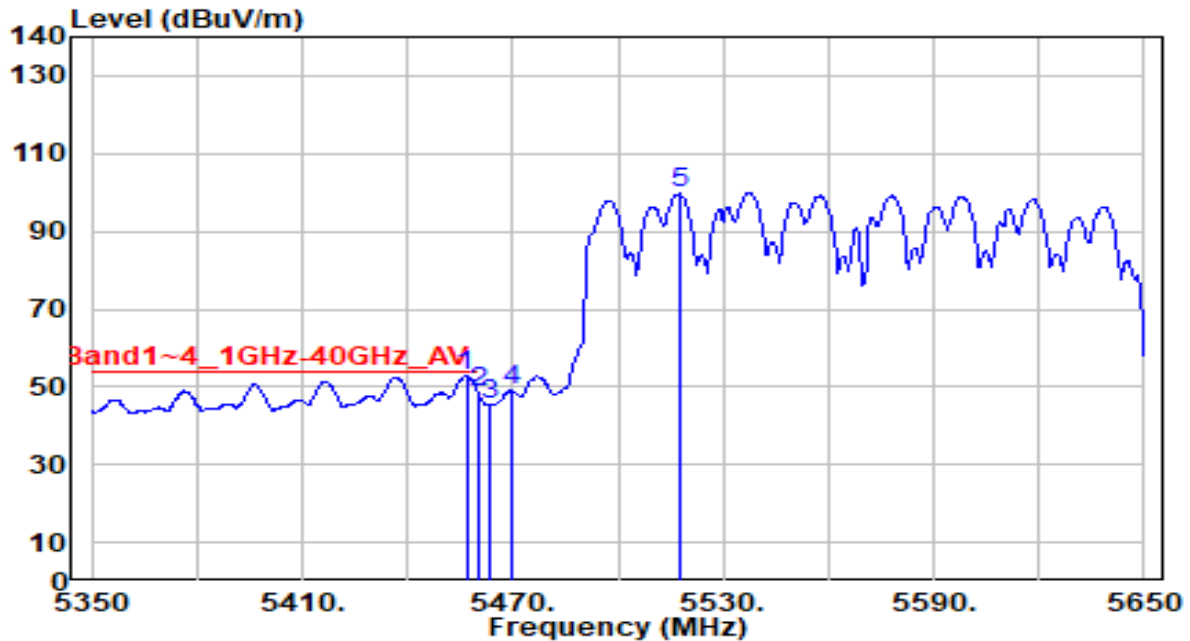


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.800	52.02	0.75	52.76	-1.24	54.00	105	160	Average
2		5460.000	48.03	0.76	48.79	-5.21	54.00	105	160	Average
3		5463.100	44.43	0.77	45.20	N/A	N/A	105	160	Average
4		5470.000	48.10	0.80	48.91	N/A	N/A	105	160	Average
5		5517.400	98.65	1.01	99.66	N/A	N/A	105	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

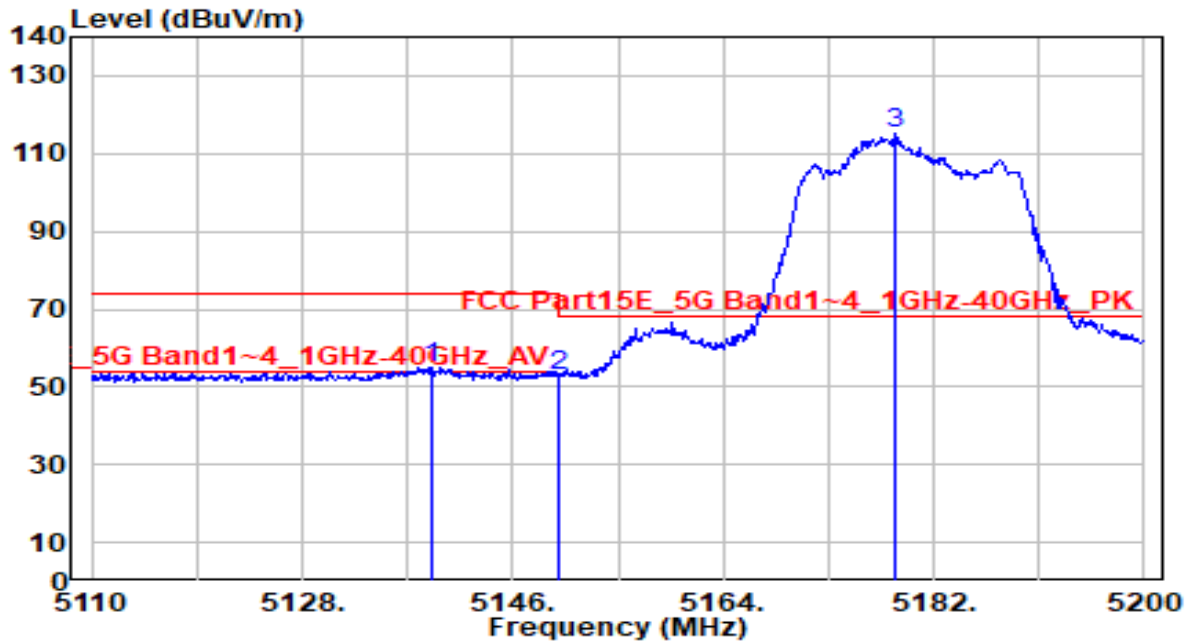


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.070	54.14	0.78	54.92	-19.08	74.00	290	95	Peak
2		5150.000	51.91	0.80	52.71	-21.29	74.00	290	95	Peak
3		5178.760	114.12	0.83	114.95	N/A	N/A	290	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

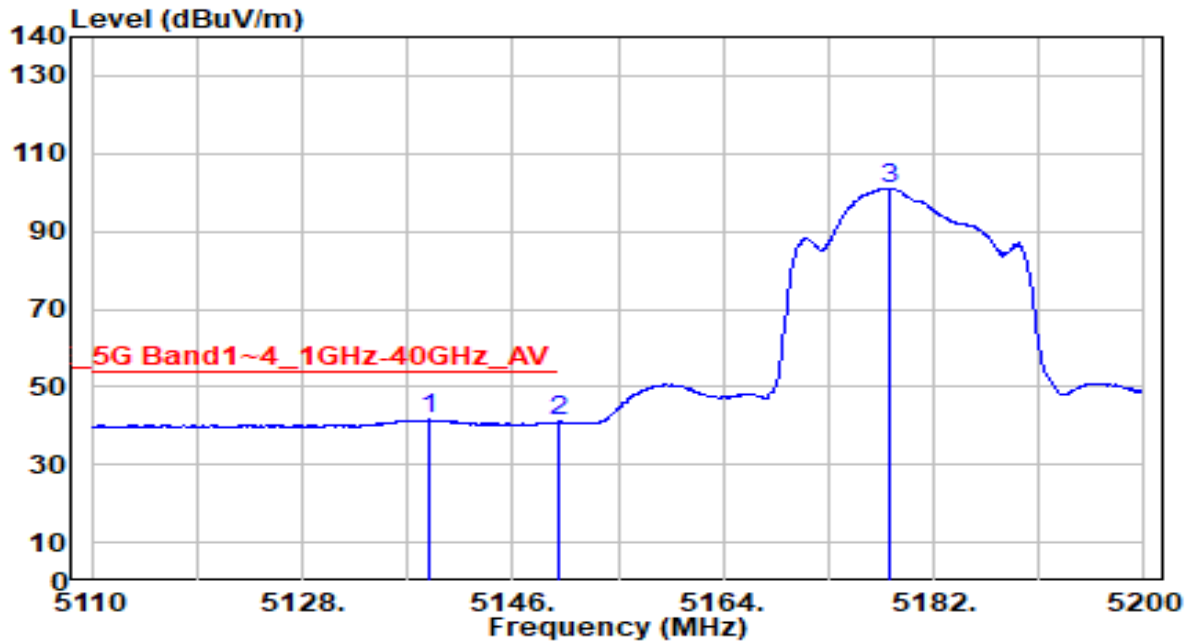


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.800	40.73	0.78	41.51	-12.49	54.00	290	95	Average
2		5150.000	40.16	0.80	40.96	-13.04	54.00	290	95	Average
3		5178.310	100.21	0.83	101.04	N/A	N/A	290	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

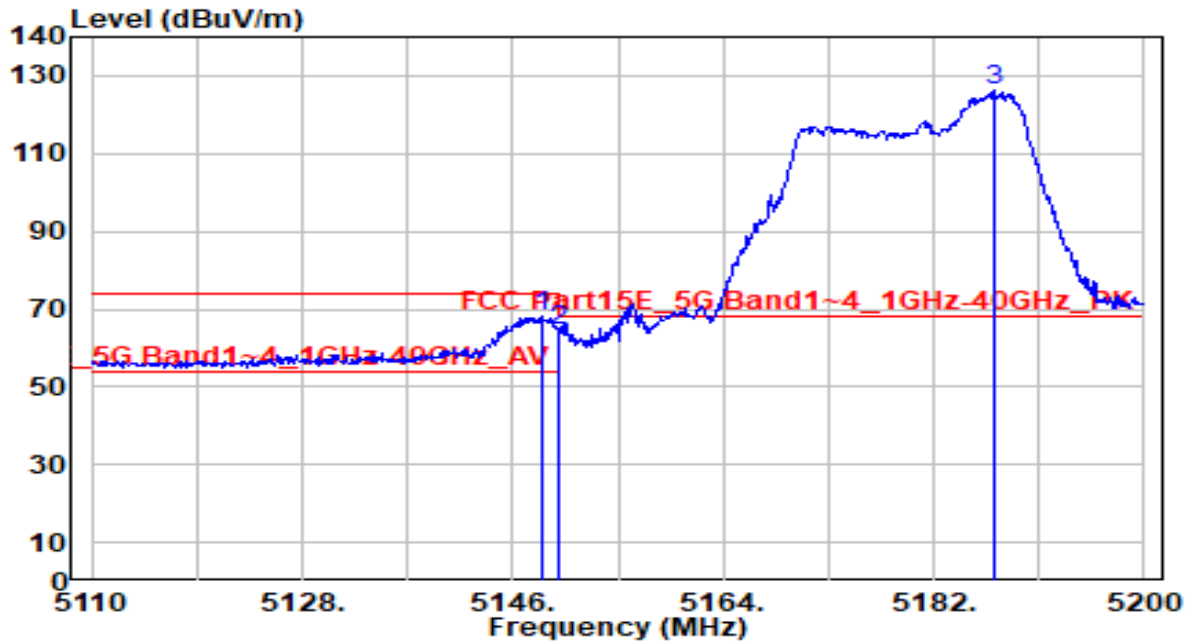


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	67.17	0.79	67.96	-6.04	74.00	100	330	Peak
2		5150.000	63.89	0.80	64.69	-9.31	74.00	100	330	Peak
3		5187.130	125.52	0.84	126.36	N/A	N/A	100	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

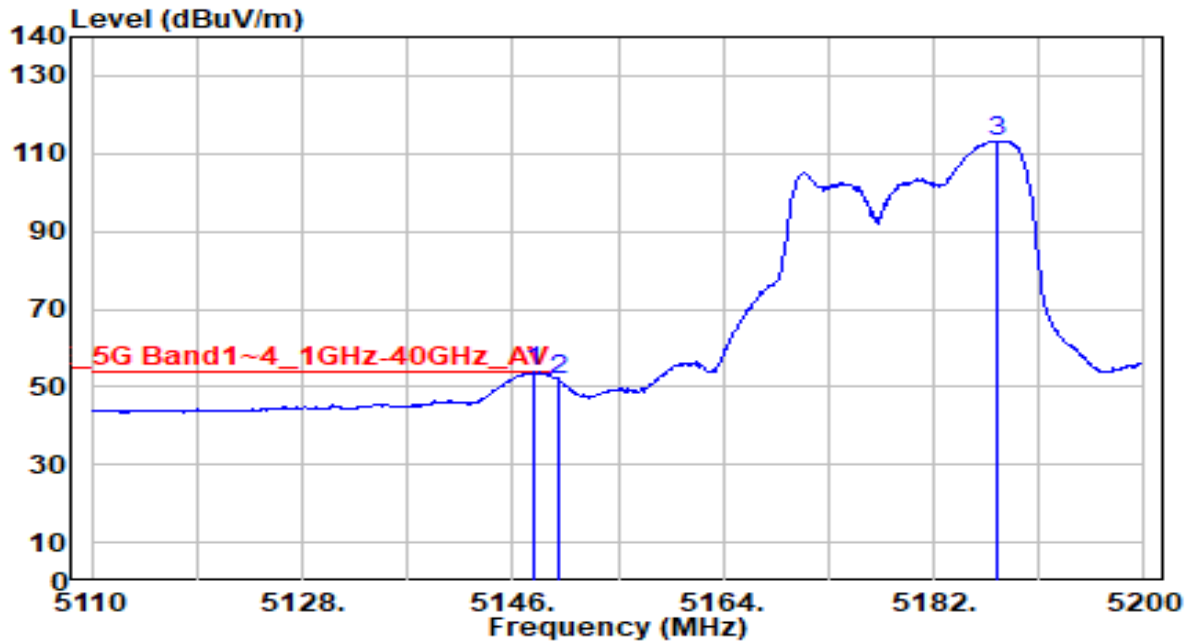


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	53.02	0.79	53.82	-0.18	54.00	100	330	Average
2		5150.000	50.73	0.80	51.53	-2.47	54.00	100	330	Average
3		5187.490	112.40	0.84	113.25	N/A	N/A	100	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

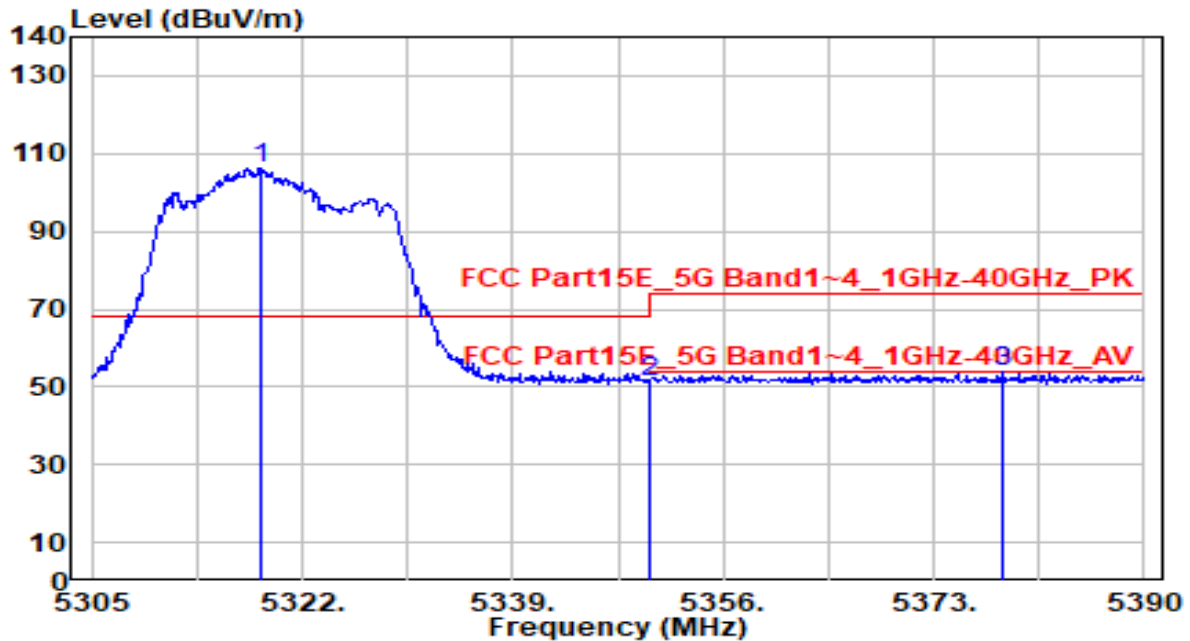


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.600	105.69	0.65	106.34	N/A	N/A	315	95	Peak
2	5350.000	50.39	0.59	50.98	-23.02	74.00	315	95	Peak
3	* 5378.610	53.12	0.54	53.66	-20.34	74.00	315	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

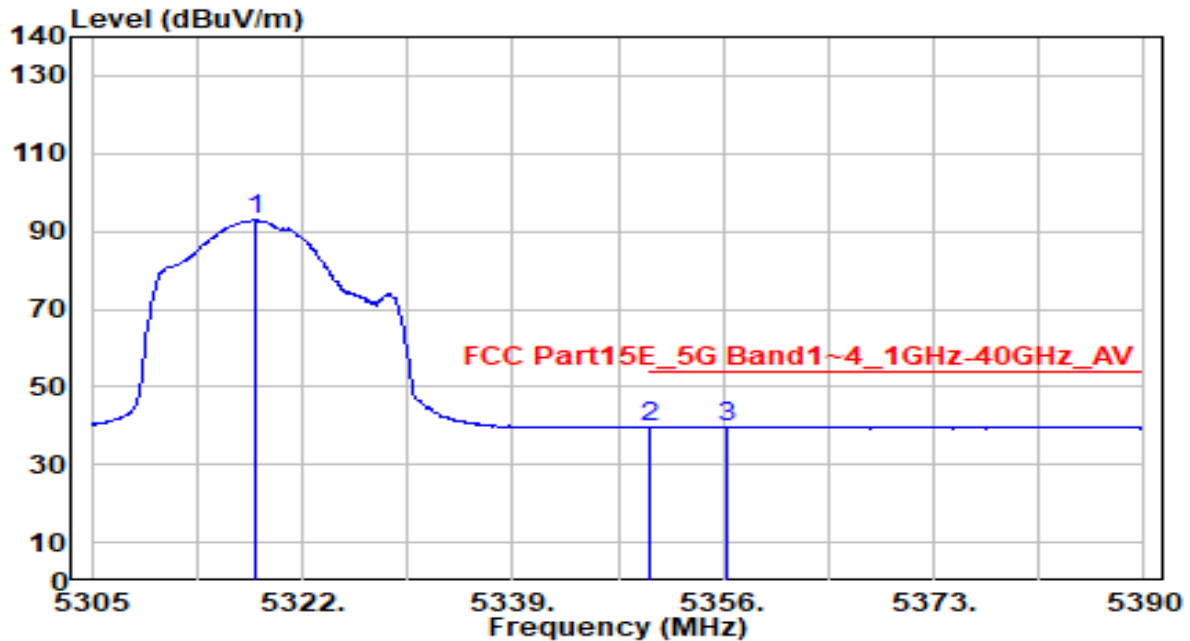


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.175	92.38	0.65	93.03	N/A	N/A	315	95	Average
2	5350.000	39.01	0.59	39.61	-14.39	54.00	315	95	Average
3	* 5356.255	39.27	0.58	39.85	-14.15	54.00	315	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

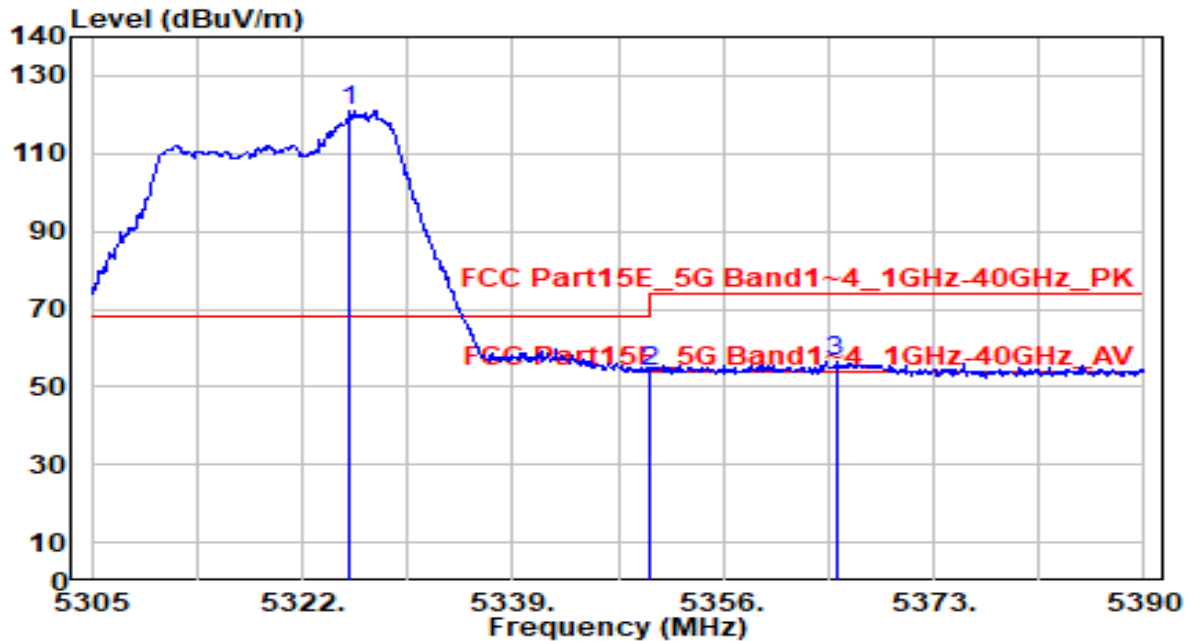


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.825	120.47	0.64	121.11	N/A	N/A	140	335	Peak
2	5350.000	53.41	0.59	54.01	-19.99	74.00	140	335	Peak
3	* 5365.095	55.97	0.57	56.54	-17.46	74.00	140	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

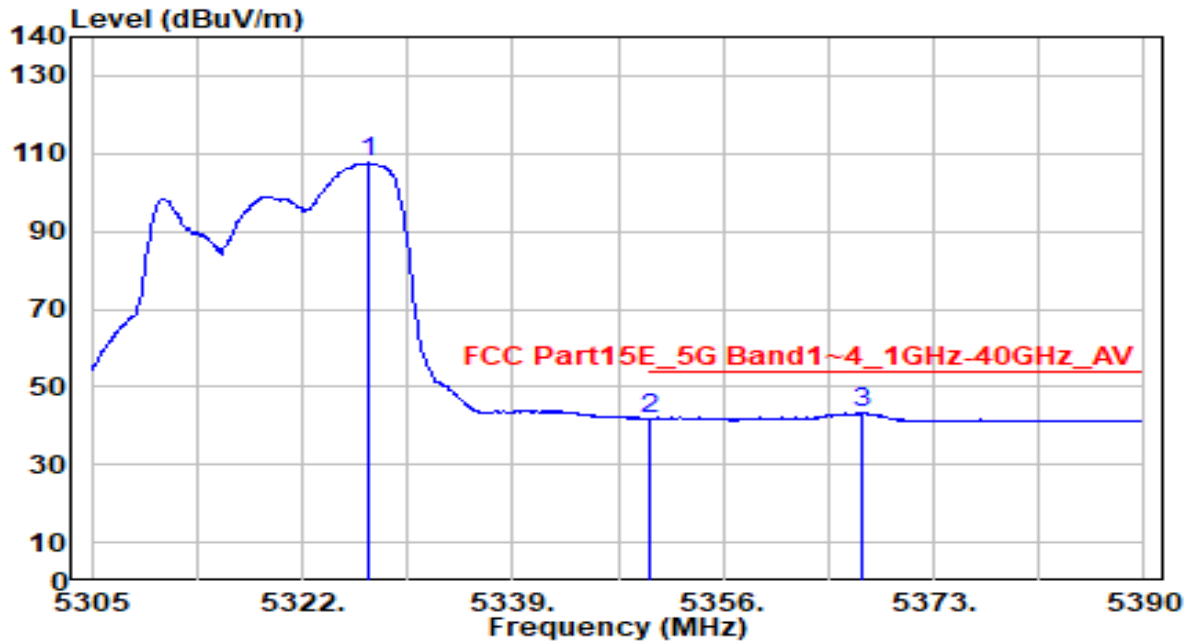


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.355	106.88	0.63	107.52	N/A	N/A	140	335	Average
2	5350.000	41.22	0.59	41.81	-12.19	54.00	140	335	Average
3	* 5367.305	42.67	0.56	43.23	-10.77	54.00	140	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

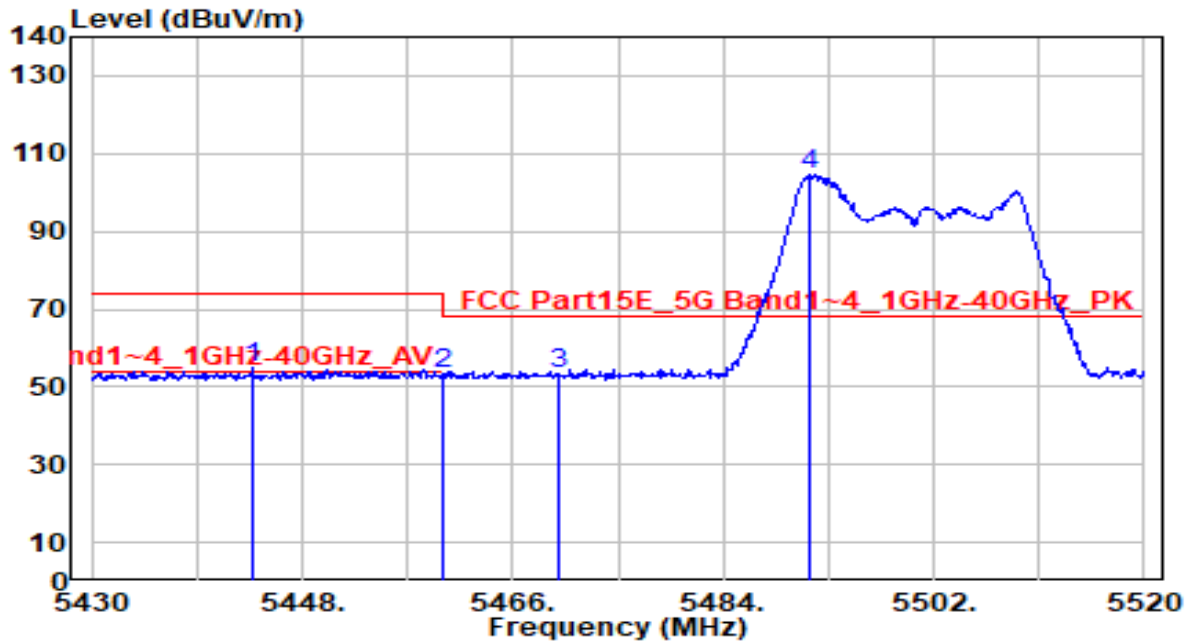


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5443.770	54.21	0.69	54.90	-19.10	74.00	225	155	Peak
2	5460.000	52.41	0.76	53.17	-20.83	74.00	225	155	Peak
3	* 5470.000	52.51	0.80	53.31	-14.89	68.20	225	155	Peak
4	5491.470	103.88	0.89	104.77	N/A	N/A	225	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

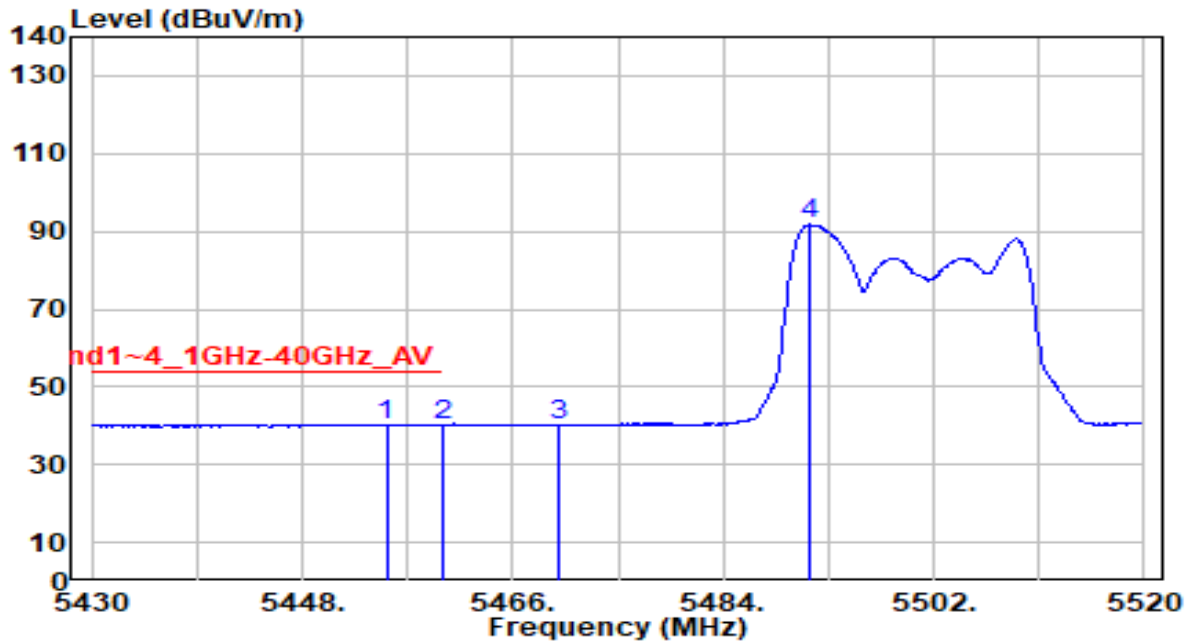


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.200	39.66	0.74	40.40	-13.60	54.00	225	155	Average
2		5460.000	39.55	0.76	40.31	-13.69	54.00	225	155	Average
3		5470.000	39.50	0.80	40.30	N/A	N/A	225	155	Average
4		5491.470	90.81	0.89	91.70	N/A	N/A	225	155	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

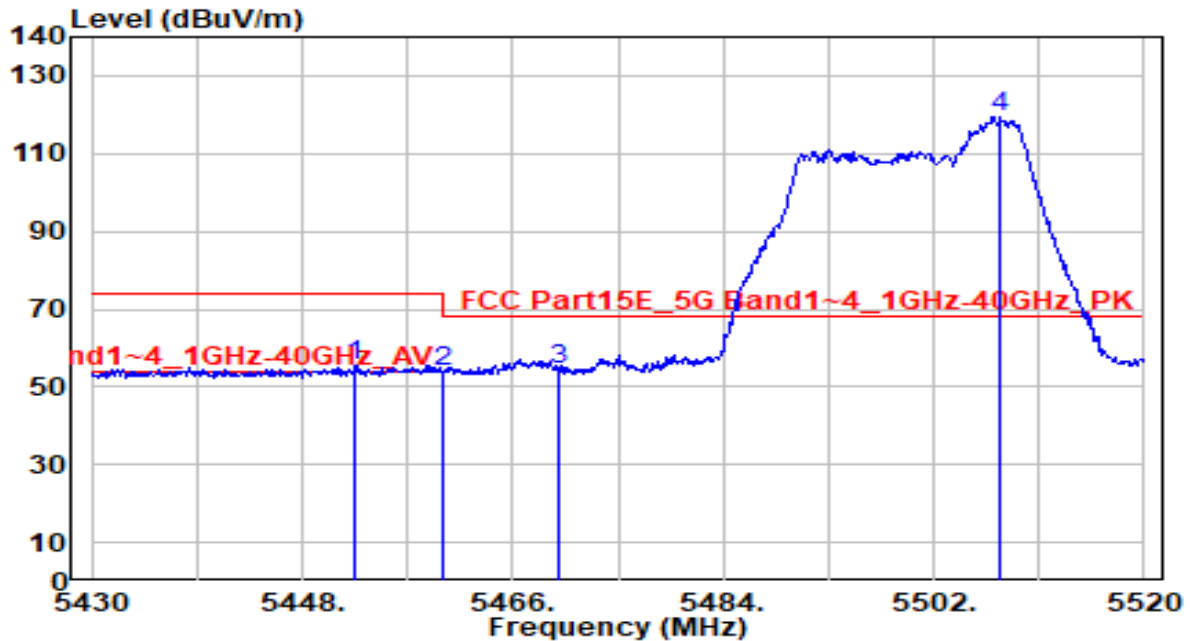


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.590	55.00	0.73	55.73	-18.27	74.00	155	160	Peak
2	5460.000	53.12	0.76	53.88	-20.12	74.00	155	160	Peak
3	* 5470.000	53.61	0.80	54.41	-13.79	68.20	155	160	Peak
4	5507.670	118.33	0.96	119.30	N/A	N/A	155	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

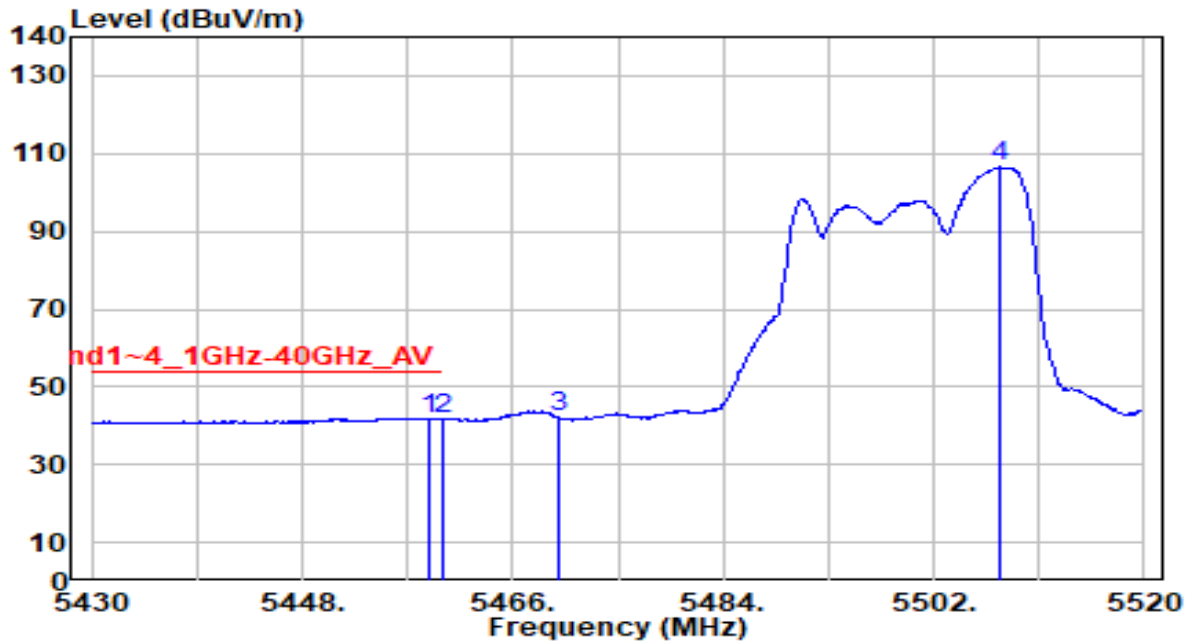


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.890	41.21	0.76	41.97	-12.03	54.00	155	160	Average
2		5460.000	40.81	0.76	41.57	-12.43	54.00	155	160	Average
3		5470.000	41.31	0.80	42.12	N/A	N/A	155	160	Average
4		5507.670	105.54	0.96	106.50	N/A	N/A	155	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

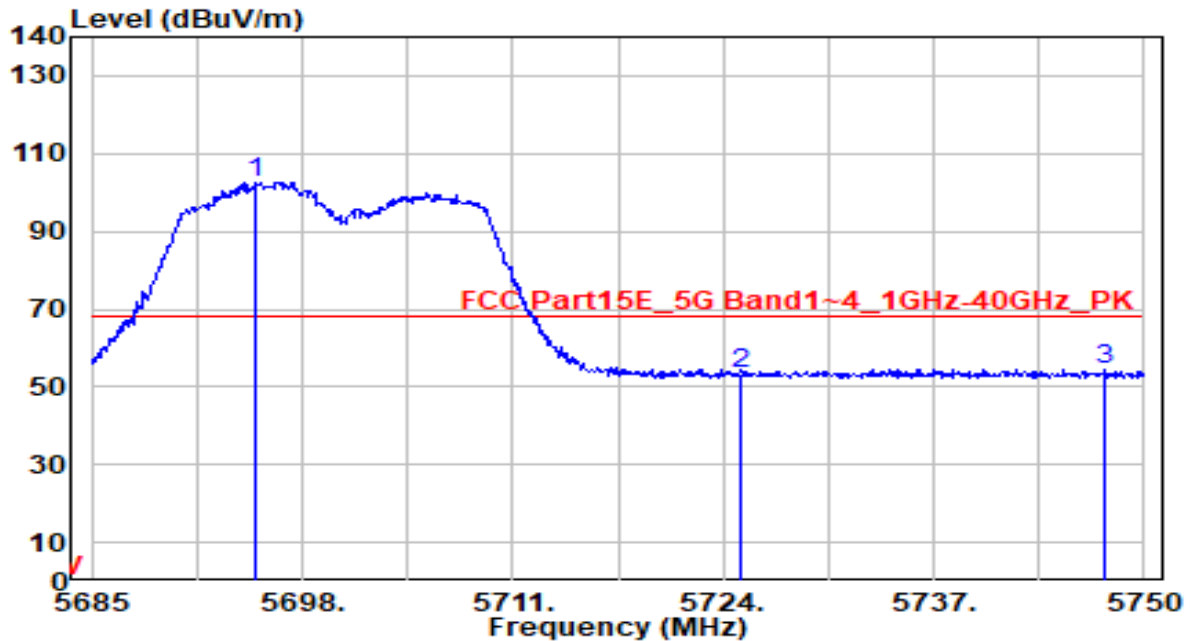


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.140	100.88	1.77	102.65	N/A	N/A	215	75	Peak
2	5725.000	51.23	1.89	53.11	-15.09	68.20	215	75	Peak
3	* 5747.595	52.62	1.98	54.60	-13.60	68.20	215	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

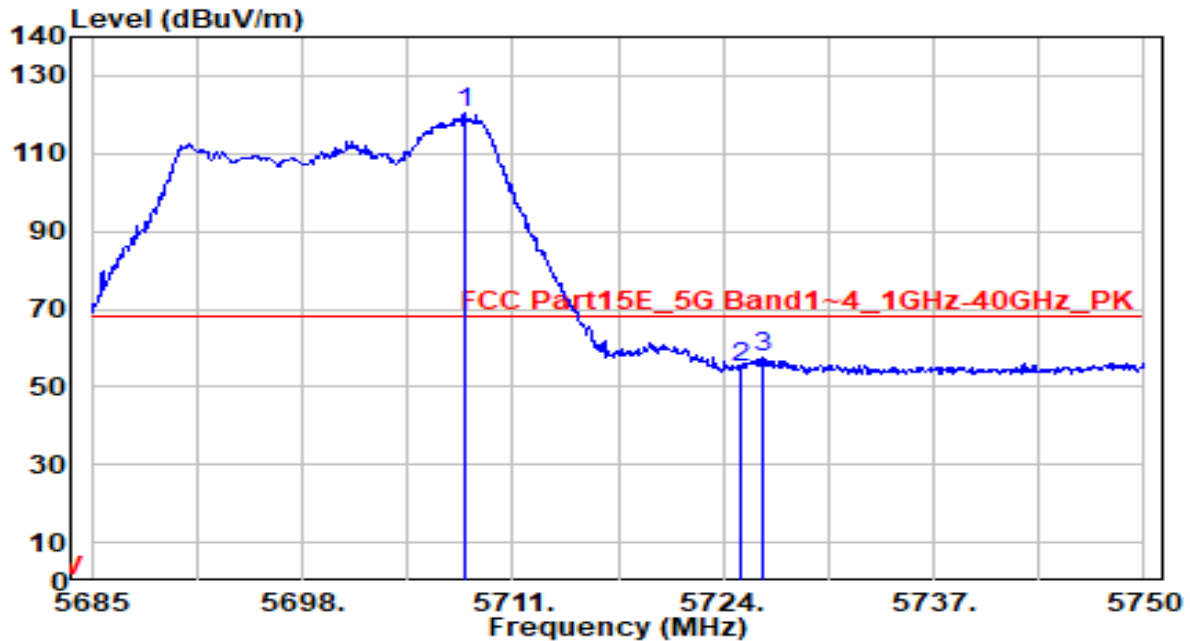


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5708.075	118.49	1.82	120.31	N/A	N/A	170	160	Peak
2	5725.000	52.88	1.89	54.77	-13.43	68.20	170	160	Peak
3	* 5726.405	55.60	1.89	57.50	-10.70	68.20	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

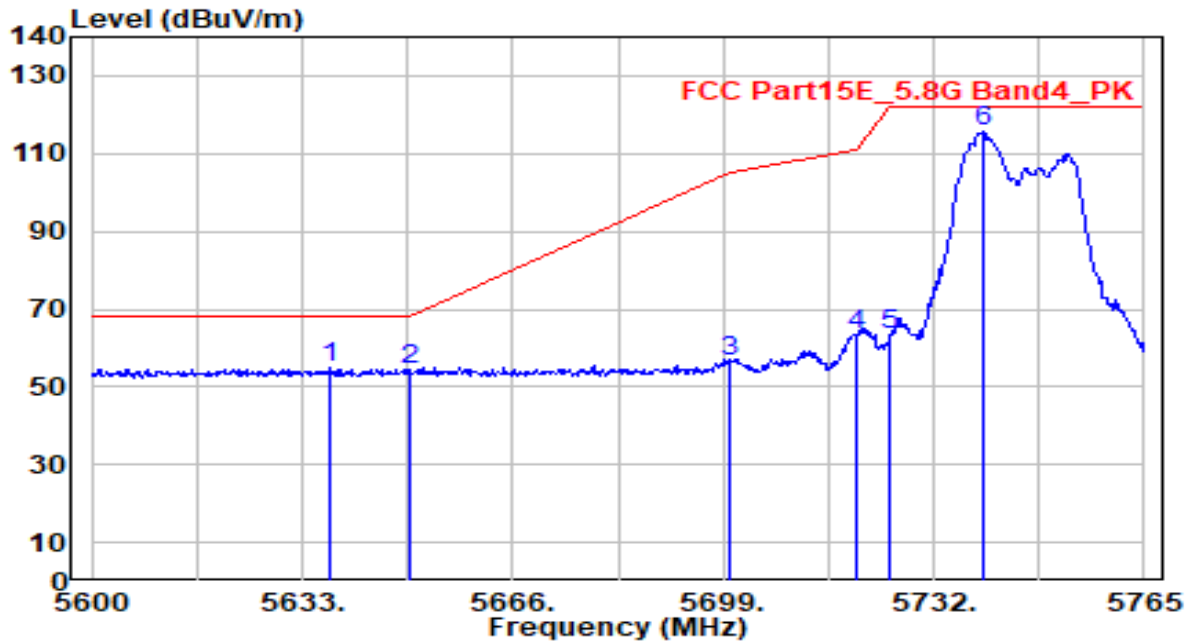


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.455	53.35	1.54	54.88	-13.32	68.20	100	185	Peak
2		5650.000	52.65	1.59	54.23	-13.97	68.20	100	185	Peak
3		5700.000	54.86	1.79	56.65	-48.55	105.20	100	185	Peak
4		5720.000	61.65	1.87	63.52	-47.28	110.80	100	185	Peak
5		5725.000	61.38	1.89	63.27	-58.93	122.20	100	185	Peak
6		5739.755	113.96	1.95	115.91	N/A	N/A	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

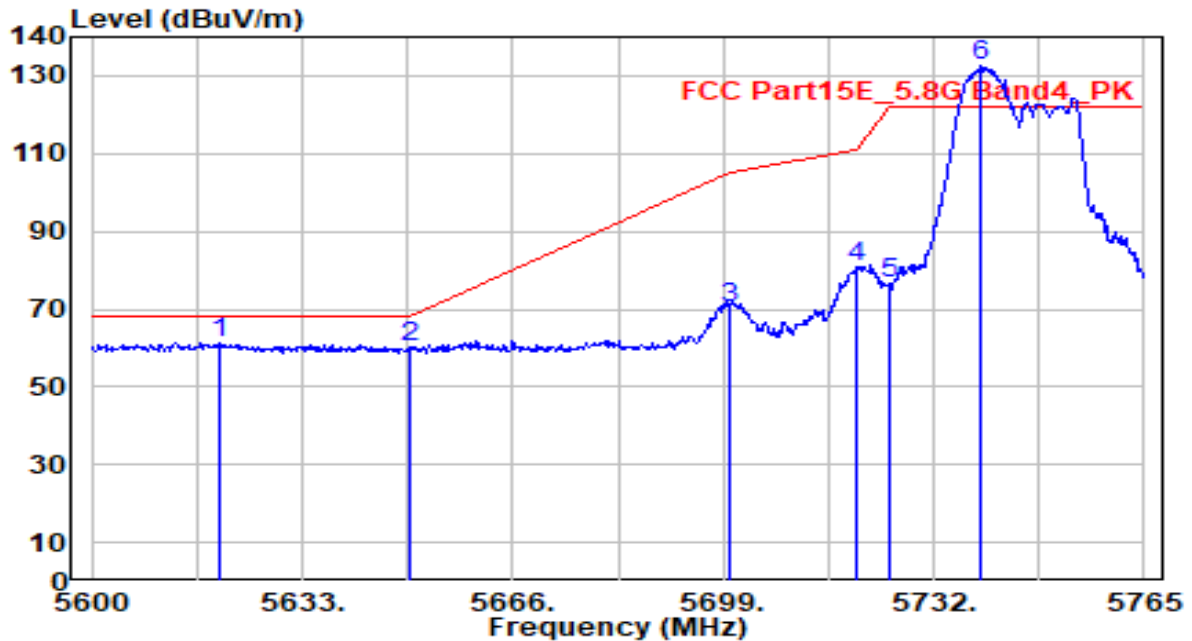


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5619.965	59.95	1.46	61.42	-6.78	68.20	200	350	Peak
2		5650.000	58.55	1.59	60.13	-8.07	68.20	200	350	Peak
3		5700.000	68.63	1.79	70.42	-34.78	105.20	200	350	Peak
4		5720.000	78.88	1.87	80.75	-30.05	110.80	200	350	Peak
5		5725.000	74.55	1.89	76.44	-45.76	122.20	200	350	Peak
6		5739.425	130.70	1.95	132.65	N/A	N/A	200	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

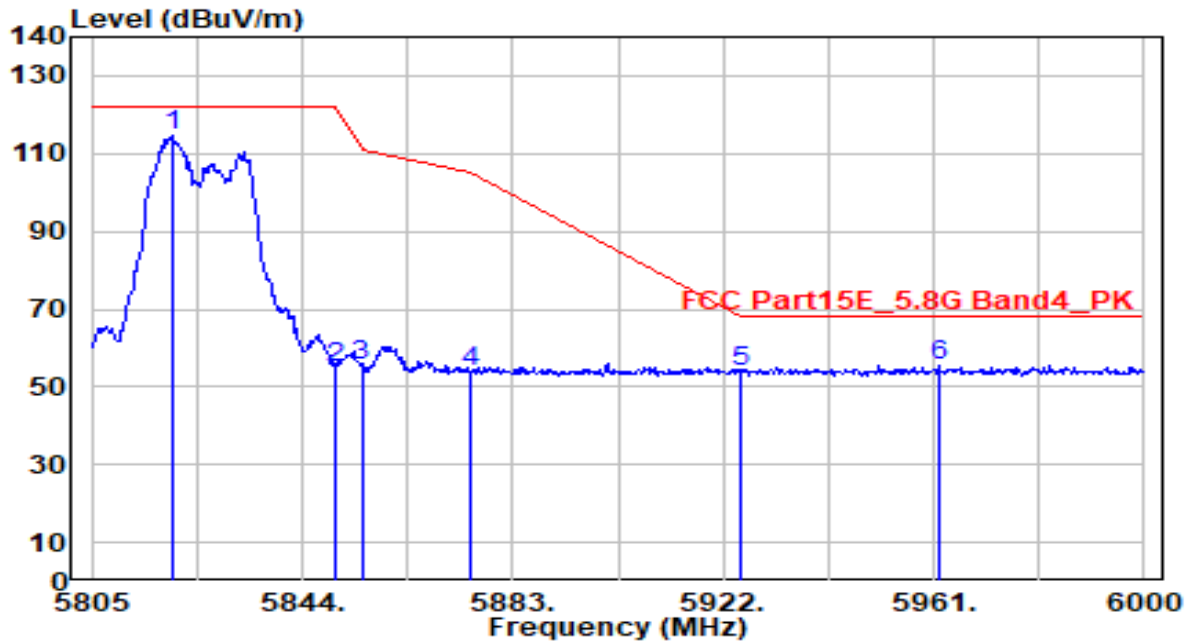


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.820	112.49	2.22	114.71	N/A	N/A	100	185	Peak
2	5850.000	52.79	2.27	55.06	-67.14	122.20	100	185	Peak
3	5855.000	53.06	2.28	55.34	-55.46	110.80	100	185	Peak
4	5875.000	51.77	2.31	54.07	-51.13	105.20	100	185	Peak
5	5925.000	51.64	2.38	54.02	-14.18	68.20	100	185	Peak
6	* 5961.975	53.03	2.44	55.47	-12.73	68.20	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

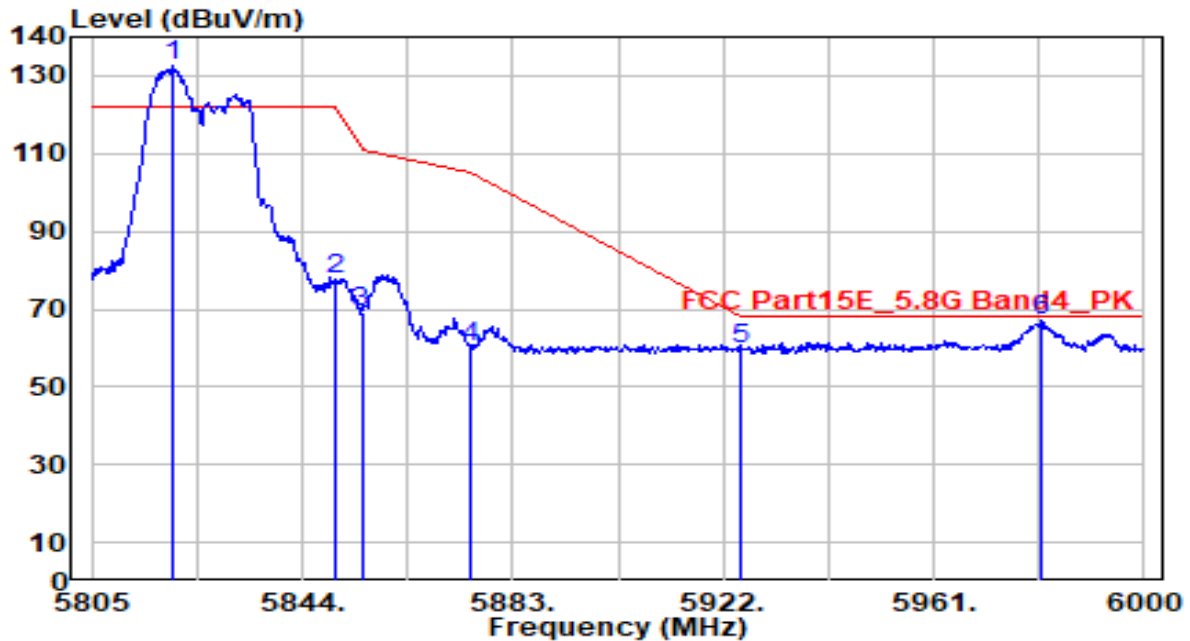


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.820	130.42	2.22	132.64	N/A	N/A	190	350	Peak
2	5850.000	75.34	2.27	77.61	-44.59	122.20	190	350	Peak
3	5855.000	66.99	2.28	69.27	-41.53	110.80	190	350	Peak
4	5875.000	57.85	2.31	60.16	-45.04	105.20	190	350	Peak
5	5925.000	57.47	2.38	59.86	-8.34	68.20	190	350	Peak
6	* 5980.890	64.67	2.47	67.14	-1.06	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

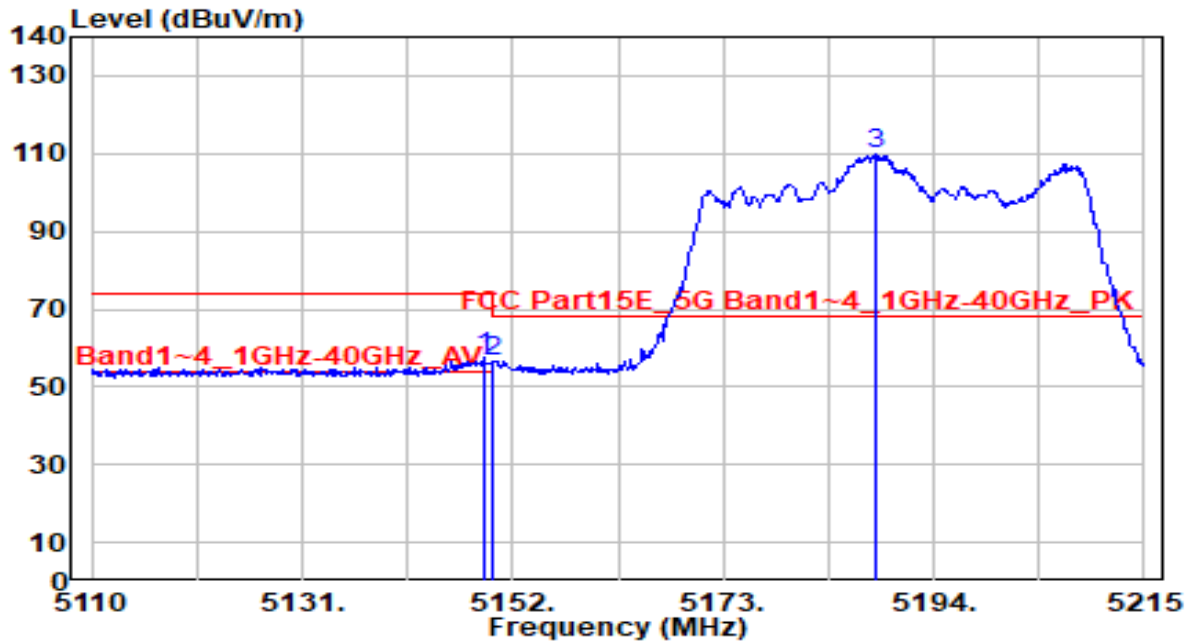


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	56.74	0.79	57.54	-16.46	74.00	300	95	Peak
2		5150.000	55.48	0.80	56.28	-17.72	74.00	300	95	Peak
3		5188.330	109.02	0.84	109.86	N/A	N/A	300	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

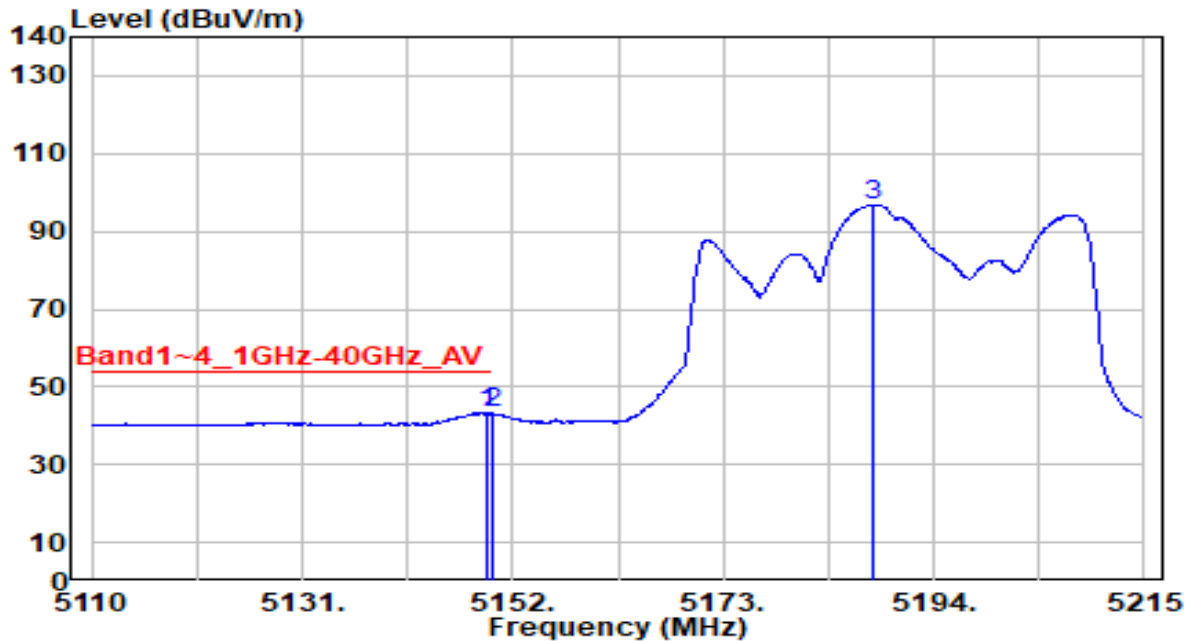


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	42.60	0.80	43.40	-10.60	54.00	300	95	Average
2		5150.000	42.33	0.80	43.12	-10.88	54.00	300	95	Average
3		5188.015	95.89	0.84	96.74	N/A	N/A	300	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

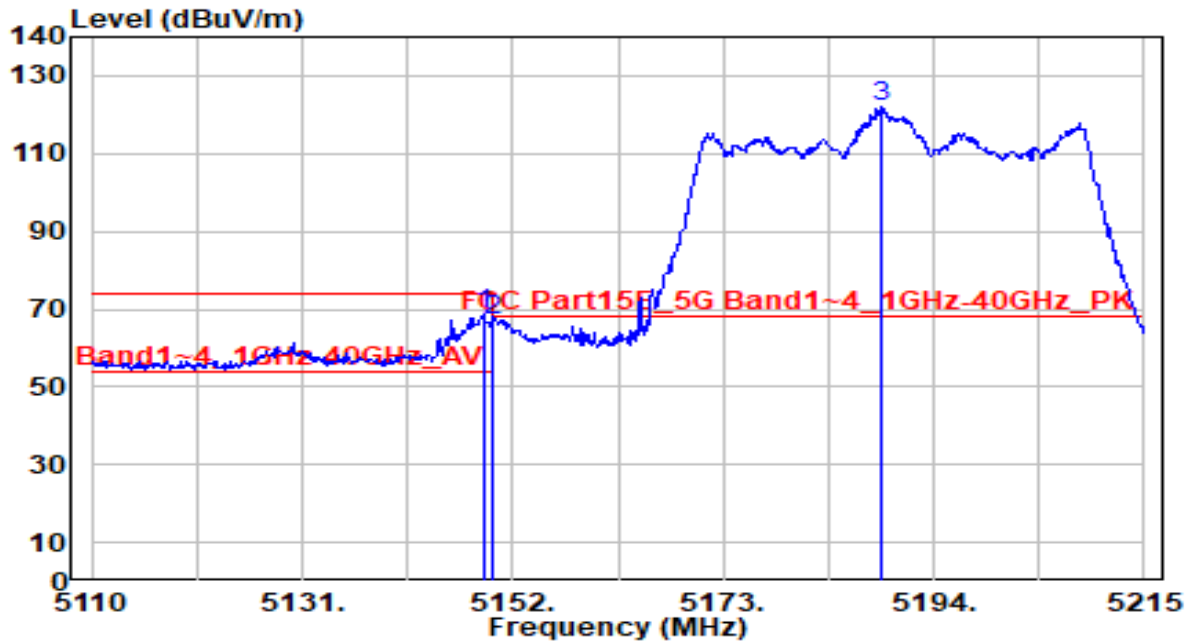


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	67.80	0.79	68.59	-5.41	74.00	105	185	Peak
2		5150.000	66.05	0.80	66.84	-7.16	74.00	105	185	Peak
3		5188.645	121.13	0.84	121.98	N/A	N/A	105	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

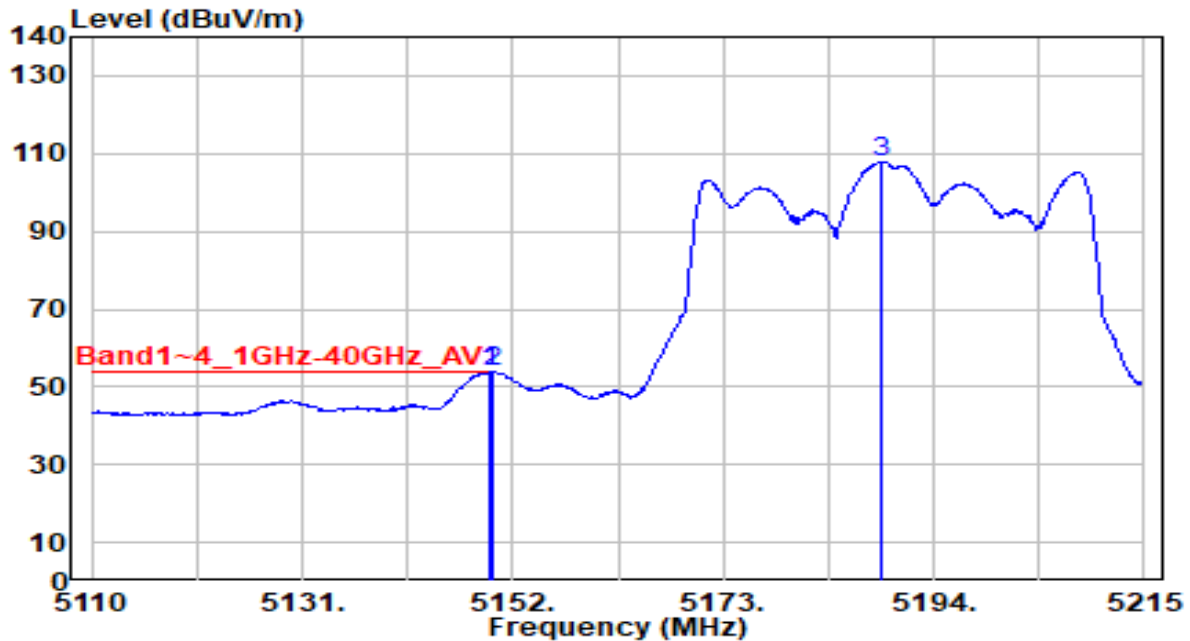


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.690	53.09	0.80	53.88	-0.12	54.00	105	185	Average
2		5150.000	52.86	0.80	53.65	-0.35	54.00	105	185	Average
3		5188.750	107.13	0.84	107.97	N/A	N/A	105	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

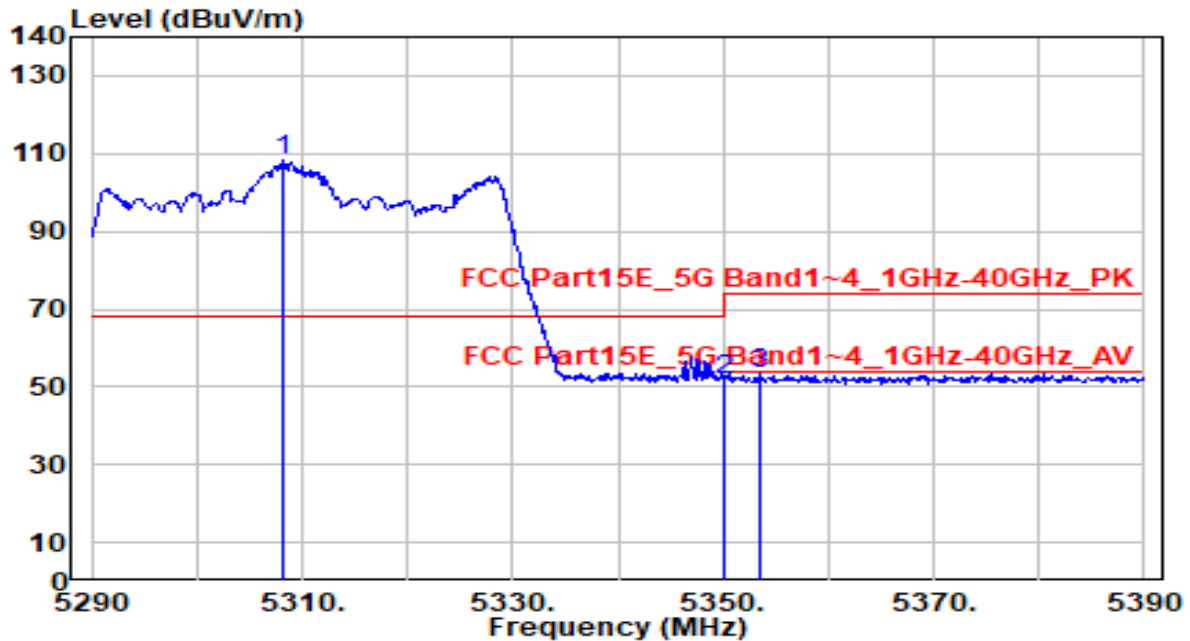


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.300	107.58	0.67	108.25	N/A	N/A	300	95	Peak
2	5350.000	51.24	0.59	51.83	-22.17	74.00	300	95	Peak
3	* 5353.500	53.01	0.59	53.60	-20.40	74.00	300	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

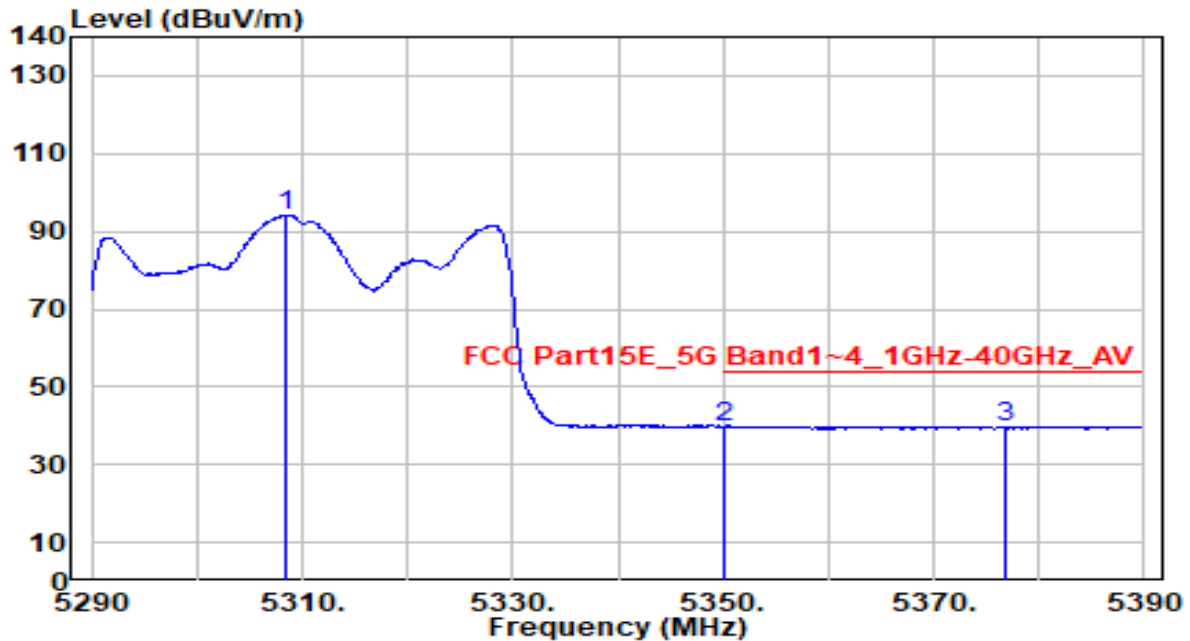


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.400	93.46	0.67	94.12	N/A	N/A	300	95	Average
2	* 5350.000	39.29	0.59	39.88	-14.12	54.00	300	95	Average
3	5376.800	39.30	0.55	39.85	-14.15	54.00	300	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

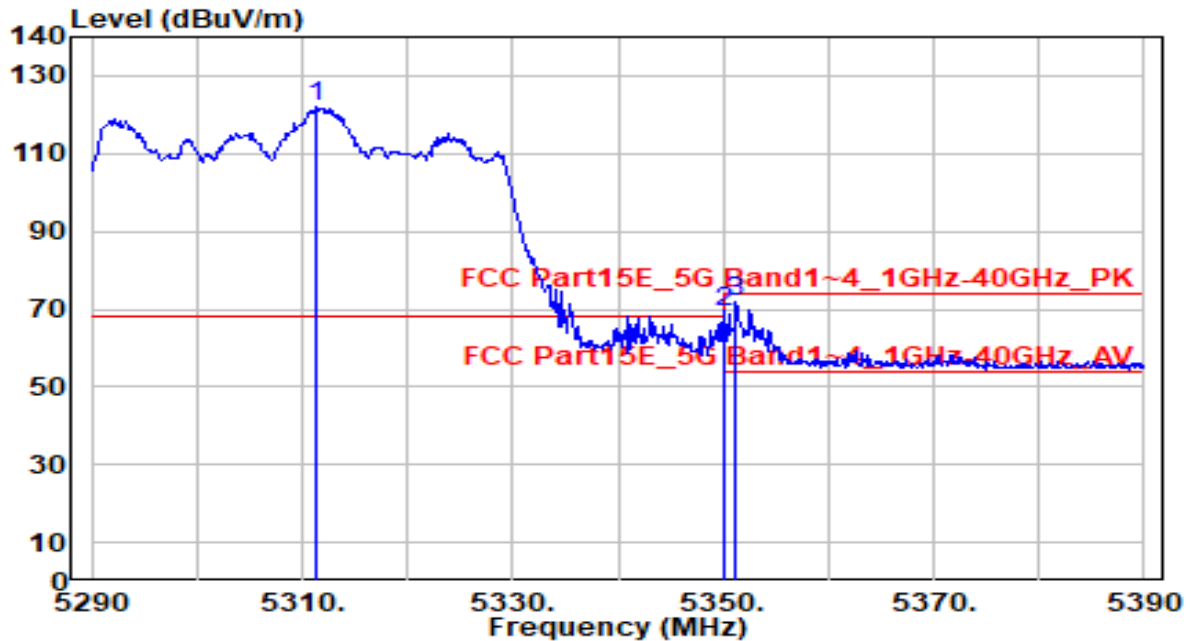


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.200	121.27	0.66	121.94	N/A	N/A	145	10	Peak
2	5350.000	68.57	0.59	69.17	-4.83	74.00	145	10	Peak
3	* 5351.200	71.08	0.59	71.68	-2.32	74.00	145	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

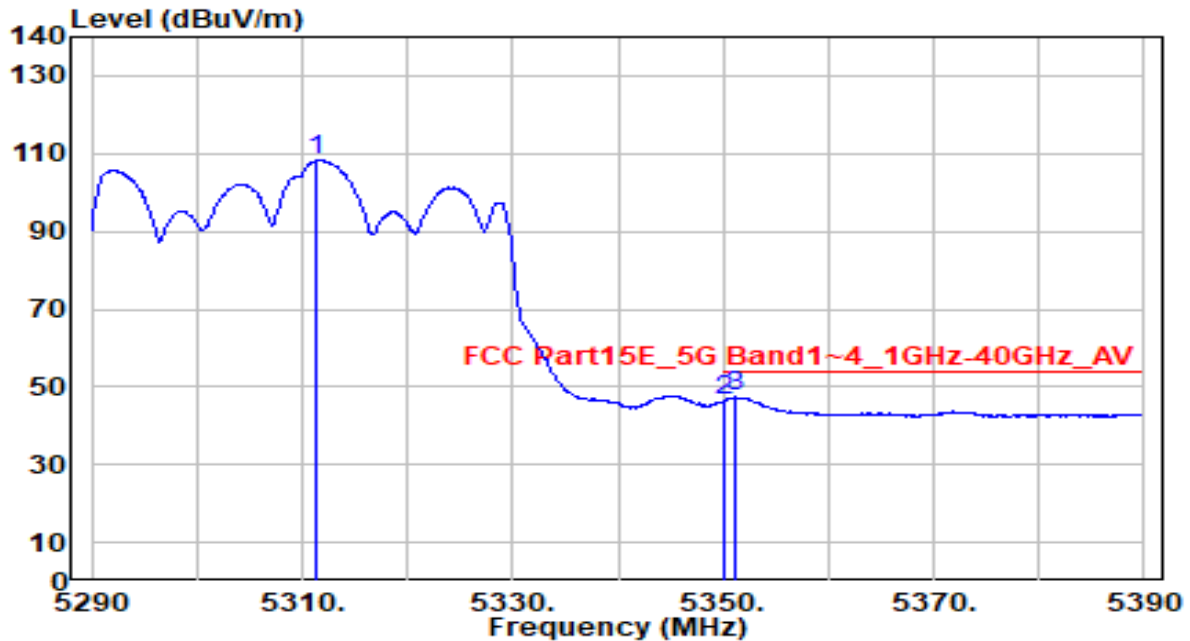


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.400	107.59	0.66	108.25	N/A	N/A	145	10	Average
2	5350.000	45.71	0.59	46.31	-7.69	54.00	145	10	Average
3	* 5351.200	46.71	0.59	47.30	-6.70	54.00	145	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

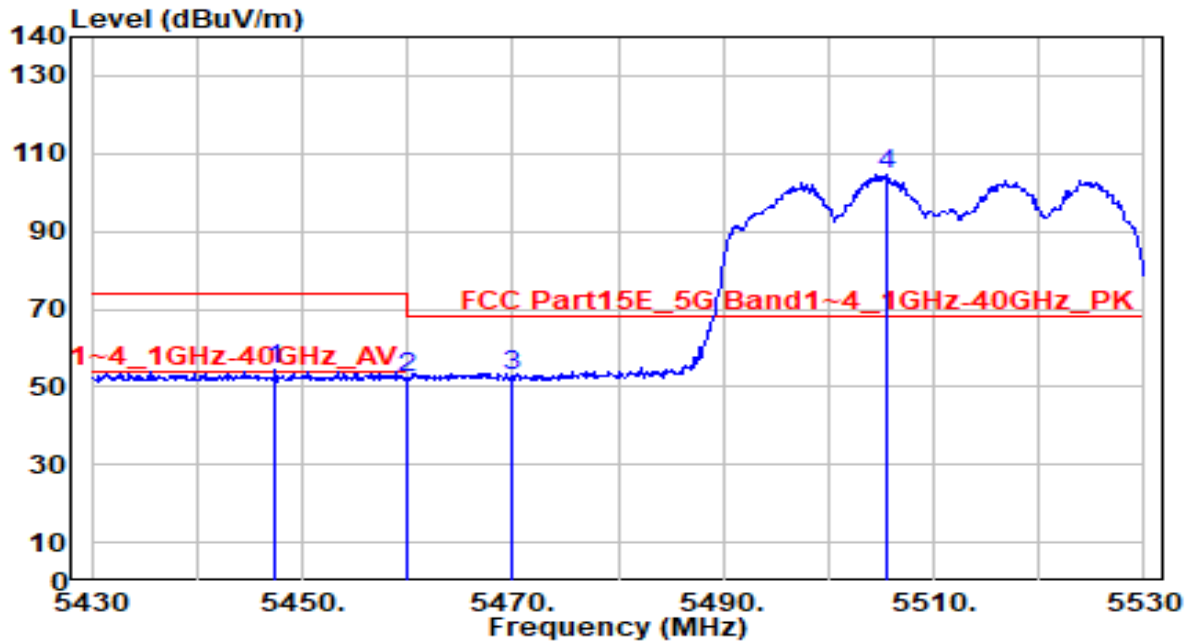


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.500	53.81	0.71	54.51	-19.49	74.00	130	170	Peak
2	5460.000	51.68	0.76	52.44	-21.56	74.00	130	170	Peak
3	* 5470.000	51.77	0.80	52.57	-15.63	68.20	130	170	Peak
4	5505.600	103.78	0.96	104.74	N/A	N/A	130	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

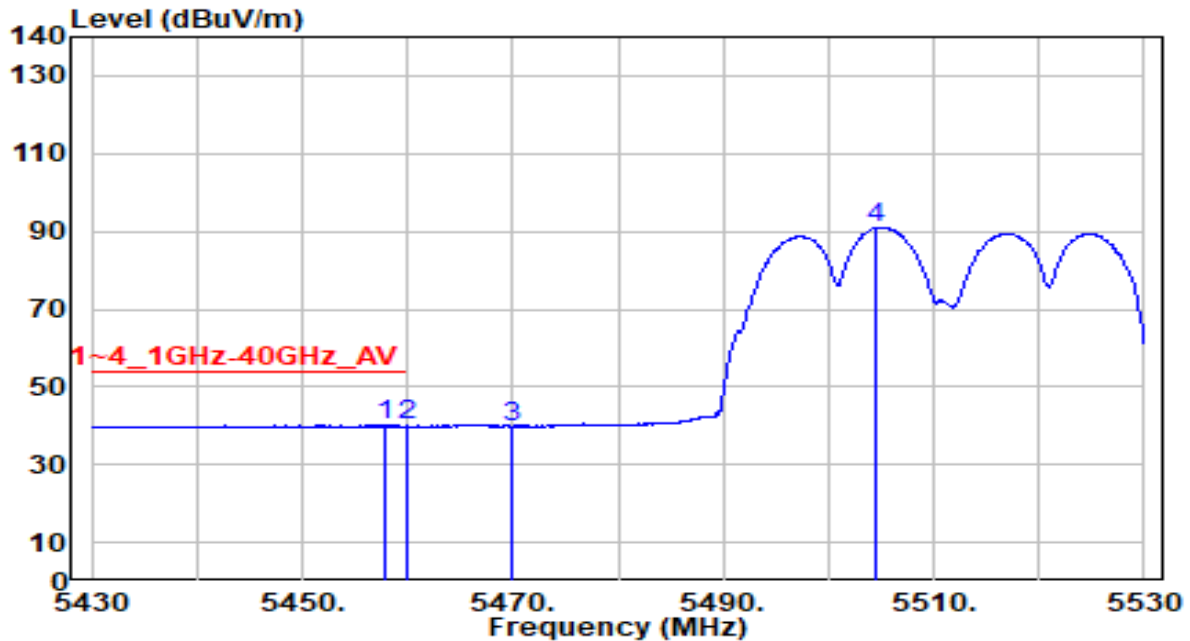


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.900	39.37	0.75	40.12	-13.88	54.00	130	170	Average
2		5460.000	39.18	0.76	39.94	-14.06	54.00	130	170	Average
3		5470.000	38.94	0.80	39.74	N/A	N/A	130	170	Average
4		5504.600	90.09	0.95	91.04	N/A	N/A	130	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

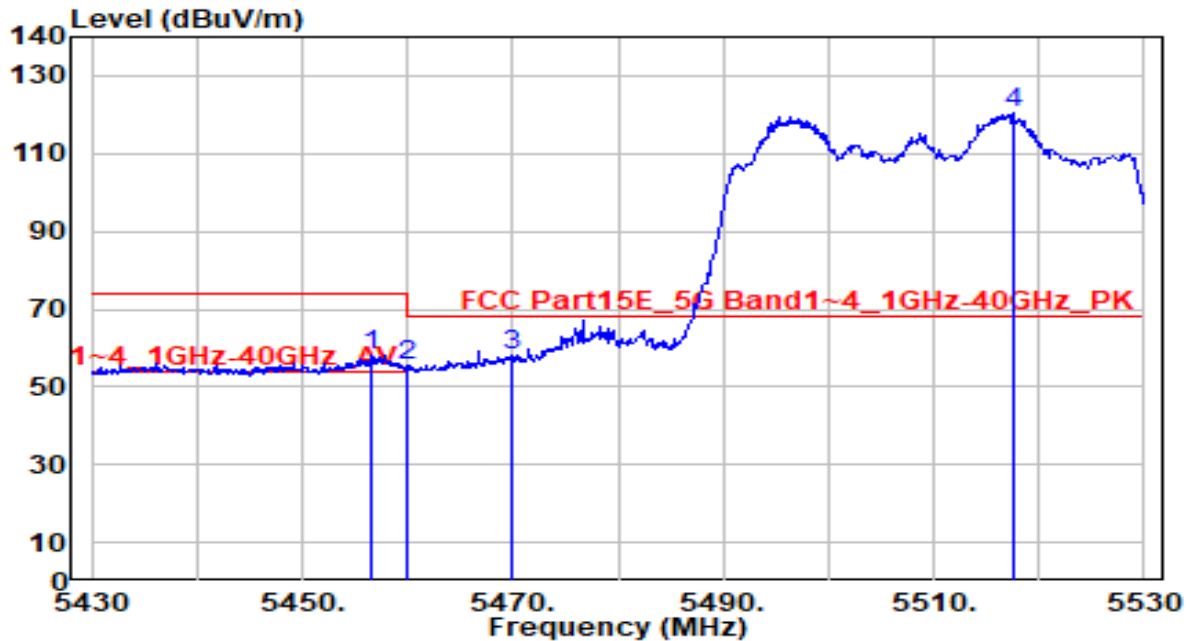


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.500	57.32	0.75	58.06	-15.94	74.00	185	160	Peak
2	5460.000	54.63	0.76	55.39	-18.61	74.00	185	160	Peak
3	* 5470.000	57.20	0.80	58.00	-10.20	68.20	185	160	Peak
4	5517.600	119.23	1.01	120.24	N/A	N/A	185	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

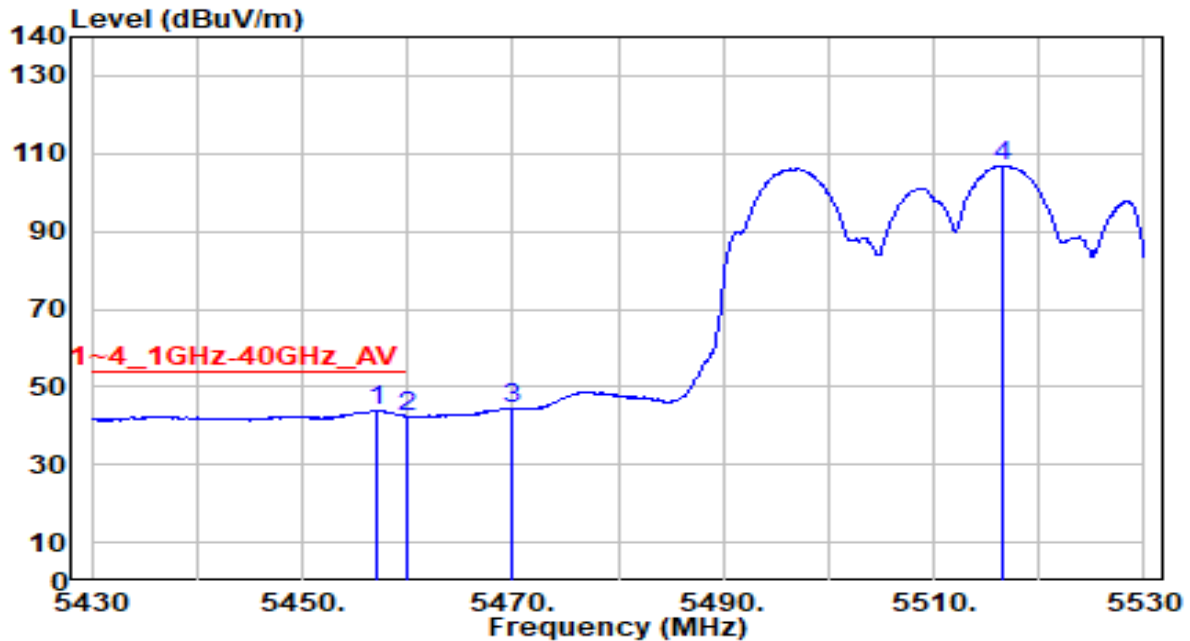


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.200	43.10	0.75	43.85	-10.15	54.00	185	160	Average
2		5460.000	41.59	0.76	42.35	-11.65	54.00	185	160	Average
3		5470.000	43.52	0.80	44.33	N/A	N/A	185	160	Average
4		5516.600	105.85	1.01	106.86	N/A	N/A	185	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

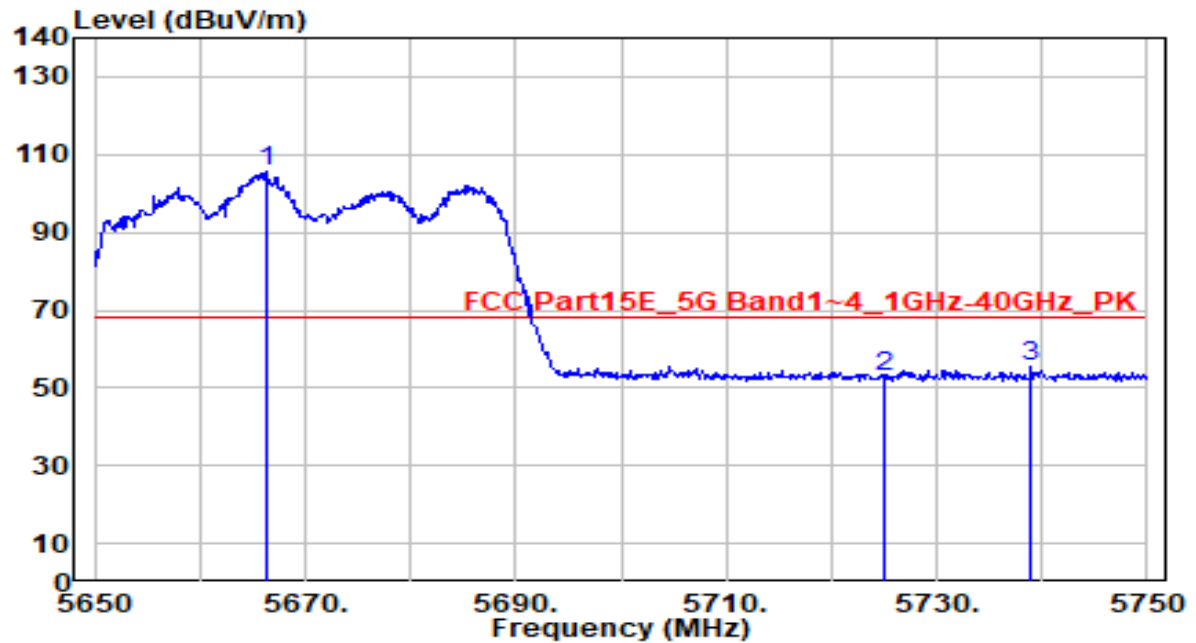


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5666.300	103.91	1.65	105.57	N/A	N/A	235	25	Peak
2	5725.000	50.95	1.89	52.84	-15.36	68.20	235	25	Peak
3	* 5738.900	53.45	1.95	55.40	-12.80	68.20	235	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

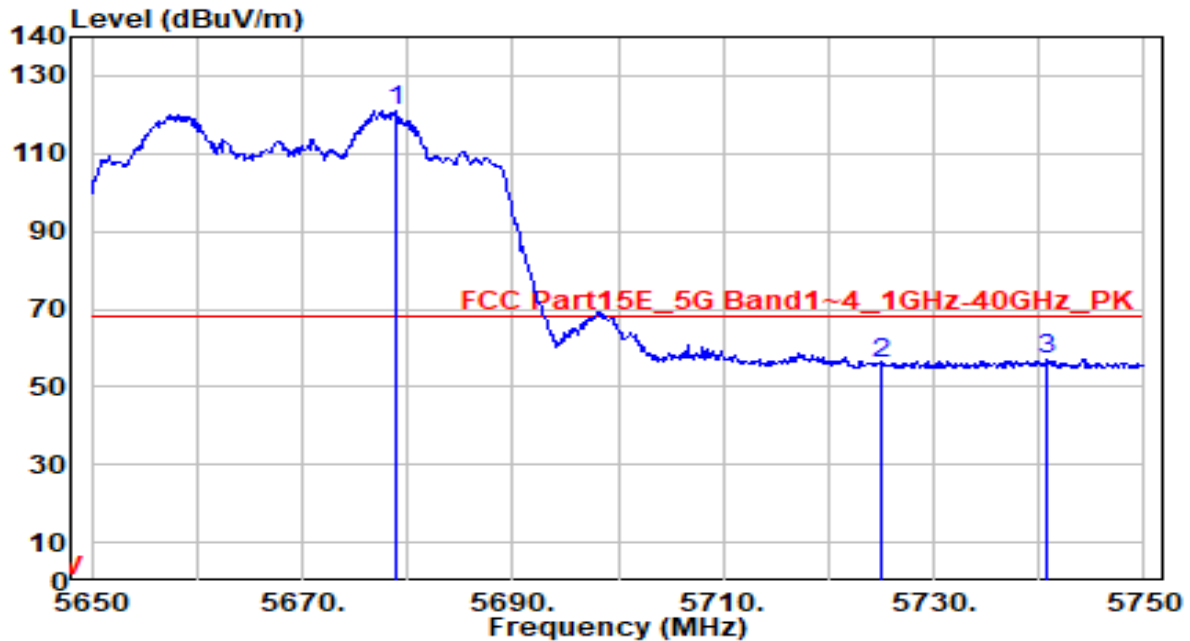


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5678.800	119.37	1.70	121.07	N/A	N/A	170	160	Peak
2	5725.000	53.96	1.89	55.85	-12.35	68.20	170	160	Peak
3	* 5740.700	55.22	1.95	57.17	-11.03	68.20	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

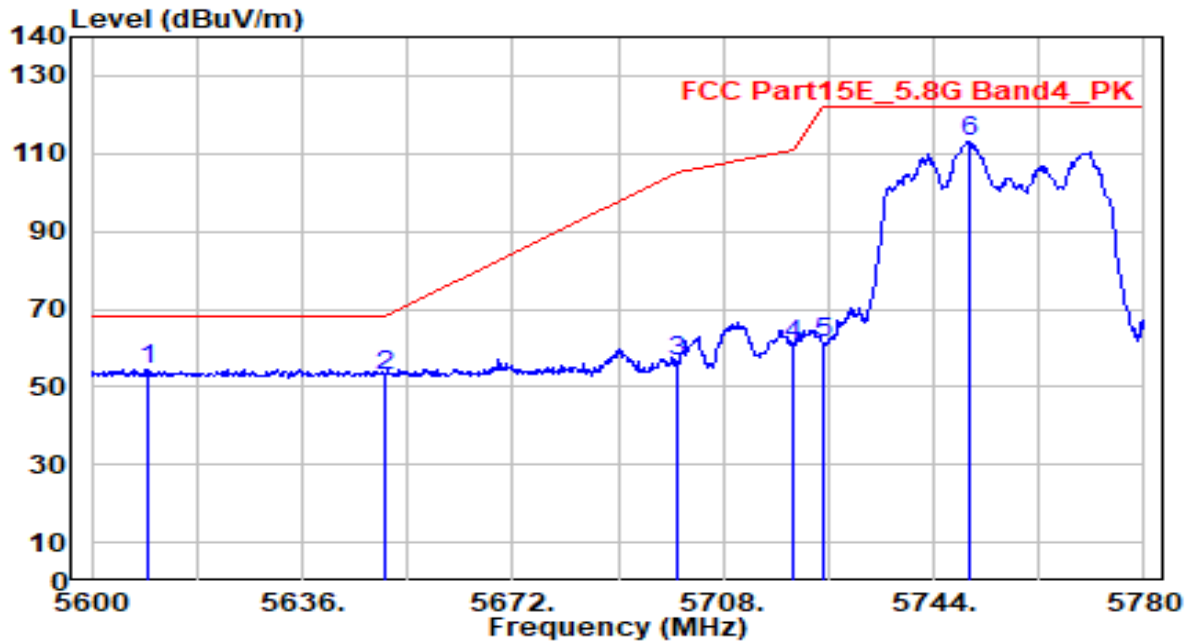


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5609.540	53.13	1.42	54.56	-13.64	68.20	110	185	Peak
2		5650.000	51.49	1.59	53.07	-15.13	68.20	110	185	Peak
3		5700.000	54.58	1.79	56.37	-48.83	105.20	110	185	Peak
4		5720.000	58.69	1.87	60.56	-50.24	110.80	110	185	Peak
5		5725.000	59.33	1.89	61.22	-60.98	122.20	110	185	Peak
6		5750.300	111.33	1.99	113.32	N/A	N/A	110	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

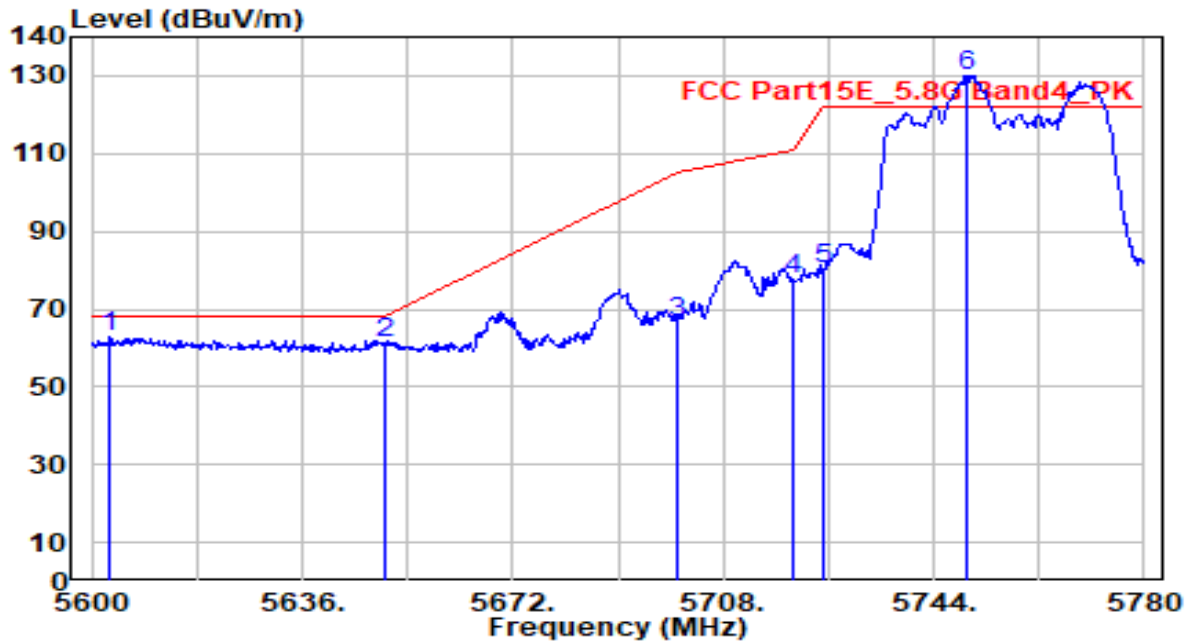


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5603.060	61.43	1.40	62.82	-5.38	68.20	195	350	Peak
2		5650.000	59.46	1.59	61.04	-7.16	68.20	195	350	Peak
3		5700.000	64.61	1.79	66.40	-38.80	105.20	195	350	Peak
4		5720.000	75.70	1.87	77.57	-33.23	110.80	195	350	Peak
5		5725.000	78.43	1.89	80.32	-41.88	122.20	195	350	Peak
6		5749.580	128.00	1.99	129.99	N/A	N/A	195	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

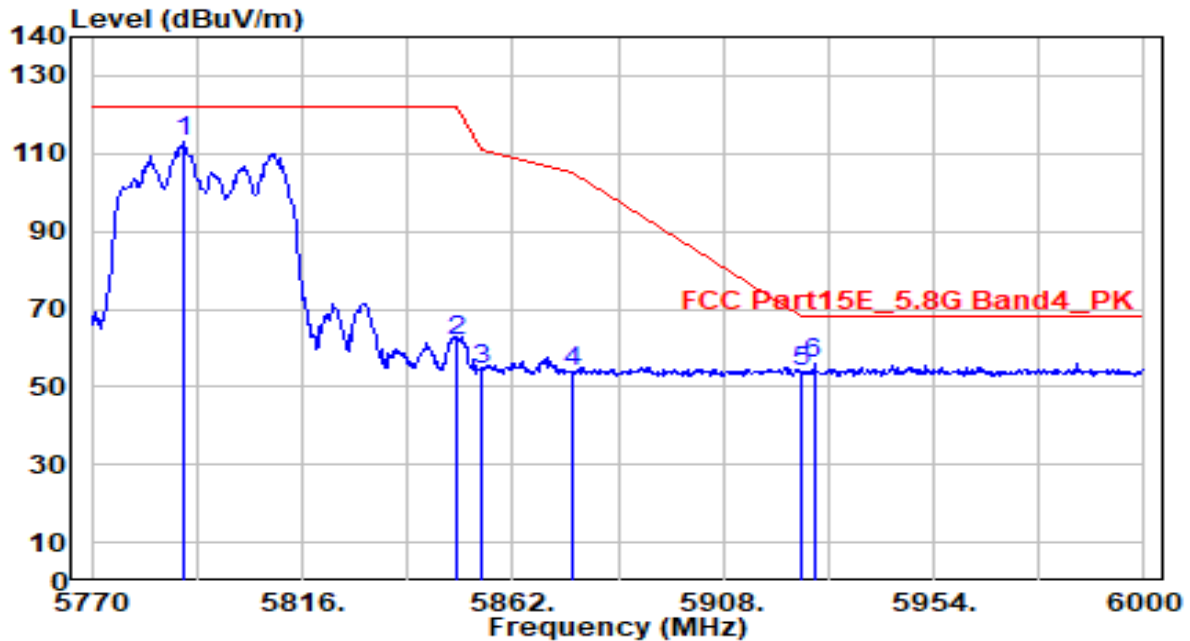


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.010	110.79	2.15	112.94	N/A	N/A	130	185	Peak
2	5850.000	59.57	2.27	61.84	-60.36	122.20	130	185	Peak
3	5855.000	52.21	2.28	54.49	-56.31	110.80	130	185	Peak
4	5875.000	51.54	2.31	53.84	-51.36	105.20	130	185	Peak
5	5925.000	51.24	2.38	53.62	-14.58	68.20	130	185	Peak
6	* 5927.780	53.62	2.39	56.01	-12.19	68.20	130	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

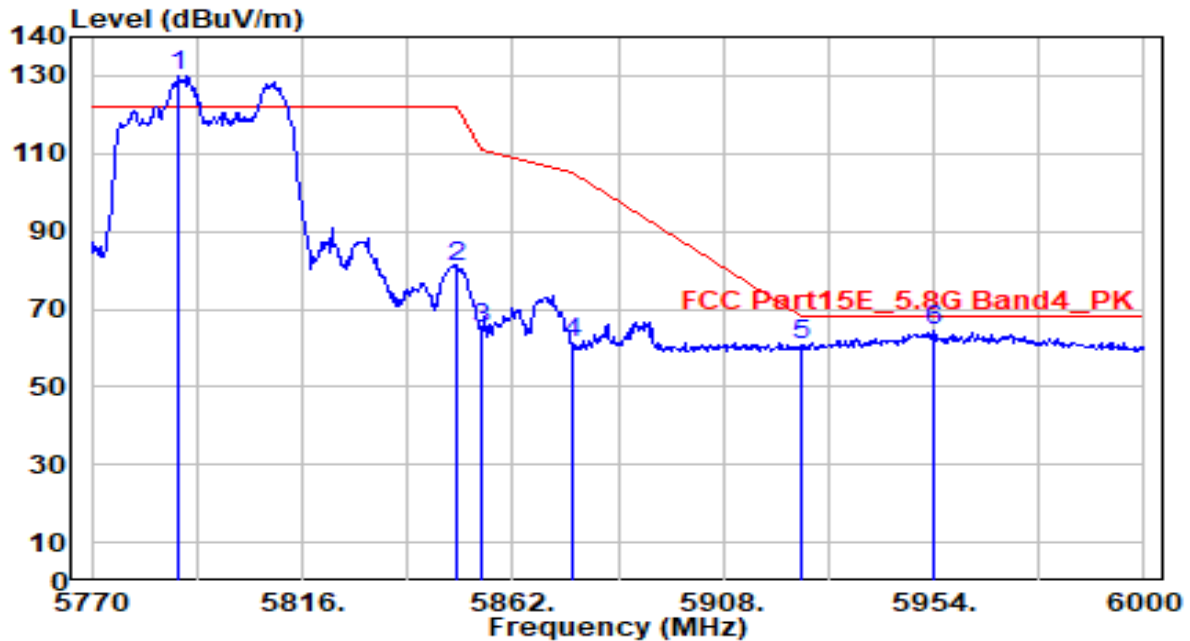


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5789.090	127.89	2.15	130.04	N/A	N/A	185	350	Peak
2	5850.000	78.39	2.27	80.66	-41.54	122.20	185	350	Peak
3	5855.000	62.56	2.28	64.83	-45.97	110.80	185	350	Peak
4	5875.000	59.21	2.31	61.51	-43.69	105.20	185	350	Peak
5	5925.000	58.58	2.38	60.96	-7.24	68.20	185	350	Peak
6	* 5954.230	61.82	2.43	64.25	-3.95	68.20	185	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

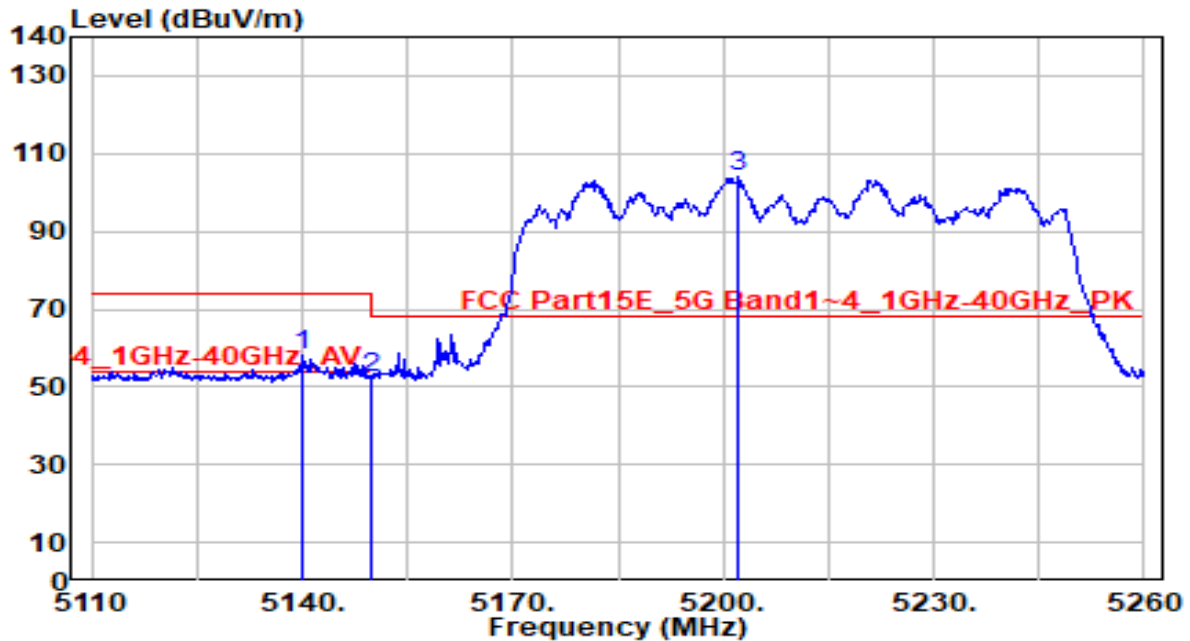


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.150	57.57	0.78	58.35	-15.65	74.00	285	160	Peak
2		5150.000	51.67	0.80	52.47	-21.53	74.00	285	160	Peak
3		5202.250	103.07	0.85	103.92	N/A	N/A	285	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

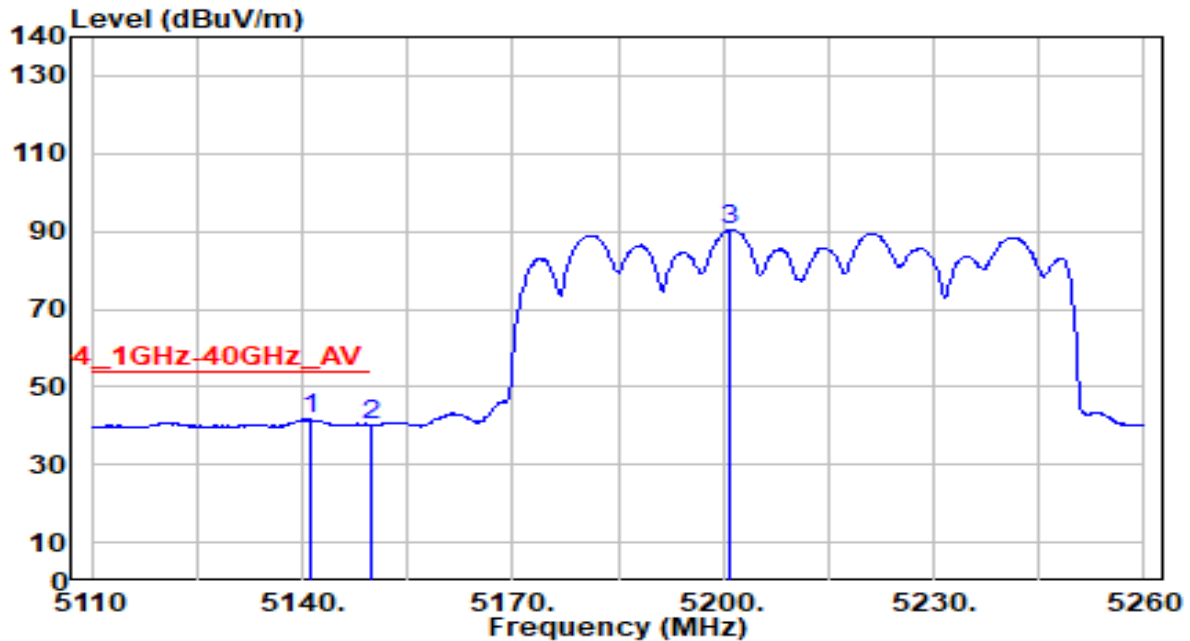


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.350	40.82	0.79	41.61	-12.39	54.00	285	160	Average
2		5150.000	39.43	0.80	40.23	-13.77	54.00	285	160	Average
3		5200.900	89.51	0.86	90.36	N/A	N/A	285	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

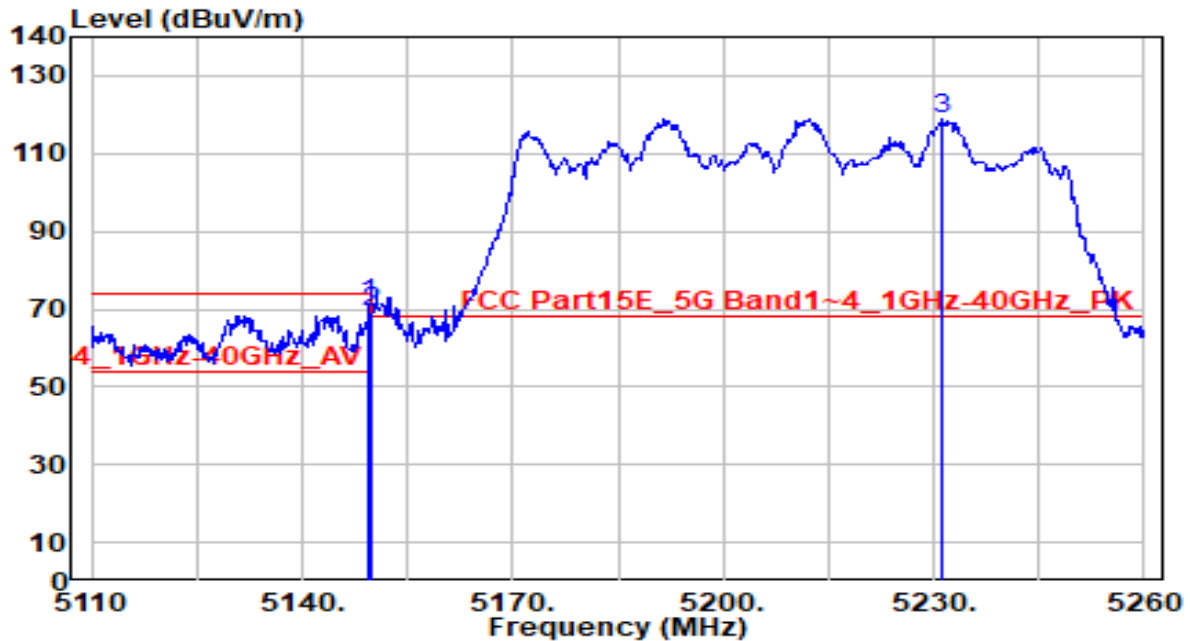


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.450	70.45	0.80	71.25	-2.75	74.00	130	10	Peak
2		5150.000	68.48	0.80	69.27	-4.73	74.00	130	10	Peak
3		5231.200	118.04	0.80	118.85	N/A	N/A	130	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

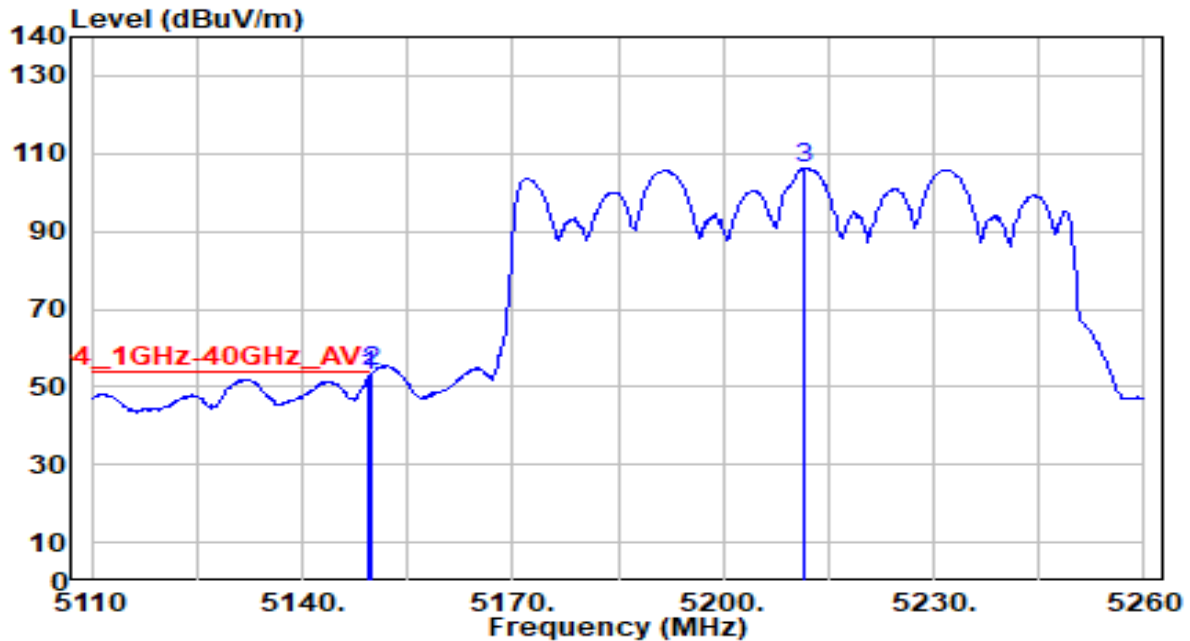


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.450	51.78	0.80	52.57	-1.43	54.00	130	10	Average
2	* 5150.000	53.08	0.80	53.88	-0.12	54.00	130	10	Average
3	5211.700	105.43	0.84	106.27	N/A	N/A	130	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

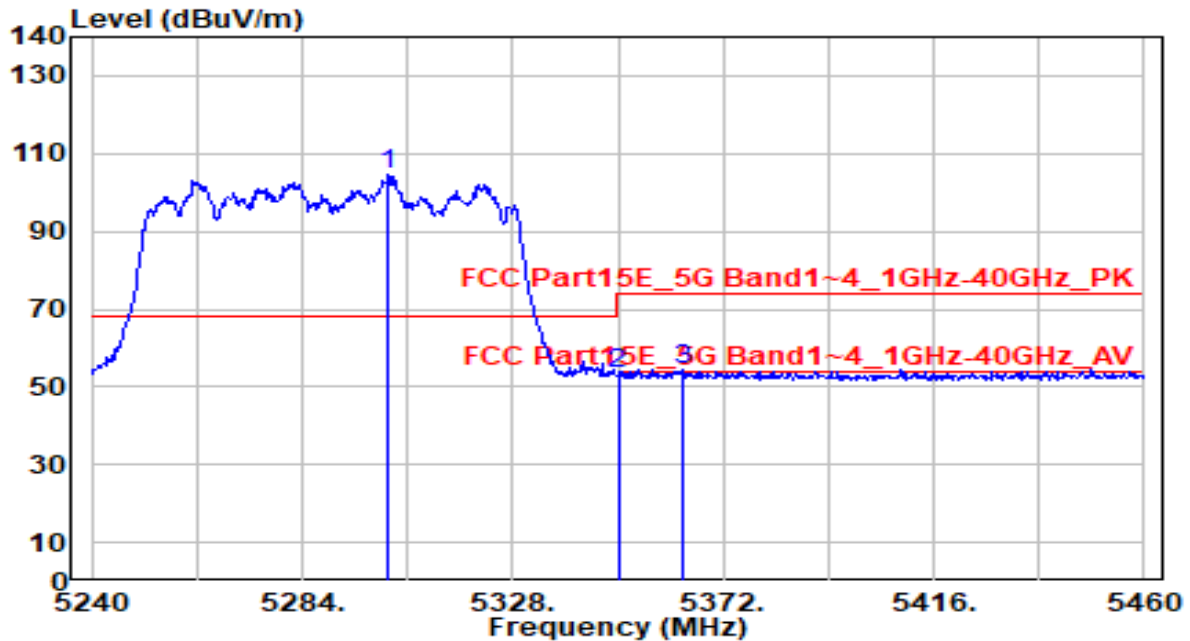


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5302.040	104.12	0.68	104.80	N/A	N/A	295	160	Peak
2	5350.000	52.71	0.59	53.31	-20.69	74.00	295	160	Peak
3	* 5363.640	53.91	0.57	54.48	-19.52	74.00	295	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

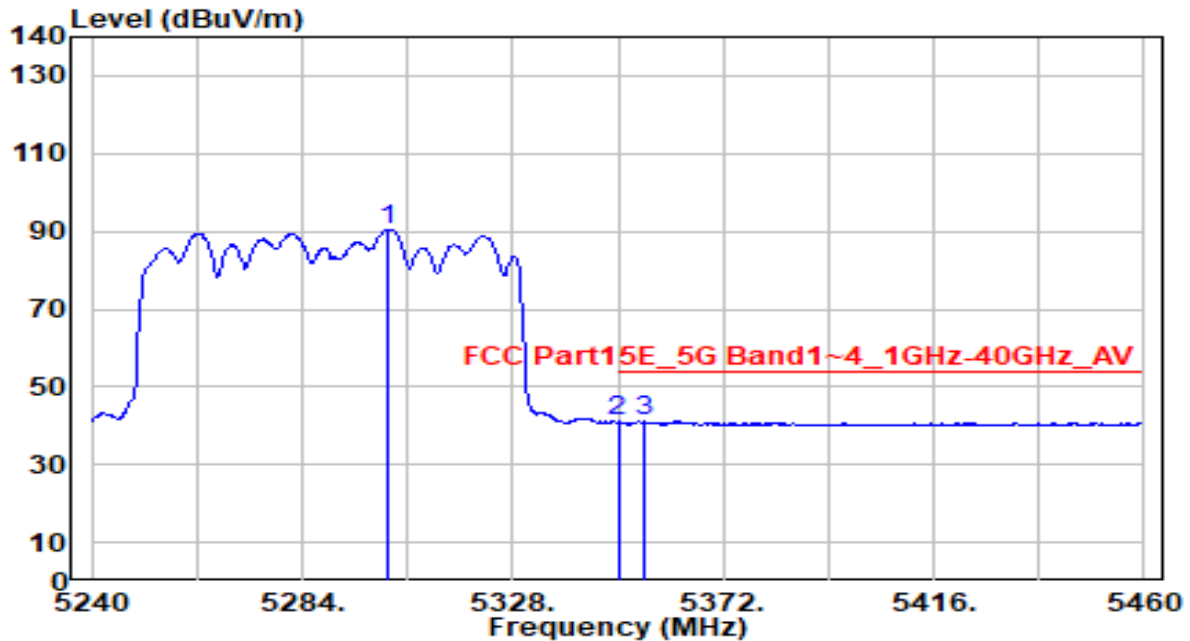


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.820	89.90	0.68	90.58	N/A	N/A	295	160	Average
2	5350.000	40.39	0.59	40.99	-13.01	54.00	295	160	Average
3	* 5355.500	40.60	0.58	41.18	-12.82	54.00	295	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

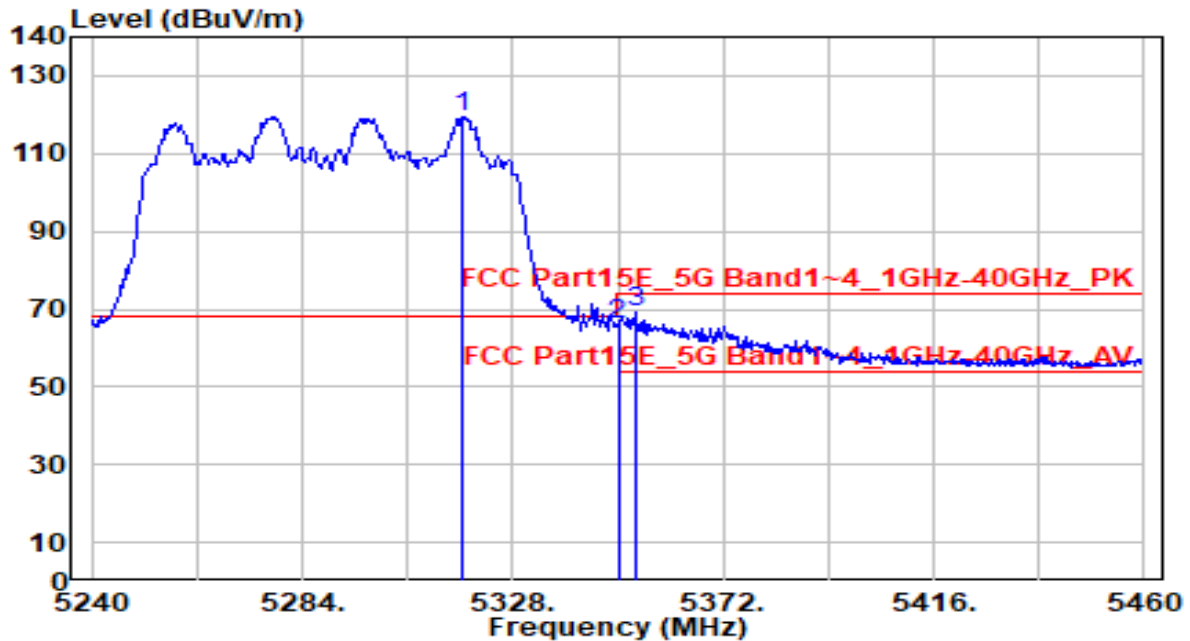


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.440	119.01	0.65	119.66	N/A	N/A	120	160	Peak
2	5350.000	65.37	0.59	65.97	-8.03	74.00	120	160	Peak
3	* 5353.520	68.57	0.59	69.16	-4.84	74.00	120	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

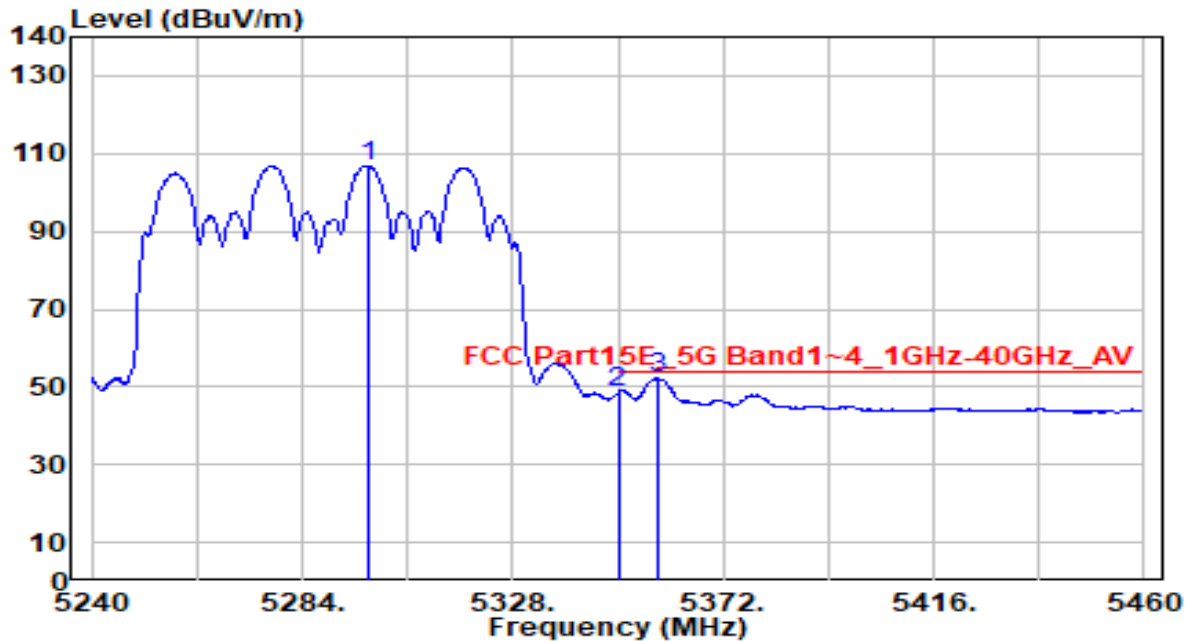


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5297.640	106.10	0.69	106.78	N/A	N/A	120	160	Average
2	5350.000	47.90	0.59	48.50	-5.50	54.00	120	160	Average
3	* 5358.580	51.60	0.58	52.18	-1.82	54.00	120	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

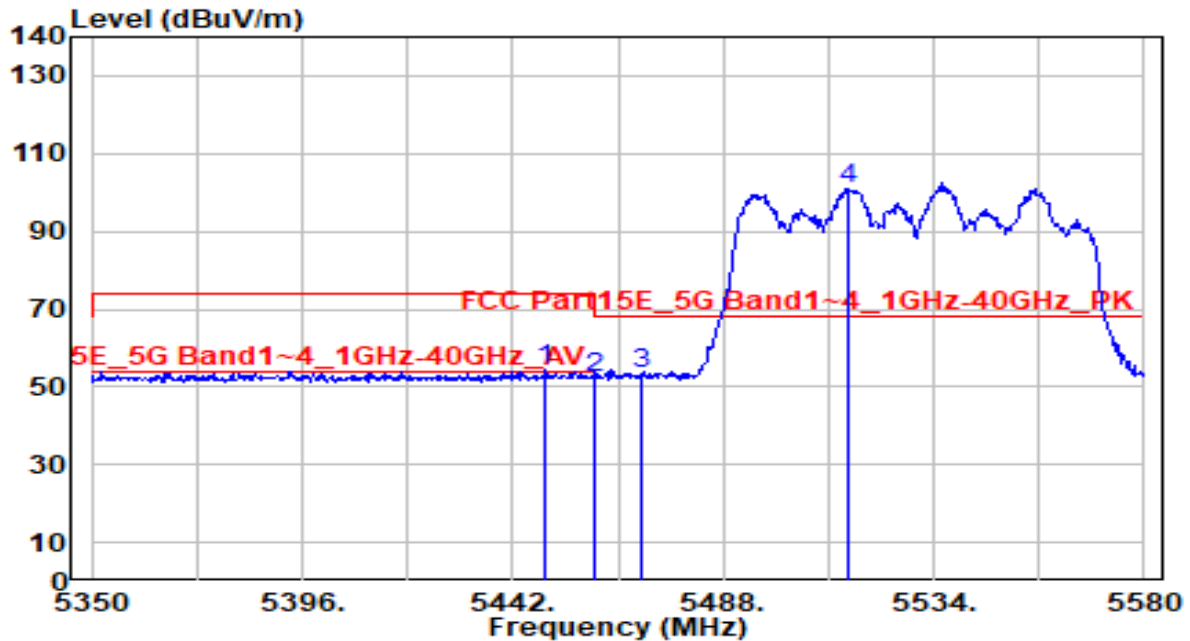


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5449.130	53.51	0.71	54.22	-19.78	74.00	115	25	Peak
2	5460.000	51.45	0.76	52.21	-21.79	74.00	115	25	Peak
3	* 5470.000	52.68	0.80	53.48	-14.72	68.20	115	25	Peak
4	5515.370	99.82	1.00	100.82	N/A	N/A	115	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

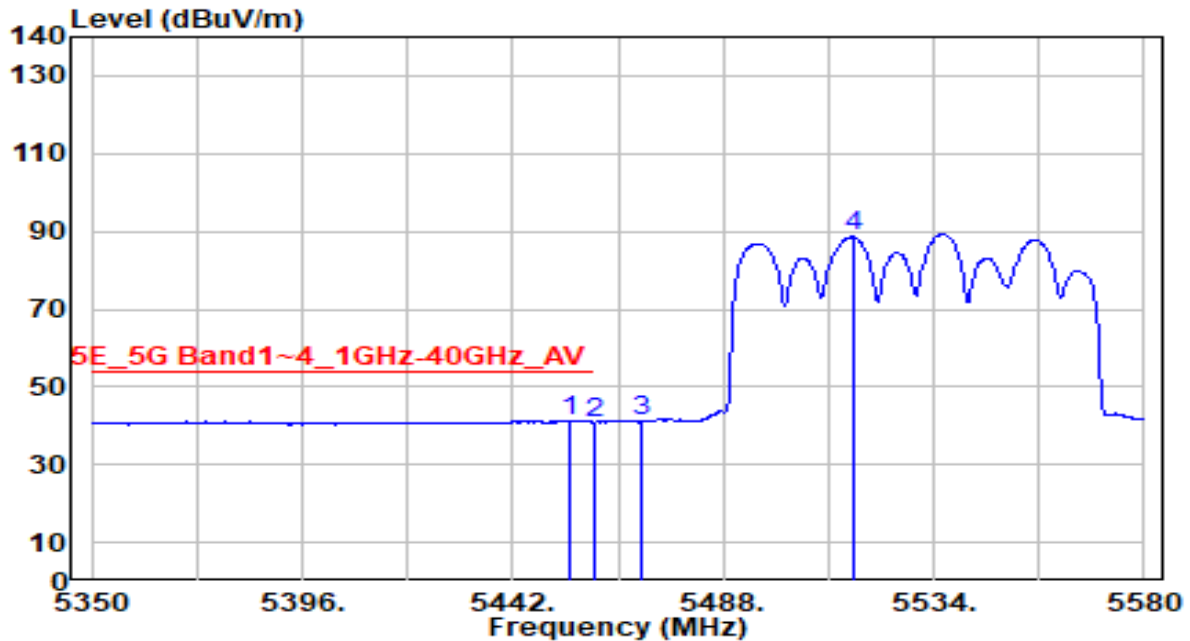


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.190	40.70	0.74	41.44	-12.56	54.00	115	25	Average
2		5460.000	40.10	0.76	40.86	-13.14	54.00	115	25	Average
3		5470.000	40.23	0.80	41.03	N/A	N/A	115	25	Average
4		5516.520	87.51	1.01	88.51	N/A	N/A	115	25	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

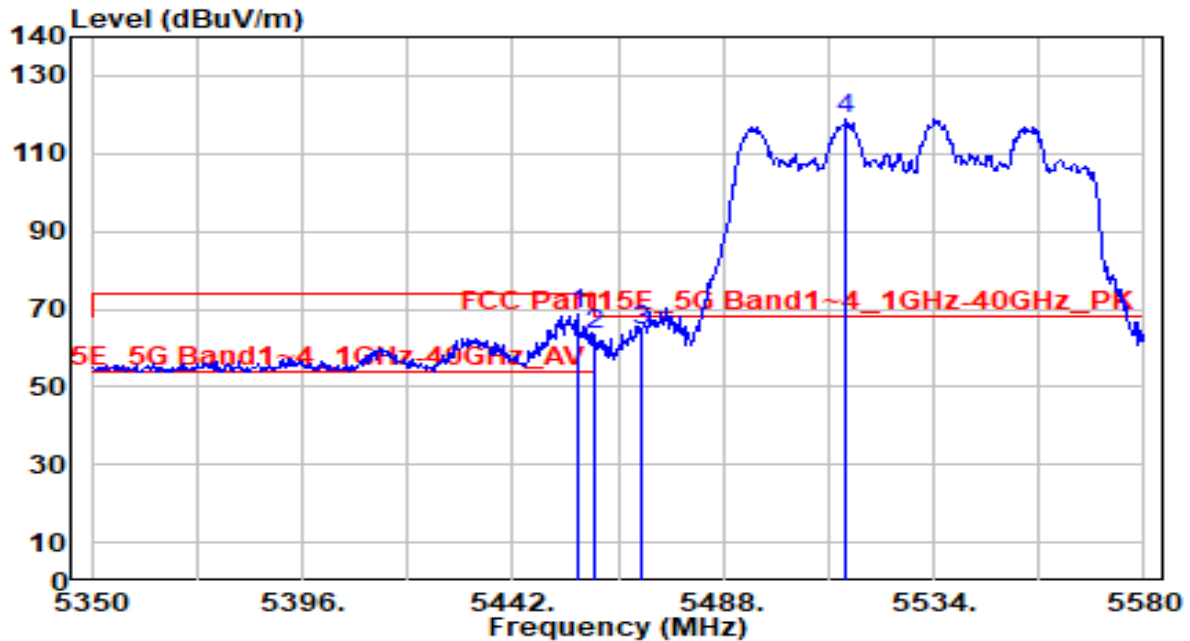


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.260	67.94	0.74	68.69	-5.31	74.00	180	60	Peak
2	5460.000	62.78	0.76	63.54	-10.46	74.00	180	60	Peak
3	* 5470.000	63.61	0.80	64.42	-3.78	68.20	180	60	Peak
4	5514.680	117.70	1.00	118.69	N/A	N/A	180	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

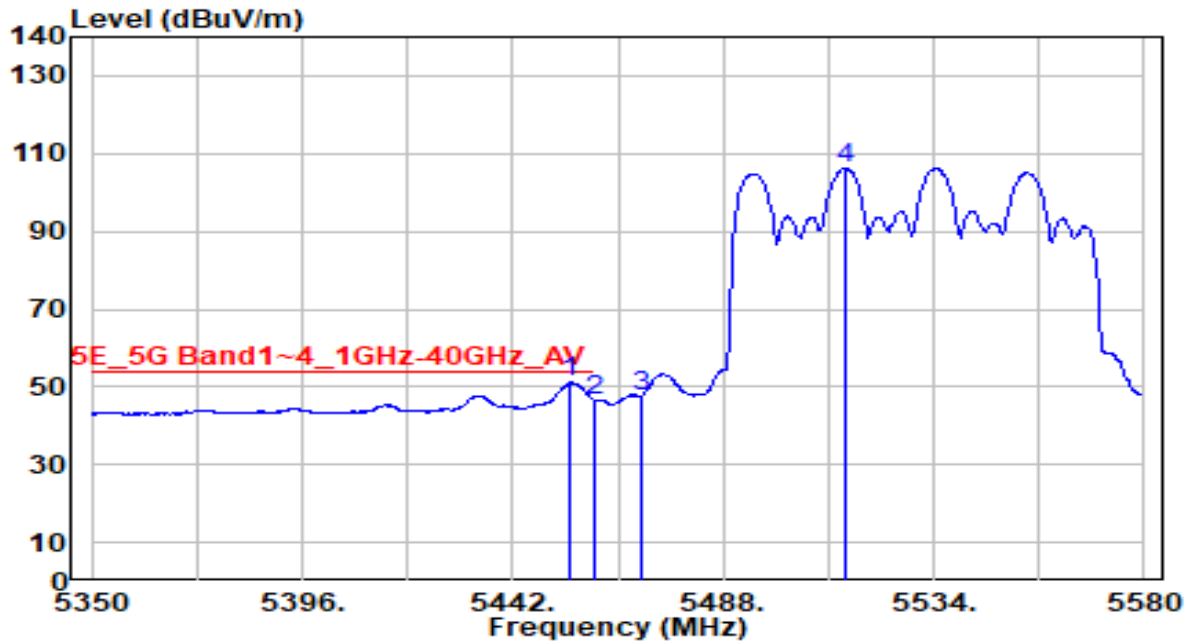


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.650	50.31	0.74	51.05	-2.95	54.00	180	60	Average
2		5460.000	45.96	0.76	46.72	-7.28	54.00	180	60	Average
3		5470.000	46.89	0.80	47.69	N/A	N/A	180	60	Average
4		5514.680	105.22	1.00	106.22	N/A	N/A	180	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

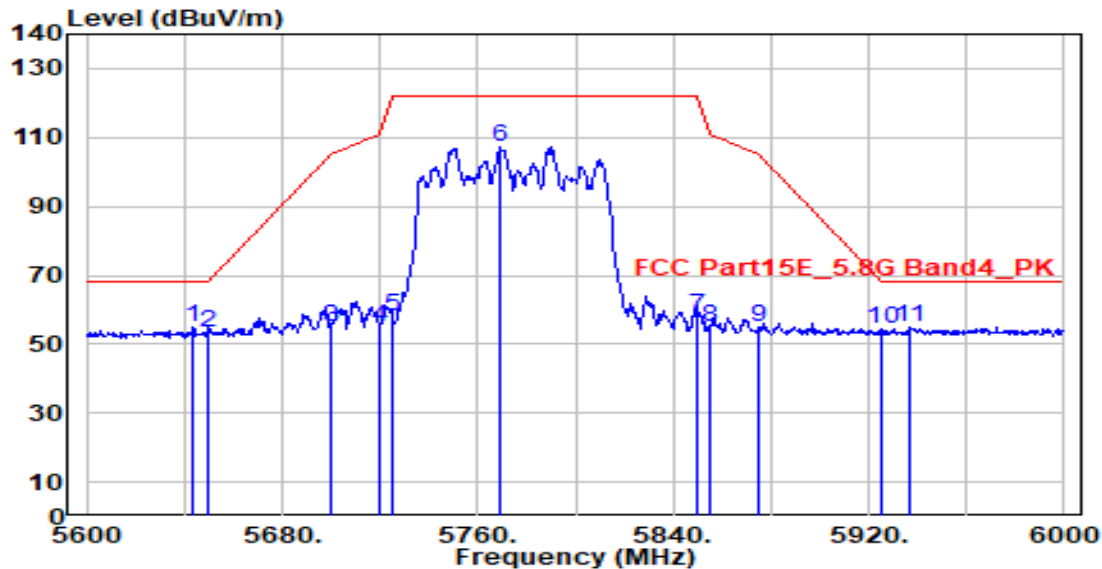


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5643.600	53.16	1.56	54.72	-13.48	68.20	100	185	Peak
2	5650.000	51.75	1.59	53.34	-14.86	68.20	100	185	Peak
3	5700.000	53.11	1.79	54.89	-50.31	105.20	100	185	Peak
4	5720.000	53.04	1.87	54.91	-55.89	110.80	100	185	Peak
5	5725.000	56.43	1.89	58.32	-63.88	122.20	100	185	Peak
6	5769.600	105.10	2.07	107.17	N/A	N/A	100	185	Peak
7	5850.000	56.03	2.27	58.30	-63.90	122.20	100	185	Peak
8	5855.000	52.79	2.28	55.06	-55.74	110.80	100	185	Peak
9	5875.000	52.89	2.31	55.20	-50.00	105.20	100	185	Peak
10	5925.000	52.00	2.38	54.39	-13.81	68.20	100	185	Peak
11	* 5936.400	52.79	2.40	55.19	-13.01	68.20	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

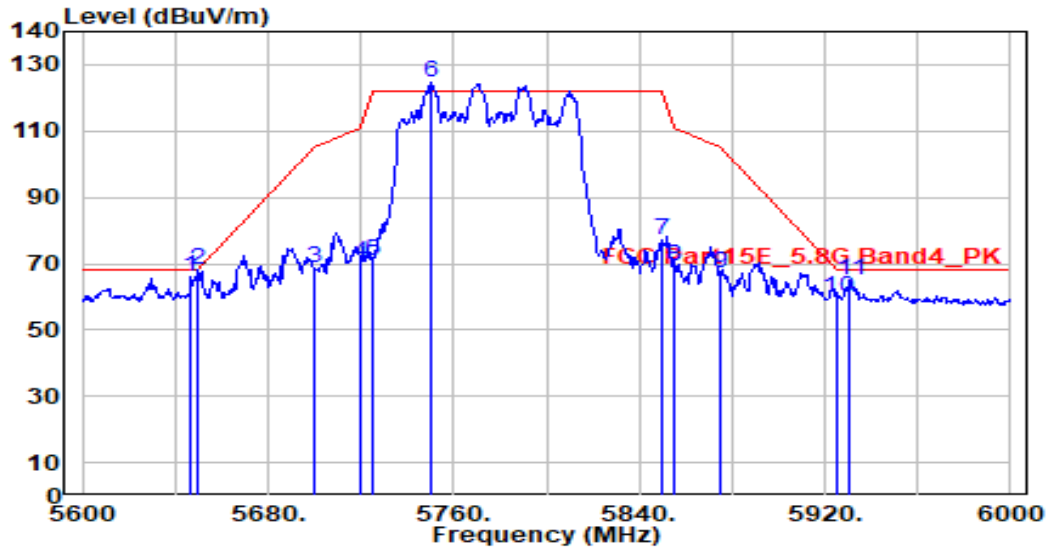


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5646.400	64.20	1.57	65.77	-2.43	68.20	190	350	Peak
2	* 5650.000	66.47	1.59	68.06	-0.14	68.20	190	350	Peak
3	5700.000	66.95	1.79	68.74	-36.46	105.20	190	350	Peak
4	5720.000	68.37	1.87	70.23	-40.57	110.80	190	350	Peak
5	5725.000	69.00	1.89	70.89	-51.31	122.20	190	350	Peak
6	5750.400	122.58	1.99	124.57	N/A	N/A	190	350	Peak
7	5850.000	74.60	2.27	76.87	-45.33	122.20	190	350	Peak
8	5855.000	66.83	2.28	69.10	-41.70	110.80	190	350	Peak
9	5875.000	64.98	2.31	67.29	-37.91	105.20	190	350	Peak
10	5925.000	57.46	2.38	59.84	-8.36	68.20	190	350	Peak
11	5930.800	62.77	2.39	65.16	-3.04	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

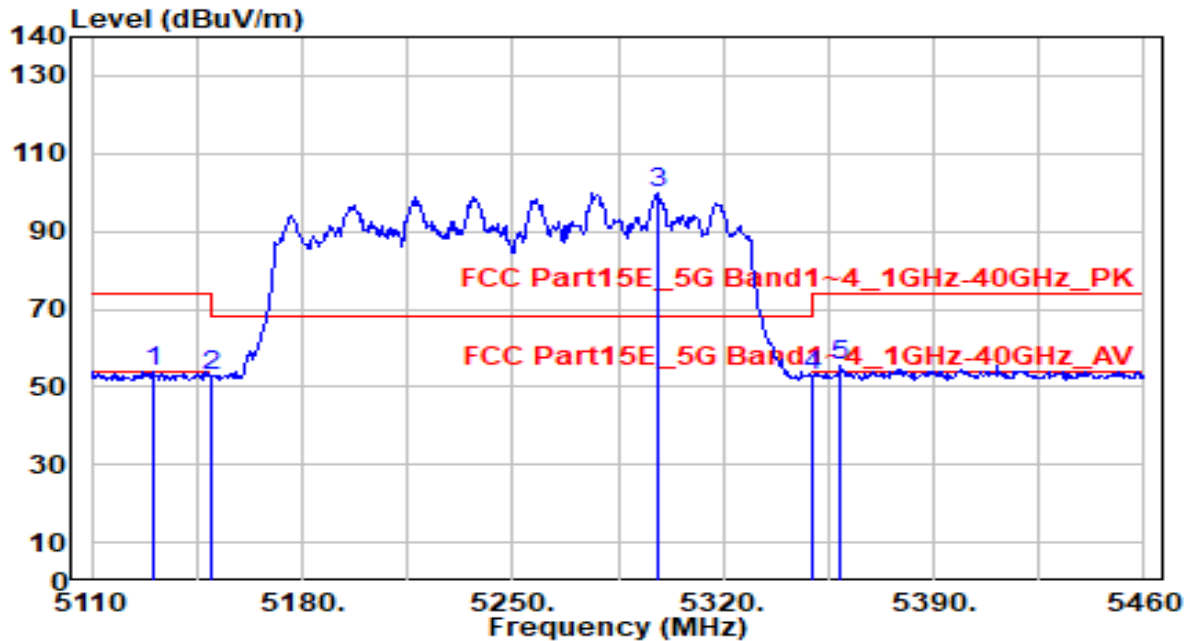


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5130.300	53.13	0.77	53.91	-20.09	74.00	300	105	Peak
2	5150.000	51.89	0.80	52.68	-21.32	74.00	300	105	Peak
3	5297.950	99.36	0.69	100.04	N/A	N/A	300	105	Peak
4	5350.000	52.16	0.59	52.76	-21.24	74.00	300	105	Peak
5	* 5358.850	54.66	0.58	55.24	-18.76	74.00	300	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

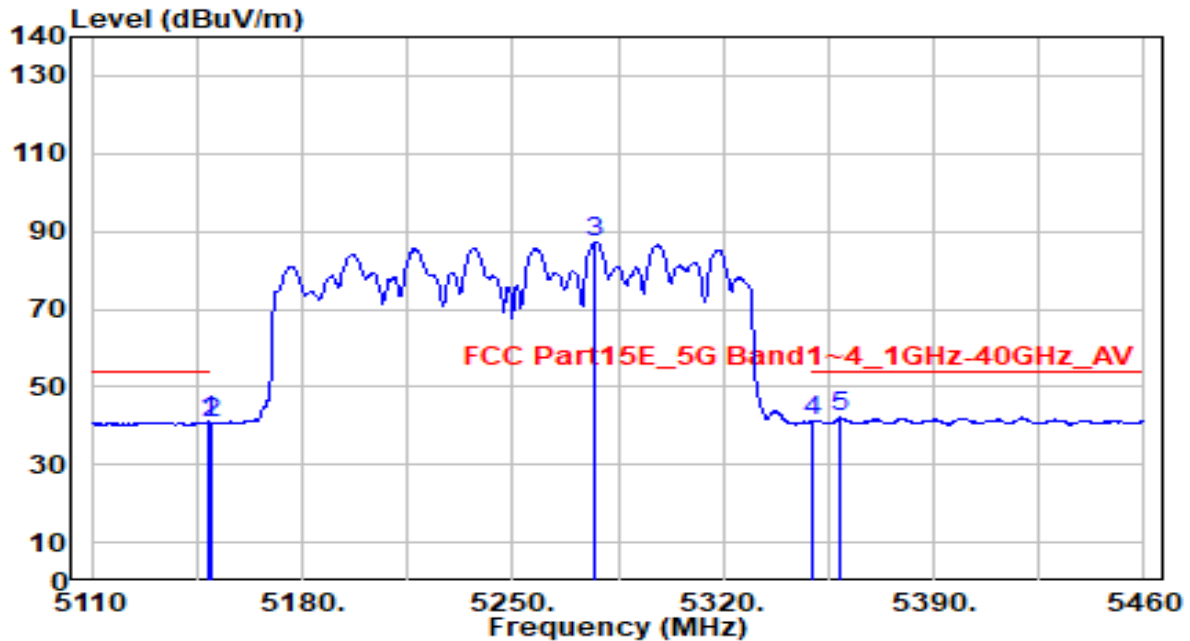


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.500	40.17	0.79	40.96	-13.04	54.00	300	105	Average
2	5150.000	39.92	0.80	40.71	-13.29	54.00	300	105	Average
3	5276.950	86.61	0.72	87.33	N/A	N/A	300	105	Average
4	5350.000	40.57	0.59	41.16	-12.84	54.00	300	105	Average
5	* 5358.500	41.49	0.58	42.07	-11.93	54.00	300	105	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

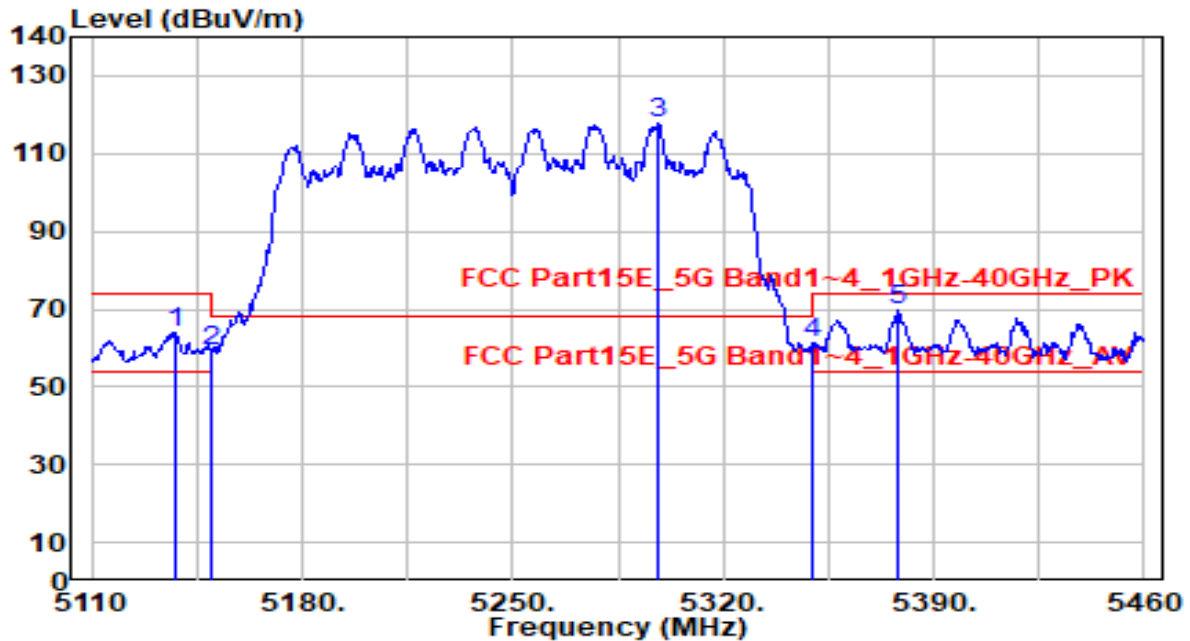


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5137.650	63.01	0.78	63.79	-10.21	74.00	110	160	Peak
2	5150.000	58.57	0.80	59.37	-14.63	74.00	110	160	Peak
3	5297.950	116.97	0.69	117.66	N/A	N/A	110	160	Peak
4	5350.000	60.92	0.59	61.52	-12.48	74.00	110	160	Peak
5	* 5378.100	69.23	0.54	69.78	-4.22	74.00	110	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

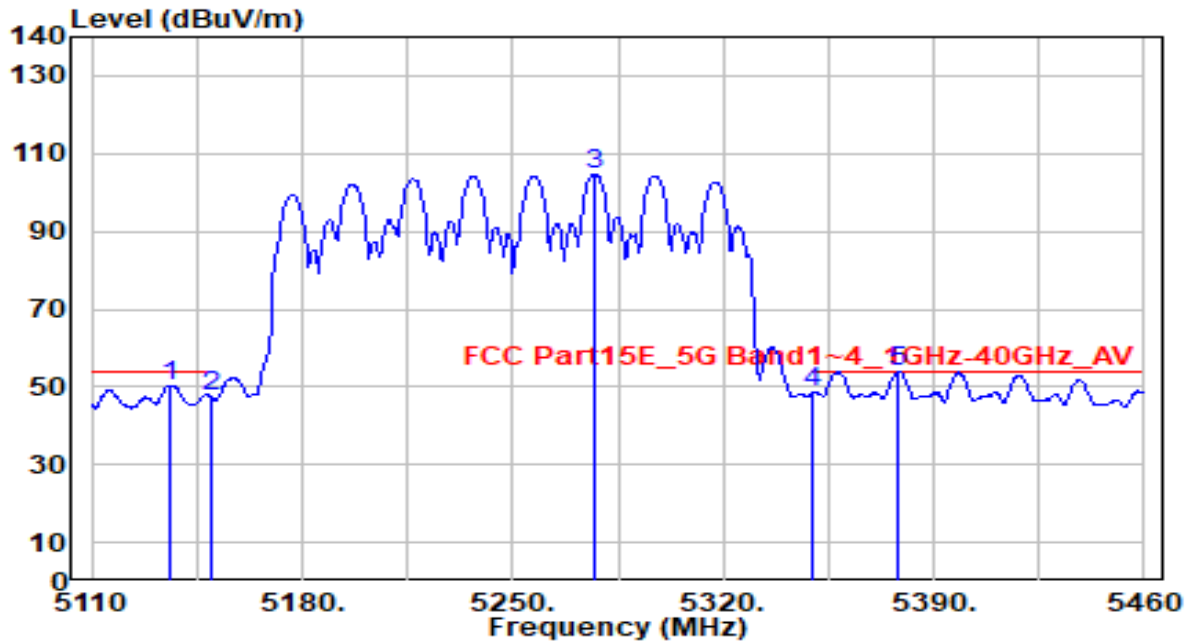


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5135.900	49.67	0.78	50.45	-3.55	54.00	110	160	Average
2	5150.000	46.59	0.80	47.38	-6.62	54.00	110	160	Average
3	5276.950	104.01	0.72	104.73	N/A	N/A	110	160	Average
4	5350.000	47.83	0.59	48.43	-5.57	54.00	110	160	Average
5	* 5378.100	53.41	0.54	53.95	-0.05	54.00	110	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

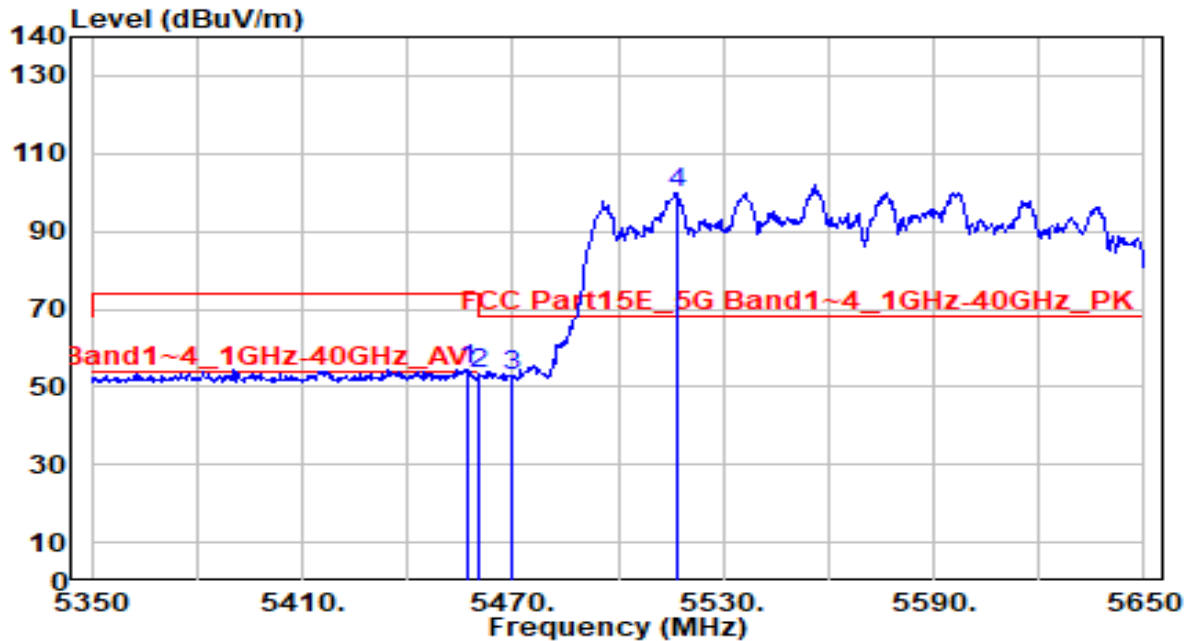


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.100	53.82	0.75	54.57	-19.43	74.00	275	180	Peak
2	5460.000	52.35	0.76	53.11	-20.89	74.00	275	180	Peak
3	* 5470.000	52.00	0.80	52.80	-15.40	68.20	275	180	Peak
4	5516.800	99.00	1.01	100.01	N/A	N/A	275	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

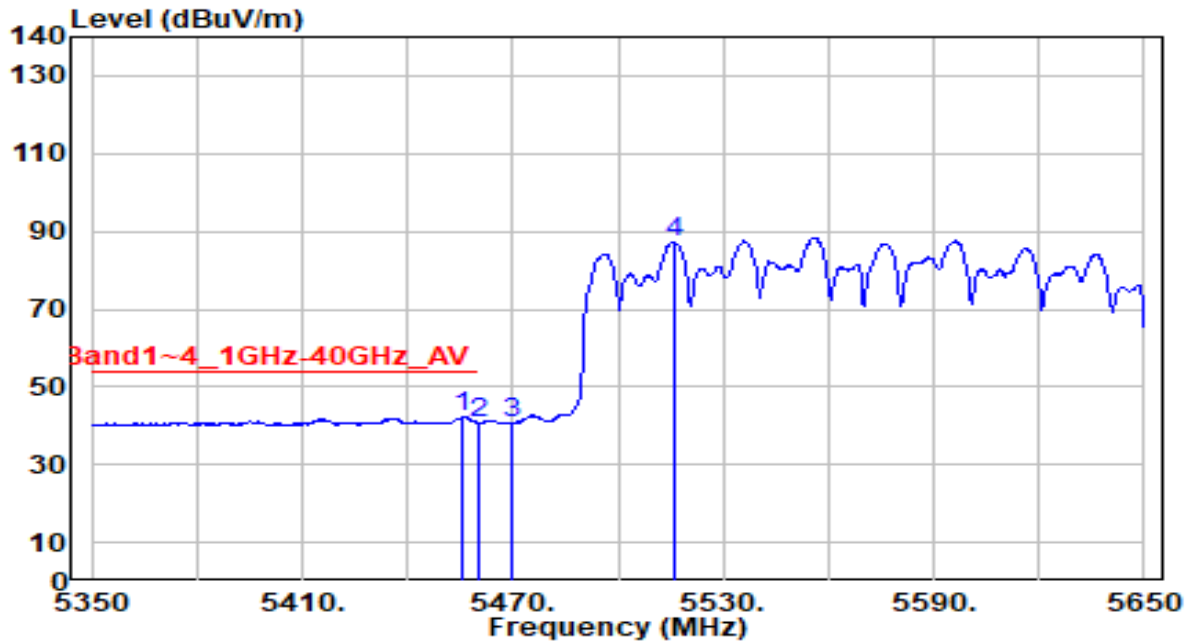


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.900	41.49	0.74	42.24	-11.76	54.00	275	180	Average
2		5460.000	40.08	0.76	40.84	-13.16	54.00	275	180	Average
3		5470.000	39.90	0.80	40.70	N/A	N/A	275	180	Average
4		5515.900	86.13	1.00	87.13	N/A	N/A	275	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

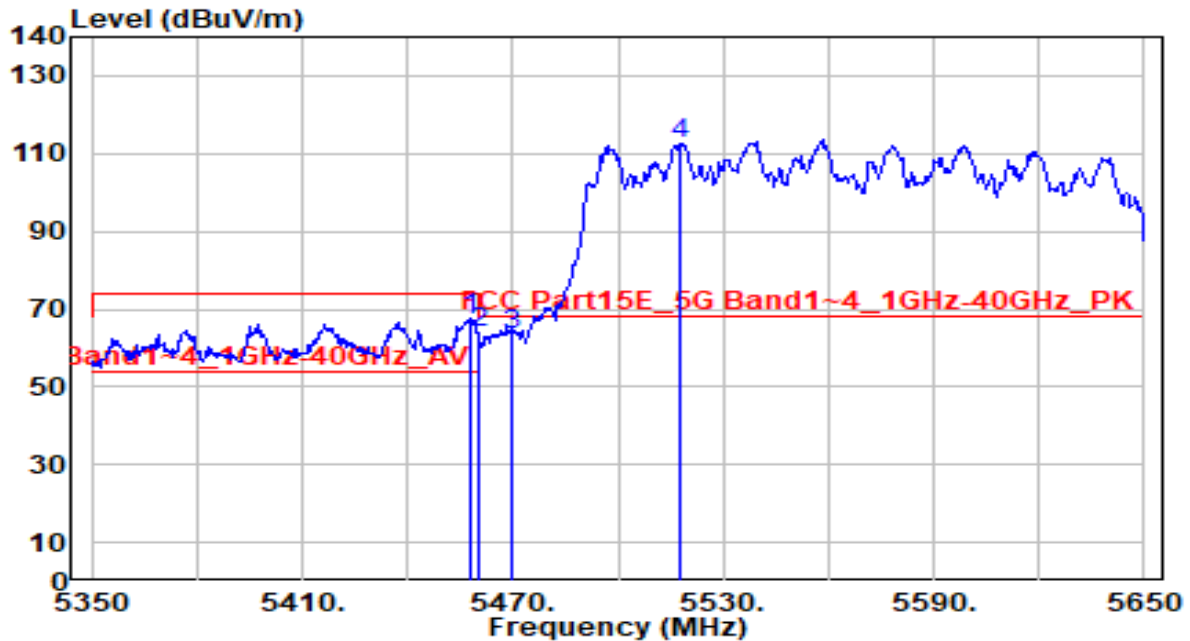


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.300	66.86	0.75	67.62	-6.38	74.00	100	160	Peak
2	5460.000	62.98	0.76	63.74	-10.26	74.00	100	160	Peak
3	* 5470.000	62.83	0.80	63.63	-4.57	68.20	100	160	Peak
4	5517.700	111.72	1.01	112.74	N/A	N/A	100	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-09-28
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

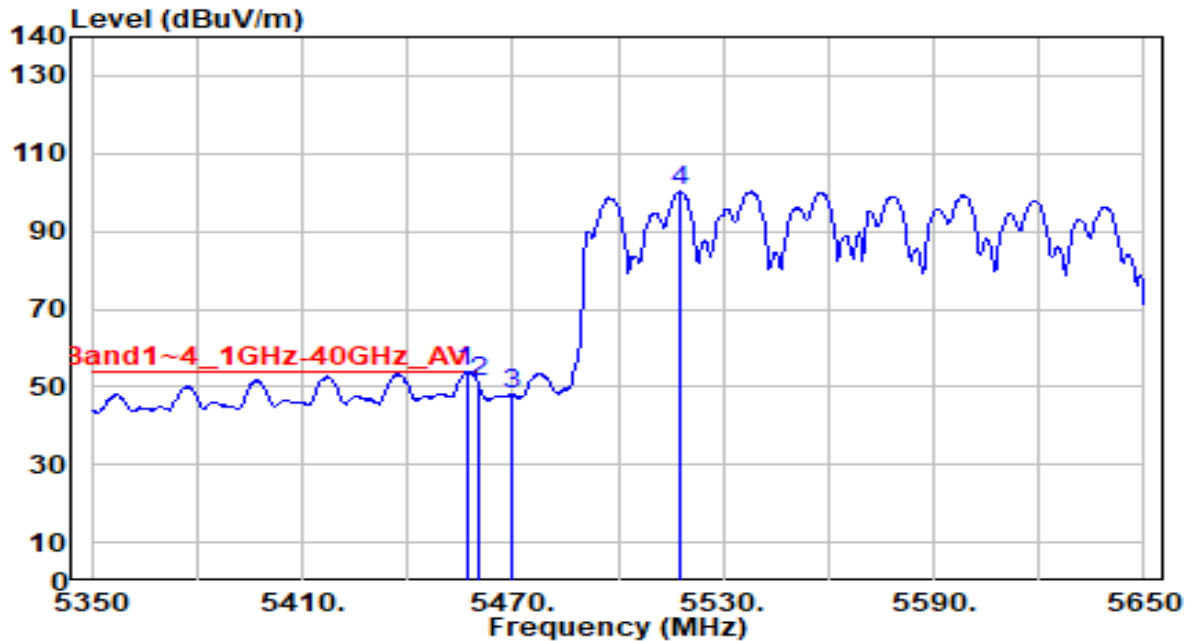

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.800	53.04	0.75	53.79	-0.21	54.00	100	160	Average
2		5460.000	50.46	0.76	51.22	-2.78	54.00	100	160	Average
3		5470.000	47.17	0.80	47.97	N/A	N/A	100	160	Average
4		5517.700	99.23	1.01	100.24	N/A	N/A	100	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement


7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.9.2. Test Setup

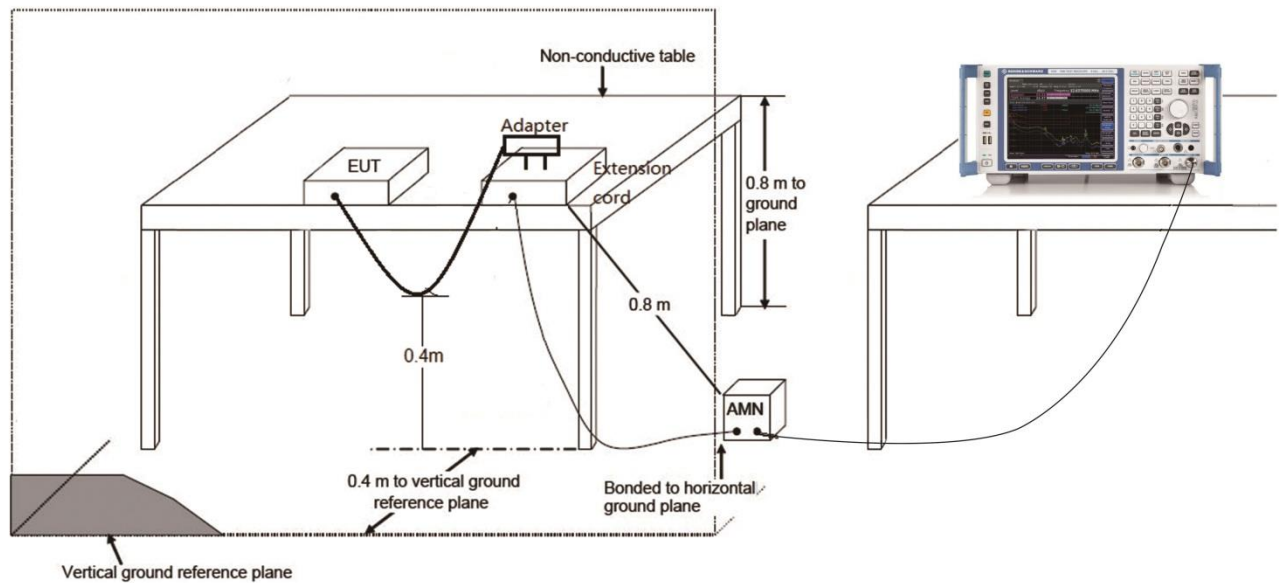

7.9.3.Test Result

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-10-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.4°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

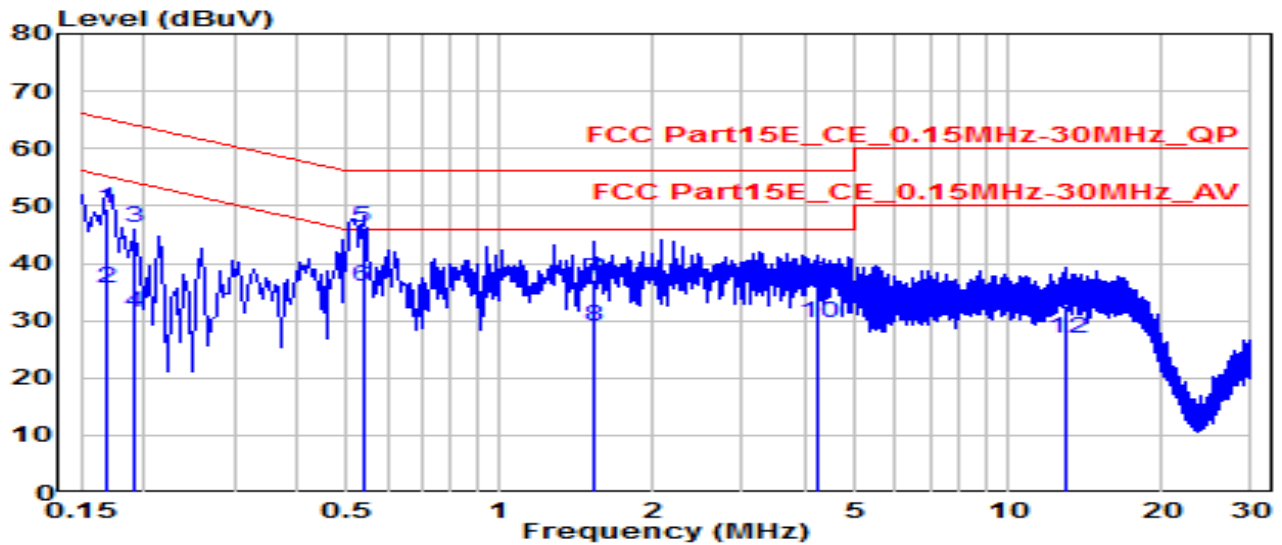


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	40.04	9.62	49.66	-15.40	65.06	QP
2	0.168	26.13	9.62	35.75	-19.31	55.06	Average
3	0.190	36.63	9.62	46.25	-17.76	64.01	QP
4	0.190	21.64	9.62	31.26	-22.75	54.01	Average
5	* 0.537	36.46	9.64	46.11	-9.89	56.00	QP
6	* 0.537	26.17	9.64	35.82	-10.18	46.00	Average
7	1.531	27.44	9.68	37.12	-18.88	56.00	QP
8	1.531	19.19	9.68	28.87	-17.13	46.00	Average
9	4.213	26.81	9.73	36.54	-19.46	56.00	QP
10	4.213	19.75	9.73	29.49	-16.51	46.00	Average
11	13.023	22.81	9.88	32.69	-27.31	60.00	QP
12	13.023	16.95	9.88	26.83	-23.17	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-10-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.4°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 120V/60Hz

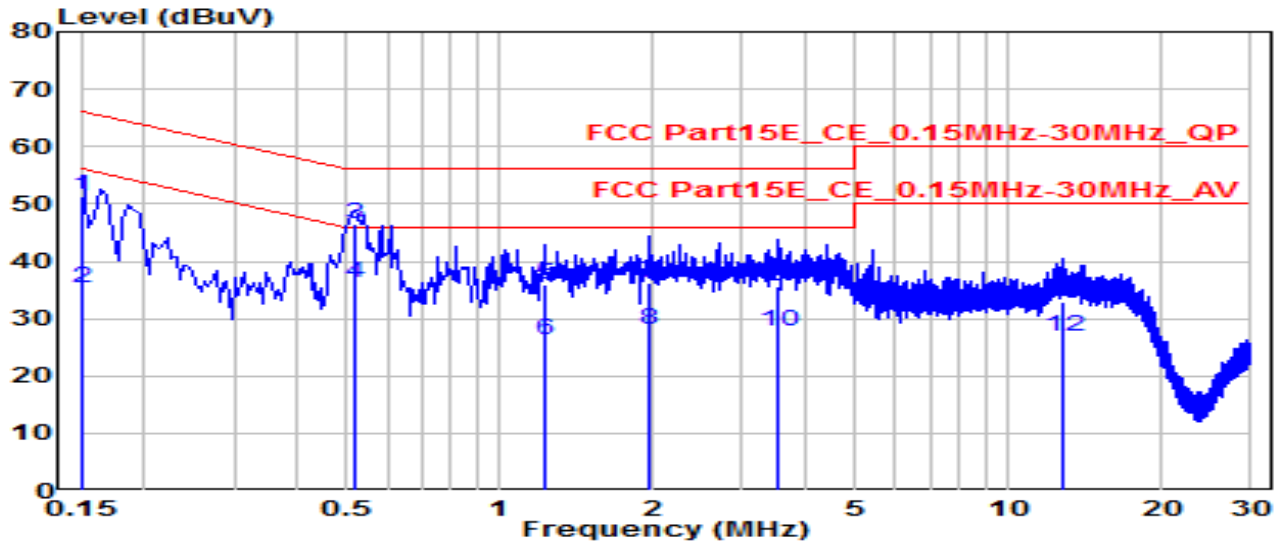


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.150	41.69	9.62	51.31	-14.69	66.00	QP
2	0.150	25.66	9.62	35.28	-20.72	56.00	Average
3	* 0.519	36.83	9.64	46.48	-9.52	56.00	QP
4	* 0.519	26.53	9.64	36.17	-9.83	46.00	Average
5	1.225	26.39	9.67	36.07	-19.93	56.00	QP
6	1.225	16.50	9.67	26.18	-19.82	46.00	Average
7	1.959	26.50	9.69	36.19	-19.81	56.00	QP
8	1.959	18.26	9.69	27.95	-18.05	46.00	Average
9	3.516	26.00	9.72	35.72	-20.28	56.00	QP
10	3.516	18.15	9.72	27.87	-18.13	46.00	Average
11	12.879	22.91	9.90	32.81	-27.19	60.00	QP
12	12.879	17.09	9.90	27.00	-23.00	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-10-07
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.4°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 240V/60Hz

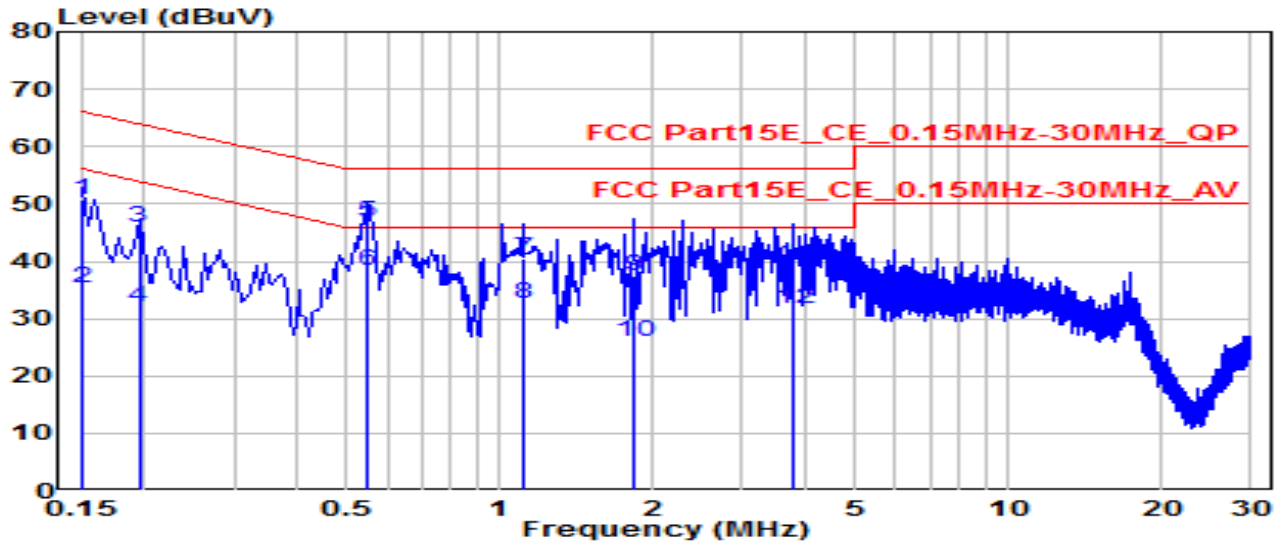


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.150	40.95	9.62	50.57	-15.43	66.00	QP
2	0.150	25.68	9.62	35.30	-20.70	56.00	Average
3	0.195	36.33	9.62	45.95	-17.87	63.82	QP
4	0.195	22.43	9.62	32.05	-21.77	53.82	Average
5	*	0.550	9.64	46.69	-9.31	56.00	QP
6	*	0.550	9.64	38.28	-7.72	46.00	Average
7	1.108	30.69	9.67	40.36	-15.64	56.00	QP
8	1.108	22.87	9.67	32.55	-13.45	46.00	Average
9	1.837	27.87	9.69	37.55	-18.45	56.00	QP
10	1.837	16.13	9.69	25.81	-20.19	46.00	Average
11	3.772	29.40	9.73	39.13	-16.87	56.00	QP
12	3.772	22.02	9.73	31.75	-14.25	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX5400 Multi-Gigabit Wi-Fi 6 Router	Date of Test	2022-10-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.4°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1+2+3	Test Voltage	AC 240V/60Hz

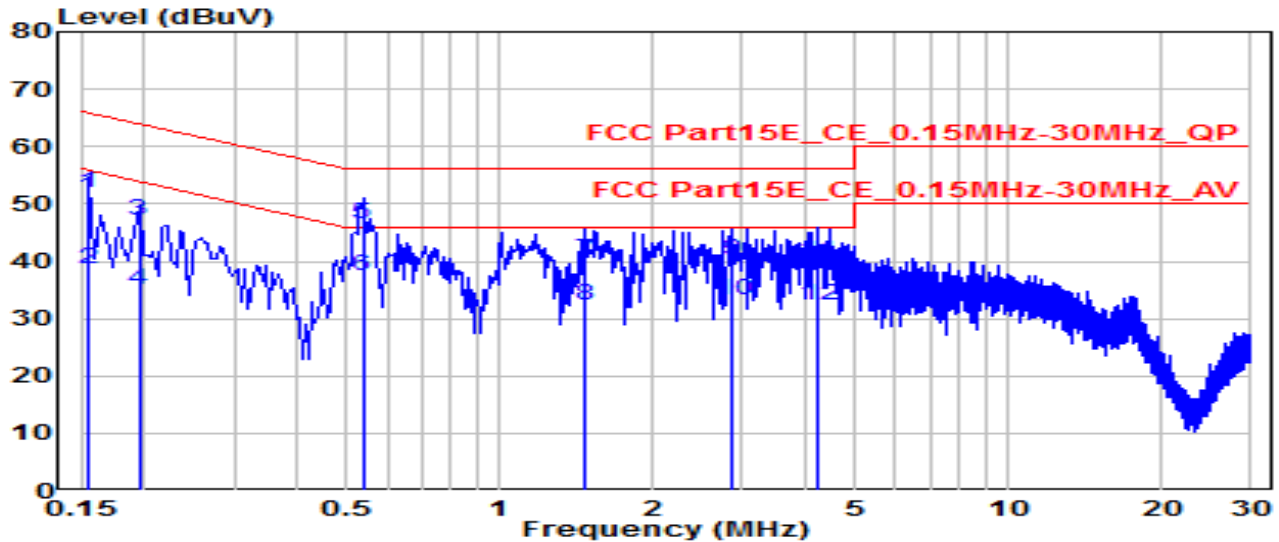

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.154	42.31	9.62	51.93	-13.83	65.75	QP
2	0.154	29.13	9.62	38.75	-17.00	55.75	Average
3	0.195	37.55	9.62	47.17	-16.65	63.82	QP
4	0.195	25.32	9.62	34.94	-18.88	53.82	Average
5	* 0.537	36.82	9.64	46.47	-9.53	56.00	QP
6	* 0.537	27.93	9.64	37.58	-8.42	46.00	Average
7	1.477	30.43	9.68	40.11	-15.89	56.00	QP
8	1.477	22.67	9.68	32.35	-13.65	46.00	Average
9	2.854	30.37	9.71	40.07	-15.93	56.00	QP
10	2.854	23.43	9.71	33.14	-12.86	46.00	Average
11	4.222	29.98	9.73	39.71	-16.29	56.00	QP
12	4.222	22.66	9.73	32.40	-13.60	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

The End

Appendix A : Test Setup Photograph

Refer to “2208TW0121-Setup Photo” file.

Appendix B : External Photograph

Refer to “2208TW0121-External Photo” file.

Appendix C : Internal Photograph

Refer to “2208TW0121-Internal Photo” file.