



**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: SZEM170200097903

Page: 1 of 46

FCC REPORT

Application No.: SZEM1702000979CR
Applicant: SZ DJI TECHNOLOGY CO., LTD
Manufacturer: SZ DJI TECHNOLOGY CO., LTD
Factory: SZ DJI TECHNOLOGY CO., LTD
Product Name: Phantom 4 Advanced
Model No.(EUT): WM332A
Trade Mark: DJI
FCC ID: SS3-WM332A1702
Standards: 47 CFR Part 15, Subpart C (2016)
Date of Receipt: 2017-02-23
Date of Test: 2017-02-24 to 2017-03-09
Date of Issue: 2017-03-14

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager


The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2017-03-14		Original

Authorized for issue by:				
Tested By				2017-03-14
				Date
Checked By				2017-03-14
				Date
		(Hank Yan) /Project Engineer		
		(Eric Fu) /Reviewer		



3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	N/A
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS



4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 TEST LOCATION	7
5.6 TEST FACILITY	8
5.7 DEVIATION FROM STANDARDS	8
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	8
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
5.10 EQUIPMENT LIST	9
6 TEST RESULTS AND MEASUREMENT DATA	11
6.1 ANTENNA REQUIREMENT	11
6.2 CONDUCTED PEAK OUTPUT POWER	12
6.3 20dB OCCUPY BANDWIDTH	15
6.4 CARRIER FREQUENCIES SEPARATION	18
6.5 HOPPING CHANNEL NUMBER	21
6.6 DWELL TIME	23
6.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS	27
6.8 SPURIOUS RF CONDUCTED EMISSIONS	30
6.9 RADIATED SPURIOUS EMISSION	34
6.9.1 Radiated Emission below 1GHz	37
6.9.2 Transmitter Emission above 1GHz	39
6.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	41



5 General Information

5.1 Client Information

Applicant:	SZ DJI TECHNOLOGY CO., LTD
Address of Applicant:	14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave, Nanshan District, Shenzhen, China
Manufacturer:	SZ DJI TECHNOLOGY CO., LTD
Address of Manufacturer:	14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave, Nanshan District, Shenzhen, China
Factory:	SZ DJI TECHNOLOGY CO., LTD
Address of Factory:	14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave, Nanshan District, Shenzhen, China

5.2 General Description of EUT

Product Name:	Phantom 4 Advanced
Model No.:	WM332A
Trade Mark:	DJI
Operation Frequency:	915.94MHz ~ 925.74MHz
Spread Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	2GFSK
Number of Channel:	50
Sample Type:	Mobile production
Antenna Type:	Integral Antenna
Antenna Gain:	-0.46dBi
Power Supply	DC 15.2V Li-ion Battery



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903

Page: 6 of 46

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	915.94	14	918.54	27	921.14	40	923.74
2	916.14	15	918.74	28	921.34	41	923.94
3	916.34	16	918.94	29	921.54	42	924.14
4	916.54	17	919.14	30	921.74	43	924.34
5	916.74	18	919.34	31	921.94	44	924.54
6	916.94	19	919.54	32	922.14	45	924.74
7	917.14	20	919.74	33	922.34	46	924.94
8	917.34	21	919.94	34	922.54	47	925.14
9	917.54	22	920.14	35	922.74	48	925.34
10	917.74	23	920.34	36	922.94	49	925.54
11	917.94	24	920.54	37	923.14	50	925.74
12	918.14	25	920.74	38	923.34		
13	918.34	26	920.94	39	923.54		

Note:

According to 47 CFR Part 15.31(m), while the operating frequency range over 10MHz, the test shall to be performed at the lowest, middle and highest channels. The selected test channels are below:

Channel	Frequency
The Lowest channel	915.94MHz
The Middle channel	920.74MHz
The Highest channel	925.74MHz



5.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



5.10 Equipment List

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Chamber	ETS-LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2016-10-09	2017-10-09
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903


Page: 10 of 46

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EXA Spectrum Analyzer	Agilent Technologies Inc	N9010A	SEM004-09	2016-07-19	2017-07-19
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
7	Horn Antenna(26GHz-40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12
8	Low Noise Amplifier	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2016-10-09	2017-10-09
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A

RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09


6 Test results and Measurement Data

6.1 Antenna Requirement

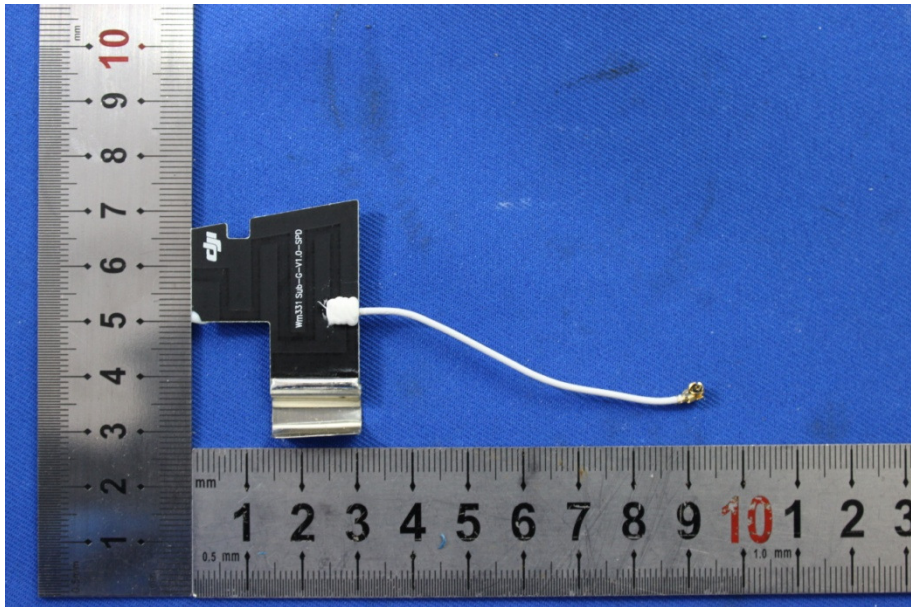Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.46dBi.	



6.2 Conducted Peak Output Power

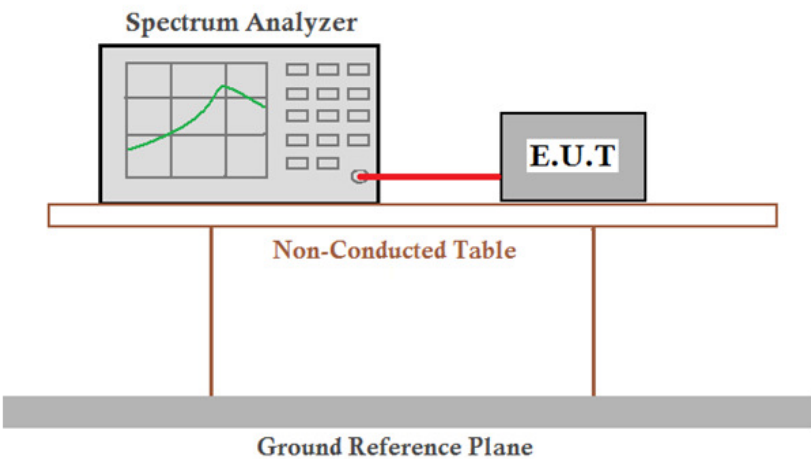Test Requirement:	47 CFR Part 15C Section 15.247 (b)(2)
Test Method:	ANSI C63.10:2013 Section 7.8.5
Test Setup:	
Limit:	1 watt (30dBm) for systems employing at least 50 hopping channels; and, 0.25 watts (24dBm) for systems employing less than 50 hopping channels
Test Mode:	Non-hopping transmitting with modulation.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	11.94	30.00	Pass
Middle	11.97	30.00	Pass
Highest	12.01	30.00	Pass





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 13 of 46

Test plot as follows:

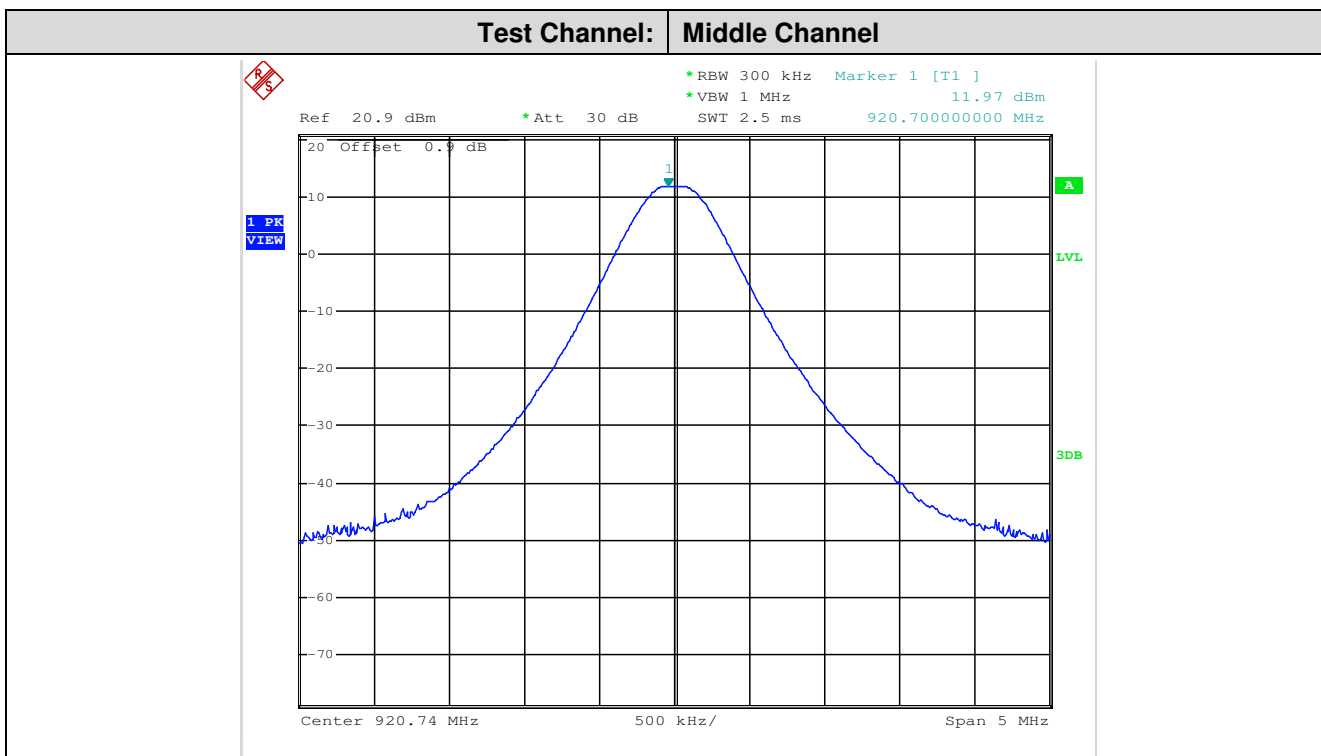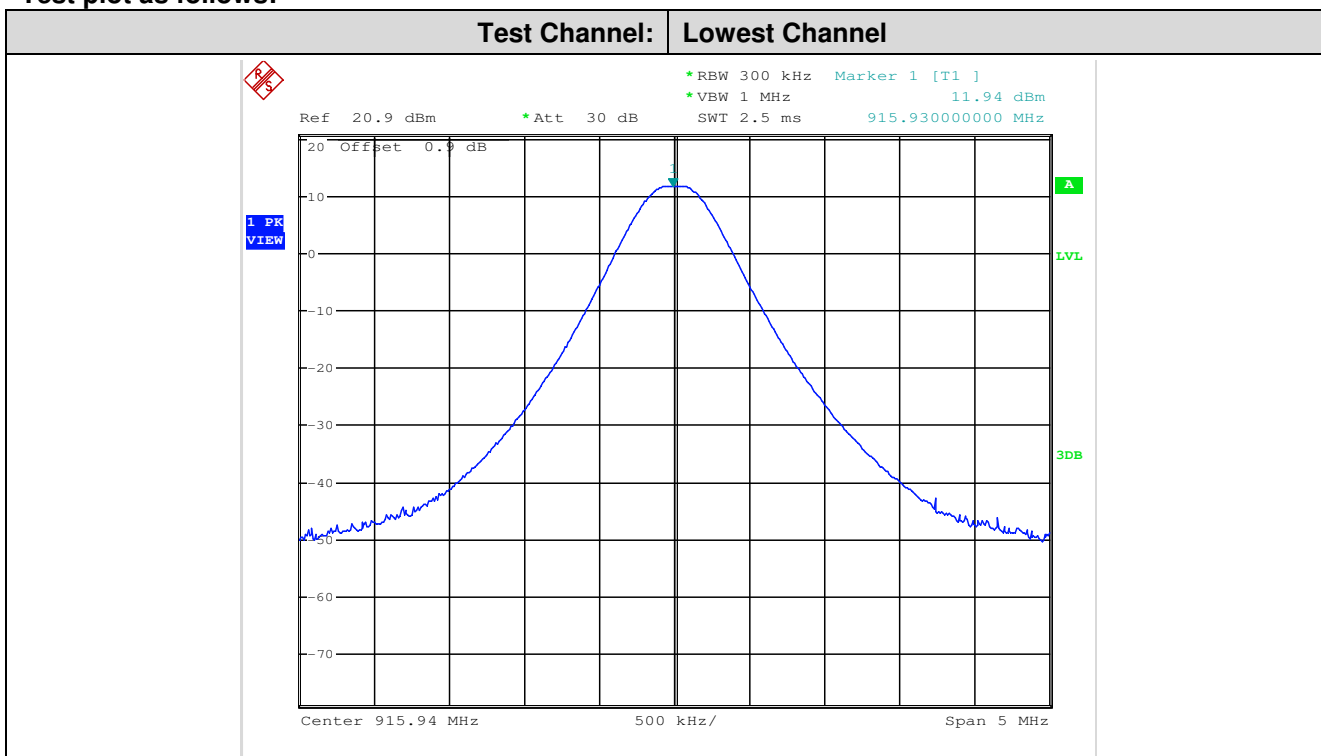




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM170200097903

Page: 14 of 46

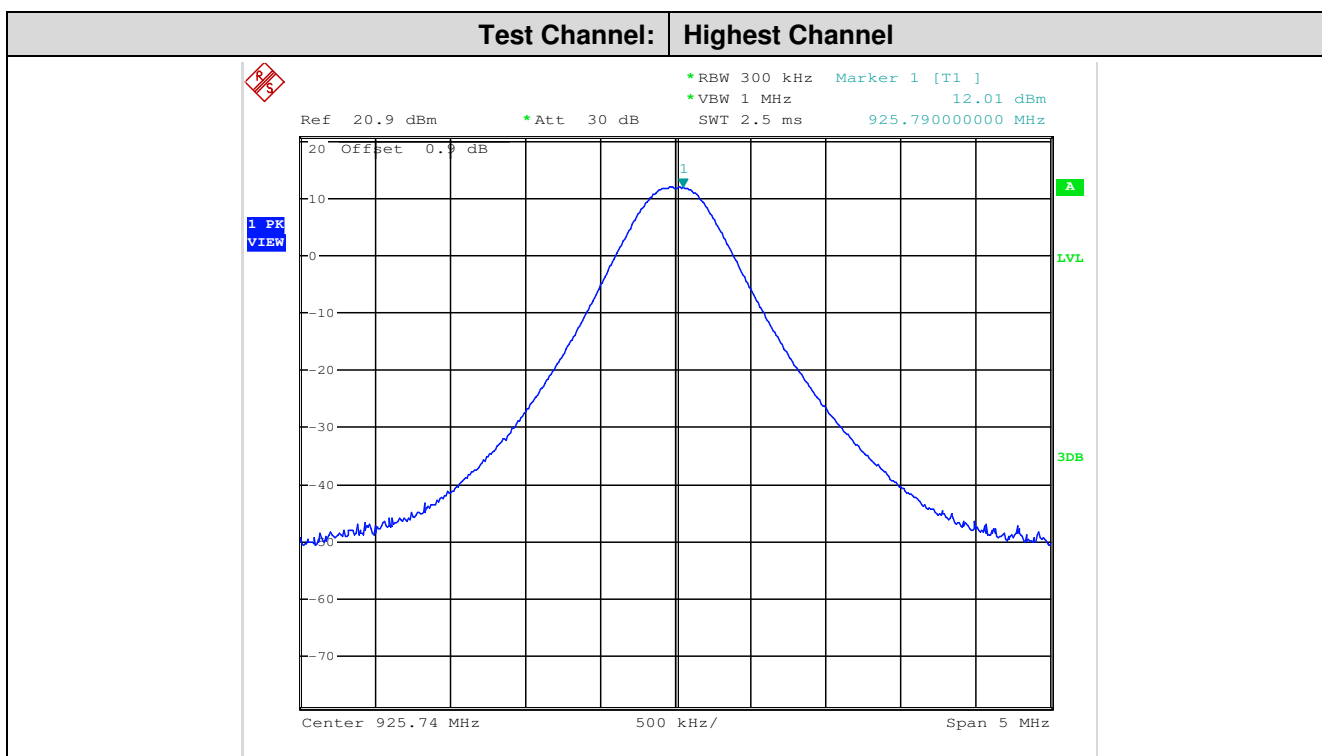



6.3 20dB Occupy Bandwidth

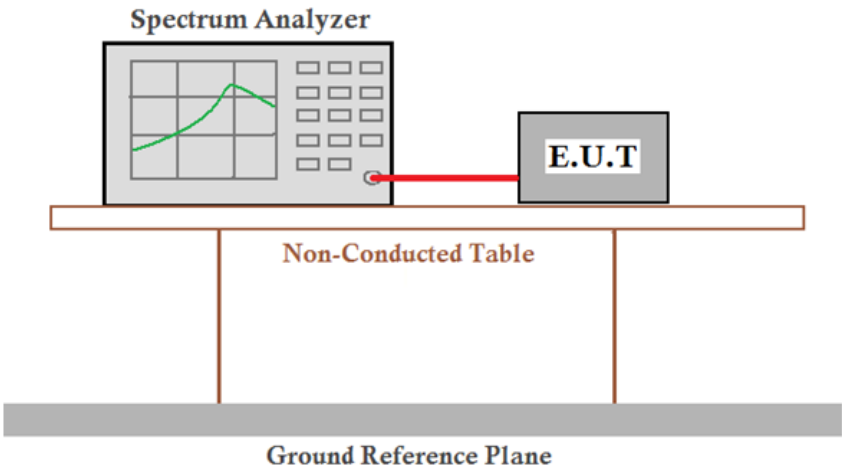Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)(i)
Test Method:	ANSI C63.10:2013 Section 7.8.7
Test Setup:	
Limit:	≤ 500kHz
Test Mode:	Non-hopping transmitting with modulation.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Result
Lowest	137	500	Pass
Middle	137	500	Pass
Highest	136	500	Pass





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 16 of 46

Test plot as follows:

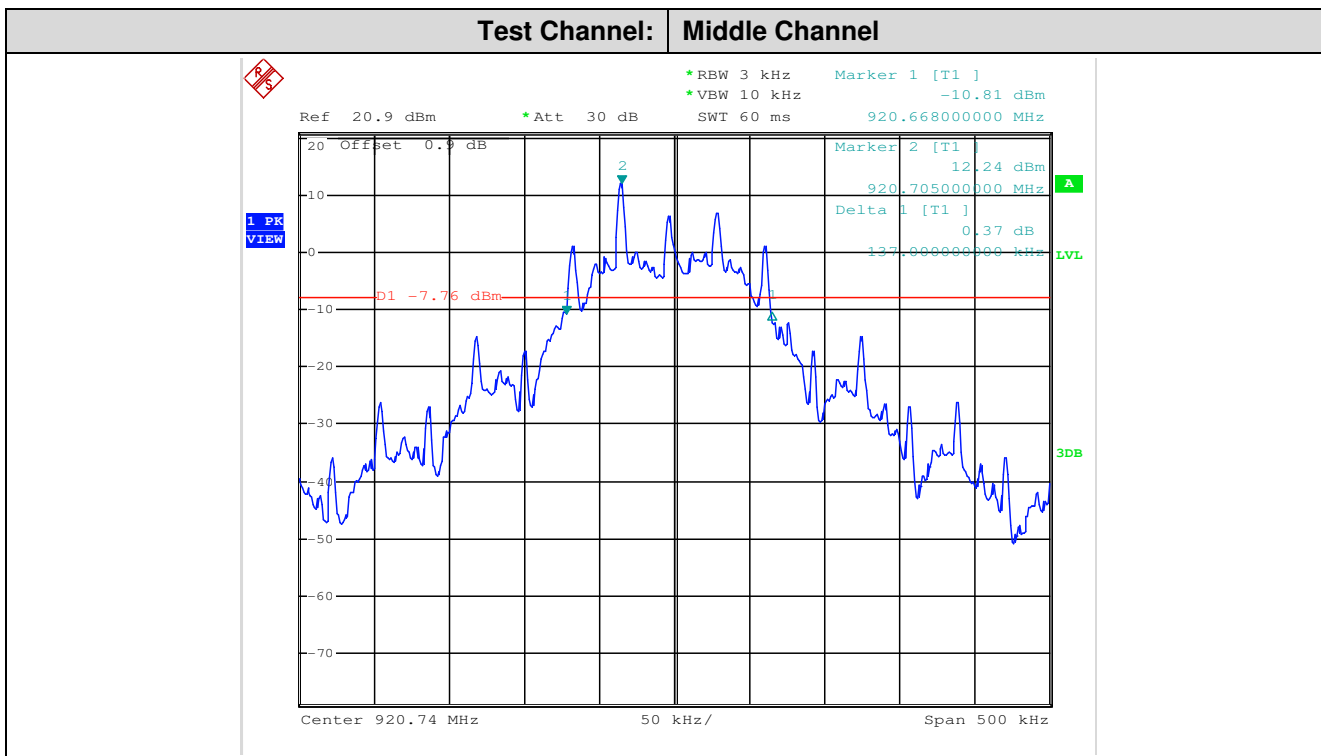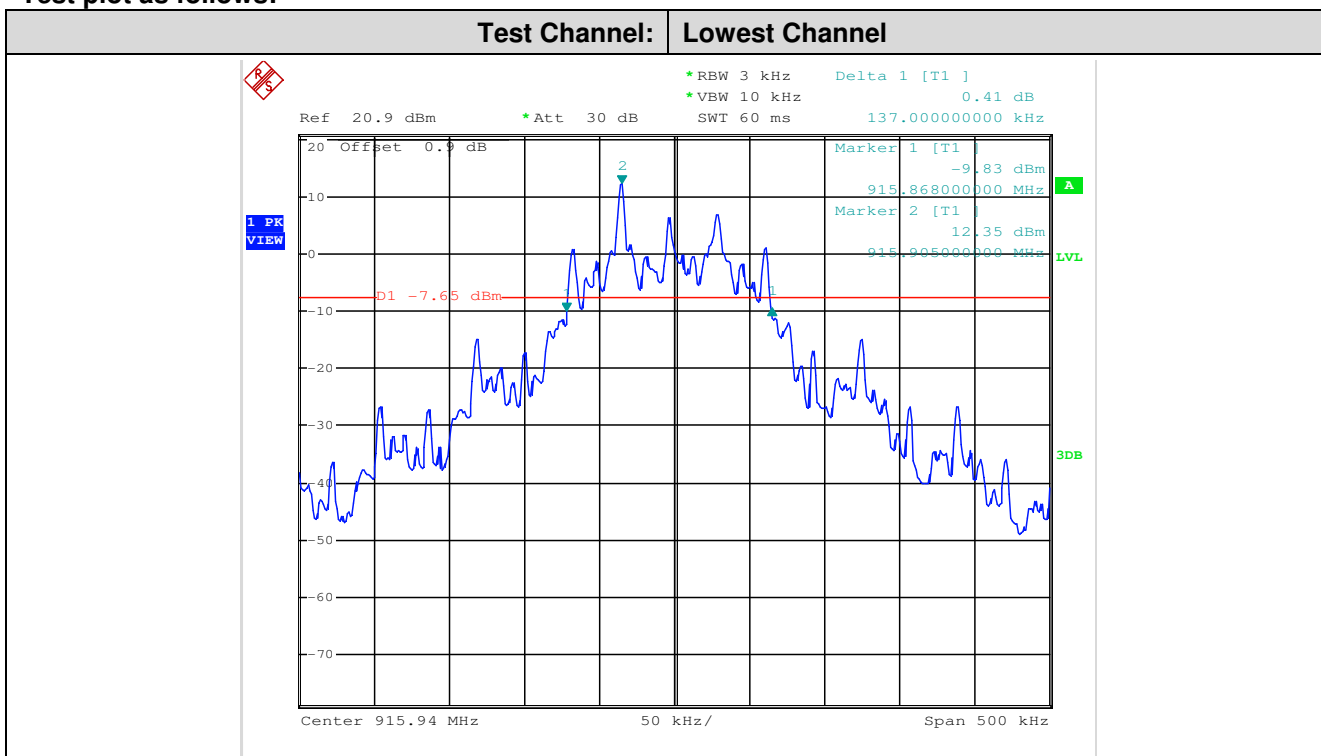





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 17 of 46

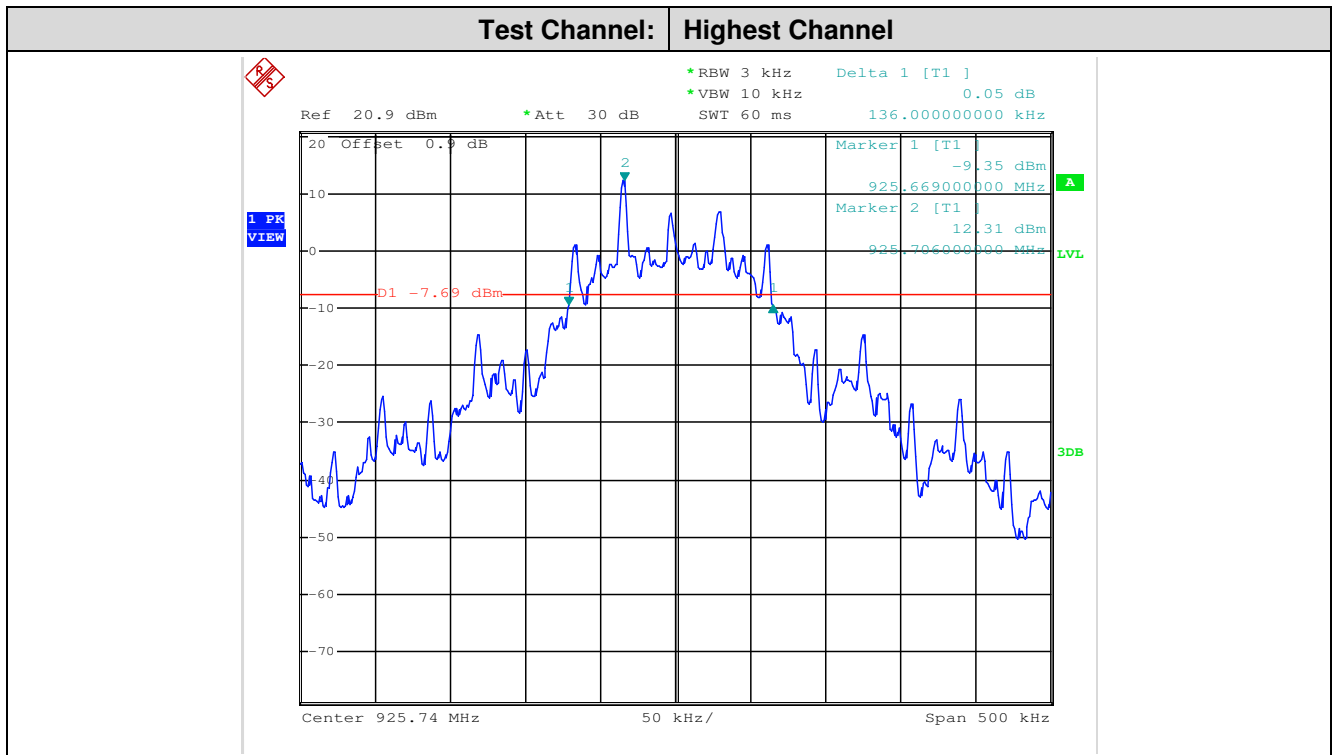

6.4 Carrier Frequencies Separation

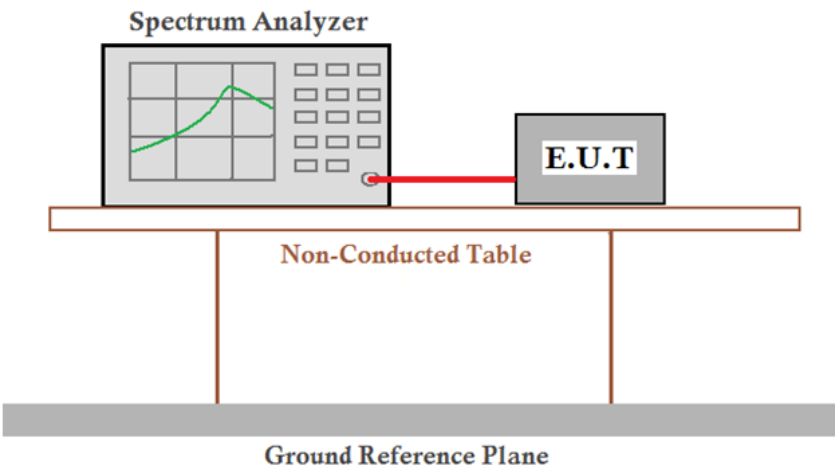Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.2
Test Setup:	
Limit:	Minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater
Test Mode:	Hopping transmitting with modulation.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data:

Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	200	137	Pass
Middle	200	137	Pass
Highest	200	136	Pass





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 19 of 46

Test plot as follows:

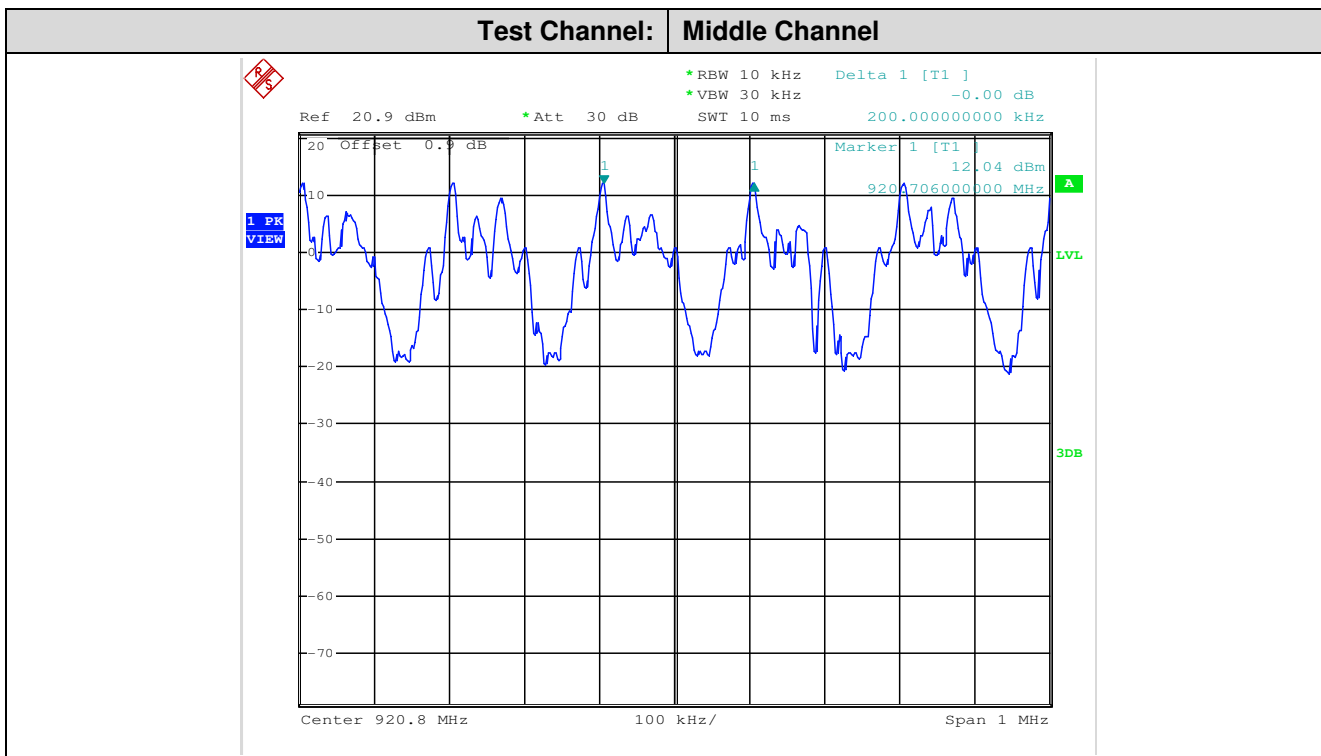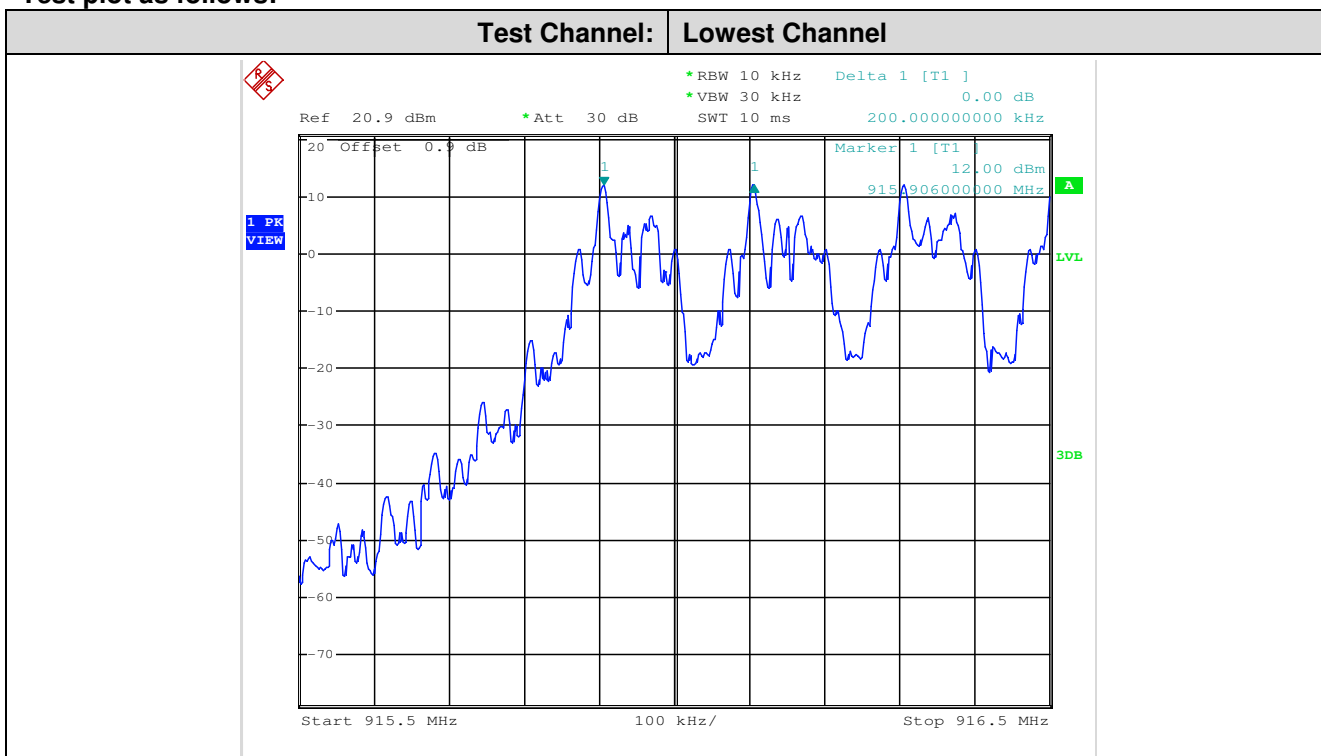




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM170200097903

Page: 20 of 46

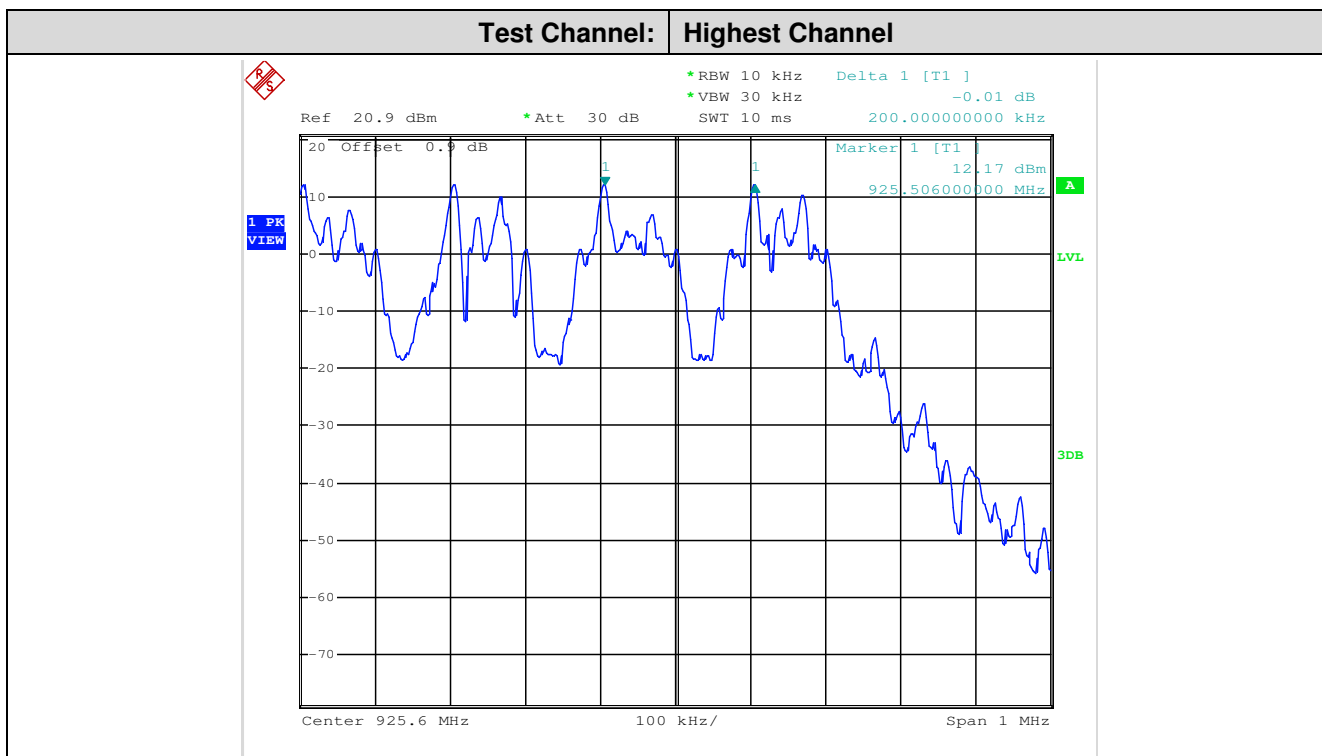



6.5 Hopping Channel Number

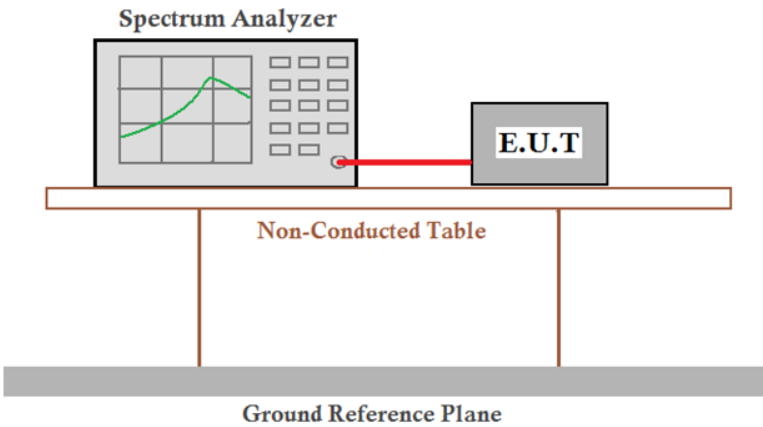
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.3
Test Setup:	
Limit:	If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies
Test Mode:	Hopping transmitting with modulation
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

Hopping channel numbers	Limit
50	≥50




Test plot as follows

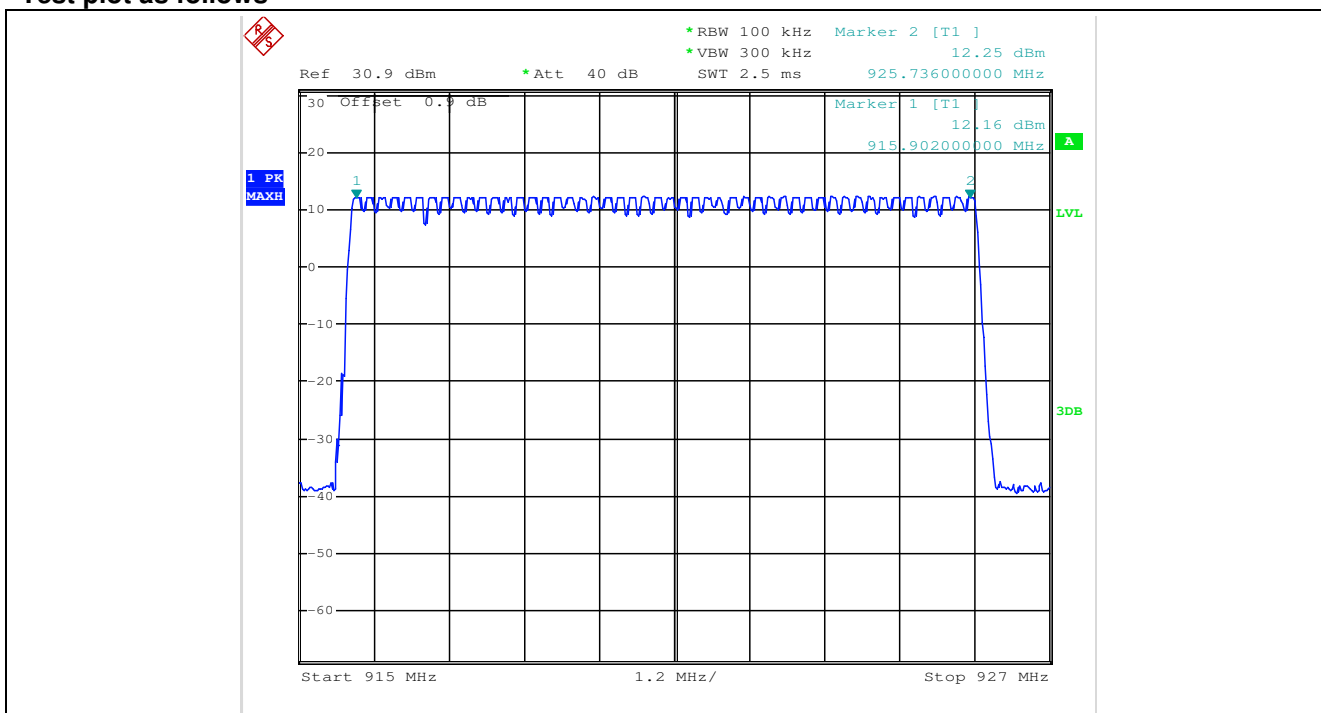



6.6 Dwell Time

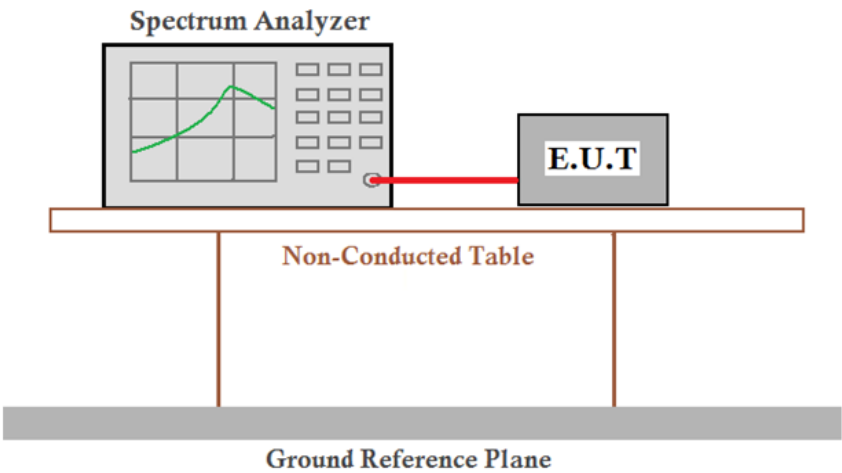Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)(i)
Test Method:	ANSI C63.10:2013 Section 7.8.4
Test Setup:	
Instruments Used:	Refer to section 5.10 for details
Test Mode:	Hopping transmitting with modulation.
Limit:	If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.
Test Results:	Pass

Measurement Data

Test Channel	Dwell time (second)	Limit (second)
Lowest	0.095	≤0.4
Middle	0.096	≤0.4
Highest	0.096	≤0.4
Remark: Dwell time = T_{ON} (ms) * total times		




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 24 of 46

Test plot as follows:

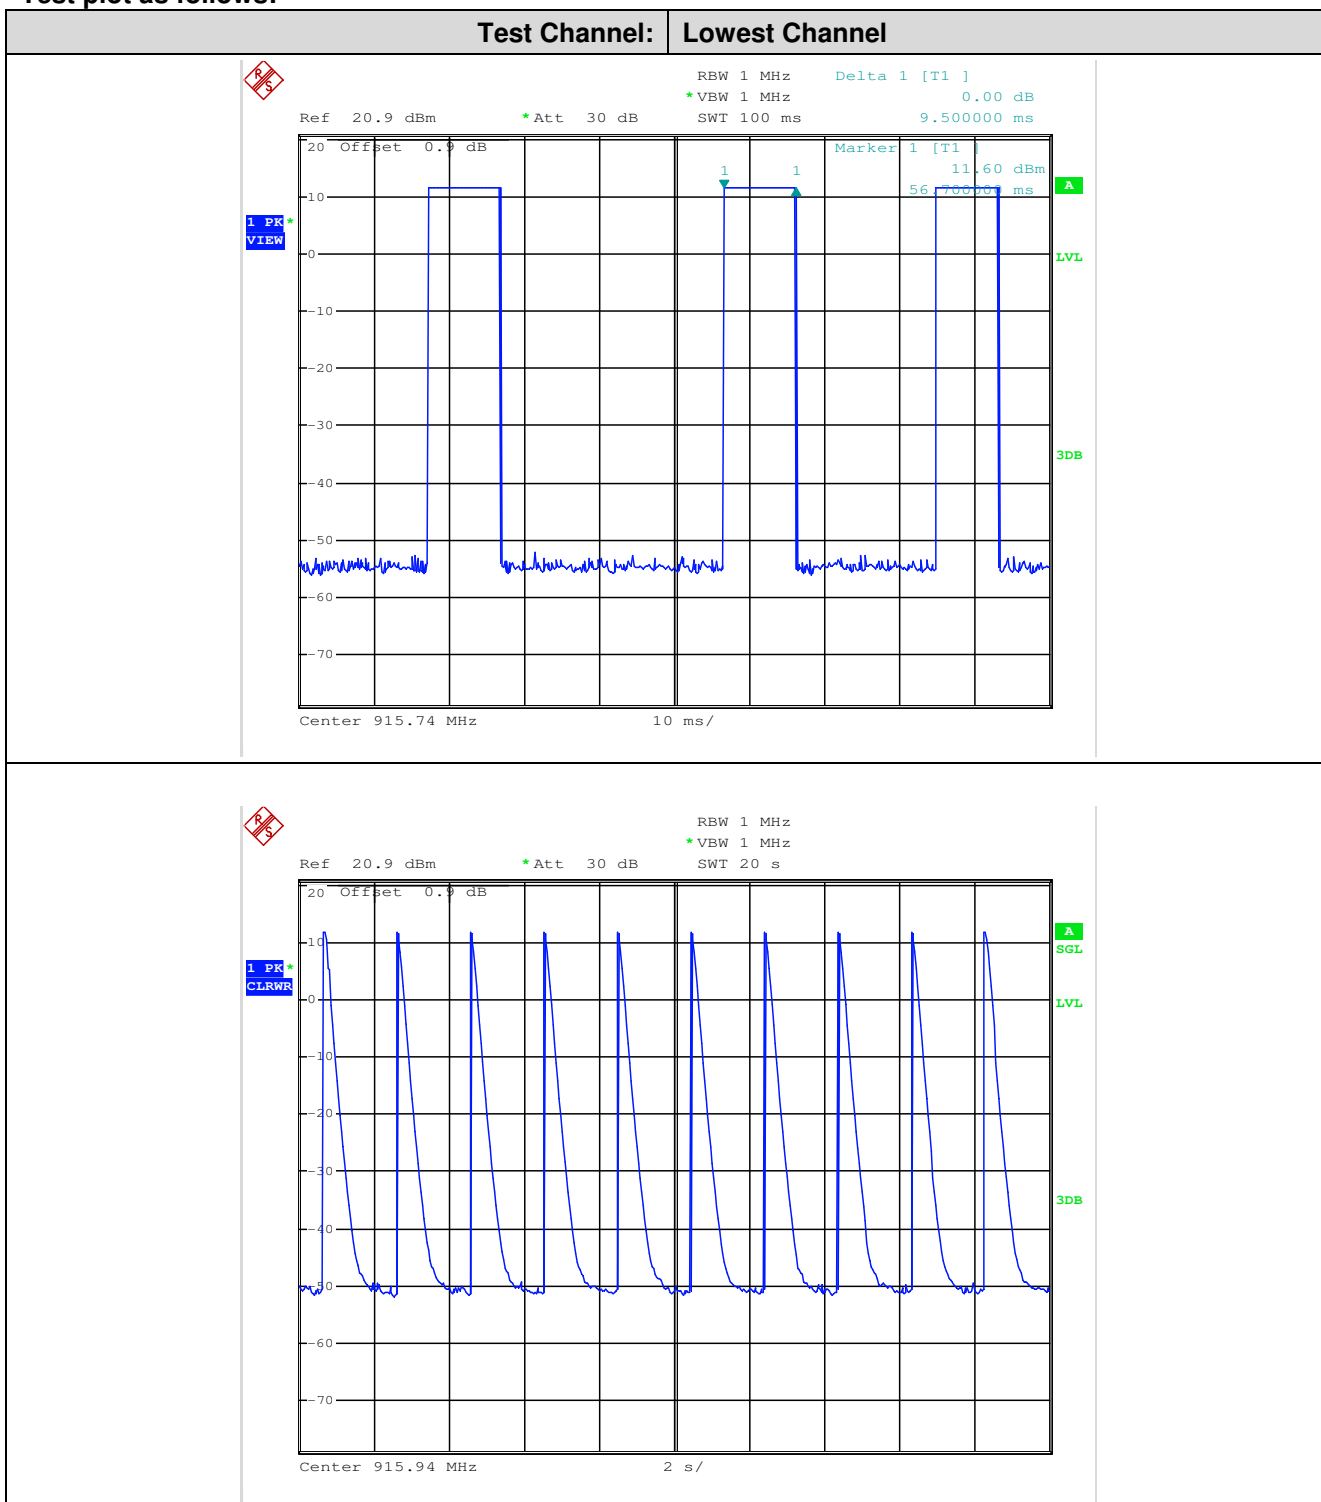




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 25 of 46

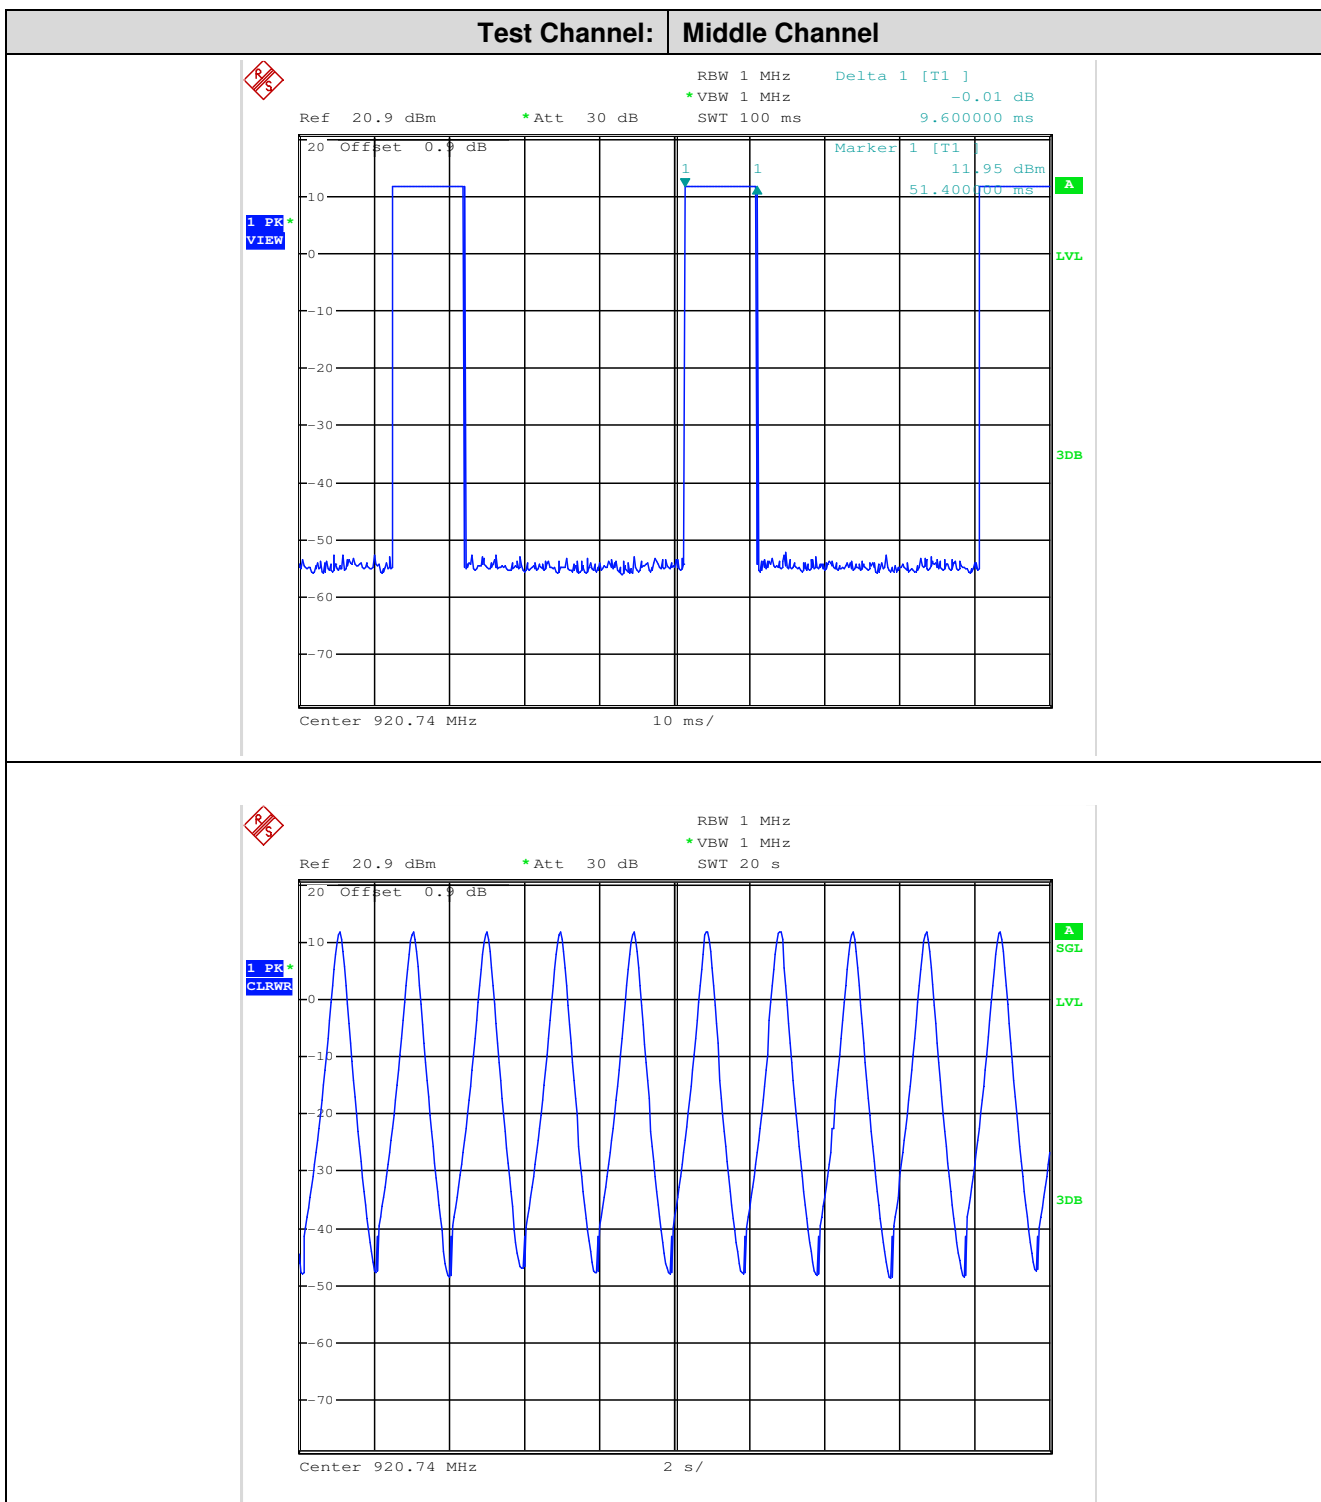




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM170200097903

Page: 26 of 46

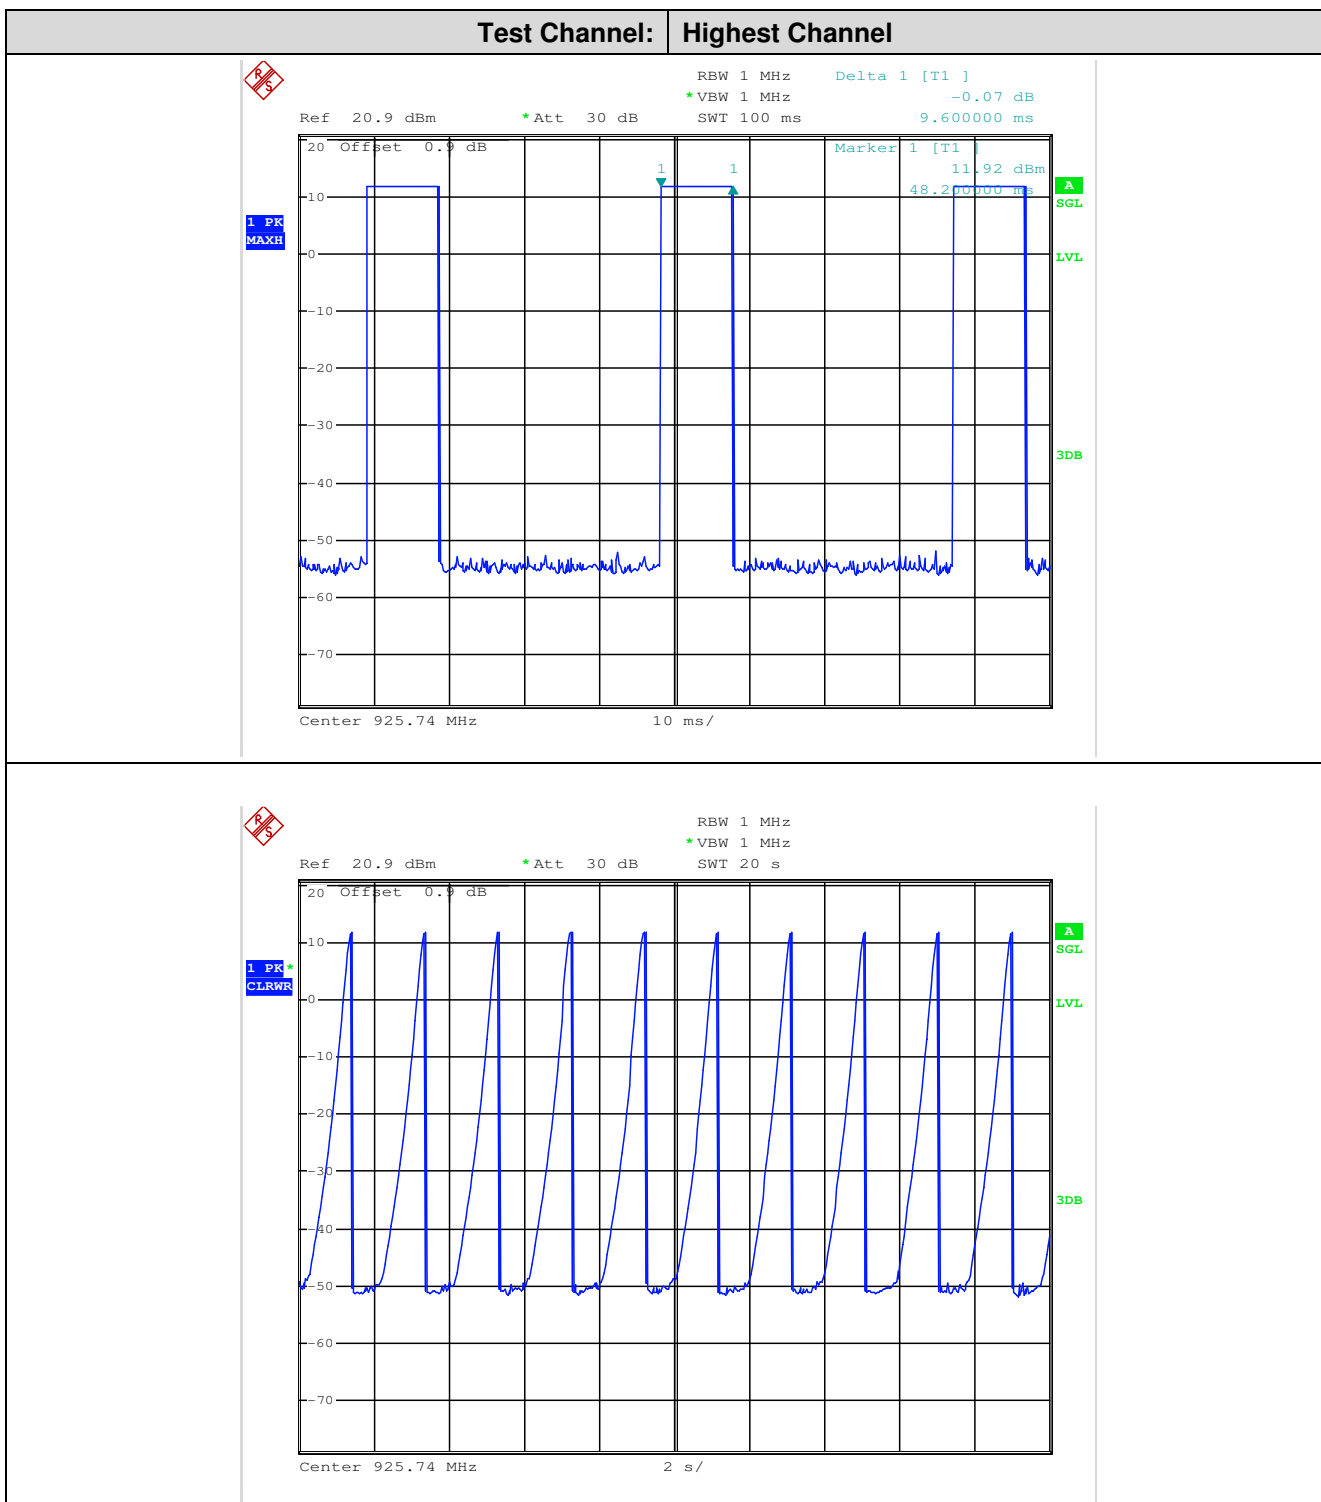



6.7 Band-edge for RF Conducted Emissions

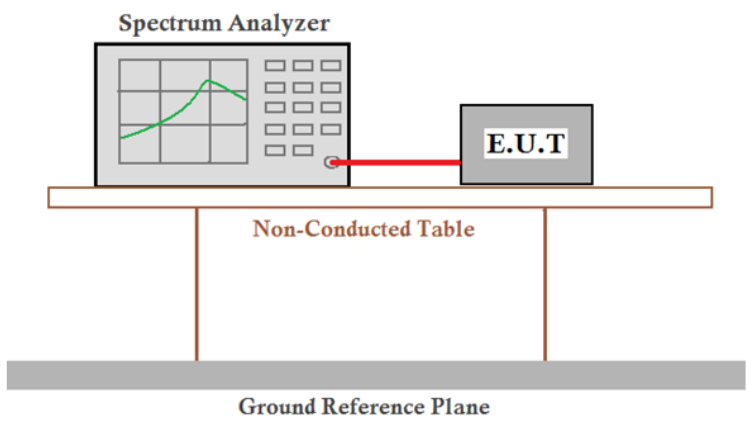Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 Section 7.8.6
Test Setup:	 The diagram illustrates the test setup for RF conducted emissions. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB
Test Mode:	Non-hopping transmitting with modulation. And Hopping transmitting with modulation
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 28 of 46

Test plot as follows:

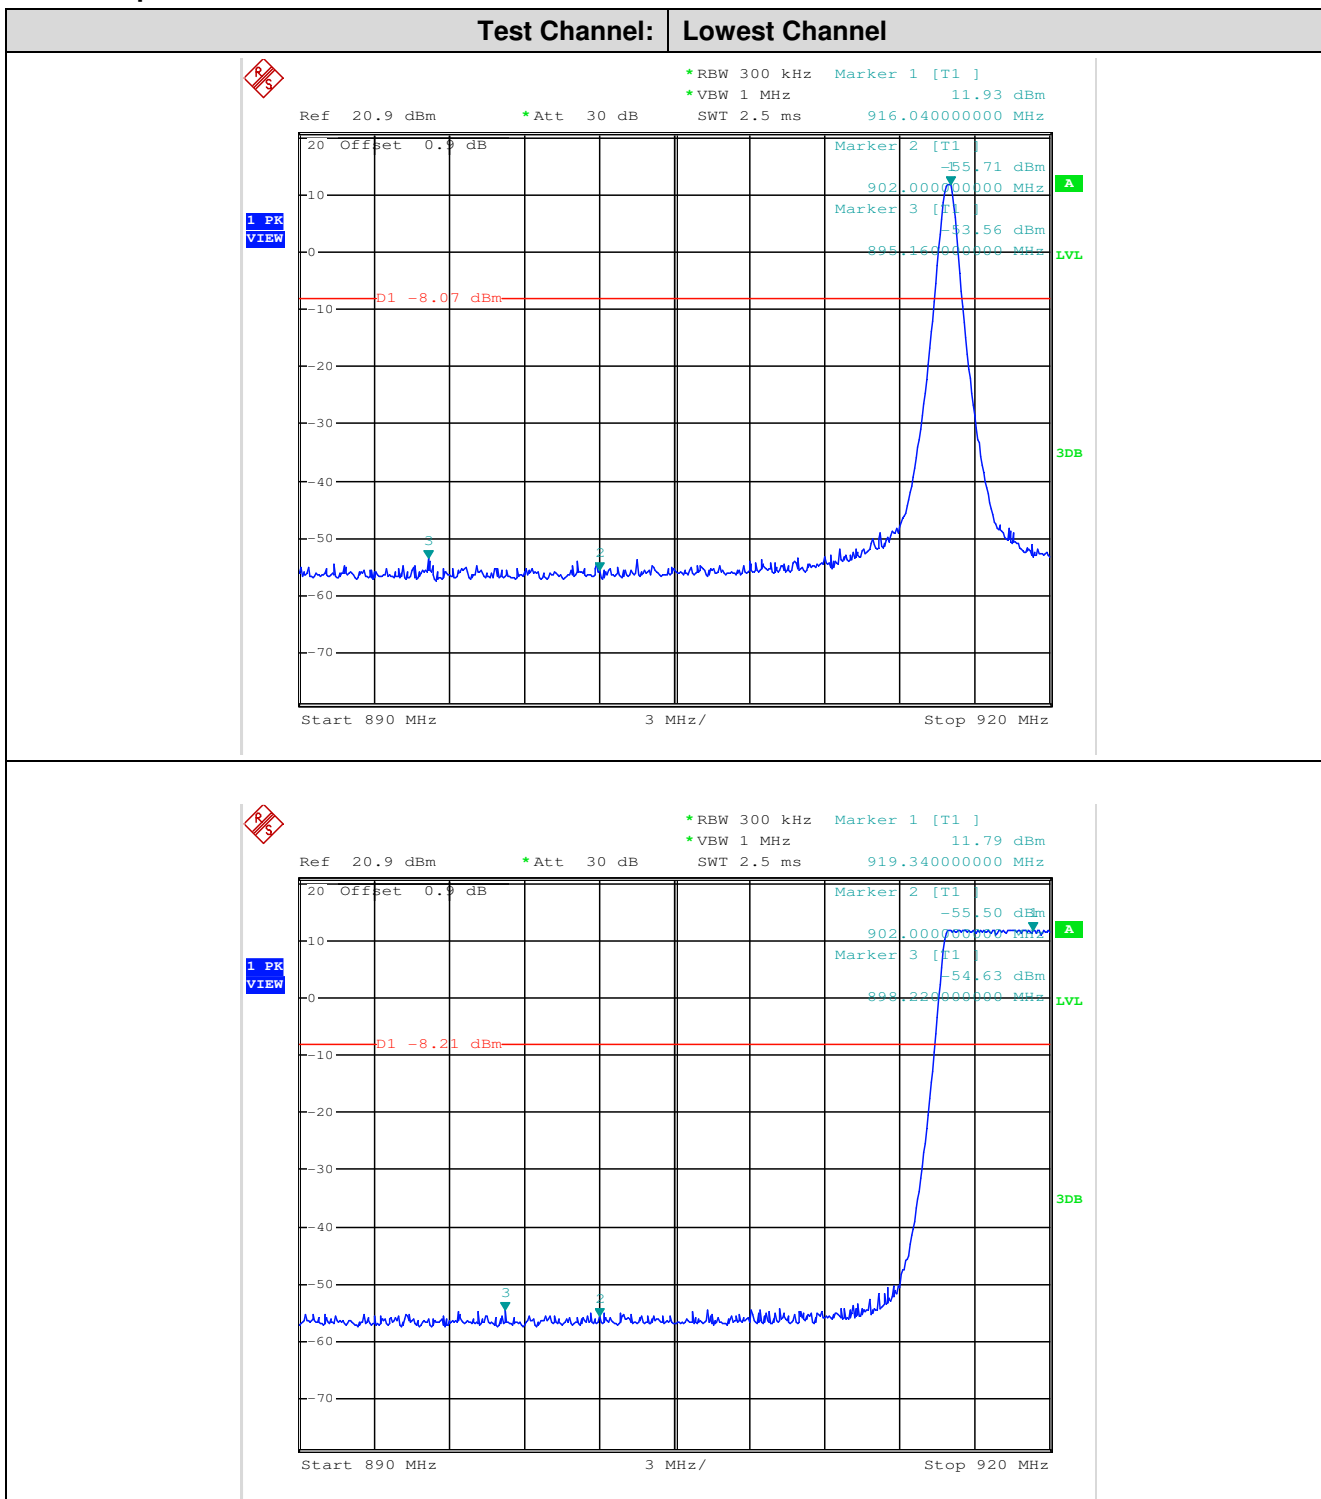




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM170200097903

Page: 29 of 46

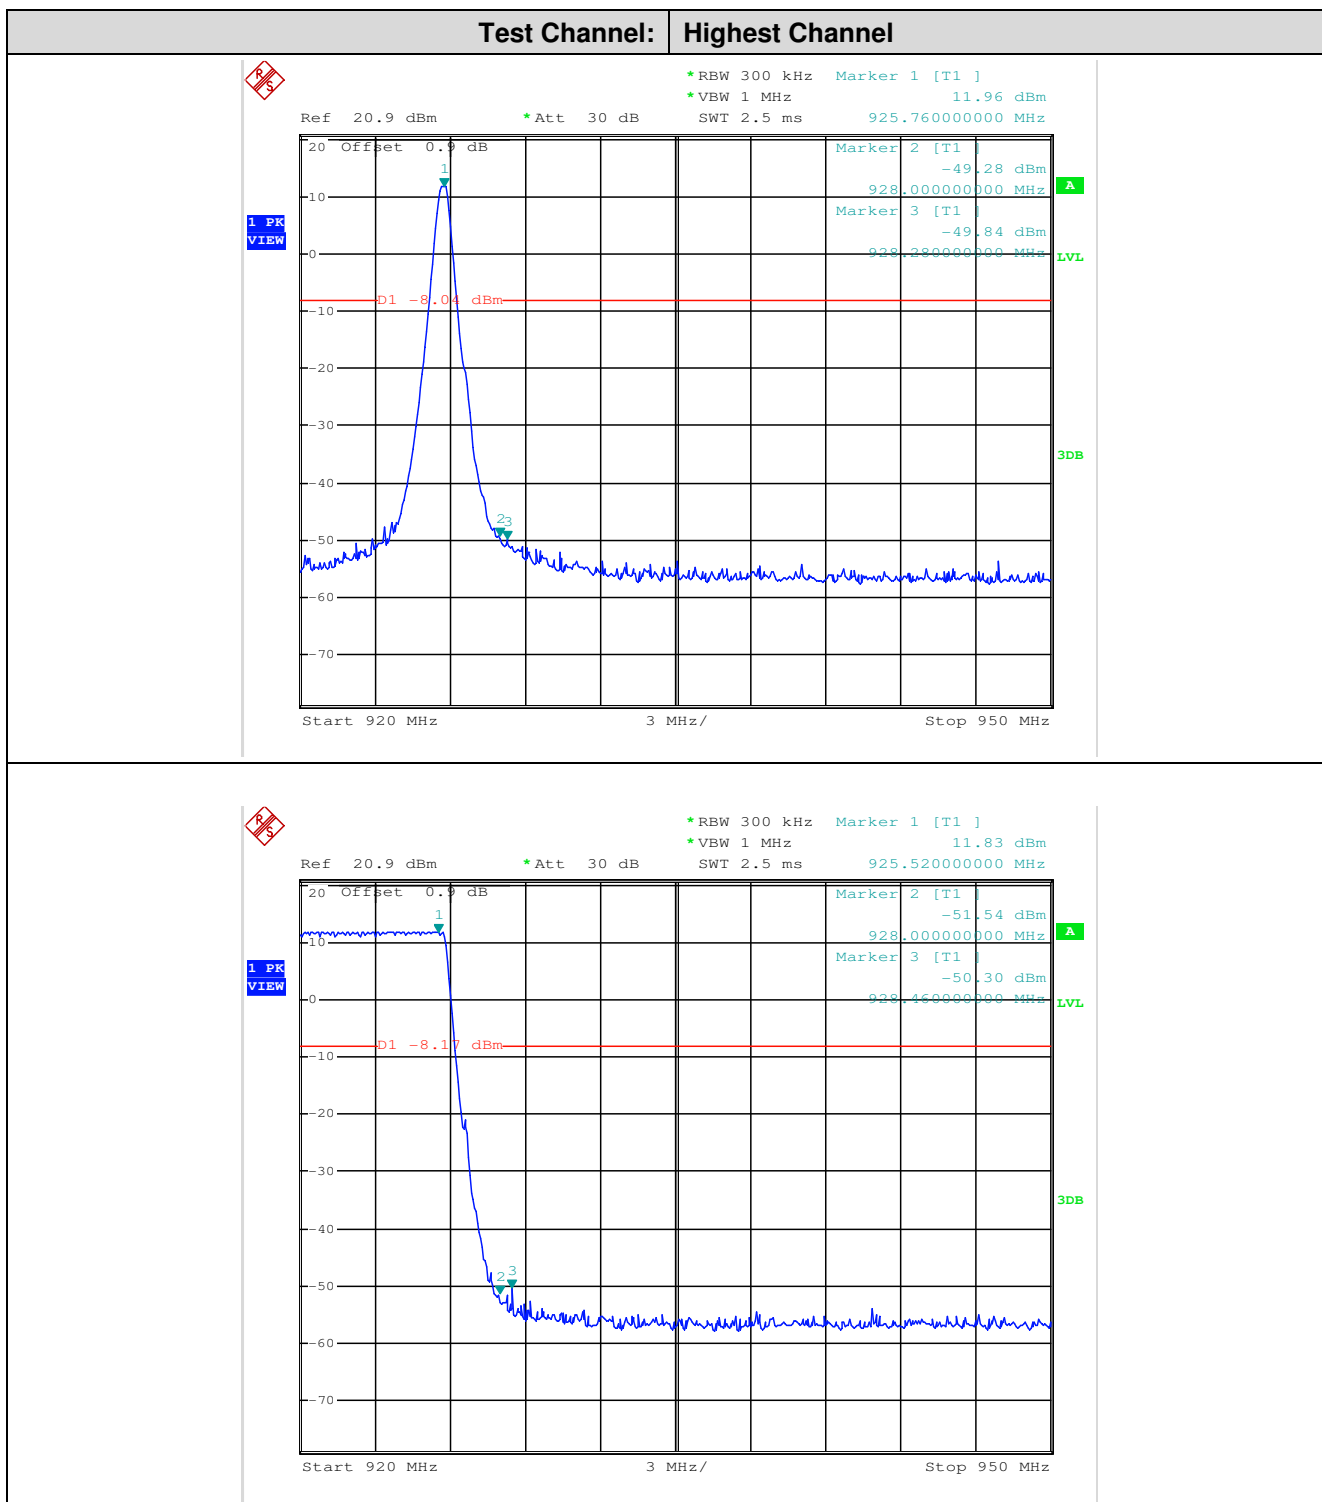



6.8 Spurious RF Conducted Emissions

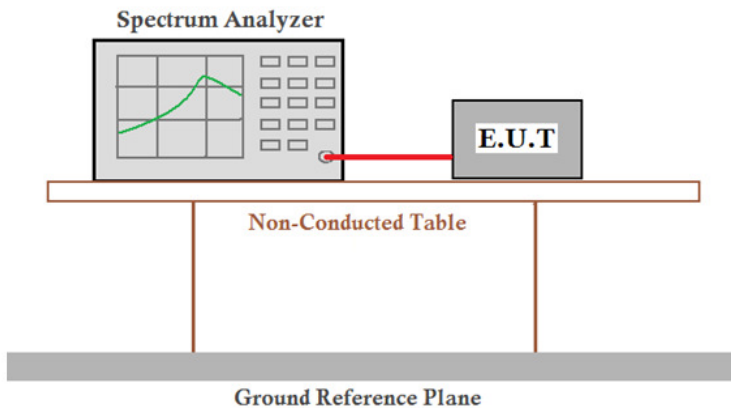Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 Section 7.8.8
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB
Test Mode:	Non-hopping transmitting with modulation.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 31 of 46

Test plot as follows:

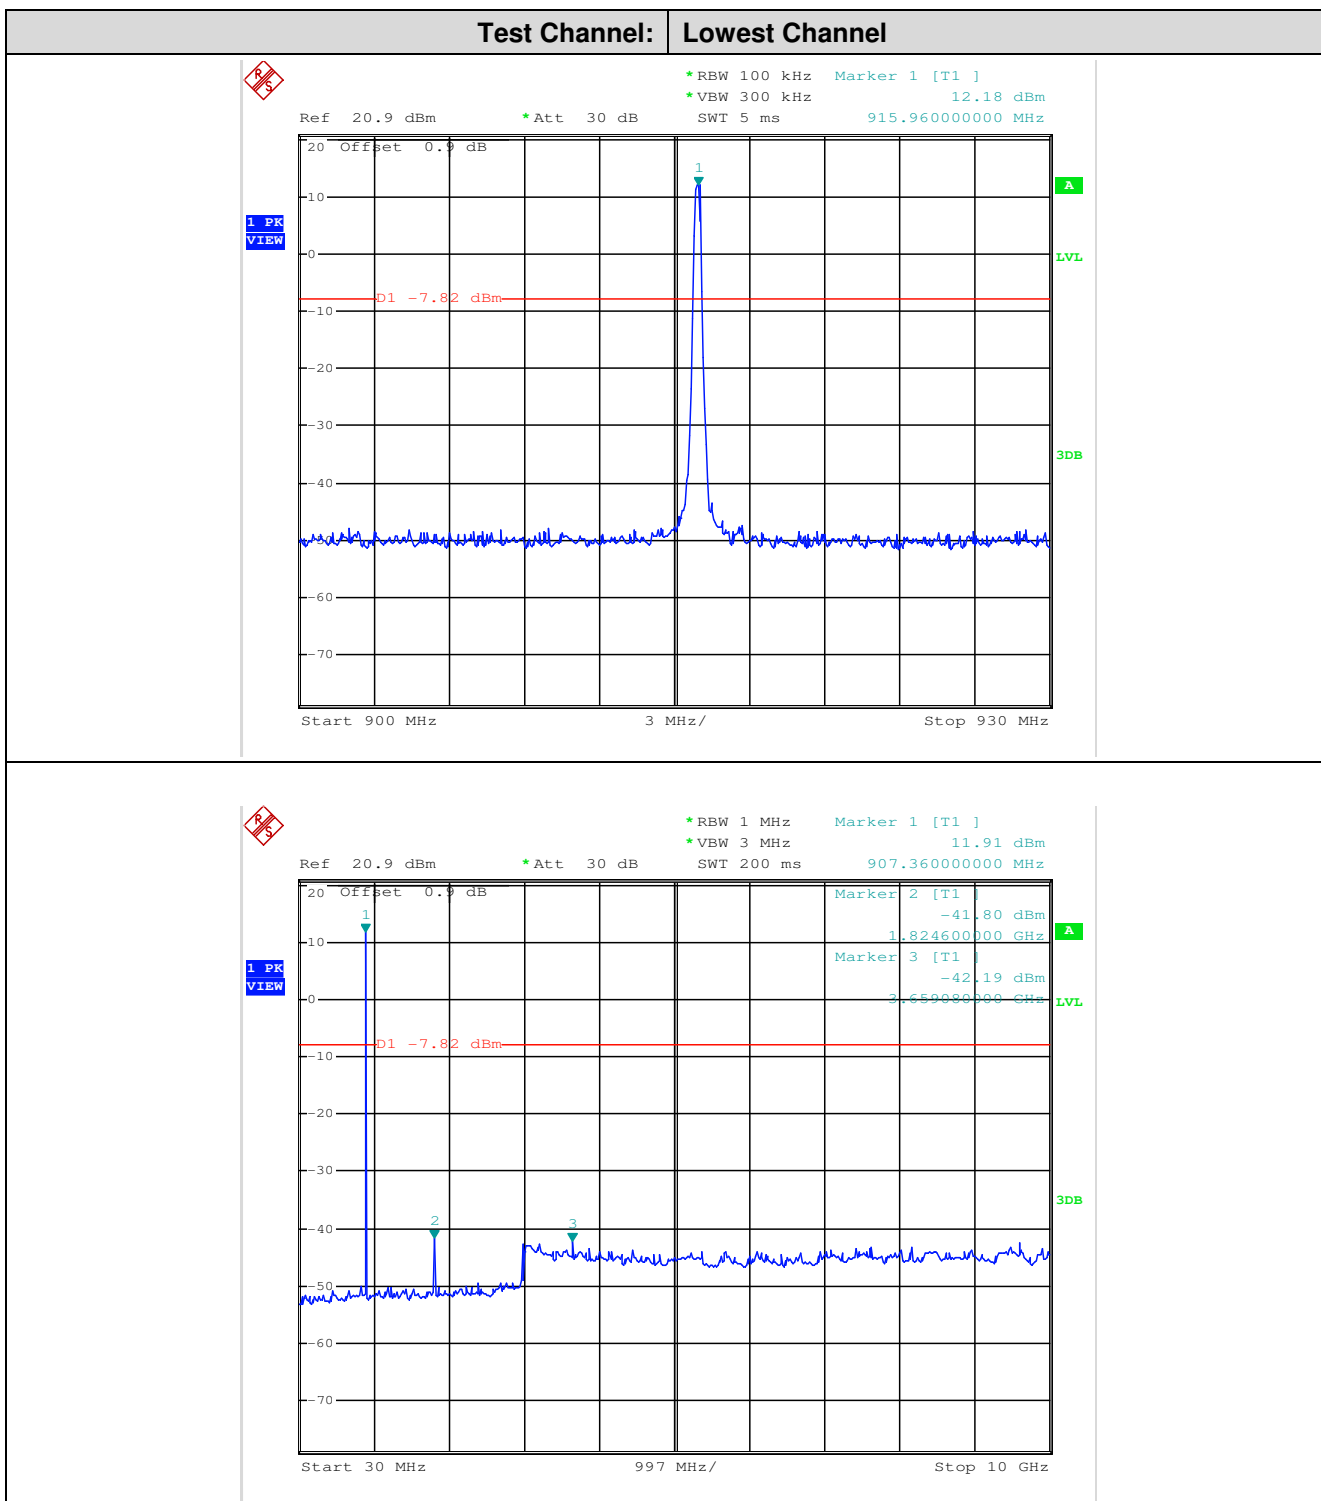




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 32 of 46

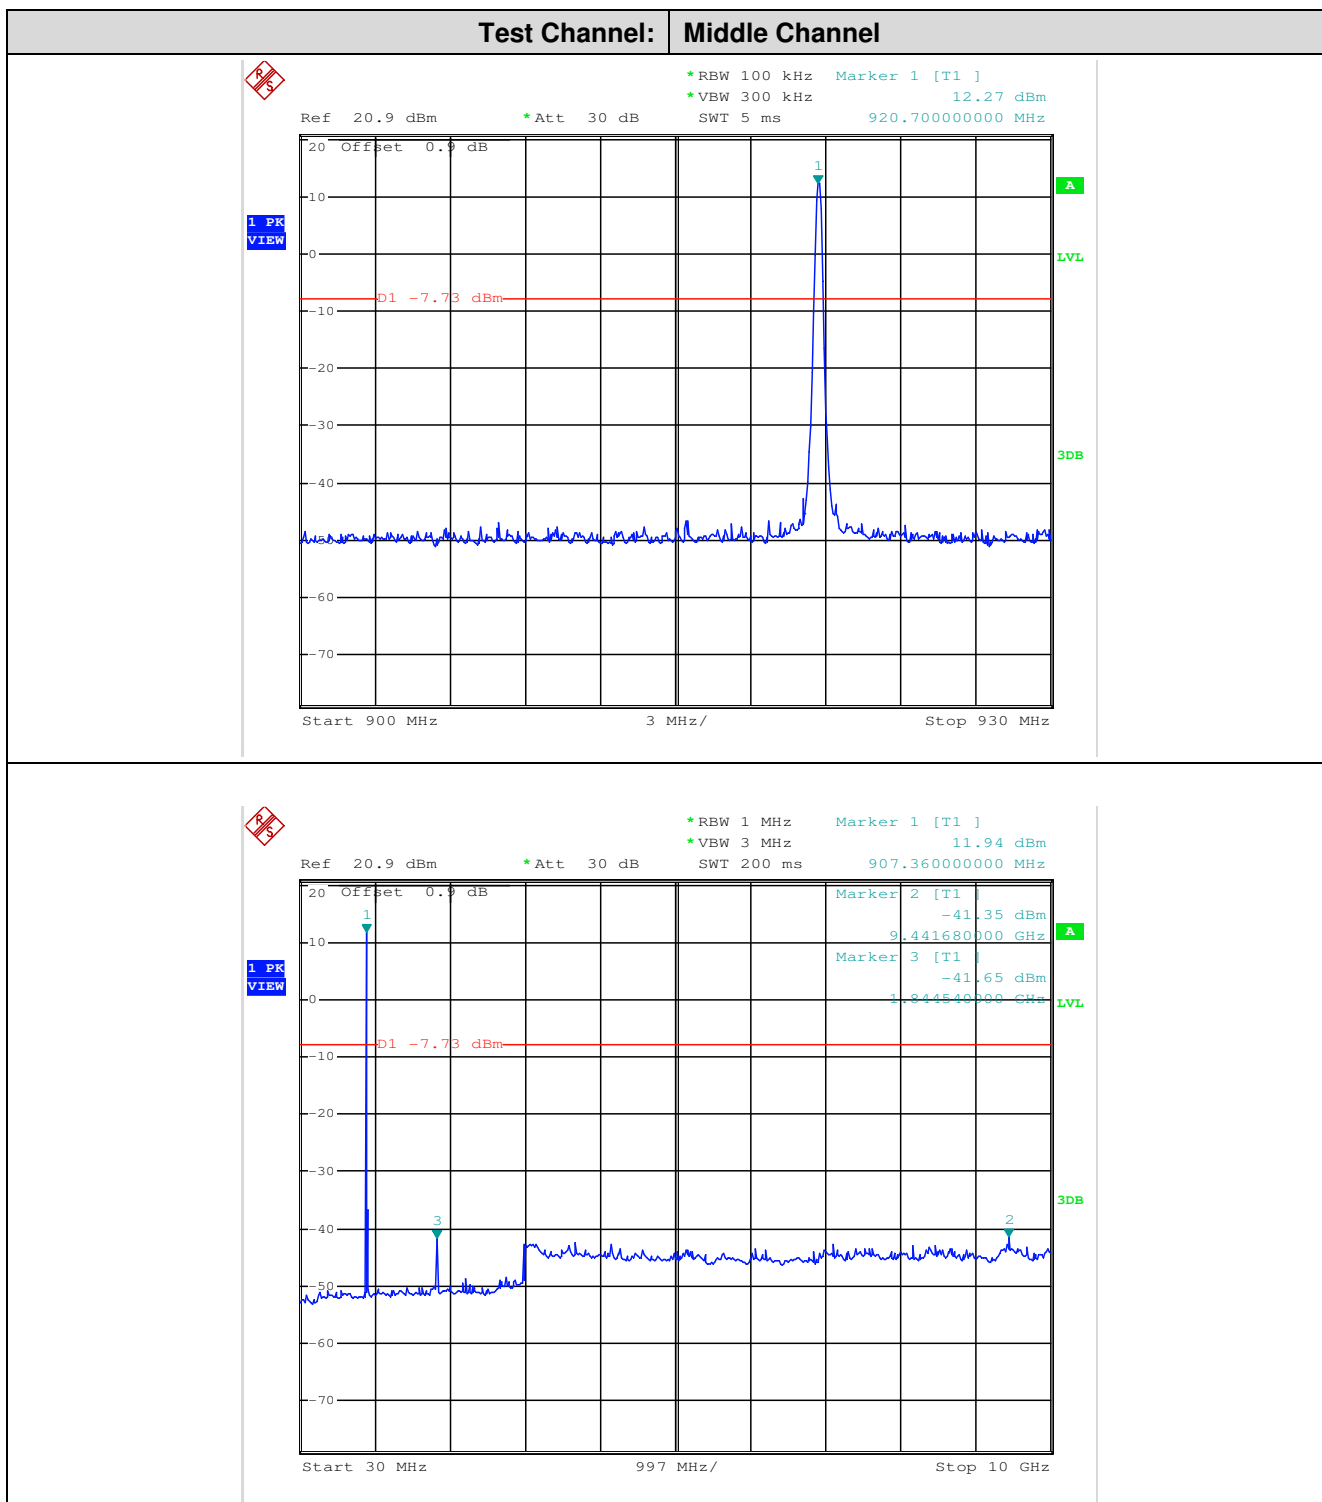




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 33 of 46

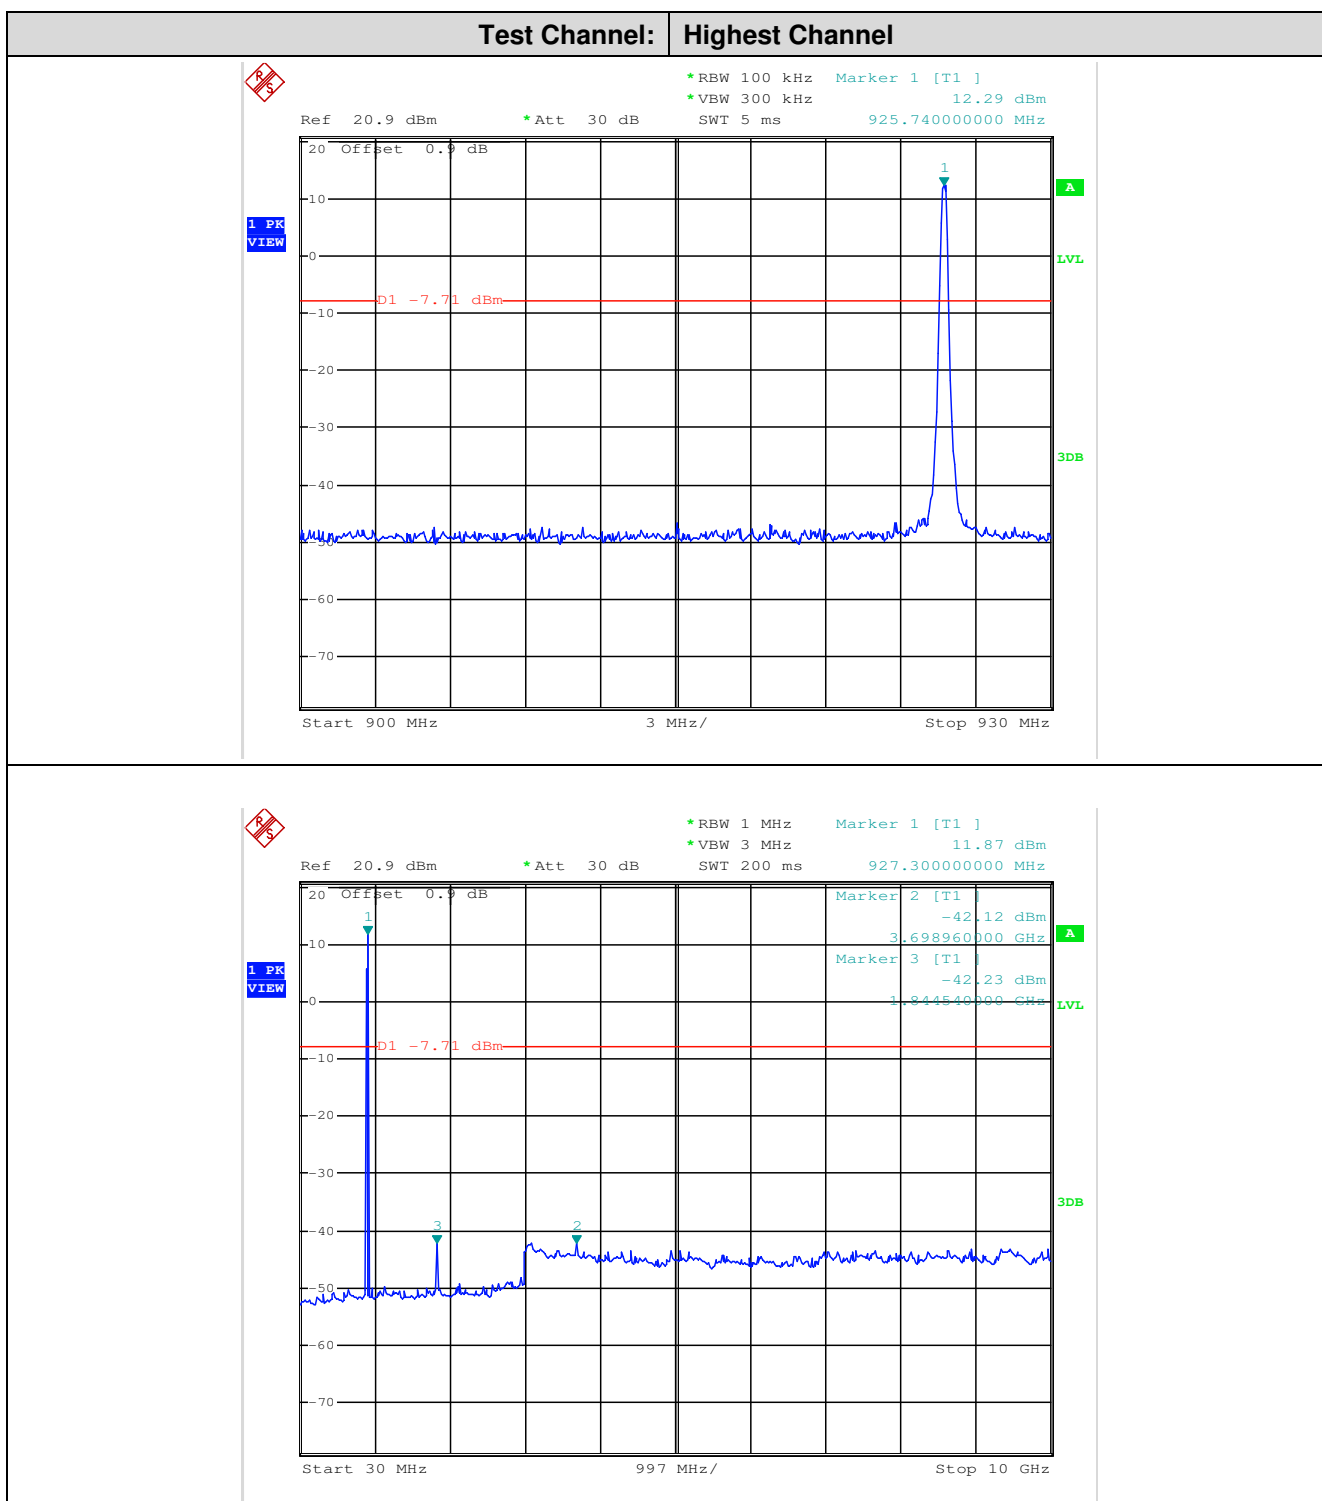

Remark:

Use 100kHz RBW to determine the relative limit in the band 900MHz to 930MHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz. The sweep points set to 30001.



6.9 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

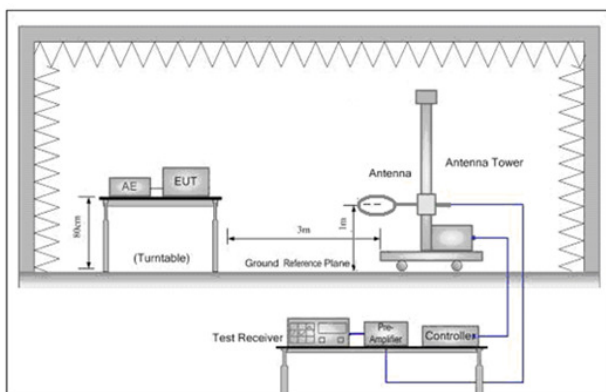


Figure 1. Below 30MHz

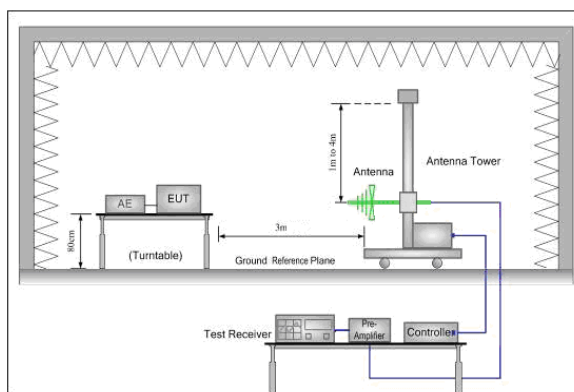


Figure 2. 30MHz to 1GHz

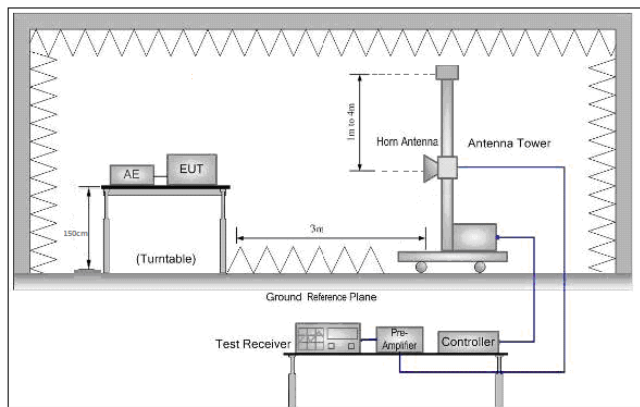


Figure 3. Above 1 GHz

Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903


Page: 36 of 46

	EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. h. Test the EUT in the lowest channel, the middle channel and the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting with modulation. For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



6.9.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

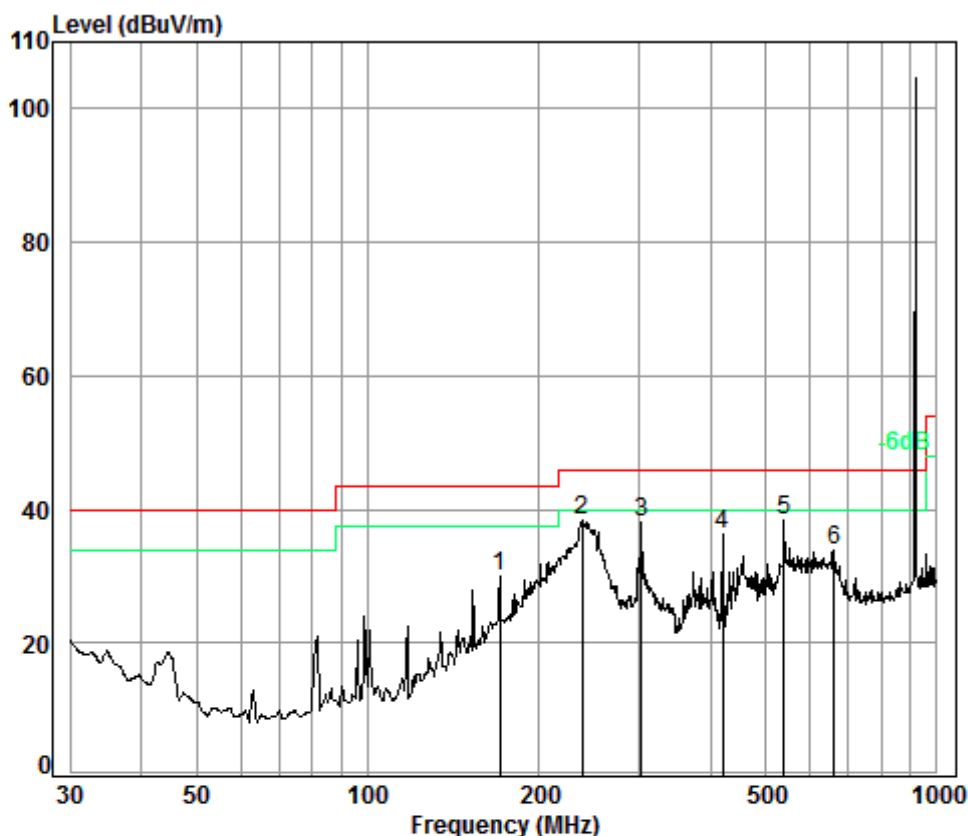

Condition: 3m VERTICAL

Job No. : 979CR

Test mode: TX mode

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	170.79	1.35	9.53	26.81	45.97	30.04	43.50	-13.46
2	238.31	1.62	11.93	26.57	51.42	38.40	46.00	-7.60
3	302.48	1.91	13.99	26.42	48.45	37.93	46.00	-8.07
4	420.58	2.29	16.38	27.25	44.77	36.19	46.00	-9.81
5 pp	539.48	2.64	18.73	27.63	44.68	38.42	46.00	-7.58
6	661.15	2.83	20.96	27.46	37.66	33.99	46.00	-12.01




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903

Page: 38 of 46

Test mode:	Transmitting	Horizontal
------------	--------------	------------

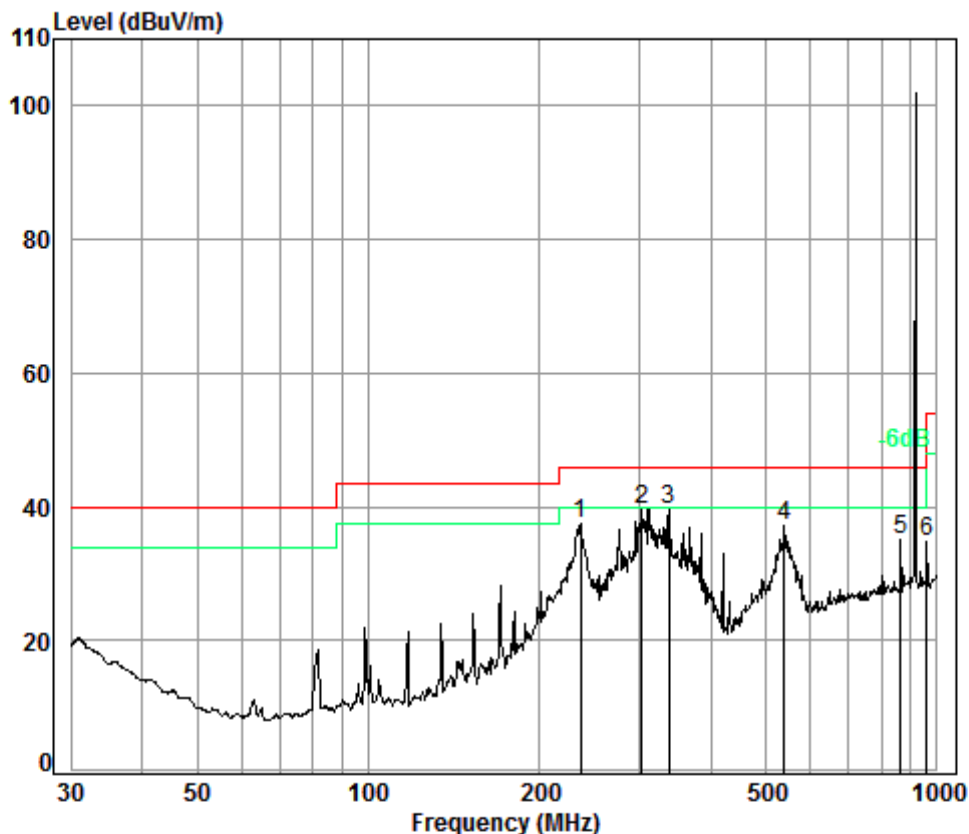

Condition: 3m HORIZONTAL

Job No. : 979CR

Test mode: TX mode

		Cable	Ant	Preamp	Read	Limit	Over
	Freq	Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	236.64	1.61	11.87	26.58	50.58	37.48	46.00 -8.52
2	pp 302.48	1.91	13.99	26.42	50.08	39.56	46.00 -6.44
3	337.22	2.02	14.36	26.68	49.72	39.42	46.00 -6.58
4	539.48	2.64	18.73	27.63	43.32	37.06	46.00 -8.94
5	863.06	3.46	22.71	26.96	35.88	35.09	46.00 -10.91
6	958.79	3.66	23.30	26.51	34.30	34.75	46.00 -11.25



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170200097903

Page: 39 of 46

6.9.2 Transmitter Emission above 1GHz

Test channel:		Lowest			Detector:		Peak	
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1333.521	25.10	4.26	38.07	49.14	40.43	74.00	-33.57	Vertical
1831.000	27.19	4.84	38.02	44.11	38.12	74.00	-35.88	Vertical
2746.500	30.38	5.68	37.93	44.76	42.89	74.00	-31.11	Vertical
3662.000	32.67	6.44	37.97	50.40	51.54	74.00	-22.46	Vertical
5508.077	34.41	8.26	38.40	45.14	49.41	74.00	-24.59	Vertical
9354.057	37.24	10.87	35.22	40.56	53.45	74.00	-20.55	Vertical
1333.521	25.10	4.26	38.07	44.08	35.37	74.00	-38.63	Horizontal
1831.000	27.19	4.84	38.02	45.31	39.32	74.00	-34.68	Horizontal
2746.500	30.38	5.68	37.93	42.77	40.90	74.00	-33.10	Horizontal
3662.000	32.67	6.44	37.97	46.03	47.17	74.00	-26.83	Horizontal
5236.004	34.45	8.12	38.45	45.51	49.63	74.00	-24.37	Horizontal
7943.282	36.57	10.02	36.45	43.10	53.24	74.00	-20.76	Horizontal

Test channel:		Middle			Detector:		Peak	
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1333.521	25.10	4.26	38.07	48.01	39.30	74.00	-34.70	Vertical
1841.000	27.22	4.85	38.02	44.20	38.25	74.00	-35.75	Vertical
2761.500	30.44	5.70	37.92	43.74	41.96	74.00	-32.04	Vertical
3682.000	32.73	6.45	37.97	47.64	48.85	74.00	-25.15	Vertical
4977.371	34.46	7.97	38.49	45.51	49.45	74.00	-24.55	Vertical
7888.601	36.53	10.00	36.50	43.20	53.23	74.00	-20.77	Vertical
1333.521	25.10	4.26	38.07	46.86	38.15	74.00	-35.85	Horizontal
1841.000	27.22	4.85	38.02	43.94	37.99	74.00	-36.01	Horizontal
2761.500	30.44	5.70	37.92	42.91	41.13	74.00	-32.87	Horizontal
3682.000	32.73	6.45	37.97	46.11	47.32	74.00	-26.68	Horizontal
5223.962	34.45	8.11	38.46	46.15	50.25	74.00	-23.75	Horizontal
7961.593	36.58	10.03	36.43	42.55	52.73	74.00	-21.27	Horizontal



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903

Page: 40 of 46

Test channel:		Highest			Detector:		Peak	
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1333.521	25.10	4.26	38.07	49.91	41.20	74.00	-32.80	Vertical
1851.480	27.26	4.86	38.01	43.60	37.71	74.00	-36.29	Vertical
2777.220	30.49	5.71	37.92	43.95	42.23	74.00	-31.77	Vertical
3702.960	32.79	6.47	37.97	48.05	49.34	74.00	-24.66	Vertical
5223.962	34.45	8.11	38.46	45.00	49.10	74.00	-24.90	Vertical
7906.786	36.55	10.01	36.48	42.89	52.97	74.00	-21.03	Vertical
1345.860	25.16	4.28	38.07	45.44	36.81	74.00	-37.19	Horizontal
1851.480	27.26	4.86	38.01	43.63	37.74	74.00	-36.26	Horizontal
2777.220	30.49	5.71	37.92	43.71	41.99	74.00	-32.01	Horizontal
3702.960	32.79	6.47	37.97	45.88	47.17	74.00	-26.83	Horizontal
5701.643	34.52	8.46	38.36	44.67	49.29	74.00	-24.71	Horizontal
8953.647	36.55	10.65	35.45	41.79	53.54	74.00	-20.46	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 10GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. Since the peak level is even lower than the average limit, only the peak measurements were shown in the report.

6.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013		
Test Site:	Measurement Distance: 3m		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

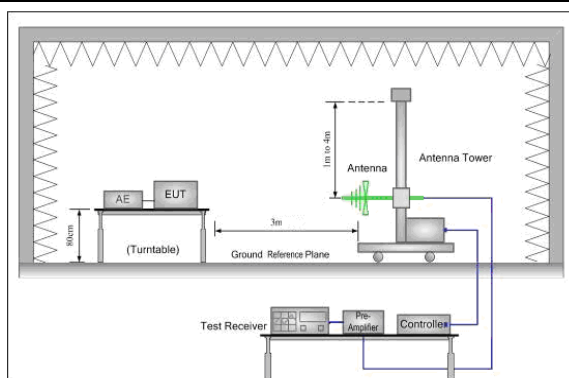


Figure 1. 30MHz to 1GHz

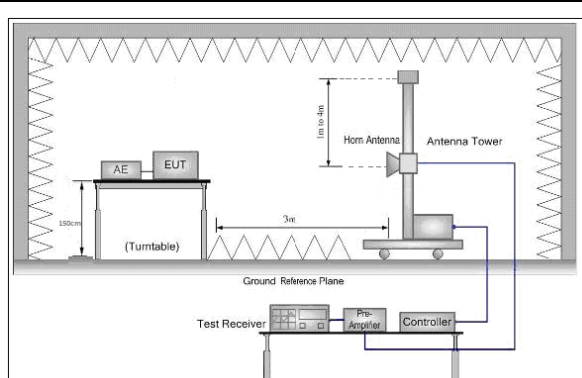


Figure 2. Above 1 GHz



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903

Page: 42 of 46

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting with modulation.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903

Page: 43 of 46

Test plot as follows:

Test channel:	Lowest channel	Remark:	Peak	Vertical
---------------	----------------	---------	------	----------

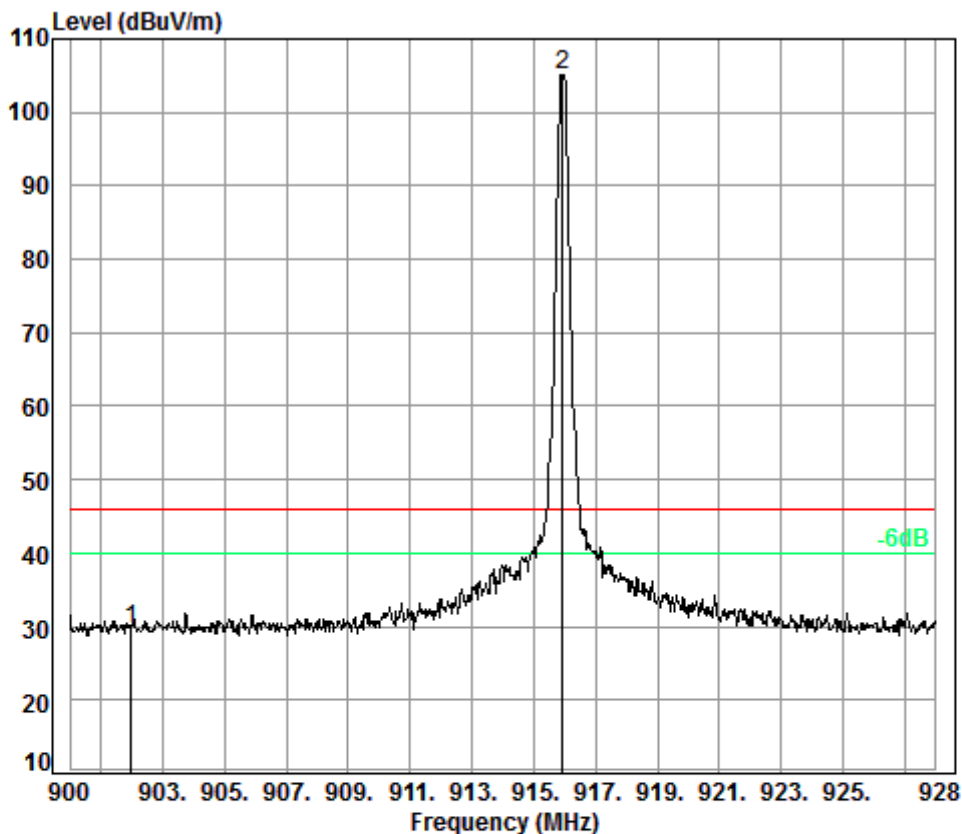

Condition: 3m VERTICAL

Job No. : 979CR

Test mode: L Band edge

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	902.00	3.60	23.21	26.75	29.65	29.71	46.00	-16.29
2 pp	915.93	3.62	23.26	26.71	105.05	105.22	46.00	59.22




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903

Page: 44 of 46

Test channel:	Lowest channel	Remark:	Peak	Horizontal
---------------	----------------	---------	------	------------

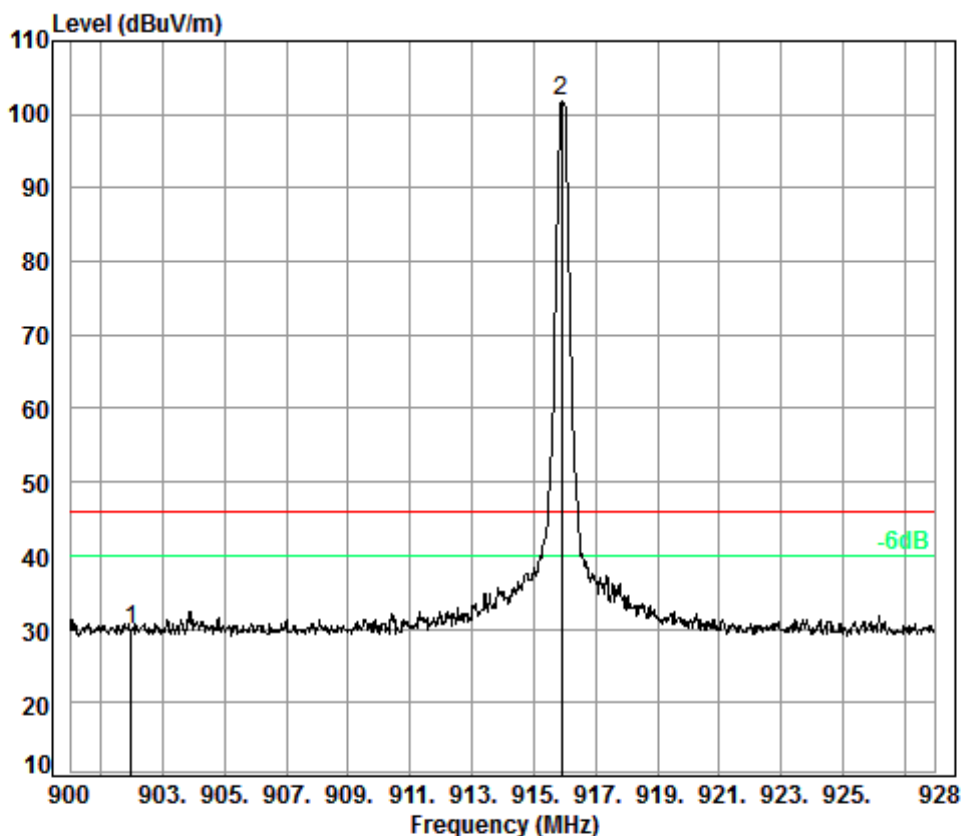

Condition: 3m HORIZONTAL

Job No. : 979CR

Test mode: L Band edge

		Cable	Ant	Preamp	Read	Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1	902.00	3.60	23.21	26.75	29.86	29.92	46.00
2 pp	915.90	3.62	23.26	26.71	101.56	101.73	46.00




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903

Page: 45 of 46

Test channel:	Highest Channel	Remark:	Peak	Vertical
---------------	-----------------	---------	------	----------

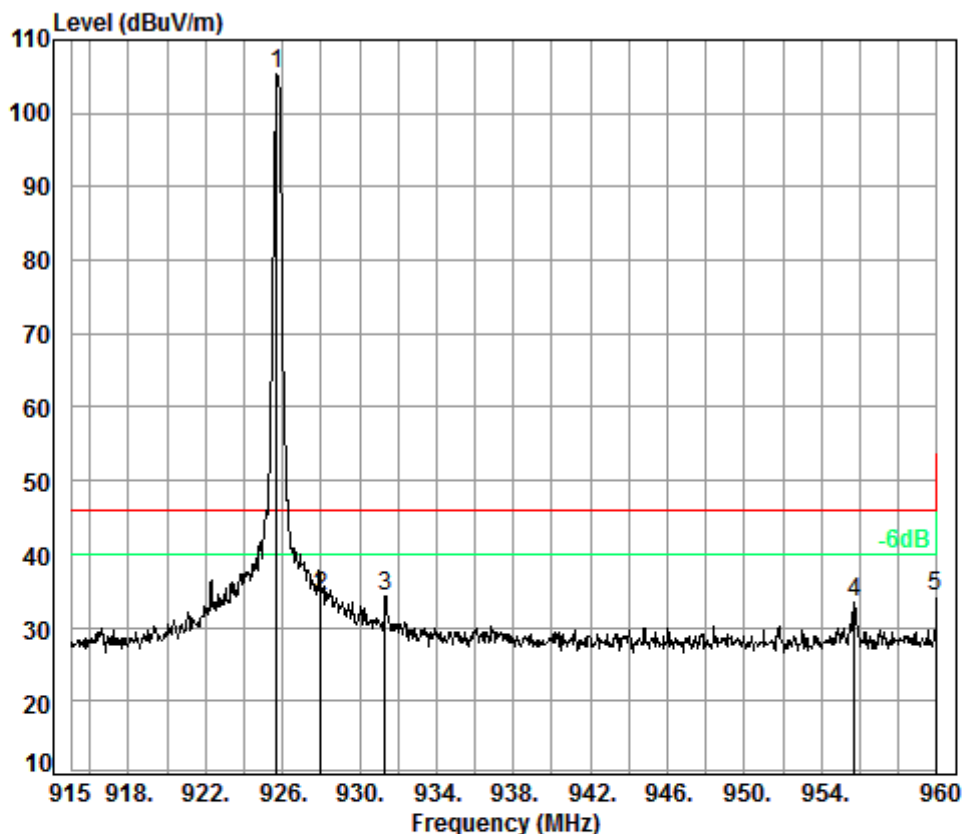

Condition: 3m VERTICAL

Job No. : 979CR

Test mode: H Band edge

		Cable	Ant	Preamp	Read	Limit	Over
	Freq	Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1 pp	925.71	3.63	23.30	26.64	105.04	105.33	59.33
2	928.00	3.63	23.30	26.64	33.90	34.19	-11.81
3	931.34	3.63	23.30	26.61	33.91	34.23	-11.77
4	955.73	3.66	23.30	26.51	32.91	33.36	-12.64
5	959.96	3.66	23.30	26.51	33.77	34.22	-11.78




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200097903

Page: 46 of 46

Test channel:	Highest Channel	Remark:	Peak	Horizontal
---------------	-----------------	---------	------	------------

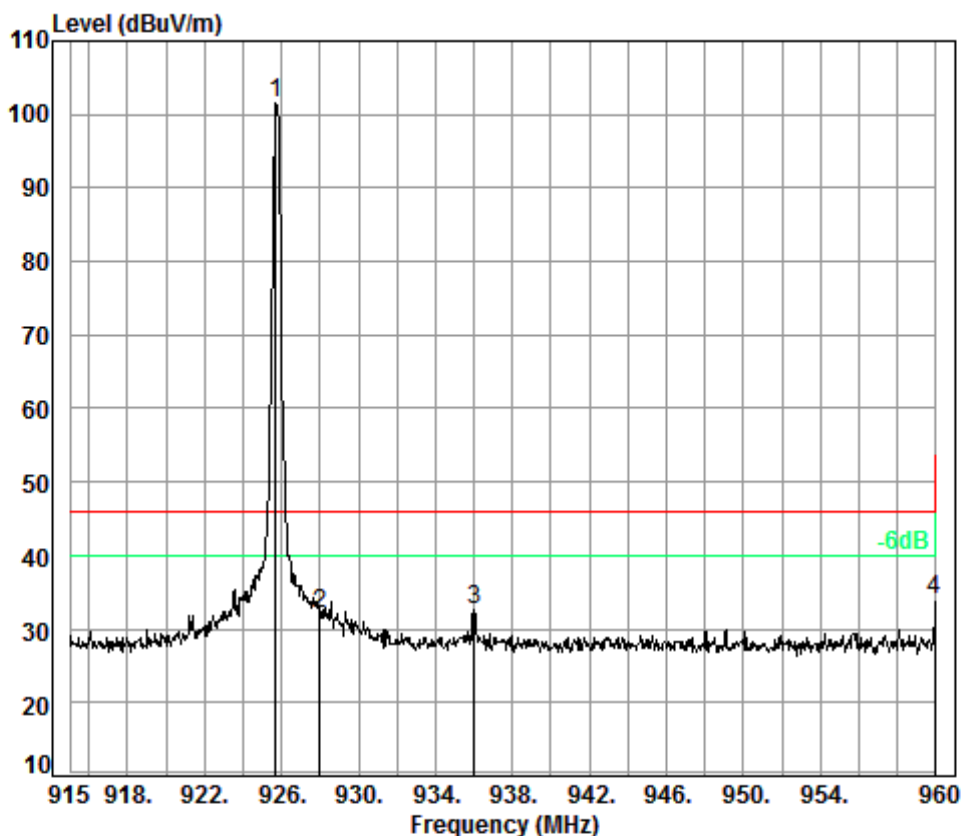

Condition: 3m HORIZONTAL

Job No. : 979CR

Test mode: H Band edge

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	925.71	3.63	23.30	26.64	101.34	101.63	46.00	55.63
2	928.00	3.63	23.30	26.64	31.78	32.07	46.00	-13.93
3	936.02	3.64	23.30	26.61	32.30	32.63	46.00	-13.37
4	959.96	3.66	23.30	26.51	33.64	34.09	46.00	-11.91

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor