

Step 3. Connecting WiFi

Open the WiFi connection settings on the mobile phone, and search the WiFi name **“G900-*****”**, enter and input password to connect (password:**12345678**).

Please Note it is open “WLAN” to connect WiFi, not “Bluetooth”.




IMPORTANT NOTES

The WiFi can not be used for scanning web

By WiFi, you can download the camera's file to your Phone.

Step 4. Operate the APP

By the APP you can download the video from the camera and you can make general settings for the Camera

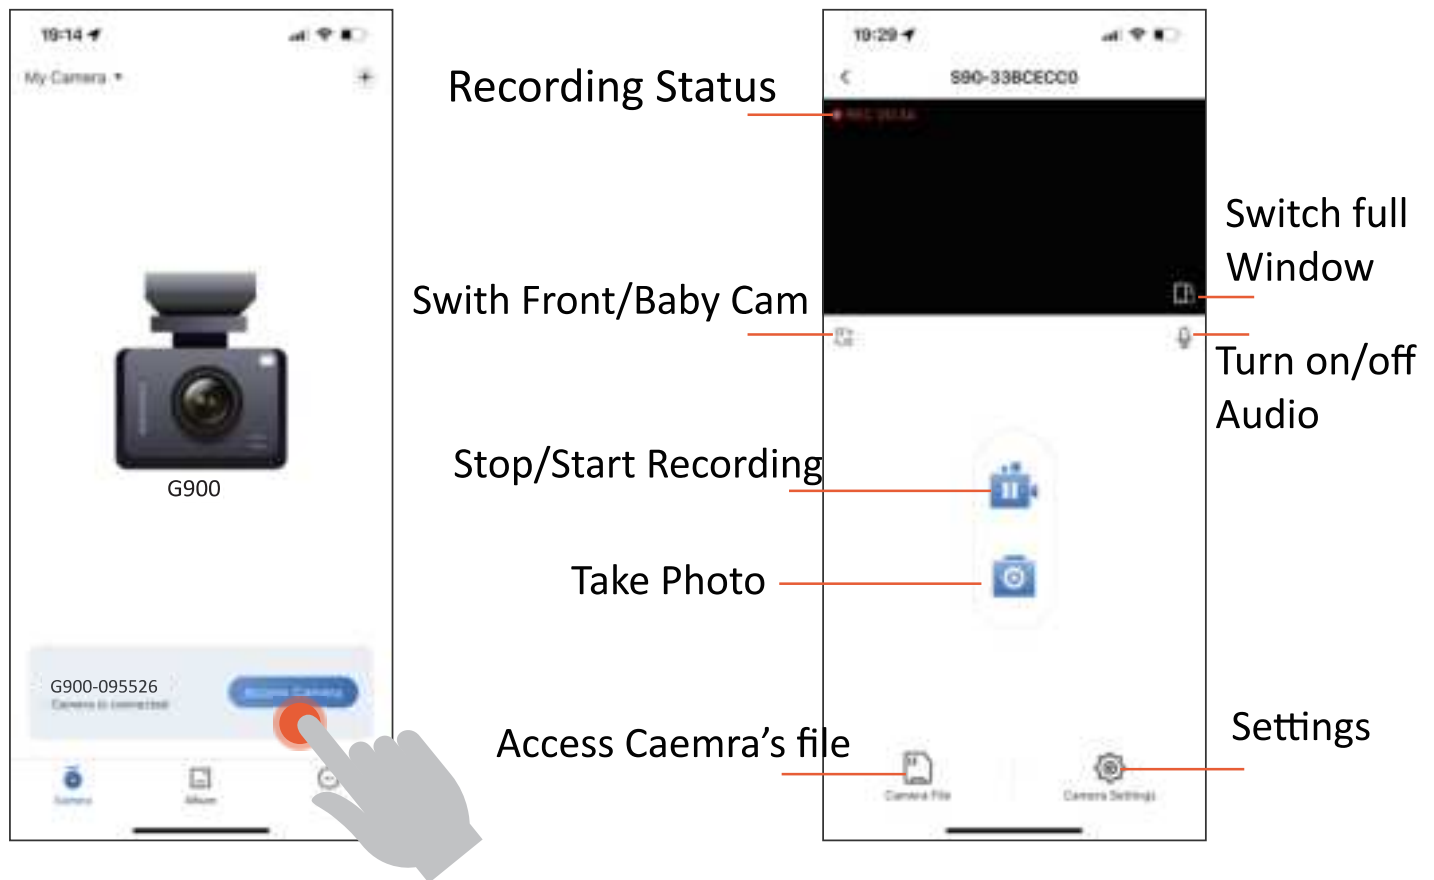

When you connect the WiFi and operate the APP, then you can not operate G900 cam by the button.

9. Playback the recorded videos

There are 2 methods you can playback the video.


Meth A: Playback on dash cam

Meth B: Playback on Mobile Phone.

Method A. Playback the video on the dash cam



Step ①

Press  to stop video recording



Step ②

Press  to switch to enter file management.

Step ④ Playback the videos




- Press to scroll to Previous (<) video file.
- Press to scroll to NEXT (>) video file.
- Press on the to CONFIRM
- Press to EXIT.

Method B: Playback on Mobile Phone.


Step 1. Open the G900's WiFi(Please refer to *page 19-20*)

Step 2. Connect the phone with the G900's WiFi(Please refer to *page 21*)

Step 3. Operate the APP “Viidure”

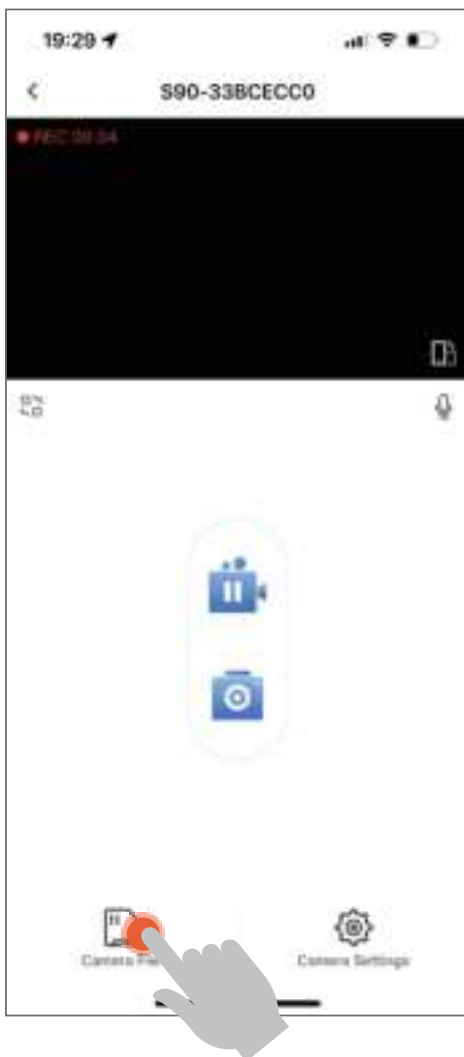


Access Camera's file

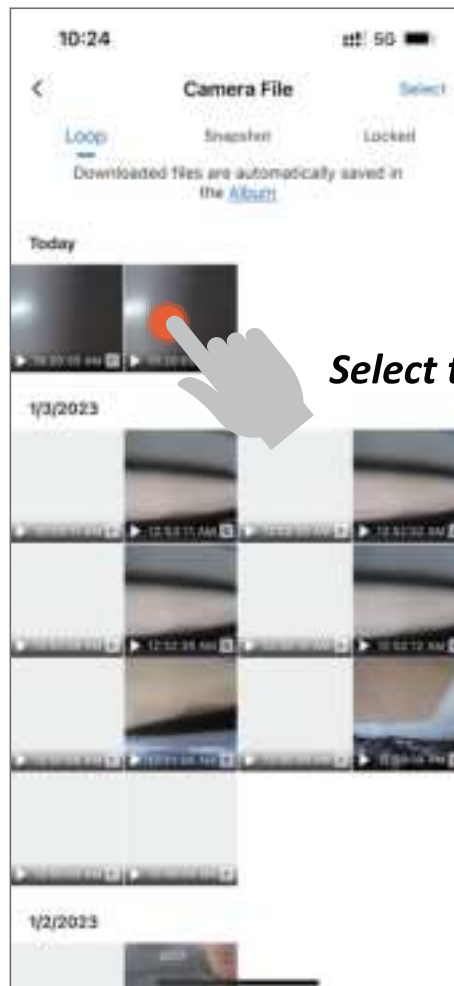

Select the files



Download the file

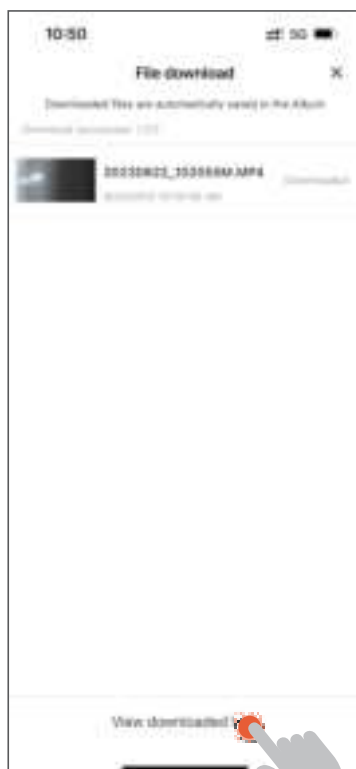

Playback the video



IMPORTANT NOTES

Before playback the video, please download it to your phone.

10. Installation

Thank you for your purchasing GMAIPOP Dash Cam.
Before starting installation, please watch videos and
note the tips attached.

Front Camera Install video:

Scran the QR Code by the mobile
phone to check the installation
video of **FRONT** camera in YouTube

Or

Search the link below:

https://youtu.be/opC6sZp1_68



Front Camera Installation

Rear Camera Install video:

Scran the QR Code by the mobile
phone to check the installation
video of **REAR** camera in YouTube

Or

Search the link below:

<https://youtu.be/hX-YaBx4biY>



Rear Camera Installation

10.1 Install Front Camera

Step 1. Install electrosatic film.



IMPORTANT NOTES

It's very importance to clean it.

If the glass it dirty, the bracket will be easily to drop

Clean the Windowshield Glassa by the clean accessories in the box



Please peel off the cover marked “①” in Red, then install on the glass



After Install the film on the cleaned windshield glass, then peel off the other cover marked “**②**” in green.

Step 2. Install the brakcet.

There are 1pc Suction Brakcet and 1pc 3M sticky bracket in the box, choose any one of them



Step 2.1. Install the Suction Bracket.

2.1-1. Please insert the suction bracket and make sure move the film in the suction cup.



2.1-2. Attach the suction on the electrostatic film & Lock The SuctionMount:

Press & hold it tight towards windshield to remove any air between suction mount and the windshield. While pressing & holding towards the windshield, turn the LOCKING Knob towards CLOCKWISE to LOCK in place.



Step 2.2. Install the 3M Sticky Bracket.

2.2-1. Please insert the sticky bracket and remove the sticky cover.



23

2.2-2. Install and press Sticky bracket on the *electrostatic film* very tightly



⚠ IMPORTANT NOTES

Please do not remove or take it off after installation.


Step 3. Adjust the Dash Cam's recording angle according to the figure photo below




IMPORTANT NOTES

- Please Make sure the installation position is cleaned correctly.
- Please Make sure the suction film is removed and the suction cup is clean.
- Please make sure the suction bracket is locked tightly
If not, the suction bracket will easily drop during video recording

Step 4. Connect the car charger to camera's USB port and Wire the cable according to the overall wiring diagram below

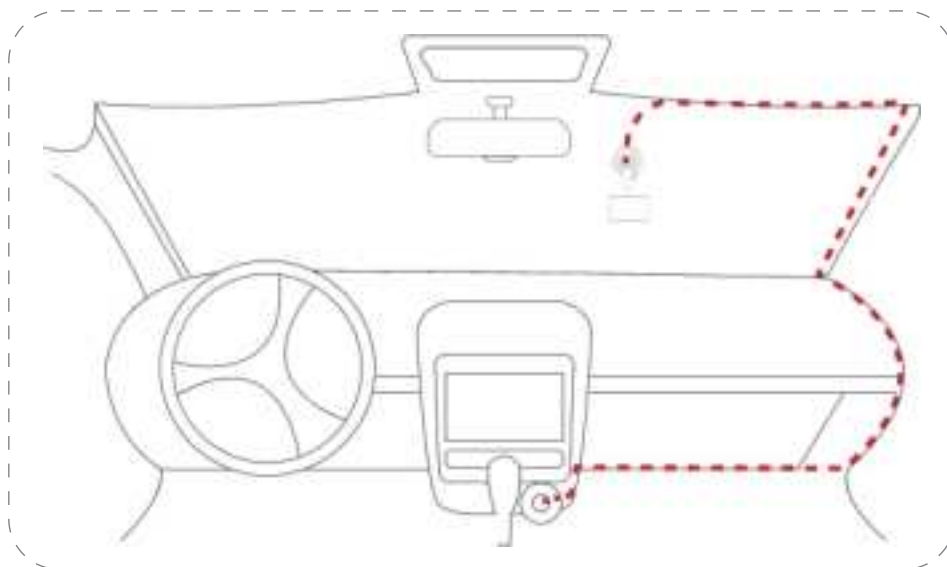

Wiring Method A

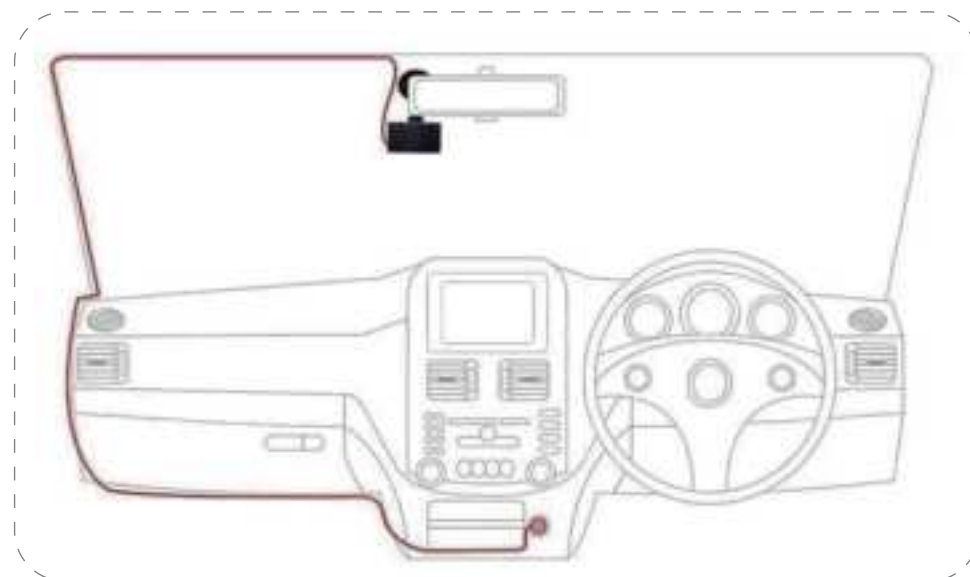

Wiring Method B

! Please use the original car charger provided to avoid fault or incompatibility.

Step 5. Install the car charger's cable according to the photos below.



a. hide the cable into to the top panel as the photo



b. Break the side panel slightly and insert the cable, please be careful if there is a **airbag**



c. then insert the cable to the door's sealing tape.



d. insert the cable according to the door's sealing tape.




e. insert the cable according to the door's sealing tape.



f. connect the car charger to Cigarette lighter



IMPORTANT NOTES

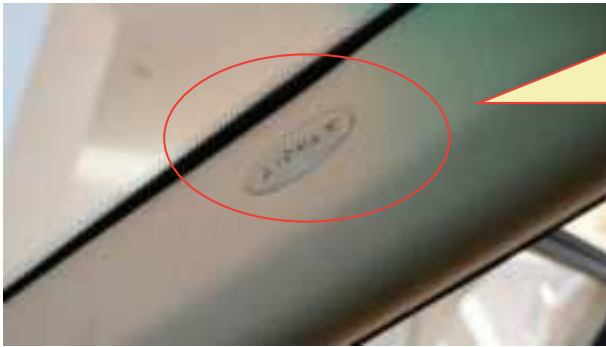

If your vehicle has side curtain airbags please be very careful when running any cables along your vehicle windows. Ensure you are not running Cable past any of the airbags as this can prevent the airbags from deploying



Please make sure the cigarette lighter is clean for connection.

Please check the car charger's red indicator whether is on.

10.2 Install the External Small Camera



Insert the rear cam into dashcam body

10.2-1 Install in the front Windshield Glass.

G900's external small camera can be installed in the front windshield glass to view the inside of the car. Please choose the shorter(1 feet, as photo) external camera cable to install it



Using the shorter(1feet, as photo) cable when install the external camera in the front Windshield Glass

Step1. Choose a position on the front Windshield Glass and clean it(refer to **page 28-29**)

Step 2. Install the electrostatic film on the cleaned position (refer to **page 28-29**)

Step 3. Install the External Camera in the front Windshield Glass to view at inside of the car



10.2-2 Install In the back Windshield Glass

G900's external small camera also can be installed in the rear windshield glass to view the back of the car. Please choose the longer(11.5 feet, as photo) external camera cable to install it



Using the longer(11.5 feet, as photo) cable when install the external camera in the rear Windshield Glass.

Step 1. Choose a position on the front Windshield Glass and clean it(refer to **page 28-29**)

Step 2. Install the electrostatic film on the cleaned position (refer to **page 28-29**)

Step 3. Remove the sticky cover and attach the rear camera on the electrostatic film tightly.



Step 4. Install the car charger's cable according to the diagram below.



Wiring Method A

or



Wiring Method B

Install the external camera's cable according the diagram photo above.

Step 5. Install the external rear camera's cable according to the diagram photos below.



a.hide the cable into to the top panel as the photo



b.Break the side panel slightly and insert the cable,please be careful if there is a **airbag**



c. then insert the cable to the door's sealing tape.



d. Break the panel slightly and insert the cable, please be careful if there is a **airbag**



e. keep inserting the cable to the door's sealing tape.



f. keep inserting the cable to the door's sealing tape until close to the trunk



g. remove the sticky cover



h. fix it on the electrostatic film tightly