



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client : **BTL Inc .**

Certificate No: **Z19-60160**

## CALIBRATION CERTIFICATE

Object **DAE4 - SN: 1390**

Calibration Procedure(s) **FF-Z11-002-01**  
**Calibration Procedure for the Data Acquisition Electronics (DAEx)**

Calibration date: **May 25, 2019**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature( $22\pm3$ )°C and humidity<70%.


Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Process Calibrator 753 | 1971018 | 20-Jun-18 (CTTL, No.J18X05034)           | June-19               |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: May 27, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)

[Http://www.chinattl.cn](http://www.chinattl.cn)

### **Glossary:**

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

### **Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

Http://www.chinattl.cn

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1  $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                         | Y                         | Z                         |
|---------------------|---------------------------|---------------------------|---------------------------|
| High Range          | 403.540 $\pm$ 0.15% (k=2) | 403.454 $\pm$ 0.15% (k=2) | 404.331 $\pm$ 0.15% (k=2) |
| Low Range           | 3.98405 $\pm$ 0.7% (k=2)  | 3.98320 $\pm$ 0.7% (k=2)  | 3.98431 $\pm$ 0.7% (k=2)  |

## Connector Angle

|                                           |                 |
|-------------------------------------------|-----------------|
| Connector Angle to be used in DASY system | 70.5° $\pm$ 1 ° |
|-------------------------------------------|-----------------|



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **BTL (Auden)**

Certificate No: **DAE3-420\_Jun19**

## CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 420**

Calibration procedure(s) **QA CAL-06.v29  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **June 21, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards             | ID #               | Cal Date (Certificate No.) | Scheduled Calibration  |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278        | 03-Sep-18 (No:23488)       | Sep-19                 |
| Secondary Standards           | ID #               | Check Date (in house)      | Scheduled Check        |
| Auto DAE Calibration Unit     | SE UWS 053 AA 1001 | 07-Jan-19 (in house check) | In house check: Jan-20 |
| Calibrator Box V2.1           | SE UMS 006 AA 1002 | 07-Jan-19 (in house check) | In house check: Jan-20 |

|                |                   |                       |           |
|----------------|-------------------|-----------------------|-----------|
| Calibrated by: | Name              | Function              | Signature |
|                | Dominique Steffen | Laboratory Technician |           |

|              |           |                |  |
|--------------|-----------|----------------|--|
| Approved by: | Sven Kühn | Deputy Manager |  |
|--------------|-----------|----------------|--|

Issued: June 21, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

## Glossary

|                 |                                                                                         |
|-----------------|-----------------------------------------------------------------------------------------|
| DAE             | data acquisition electronics                                                            |
| Connector angle | information used in DASY system to align probe sensor X to the robot coordinate system. |

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV , full range = -100...+300 mV  
Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                     | Y                     | Z                     |
|---------------------|-----------------------|-----------------------|-----------------------|
| High Range          | 405.532 ± 0.02% (k=2) | 405.108 ± 0.02% (k=2) | 406.157 ± 0.02% (k=2) |
| Low Range           | 3.95803 ± 1.50% (k=2) | 4.02209 ± 1.50% (k=2) | 3.96059 ± 1.50% (k=2) |

Connector Angle

|                                           |               |
|-------------------------------------------|---------------|
| Connector Angle to be used in DASY system | 162.5 ° ± 1 ° |
|-------------------------------------------|---------------|

## Appendix (Additional assessments outside the scope of SCS0108)

### 1. DC Voltage Linearity

| High Range        | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 200033.86                 | 0.52                         | 0.00      |
| Channel X + Input | 20010.20                  | 5.18                         | 0.03      |
| Channel X - Input | -20006.77                 | -1.36                        | 0.01      |
| Channel Y + Input | 200037.11                 | 3.95                         | 0.00      |
| Channel Y + Input | 20007.47                  | 2.40                         | 0.01      |
| Channel Y - Input | -20007.27                 | -1.75                        | 0.01      |
| Channel Z + Input | 200035.33                 | 2.26                         | 0.00      |
| Channel Z + Input | 20007.07                  | 2.09                         | 0.01      |
| Channel Z - Input | -20009.79                 | -4.18                        | 0.02      |

| Low Range         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2000.94                   | -0.13                        | -0.01     |
| Channel X + Input | 201.31                    | 0.33                         | 0.16      |
| Channel X - Input | -198.79                   | 0.19                         | -0.10     |
| Channel Y + Input | 2000.94                   | 0.04                         | 0.00      |
| Channel Y + Input | 200.25                    | -0.71                        | -0.35     |
| Channel Y - Input | -199.75                   | -0.69                        | 0.34      |
| Channel Z + Input | 2001.03                   | 0.19                         | 0.01      |
| Channel Z + Input | 199.96                    | -0.89                        | -0.44     |
| Channel Z - Input | -200.40                   | -1.30                        | 0.65      |

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode Input Voltage (mV) | High Range Average Reading ( $\mu\text{V}$ ) | Low Range Average Reading ( $\mu\text{V}$ ) |
|-----------|--------------------------------|----------------------------------------------|---------------------------------------------|
| Channel X | 200                            | -10.30                                       | -11.39                                      |
|           | - 200                          | 12.85                                        | 11.25                                       |
| Channel Y | 200                            | 9.05                                         | 8.97                                        |
|           | - 200                          | -11.44                                       | -10.95                                      |
| Channel Z | 200                            | 22.45                                        | 22.26                                       |
|           | - 200                          | -25.87                                       | -25.41                                      |

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu\text{V}$ ) | Channel Y ( $\mu\text{V}$ ) | Channel Z ( $\mu\text{V}$ ) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200                | -                           | 1.75                        | -1.68                       |
| Channel Y | 200                | 6.28                        | -                           | 2.12                        |
| Channel Z | 200                | 4.37                        | 3.81                        | -                           |

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 16130            | 16069           |
| Channel Y | 15913            | 15926           |
| Channel Z | 15859            | 15075           |

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

|           | Average ( $\mu$ V) | min. Offset ( $\mu$ V) | max. Offset ( $\mu$ V) | Std. Deviation ( $\mu$ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 1.49               | -0.38                  | 2.97                   | 0.57                      |
| Channel Y | 0.22               | -0.73                  | 1.26                   | 0.38                      |
| Channel Z | -1.58              | -2.89                  | 0.40                   | 0.45                      |

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

|           | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200            | 200              |
| Channel Y | 200            | 200              |
| Channel Z | 200            | 200              |

#### 8. Low Battery Alarm Voltage (Typical values for information)


| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

#### 9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Client

**BTL Inc .**

**Certificate No: Z19-60109**

## CALIBRATION CERTIFICATE

Object

ES3DV3 - SN:3162

Calibration Procedure(s)

FF-Z11-004-01

Calibration Procedures for Dosimetric E-field Probes

Calibration date:

April 12, 2019

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.


Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|-------------|------------------------------------------|-----------------------|
| Power Meter NRP2        | 101919      | 20-Jun-18 (CTTL, No.J18X05032)           | Jun-19                |
| Power sensor NRP-Z91    | 101547      | 20-Jun-18 (CTTL, No.J18X05032)           | Jun-19                |
| Power sensor NRP-Z91    | 101548      | 20-Jun-18 (CTTL, No.J18X05032)           | Jun-19                |
| Reference10dBAttenuator | 18N50W-10dB | 09-Feb-18(CTTL, No.J18X01133)            | Feb-20                |
| Reference20dBAttenuator | 18N50W-20dB | 09-Feb-18(CTTL, No.J18X01132)            | Feb-20                |
| Reference Probe EX3DV4  | SN 7514     | 27-Aug-18(SPEAG,No.EX3-7514_Aug18/2)     | Aug-19                |
| DAE4                    | SN 1555     | 20-Aug-18(SPEAG, No.DAE4-1555_Aug18)     | Aug -19               |
| Secondary Standards     | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| SignalGeneratorMG3700A  | 6201052605  | 21-Jun-18 (CTTL, No.J18X05033)           | Jun-19                |
| Network Analyzer E5071C | MY46110673  | 24-Jan-19 (CTTL, No.J19X00547)           | Jan -20               |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: April 14, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)

[Http://www.chinattl.cn](http://www.chinattl.cn)

## Glossary:

|                       |                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                    |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                   |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                  |
| DCP                   | diode compression point                                                                                                                     |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                                |
| A,B,C,D               | modulation dependent linearization parameters                                                                                               |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis                                                                                                           |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i<br>$\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>:** A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: [cttl@chinattl.com](mailto:cttl@chinattl.com)

[Http://www.chinattl.cn](http://www.chinattl.cn)

# Probe ES3DV3

## SN: 3162

Calibrated: April 12, 2019

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



In Collaboration with

**s p e a g****CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

Http://www.chinattl.cn

**DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3162****Basic Calibration Parameters**

|                                                          | Sensor X | Sensor Y | Sensor Z | Unc (k=2)    |
|----------------------------------------------------------|----------|----------|----------|--------------|
| Norm( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.25     | 1.03     | 1.14     | $\pm 10.0\%$ |
| DCP(mV) <sup>B</sup>                                     | 102.7    | 103.8    | 102.1    |              |

**Modulation Calibration Parameters**

| UID | Communication System Name |   | A<br>dB | B<br>dB/ $\mu\text{V}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                    | 1.0 | 0.00    | 288.9    | $\pm 2.2\%$               |
|     |                           | Y | 0.0     | 0.0                    | 1.0 |         | 257.1    |                           |
|     |                           | Z | 0.0     | 0.0                    | 1.0 |         | 272.7    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the  $E^2$ -field uncertainty inside TSL (see Page 5 and Page 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3162

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>c</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 6.09    | 6.09    | 6.09    | 0.36               | 1.55                    | ± 12.1%     |
| 835                  | 41.5                               | 0.90                            | 5.92    | 5.92    | 5.92    | 0.39               | 1.50                    | ± 12.1%     |
| 900                  | 41.5                               | 0.97                            | 5.87    | 5.87    | 5.87    | 0.42               | 1.52                    | ± 12.1%     |
| 1750                 | 40.1                               | 1.37                            | 5.19    | 5.19    | 5.19    | 0.62               | 1.27                    | ± 12.1%     |
| 1900                 | 40.0                               | 1.40                            | 4.90    | 4.90    | 4.90    | 0.71               | 1.21                    | ± 12.1%     |
| 2000                 | 40.0                               | 1.40                            | 4.87    | 4.87    | 4.87    | 0.68               | 1.22                    | ± 12.1%     |
| 2300                 | 39.5                               | 1.67                            | 4.68    | 4.68    | 4.68    | 0.90               | 1.07                    | ± 12.1%     |
| 2450                 | 39.2                               | 1.80                            | 4.50    | 4.50    | 4.50    | 0.90               | 1.08                    | ± 12.1%     |
| 2600                 | 39.0                               | 1.96                            | 4.38    | 4.38    | 4.38    | 0.90               | 1.05                    | ± 12.1%     |

<sup>c</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

Http://www.chinattl.cn

## DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3162

### Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 6.20    | 6.20    | 6.20    | 0.40               | 1.40                    | ± 12.1%     |
| 835                  | 55.2                               | 0.97                            | 5.98    | 5.98    | 5.98    | 0.42               | 1.58                    | ± 12.1%     |
| 900                  | 55.0                               | 1.05                            | 5.96    | 5.96    | 5.96    | 0.46               | 1.49                    | ± 12.1%     |
| 1750                 | 53.4                               | 1.49                            | 4.84    | 4.84    | 4.84    | 0.60               | 1.31                    | ± 12.1%     |
| 1900                 | 53.3                               | 1.52                            | 4.70    | 4.70    | 4.70    | 0.65               | 1.27                    | ± 12.1%     |
| 2000                 | 53.3                               | 1.52                            | 4.68    | 4.68    | 4.68    | 0.63               | 1.32                    | ± 12.1%     |
| 2300                 | 52.9                               | 1.81                            | 4.35    | 4.35    | 4.35    | 0.90               | 1.16                    | ± 12.1%     |
| 2450                 | 52.7                               | 1.95                            | 4.30    | 4.30    | 4.30    | 0.85               | 1.18                    | ± 12.1%     |
| 2600                 | 52.5                               | 2.16                            | 4.18    | 4.18    | 4.18    | 0.90               | 1.08                    | ± 12.1%     |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)

[Http://www.chinattl.cn](http://www.chinattl.cn)

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

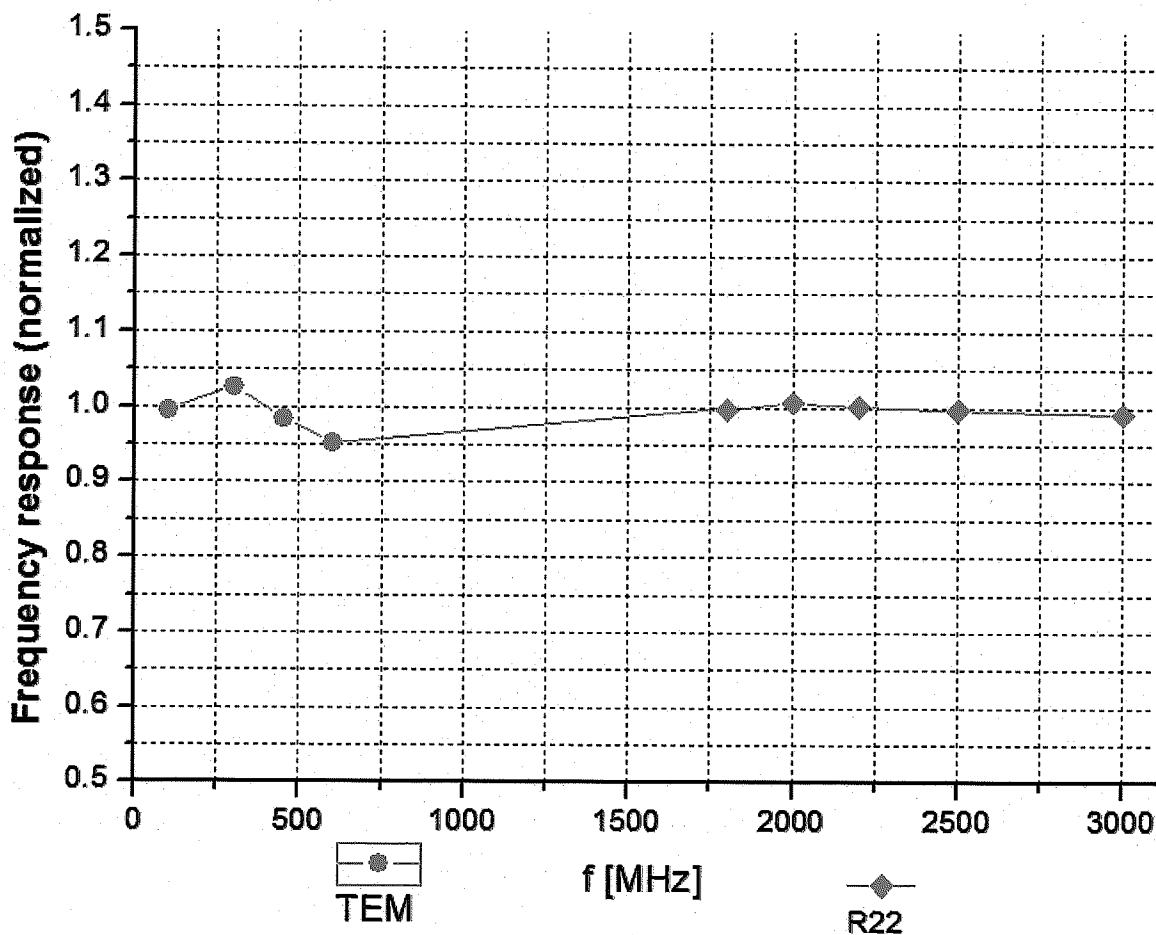

Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )





In Collaboration with  
**s p e a g**  
 CALIBRATION LABORATORY




Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**

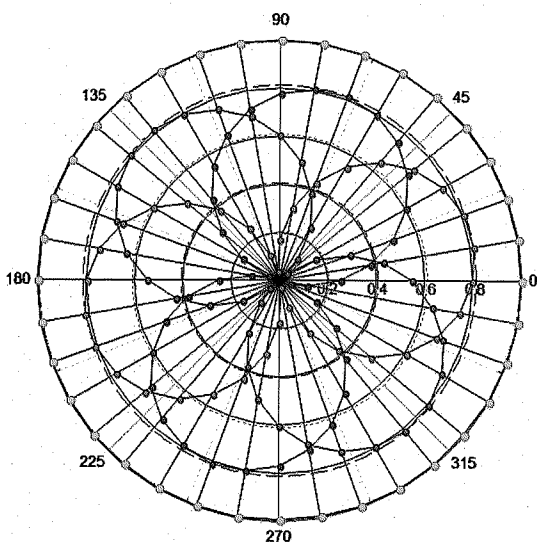

**f=1800 MHz, R22**

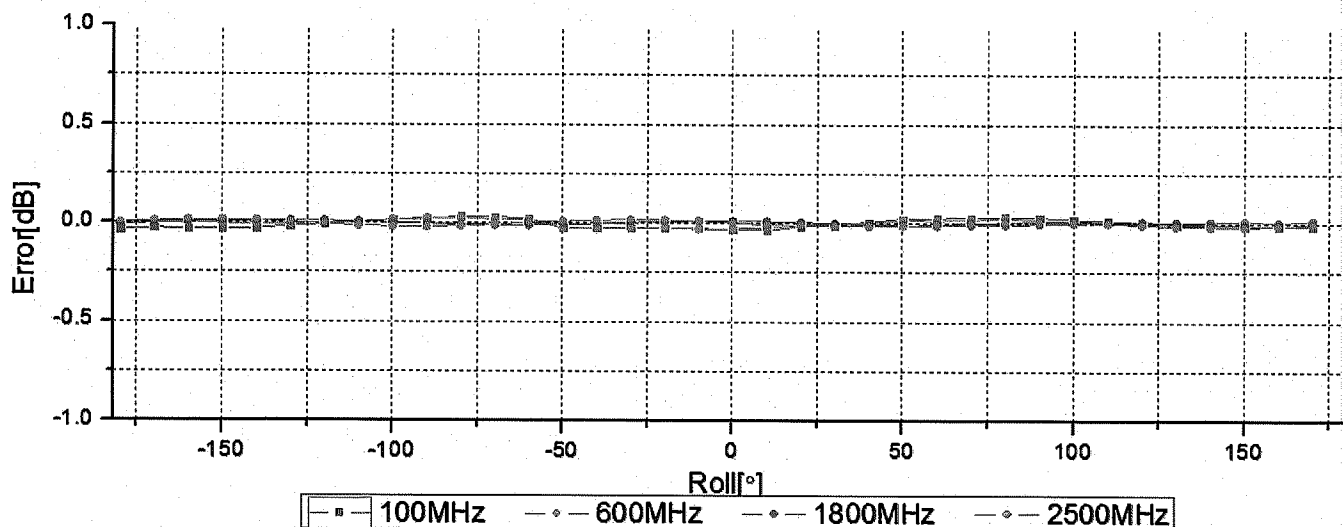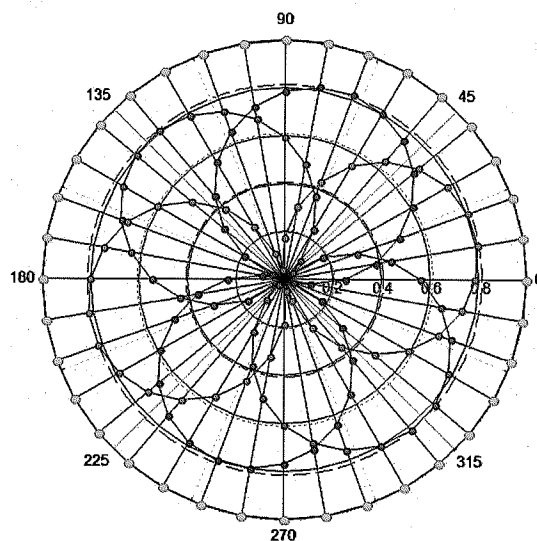


Uncertainty of Axial Isotropy Assessment:  $\pm 1.2\%$  ( $k=2$ )



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

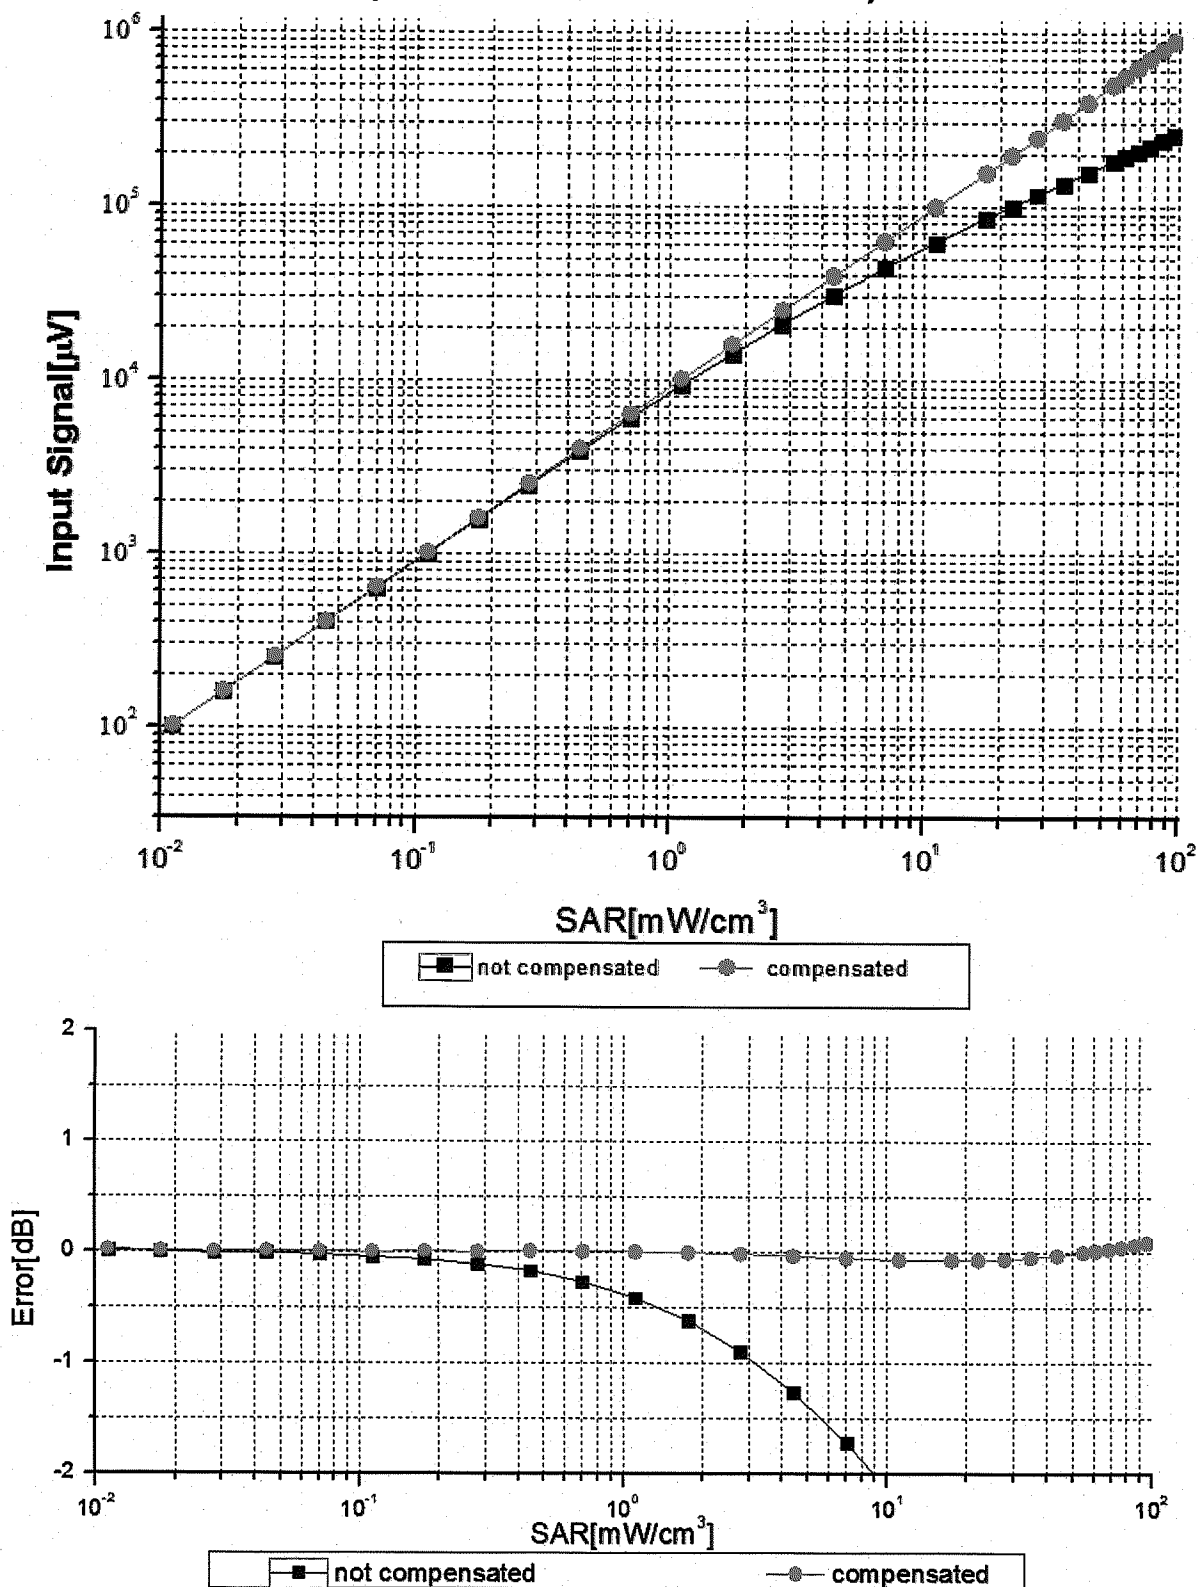

Uncertainty of Linearity Assessment: ±0.9% (k=2)





In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


## Conversion Factor Assessment

**f=750 MHz, WGLS R9(H\_convF)**

**f=1750 MHz, WGLS R22(H\_convF)**

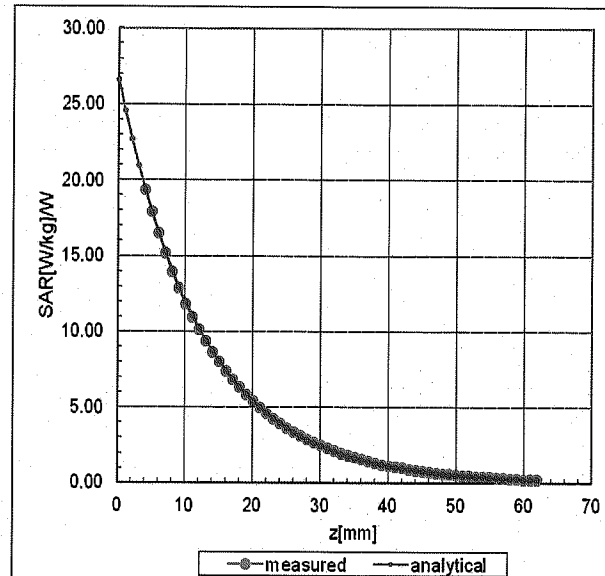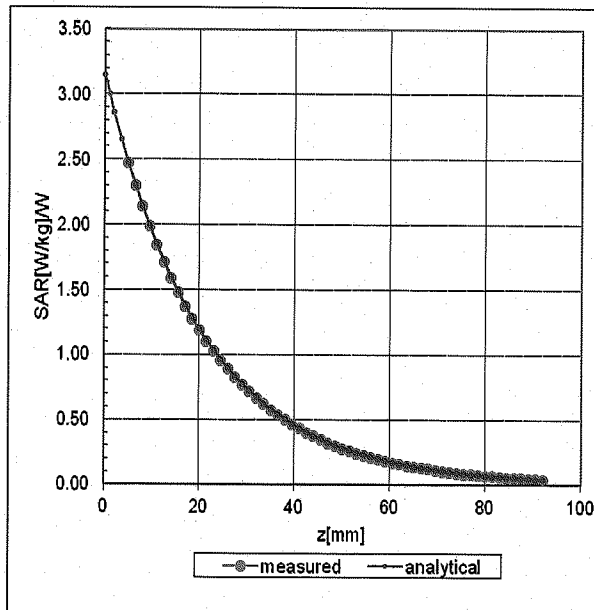

## Deviation from Isotropy in Liquid

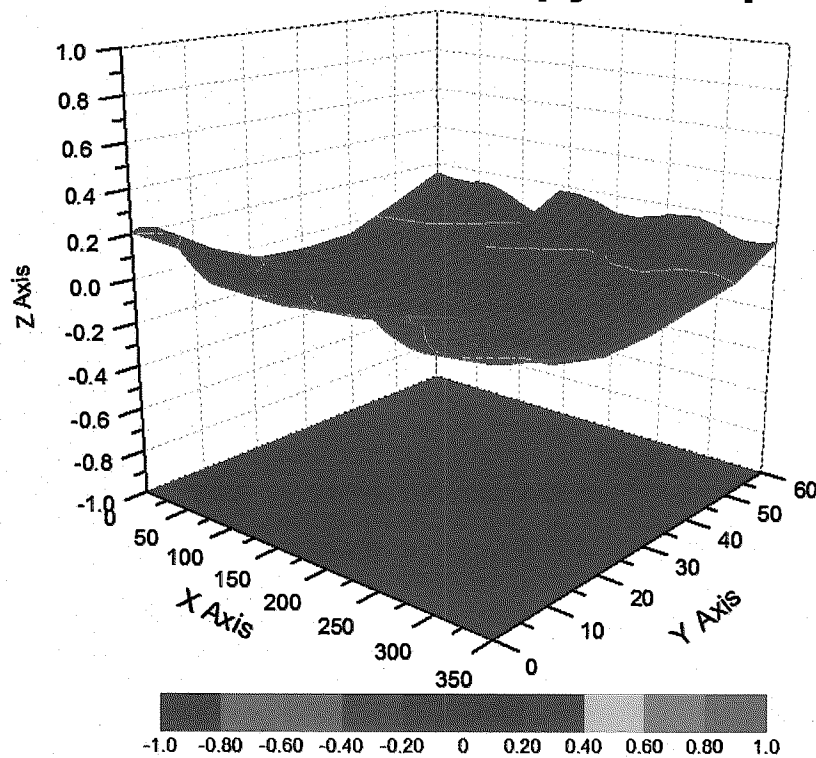

Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  (K=2)



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)

[Http://www.chinattl.cn](http://www.chinattl.cn)

## **DASY/EASY – Parameters of Probe: ES3DV3 - SN: 3162**

### **Other Probe Parameters**

|                                                      |                   |
|------------------------------------------------------|-------------------|
| <b>Sensor Arrangement</b>                            | <b>Triangular</b> |
| <b>Connector Angle (°)</b>                           | <b>26.2</b>       |
| <b>Mechanical Surface Detection Mode</b>             | <b>enabled</b>    |
| <b>Optical Surface Detection Mode</b>                | <b>disable</b>    |
| <b>Probe Overall Length</b>                          | <b>337mm</b>      |
| <b>Probe Body Diameter</b>                           | <b>10mm</b>       |
| <b>Tip Length</b>                                    | <b>10mm</b>       |
| <b>Tip Diameter</b>                                  | <b>4mm</b>        |
| <b>Probe Tip to Sensor X Calibration Point</b>       | <b>2mm</b>        |
| <b>Probe Tip to Sensor Y Calibration Point</b>       | <b>2mm</b>        |
| <b>Probe Tip to Sensor Z Calibration Point</b>       | <b>2mm</b>        |
| <b>Recommended Measurement Distance from Surface</b> | <b>3mm</b>        |



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

BTL Inc .

Certificate No: Z19-60168

## CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:7544

Calibration Procedure(s)

FF-Z11-004-01

Calibration Procedures for Dosimetric E-field Probes

Calibration date:

September 09, 2019

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|-------------|------------------------------------------|-----------------------|
| Power Meter NRP2        | 101919      | 18-Jun-19 (CTTL, No.J19X05125)           | Jun-20                |
| Power sensor NRP-Z91    | 101547      | 18-Jun-19 (CTTL, No.J19X05125)           | Jun-20                |
| Power sensor NRP-Z91    | 101548      | 18-Jun-19 (CTTL, No.J19X05125)           | Jun-20                |
| Reference10dBAttenuator | 18N50W-10dB | 09-Feb-18(CTTL, No.J18X01133)            | Feb-20                |
| Reference20dBAttenuator | 18N50W-20dB | 09-Feb-18(CTTL, No.J18X01132)            | Feb-20                |
| Reference Probe EX3DV4  | SN 7307     | 24-May-19(SPEAG,No.EX3-7307_May19)       | May-20                |
| DAE4                    | SN 1331     | 06-Feb-19(SPEAG, No.DAE4-1331_Feb19)     | Feb -20               |
| DAE4                    | SN 917      | 07-Dec-18(SPEAG, No.DAE4-917_Dec18)      | Dec -19               |
| Secondary Standards     | ID #        | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| SignalGeneratorMG3700A  | 6201052605  | 18-Jun-19 (CTTL, No.J19X05127)           | Jun-20                |
| Network Analyzer E5071C | MY46110673  | 24-Jan-19 (CTTL, No.J19X00547)           | Jan -20               |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: September 10, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com)

[Http://www.chinattl.cn](http://www.chinattl.cn)

## Glossary:

|                       |                                                                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                   | tissue simulating liquid                                                                                                                    |
| NORM <sub>x,y,z</sub> | sensitivity in free space                                                                                                                   |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                  |
| DCP                   | diode compression point                                                                                                                     |
| CF                    | crest factor (1/duty_cycle) of the RF signal                                                                                                |
| A,B,C,D               | modulation dependent linearization parameters                                                                                               |
| Polarization $\Phi$   | $\Phi$ rotation around probe axis                                                                                                           |
| Polarization $\theta$ | $\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i<br>$\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 800\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN: 7544

Calibrated: September 09, 2019

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7544

### Basic Calibration Parameters

|                                                          | Sensor X | Sensor Y | Sensor Z | Unc (k=2)    |
|----------------------------------------------------------|----------|----------|----------|--------------|
| Norm( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.66     | 0.56     | 0.63     | $\pm 10.0\%$ |
| DCP(mV) <sup>B</sup>                                     | 100.6    | 98.0     | 100.6    |              |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 212.7    | $\pm 2.1\%$               |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 198.5    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 207.6    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5 and Page 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

[Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7544

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 41.9                               | 0.89                            | 10.49   | 10.49   | 10.49   | 0.40               | 0.80                    | ± 12.1%     |
| 835                  | 41.5                               | 0.90                            | 10.14   | 10.14   | 10.14   | 0.15               | 1.35                    | ± 12.1%     |
| 1750                 | 40.1                               | 1.37                            | 8.54    | 8.54    | 8.54    | 0.19               | 1.16                    | ± 12.1%     |
| 1900                 | 40.0                               | 1.40                            | 8.26    | 8.26    | 8.26    | 0.24               | 1.01                    | ± 12.1%     |
| 2100                 | 39.8                               | 1.49                            | 8.24    | 8.24    | 8.24    | 0.22               | 1.07                    | ± 12.1%     |
| 2300                 | 39.5                               | 1.67                            | 7.86    | 7.86    | 7.86    | 0.41               | 0.81                    | ± 12.1%     |
| 2450                 | 39.2                               | 1.80                            | 7.58    | 7.58    | 7.58    | 0.47               | 0.80                    | ± 12.1%     |
| 2600                 | 39.0                               | 1.96                            | 7.40    | 7.40    | 7.40    | 0.56               | 0.73                    | ± 12.1%     |
| 3300                 | 38.2                               | 2.71                            | 7.20    | 7.20    | 7.20    | 0.30               | 1.30                    | ± 13.3%     |
| 3500                 | 37.9                               | 2.91                            | 6.80    | 6.80    | 6.80    | 0.30               | 1.25                    | ± 13.3%     |
| 3700                 | 37.7                               | 3.12                            | 6.49    | 6.49    | 6.49    | 0.30               | 1.45                    | ± 13.3%     |
| 3900                 | 37.5                               | 3.32                            | 6.47    | 6.47    | 6.47    | 0.30               | 1.35                    | ± 13.3%     |
| 4200                 | 37.1                               | 3.63                            | 6.25    | 6.25    | 6.25    | 0.40               | 1.20                    | ± 13.3%     |
| 4400                 | 36.9                               | 3.84                            | 6.15    | 6.15    | 6.15    | 0.30               | 1.60                    | ± 13.3%     |
| 4600                 | 36.7                               | 4.04                            | 6.11    | 6.11    | 6.11    | 0.40               | 1.30                    | ± 13.3%     |
| 4800                 | 36.4                               | 4.25                            | 5.94    | 5.94    | 5.94    | 0.40               | 1.30                    | ± 13.3%     |
| 4950                 | 36.3                               | 4.40                            | 5.81    | 5.81    | 5.81    | 0.40               | 1.35                    | ± 13.3%     |
| 5200                 | 36.0                               | 4.66                            | 5.54    | 5.54    | 5.54    | 0.40               | 1.40                    | ± 13.3%     |
| 5300                 | 35.9                               | 4.76                            | 5.21    | 5.21    | 5.21    | 0.40               | 1.40                    | ± 13.3%     |
| 5500                 | 35.6                               | 4.96                            | 4.95    | 4.95    | 4.95    | 0.40               | 1.40                    | ± 13.3%     |
| 5600                 | 35.5                               | 5.07                            | 4.81    | 4.81    | 4.81    | 0.40               | 1.40                    | ± 13.3%     |
| 5800                 | 35.3                               | 5.27                            | 4.75    | 4.75    | 4.75    | 0.40               | 1.40                    | ± 13.3%     |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7544

### Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz] <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750                  | 55.5                               | 0.96                            | 10.48   | 10.48   | 10.48   | 0.16               | 1.46                    | ± 12.1%     |
| 835                  | 55.2                               | 0.97                            | 10.12   | 10.12   | 10.12   | 0.19               | 1.32                    | ± 12.1%     |
| 1750                 | 53.4                               | 1.49                            | 8.29    | 8.29    | 8.29    | 0.25               | 1.03                    | ± 12.1%     |
| 1900                 | 53.3                               | 1.52                            | 7.90    | 7.90    | 7.90    | 0.20               | 1.18                    | ± 12.1%     |
| 2100                 | 53.2                               | 1.62                            | 8.05    | 8.05    | 8.05    | 0.21               | 1.19                    | ± 12.1%     |
| 2300                 | 52.9                               | 1.81                            | 7.66    | 7.66    | 7.66    | 0.47               | 0.85                    | ± 12.1%     |
| 2450                 | 52.7                               | 1.95                            | 7.57    | 7.57    | 7.57    | 0.61               | 0.74                    | ± 12.1%     |
| 2600                 | 52.5                               | 2.16                            | 7.35    | 7.35    | 7.35    | 0.67               | 0.68                    | ± 12.1%     |
| 3300                 | 51.6                               | 3.08                            | 6.66    | 6.66    | 6.66    | 0.45               | 1.08                    | ± 13.3%     |
| 3500                 | 51.3                               | 3.31                            | 6.20    | 6.20    | 6.20    | 0.40               | 1.35                    | ± 13.3%     |
| 3700                 | 51.0                               | 3.55                            | 6.04    | 6.04    | 6.04    | 0.40               | 1.25                    | ± 13.3%     |
| 3900                 | 51.2                               | 3.78                            | 6.06    | 6.06    | 6.06    | 0.35               | 1.70                    | ± 13.3%     |
| 4200                 | 50.4                               | 4.13                            | 5.75    | 5.75    | 5.75    | 0.40               | 1.60                    | ± 13.3%     |
| 4400                 | 50.1                               | 4.37                            | 5.70    | 5.70    | 5.70    | 0.40               | 1.70                    | ± 13.3%     |
| 4600                 | 49.8                               | 4.60                            | 5.58    | 5.58    | 5.58    | 0.35               | 1.65                    | ± 13.3%     |
| 4800                 | 49.6                               | 4.83                            | 5.44    | 5.44    | 5.44    | 0.40               | 1.65                    | ± 13.3%     |
| 4950                 | 49.4                               | 5.01                            | 5.21    | 5.21    | 5.21    | 0.40               | 1.90                    | ± 13.3%     |
| 5200                 | 49.0                               | 5.30                            | 4.68    | 4.68    | 4.68    | 0.45               | 1.65                    | ± 13.3%     |
| 5300                 | 48.9                               | 5.42                            | 4.51    | 4.51    | 4.51    | 0.45               | 1.70                    | ± 13.3%     |
| 5500                 | 48.6                               | 5.65                            | 4.26    | 4.26    | 4.26    | 0.40               | 1.90                    | ± 13.3%     |
| 5600                 | 48.5                               | 5.77                            | 4.10    | 4.10    | 4.10    | 0.45               | 1.60                    | ± 13.3%     |
| 5800                 | 48.2                               | 6.00                            | 4.13    | 4.13    | 4.13    | 0.50               | 1.50                    | ± 13.3%     |

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

## Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

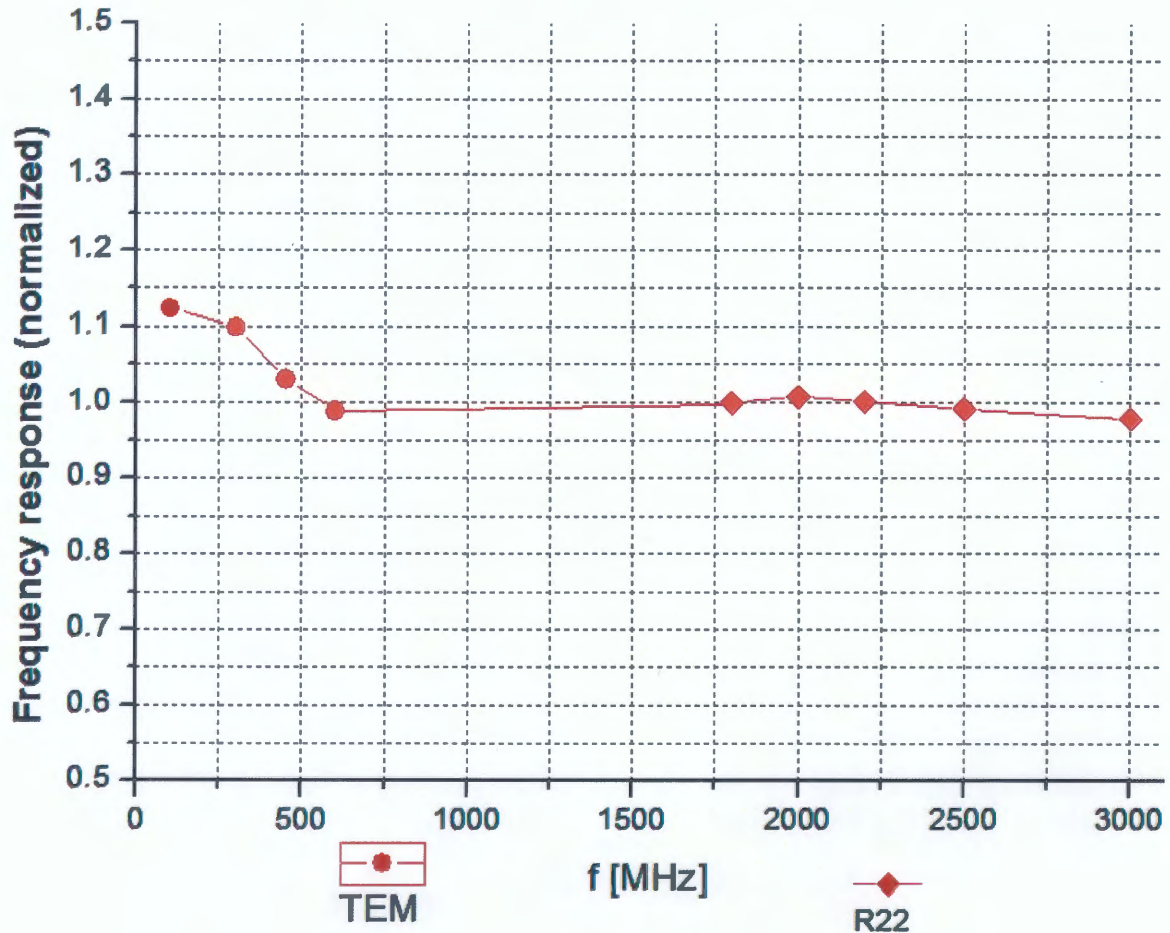

Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )




In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: [ctl@chinattl.com](mailto:ctl@chinattl.com) [Http://www.chinattl.cn](http://www.chinattl.cn)

## Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$

**f=600 MHz, TEM**

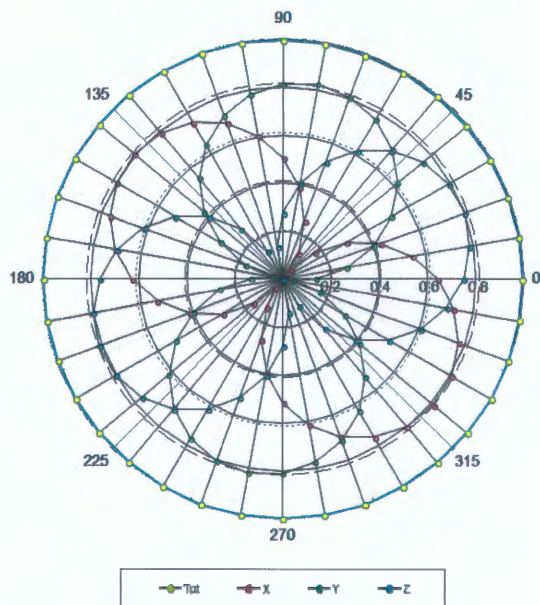

**f=1800 MHz, R22**

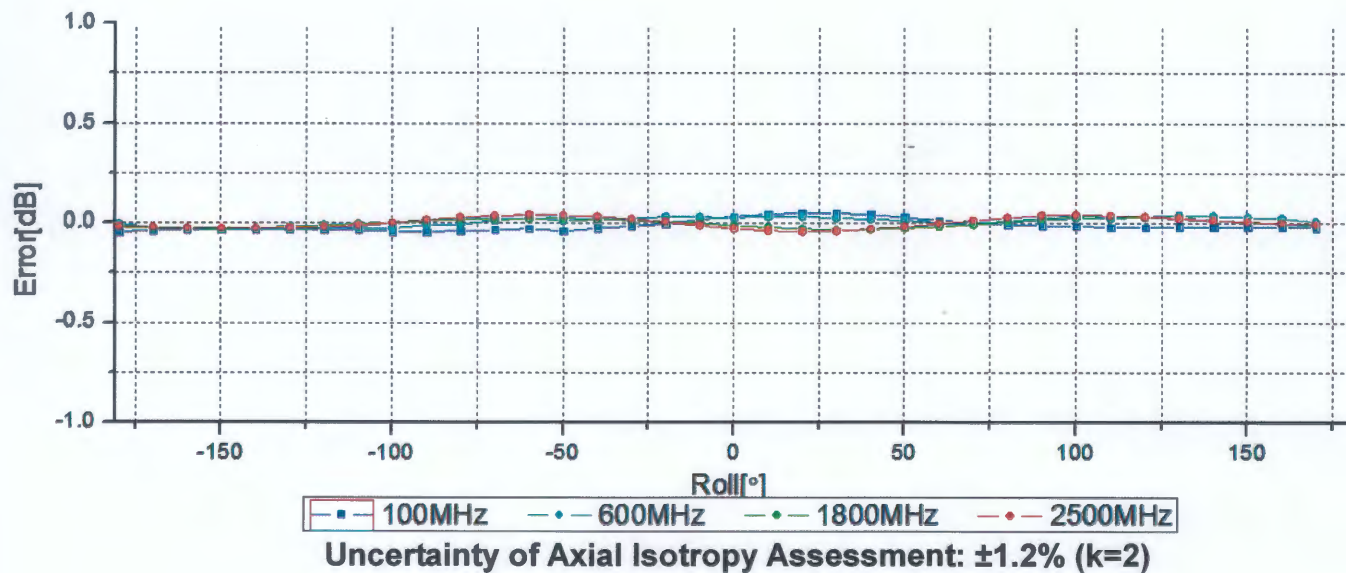
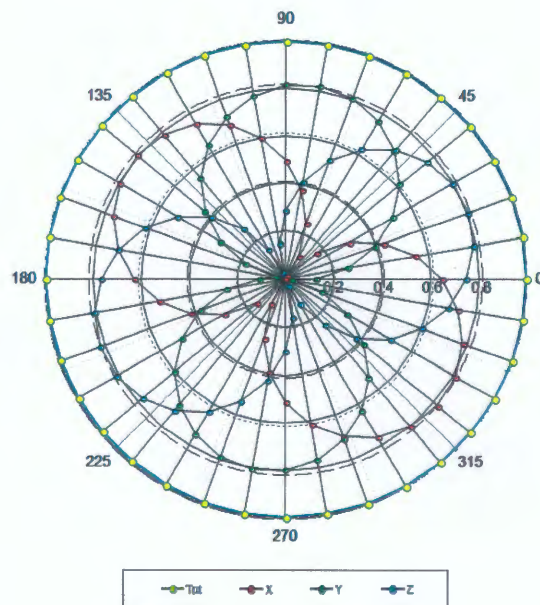




In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$ )

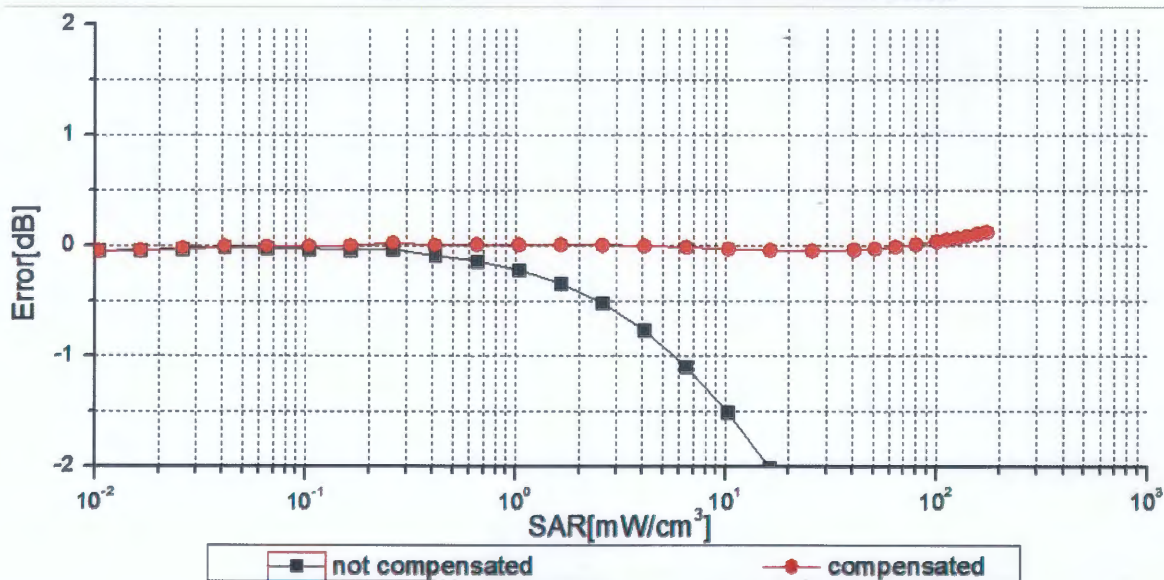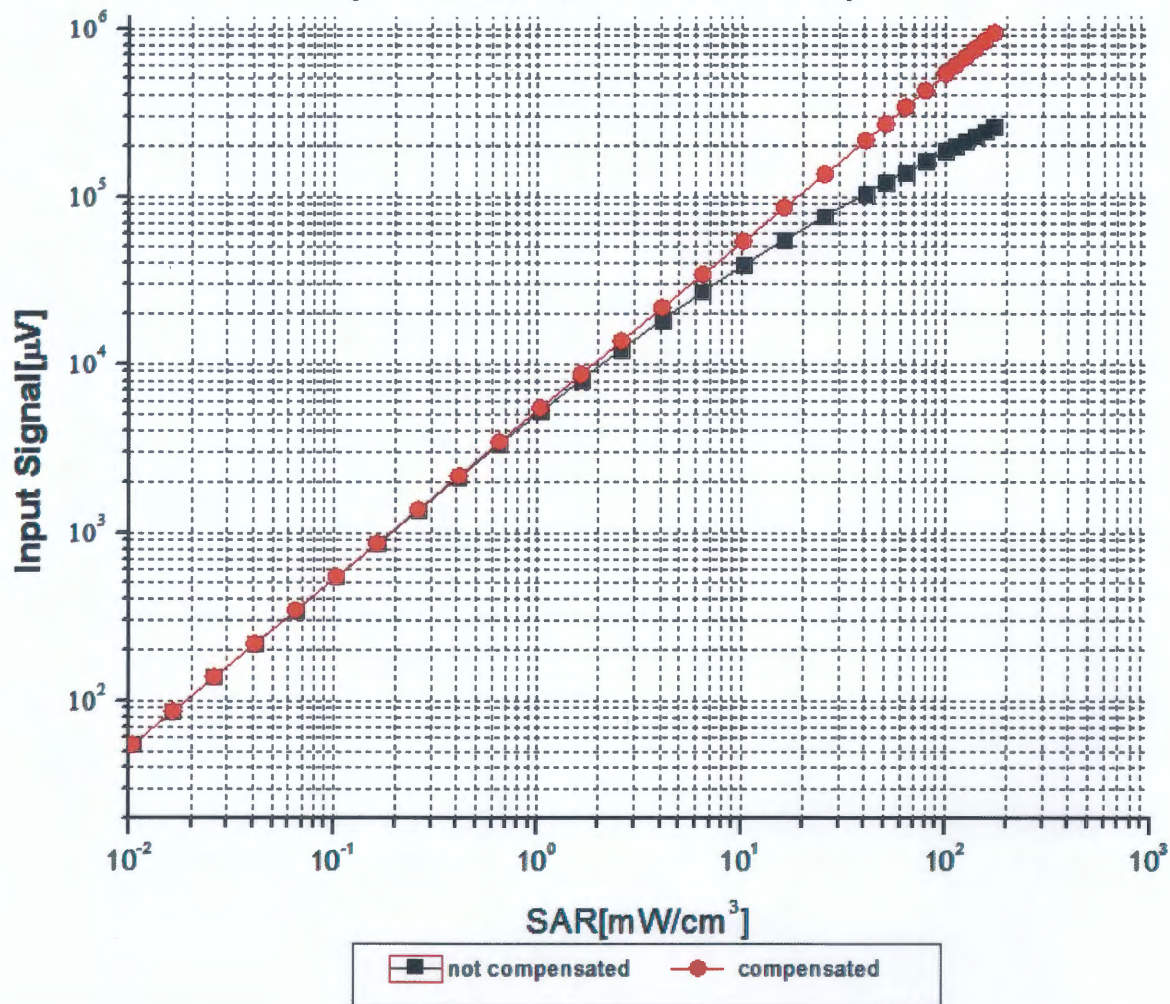

Uncertainty of Linearity Assessment:  $\pm 0.9\%$  ( $k=2$ )





In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


## Conversion Factor Assessment

**f=750 MHz, WGLS R9(H\_convF)**

**f=1900 MHz, WGLS R22(H\_convF)**

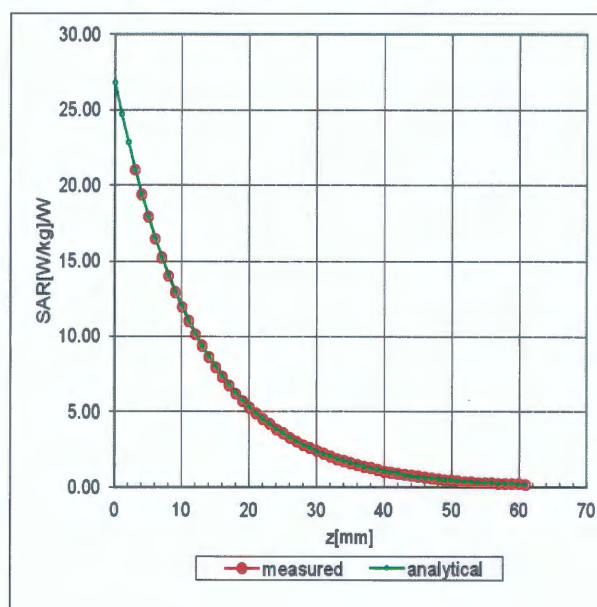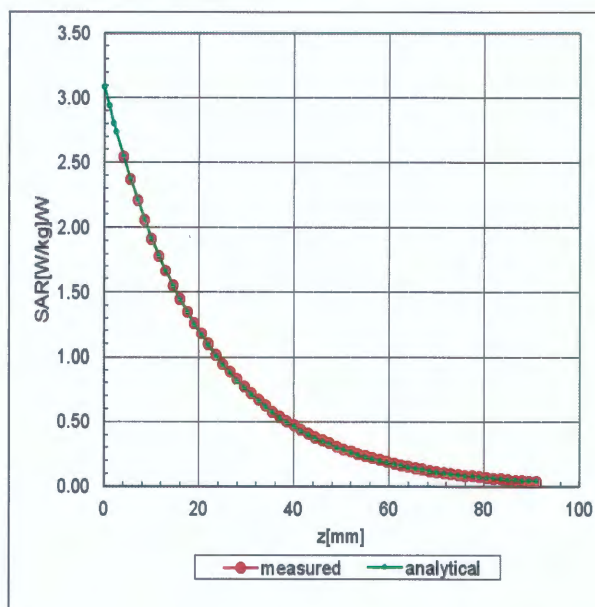

## Deviation from Isotropy in Liquid

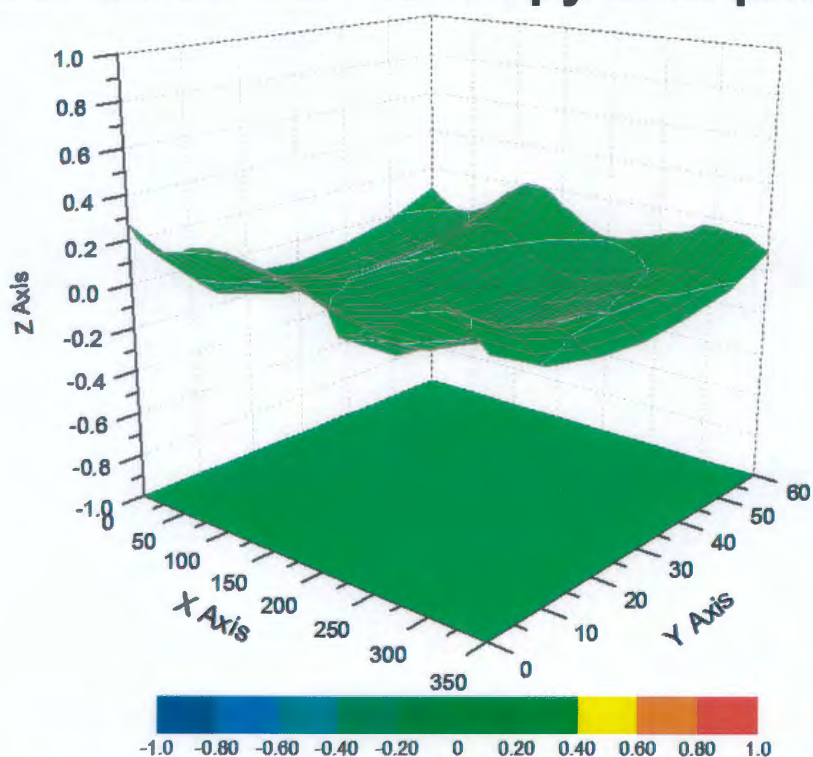

Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  (K=2)



In Collaboration with  
**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7544

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 125.2      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disable    |
| Probe Overall Length                          | 337mm      |
| Probe Body Diameter                           | 10mm       |
| Tip Length                                    | 9mm        |
| Tip Diameter                                  | 2.5mm      |
| Probe Tip to Sensor X Calibration Point       | 1mm        |
| Probe Tip to Sensor Y Calibration Point       | 1mm        |
| Probe Tip to Sensor Z Calibration Point       | 1mm        |
| Recommended Measurement Distance from Surface | 1.4mm      |



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **BTL Inc .**

Certificate No: **Z18-60177**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d160**

Calibration Procedure(s) **FF-Z11-003-01**  
Calibration Procedures for dipole validation kits

Calibration date: **June 5, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD        | 102083     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Power sensor NRV-Z5     | 100542     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Reference Probe EX3DV4  | SN 7464    | 12-Sep-17(SPEAG,No.EX3-7464_Sep17)       | Sep-18                |
| DAE4                    | SN 1525    | 02-Oct-17(SPEAG,No.DAE4-1525_Oct17)      | Oct-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560)           | Jan-19                |
| NetworkAnalyzer E5071C  | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561)           | Jan-19                |

|                | Name        | Function           |
|----------------|-------------|--------------------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |
| Approved by:   | Qi Dianyuan | SAR Project Leader |

Signature

Issued: June 11, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Glossary:

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- d) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

### Additional Documentation:

- e) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                                     |                          |              |
|-------------------------------------|--------------------------|--------------|
| <b>DASY Version</b>                 | DASY52                   | 52.10.1.1476 |
| <b>Extrapolation</b>                | Advanced Extrapolation   |              |
| <b>Phantom</b>                      | Triple Flat Phantom 5.1C |              |
| <b>Distance Dipole Center - TSL</b> | 15 mm                    | with Spacer  |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm        |              |
| <b>Frequency</b>                    | 835 MHz $\pm$ 1 MHz      |              |

**Head TSL parameters**

The following parameters and calculations were applied.

|                                                | <b>Temperature</b>  | <b>Permittivity</b> | <b>Conductivity</b>  |
|------------------------------------------------|---------------------|---------------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 41.5                | 0.90 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 42.1 $\pm$ 6 %      | 0.87 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | <1.0 °C             | ----                | ----                 |

**SAR result with Head TSL**

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>   | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 2.25 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>9.23 mW / g <math>\pm</math> 18.8 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 1.47 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>6.00 mW / g <math>\pm</math> 18.7 % (k=2)</b> |

**Body TSL parameters**

The following parameters and calculations were applied.

|                                                | <b>Temperature</b>  | <b>Permittivity</b> | <b>Conductivity</b>  |
|------------------------------------------------|---------------------|---------------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 55.2                | 0.97 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 55.2 $\pm$ 6 %      | 0.99 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | <1.0 °C             | ----                | ----                 |

**SAR result with Body TSL**

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>   | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 2.42 mW / g                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>9.53 mW / g <math>\pm</math> 18.8 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 1.57 mW / g                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>6.20 mW / g <math>\pm</math> 18.7 % (k=2)</b> |



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 51.0Ω- 3.97jΩ |
| Return Loss                          | - 27.9dB      |

### Antenna Parameters with Body TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 46.4Ω- 4.96jΩ |
| Return Loss                          | - 23.9dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.308 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## DASY5 Validation Report for Head TSL

Date: 06.04.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d160**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.874 \text{ S/m}$ ;  $\epsilon_r = 42.13$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(10.28, 10.28, 10.28) @ 835 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.53 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.44 W/kg

**SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.47 W/kg**

Maximum value of SAR (measured) = 3.03 W/kg

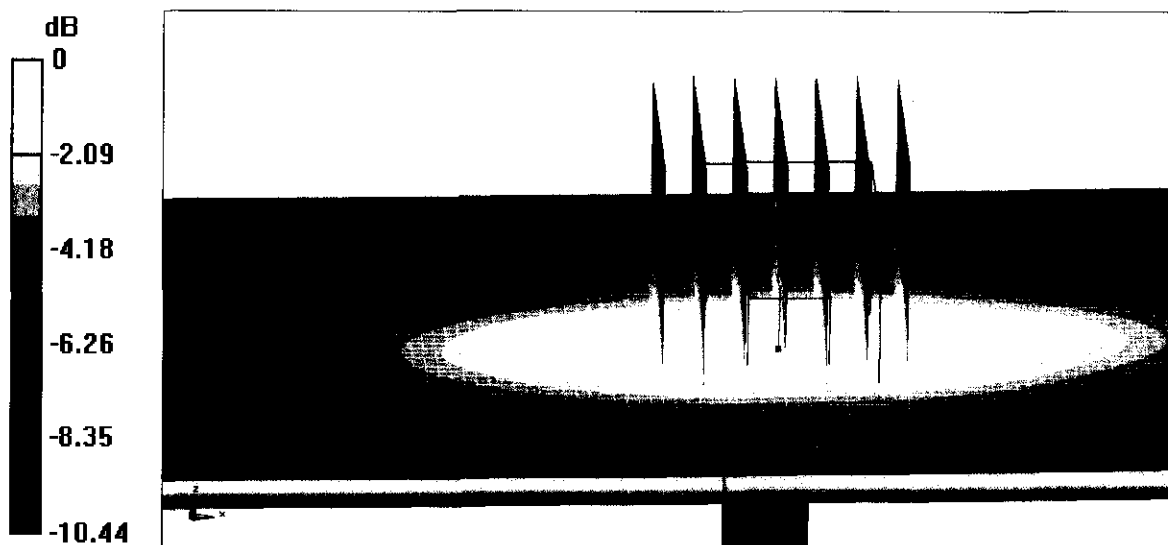

0 dB = 3.03 W/kg = 4.81 dBW/kg



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

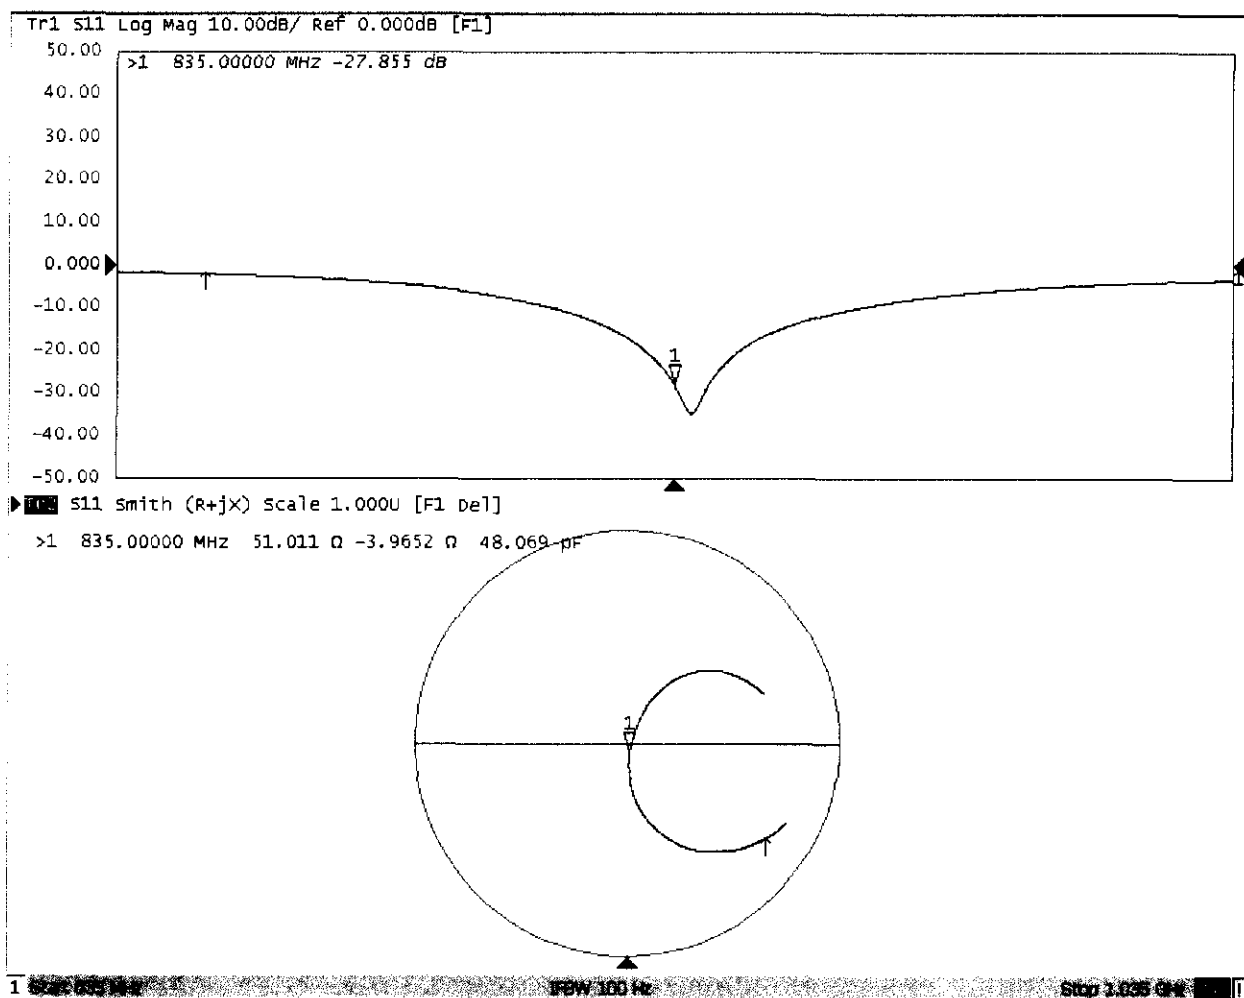



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Body TSL

Date: 06.04.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d160**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.99 \text{ S/m}$ ;  $\epsilon_r = 55.15$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(10.21, 10.21, 10.21) @ 835 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 55.82 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.76 W/kg

**SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.57 W/kg**

Maximum value of SAR (measured) = 3.29 W/kg

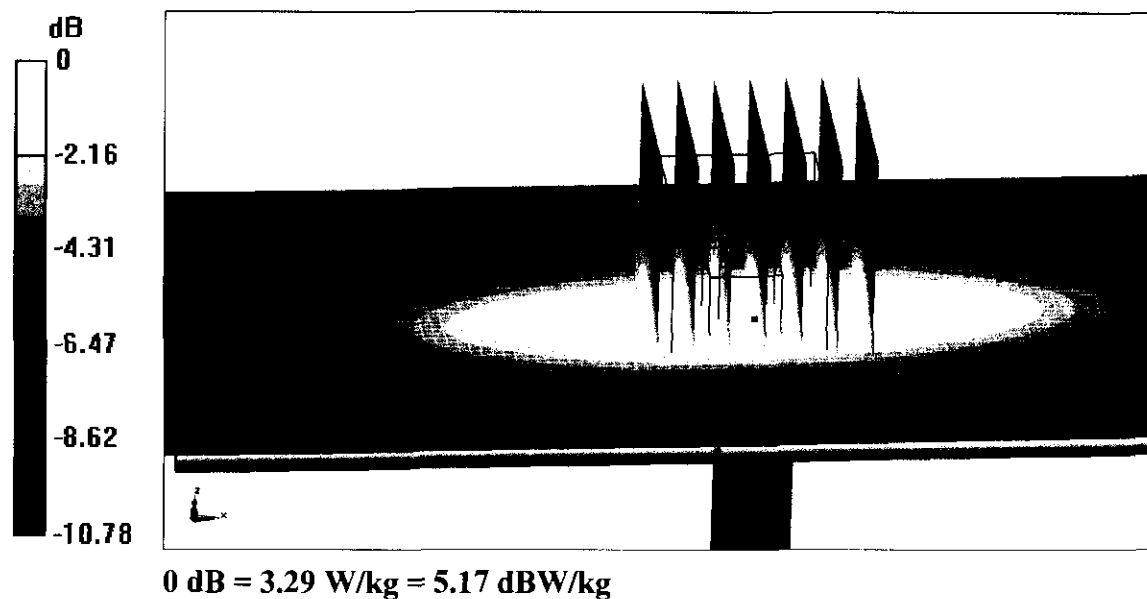



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

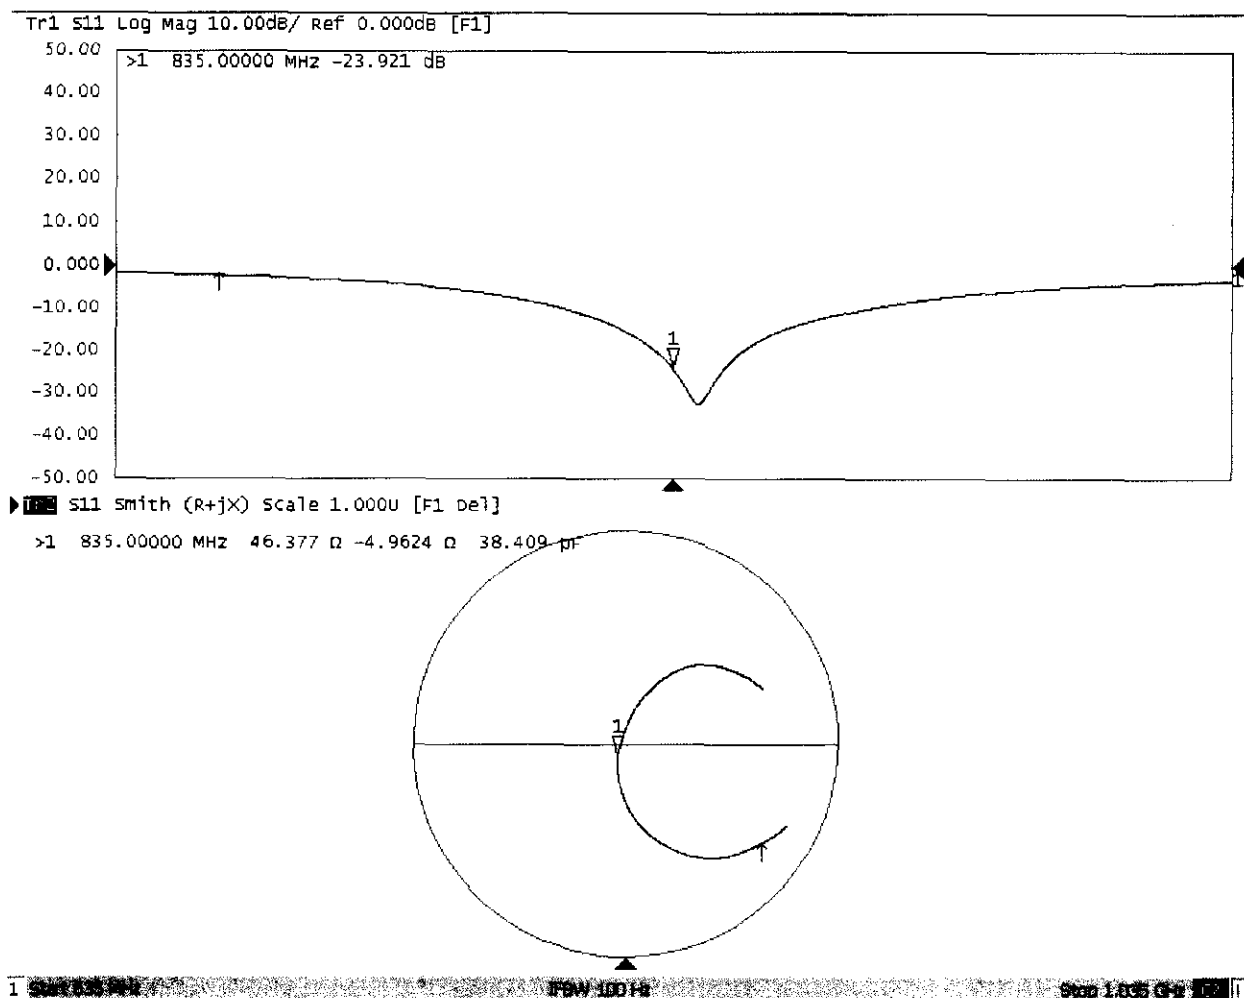



## Dipole Internal Calibration Record

|               |              |                      |              |                  |              |
|---------------|--------------|----------------------|--------------|------------------|--------------|
| Asset No. :   | E-437        | Model No. :          | D835V2       | Serial No. :     | 4d160        |
| Environmental | 23.2°C, 53 % | Original Cal. Date : | June 5, 2018 | Next Cal. Date : | June 5, 2021 |

### Standard List


|   |                    |                                                                                                                                                                                            |
|---|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | IEEE Std 1528-2013 | IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate(SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013 |
| 2 | IEC 62209-2        | Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), March 2010     |
| 3 | KDB865664          | SAR Measurement Requirements for 100 MHz to 6 GHz                                                                                                                                          |

### Equipment Information


|                          |                |             |              |                    |                    |
|--------------------------|----------------|-------------|--------------|--------------------|--------------------|
| Equipment :              | Manufacturer : | Model No. : | Serial No. : | Cal.Organization : | Cal. Date :        |
| Power Amplifier          | Mini-Circuits  | ZHL-42W+    | QA1333003    | NA                 | February 25, 2019  |
| DC Source                | Iteck          | OT6154      | M00157       | NA                 | August 3, 2019     |
| P-series power meter     | Agilent        | N1911A      | MY45100473   | NA                 | September 23, 2019 |
| wideband power sensor    | Agilent        | N1921A      | MY51100041   | NA                 | September 23, 2019 |
| Smart Power Sensor       | R&S            | NRP-Z21     | 102209       | NA                 | March 1, 2019      |
| Dual directional coupler | Woken          | TS-PCC0M-05 | 107090019    | NA                 | March 10, 2019     |
| Signal Generator         | Agilent        | E4438C      | MY4907131    | NA                 | Mar. 10, 2019      |
| ENA Network Analyzer     | Agilent        | E5071C      | MY46102965   | NA                 | March 10, 2019     |


| Model No | For Head Tissue                      |                               |                                 |             |        |
|----------|--------------------------------------|-------------------------------|---------------------------------|-------------|--------|
| D835V2   | Item                                 | Originak Cal. Result          | Verified on 2019/12/2           | Deviation   | Result |
|          | Impedance, transformed to feed point | 51.0 $\Omega$ -3.97j $\Omega$ | 50.105 $\Omega$ -5.50j $\Omega$ | <5 $\Omega$ | Pass   |
|          | Return Loss(dB)                      | -27.9                         | -26.025                         | -6.7%       | Pass   |
|          | SAR Value for 1g(mW/g)               | 2.25                          | 2.4                             | 6.7%        | Pass   |
|          | SAR Value for 10g(mW/g)              | 1.47                          | 1.46                            | -0.7%       | Pass   |
|          | For Body Tissue                      |                               |                                 |             |        |
|          | Item                                 | Originak Cal. Result          | Verified on 2019/12/2           | Deviation   | Result |
|          | Impedance, transformed to feed point | 46.4 $\Omega$ -4.96j $\Omega$ | 47.9 $\Omega$ -5.88j $\Omega$   | <5 $\Omega$ | Pass   |
|          | Return Loss(dB)                      | -23.9                         | -22.981                         | -3.8%       | Pass   |
|          | SAR Value for 1g(mW/g)               | 2.42                          | 2.4                             | -0.8%       | Pass   |
|          | SAR Value for 10g(mW/g)              | 1.57                          | 1.53                            | -2.5%       | Pass   |

### Impedance Test-Head

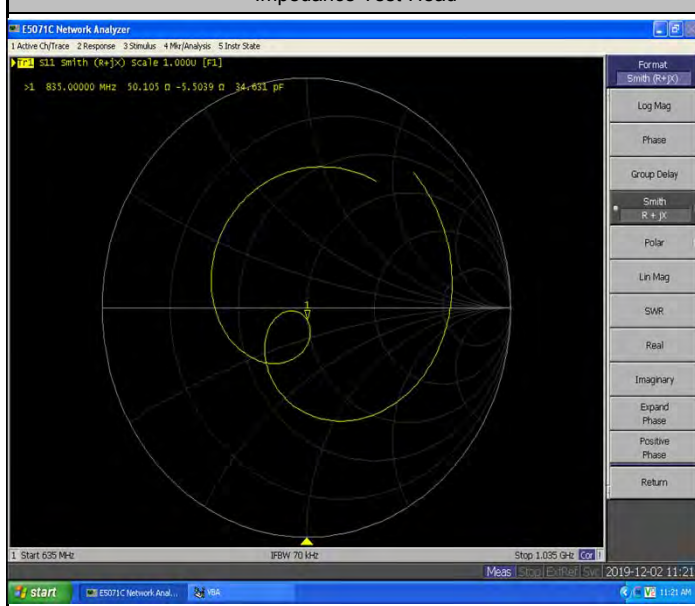

### Return Loss-Head

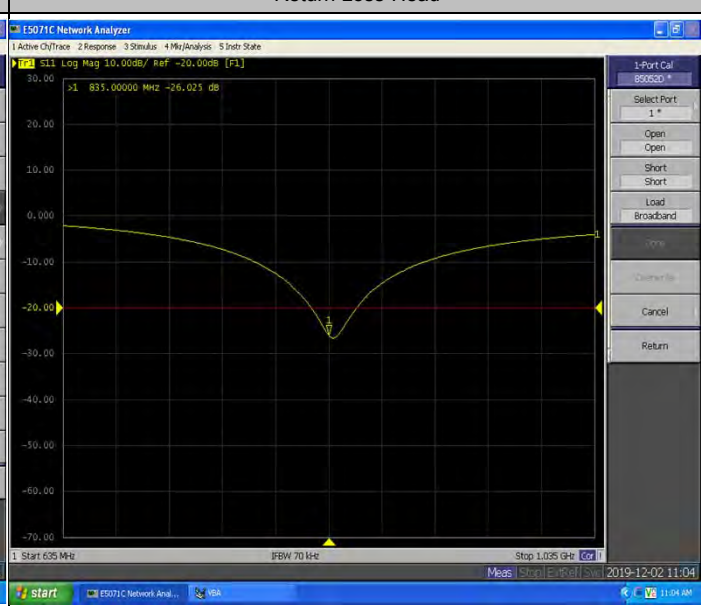

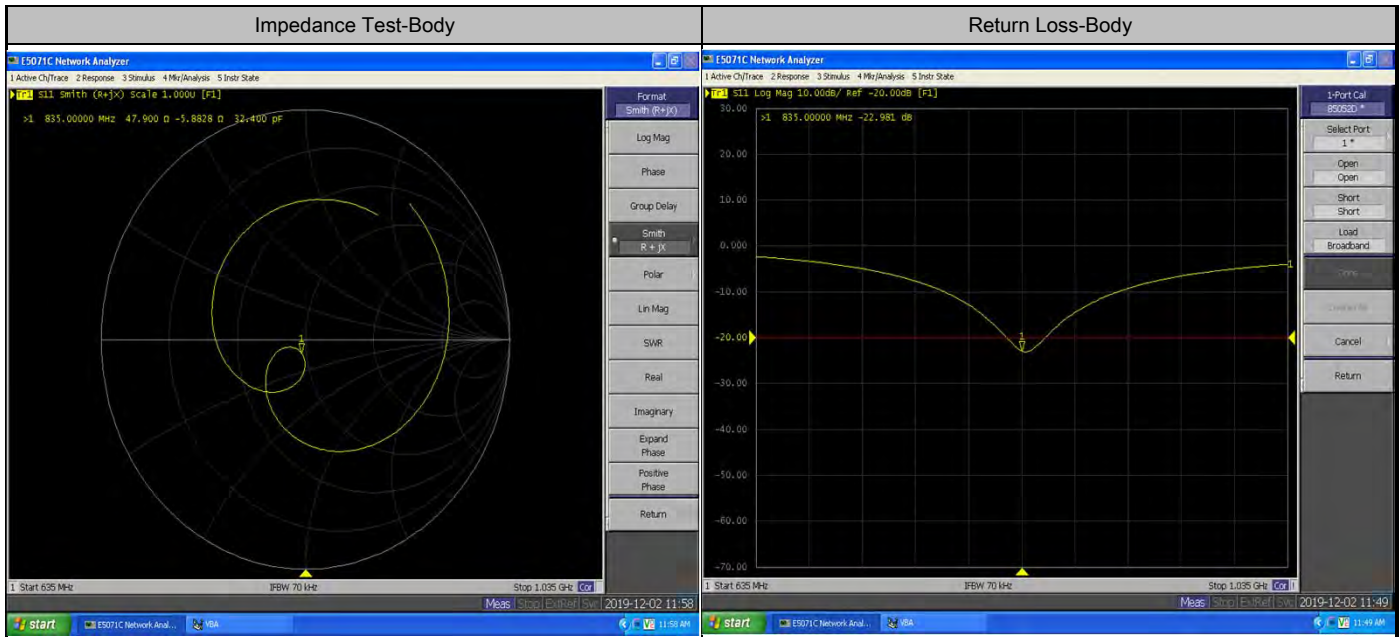

| Validation Report for Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Validation Report for Body TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Laboratory: BTL Inc.      Date: 2019/12/02</p> <p><b>System Check_H835_1202</b></p> <p>DUT: Dipole 835 MHz D835V2;</p> <p>Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1</p> <p>Medium parameters used: <math>f = 835</math> MHz; <math>\sigma = 0.935</math> S/m; <math>\epsilon_r = 42.915</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7544; ConvF(10.14, 10.14, 10.14) @ 835 MHz; Calibrated: 2019/9/9</li><li>Sensor-Surface: 4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li><li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li><li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li><li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li></ul> <p>Area Scan (7x14x1): Interpolated grid: dx=15 mm, dy=15 mm</p> <p>Maximum value of SAR (interpolated) = 3.47 W/kg</p> <p>Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm</p> <p>Reference Value = 57.69 V/m; Power Drift = -0.05 dB</p> <p>Peak SAR (extrapolated) = 4.05 W/kg</p> <p>SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.46 W/kg</p> <p>Maximum value of SAR (measured) = 3.49 W/kg</p> <div><div>W/kg</div><div>3.490</div><div>2.835</div><div>2.179</div><div>1.524</div><div>0.868</div><div>0.213</div></div> <div></div> | <p>Test Laboratory: BTL Inc.      Date: 2019/12/02</p> <p><b>System Check_B835_1202</b></p> <p>DUT: Dipole 835 MHz D835V2;</p> <p>Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1</p> <p>Medium parameters used: <math>f = 835</math> MHz; <math>\sigma = 0.949</math> S/m; <math>\epsilon_r = 53.827</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7544; ConvF(10.12, 10.12, 10.12) @ 835 MHz; Calibrated: 2019/9/9</li><li>Sensor-Surface: 4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li><li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li><li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li><li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li></ul> <p>Area Scan (7x14x1): Interpolated grid: dx=15 mm, dy=15 mm</p> <p>Maximum value of SAR (interpolated) = 3.43 W/kg</p> <p>Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm</p> <p>Reference Value = 57.59 V/m; Power Drift = -0.05 dB</p> <p>Peak SAR (extrapolated) = 3.95 W/kg</p> <p>SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.53 W/kg</p> <p>Maximum value of SAR (measured) = 3.44 W/kg</p> <div><div>W/kg</div><div>3.440</div><div>2.795</div><div>2.150</div><div>1.506</div><div>0.861</div><div>0.216</div></div> <div></div> |

Calibrator: *Rot - Liang*

Approver: *Herbert Lin*



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cnClient **BTL Inc .**Certificate No: **Z18-60179****CALIBRATION CERTIFICATE**Object **D1750V2 - SN: 1101**Calibration Procedure(s) **FF-Z11-003-01**  
Calibration Procedures for dipole validation kitsCalibration date: **June 7, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&amp;TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD        | 102083     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Power sensor NRV-Z5     | 100542     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Reference Probe EX3DV4  | SN 7464    | 12-Sep-17(SPEAG,No.EX3-7464_Sep17)       | Sep-18                |
| DAE4                    | SN 1525    | 02-Oct-17(SPEAG,No.DAE4-1525_Oct17)      | Oct-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560)           | Jan-19                |
| NetworkAnalyzer E5071C  | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561)           | Jan-19                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: June 11, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

#### **Glossary:**

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

#### **Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- d) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

#### **Additional Documentation:**

- e) DASY4/5 System Handbook

#### **Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com http://www.chinattl.cn

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                                     |                          |              |
|-------------------------------------|--------------------------|--------------|
| <b>DASY Version</b>                 | DASY52                   | 52.10.1.1476 |
| <b>Extrapolation</b>                | Advanced Extrapolation   |              |
| <b>Phantom</b>                      | Triple Flat Phantom 5.1C |              |
| <b>Distance Dipole Center - TSL</b> | 10 mm                    | with Spacer  |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm        |              |
| <b>Frequency</b>                    | 1750 MHz $\pm$ 1 MHz     |              |

**Head TSL parameters**

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 40.1           | 1.37 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 41.2 $\pm$ 6 % | 1.33 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | <1.0 °C             | ----           | ----                 |

**SAR result with Head TSL**

|                                                               |                    |                                |
|---------------------------------------------------------------|--------------------|--------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>   | Condition          |                                |
| SAR measured                                                  | 250 mW input power | 9.04 mW / g                    |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | 37.0 mW / g $\pm$ 18.8 % (k=2) |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                |
| SAR measured                                                  | 250 mW input power | 4.90 mW / g                    |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | 19.9 mW / g $\pm$ 18.7 % (k=2) |

**Body TSL parameters**

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 53.4           | 1.49 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 52.0 $\pm$ 6 % | 1.53 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | <1.0 °C             | ----           | ----                 |

**SAR result with Body TSL**

|                                                               |                    |                                |
|---------------------------------------------------------------|--------------------|--------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>   | Condition          |                                |
| SAR measured                                                  | 250 mW input power | 9.57 mW / g                    |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | 37.4 mW / g $\pm$ 18.8 % (k=2) |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | Condition          |                                |
| SAR measured                                                  | 250 mW input power | 5.11 mW / g                    |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | 20.1 mW / g $\pm$ 18.7 % (k=2) |



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 49.8Ω- 2.69 jΩ |
| Return Loss                          | - 31.4 dB      |

### Antenna Parameters with Body TSL

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 46.3Ω- 2.68 jΩ |
| Return Loss                          | - 26.5 dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.085 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Head TSL

Date: 06.07.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1101**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.332$  S/m;  $\epsilon_r = 41.23$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(8.7, 8.7, 8.7) @ 1750 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:**


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 96.28 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.5 W/kg

**SAR(1 g) = 9.04 W/kg; SAR(10 g) = 4.9 W/kg**

Maximum value of SAR (measured) = 13.8 W/kg

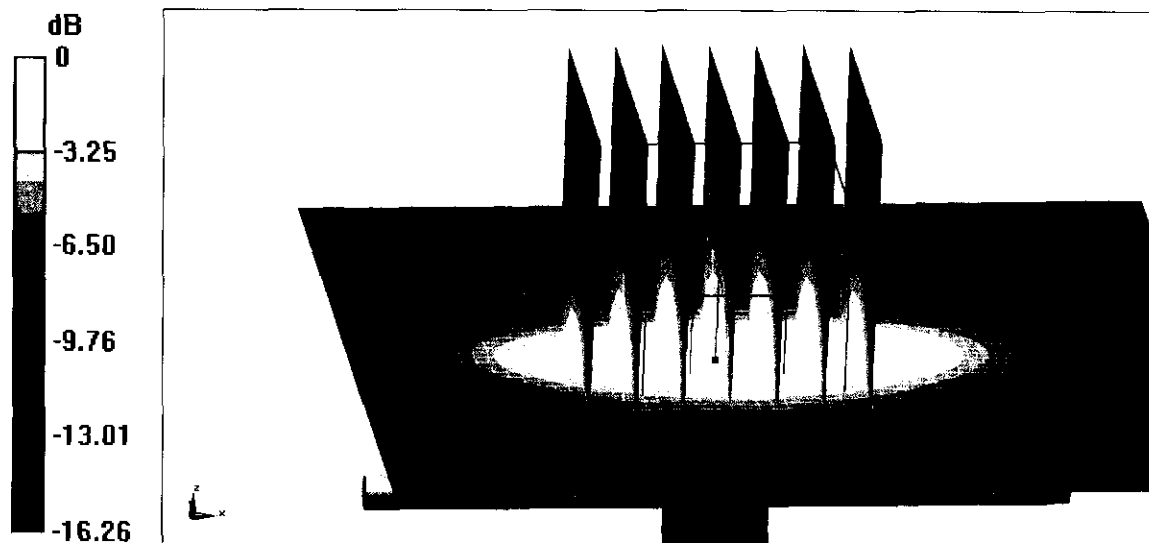

**0 dB = 13.8 W/kg = 11.40 dBW/kg**



In Collaboration with

**s p e a k**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

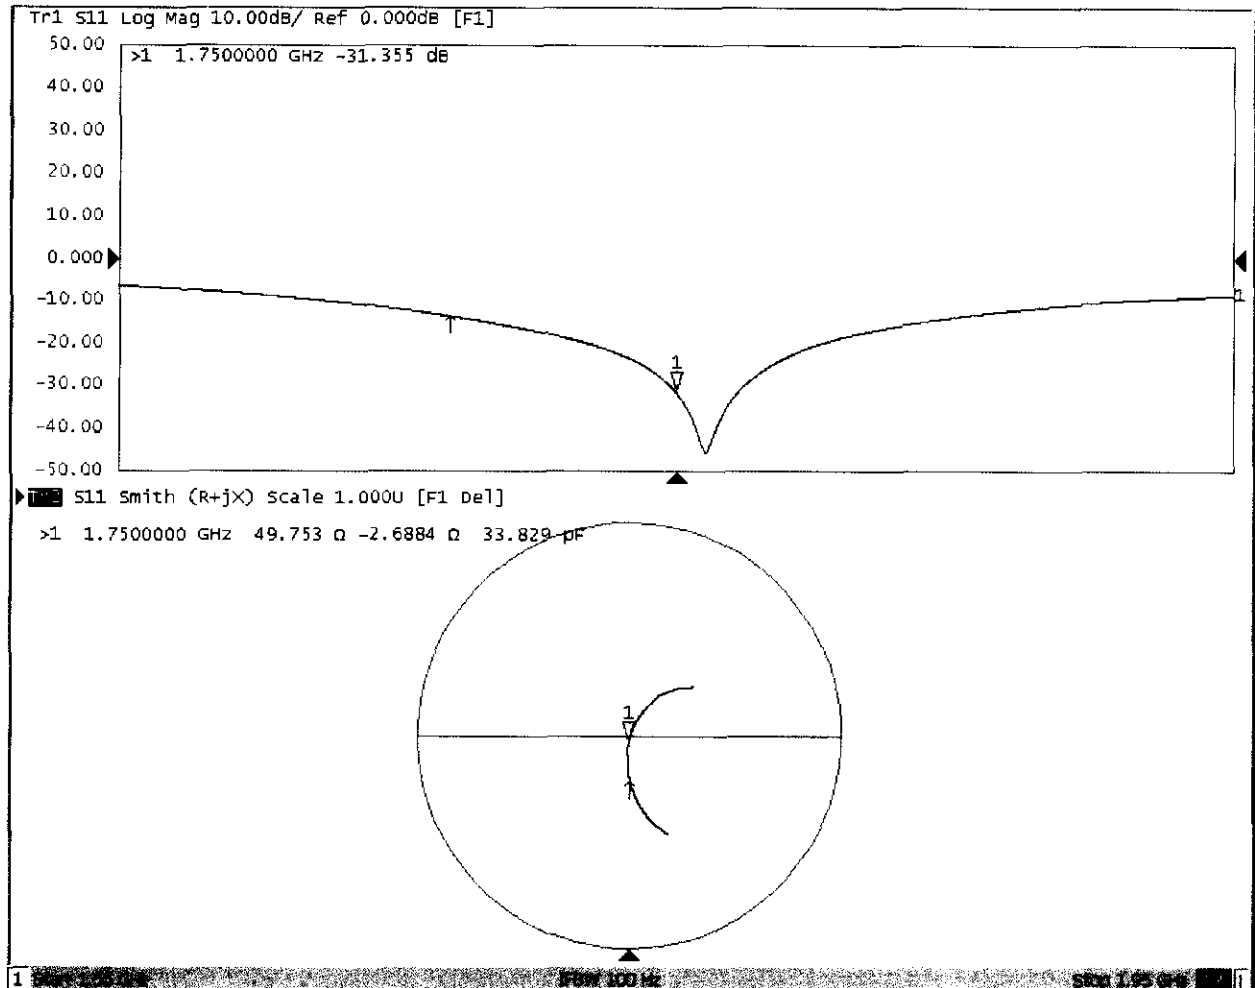



In Collaboration with

**s p e a k**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Body TSL

Date: 06.06.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1101**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.533$  S/m;  $\epsilon_r = 51.99$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(8.6, 8.6, 8.6) @ 1750 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:**


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 82.09 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.3 W/kg

**SAR(1 g) = 9.57 W/kg; SAR(10 g) = 5.11 W/kg**

Maximum value of SAR (measured) = 14.6 W/kg

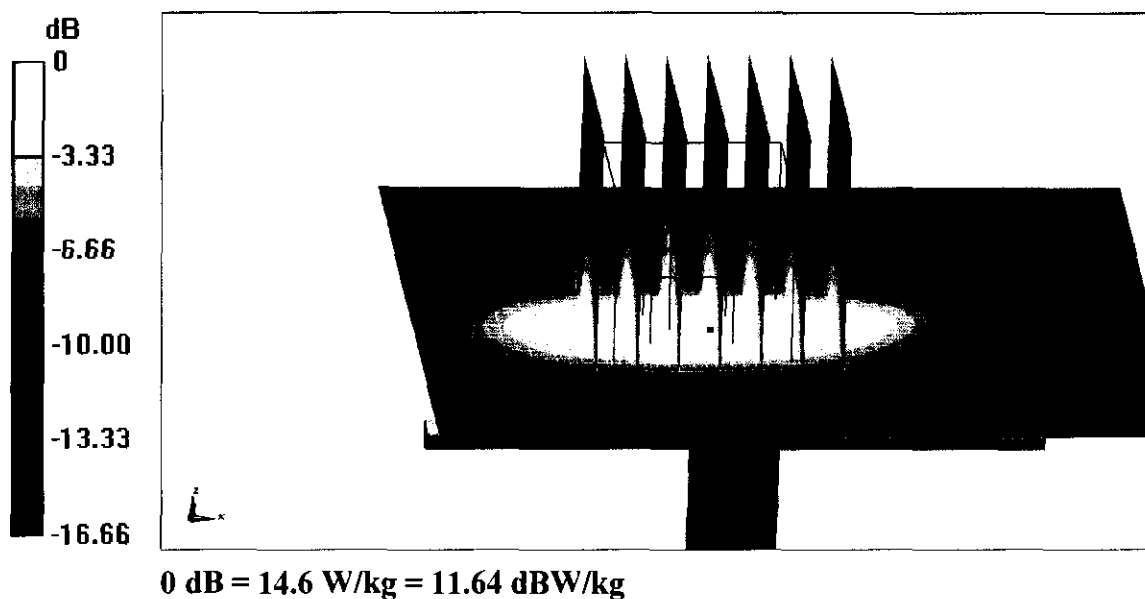



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

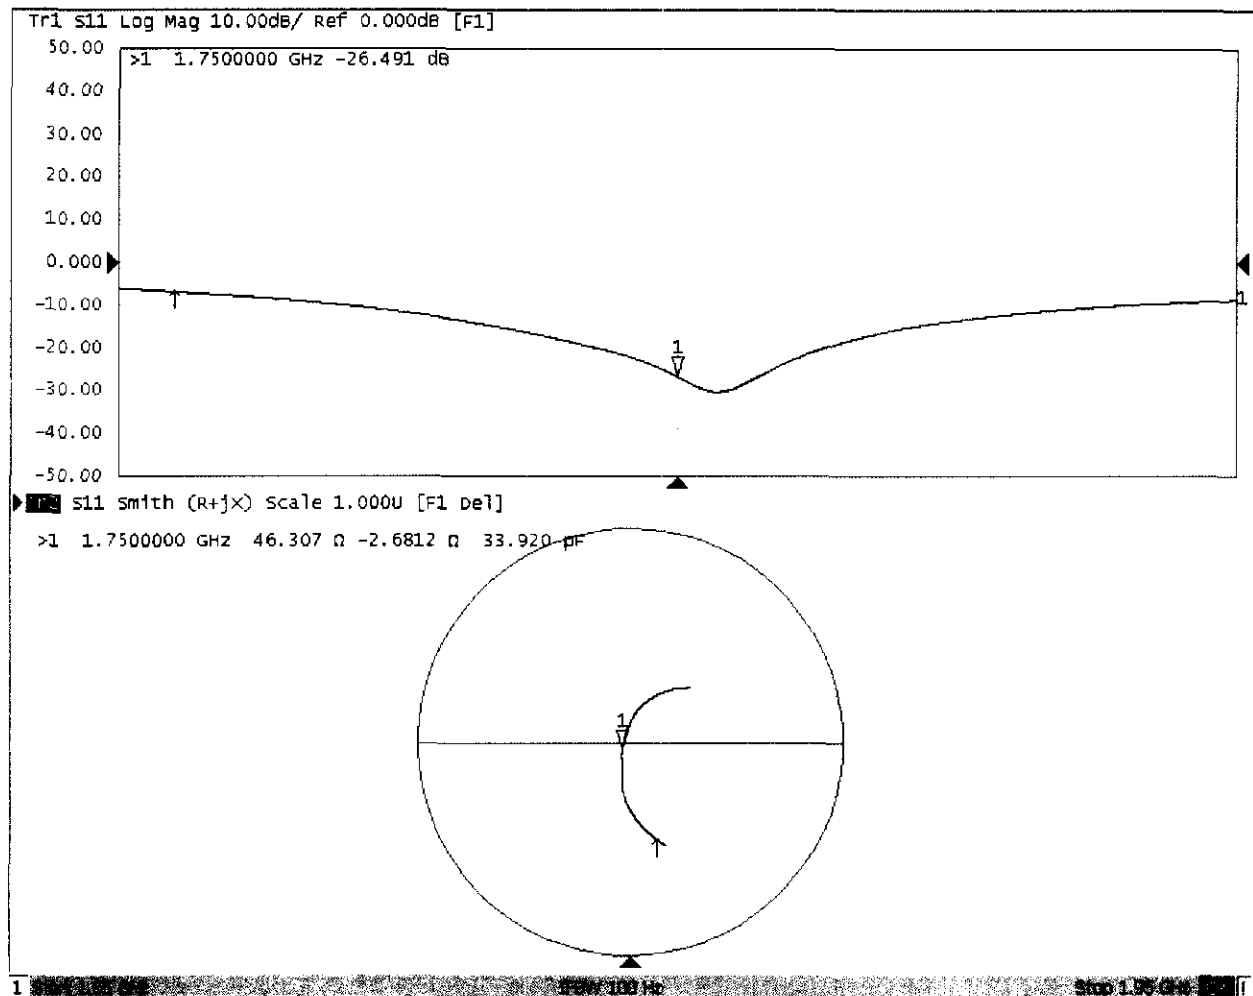



## Dipole Internal Calibration Record

|               |              |                      |              |                  |              |
|---------------|--------------|----------------------|--------------|------------------|--------------|
| Asset No. :   | E-438        | Model No. :          | D1750V2      | Serial No. :     | 1101         |
| Environmental | 23.2°C, 51 % | Original Cal. Date : | June 7, 2018 | Next Cal. Date : | June 7, 2021 |

### Standard List


|   |                    |                                                                                                                                                                                            |
|---|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | IEEE Std 1528-2013 | IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate(SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013 |
| 2 | IEC 62209-2        | Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), March 2010     |
| 3 | KDB865664          | SAR Measurement Requirements for 100 MHz to 6 GHz                                                                                                                                          |

### Equipment Information


|                          |                |             |              |                    |                    |
|--------------------------|----------------|-------------|--------------|--------------------|--------------------|
| Equipment :              | Manufacturer : | Model No. : | Serial No. : | Cal.Organization : | Cal. Date :        |
| Power Amplifier          | Mini-Circuits  | ZHL-42W+    | QA1333003    | NA                 | February 25, 2019  |
| DC Source                | Iteck          | OT6154      | M00157       | NA                 | August 3, 2019     |
| P-series power meter     | Agilent        | N1911A      | MY45100473   | NA                 | September 23, 2019 |
| wideband power sensor    | Agilent        | N1921A      | MY51100041   | NA                 | September 23, 2019 |
| Smart Power Sensor       | R&S            | NRP-Z21     | 102209       | NA                 | March 1, 2019      |
| Dual directional coupler | Woken          | TS-PCC0M-05 | 107090019    | NA                 | March 10, 2019     |
| Signal Generator         | Agilent        | E4438C      | MY4907131    | NA                 | Mar. 10, 2019      |
| ENA Network Analyzer     | Agilent        | E5071C      | MY46102965   | NA                 | March 10, 2019     |


| Model No | For Head Tissue                      |                      |                       |           |        |
|----------|--------------------------------------|----------------------|-----------------------|-----------|--------|
| D1750V2  | Item                                 | Original Cal. Result | Verified on 2019/12/2 | Deviation | Result |
|          | Impedance, transformed to feed point | 49.8Ω-2.69jΩ         | 49.664Ω-2.42jΩ        | <5Ω       | Pass   |
|          | Return Loss(dB)                      | -31.4                | -31.676               | 0.9%      | Pass   |
|          | SAR Value for 1g(mW/g)               | 9.04                 | 9.14                  | 1.1%      | Pass   |
|          | SAR Value for 10g(mW/g)              | 4.9                  | 4.8                   | -2.0%     | Pass   |
|          | For Body Tissue                      |                      |                       |           |        |
|          | Item                                 | Original Cal. Result | Verified on 2019/12/2 | Deviation | Result |
|          | Impedance, transformed to feed point | 46.3Ω-2.68jΩ         | 47.186Ω-1.54jΩ        | <5Ω       | Pass   |
|          | Return Loss(dB)                      | -26.5                | -26.412               | -0.3%     | Pass   |
|          | SAR Value for 1g(mW/g)               | 9.57                 | 9.73                  | 1.7%      | Pass   |
|          | SAR Value for 10g(mW/g)              | 5.11                 | 5.16                  | 1.0%      | Pass   |

### Impedance Test-Head

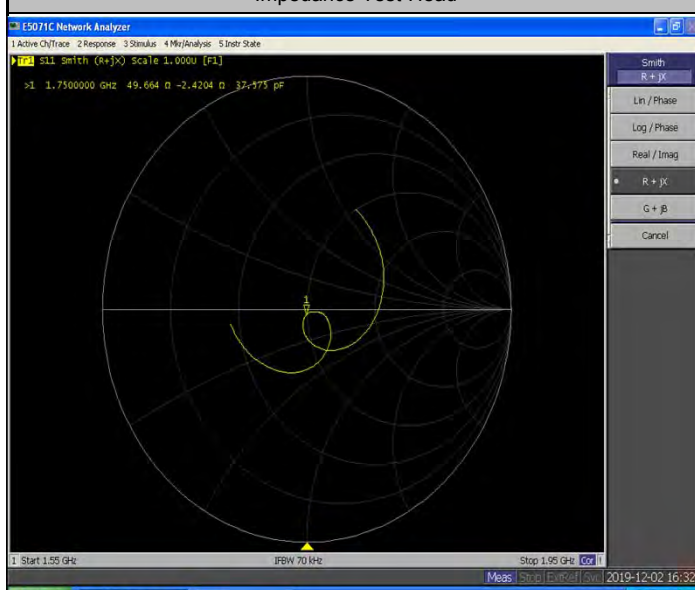

### Return Loss-Head

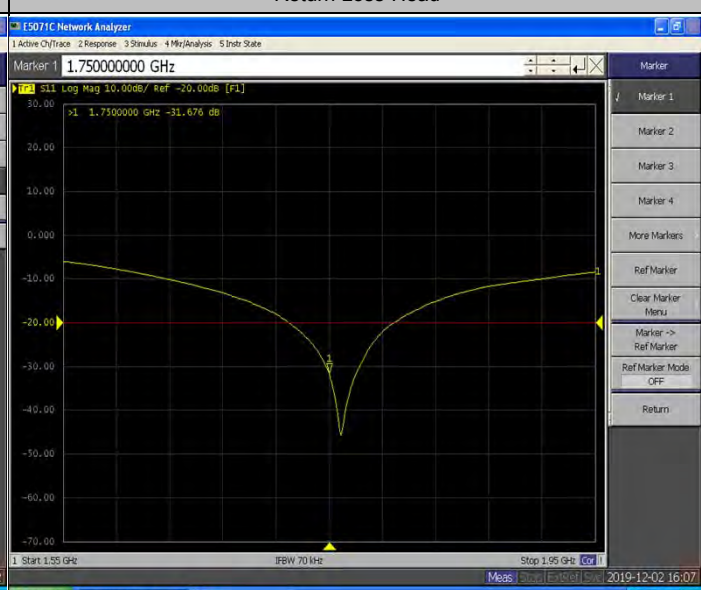

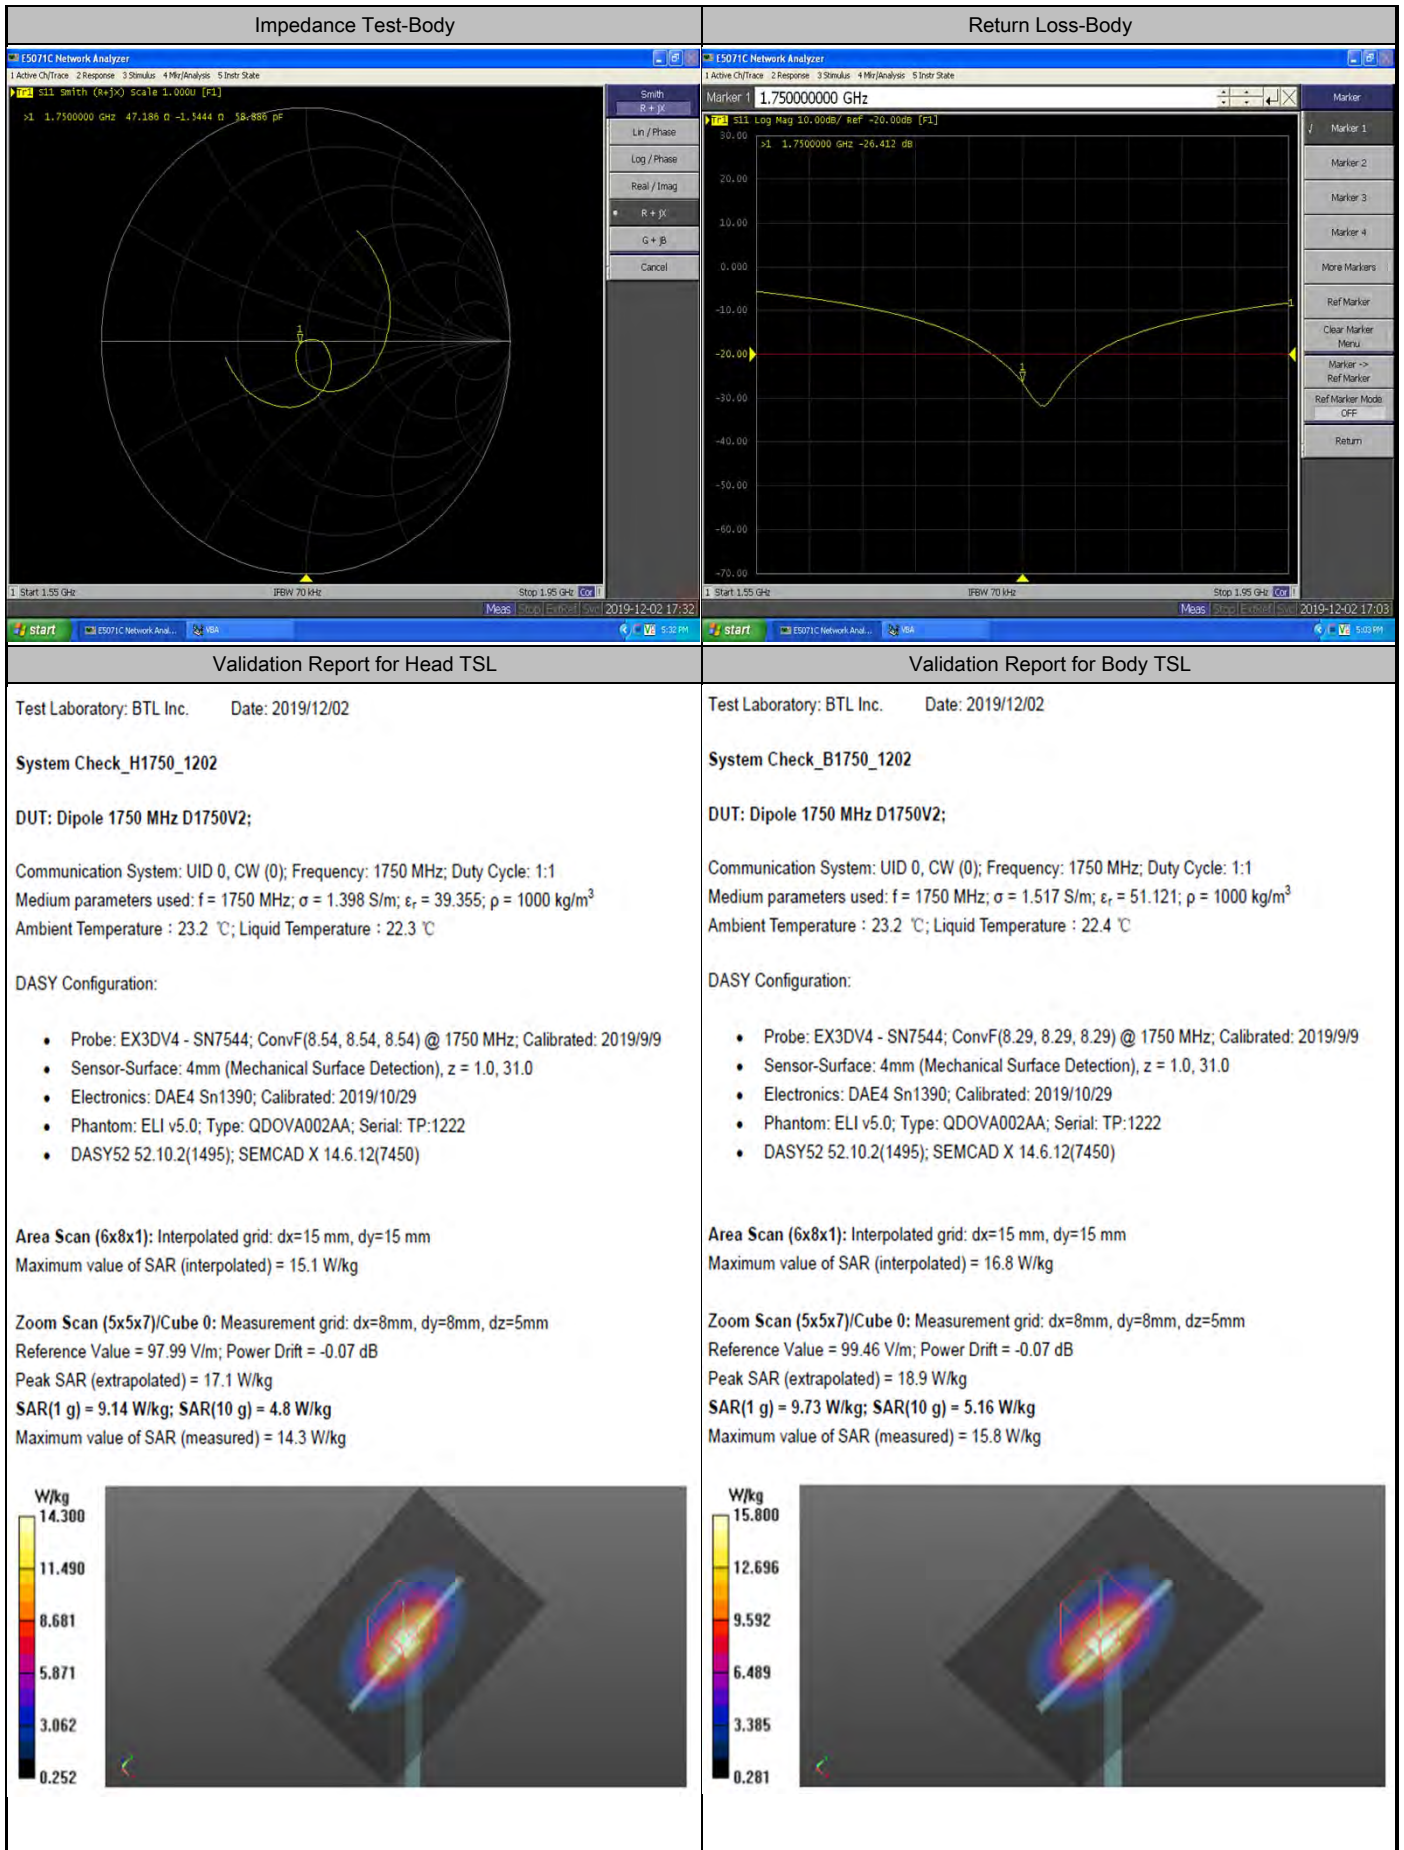

Calibrator: *Rot - Liang*

Approver: *Herbert Lin*



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **BTL Inc .**

Certificate No: **Z18-60180**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d179**

Calibration Procedure(s) **FF-Z11-003-01**  
**Calibration Procedures for dipole validation kits**

Calibration date: **June 7, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD        | 102083     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Power sensor NRV-Z5     | 100542     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Reference Probe EX3DV4  | SN 7464    | 12-Sep-17(SPEAG,No.EX3-7464_Sep17)       | Sep-18                |
| DAE4                    | SN 1525    | 02-Oct-17(SPEAG,No.DAE4-1525_Oct17)      | Oct-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560)           | Jan-19                |
| NetworkAnalyzer E5071C  | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561)           | Jan-19                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: June 11, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a k**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

#### **Glossary:**

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

#### **Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

#### **Additional Documentation:**

- DASY4/5 System Handbook

#### **Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com http://www.chinattl.cn

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                                     |                          |              |
|-------------------------------------|--------------------------|--------------|
| <b>DASY Version</b>                 | DASY52                   | 52.10.1.1476 |
| <b>Extrapolation</b>                | Advanced Extrapolation   |              |
| <b>Phantom</b>                      | Triple Flat Phantom 5.1C |              |
| <b>Distance Dipole Center - TSL</b> | 10 mm                    | with Spacer  |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm        |              |
| <b>Frequency</b>                    | 1900 MHz $\pm$ 1 MHz     |              |

**Head TSL parameters**

The following parameters and calculations were applied.

|                                                | <b>Temperature</b>  | <b>Permittivity</b> | <b>Conductivity</b>  |
|------------------------------------------------|---------------------|---------------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 40.0                | 1.40 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 41.2 $\pm$ 6 %      | 1.44 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | <1.0 °C             | ----                | ----                 |

**SAR result with Head TSL**

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>   | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 9.96 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>39.5 mW / g <math>\pm</math> 18.8 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 5.21 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>20.7 mW / g <math>\pm</math> 18.7 % (k=2)</b> |

**Body TSL parameters**

The following parameters and calculations were applied.

|                                                | <b>Temperature</b>  | <b>Permittivity</b> | <b>Conductivity</b>  |
|------------------------------------------------|---------------------|---------------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 53.3                | 1.52 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 51.8 $\pm$ 6 %      | 1.57 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | <1.0 °C             | ----                | ----                 |

**SAR result with Body TSL**

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>   | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 10.2 mW / g                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>39.8 mW / g <math>\pm</math> 18.8 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 5.29 mW / g                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>20.8 mW / g <math>\pm</math> 18.7 % (k=2)</b> |



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 50.9Ω+ 3.19jΩ |
| Return Loss                          | - 29.7dB      |

### Antenna Parameters with Body TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 47.2Ω+ 3.99jΩ |
| Return Loss                          | - 26.0dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.065 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Date: 06.06.2018

## DASY5 Validation Report for Head TSL

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d179**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.438$  S/m;  $\epsilon_r = 41.15$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(8.39, 8.39, 8.39) @ 1900 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:**


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 95.41 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 18.8 W/kg

**SAR(1 g) = 9.96 W/kg; SAR(10 g) = 5.21 W/kg**

Maximum value of SAR (measured) = 15.5 W/kg

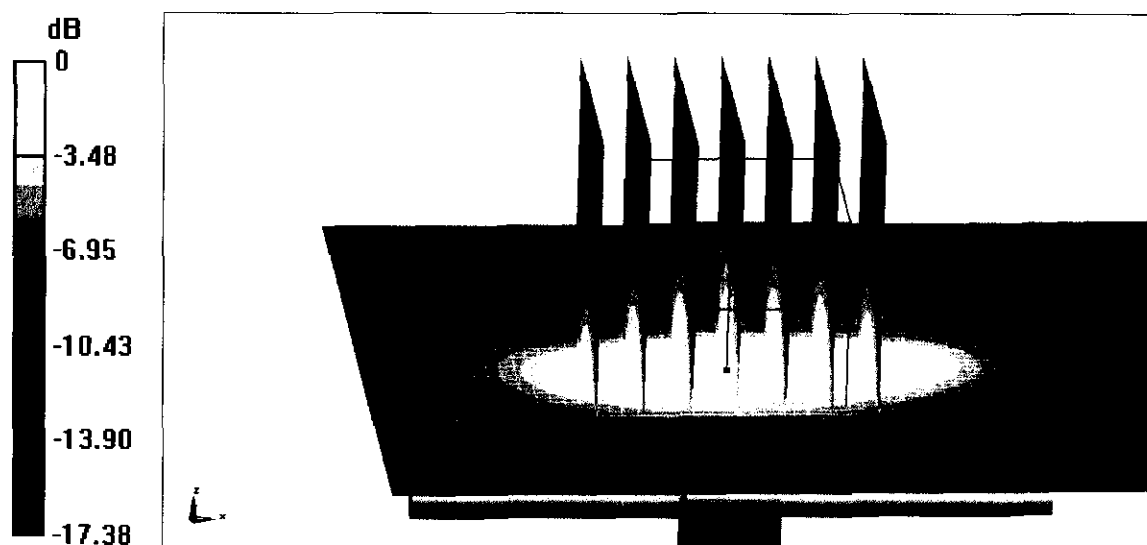

**0 dB = 15.5 W/kg = 11.90 dBW/kg**



In Collaboration with

**s p e a k**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

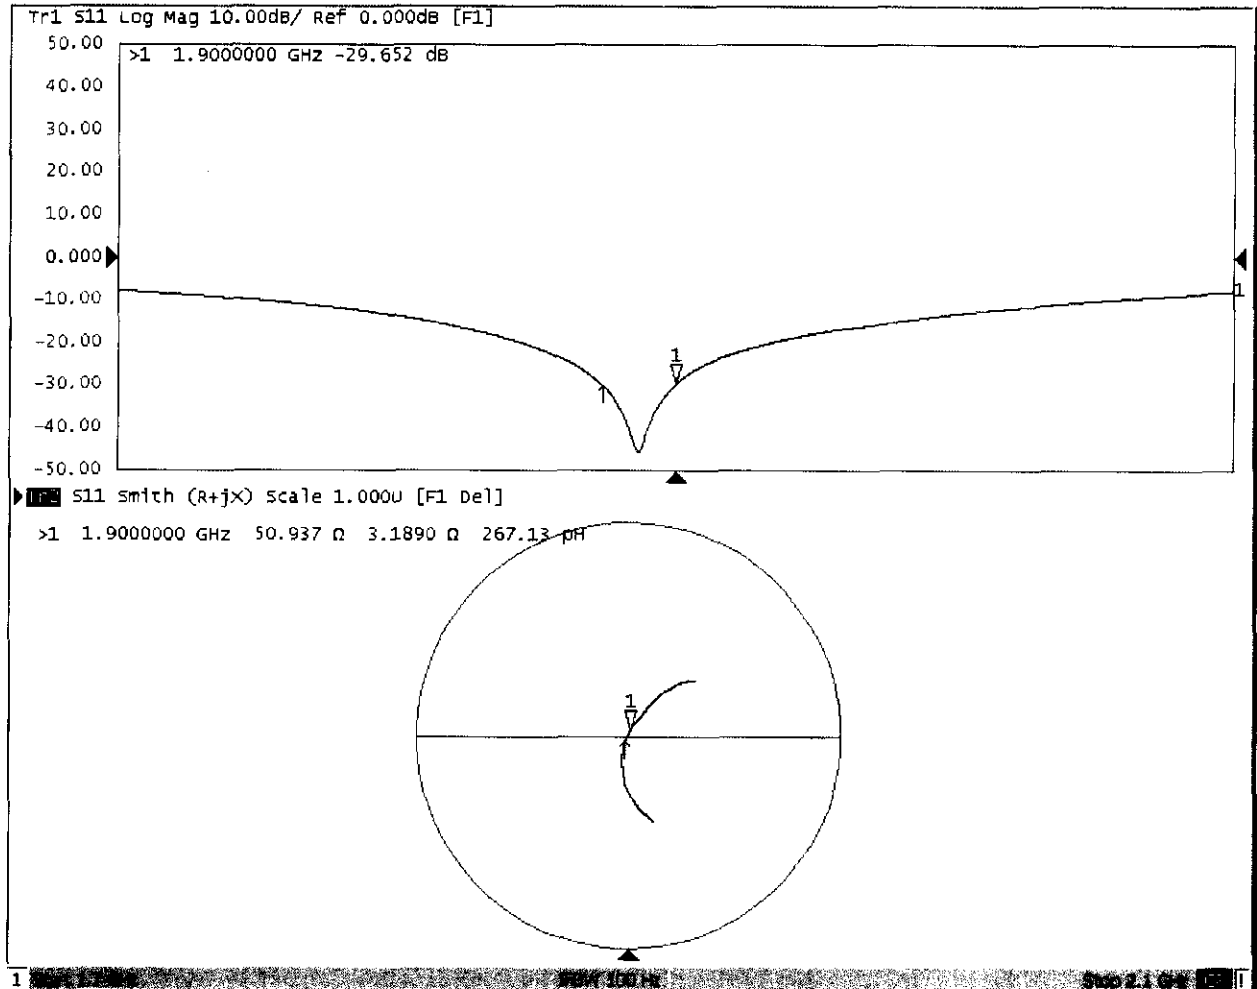



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## DASY5 Validation Report for Body TSL

Date: 06.06.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d179**

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.565$  S/m;  $\epsilon_r = 51.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(8.32, 8.32, 8.32) @ 1900 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439) )

**System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 87.58 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 19.1 W/kg

**SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.29 W/kg**

Maximum value of SAR (measured) = 15.9 W/kg

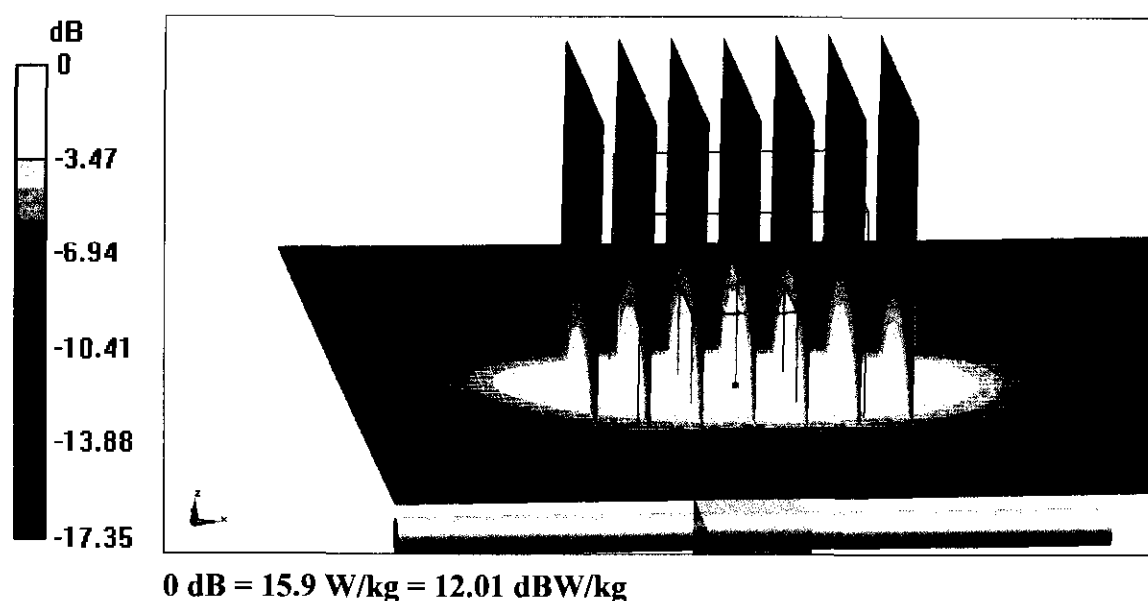



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

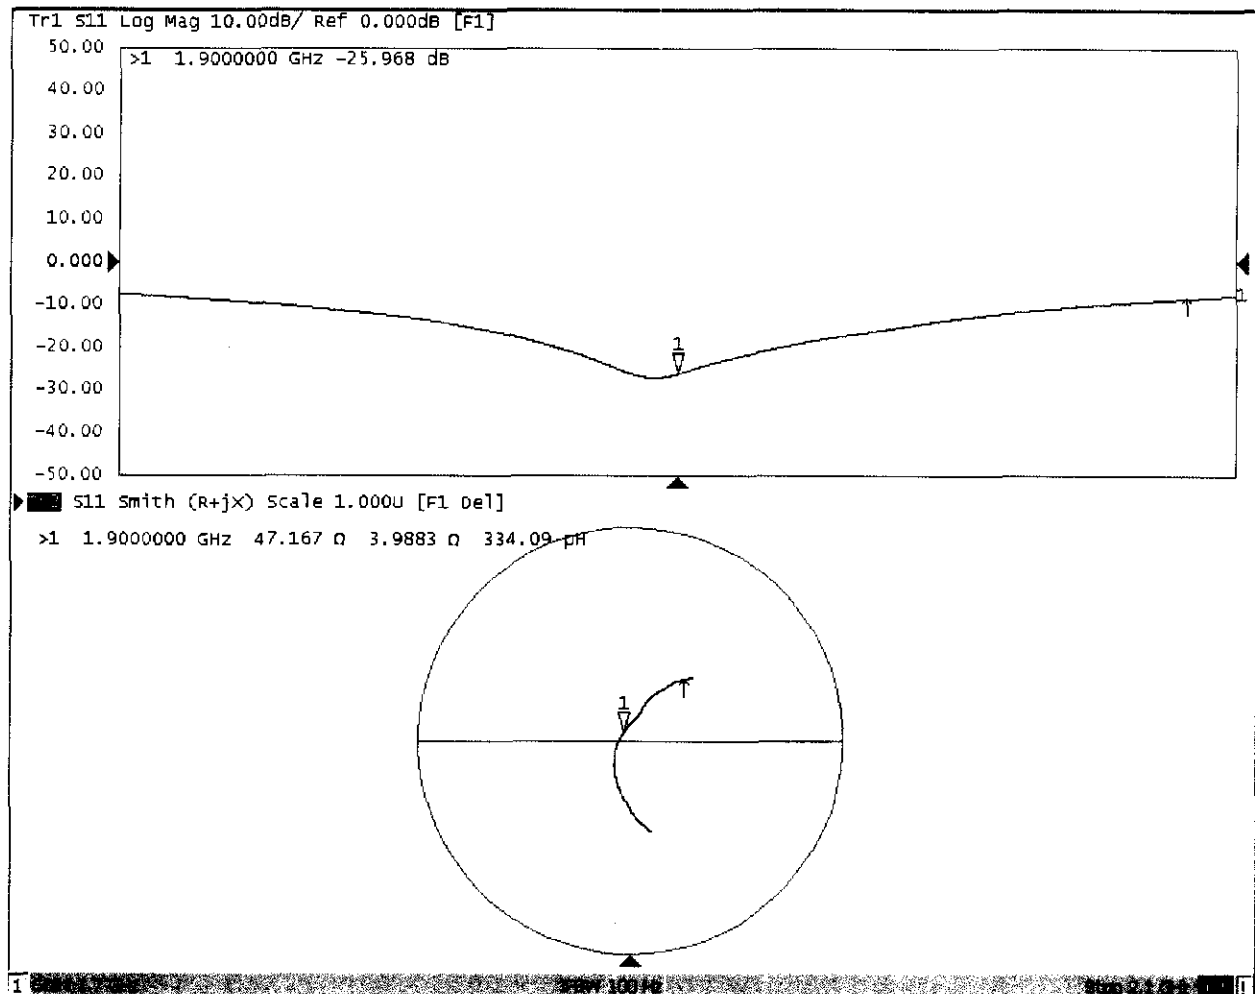



## Dipole Internal Calibration Record

|               |              |                      |              |                  |              |
|---------------|--------------|----------------------|--------------|------------------|--------------|
| Asset No. :   | E-431        | Model No. :          | D1900V2      | Serial No. :     | 5d179        |
| Environmental | 23.2°C, 53 % | Original Cal. Date : | June 7, 2018 | Next Cal. Date : | June 7, 2021 |

### Standard List


|   |                    |                                                                                                                                                                                            |
|---|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | IEEE Std 1528-2013 | IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate(SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013 |
| 2 | IEC 62209-2        | Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), March 2010     |
| 3 | KDB865664          | SAR Measurement Requirements for 100 MHz to 6 GHz                                                                                                                                          |

### Equipment Information


|                          |                |             |              |                    |                    |
|--------------------------|----------------|-------------|--------------|--------------------|--------------------|
| Equipment :              | Manufacturer : | Model No. : | Serial No. : | Cal.Organization : | Cal. Date :        |
| Power Amplifier          | Mini-Circuits  | ZHL-42W+    | QA1333003    | NA                 | February 25, 2019  |
| DC Source                | Iteck          | OT6154      | M00157       | NA                 | August 3, 2019     |
| P-series power meter     | Agilent        | N1911A      | MY45100473   | NA                 | September 23, 2019 |
| wideband power sensor    | Agilent        | N1921A      | MY51100041   | NA                 | September 23, 2019 |
| Smart Power Sensor       | R&S            | NRP-Z21     | 102209       | NA                 | March 1, 2019      |
| Dual directional coupler | Woken          | TS-PCC0M-05 | 107090019    | NA                 | March 10, 2019     |
| Signal Generator         | Agilent        | E4438C      | MY4907131    | NA                 | Mar. 10, 2019      |
| ENA Network Analyzer     | Agilent        | E5071C      | MY46102965   | NA                 | March 10, 2019     |




| Model No | For Head Tissue                      |                      |                       |           |        |
|----------|--------------------------------------|----------------------|-----------------------|-----------|--------|
| D1900V2  | Item                                 | Original Cal. Result | Verified on 2019/12/3 | Deviation | Result |
|          | Impedance, transformed to feed point | 50.9Ω+3.19jΩ         | 50.389Ω+2.26jΩ        | <5Ω       | Pass   |
|          | Return Loss(dB)                      | -29.7                | -29.253               | -1.5%     | Pass   |
|          | SAR Value for 1g(mW/g)               | 9.96                 | 9.46                  | -5.0%     | Pass   |
|          | SAR Value for 10g(mW/g)              | 5.21                 | 4.95                  | -5.0%     | Pass   |
|          | For Body Tissue                      |                      |                       |           |        |
|          | Item                                 | Original Cal. Result | Verified on 2019/12/3 | Deviation | Result |
|          | Impedance, transformed to feed point | 47.2Ω+3.99jΩ         | 46.903Ω+3.48jΩ        | <5Ω       | Pass   |
|          | Return Loss(dB)                      | -26                  | -26.162               | 0.6%      | Pass   |
|          | SAR Value for 1g(mW/g)               | 10.2                 | 10.3                  | 1.0%      | Pass   |
|          | SAR Value for 10g(mW/g)              | 5.29                 | 5.35                  | 1.1%      | Pass   |

### Impedance Test-Head

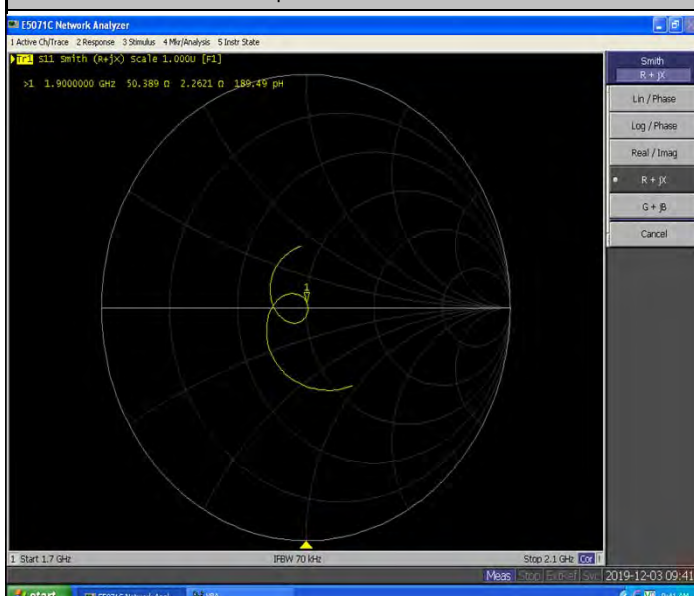

### Return Loss-Head

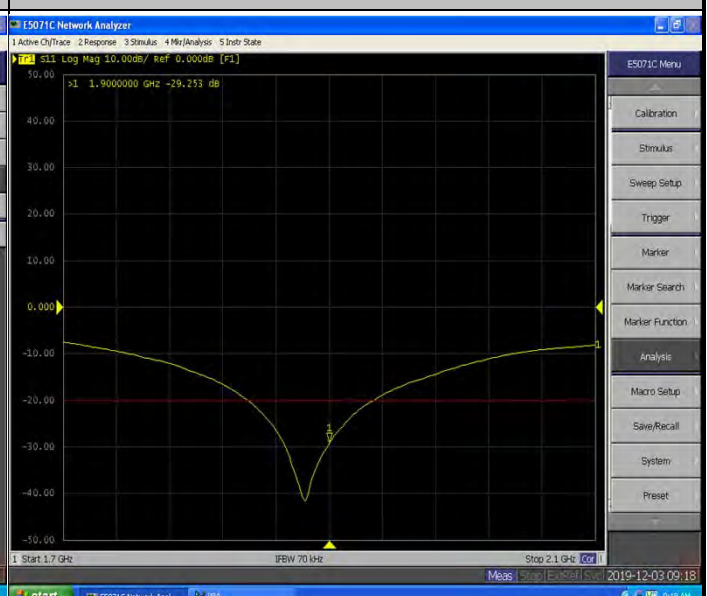

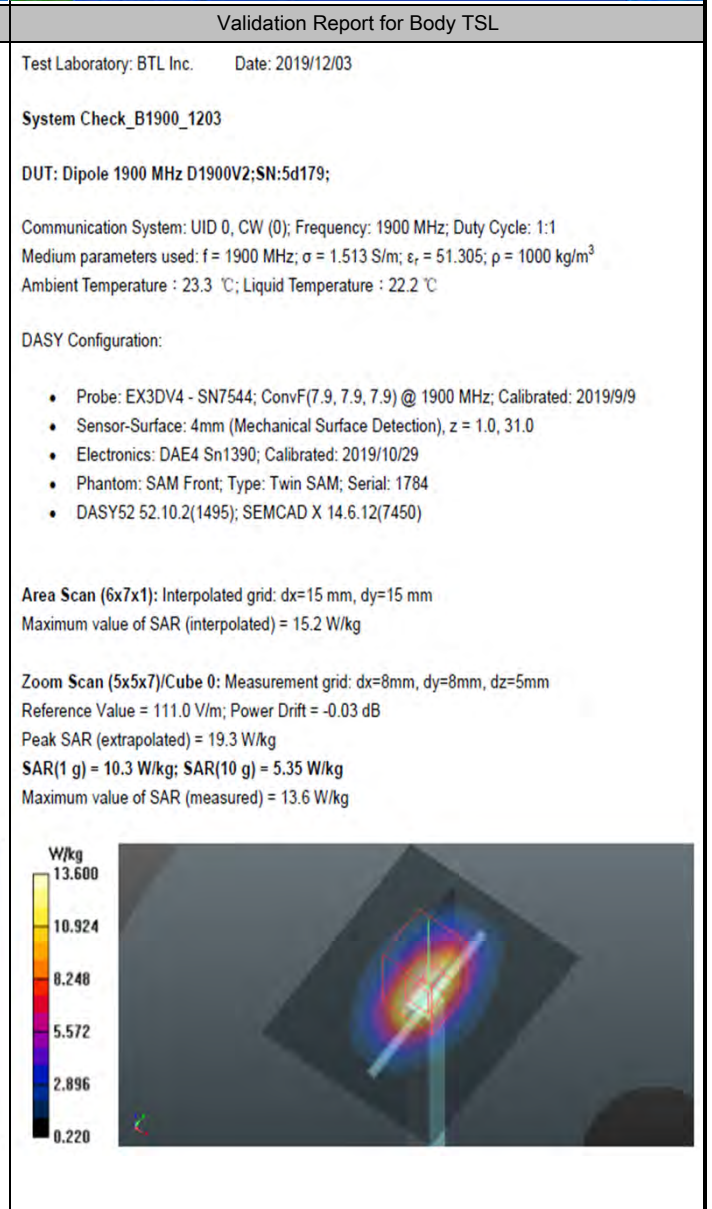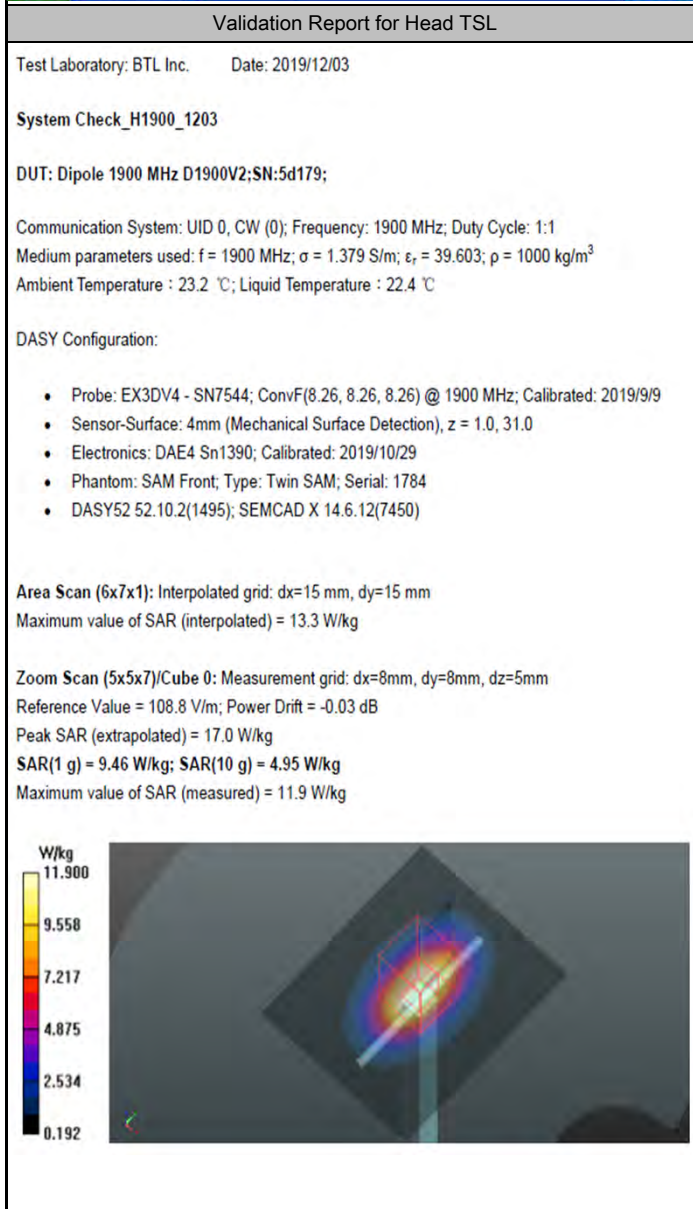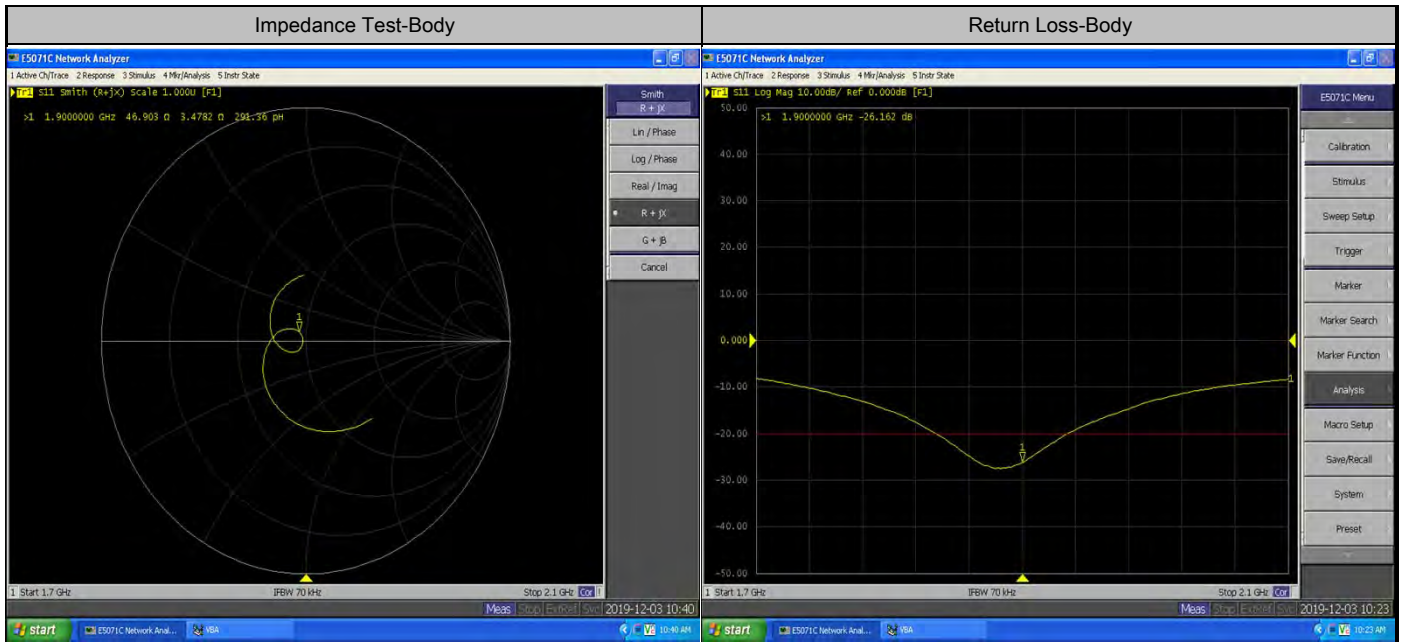

Calibrator:

*Rot - Liang*

Approver:

*Herbert Lin*



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **BTL Inc.**

Certificate No: **Z18-60183**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 919**

Calibration Procedure(s) **FF-Z11-003-01**  
Calibration Procedures for dipole validation kits

Calibration date: **June 11, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD        | 102083     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Power sensor NRV-Z5     | 100542     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Reference Probe EX3DV4  | SN 7464    | 12-Sep-17(SPEAG,No.EX3-7464_Sep17)       | Sep-18                |
| DAE4                    | SN 1525    | 02-Oct-17(SPEAG,No.DAE4-1525_Oct17)      | Oct-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560)           | Jan-19                |
| NetworkAnalyzer E5071C  | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561)           | Jan-19                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: June 13, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Glossary:

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- c) IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- d) KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

### Additional Documentation:

- e) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com http://www.chinattl.cn

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                              |                          |              |
|------------------------------|--------------------------|--------------|
| DASY Version                 | DASY52                   | 52.10.1.1476 |
| Extrapolation                | Advanced Extrapolation   |              |
| Phantom                      | Triple Flat Phantom 5.1C |              |
| Distance Dipole Center - TSL | 10 mm                    | with Spacer  |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm        |              |
| Frequency                    | 2450 MHz $\pm$ 1 MHz     |              |

**Head TSL parameters**

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 40.4 $\pm$ 6 % | 1.85 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | <1.0 °C             | ---            | ---                  |

**SAR result with Head TSL**

|                                                         |                    |                                |
|---------------------------------------------------------|--------------------|--------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | Condition          |                                |
| SAR measured                                            | 250 mW input power | 13.1 mW / g                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 52.1 mW / g $\pm$ 18.8 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition          |                                |
| SAR measured                                            | 250 mW input power | 6.17 mW / g                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.6 mW / g $\pm$ 18.7 % (k=2) |

**Body TSL parameters**

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 54.1 $\pm$ 6 % | 1.98 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | <1.0 °C             | ---            | ---                  |

**SAR result with Body TSL**

|                                                         |                    |                                |
|---------------------------------------------------------|--------------------|--------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL   | Condition          |                                |
| SAR measured                                            | 250 mW input power | 12.7 mW / g                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 50.8 mW / g $\pm$ 18.8 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | Condition          |                                |
| SAR measured                                            | 250 mW input power | 5.93 mW / g                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 23.7 mW / g $\pm$ 18.7 % (k=2) |



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |                            |
|--------------------------------------|----------------------------|
| Impedance, transformed to feed point | $53.0\Omega + 2.85j\Omega$ |
| Return Loss                          | - 27.9dB                   |

### Antenna Parameters with Body TSL

|                                      |                            |
|--------------------------------------|----------------------------|
| Impedance, transformed to feed point | $49.9\Omega + 4.74j\Omega$ |
| Return Loss                          | - 26.5dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.022 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## DASY5 Validation Report for Head TSL

Date: 06.11.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 919**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.85$  S/m;  $\epsilon_r = 40.36$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.89, 7.89, 7.89) @ 2450 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.2 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 27.0 W/kg

**SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.17 W/kg**

Maximum value of SAR (measured) = 22.0 W/kg

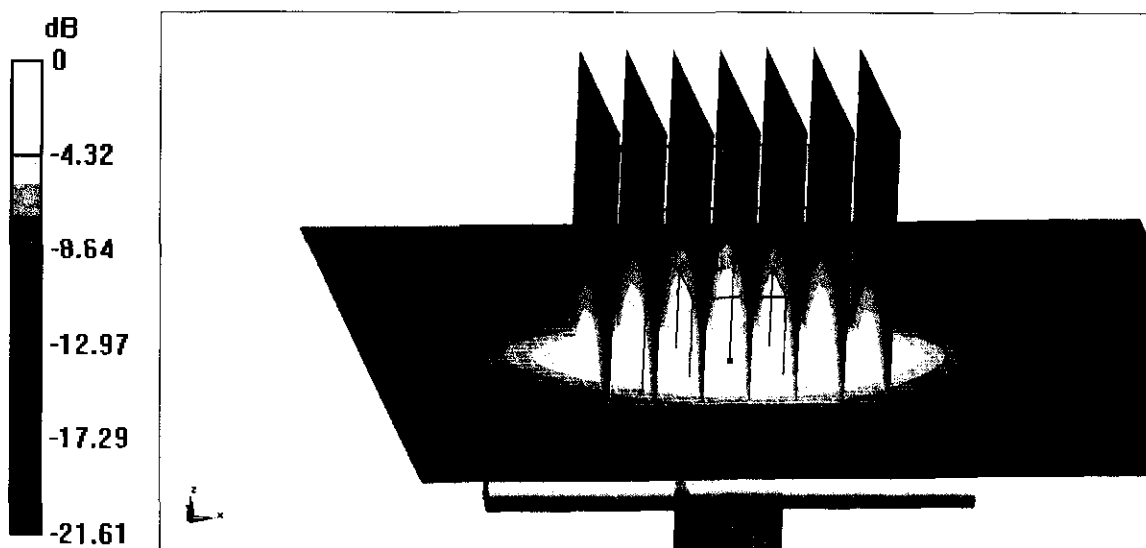

0 dB = 22.0 W/kg = 13.42 dBW/kg



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

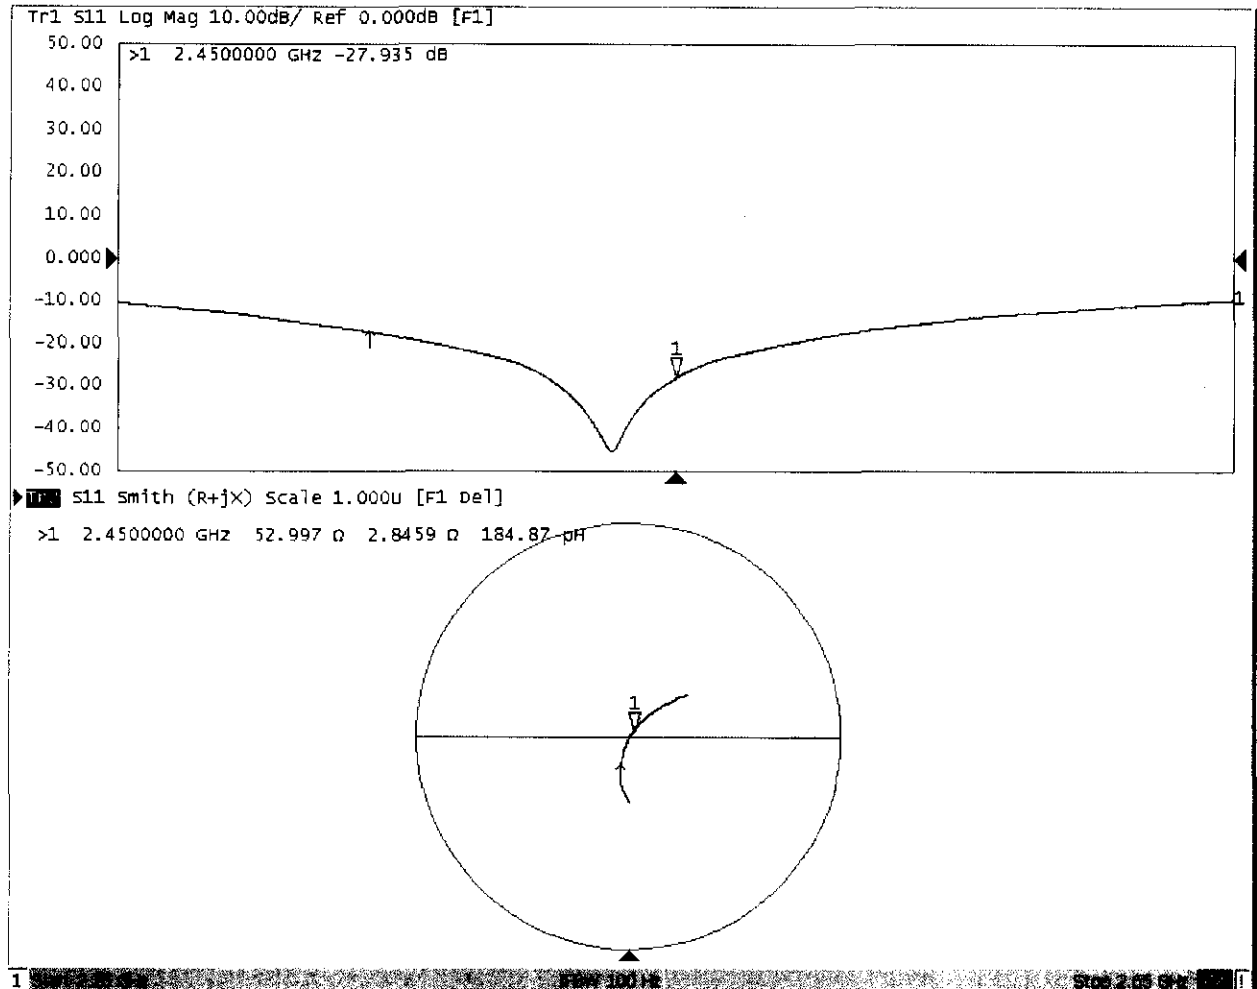



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## DASY5 Validation Report for Body TSL

Date: 06.08.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 919**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.977$  S/m;  $\epsilon_r = 54.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(8.09, 8.09, 8.09) @ 2450 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.30 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.0 W/kg

**SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.93 W/kg**

Maximum value of SAR (measured) = 20.8 W/kg

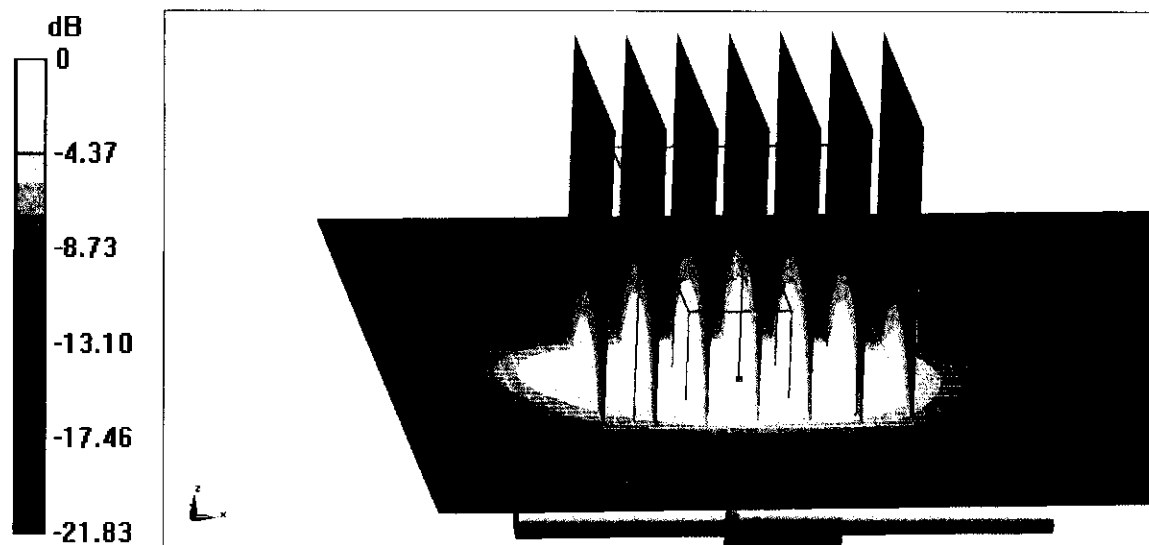

0 dB = 20.8 W/kg = 13.18 dBW/kg



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

<http://www.chinattl.cn>

## Impedance Measurement Plot for Body TSL

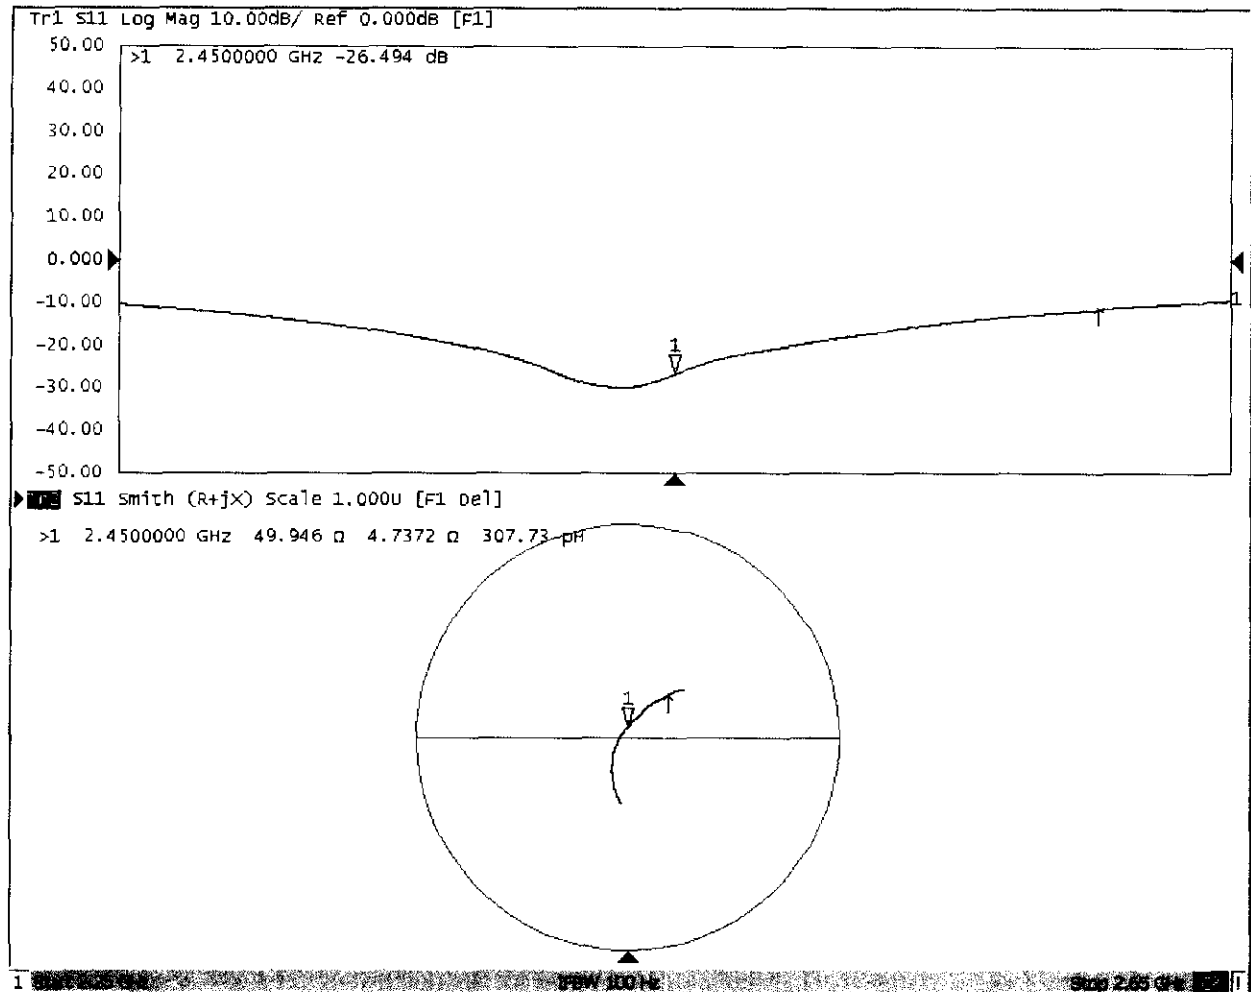



## Dipole Internal Calibration Record

|               |              |                      |               |                  |               |
|---------------|--------------|----------------------|---------------|------------------|---------------|
| Asset No. :   | E-434        | Model No. :          | D2450V2       | Serial No. :     | 919           |
| Environmental | 23.1°C, 51 % | Original Cal. Date : | June 11, 2018 | Next Cal. Date : | June 11, 2021 |


### Standard List

|   |                    |                                                                                                                                                                                            |
|---|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | IEEE Std 1528-2013 | IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate(SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013 |
| 2 | IEC 62209-2        | Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), March 2010     |
| 3 | KDB865664          | SAR Measurement Requirements for 100 MHz to 6 GHz                                                                                                                                          |

### Equipment Information

|                          |                |             |              |                    |                    |
|--------------------------|----------------|-------------|--------------|--------------------|--------------------|
| Equipment :              | Manufacturer : | Model No. : | Serial No. : | Cal.Organization : | Cal. Date :        |
| Power Amplifier          | Mini-Circuits  | ZHL-42W+    | QA1333003    | NA                 | February 25, 2019  |
| DC Source                | Iteck          | OT6154      | M00157       | NA                 | August 3, 2019     |
| P-series power meter     | Agilent        | N1911A      | MY45100473   | NA                 | September 23, 2019 |
| wideband power sensor    | Agilent        | N1921A      | MY51100041   | NA                 | September 23, 2019 |
| Smart Power Sensor       | R&S            | NRP-Z21     | 102209       | NA                 | March 1, 2019      |
| Dual directional coupler | Woken          | TS-PCC0M-05 | 107090019    | NA                 | March 10, 2019     |
| Signal Generator         | Agilent        | E4438C      | MY4907131    | NA                 | Mar. 10, 2019      |
| ENA Network Analyzer     | Agilent        | E5071C      | MY46102965   | NA                 | March 10, 2019     |

| Model No | For Head Tissue                      |                      |                       |           |        |
|----------|--------------------------------------|----------------------|-----------------------|-----------|--------|
| D2450V2  | Item                                 | Original Cal. Result | Verified on 2019/12/3 | Deviation | Result |
|          | Impedance, transformed to feed point | 53Ω+2.85jΩ           | 51.869Ω+1.09jΩ        | <5Ω       | Pass   |
|          | Return Loss(dB)                      | -27.9                | -27.192               | -2.5%     | Pass   |
|          | SAR Value for 1g(mW/g)               | 13.1                 | 12.4                  | -5.3%     | Pass   |
|          | SAR Value for 10g(mW/g)              | 6.17                 | 6.2                   | 0.5%      | Pass   |
|          | For Body Tissue                      |                      |                       |           |        |
|          | Item                                 | Original Cal. Result | Verified on 2019/12/3 | Deviation | Result |
|          | Impedance, transformed to feed point | 49.9Ω+4.74jΩ         | 48.100Ω+5.29jΩ        | <5Ω       | Pass   |
|          | Return Loss(dB)                      | -26.5                | -24.913               | -6.0%     | Pass   |
|          | SAR Value for 1g(mW/g)               | 12.7                 | 13.1                  | 3.1%      | Pass   |
|          | SAR Value for 10g(mW/g)              | 5.93                 | 6.12                  | 3.2%      | Pass   |

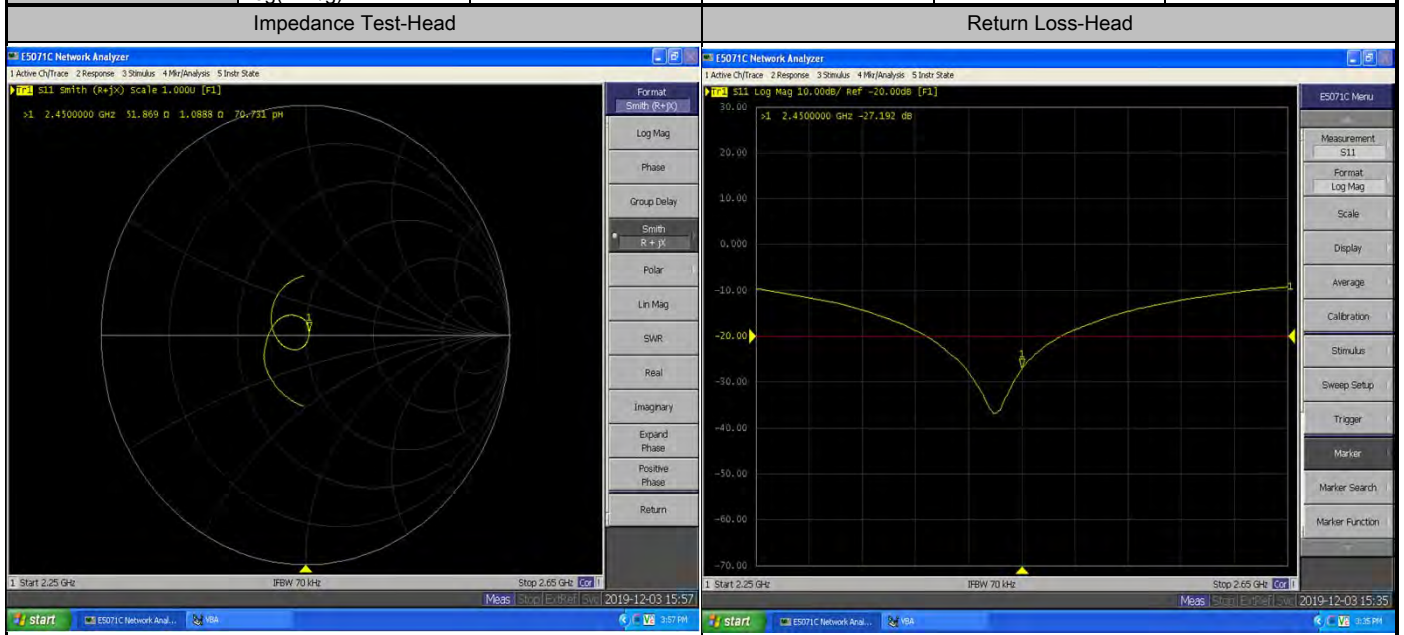



| Validation Report for Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Validation Report for Body TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Laboratory: BTL Inc.      Date: 2019/12/03</p> <p><b>System Check_H2450_1203</b></p> <p>DUT: Dipole 2450 MHz D2450V2;SN:919;</p> <p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 2450</math> MHz; <math>\sigma = 1.874</math> S/m; <math>\epsilon_r = 38.311</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/> Ambient Temperature : 23.1 °C; Liquid Temperature : 22.4 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(7.58, 7.58, 7.58) @ 2450 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p><b>Area Scan (7x7x1):</b> Interpolated grid: <math>dx=12</math> mm, <math>dy=12</math> mm<br/> Maximum value of SAR (interpolated) = 21.3 W/kg</p> <p><b>Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm<br/> Reference Value = 106.2 V/m; Power Drift = 0.00 dB<br/> Peak SAR (extrapolated) = 23.5 W/kg<br/> SAR(1 g) = 12.4 W/kg; SAR(10 g) = 6.2 W/kg<br/> Maximum value of SAR (measured) = 19.5 W/kg</p> | <p>Test Laboratory: BTL Inc.      Date: 2019/12/03</p> <p><b>System Check_B2450_1203</b></p> <p>DUT: Dipole 2450 MHz D2450V2;SN:919;</p> <p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 2450</math> MHz; <math>\sigma = 2.036</math> S/m; <math>\epsilon_r = 52.015</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/> Ambient Temperature : 23.1 °C; Liquid Temperature : 22.4 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(7.57, 7.57, 7.57) @ 2450 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 4mm (Mechanical Surface Detection), <math>z = 1.0, 31.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p><b>Area Scan (7x7x1):</b> Interpolated grid: <math>dx=12</math> mm, <math>dy=12</math> mm<br/> Maximum value of SAR (interpolated) = 22.9 W/kg</p> <p><b>Zoom Scan (7x7x7)/Cube 0:</b> Measurement grid: <math>dx=5</math>mm, <math>dy=5</math>mm, <math>dz=5</math>mm<br/> Reference Value = 106.3 V/m; Power Drift = 0.00 dB<br/> Peak SAR (extrapolated) = 25.2 W/kg<br/> SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.12 W/kg<br/> Maximum value of SAR (measured) = 21.0 W/kg</p> |

Calibrator: *Rot - Liang*

Approver: *Herbert Lin*



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cnClient **BTL Inc .**Certificate No: **Z18-60184****CALIBRATION CERTIFICATE**Object **D2600V2 - SN: 1067**Calibration Procedure(s) **FF-Z11-003-01**  
**Calibration Procedures for dipole validation kits**Calibration date: **June 11, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&amp;TE critical for calibration)

| Primary Standards       | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Power Meter NRVD        | 102083     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Power sensor NRV-Z5     | 100542     | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Reference Probe EX3DV4  | SN 7464    | 12-Sep-17(SPEAG,No.EX3-7464_Sep17)       | Sep-18                |
| DAE4                    | SN 1525    | 02-Oct-17(SPEAG,No.DAE4-1525_Oct17)      | Oct-18                |
| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560)           | Jan-19                |
| Network Analyzer E5071C | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561)           | Jan-19                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: June 13, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Glossary:

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                                     |                          |              |
|-------------------------------------|--------------------------|--------------|
| <b>DASY Version</b>                 | DASY52                   | 52.10.1.1476 |
| <b>Extrapolation</b>                | Advanced Extrapolation   |              |
| <b>Phantom</b>                      | Triple Flat Phantom 5.1C |              |
| <b>Distance Dipole Center - TSL</b> | 10 mm                    | with Spacer  |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm        |              |
| <b>Frequency</b>                    | 2600 MHz $\pm$ 1 MHz     |              |

**Head TSL parameters**

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 39.0           | 1.96 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 39.9 $\pm$ 6 % | 2.01 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | <1.0 °C             | ----           | ----                 |

**SAR result with Head TSL**

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>   | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 14.1 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>56.1 mW / g <math>\pm</math> 18.8 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 6.33 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>25.3 mW / g <math>\pm</math> 18.7 % (k=2)</b> |

**Body TSL parameters**

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 52.5           | 2.16 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 54.0 $\pm$ 6 % | 2.16 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | <1.0 °C             | ----           | ----                 |

**SAR result with Body TSL**

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>   | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 13.7 mW / g                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>55.2 mW / g <math>\pm</math> 18.8 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | Condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 6.11 mW / g                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>24.6 mW / g <math>\pm</math> 18.7 % (k=2)</b> |



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Appendix(Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 47.5Ω- 6.92jΩ |
| Return Loss                          | - 22.5dB      |

### Antenna Parameters with Body TSL

|                                      |               |
|--------------------------------------|---------------|
| Impedance, transformed to feed point | 43.8Ω- 5.59jΩ |
| Return Loss                          | - 21.1dB      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.012 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## **DASY5 Validation Report for Head TSL**

Date: 06.11.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1067**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.01$  S/m;  $\epsilon_r = 39.93$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.76, 7.76, 7.76) @ 2600 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.20 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 30.3 W/kg

**SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.33 W/kg**

Maximum value of SAR (measured) = 24.2 W/kg

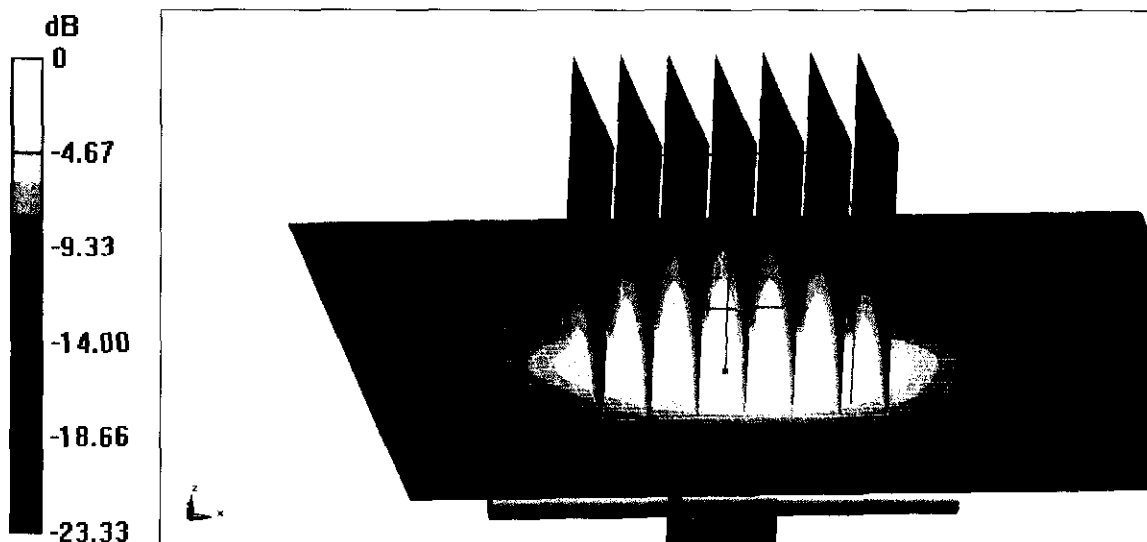

0 dB = 24.2 W/kg = 13.84 dBW/kg



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

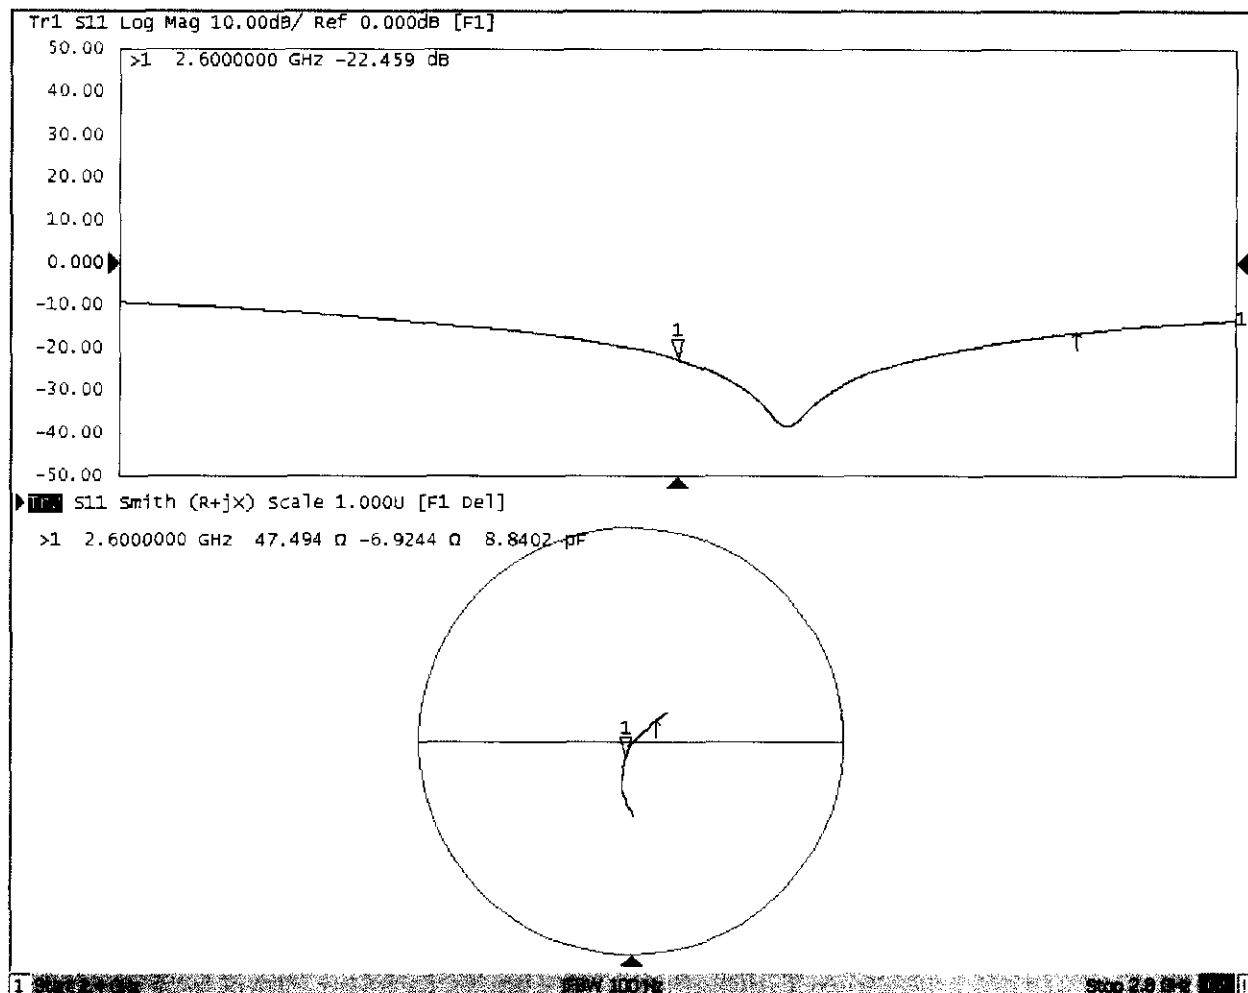



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## DASY5 Validation Report for Body TSL

Date: 06.08.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1067**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.157$  S/m;  $\epsilon_r = 54.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.84, 7.84, 7.84) @ 2600 MHz; Calibrated: 9/12/2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Phantom: MFP\_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)


**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 78.44 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 29.5 W/kg

**SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.11 W/kg**

Maximum value of SAR (measured) = 23.5 W/kg

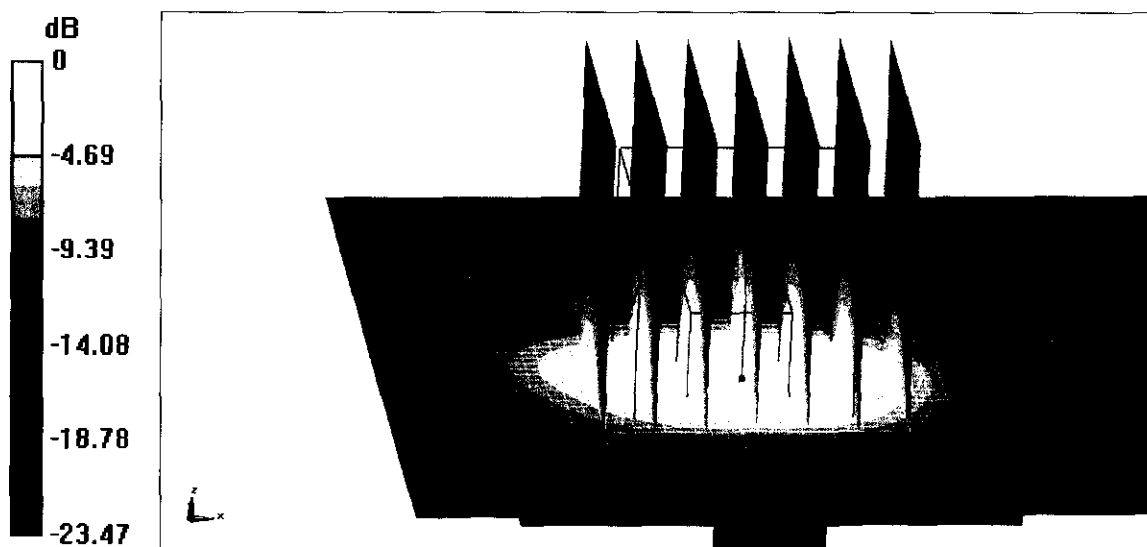

0 dB = 23.5 W/kg = 13.71 dBW/kg



In Collaboration with

**s p e a g**

**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

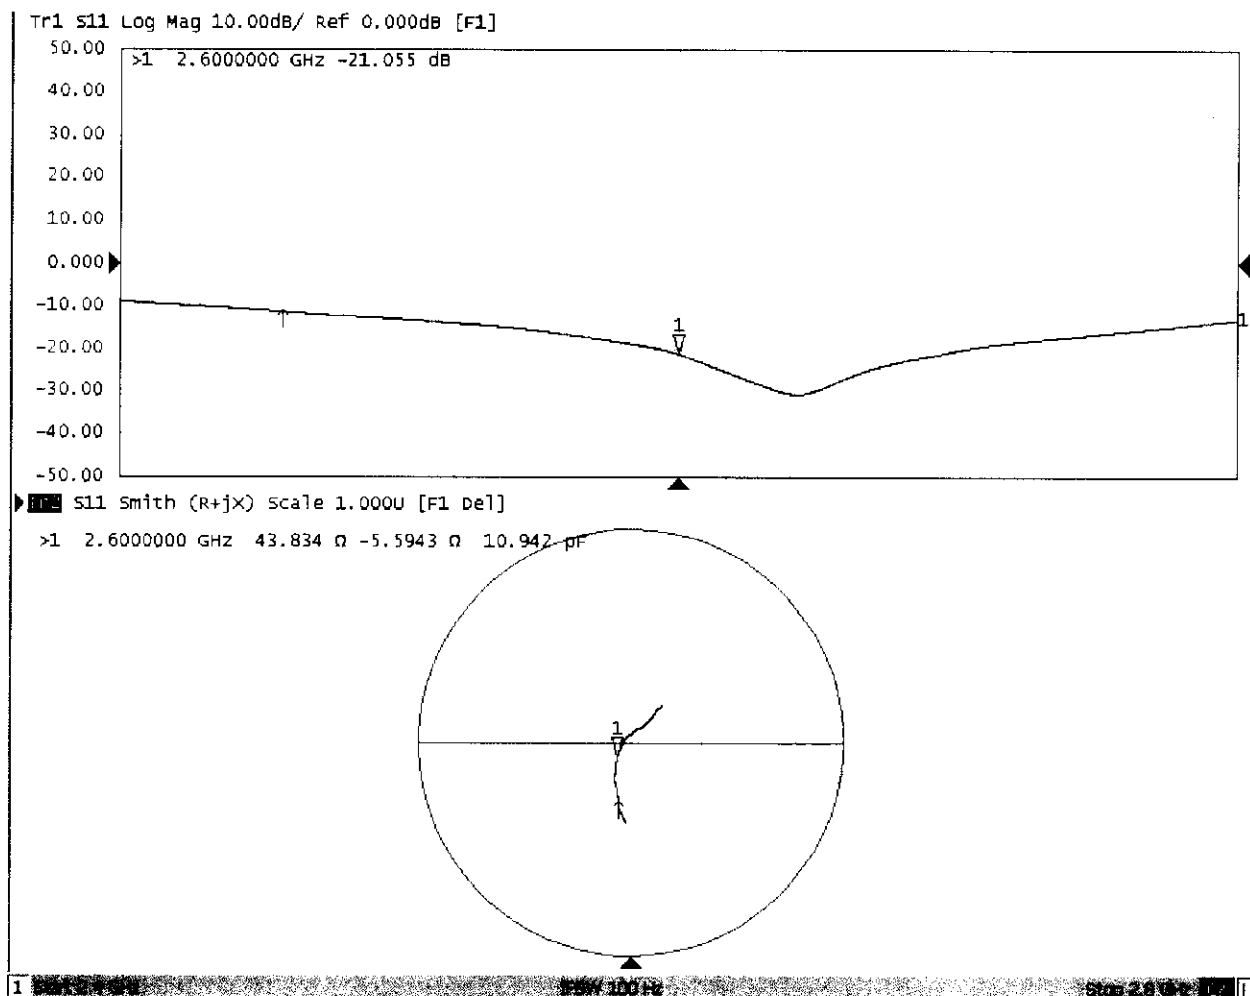



## Dipole Internal Calibration Record

|               |              |                      |               |                  |               |
|---------------|--------------|----------------------|---------------|------------------|---------------|
| Asset No. :   | E-435        | Model No. :          | D2600V2       | Serial No. :     | 1067          |
| Environmental | 23.1°C, 57 % | Original Cal. Date : | June 11, 2018 | Next Cal. Date : | June 11, 2021 |


### Standard List


|   |                    |                                                                                                                                                                                            |
|---|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | IEEE Std 1528-2013 | IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate(SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013 |
| 2 | IEC 62209-2        | Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), March 2010     |
| 3 | KDB865664          | SAR Measurement Requirements for 100 MHz to 6 GHz                                                                                                                                          |

### Equipment Information

|                          |                |             |              |                    |                    |
|--------------------------|----------------|-------------|--------------|--------------------|--------------------|
| Equipment :              | Manufacturer : | Model No. : | Serial No. : | Cal.Organization : | Cal. Date :        |
| Power Amplifier          | Mini-Circuits  | ZHL-42W+    | QA1333003    | NA                 | February 25, 2019  |
| DC Source                | Iteck          | OT6154      | M00157       | NA                 | August 3, 2019     |
| P-series power meter     | Agilent        | N1911A      | MY45100473   | NA                 | September 23, 2019 |
| wideband power sensor    | Agilent        | N1921A      | MY51100041   | NA                 | September 23, 2019 |
| Smart Power Sensor       | R&S            | NRP-Z21     | 102209       | NA                 | March 1, 2019      |
| Dual directional coupler | Woken          | TS-PCC0M-05 | 107090019    | NA                 | March 10, 2019     |
| Signal Generator         | Agilent        | E4438C      | MY4907131    | NA                 | Mar. 10, 2019      |
| ENA Network Analyzer     | Agilent        | E5071C      | MY46102965   | NA                 | March 10, 2019     |

| Model No | For Head Tissue                      |                      |                       |           |        |
|----------|--------------------------------------|----------------------|-----------------------|-----------|--------|
| D2600V2  | Item                                 | Original Cal. Result | Verified on 2019/12/4 | Deviation | Result |
|          | Impedance, transformed to feed point | 47.5Ω-6.92jΩ         | 45.363Ω-6.39jΩ        | <5Ω       | Pass   |
|          | Return Loss(dB)                      | -22.5                | -22.203               | -1.3%     | Pass   |
|          | SAR Value for 1g(mW/g)               | 14.1                 | 13.5                  | -4.3%     | Pass   |
|          | SAR Value for 10g(mW/g)              | 6.33                 | 6.09                  | -3.8%     | Pass   |
|          | For Body Tissue                      |                      |                       |           |        |
|          | Item                                 | Original Cal. Result | Verified on 2019/12/4 | Deviation | Result |
|          | Impedance, transformed to feed point | 43.8Ω-5.59jΩ         | 44.015Ω-3.61jΩ        | <5Ω       | Pass   |
|          | Return Loss(dB)                      | -21.1                | -21.589               | 2.3%      | Pass   |
|          | SAR Value for 1g(mW/g)               | 13.7                 | 14.3                  | 4.4%      | Pass   |
|          | SAR Value for 10g(mW/g)              | 6.11                 | 6.37                  | 4.3%      | Pass   |

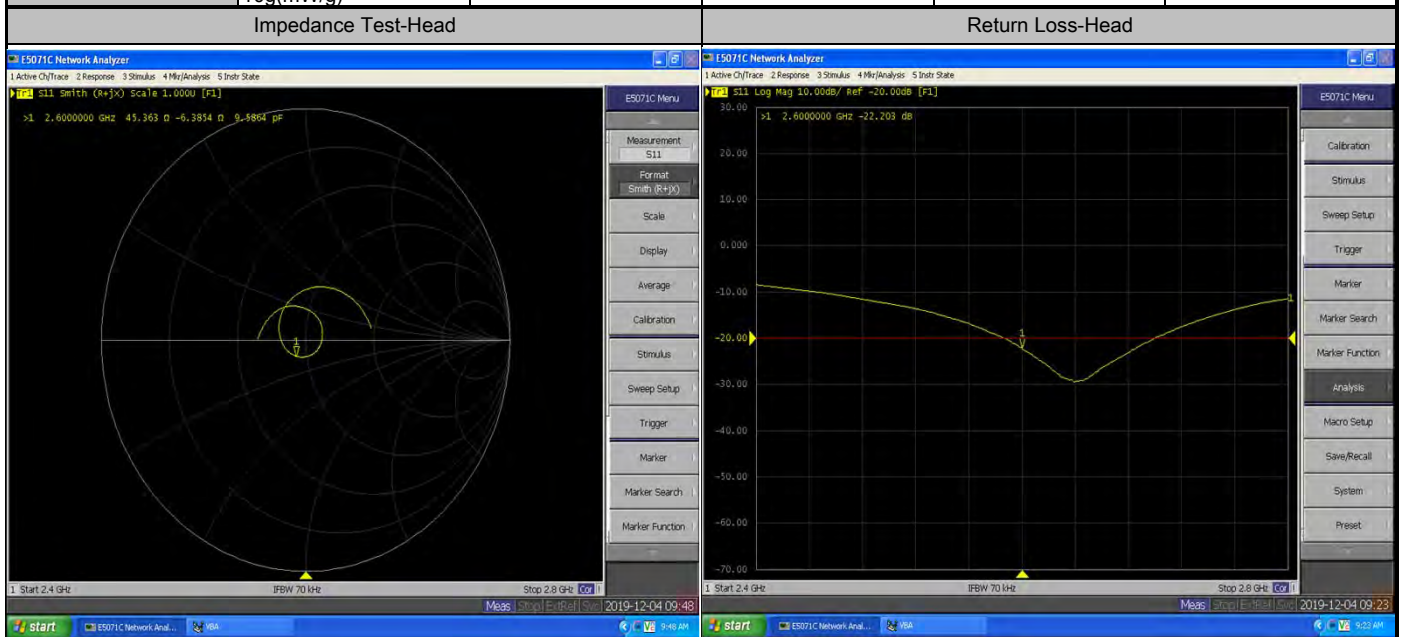

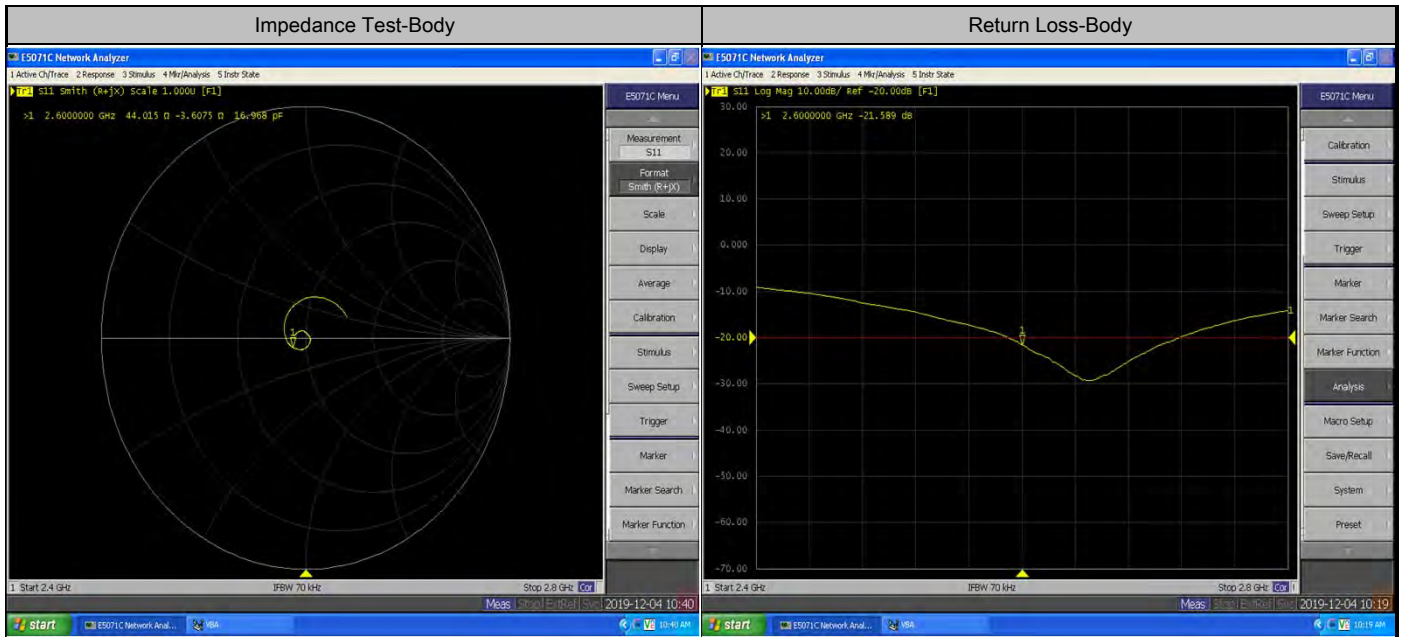

### Validation Report for Head TSL

Test Laboratory: BTL Inc. Date: 2019/12/04

**System Check\_H2600\_1204**

DUT: Dipole 2600 MHz D2600V2;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.047$  S/m;  $\epsilon_r = 37.734$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.4, 7.4, 7.4) @ 2600 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (6x8x1):** Interpolated grid:  $dx=12$  mm,  $dy=12$  mm  
Maximum value of SAR (interpolated) = 24.9 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 91.46 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 28.8 W/kg  
**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.09 W/kg**  
Maximum value of SAR (measured) = 23.0 W/kg

### Validation Report for Body TSL

Test Laboratory: BTL Inc. Date: 2019/12/04

**System Check\_B2600\_1204**

DUT: Dipole 2600 MHz D2600V2;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.223$  S/m;  $\epsilon_r = 51.533$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(7.35, 7.35, 7.35) @ 2600 MHz; Calibrated: 2019/9/9
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2019/10/29
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Area Scan (6x8x1):** Interpolated grid:  $dx=12$  mm,  $dy=12$  mm  
Maximum value of SAR (interpolated) = 26.5 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
Reference Value = 90.48 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 30.6 W/kg  
**SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.37 W/kg**  
Maximum value of SAR (measured) = 24.4 W/kg

Calibrator: *Rot - Liang*

Approver: *Herbert Lin*



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY



中国认可  
国际互认  
校准  
CALIBRATION  
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client

**BTL Inc .**

Certificate No: **Z18-60185**

## CALIBRATION CERTIFICATE

Object D5GHzV2 - SN: 1160

Calibration Procedure(s) FF-Z11-003-01  
Calibration Procedures for dipole validation kits

Calibration date: June 20, 2018

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards     | ID #    | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-----------------------|---------|------------------------------------------|-----------------------|
| Power Meter NRP2      | 102083  | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| Power sensor NRP-Z91  | 100542  | 01-Nov-17 (CTTL, No.J17X08756)           | Oct-18                |
| ReferenceProbe EX3DV4 | SN 3846 | 25-Jan-18(SPEAG,No.EX3-3846_Jan18)       | Jan-19                |
| DAE4                  | SN 1525 | 02-Oct-17(SPEAG,No.DAE4-1525_Oct17)      | Oct-18                |
| DAE4                  | SN 777  | 15-Dec-17(SPEAG,No.DAE4-777_Dec17)       | Dec-18                |

| Secondary Standards     | ID #       | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Signal Generator E4438C | MY49071430 | 23-Jan-18 (CTTL, No.J18X00560)           | Jan-19                |
| NetworkAnalyzerE5071C   | MY46110673 | 24-Jan-18 (CTTL, No.J18X00561)           | Jan-19                |

|                | Name        | Function           | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Zhao Jing   | SAR Test Engineer  |           |
| Reviewed by:   | Lin Hao     | SAR Test Engineer  |           |
| Approved by:   | Qi Dianyuan | SAR Project Leader |           |

Issued: June 23, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

**s p e a k**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

### Glossary:

|       |                                            |
|-------|--------------------------------------------|
| TSL   | tissue simulating liquid                   |
| ConvF | sensitivity in TSL / NORM <sub>x,y,z</sub> |
| N/A   | not applicable or not measured             |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
 E-mail: cttl@chinattl.com http://www.chinattl.cn

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

|                                     |                                                                                                                      |                                  |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------|
| <b>DASY Version</b>                 | DASY52                                                                                                               | 52.10.1.1476                     |
| <b>Extrapolation</b>                | Advanced Extrapolation                                                                                               |                                  |
| <b>Phantom</b>                      | Triple Flat Phantom 5.1C                                                                                             |                                  |
| <b>Distance Dipole Center - TSL</b> | 10 mm                                                                                                                | with Spacer                      |
| <b>Zoom Scan Resolution</b>         | dx, dy = 4 mm, dz = 1.4 mm                                                                                           | Graded Ratio = 1.4 (Z direction) |
| <b>Frequency</b>                    | 5200 MHz $\pm$ 1 MHz<br>5300 MHz $\pm$ 1 MHz<br>5500 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5800 MHz $\pm$ 1 MHz |                                  |

**Head TSL parameters at 5200 MHz**

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 36.0           | 4.66 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 36.6 $\pm$ 6 % | 4.63 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | <1.0 °C             | ----           | ----                 |

**SAR result with Head TSL at 5200 MHz**

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>   | Condition          |                                                  |
| SAR measured                                                  | 100 mW input power | 7.50 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>75.3 mW / g <math>\pm</math> 24.4 % (k=2)</b> |
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                                  |
| SAR measured                                                  | 100 mW input power | 2.16 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>21.7 mW / g <math>\pm</math> 24.2 % (k=2)</b> |



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

**Head TSL parameters at 5300 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 36.3 ± 6 %   | 4.75 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Head TSL at 5300 MHz**

|                                                         |                    |                            |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | Condition          |                            |
| SAR measured                                            | 100 mW input power | 7.66 mW / g                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 76.8 mW / g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition          |                            |
| SAR measured                                            | 100 mW input power | 2.20 mW / g                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 22.1 mW / g ± 24.2 % (k=2) |

**Head TSL parameters at 5500 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.6         | 4.96 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.6 ± 6 %   | 4.94 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Head TSL at 5500 MHz**

|                                                         |                    |                            |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | Condition          |                            |
| SAR measured                                            | 100 mW input power | 8.08 mW / g                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 80.8 mW / g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition          |                            |
| SAR measured                                            | 100 mW input power | 2.30 mW / g                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.0 mW / g ± 24.2 % (k=2) |



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

**Head TSL parameters at 5600 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.8 ± 6 %   | 4.98 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Head TSL at 5600 MHz**

|                                                         |                    |                            |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | Condition          |                            |
| SAR measured                                            | 100 mW input power | 7.85 mW / g                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 78.6 mW / g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition          |                            |
| SAR measured                                            | 100 mW input power | 2.25 mW / g                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 22.5 mW / g ± 24.2 % (k=2) |

**Head TSL parameters at 5800 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 35.6 ± 6 %   | 5.24 mho/m ± 6 % |
| Head TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Head TSL at 5800 MHz**

|                                                         |                    |                            |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL   | Condition          |                            |
| SAR measured                                            | 100 mW input power | 7.78 mW / g                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 77.9 mW / g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition          |                            |
| SAR measured                                            | 100 mW input power | 2.21 mW / g                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 22.1 mW / g ± 24.2 % (k=2) |



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

**Body TSL parameters at 5200 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 49.0         | 5.30 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.8 ± 6 %   | 5.32 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Body TSL at 5200 MHz**

|                                                         |                    |                            |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL   | Condition          |                            |
| SAR measured                                            | 100 mW input power | 6.99 mW / g                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 69.8 mW / g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | Condition          |                            |
| SAR measured                                            | 100 mW input power | 1.92 mW / g                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 19.2 mW / g ± 24.2 % (k=2) |

**Body TSL parameters at 5300 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.42 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.4 ± 6 %   | 5.38 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Body TSL at 5300 MHz**

|                                                         |                    |                            |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL   | Condition          |                            |
| SAR measured                                            | 100 mW input power | 7.25 mW / g                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 72.3 mW / g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | Condition          |                            |
| SAR measured                                            | 100 mW input power | 2.04 mW / g                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 20.3 mW / g ± 24.2 % (k=2) |



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

**Body TSL parameters at 5500 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.6         | 5.65 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.4 ± 6 %   | 5.56 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Body TSL at 5500 MHz**

|                                                         |                    |                            |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL   | Condition          |                            |
| SAR measured                                            | 100 mW input power | 7.63 mW / g                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 76.2 mW / g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | Condition          |                            |
| SAR measured                                            | 100 mW input power | 2.13 mW / g                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.3 mW / g ± 24.2 % (k=2) |

**Body TSL parameters at 5600 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.1 ± 6 %   | 5.80 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Body TSL at 5600 MHz**

|                                                         |                    |                            |
|---------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL   | Condition          |                            |
| SAR measured                                            | 100 mW input power | 7.78 mW / g                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 77.7 mW / g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | Condition          |                            |
| SAR measured                                            | 100 mW input power | 2.14 mW / g                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.4 mW / g ± 24.2 % (k=2) |



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

<http://www.chinattl.cn>**Body TSL parameters at 5800 MHz**

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.2         | 6.00 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 48.0 ± 6 %   | 6.07 mho/m ± 6 % |
| Body TSL temperature change during test | <1.0 °C         | ----         | ----             |

**SAR result with Body TSL at 5800 MHz**

|                                                         |                    |                           |
|---------------------------------------------------------|--------------------|---------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL   | Condition          |                           |
| SAR measured                                            | 100 mW input power | 7.66 mW / g               |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 76.6 mW /g ± 24.4 % (k=2) |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | Condition          |                           |
| SAR measured                                            | 100 mW input power | 2.15 mW / g               |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.5 mW /g ± 24.2 % (k=2) |



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Appendix (Additional assessments outside the scope of CNAS L0570)

### Antenna Parameters with Head TSL at 5200 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 53.5Ω - 8.96jΩ |
| Return Loss                          | - 20.7dB       |

### Antenna Parameters with Head TSL at 5300 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 50.1Ω - 3.00jΩ |
| Return Loss                          | - 30.5dB       |

### Antenna Parameters with Head TSL at 5500 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 51.4Ω - 5.39jΩ |
| Return Loss                          | - 25.2dB       |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 57.5Ω - 2.95jΩ |
| Return Loss                          | - 22.5dB       |

### Antenna Parameters with Head TSL at 5800 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 54.5Ω - 1.38jΩ |
| Return Loss                          | - 26.9dB       |

### Antenna Parameters with Body TSL at 5200 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 53.1Ω - 7.52jΩ |
| Return Loss                          | - 22.1dB       |

### Antenna Parameters with Body TSL at 5300 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 49.3Ω - 2.06jΩ |
| Return Loss                          | - 33.1dB       |



In Collaboration with

**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

### Antenna Parameters with Body TSL at 5500 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 50.9Ω - 4.94jΩ |
| Return Loss                          | - 26.1dB       |

### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 58.5Ω - 0.79jΩ |
| Return Loss                          | - 22.1dB       |

### Antenna Parameters with Body TSL at 5800 MHz

|                                      |                |
|--------------------------------------|----------------|
| Impedance, transformed to feed point | 54.3Ω + 0.12jΩ |
| Return Loss                          | - 27.6dB       |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.065 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## **DASY5 Validation Report for Head TSL**

Date: 06.20.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1160**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz,  
Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz,

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.633$  S/m;  $\epsilon_r = 36.62$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.754$  S/m;  $\epsilon_r = 36.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.942$  S/m;  $\epsilon_r = 35.58$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.984$  S/m;  $\epsilon_r = 35.81$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.241$  S/m;  $\epsilon_r = 35.58$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Phantom section: Right Section

### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3846; ConvF(5.57, 5.57, 5.57) @ 5200 MHz; Calibrated: 1/25/2018, ConvF(5.34, 5.34, 5.34) @ 5300 MHz; Calibrated: 1/25/2018, ConvF(4.91, 4.91, 4.91) @ 5500 MHz; Calibrated: 1/25/2018, ConvF(4.73, 4.73, 4.73) @ 5600 MHz; Calibrated: 1/25/2018, ConvF(4.9, 4.9, 4.9) @ 5800 MHz; Calibrated: 1/25/2018,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 12/15/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/3
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Dipole Calibration /Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 67.38 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 31.8 W/kg  
**SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.16 W/kg**  
Maximum value of SAR (measured) = 17.8 W/kg

**Dipole Calibration /Pin=100mW, d=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 62.70 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 33.3 W/kg  
**SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.2 W/kg**  
Maximum value of SAR (measured) = 18.4 W/kg



In Collaboration with

**s p e a k**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504


E-mail: cttl@chinattl.com

<http://www.chinattl.cn>

**Dipole Calibration /Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan,**  
**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 66.94 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 36.4 W/kg  
**SAR(1 g) = 8.08 W/kg; SAR(10 g) = 2.3 W/kg**  
Maximum value of SAR (measured) = 19.4 W/kg

**Dipole Calibration /Pin=100mW, d=10mm, f=5600 MHz/Zoom Scan,**  
**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 65.08 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 35.7 W/kg  
**SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.25 W/kg**  
Maximum value of SAR (measured) = 18.9 W/kg

**Dipole Calibration /Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan,**  
**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 62.16 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 37.2 W/kg  
**SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.21 W/kg**  
Maximum value of SAR (measured) = 19.1 W/kg

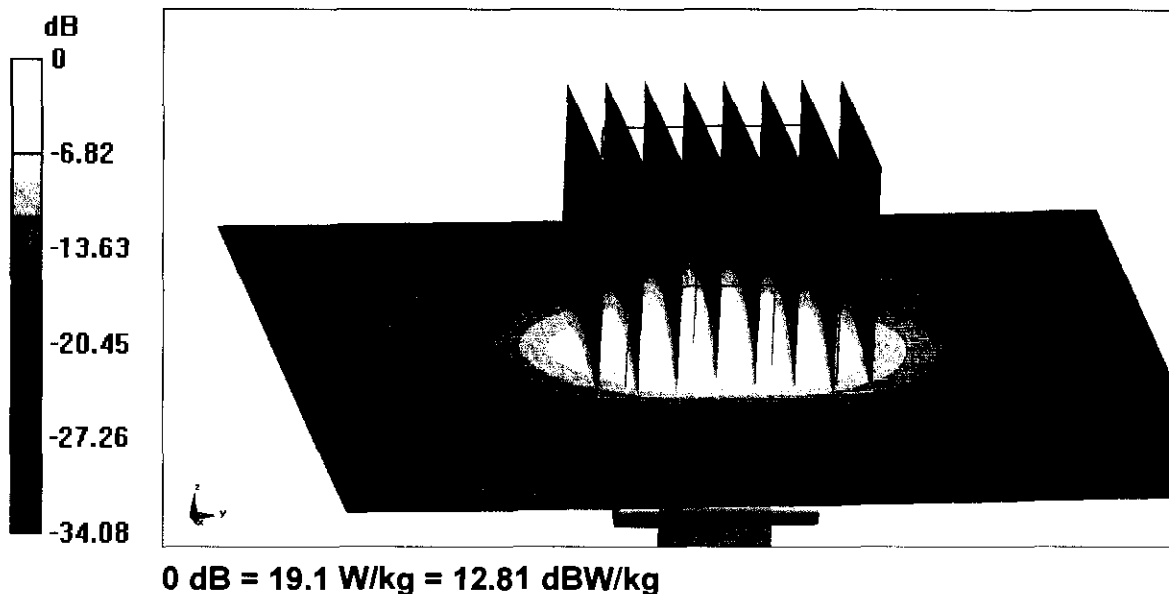



In Collaboration with

**s p e a k**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

## Impedance Measurement Plot for Head TSL

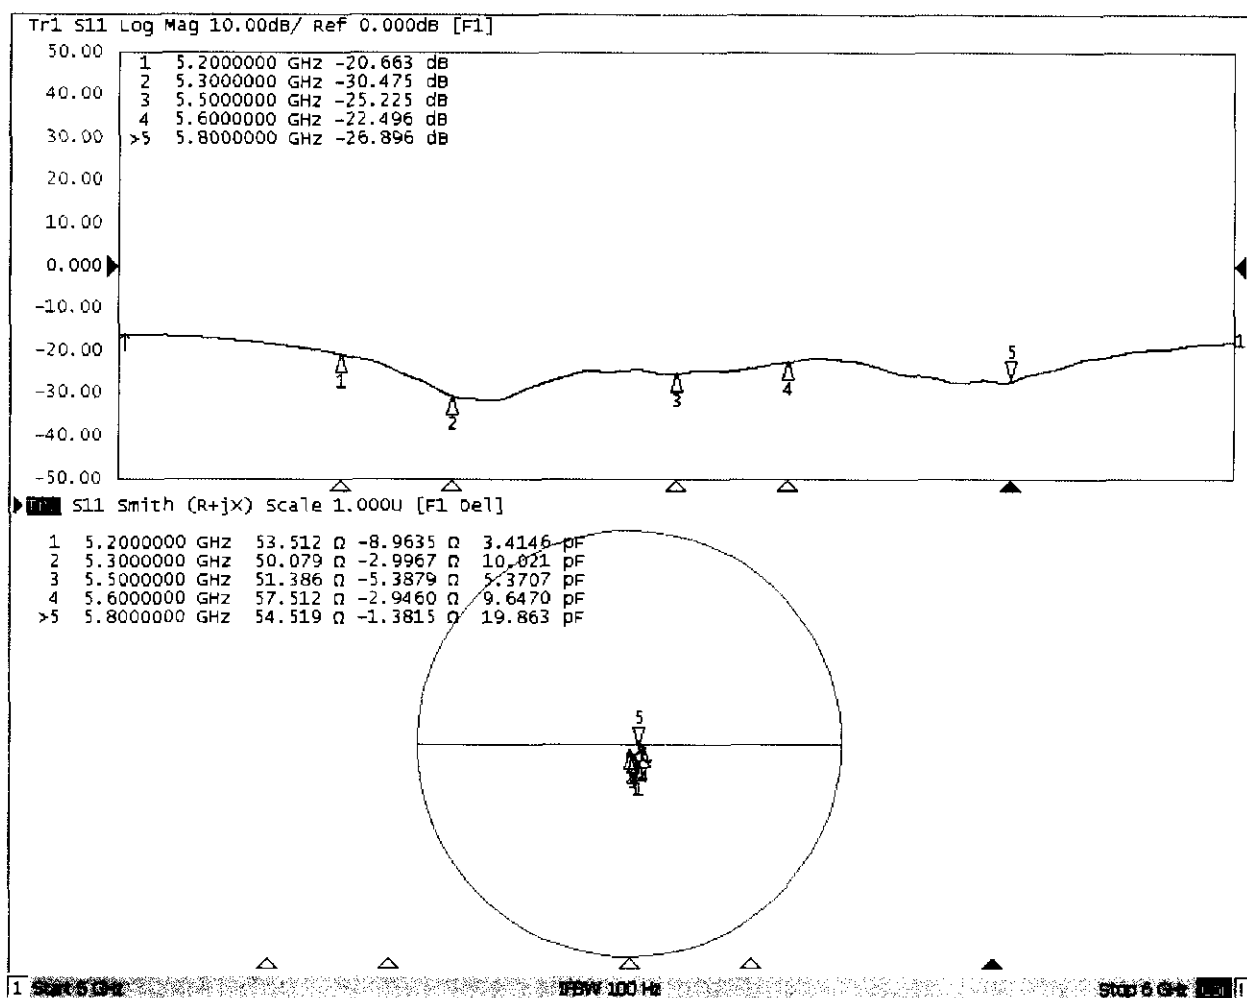



In Collaboration with

**s p e a g**  
**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## **DASY5 Validation Report for Body TSL**

Date: 06.19.2018

Test Laboratory: CTTL, Beijing, China

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1160**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz,  
Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz,

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.317$  S/m;  $\epsilon_r = 48.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.381$  S/m;  $\epsilon_r = 48.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.56$  S/m;  $\epsilon_r = 48.36$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.795$  S/m;  $\epsilon_r = 48.14$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.065$  S/m;  $\epsilon_r = 48.03$ ;  $\rho = 1000$  kg/m<sup>3</sup>,

Phantom section: Left Section

### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3846; ConvF(5.15, 5.15, 5.15) @ 5200 MHz; Calibrated: 1/25/2018, ConvF(5.04, 5.04, 5.04) @ 5300 MHz; Calibrated: 1/25/2018, ConvF(4.46, 4.46, 4.46) @ 5500 MHz; Calibrated: 1/25/2018, ConvF(4.36, 4.36, 4.36) @ 5600 MHz; Calibrated: 1/25/2018, ConvF(4.51, 4.51, 4.51) @ 5800 MHz; Calibrated: 1/25/2018,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1525; Calibrated: 10/2/2017
- Electronics: DAE4 Sn777; Calibrated: 12/15/2017
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1161/3
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Dipole Calibration /Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 62.32 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 31.6 W/kg

**SAR(1 g) = 6.99 W/kg; SAR(10 g) = 1.92 W/kg**

Maximum value of SAR (measured) = 16.7 W/kg

**Dipole Calibration /Pin=100mW, d=10mm, f=5300 MHz/Zoom Scan,**

**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.59 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 33.3 W/kg

**SAR(1 g) = 7.25 W/kg; SAR(10 g) = 2.04 W/kg**

Maximum value of SAR (measured) = 18.2 W/kg



In Collaboration with

**s p e a k**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504


E-mail: cttl@chinattl.com

http://www.chinattl.cn

**Dipole Calibration /Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan,**  
**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 65.72 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 35.6 W/kg  
**SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.13 W/kg**  
Maximum value of SAR (measured) = 19.2 W/kg

**Dipole Calibration /Pin=100mW, d=10mm, f=5600 MHz/Zoom Scan,**  
**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 57.49 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 37.4 W/kg  
**SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.14 W/kg**  
Maximum value of SAR (measured) = 19.3 W/kg

**Dipole Calibration /Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan,**  
**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 41.04 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 36.5 W/kg  
**SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.15 W/kg**  
Maximum value of SAR (measured) = 18.8 W/kg

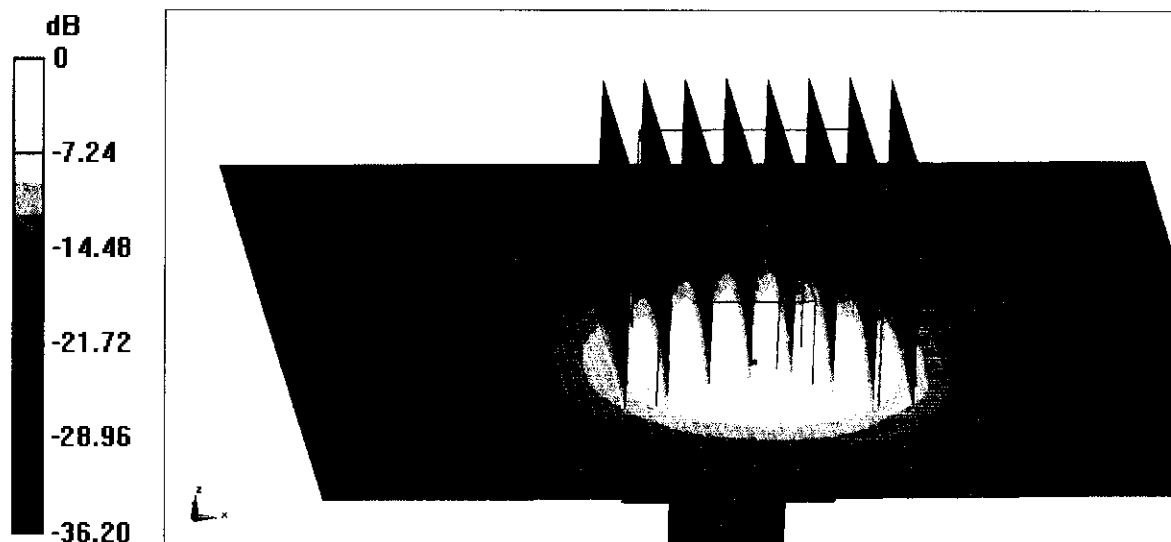


0 dB = 18.8 W/kg = 12.74 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504  
E-mail: cttl@chinattl.com http://www.chinattl.cn

## Impedance Measurement Plot for Body TSL

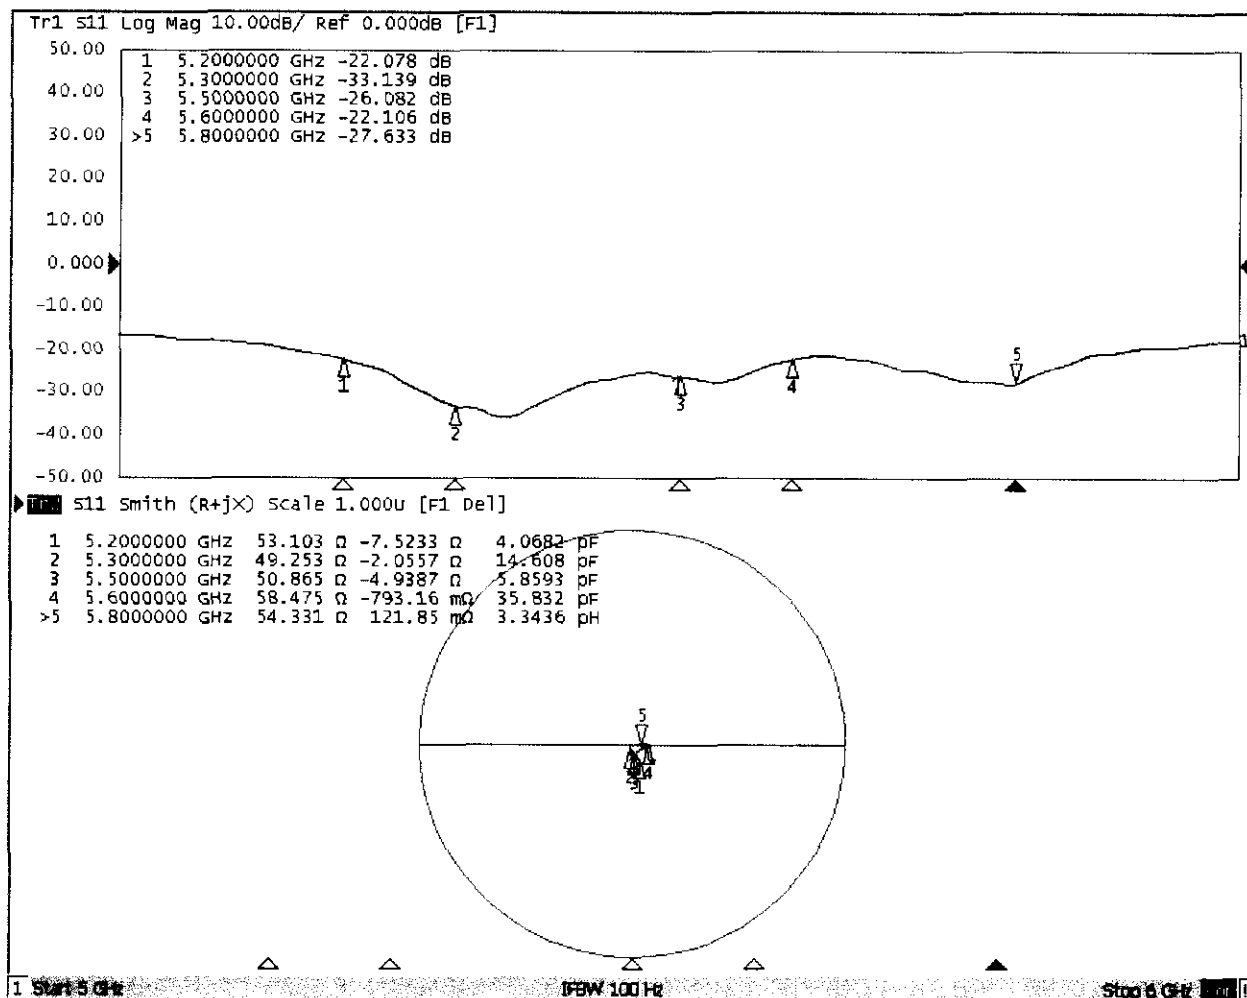




## Dipole Internal Calibration Record


|                          |                                      |                                                                                                                                                                                          |                       |                    |                    |
|--------------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------|--------------------|
| Asset No. :              | E-436                                | Model No. :                                                                                                                                                                              | D5GHzV2               | Serial No. :       | 1160               |
| Environmental            | 23.2°C, 49 %                         | Original Cal. Date :                                                                                                                                                                     | June 20, 2018         | Next Cal. Date :   | June 20, 2021      |
| Standard List            |                                      |                                                                                                                                                                                          |                       |                    |                    |
| 1                        | IEEE Std 1528-2013                   | IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorpton Rate(SAR) in the Human Head from Wireless Communication Devices: Measurement Texniques, June 2013 |                       |                    |                    |
| 2                        | IEC 62209-2                          | Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), March 2010   |                       |                    |                    |
| 3                        | KDB865664                            | SAR Measurement Requirements for 100 MHz to 6 GHz                                                                                                                                        |                       |                    |                    |
| Equipment Information    |                                      |                                                                                                                                                                                          |                       |                    |                    |
| Equipment :              | Manufacturer :                       | Model No. :                                                                                                                                                                              | Serial No. :          | Cal.Organization : | Cal. Date :        |
| Power Amplifier          | Mini-Circuits                        | ZVE-8G+                                                                                                                                                                                  | 520701341             | NA                 | February 25, 2019  |
| DC Source                | Iteck                                | OT6154                                                                                                                                                                                   | M00157                | NA                 | August 3, 2019     |
| P-series power meter     | Agilent                              | N1911A                                                                                                                                                                                   | MY45100473            | NA                 | September 23, 2019 |
| wideband power sensor    | Agilent                              | N1921A                                                                                                                                                                                   | MY51100041            | NA                 | September 23, 2019 |
| Smart Power Sensor       | R&S                                  | NRP-Z21                                                                                                                                                                                  | 102209                | NA                 | March 1, 2019      |
| Dual directional coupler | Woken                                | TS-PCC0M-05                                                                                                                                                                              | 107090019             | NA                 | March 10, 2019     |
| Signal Generator         | Agilent                              | E4438C                                                                                                                                                                                   | MY4907131             | NA                 | Mar. 10, 2019      |
| ENA Network Analyzer     | Agilent                              | E5071C                                                                                                                                                                                   | MY46102965            | NA                 | March 10, 2019     |
| Model No                 | For Head Tissue                      |                                                                                                                                                                                          |                       |                    |                    |
|                          | Item                                 | Originak Cal. Result                                                                                                                                                                     | Verified on 2019/12/4 | Deviation          | Result             |
| D5GHzV2(5.2GHz)          | Impedance, transformed to feed point | 53.5Ω-8.96jΩ                                                                                                                                                                             | 51.016Ω-7.45jΩ        | <5Ω                | Pass               |
|                          | Return Loss(dB)                      | -20.7                                                                                                                                                                                    | -21.656               | 4.6%               | Pass               |
|                          | SAR Value for 1g(mW/g)               | 7.5                                                                                                                                                                                      | 7.84                  | 4.5%               | Pass               |
|                          | SAR Value for 10g(mW/g)              | 2.16                                                                                                                                                                                     | 2.24                  | 3.7%               | Pass               |
| D5GHzV2(5.3GHz)          | Impedance, transformed to feed point | 50.1Ω-3jΩ                                                                                                                                                                                | 49.690Ω-1.68jΩ        | <5Ω                | Pass               |
|                          | Return Loss(dB)                      | -30.5                                                                                                                                                                                    | -29.65                | -2.8%              | Pass               |
|                          | SAR Value for 1g(mW/g)               | 7.66                                                                                                                                                                                     | 7.72                  | 0.8%               | Pass               |
|                          | SAR Value for 10g(mW/g)              | 2.2                                                                                                                                                                                      | 2.2                   | 0.0%               | Pass               |
| D5GHzV2(5.5GHz)          | Impedance, transformed to feed point | 51.4Ω-5.39jΩ                                                                                                                                                                             | 50.8452Ω-2.49jΩ       | <5Ω                | Pass               |
|                          | Return Loss(dB)                      | -25.2                                                                                                                                                                                    | -23.933               | -5.0%              | Pass               |
|                          | SAR Value for 1g(mW/g)               | 8.08                                                                                                                                                                                     | 7.79                  | -3.6%              | Pass               |
|                          | SAR Value for 10g(mW/g)              | 2.3                                                                                                                                                                                      | 2.21                  | -3.9%              | Pass               |
| D5GHzV2(5.6GHz)          | Impedance, transformed to feed point | 57.5Ω-2.95jΩ                                                                                                                                                                             | 56.735Ω-4.13jΩ        | <5Ω                | Pass               |
|                          | Return Loss(dB)                      | -22.5                                                                                                                                                                                    | -22.837               | 1.5%               | Pass               |
|                          | SAR Value for 1g(mW/g)               | 7.85                                                                                                                                                                                     | 7.82                  | -0.4%              | Pass               |
|                          | SAR Value for 10g(mW/g)              | 2.25                                                                                                                                                                                     | 2.19                  | -2.7%              | Pass               |
| D5GHzV2(5.8GHz)          | Impedance, transformed to feed point | 54.5Ω-1.38jΩ                                                                                                                                                                             | 53.652Ω-0.993jΩ       | <5Ω                | Pass               |
|                          | Return Loss(dB)                      | -26.9                                                                                                                                                                                    | -27.311               | 1.5%               | Pass               |
|                          | SAR Value for 1g(mW/g)               | 7.78                                                                                                                                                                                     | 7.83                  | 0.6%               | Pass               |
|                          | SAR Value for 10q(mW/q)              | 2.21                                                                                                                                                                                     | 2.19                  | -0.9%              | Pass               |

| Model No        | For Body Tissue                      |                               |                                 |             |        |
|-----------------|--------------------------------------|-------------------------------|---------------------------------|-------------|--------|
|                 | Item                                 | Originak Cal. Result          | Verified on 2019/12/4           | Deviation   | Result |
| D5GHzV2(5.2GHz) | Impedance, transformed to feed point | 53.1 $\Omega$ -7.52j $\Omega$ | 52.574 $\Omega$ -3.48j $\Omega$ | <5 $\Omega$ | Pass   |
|                 | Return Loss(dB)                      | -22.1                         | -21.272                         | -3.7%       | Pass   |
|                 | SAR Value for 1g(mW/g)               | 6.99                          | 7.02                            | 0.4%        | Pass   |
|                 | SAR Value for 10g(mW/g)              | 1.92                          | 2.01                            | 4.7%        | Pass   |
| D5GHzV2(5.3GHz) | Impedance, transformed to feed point | 49.3 $\Omega$ -2.06j $\Omega$ | 50.667 $\Omega$ -4.14j $\Omega$ | <5 $\Omega$ | Pass   |
|                 | Return Loss(dB)                      | -33.1                         | -32.591                         | -1.5%       | Pass   |
|                 | SAR Value for 1g(mW/g)               | 7.25                          | 7.48                            | 3.2%        | Pass   |
|                 | SAR Value for 10g(mW/g)              | 2.04                          | 2.13                            | 4.4%        | Pass   |
| D5GHzV2(5.5GHz) | Impedance, transformed to feed point | 50.9 $\Omega$ -4.94j $\Omega$ | 49.602 $\Omega$ -1.48j $\Omega$ | <5 $\Omega$ | Pass   |
|                 | Return Loss(dB)                      | -26.1                         | -27.311                         | 4.6%        | Pass   |
|                 | SAR Value for 1g(mW/g)               | 7.63                          | 7.74                            | 1.4%        | Pass   |
|                 | SAR Value for 10g(mW/g)              | 2.13                          | 2.21                            | 3.8%        | Pass   |
| D5GHzV2(5.6GHz) | Impedance, transformed to feed point | 58.5 $\Omega$ -0.79j $\Omega$ | 55.055 $\Omega$ +2.28j $\Omega$ | <5 $\Omega$ | Pass   |
|                 | Return Loss(dB)                      | -22.1                         | -23.276                         | 5.3%        | Pass   |
|                 | SAR Value for 1g(mW/g)               | 7.78                          | 8.01                            | 3.0%        | Pass   |
|                 | SAR Value for 10g(mW/g)              | 2.14                          | 2.23                            | 4.2%        | Pass   |
| D5GHzV2(5.8GHz) | Impedance, transformed to feed point | 54.3 $\Omega$ +0.12j $\Omega$ | 53.011 $\Omega$ -1.63j $\Omega$ | <5 $\Omega$ | Pass   |
|                 | Return Loss(dB)                      | -27.6                         | -28.28                          | 2.5%        | Pass   |
|                 | SAR Value for 1g(mW/g)               | 7.66                          | 7.73                            | 0.9%        | Pass   |
|                 | SAR Value for 10g(mW/g)              | 2.15                          | 2.17                            | 0.9%        | Pass   |

Impedance Test-Head


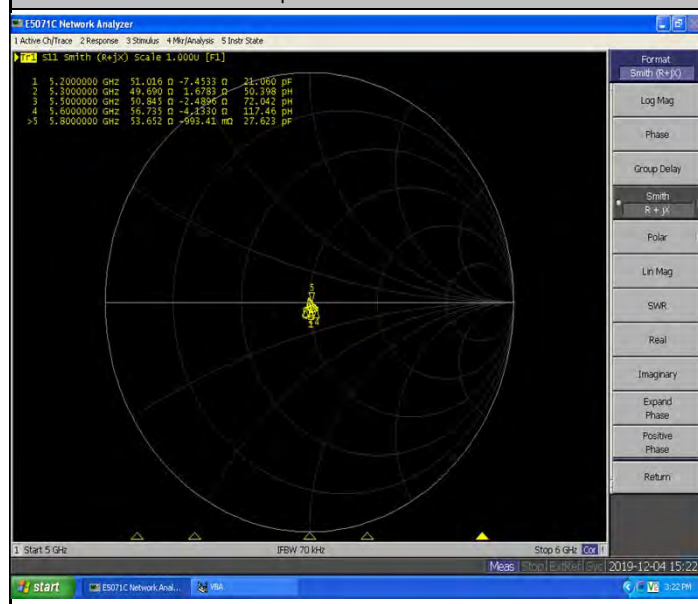




Return Loss-Head


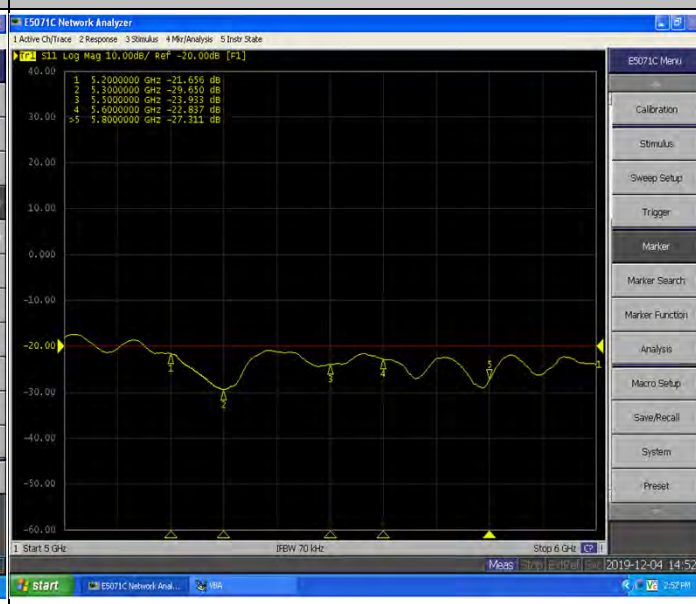




| Validation Report for Head TSL of 5.2GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Validation Report for Head TSL of 5.3GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_H5200_1204</b></p> <p>DUT: Dipole D5GHzV2;SN;1160;</p> <p>Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1<br/> Medium parameters used: <math>f = 5200 \text{ MHz}</math>; <math>\sigma = 4.756 \text{ S/m}</math>; <math>\epsilon_r = 35.67</math>; <math>\rho = 1000 \text{ kg/m}^3</math><br/> Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(5.54, 5.54, 5.54) @ 5200 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p>Area Scan (6x6x1): Interpolated grid: <math>dx=10 \text{ mm}</math>, <math>dy=10 \text{ mm}</math><br/> Maximum value of SAR (interpolated) = 16.8 W/kg</p> <p>Zoom Scan (7x7x12)/Cube 0: Measurement grid: <math>dx=4 \text{ mm}</math>, <math>dy=4 \text{ mm}</math>, <math>dz=2 \text{ mm}</math><br/> Reference Value = 60.39 V/m; Power Drift = 0.12 dB<br/> Peak SAR (extrapolated) = 34.2 W/kg<br/> SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.24 W/kg<br/> Maximum value of SAR (measured) = 16.8 W/kg</p> | <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_H5300_1204</b></p> <p>DUT: Dipole D5GHzV2;SN;1160;</p> <p>Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1<br/> Medium parameters used (interpolated): <math>f = 5300 \text{ MHz}</math>; <math>\sigma = 4.869 \text{ S/m}</math>; <math>\epsilon_r = 35.413</math>; <math>\rho = 1000 \text{ kg/m}^3</math><br/> Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(5.21, 5.21, 5.21) @ 5300 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p>Area Scan (6x6x1): Interpolated grid: <math>dx=10 \text{ mm}</math>, <math>dy=10 \text{ mm}</math><br/> Maximum value of SAR (interpolated) = 16.8 W/kg</p> <p>Zoom Scan (7x7x12)/Cube 0: Measurement grid: <math>dx=4 \text{ mm}</math>, <math>dy=4 \text{ mm}</math>, <math>dz=2 \text{ mm}</math><br/> Reference Value = 59.72 V/m; Power Drift = 0.10 dB<br/> Peak SAR (extrapolated) = 34.9 W/kg<br/> SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.2 W/kg<br/> Maximum value of SAR (measured) = 16.6 W/kg</p> |
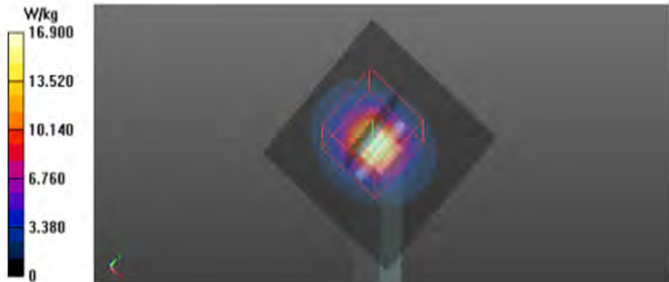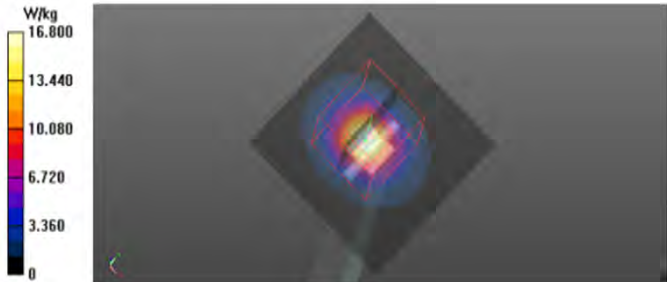
| Validation Report for Head TSL of 5.5GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Validation Report for Head TSL of 5.6GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_H5500_1204</b></p> <p>DUT: Dipole D5GHzV2;</p> <p>Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1<br/> Medium parameters used: <math>f = 5500</math> MHz; <math>\sigma = 5.089</math> S/m; <math>\epsilon_r = 34.996</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/> Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(4.95, 4.95, 4.95) @ 5500 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p><b>Area Scan (6x6x1):</b> Interpolated grid: <math>dx=10</math> mm, <math>dy=10</math> mm<br/> Maximum value of SAR (interpolated) = 16.9 W/kg</p> <p><b>Zoom Scan (7x7x6)/Cube 0:</b> Measurement grid: <math>dx=4</math>mm, <math>dy=4</math>mm, <math>dz=2</math>mm<br/> Reference Value = 58.79 V/m; Power Drift = 0.04 dB<br/> Peak SAR (extrapolated) = 37.2 W/kg<br/> <b>SAR(1 g) = 7.79 W/kg; SAR(10 g) = 2.21 W/kg</b><br/> Maximum value of SAR (measured) = 16.9 W/kg</p>  | <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_H5600_1204</b></p> <p>DUT: Dipole D5GHzV2;</p> <p>Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1<br/> Medium parameters used: <math>f = 5600</math> MHz; <math>\sigma = 5.212</math> S/m; <math>\epsilon_r = 34.691</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/> Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(4.81, 4.81, 4.81) @ 5600 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p><b>Area Scan (6x6x1):</b> Interpolated grid: <math>dx=10</math> mm, <math>dy=10</math> mm<br/> Maximum value of SAR (interpolated) = 17.4 W/kg</p> <p><b>Zoom Scan (7x7x6)/Cube 0:</b> Measurement grid: <math>dx=4</math>mm, <math>dy=4</math>mm, <math>dz=2</math>mm<br/> Reference Value = 58.21 V/m; Power Drift = 0.08 dB<br/> Peak SAR (extrapolated) = 38.4 W/kg<br/> <b>SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.19 W/kg</b><br/> Maximum value of SAR (measured) = 16.8 W/kg</p>  |
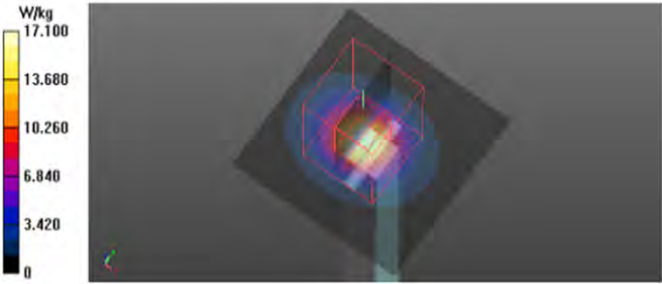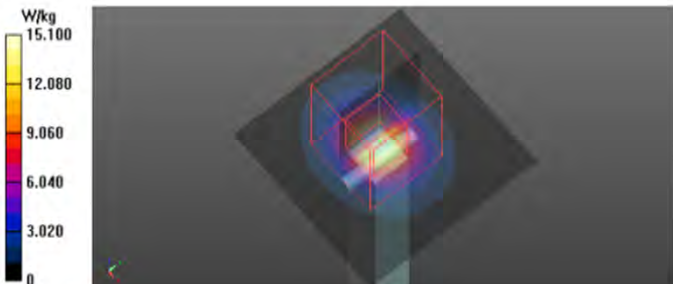
| Validation Report for Head TSL of 5.8GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Validation Report for Body TSL of 5.2GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_H5800_1204</b></p> <p>DUT: Dipole D5GHzV2;SN;1160;</p> <p>Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1<br/> Medium parameters used: <math>f = 5800 \text{ MHz}</math>; <math>\sigma = 5.468 \text{ S/m}</math>; <math>\epsilon_r = 34.215</math>; <math>\rho = 1000 \text{ kg/m}^3</math><br/> Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(4.75, 4.75, 4.75) @ 5800 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p><b>Area Scan (6x6x1):</b> Interpolated grid: <math>dx=10 \text{ mm}</math>, <math>dy=10 \text{ mm}</math><br/> Maximum value of SAR (interpolated) = 17.0 W/kg</p> <p><b>Zoom Scan (7x7x6)/Cube 0:</b> Measurement grid: <math>dx=4\text{mm}</math>, <math>dy=4\text{mm}</math>, <math>dz=2\text{mm}</math><br/> Reference Value = 57.22 V/m; Power Drift = 0.06 dB<br/> Peak SAR (extrapolated) = 41.0 W/kg<br/> <b>SAR(1 g) = 7.83 W/kg; SAR(10 g) = 2.19 W/kg</b><br/> Maximum value of SAR (measured) = 17.1 W/kg</p>  | <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_B5200_1204</b></p> <p>DUT: Dipole D5GHzV2;SN;1160;</p> <p>Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1<br/> Medium parameters used: <math>f = 5200 \text{ MHz}</math>; <math>\sigma = 5.368 \text{ S/m}</math>; <math>\epsilon_r = 47.819</math>; <math>\rho = 1000 \text{ kg/m}^3</math><br/> Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(4.68, 4.68, 4.68) @ 5200 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p><b>Area Scan (6x6x1):</b> Interpolated grid: <math>dx=10 \text{ mm}</math>, <math>dy=10 \text{ mm}</math><br/> Maximum value of SAR (interpolated) = 15.0 W/kg</p> <p><b>Zoom Scan (7x7x12)/Cube 0:</b> Measurement grid: <math>dx=4\text{mm}</math>, <math>dy=4\text{mm}</math>, <math>dz=2\text{mm}</math><br/> Reference Value = 55.25 V/m; Power Drift = 0.12 dB<br/> Peak SAR (extrapolated) = 29.3 W/kg<br/> <b>SAR(1 g) = 7.02 W/kg; SAR(10 g) = 2.01 W/kg</b><br/> Maximum value of SAR (measured) = 15.1 W/kg</p>  |
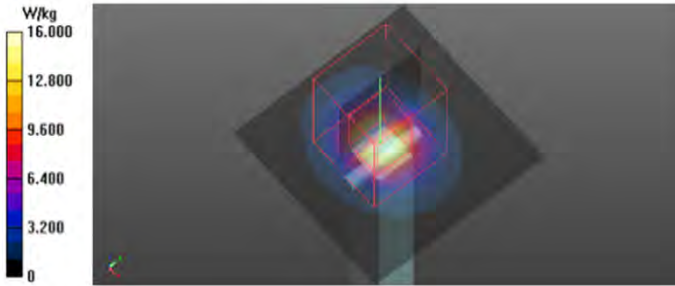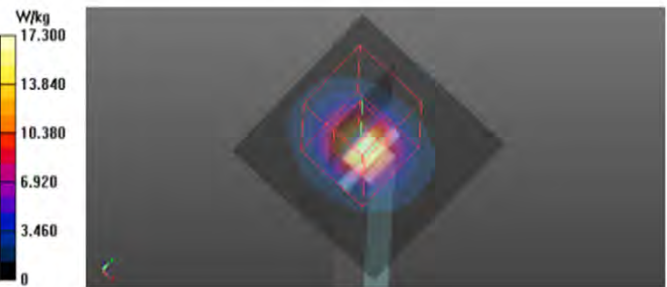
| Validation Report for Body TSL of 5.3GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Validation Report for Body TSL of 5.5GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_B5300_1204</b></p> <p>DUT: Dipole D5GHzV2;SN;1160;</p> <p>Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1<br/> Medium parameters used: <math>f = 5300 \text{ MHz}</math>; <math>\sigma = 5.503 \text{ S/m}</math>; <math>\epsilon_r = 47.637</math>; <math>\rho = 1000 \text{ kg/m}^3</math><br/> Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(4.51, 4.51, 4.51) @ 5300 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p><b>Area Scan (6x6x1):</b> Interpolated grid: <math>dx=10 \text{ mm}</math>, <math>dy=10 \text{ mm}</math><br/> Maximum value of SAR (interpolated) = 16.5 W/kg</p> <p><b>Zoom Scan (7x7x12)/Cube 0:</b> Measurement grid: <math>dx=4\text{mm}</math>, <math>dy=4\text{mm}</math>, <math>dz=2\text{mm}</math><br/> Reference Value = 57.20 V/m; Power Drift = -0.05 dB<br/> Peak SAR (extrapolated) = 32.1 W/kg<br/> <b>SAR(1 g) = 7.48 W/kg; SAR(10 g) = 2.13 W/kg</b><br/> Maximum value of SAR (measured) = 16.0 W/kg</p>  | <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_B5500_1204</b></p> <p>DUT: Dipole D5GHzV2;</p> <p>Communication System: UID 0, CW (0); Frequency: 5500 MHz; Duty Cycle: 1:1<br/> Medium parameters used: <math>f = 5500 \text{ MHz}</math>; <math>\sigma = 5.792 \text{ S/m}</math>; <math>\epsilon_r = 47.276</math>; <math>\rho = 1000 \text{ kg/m}^3</math><br/> Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN7544; ConvF(4.26, 4.26, 4.26) @ 5500 MHz; Calibrated: 2019/9/9</li> <li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li> <li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li> <li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li> <li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li> </ul> <p><b>Area Scan (6x6x1):</b> Interpolated grid: <math>dx=10 \text{ mm}</math>, <math>dy=10 \text{ mm}</math><br/> Maximum value of SAR (interpolated) = 17.0 W/kg</p> <p><b>Zoom Scan (7x7x6)/Cube 0:</b> Measurement grid: <math>dx=4\text{mm}</math>, <math>dy=4\text{mm}</math>, <math>dz=2\text{mm}</math><br/> Reference Value = 57.07 V/m; Power Drift = 0.03 dB<br/> Peak SAR (extrapolated) = 37.0 W/kg<br/> <b>SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.21 W/kg</b><br/> Maximum value of SAR (measured) = 17.3 W/kg</p>  |

| Validation Report for Body TSL of 5.6GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Validation Report for Body TSL of 5.8GHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_B5600_1204</b></p> <p>DUT: Dipole D5GHzV2;</p> <p>Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1<br/>Medium parameters used: <math>f = 5600</math> MHz; <math>\sigma = 5.943</math> S/m; <math>\epsilon_r = 47.085</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7544; ConvF(4.1, 4.1, 4.1) @ 5600 MHz; Calibrated: 2019/9/9</li><li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li><li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li><li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li><li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li></ul> <p>Area Scan (6x6x1): Interpolated grid: <math>dx=10</math> mm, <math>dy=10</math> mm<br/>Maximum value of SAR (interpolated) = 17.6 W/kg</p> <p>Zoom Scan (7x7x6)/Cube 0: Measurement grid: <math>dx=4</math>mm, <math>dy=4</math>mm, <math>dz=2</math>mm<br/>Reference Value = 55.73 V/m; Power Drift = 0.05 dB<br/>Peak SAR (extrapolated) = 39.0 W/kg<br/>SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.23 W/kg<br/>Maximum value of SAR (measured) = 17.4 W/kg</p> <div><div>W/kg<br/>17.400<br/>13.920<br/>10.440<br/>6.960<br/>3.480<br/>0</div></div> | <p>Test Laboratory: BTL Inc.      Date: 2019/12/04</p> <p><b>System Check_B5800_1204</b></p> <p>DUT: Dipole D5GHzV2;SN:1160;</p> <p>Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1<br/>Medium parameters used: <math>f = 5800</math> MHz; <math>\sigma = 6.234</math> S/m; <math>\epsilon_r = 46.686</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>Ambient Temperature : 23.3 °C; Liquid Temperature : 22.4 °C</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7544; ConvF(4.13, 4.13, 4.13) @ 5800 MHz; Calibrated: 2019/9/9</li><li>Sensor-Surface: 2mm (Mechanical Surface Detection), <math>z = 1.0, 23.0</math></li><li>Electronics: DAE4 Sn1390; Calibrated: 2019/10/29</li><li>Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1222</li><li>DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)</li></ul> <p>Area Scan (6x6x1): Interpolated grid: <math>dx=10</math> mm, <math>dy=10</math> mm<br/>Maximum value of SAR (interpolated) = 16.8 W/kg</p> <p>Zoom Scan (7x7x6)/Cube 0: Measurement grid: <math>dx=4</math>mm, <math>dy=4</math>mm, <math>dz=2</math>mm<br/>Reference Value = 54.08 V/m; Power Drift = 0.12 dB<br/>Peak SAR (extrapolated) = 38.5 W/kg<br/>SAR(1 g) = 7.73 W/kg; SAR(10 g) = 2.17 W/kg<br/>Maximum value of SAR (measured) = 17.1 W/kg</p> <div><div>W/kg<br/>17.100<br/>13.680<br/>10.260<br/>6.840<br/>3.420<br/>6.86e-001</div></div> |

Calibrator: *Rot - Liang*

Approver: *Herbert Lim*