

FCC / IC Radio Test Report

Applicant : Qualcomm Atheros, Inc.
Manufacturer : 1700 Technology Drive, San Jose, CA95110
Equipment : 1X1 802.11b/g/n-BT4.0 PCIe/USB M.2 Combo Module
Brand Name : Qualcomm Atheros
Model No. : QCNFA335
FCC ID : PPD-QCNFA335
IC ID : 4104A-QCNFA335
Standard : 47 CFR FCC Part 15.247
RSS-210 Issue 8
Operating Band : 2400 MHz – 2483.5 MHz

The product sample received on Aug. 27, 2013 and completely tested on Feb. 18, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment.....	8
1.3	Testing Applied Standards	8
1.4	Testing Location Information.....	8
1.5	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	Test Setup Diagram	10
3	TRANSMITTER TEST RESULT	12
3.1	20dB Bandwidth and Carrier Frequency Separation	12
3.2	Number of Hopping Frequencies	16
3.3	Time of Occupancy (Dwell Time)	17
3.4	RF Output Power.....	19
3.5	Emission in Non-Restricted Frequency Bands.....	21
3.6	Emission in Restricted Frequency Bands	25
3.7	AC Power-line Conducted Emissions	36
4	TEST EQUIPMENT AND CALIBRATION DATA	39
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.3	15.203	Antenna Requirement	Antenna connector mechanism complied	According to FCC 15.203	Complied
3.1	15.247(a) / RSS-210 A8.1 / RSS-Gen 4.6.1	20dB Bandwidth	EDR: 1.2874 MHz	N/A	Complied
		99% Bandwidth	EDR: 1.1736 MHz		
		Carrier Frequency Separation (ChS)	EDR: 1 MHz	ChS \geq BW _{20dB} x2/3.	Complied
3.2	15.247(a) / RSS-210 A8.1	Number of Hopping Frequencies (N)	Max: 79 Min: 20	N \geq 15	Complied
3.3	15.247(a) / RSS-210 A8.1	Time of Occupancy (Dwell Time)	EDR: 0.316 sec	0.4 s within 0.4 x N	Complied
3.4	15.247(b) / RSS-210 A8.4	RF Output Power (Maximum Peak Conducted Output Power)	BR: 5.43 dBm EDR: 8.37 dBm	BR:21 dBm EDR:21 dBm	Complied
3.5	15.247(d) / RSS-210 A8.5	Emission in Non-Restricted Frequency Bands	Non Restricted Bands: 2545.12MHz: 42.45dB	Non-Restricted Bands: > 20 dBc	Complied
3.6.5	15.247(d) / RSS-210 A8.5	Emission in Restricted Frequency Bands	Restricted Bands 766.230 MHz 42.03 dBuV/m @ 3 m - PK	Restricted Bands: According to FCC 15.209 / RSS-Gen 6.1	Complied
3.7	15.207 / RSS-Gen 7.2.4	AC Power-line Conducted Emissions	0.1965370 MHz 41.69 dBuV - AV 51.62 dBuV - QP	According to FCC 15.207 / RSS-Gen 7.2.4	Complied

Revision History

[illegible]

1 General Description

1.1 Information

1.1.1 RF General Information (Bluetooth)

RF General Information					
Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Bluetooth Mode	RF Output Power (dBm)	Co-location
2400~2483.5	2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480	0-78 [79]	BR-1Mbps	5.43	No
			EDR-2Mbps	7.96	
			EDR-3Mbps	8.37	
Note 1: Bluetooth BR uses a GFSK (1Mbps). Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). Note 3: RF output power specifies that Maximum Peak Conducted Output Power. Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)					

1.1.2 WLAN/ BT coexistence mode

- There are two HW variants for this module. The pretesting is conducted and test data from worst case is recorded in test report.

HW version 032: Dual Antenna	1X1 WLAN + BT: WLAN/BT concurrent at different antenna port and 18MHz separation between WLAN and BT fundamental. The WLAN is transmitted by the Chain 0 and the BT is transmitted by the Chain 1.
HW version 232: Single antenna	1X1 WLAN + BT: WLAN/BT 18MHz separation between WLAN and BT fundamental.
Note : Verified two HW versions and version 032 is the worst case. Record the worst case results in this report.	

1.1.3 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	External antenna (dedicated antennas)
<input checked="" type="checkbox"/>	RF connector provided
<input checked="" type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information					
Original					
No.	Frequency Band	Ant. Type	Brand Name	Model No. / Part No.	Maximum Gain (dBi)
1	2400~2483.5MHz	PIFA	Wistron NeWeb Corporation	EBJ	3.62
2	2400~2483.5MHz	Dipole	INPAQ	DAMA1BM30000402	3.20
Additional					
No.	Frequency Band	Ant. Type	Brand Name	Model No. / Part No.	Maximum Gain (dBi)
3	2400~2483.5MHz	Slot	WNC	81EAAX15.G02	-0.01
4	2400~2483.5MHz	Slot	WNC	81EAAX15.G03	2.08
5	2400~2483.5MHz	Slot	Speedwire	F.0G.FN-6006-001	-0.45
6	2400~2483.5MHz	PIFA	ACON	APP6Y-700045	1.36
7	2400~2483.5MHz	PIFA	ACON	APP6Y-700046	-0.13

The RF Conducted performed the worst configuration for higher gain was test in final test report.

1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.5 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 78.72% - test mode single channel - DH5	1.04
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.	

1.1.6 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> Host	<input type="checkbox"/> Battery

1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	INSPIRON 6400	DoC
2	Test Fixture	--	--	--

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15 Subpart C 15.247
- ◆ RSS-210 Issue 8
- ◆ RSS-GEN Issue 3
- ◆ ANSI C63.10-2009
- ◆ FCC DA-00-0705

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
AC Conduction		CO04-HY	Zeus	20.3°C / 40%
RF Conducted		TH06-HY	Cain	20.4°C / 67.0%
Radiated Emission		03CH03-HY	Leo	20.3°C / 40%


1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))


Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.26 dB
Emission bandwidth, 6dB bandwidth		±1.42 %
RF output power, conducted		±0.63 dB
Power density, conducted		±0.81 dB
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.42 %
Duty Cycle		±1.42 %

2 Test Configuration of EUT


2.1 Test Setup Diagram

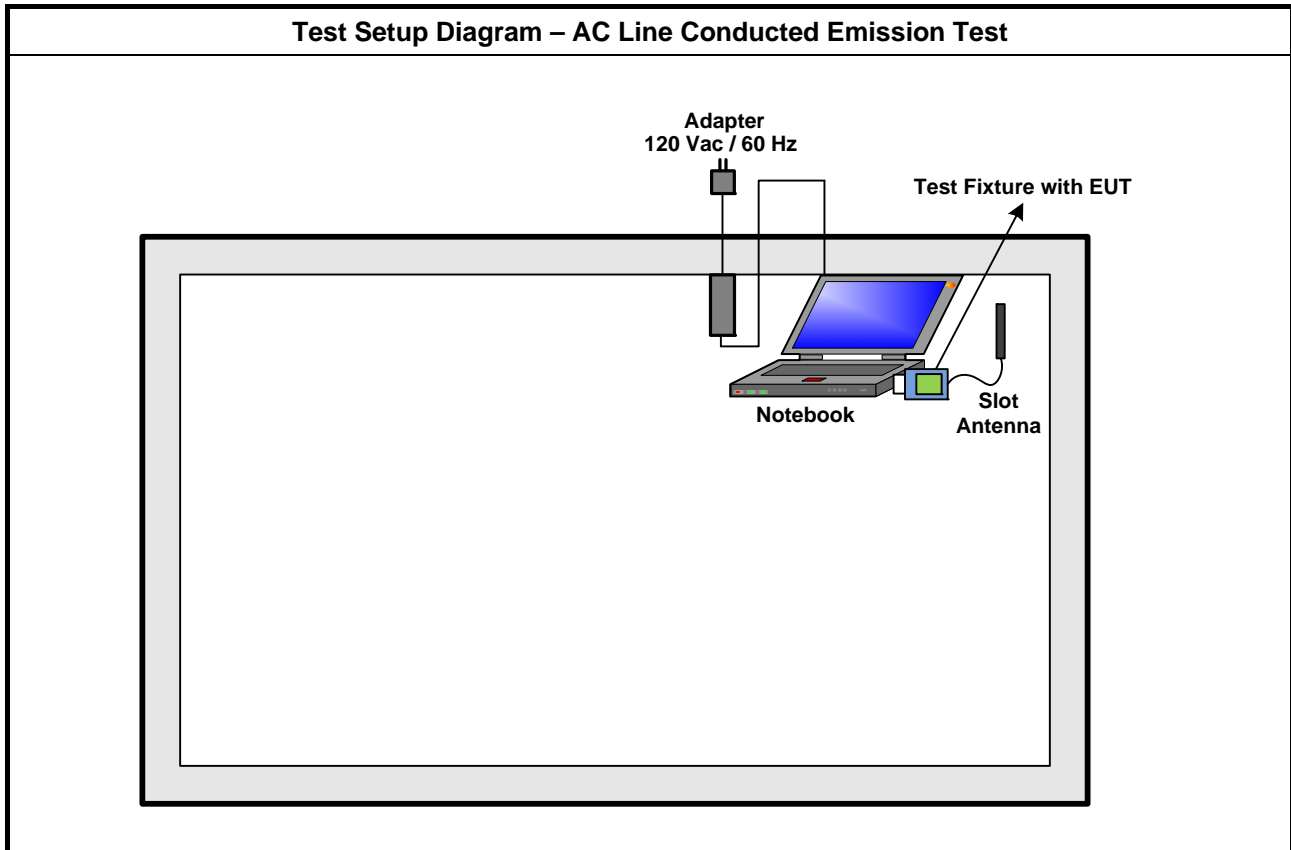

Test Setup Diagram - Radiated Test (Below 1GHz)

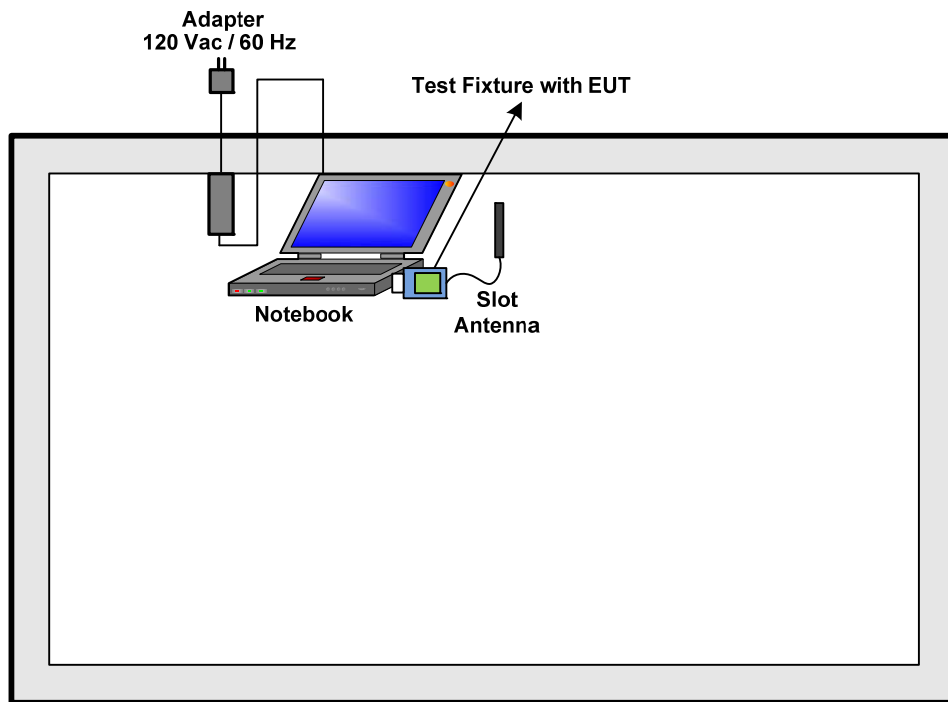

Test Setup Diagram - Radiated Test (Above 1GHz)

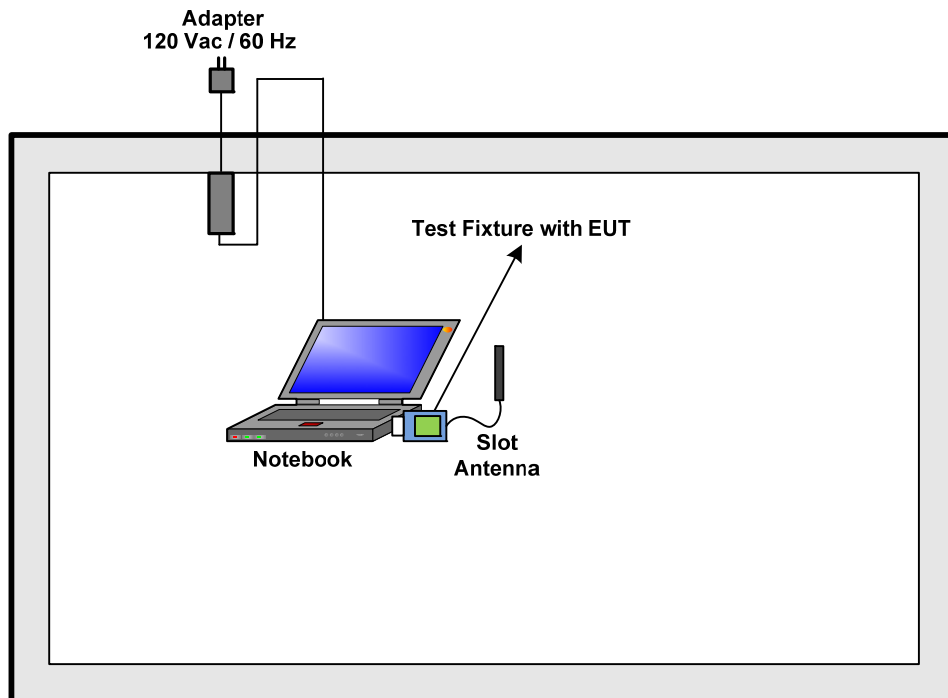


3 Transmitter Test Result

3.1 20dB Bandwidth and Carrier Frequency Separation

3.1.1 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.1.2 Test Setup

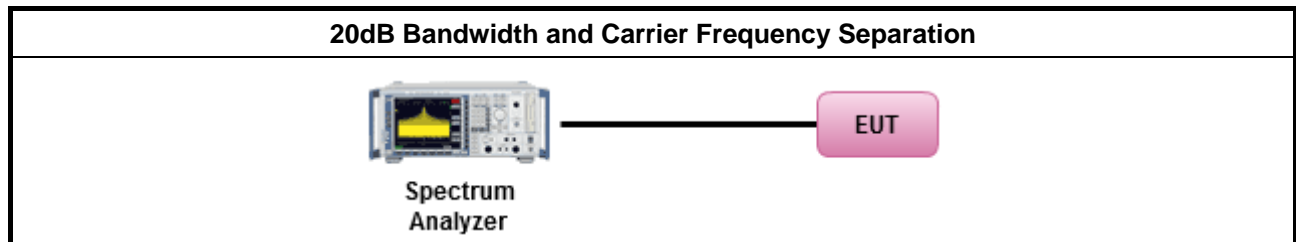


3.1.3 Test Result of 20dB Bandwidth and Carrier Frequency Separation


20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
BR-1Mbps	2402	0.9421	0.87265	1	0.628
BR-1Mbps	2440	0.9421	0.87699	1	0.628
BR-1Mbps	2480	0.9421	0.87699	1	0.628
EDR-3Mbps	2402	1.2754	1.1736	1	0.850
EDR-3Mbps	2440	1.2874	1.1736	1	0.858
EDR-3Mbps	2480	1.2814	1.1736	1	0.854
Result		Complied			

Worst 20dB Bandwidth Plots

BR-1Mbps

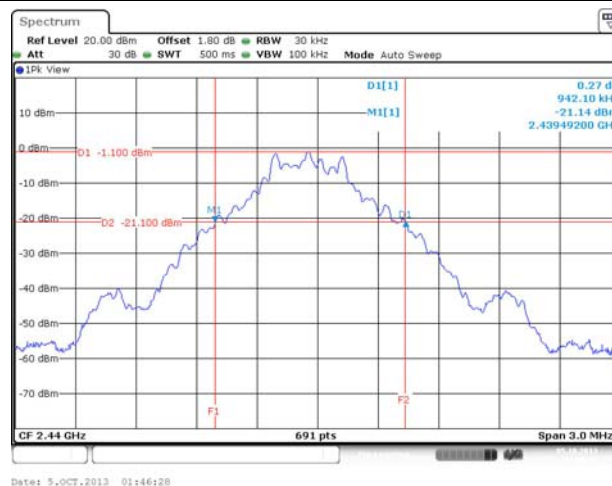


EDR-3Mbps

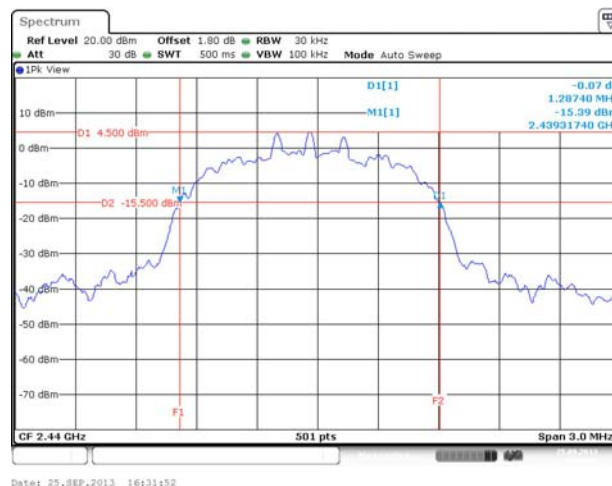

Worst 99% Bandwidth Plots

BR-1Mbps

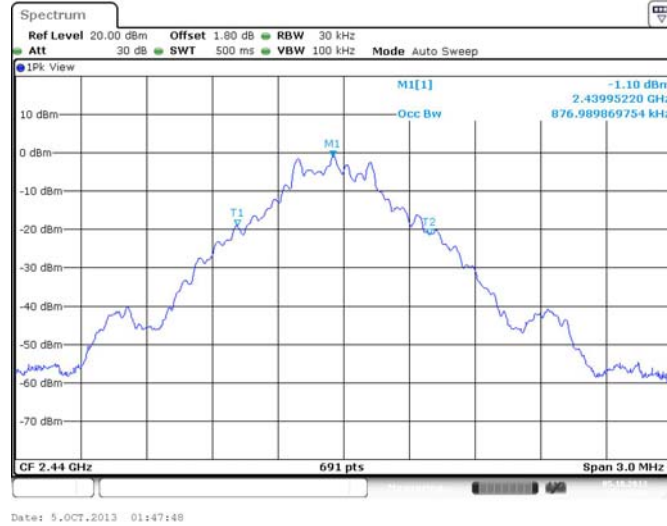


EDR-3Mbps



Worst Carrier Frequency Separation Plots

EDR-3Mbps

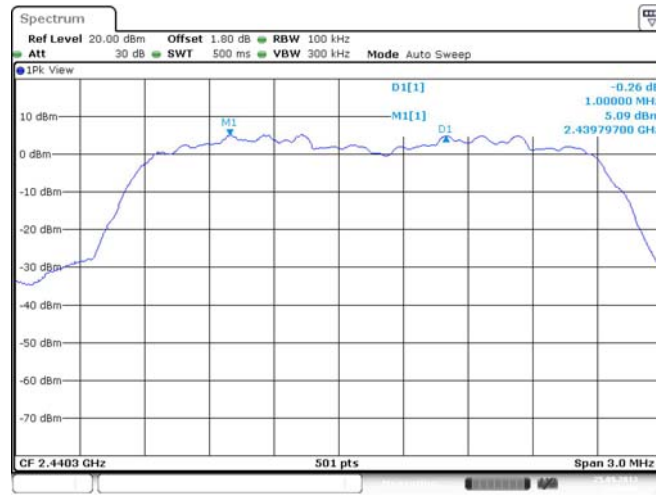


3.2 Number of Hopping Frequencies

3.2.1 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.2.2 Test Setup

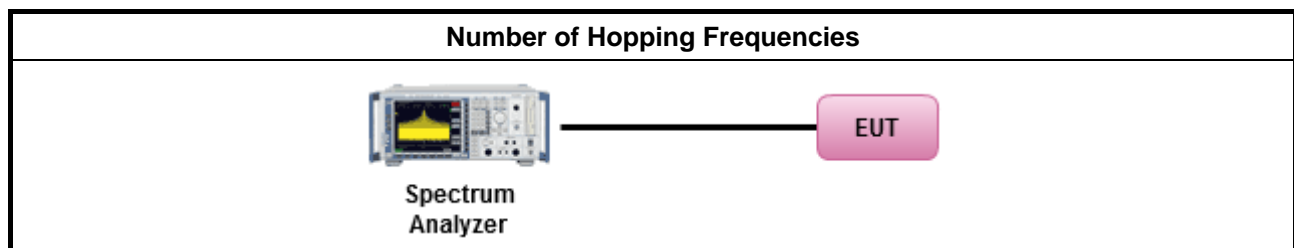

3.2.3 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result				
Modulation Mode	Hopping	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
EDR-3Mbps	Non-AFH	2402-2480	79	15
EDR-3Mbps	AFH	2402-2480	20	15
Result		Complied		

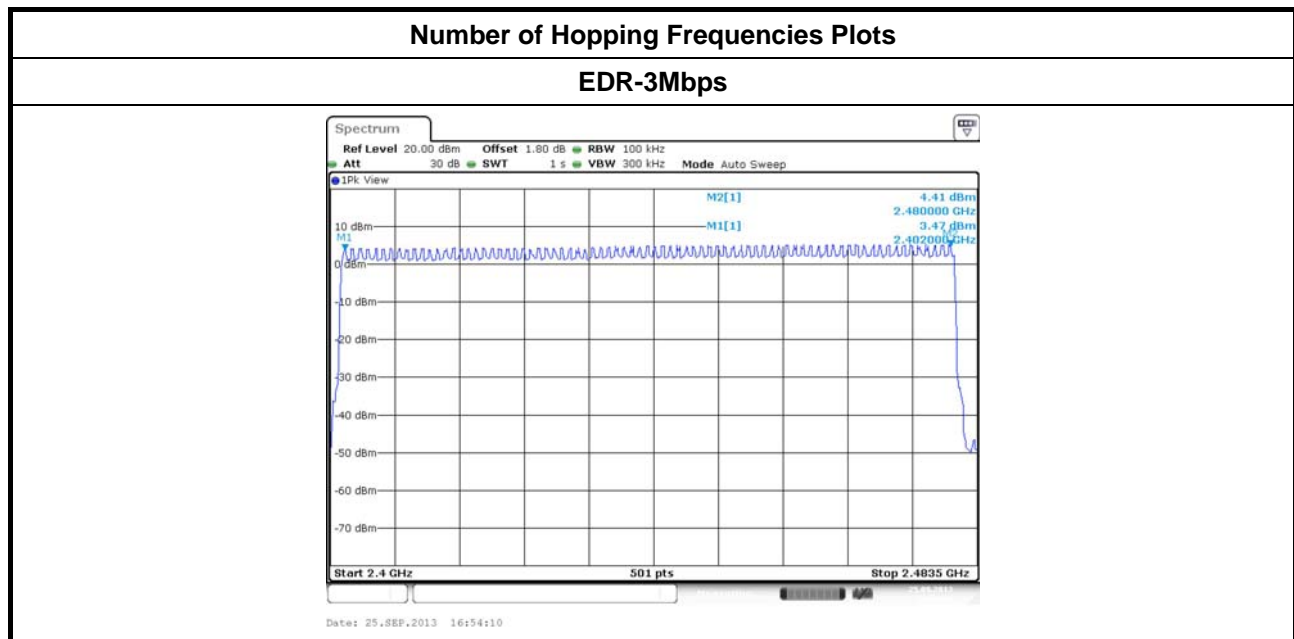


3.3 Time of Occupancy (Dwell Time)

3.3.1 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.
<input checked="" type="checkbox"/>	Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.
<input checked="" type="checkbox"/>	The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
<input checked="" type="checkbox"/>	The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
<input checked="" type="checkbox"/>	The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.3.2 Test Setup

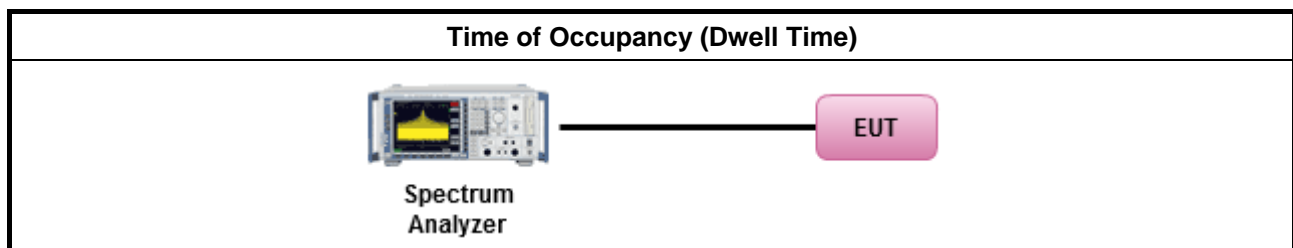

3.3.3 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result							
Modulation Mode	Hopping	Freq. (MHz)	Actual Number of Hopping Freq. (N)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
EDR-3Mbps	Non-AFH	Hopping	79	2.96	106.7	0.316	0.4
EDR-3Mbps	AFH	Hopping	20	2.96	106.7	0.316	0.4
Result			Complied				
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.							

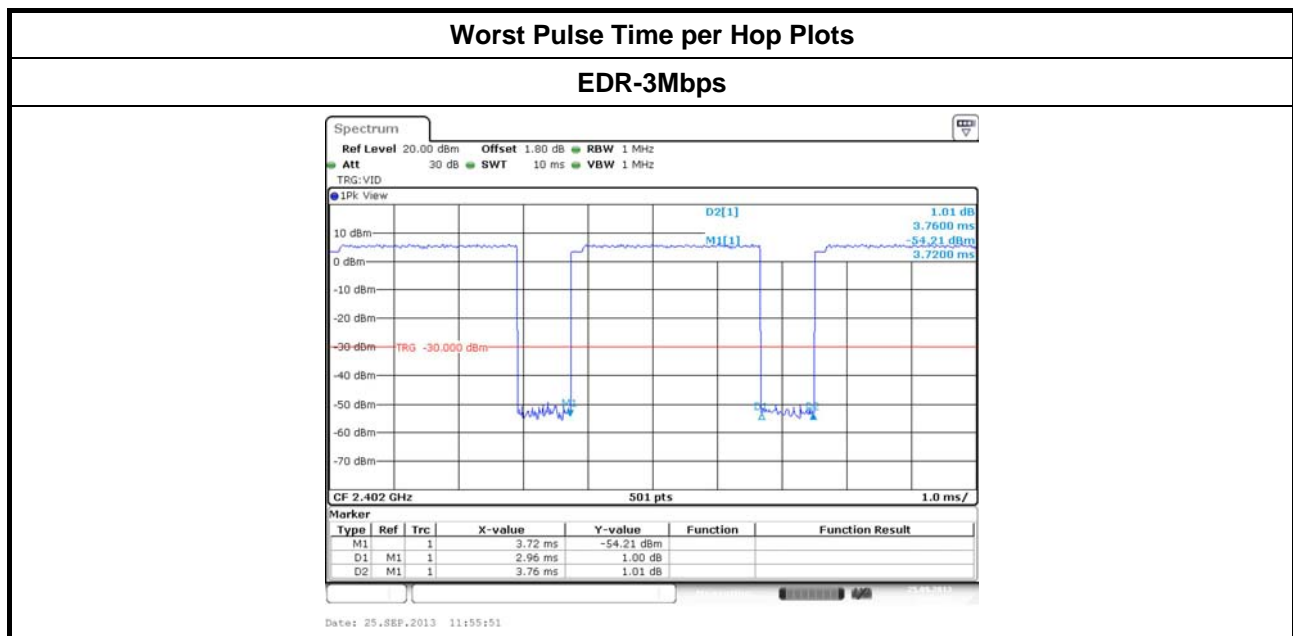


3.4 RF Output Power

3.4.1 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC DA 00-0705, spectrum analyzer for peak power.
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, peak power meter for peak power.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW \geq EBW).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.4.2 Test Setup

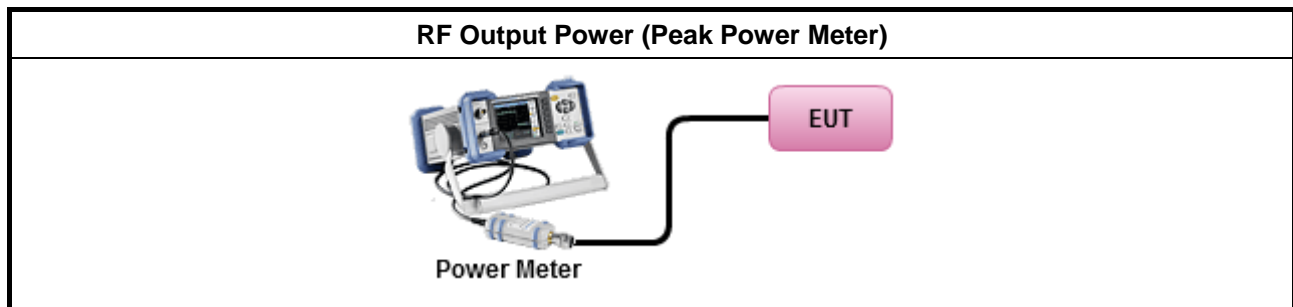

3.4.3 The worst case investigated

Worst Modulation Used for Conformance Testing					
Bluetooth	Transmit Chains (N _{TX})	Data Rate	Modulation Mode	Conducted Power (dBm)	Worst Mode
Mode					
BR	1	1 Mbps	BR-1Mbps	5.43	EDR-3Mbps
EDR	1	2 Mbps	EDR-2Mbps	7.96	
EDR	1	3 Mbps	EDR-3Mbps	8.37	
Note 1: Modulation modes consist of BR-1Mbps, EDR-2Mbps, EDR-3Mbps					
FHSS BR-1Mbps: GFSK (1Mbps), EDR-2Mbps: $\pi/4$ -DQPSK (2Mbps), EDR-3Mbps: 8DPSK(3Mbps)					

3.4.4 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result							
Condition			RF Output Power (dBm)				
Antenna	Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
PIFA	BR-1Mbps	2402	4.42	21	3.62	8.04	27
	BR-1Mbps	2440	4.96	21	3.62	8.58	27
	BR-1Mbps	2480	5.43	21	3.62	9.05	27
	EDR-3Mbps	2402	7.44	21	3.62	11.06	27
	EDR-3Mbps	2440	7.87	21	3.62	11.49	27
	EDR-3Mbps	2480	8.37	21	3.62	11.99	27
Dipole	BR-1Mbps	2402	4.42	21	3.20	7.62	27
	BR-1Mbps	2440	4.96	21	3.20	8.16	27
	BR-1Mbps	2480	5.43	21	3.20	8.63	27
	EDR-3Mbps	2402	7.44	21	3.20	10.64	27
	EDR-3Mbps	2440	7.87	21	3.20	11.07	27
	EDR-3Mbps	2480	8.37	21	3.20	11.57	27
Result			Complied				

3.4.5 Test Result of Maximum Average Conducted Output Power


Maximum Average Conducted Output Power Result							
Condition			RF Output Power (dBm)				
Antenna	Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
PIFA	BR-1Mbps	2402	4.06	21	3.62	7.68	27
	BR-1Mbps	2440	4.71	21	3.62	8.33	27
	BR-1Mbps	2480	5.15	21	3.62	8.77	27
	EDR-3Mbps	2402	4.34	21	3.62	7.96	27
	EDR-3Mbps	2440	4.86	21	3.62	8.48	27
	EDR-3Mbps	2480	5.41	21	3.62	9.03	27
Dipole	BR-1Mbps	2402	4.06	21	3.20	7.26	27
	BR-1Mbps	2440	4.71	21	3.20	7.91	27
	BR-1Mbps	2480	5.15	21	3.20	8.35	27
	EDR-3Mbps	2402	4.34	21	3.20	7.54	27
	EDR-3Mbps	2440	4.86	21	3.20	8.06	27
	EDR-3Mbps	2480	5.41	21	3.20	8.61	27
Result			Complied				



3.5 Emission in Non-Restricted Frequency Bands

3.5.1 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.
<input type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.
<input checked="" type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.

3.5.2 Test Result of Emission in Non-Restricted Frequency Bands-for Conducted Measurement

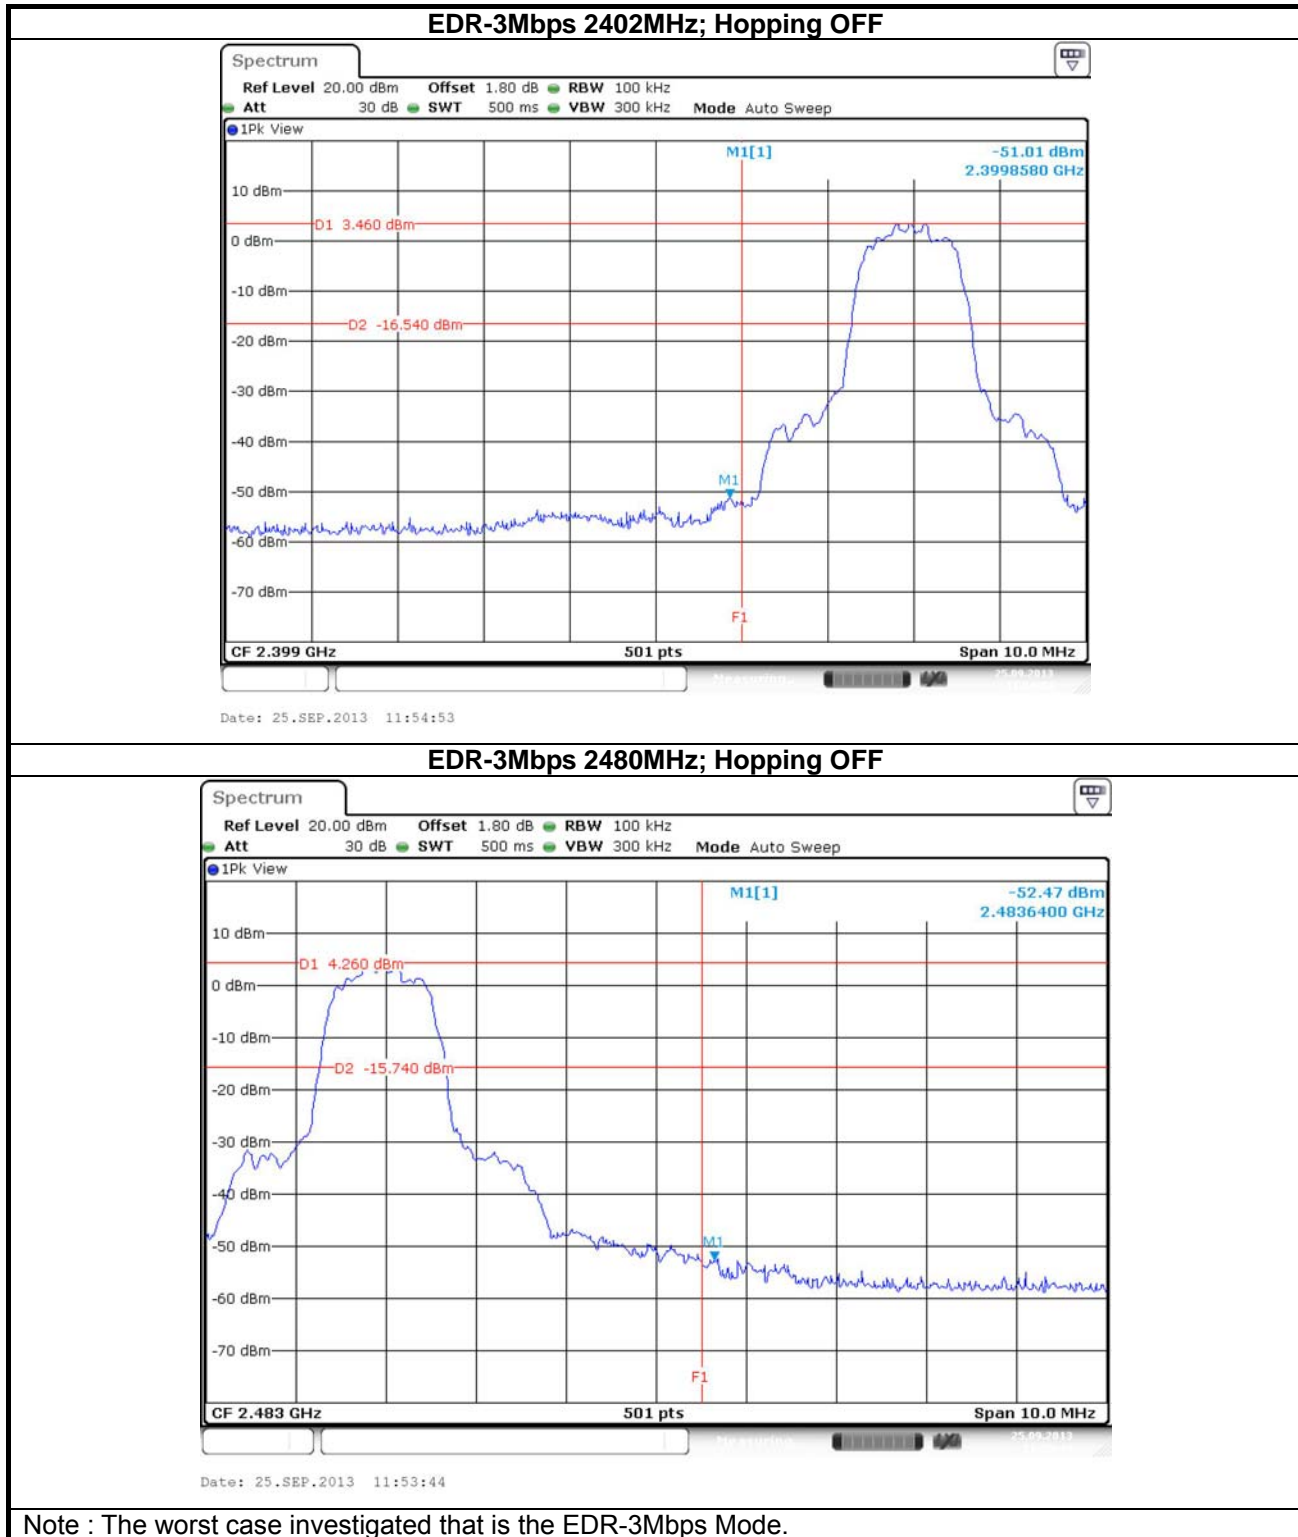

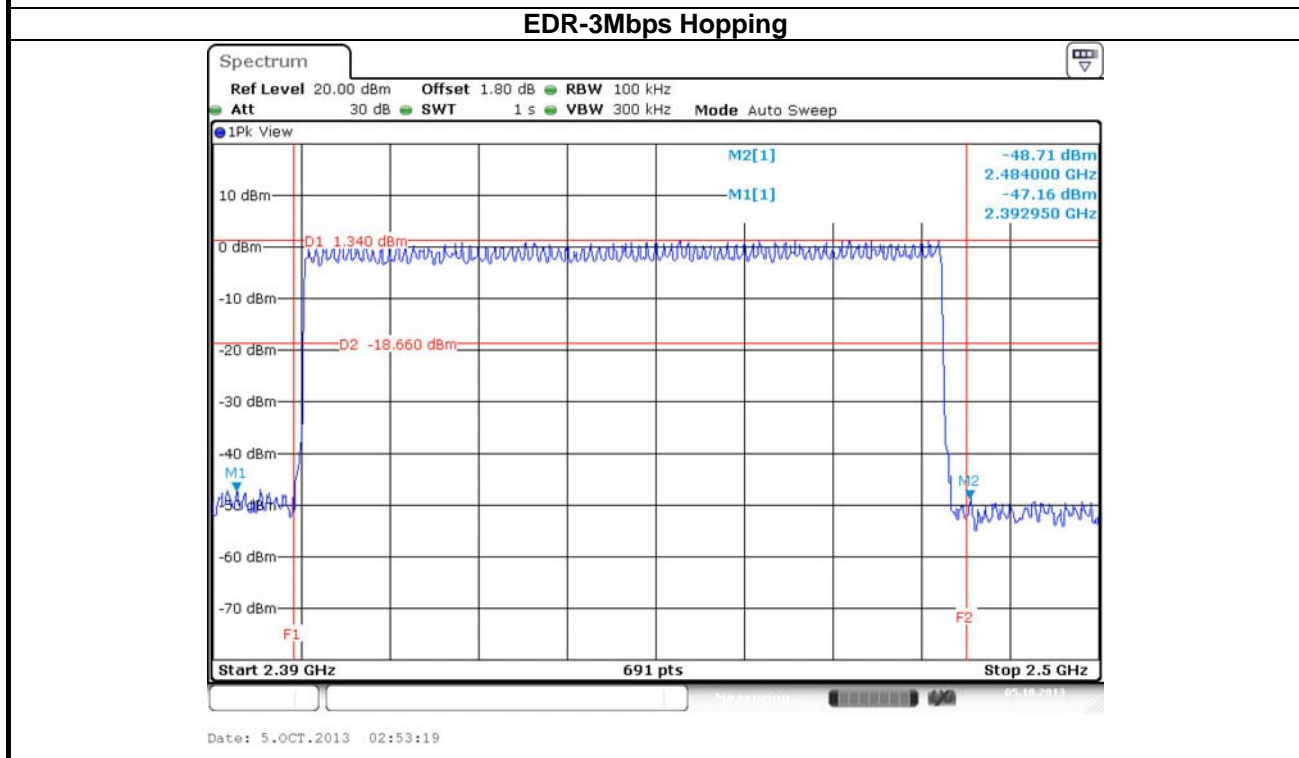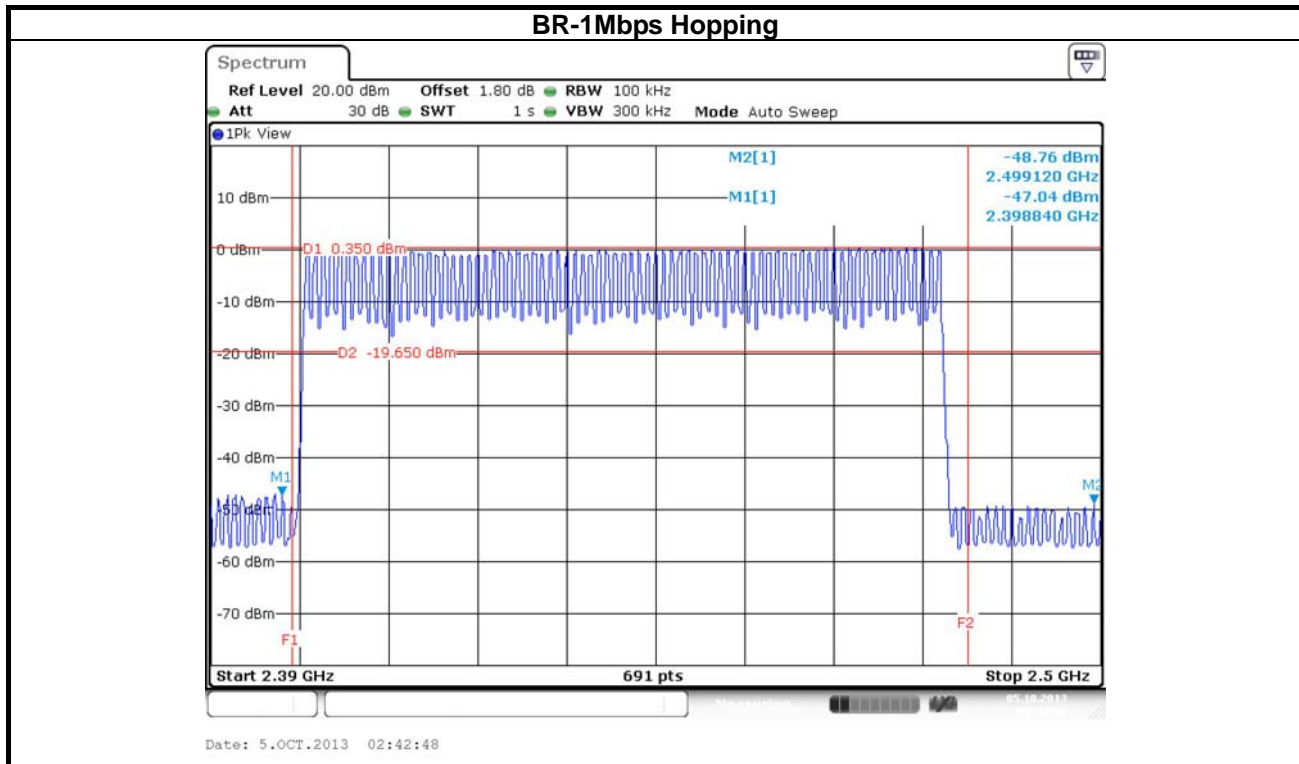

3.5.3 Test Result of Emission in Non-Restricted Frequency Bands-for PIFA Ant.

BR-1Mbps						
Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
2402	98.68	2395.17	54.06	44.62	20	V
2480	97.90	2545.12	55.45	42.45	20	V
Note 1: Measurement worst emissions of receive antenna polarization Note 2: The worst case investigated that is the BR-1Mbps Mode.						

3.5.4 Test Result of Emission in Non-Restricted Frequency Bands-for Dipole Ant.


EDR-3Mbps						
Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
2402	100.53	2398.33	51.23	49.30	20	H
2480	99.35	2547.68	50.94	48.41	20	H
Note 1: Measurement worst emissions of receive antenna polarization. Note 2: The worst case investigated that is the EDR-3Mbps Mode.						

3.6 Emission in Restricted Frequency Bands

3.6.1 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $\text{VBW} \geq 1/T$, where T is pulse time.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz and test distance is 3m.


3.6.2 Test Setup

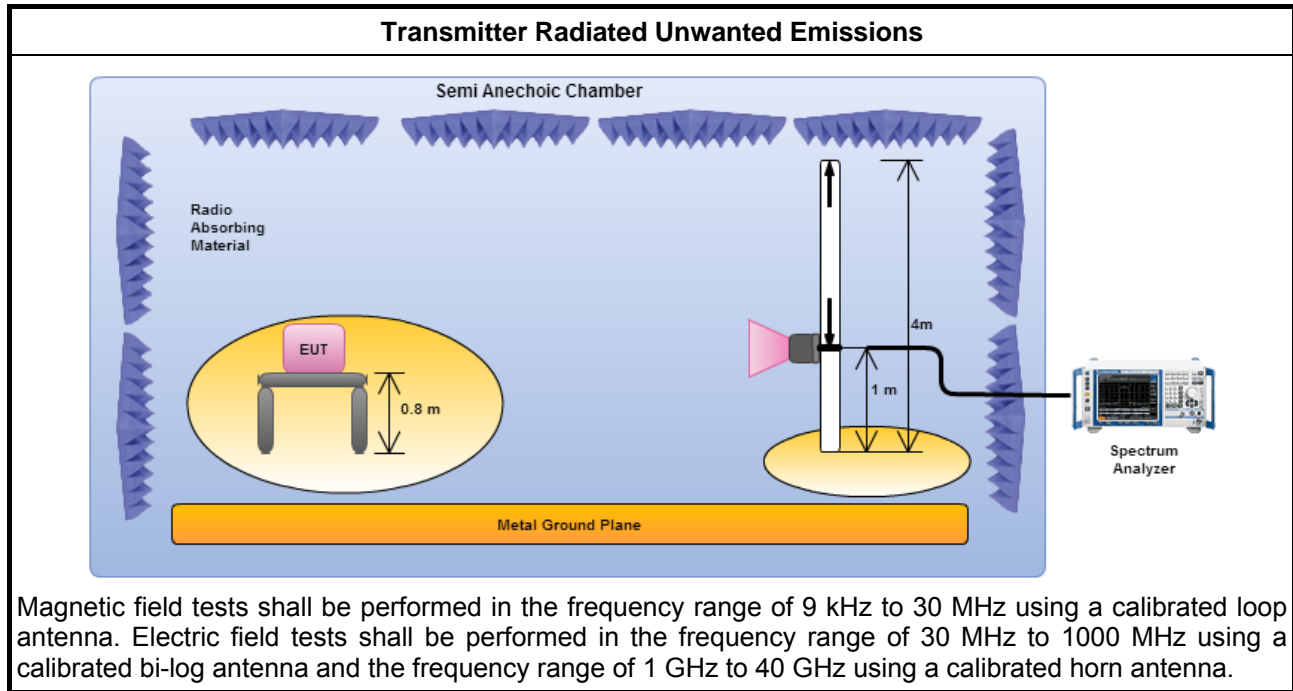

3.6.3 Emission in Restricted Frequency Bands (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.4 Emission in Restricted Frequency Bands (Below 1GHz) -for Slot Ant.

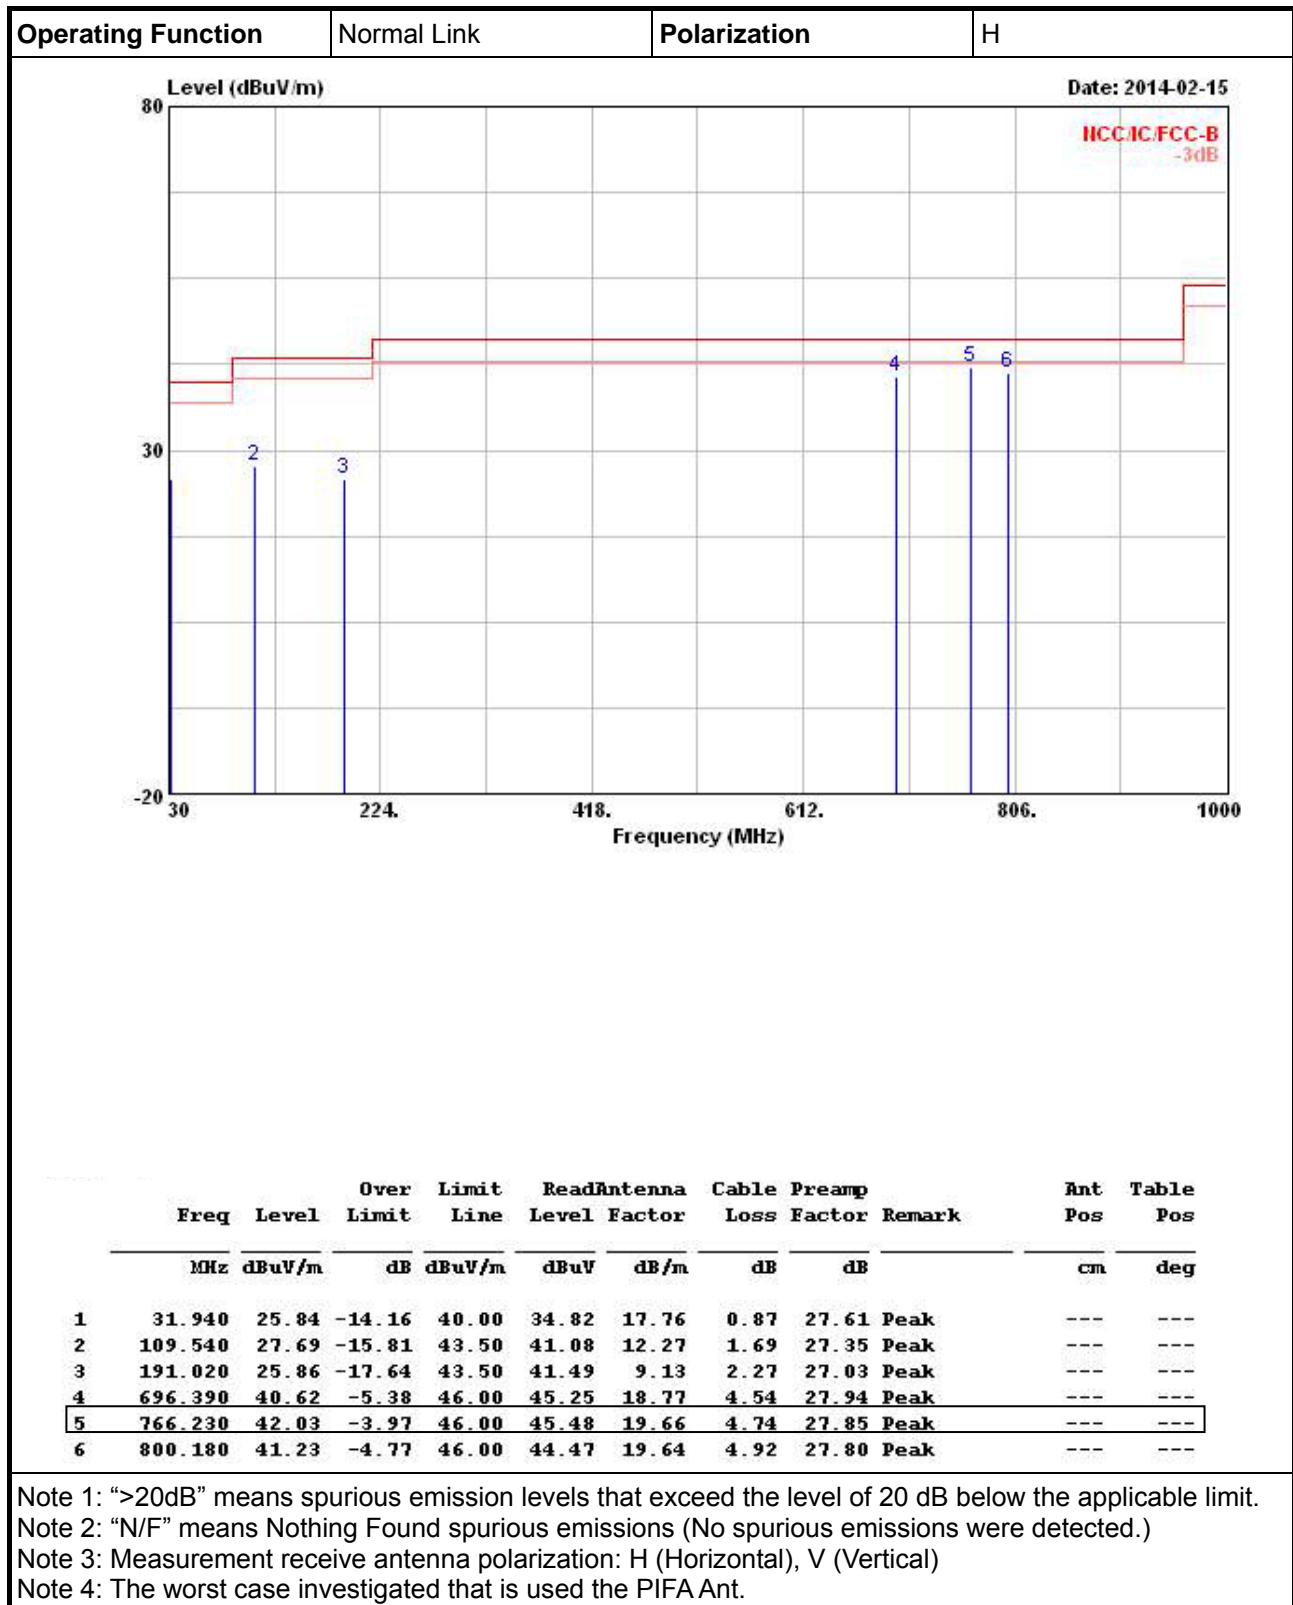




3.6.5 Emission in Restricted Frequency Bands (Above 1GHz) - for Slot Ant.

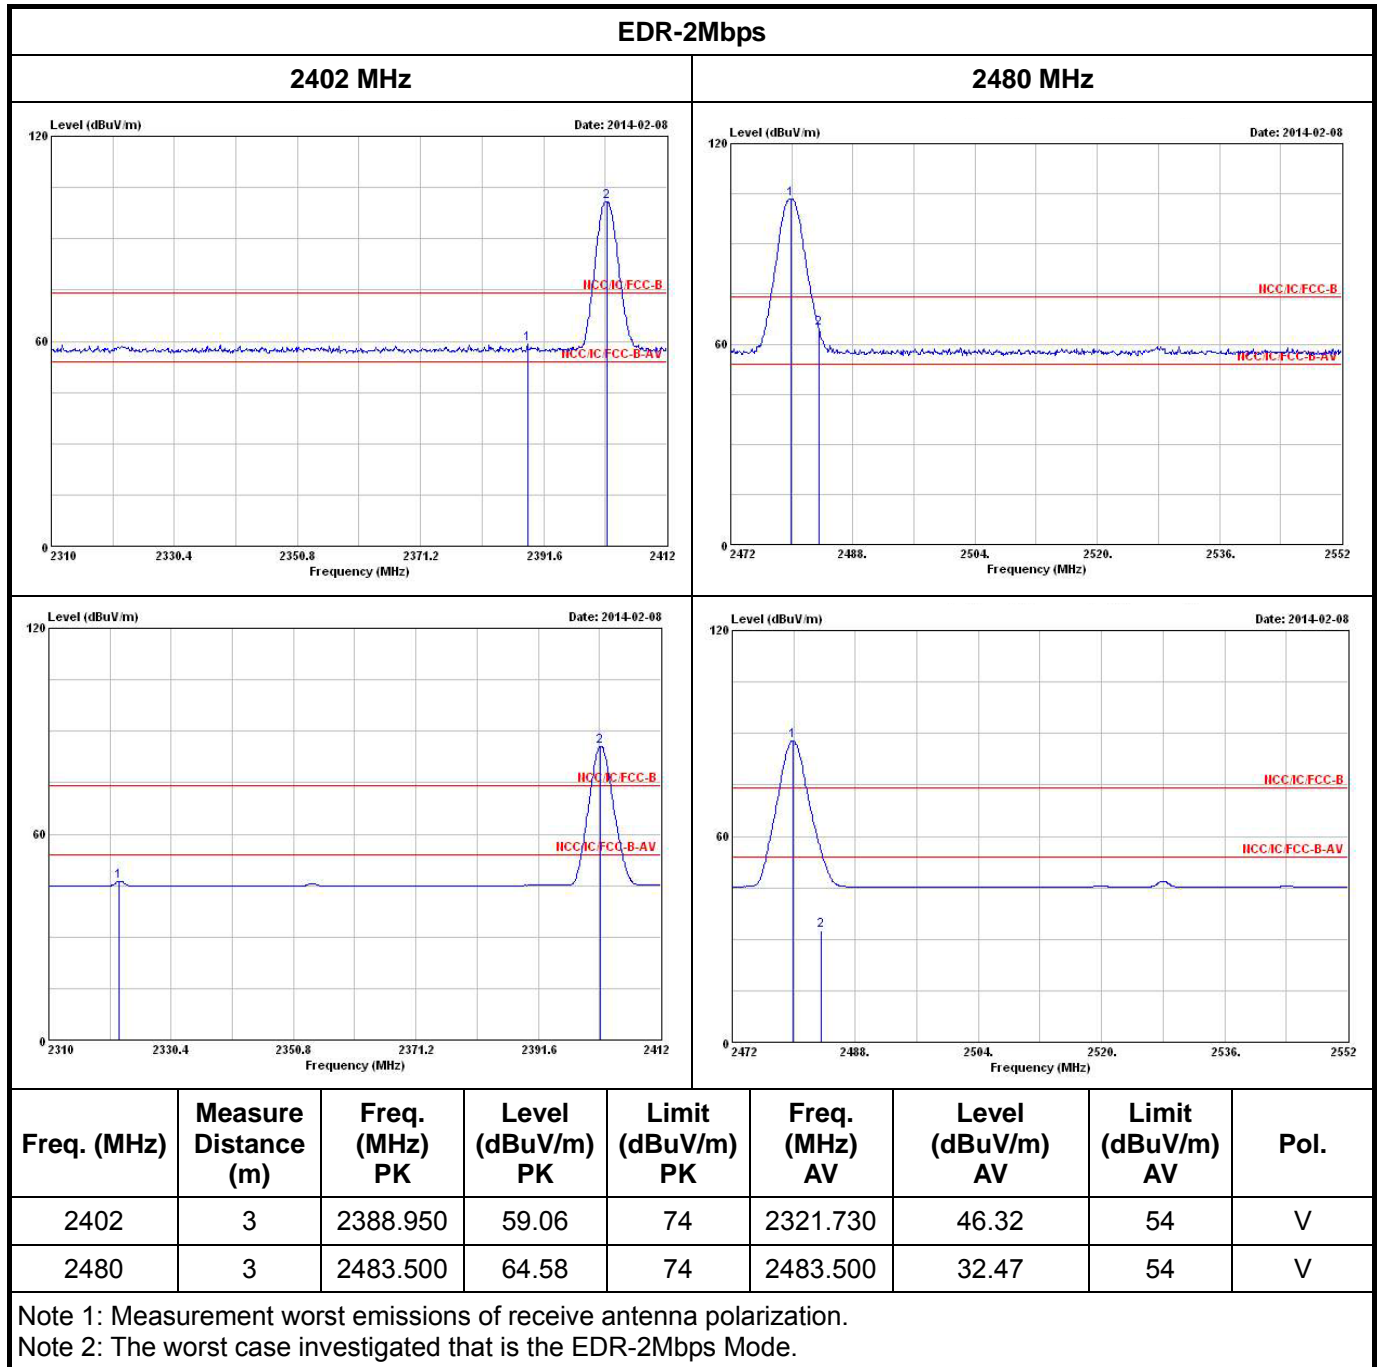



Modulation Mode	EDR-3Mbps	Test Freq. (MHz)	2402
Operating Function	Transmit	Polarization	H

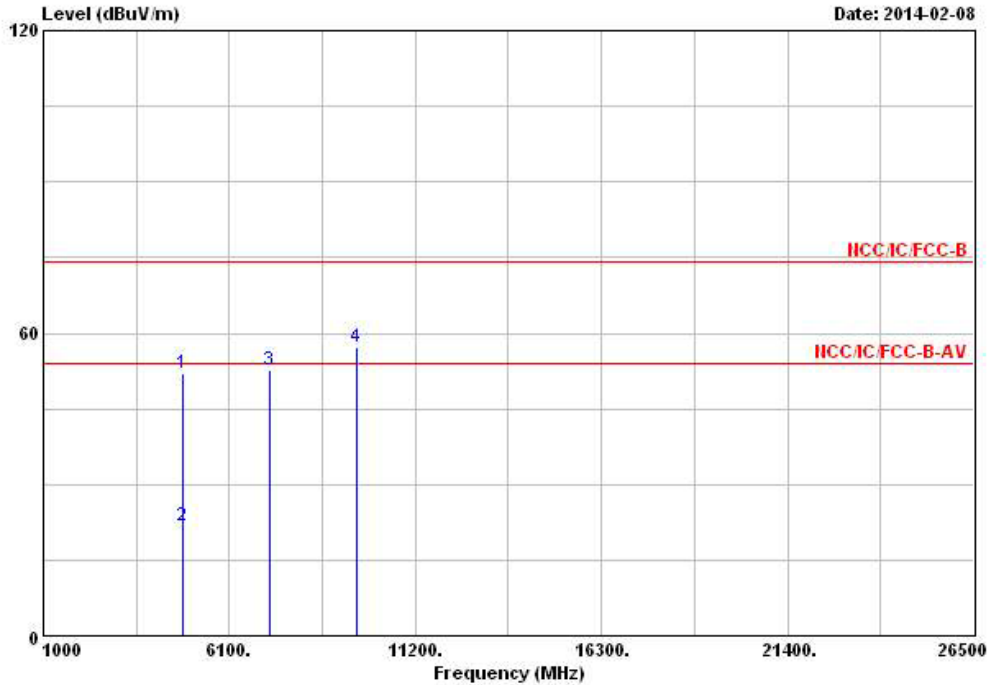


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4804.000	52.01	-21.99	74.00	45.68	33.06	5.71	32.44 Peak	---	---
2	4804.000	21.91	-32.09	54.00	15.58	33.06	5.71	32.44 Average	---	---
3	7206.000	52.70			42.34	35.80	7.20	32.64 Peak	---	---
4	9608.000	57.14			43.20	38.23	8.81	33.10 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: The worst case investigated that is the EDR-3Mbps Mode.

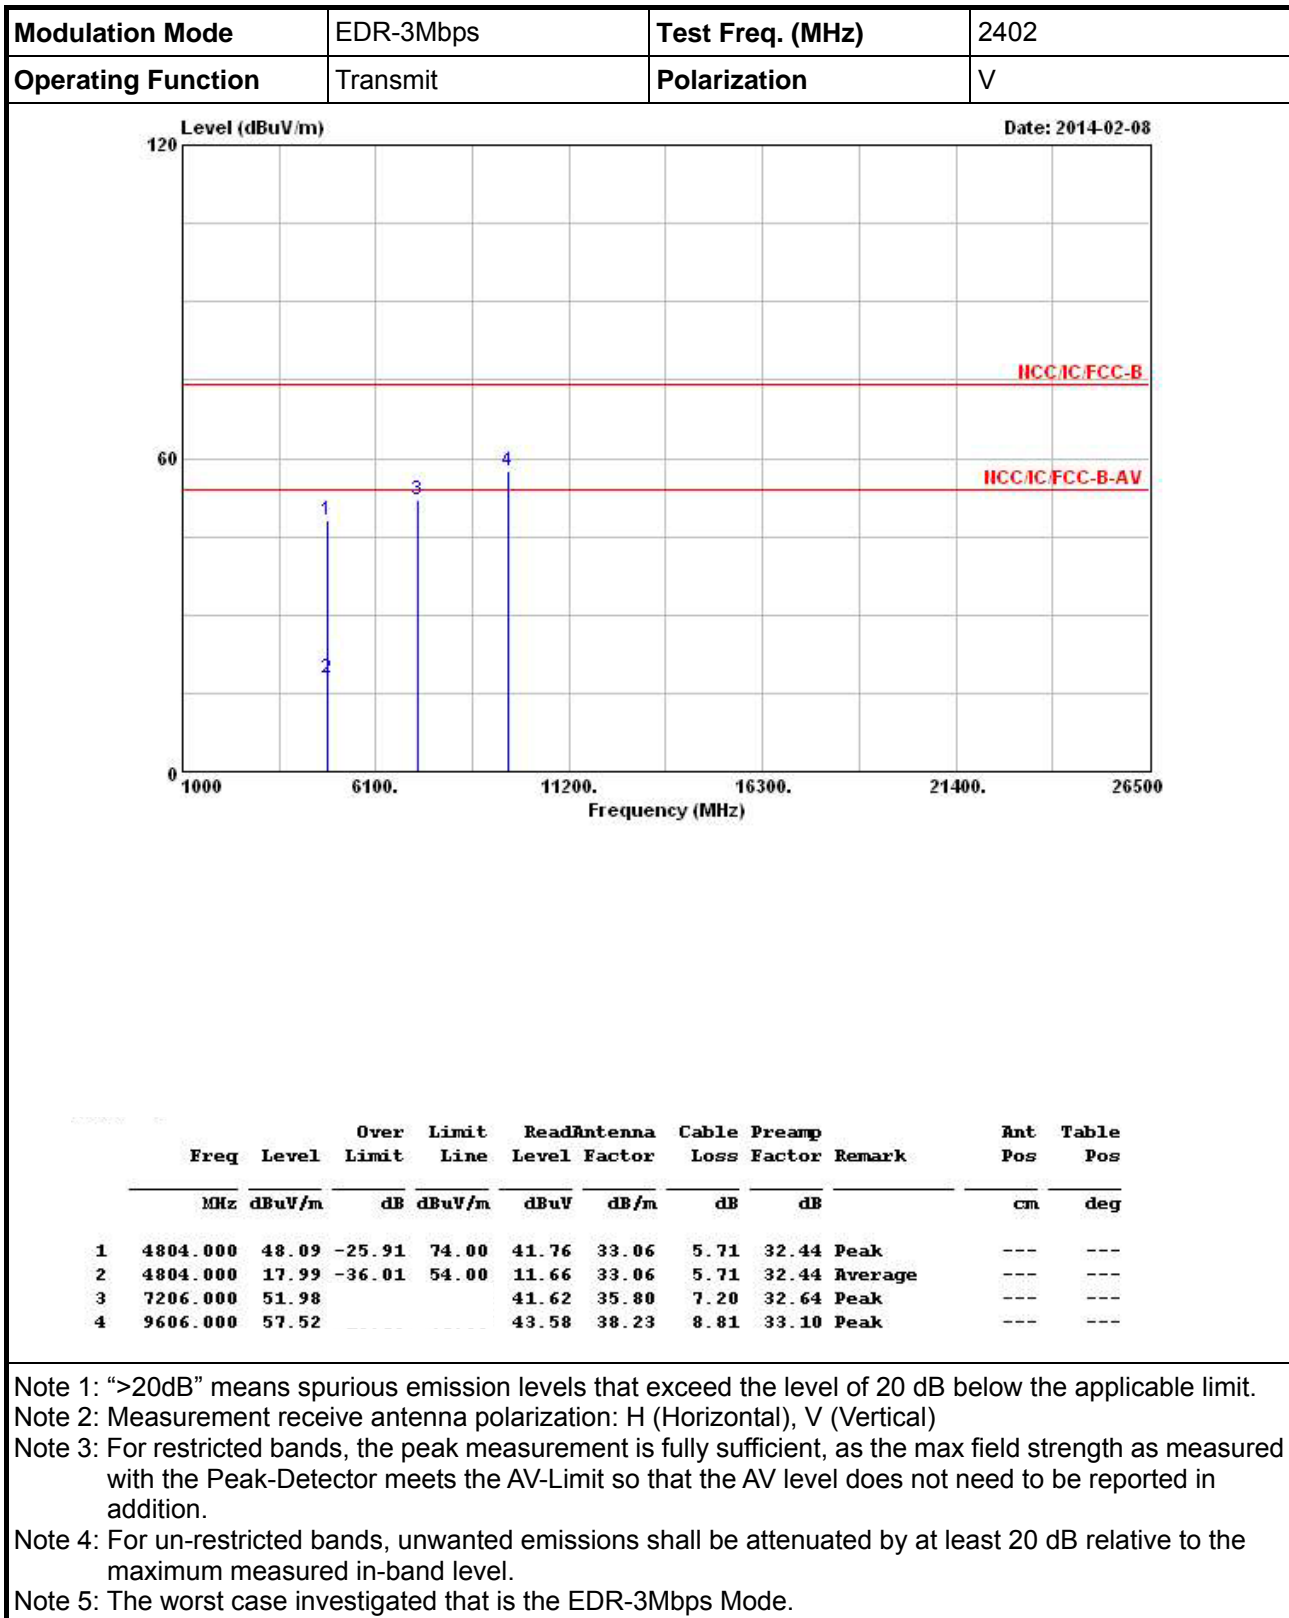

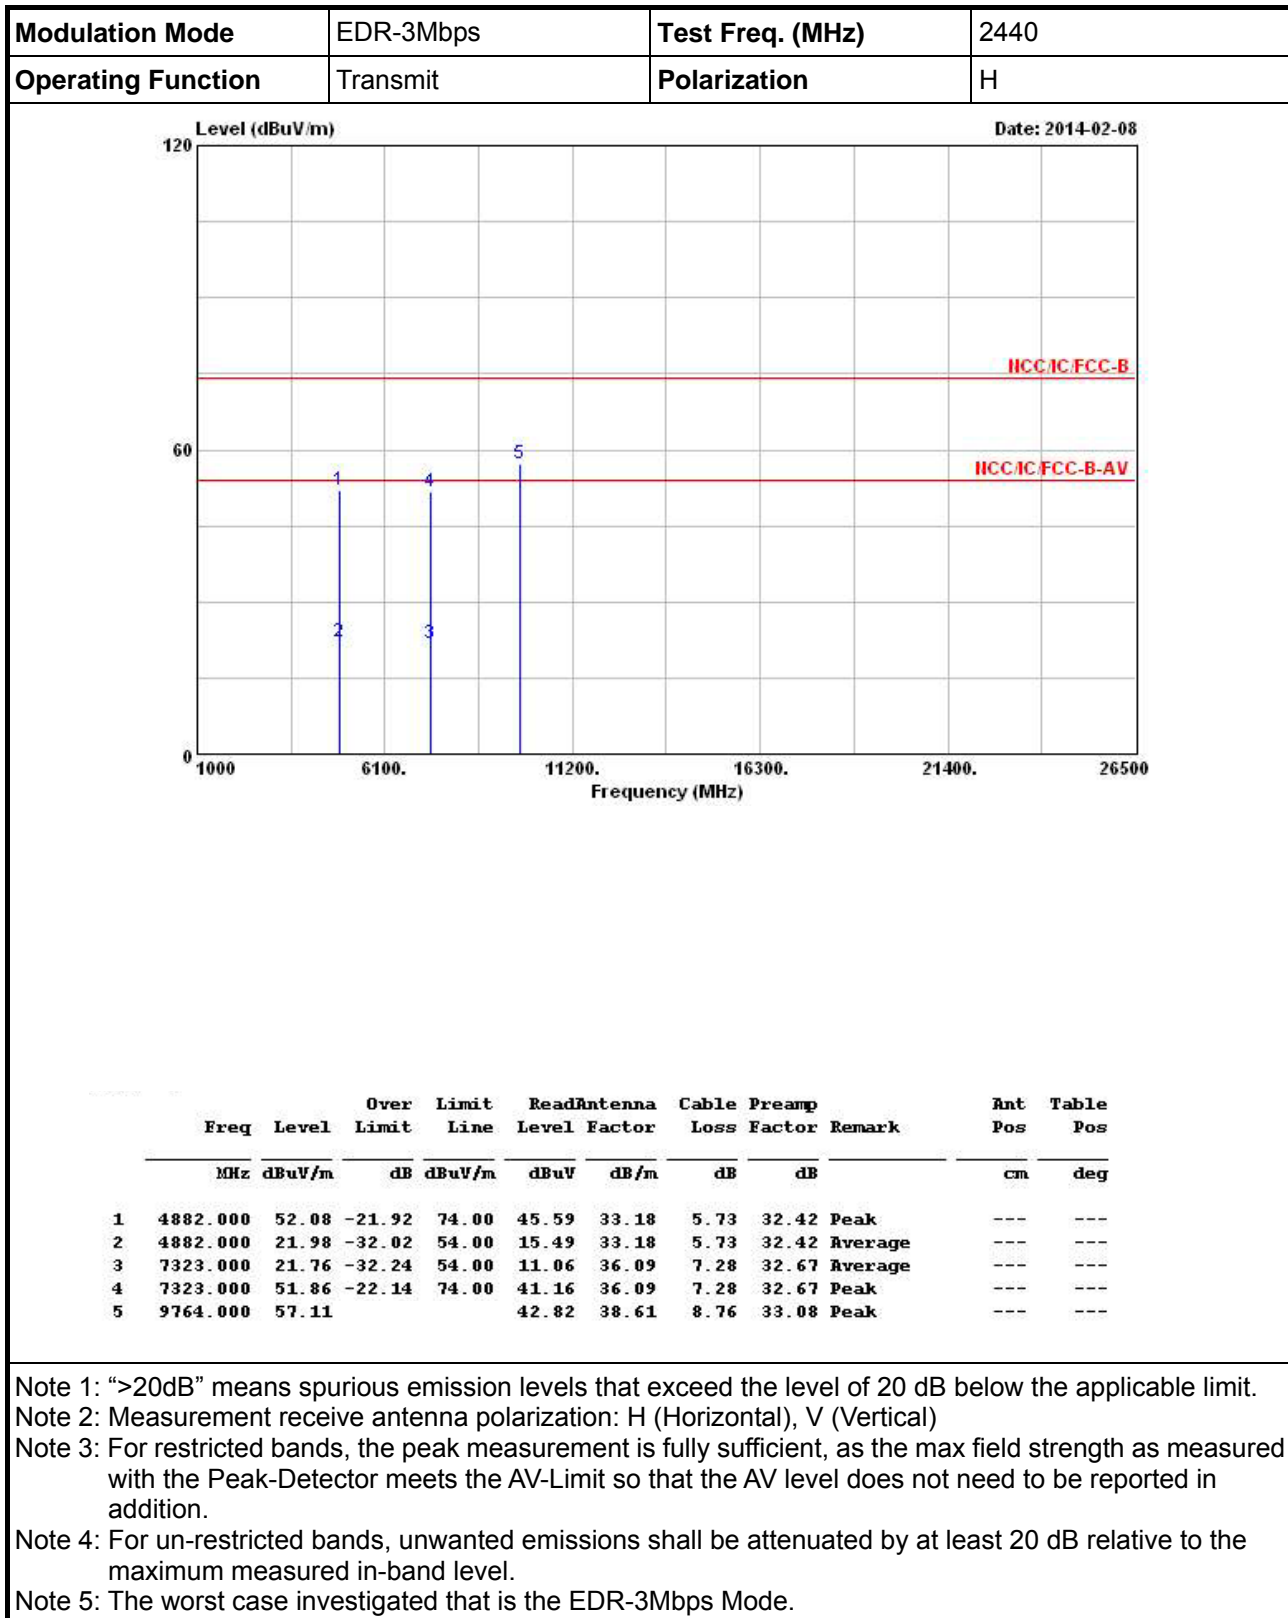


Modulation Mode	EDR-3Mbps	Test Freq. (MHz)	2440
Operating Function	Transmit	Polarization	V

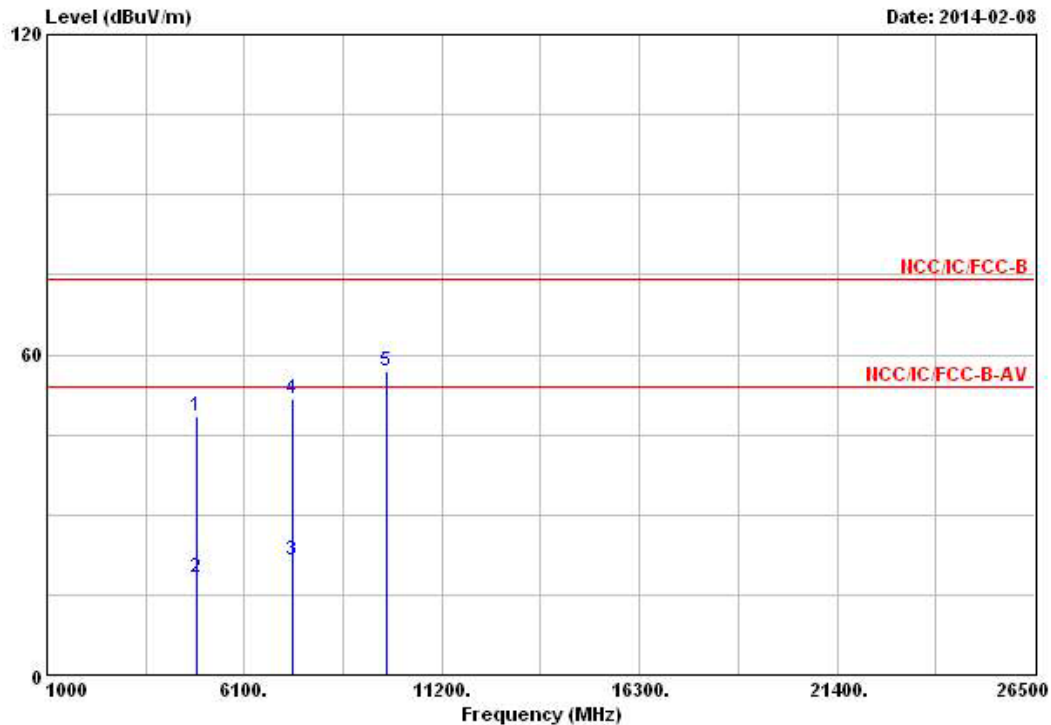

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.000	48.31	-25.69	74.00	41.82	33.18	5.73	32.42	Peak	---	---
2	4882.000	18.21	-35.79	54.00	11.72	33.18	5.73	32.42	Average	---	---
3	7323.000	21.52	-32.48	54.00	10.82	36.09	7.28	32.67	Average	---	---
4	7323.000	51.62	-22.38	74.00	40.92	36.09	7.28	32.67	Peak	---	---
5	9764.000	56.76			42.47	38.61	8.76	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: The worst case investigated that is the EDR-3Mbps Mode.


Modulation Mode	EDR-3Mbps	Test Freq. (MHz)	2480
Operating Function	Transmit	Polarization	H

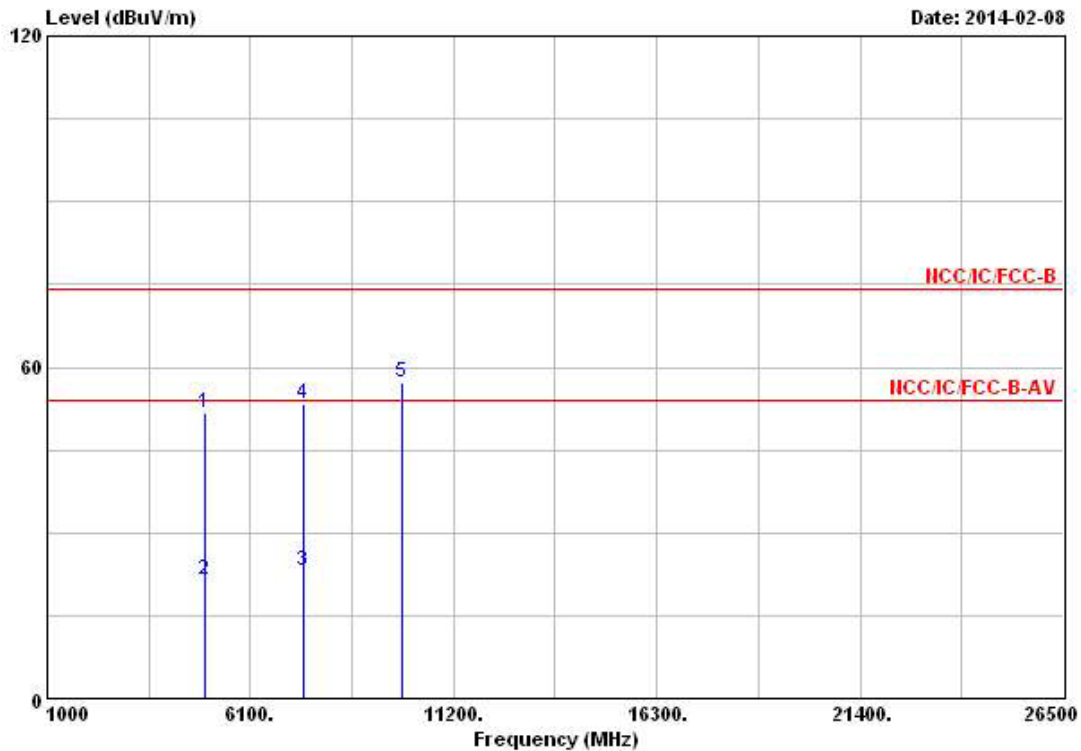

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	51.59	-22.41	74.00	44.91	33.34	5.75	32.41	Peak	---	---
2	4960.000	21.49	-32.51	54.00	14.81	33.34	5.75	32.41	Average	---	---
3	7440.000	23.18	-30.82	54.00	12.14	36.38	7.37	32.71	Average	---	---
4	7440.000	53.28	-20.72	74.00	42.24	36.38	7.37	32.71	Peak	---	---
5	9920.000	57.37			42.78	38.95	8.71	33.07	Peak	---	---

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: The worst case investigated that is the EDR-3Mbps Mode.

Modulation Mode	EDR-3Mbps	Test Freq. (MHz)	2480
Operating Function	Transmit	Polarization	V

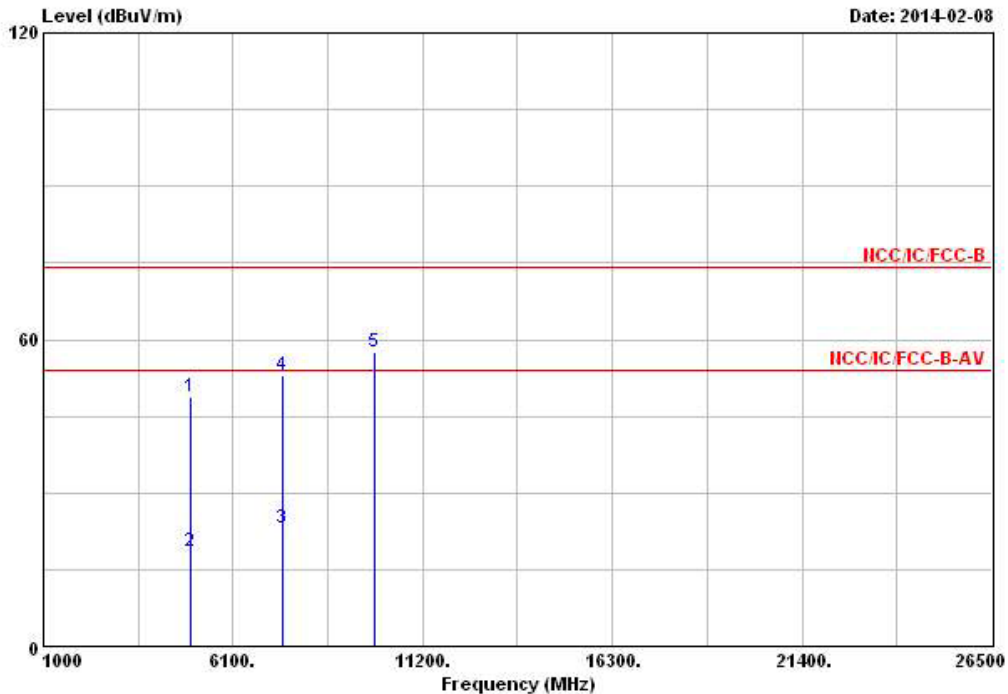

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4960.000	48.69	-25.31	74.00	42.01	33.34	5.75	32.41	Peak	---	---
2	4960.000	18.59	-35.41	54.00	11.91	33.34	5.75	32.41	Average	---	---
3	7440.000	23.01	-30.99	54.00	11.97	36.38	7.37	32.71	Average	---	---
4	7440.000	53.11	-20.89	74.00	42.07	36.38	7.37	32.71	Peak	---	---
5	9920.000	57.40			42.81	38.95	8.71	33.07	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.


Note 5: The worst case investigated that is the EDR-3Mbps Mode.

3.7 AC Power-line Conducted Emissions


3.7.1 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.7.2 Test Setup

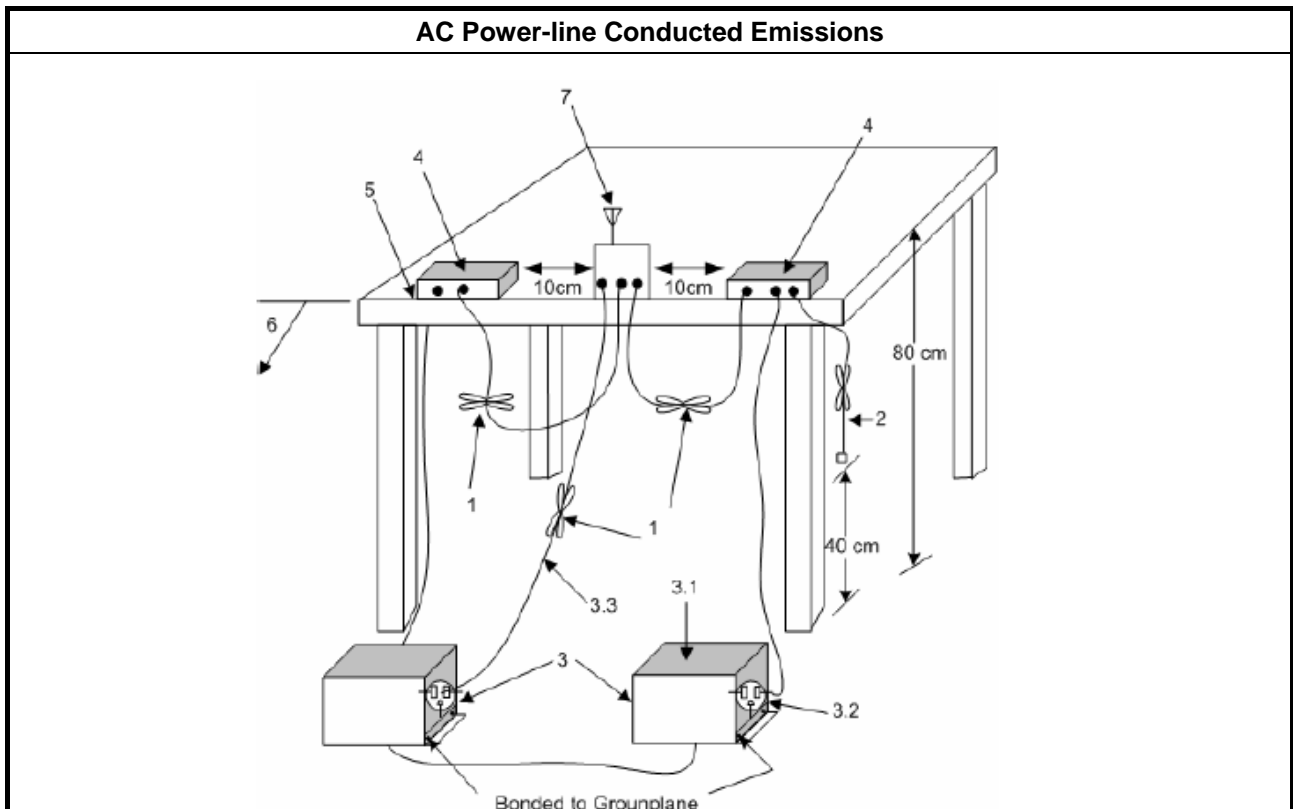


3.7.3 Test Result of AC Power-line Conducted Emissions

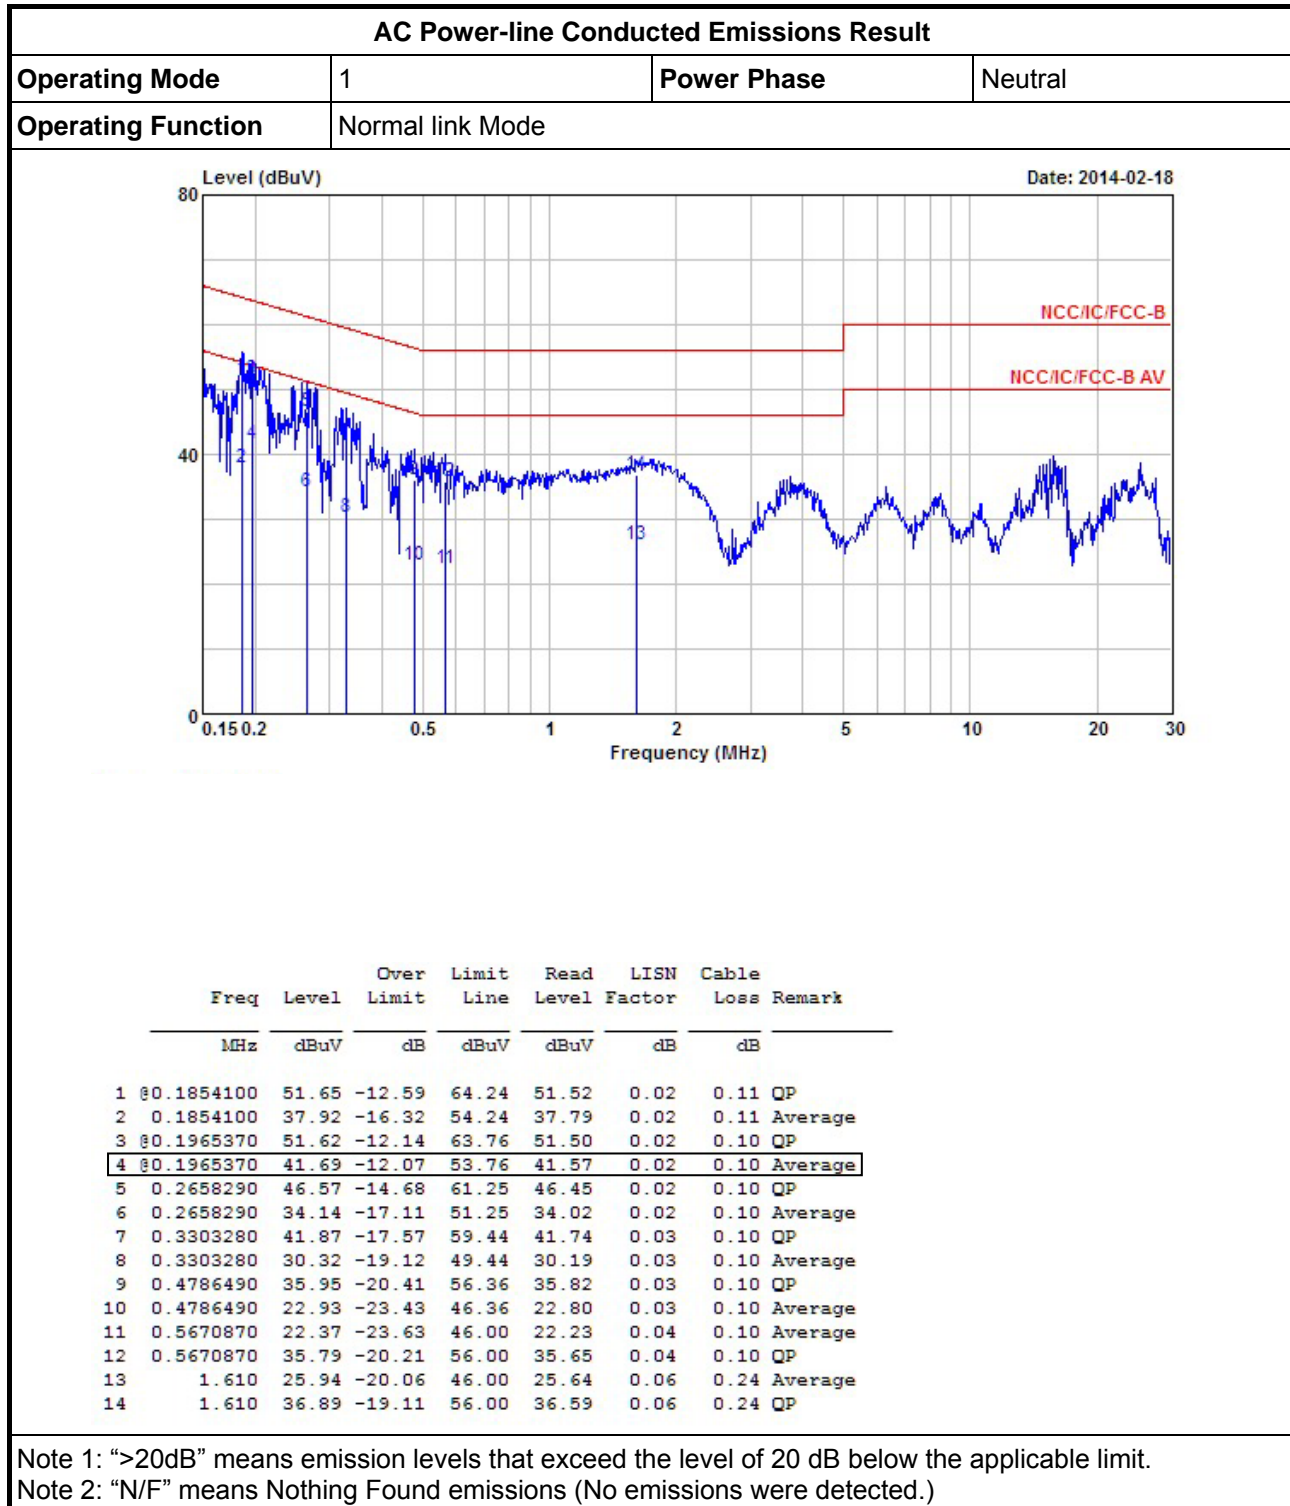

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Normal link Mode		

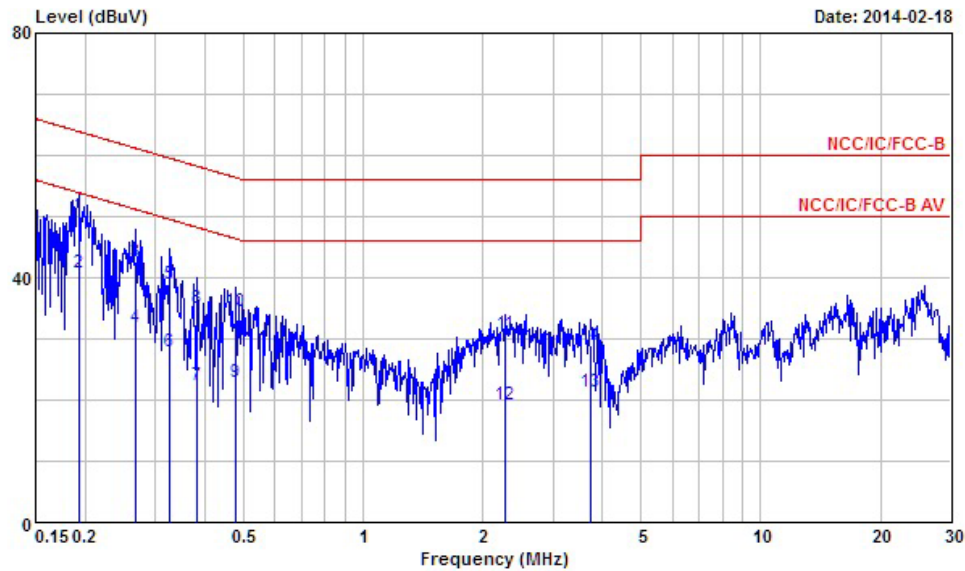

Copyright © 2014 SPORTON LAB. All Rights Reserved.

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1934380	50.19	-13.70	63.89	50.06	0.03	0.10	QP
2	0.1934380	40.82	-13.07	53.89	40.69	0.03	0.10	Average
3	0.2672410	42.70	-18.50	61.20	42.57	0.03	0.10	QP
4	0.2672410	31.94	-19.26	51.20	31.81	0.03	0.10	Average
5	0.3268460	39.07	-20.46	59.53	38.94	0.03	0.10	QP
6	0.3268460	27.80	-21.73	49.53	27.67	0.03	0.10	Average
7	0.3831540	22.48	-25.73	48.21	22.35	0.03	0.10	Average
8	0.3831540	35.05	-23.16	58.21	34.92	0.03	0.10	QP
9	0.4786490	22.86	-23.50	46.36	22.72	0.04	0.10	Average
10	0.4786490	34.54	-21.82	56.36	34.40	0.04	0.10	QP
11	2.280	30.80	-25.20	56.00	30.46	0.08	0.26	QP
12	2.280	19.29	-26.71	46.00	18.95	0.08	0.26	Average
13	3.720	21.31	-24.69	46.00	21.09	0.10	0.12	Average
14	3.720	28.84	-27.16	56.00	28.62	0.10	0.12	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 25, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 29, 2013	Conducted (TH06-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH06-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100℃	Nov. 21, 2012	Conducted (TH06-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2013	Conducted (TH06-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 11, 2013	Conducted (TH06-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 11, 2013	Conducted (TH06-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345673/4	30MHz ~ 26.5GHz	Dec. 04, 2012	Conducted (TH06-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	30MHz ~ 26.5GHz	Dec. 04, 2012	Conducted (TH06-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 03, 2013	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2013	Radiation (03CH03-HY)
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 11, 2013	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz - 30 MHz	Dec. 02, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.