



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION**

**TEST REPORT**

**FOR**

**802.11a/b/g MINI PCI TYPE 3B CARD**

**MODEL NUMBER: WM3A2915ABG**

**FCC ID: E2K5HCKT**

**REPORT NUMBER: 04U2790-1**

**ISSUE DATE: JULY 15, 2004**

*Prepared for*  
**DELL COMPUTER CORPORATION  
ONE DELL WAY  
ROUND ROCK, TX 78682, USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION</b> .....	<b>4</b>
<b>2. EUT DESCRIPTION</b> .....	<b>5</b>
<b>3. TEST METHODOLOGY</b> .....	<b>6</b>
<b>4. FACILITIES AND ACCREDITATION</b> .....	<b>6</b>
<b>5. CALIBRATION AND UNCERTAINTY</b> .....	<b>7</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	7
5.2. <i>MEASUREMENT UNCERTAINTY</i> .....	7
5.3. <i>TEST AND MEASUREMENT EQUIPMENT</i> .....	8
<b>6. SETUP OF EQUIPMENT UNDER TEST</b> .....	<b>9</b>
<b>7. APPLICABLE LIMITS AND TEST RESULTS</b> .....	<b>11</b>
7.1. <i>6 dB BANDWIDTH</i> .....	11
7.2. <i>99% BANDWIDTH</i> .....	22
7.3. <i>PEAK OUTPUT POWER</i> .....	33
7.4. <i>MAXIMUM PERMISSIBLE EXPOSURE</i> .....	44
7.4.1. MPE, INSPIRON 510M LAPTOP WITH PHYCOMP ANTENNA SET .....	46
7.4.2. MPE, INSPIRON 300M LAPTOP WITH WISTRON ANTENNA SET .....	47
7.4.3. MPE, INSPIRON 300M LAPTOP WITH HITACHI ANTENNA SET .....	48
7.5. <i>AVERAGE POWER</i> .....	49
7.6. <i>PEAK POWER SPECTRAL DENSITY</i> .....	51
7.7. <i>CONDUCTED SPURIOUS EMISSIONS</i> .....	62
7.8. <i>RADIATED EMISSIONS</i> .....	81
7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	81
7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, PRECISION M60 LAPTOP WITH WISTRON ANTENNA SET .....	84
7.8.3. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, PRECISION M60 LAPTOP WITH HITACHI ANTENNA SET .....	103
7.8.4. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, INSPIRON 510M LAPTOP WITH PHYCOMP ANTENNA SET .....	122
7.8.5. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, INSPIRON 300M LAPTOP WITH WISTRON ANTENNA SET .....	141
7.8.6. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, INSPIRON 300M LAPTOP WITH HITACHI ANTENNA SET .....	160
7.8.7. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz, PRECISION M60 LAPTOP WITH WISTRON ANTENNA SET .....	179

7.8.8. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz, PRECISION M60 LAPTOP WITH HITACHI ANTENNA SET ..... 183

7.8.9. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz, INSPIRON 510M LAPTOP WITH PHYCOMP ANTENNA SET ..... 187

7.8.10. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz, INSPIRON 300M LAPTOP WITH WISTRON ANTENNA SET ..... 191

7.8.11. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz, INSPIRON 300M LAPTOP WITH HITACHI ANTENNA SET ..... 195

7.9. POWERLINE CONDUCTED EMISSIONS ..... 199

7.9.1. POWERLINE CONDUCTED EMISSIONS, PRECISION M60 LAPTOP WITH WISTRON ANTENNA SET ..... 200

7.9.2. POWERLINE CONDUCTED EMISSIONS, PRECISION M60 LAPTOP WITH HITACHI ANTENNA SET ..... 203

7.9.3. POWERLINE CONDUCTED EMISSIONS, INSPIRON 510M LAPTOP WITH PHYCOMP ANTENNA SET ..... 206

7.9.4. POWERLINE CONDUCTED EMISSIONS, INSPIRON 3000M LAPTOP WITH WISTRON ANTENNA SET ..... 209

7.9.5. POWERLINE CONDUCTED EMISSIONS, INSPIRON 3000M LAPTOP WITH HITACHI ANTENNA SET ..... 212

**8. SETUP PHOTOS ..... 215**

8.1. ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP ..... 215

8.2. PRECISION M60 LAPTOP WITH WISTRON ANTENNA SET ..... 216

8.3. PRECISION M60 LAPTOP WITH HITACHI ANTENNA SET ..... 220

8.4. INSPIRON 510M LAPTOP WITH PHYCOMP ANTENNA SET ..... 224

8.5. INSPIRON 300M LAPTOP WITH WISTRON ANTENNA SET ..... 228

8.6. INSPIRON 300M LAPTOP WITH HITACHI ANTENNA SET ..... 232

# 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** DELL COMPUTER CORPORATION  
ONE DELL WAY  
ROUND ROCK, TX 78682, USA

**EUT DESCRIPTION:** 802.11a/b/g MINI PCI TYPE 3B CARD

**MODEL:** WM3A2915ABG

**DATE TESTED:** JUNE 09 TO JUNE 29, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

**Note:** The 2.4 and 5.8 GHz bands are applicable to this report.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE  
ENGINEERING MANAGER  
COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN  
EMC TECHNICIAN  
COMPLIANCE CERTIFICATION SERVICES

## 2. EUT DESCRIPTION

The EUT is an 802.11a/b/g transceiver 802.11a/b/g Mini PCI type 3B card.

The transmitter has a maximum peak conducted output power as follows:

Frequency Band (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	19.24	83.95
2412 - 2462	802.11g	24.10	257.04
5785 - 5825	802.11a	21.00	125.89

### PRECISION M60 LAPTOP WITH WISTRON ANTENNA SET IN BASE

The radio utilizes two identical internal PIFA antennas for diversity. The Wistron model CA9-C has a maximum gain of 2.39 dBi in the 2.4 GHz band and 2.63 dBi in the 5.8 GHz band.

### PRECISION M60 LAPTOP WITH HITACHI ANTENNA SET IN BASE

The radio utilizes two identical internal Monopole antennas for diversity. The Hitachi model HFT04-DL01 has a maximum gain of 1.1 dBi in the 2.4 GHz band and 4.9 dBi in the 5.8 GHz band.

### INSPIRON 510M LAPTOP WITH PHYCOMP ANTENNA SET IN LCD

The radio utilizes two identical internal Patch antennas for diversity. The Phycomp model CAN4313 351 has a maximum gain of 2.9 dBi in the 2.4 GHz band and 3.1 dBi in the 5.8 GHz band.

### INSPIRON 300M LAPTOP WITH WISTRON ANTENNA SET IN LCD

The radio utilizes two identical internal PIFA antennas for diversity. The Wistron model CAO-S has a maximum gain of 1.22 dBi in the 2.4 GHz band and 2.2 dBi in the 5.8 GHz band.

### INSPIRON 300M LAPTOP WITH HITACHI ANTENNA SET IN LCD

The radio utilizes two identical internal Monopole antennas for diversity. The Hitachi model HFT06 has a maximum gain of 1.7 dBi in the 2.4 GHz band and 3.7 dBi in the 5.8 GHz band.

The model number was changed after testing commenced. All data in this report is applicable to the model number documented in Section 1 above.

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/2004
RF Filter Section	HP	85420E	3705A00256	11/21/04
30MHz---- 2GHz	Sunol Sciences	JB1 Antenna	A121003	12/22/04
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	2/4/05
Spectrum Analyzer	Agilent	E4446A	MY43360112	1/13/05
Preamplifier, 1 ~ 26 GHz	Miteq	NSP10023988	646456	4/25/05
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/04
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	10/13/04
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/13/04
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/04
AC Power Source, 10KVA	ACS	AFC-10K-AFC-2	J1568	CNR
10dB Pad	Weinschel	56-10	M251	CNR
PreAmplifier 26-40 GHz	Miteq	NSP4000-SP2	924343	6/1/05
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	12/3/04
Antenna, Horn, 18 ~ 26 GHz	ARA	MWH-1826/B	1013	2/4/05
Hi Pass Filter_4GHz	Micro_Tronic	HPM13351	4	N/A
Hi Pass Filter_7.6GHz	Micro_Tronic	HPM13195	1	N/A

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
LAPTOP	DELL	Precision M60 (PP02X)	N/A	N/A
LAPTOP	DELL	Inspiron 510M (PP10L)	N/A	N/A
LAPTOP	DELL	Precision M60 (PP02X)	N/A	N/A
LAPTOP	DELL	Inspiron 300M	PR04S	N/A
LAPTOP	DELL	Inspiron 300M	PR04S	N/A
AC ADAPTER	DELL	HP-OQ065B83	N/A	N/A
AC ADAPTER	DELL	PA-1650-05D	N/A	N/A
AC ADAPTER	DELL	PA-1900-02D	N/A	N/A
AC ADAPTER	DELL	HP-OQ065B83	N/A	N/A
AC ADAPTER	DELL	PA-1650-05	N/A	N/A


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	1m	No
2	DC	1	DC	Un-shielded	2m	No

### TEST SETUP

The EUT is installed in a host laptop computer. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

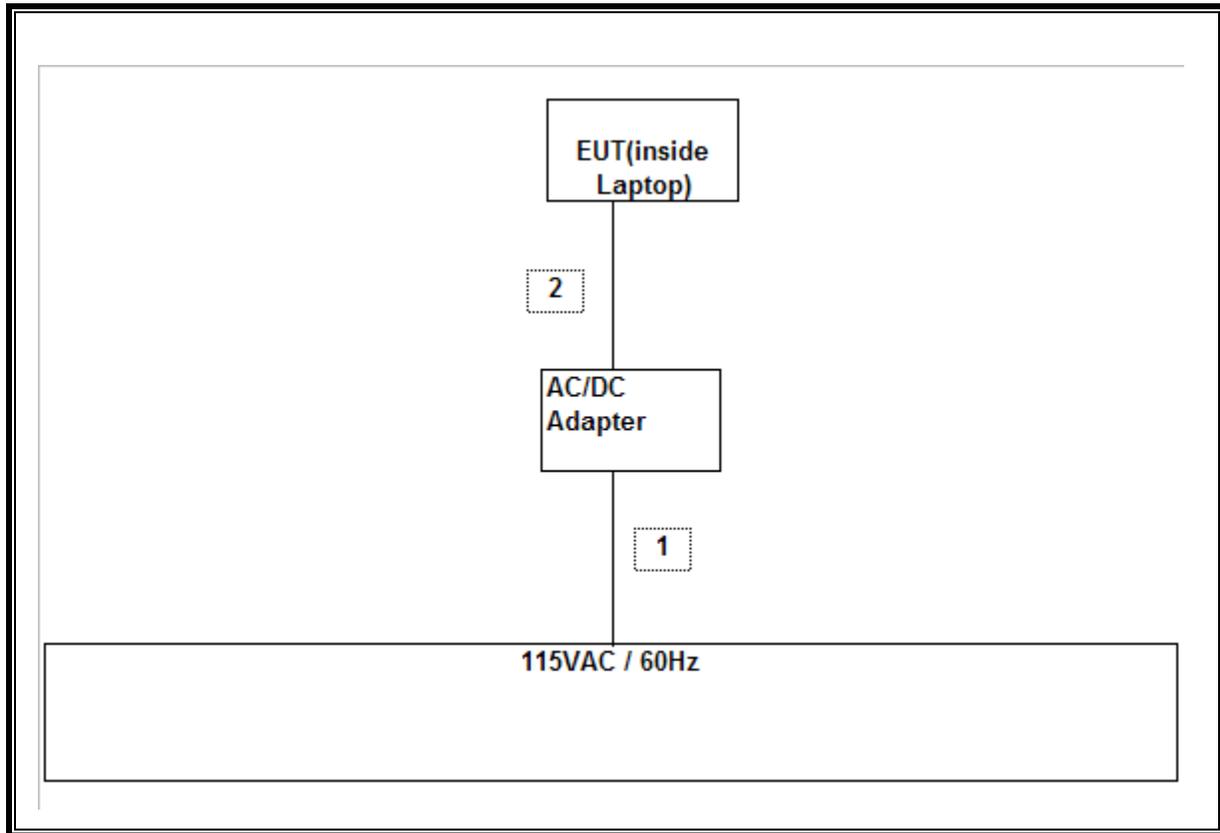

## 7. APPLICABLE LIMITS AND TEST RESULTS

### 7.1. 6 dB BANDWIDTH

#### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### 2.4 GHz BAND RESULTS

No non-compliance noted:

##### 802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	9580	500	9080
Middle	2437	8170	500	7670
High	2462	8580	500	8080

##### 802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16080	500	15580
Middle	2437	16250	500	15750
High	2462	15170	500	14670


**5.8 GHz BAND RESULTS**


No non-compliance noted:


802.11a Mode

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>6 dB Bandwidth (kHz)</b>	<b>Minimum Limit (kHz)</b>	<b>Margin (kHz)</b>
Low	5745	15580	500	15080
Middle	5785	15750	500	15250
High	5825	15750	500	15250


**6 DB BANDWIDTH (802.11b MODE)**

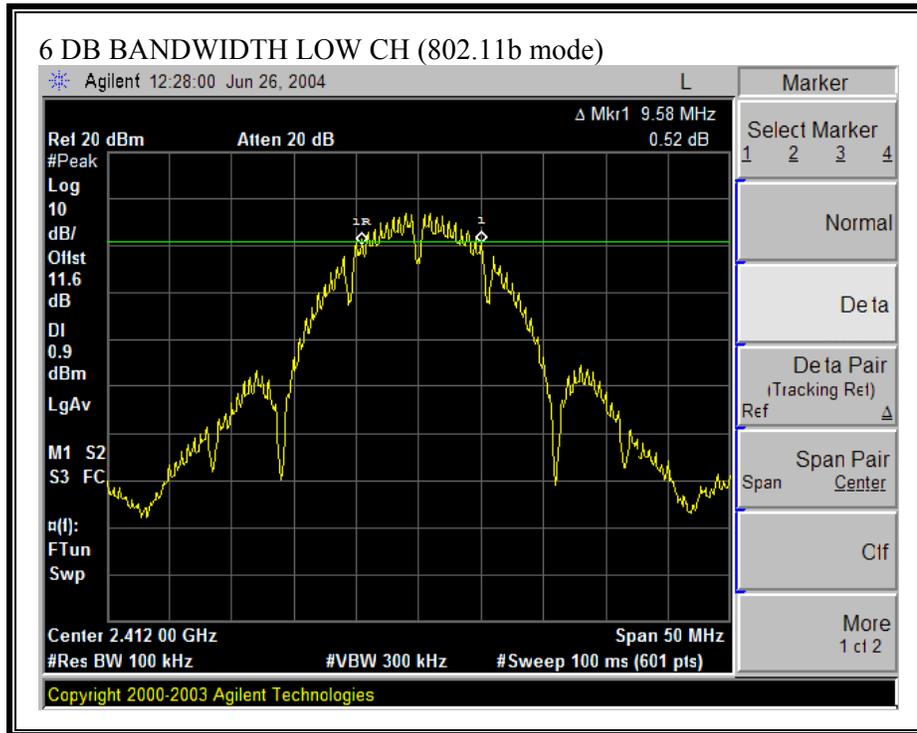


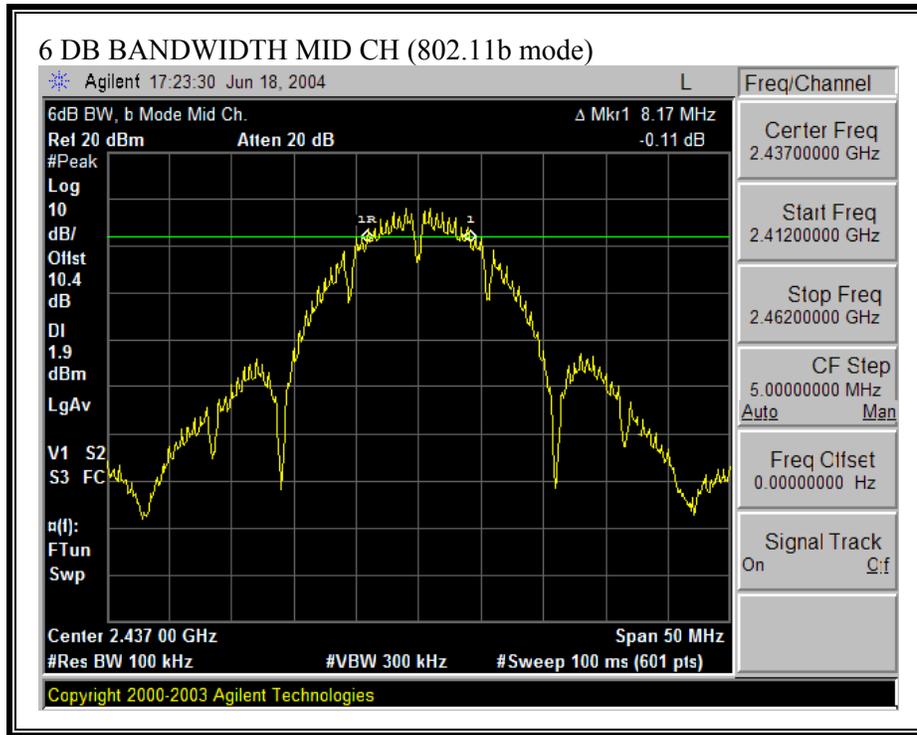


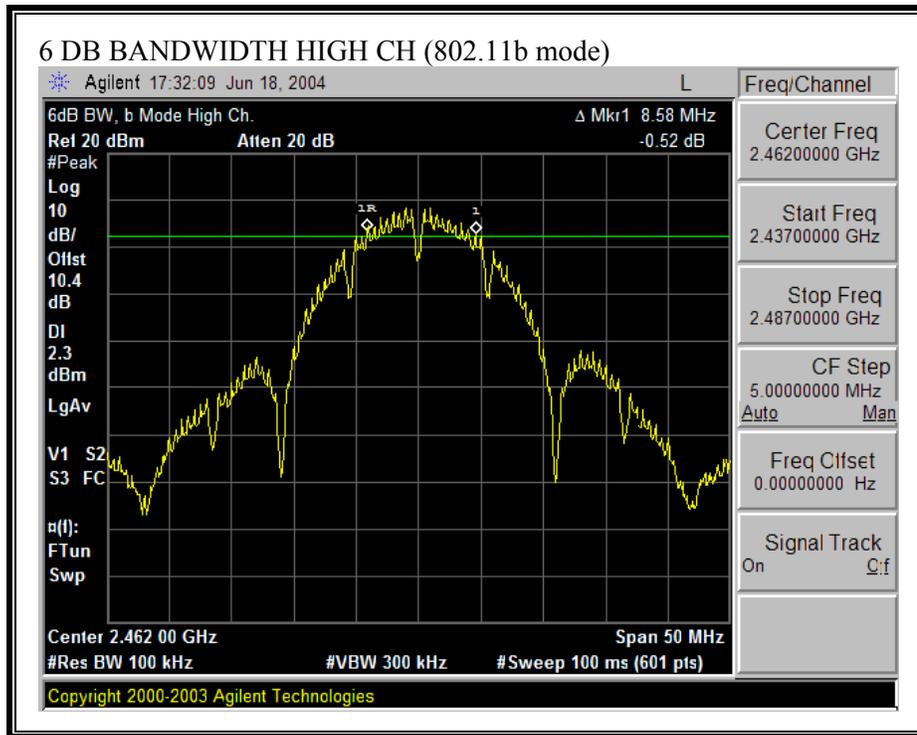


**6 DB BANDWIDTH (802.11g MODE)**

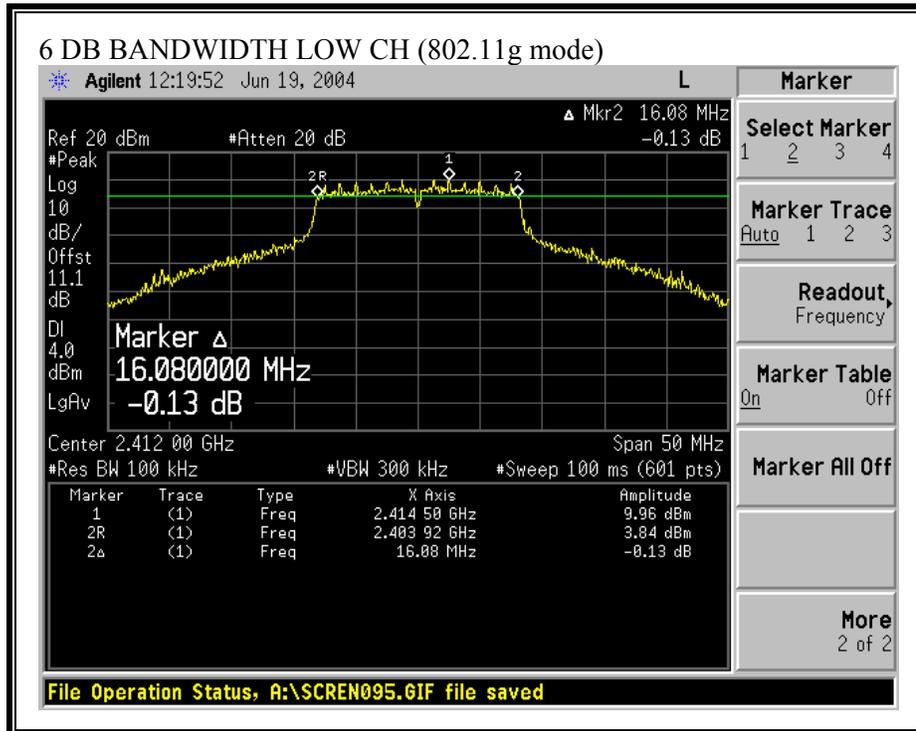


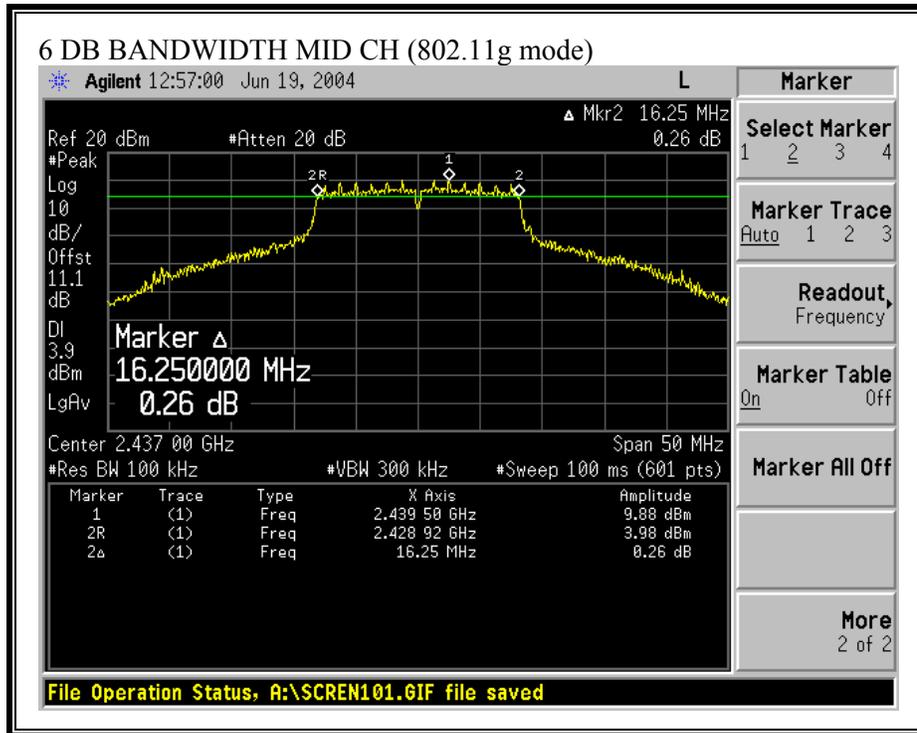


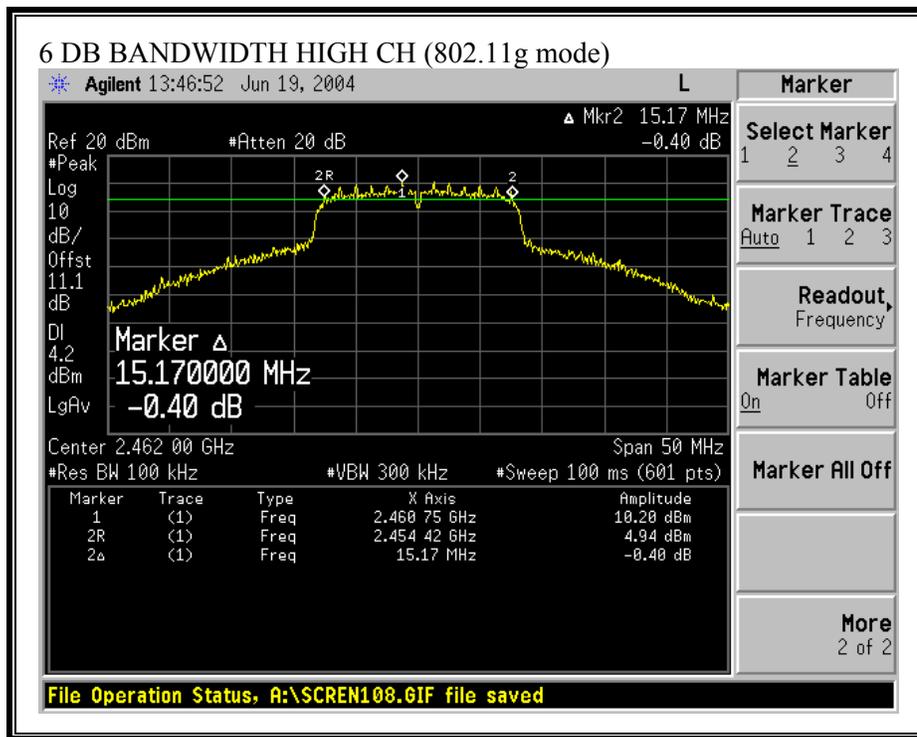

**6 DB BANDWIDTH (802.11a MODE)**

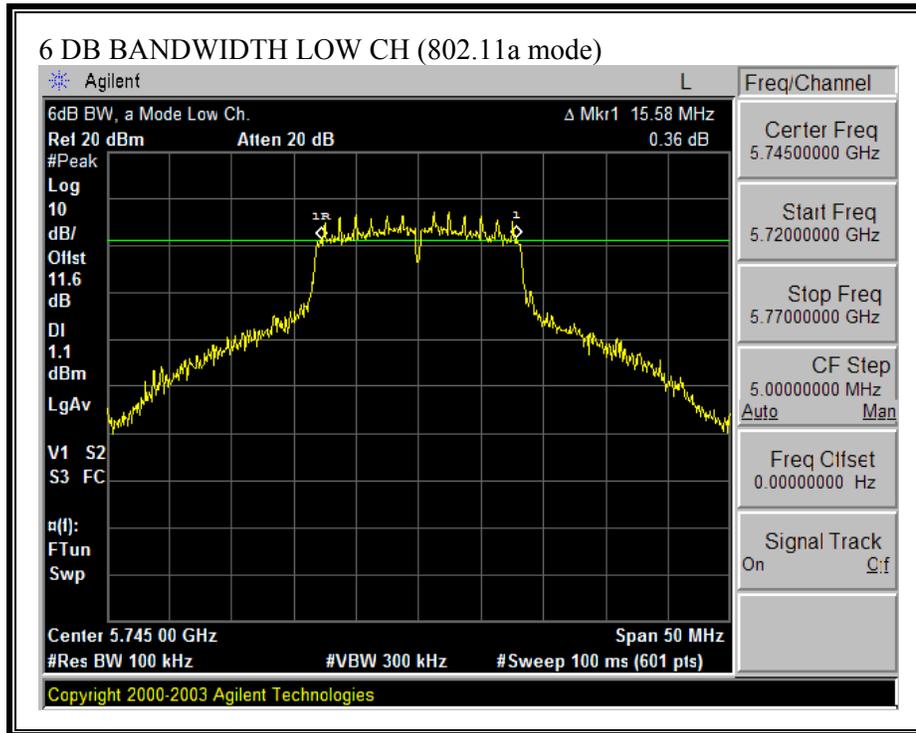

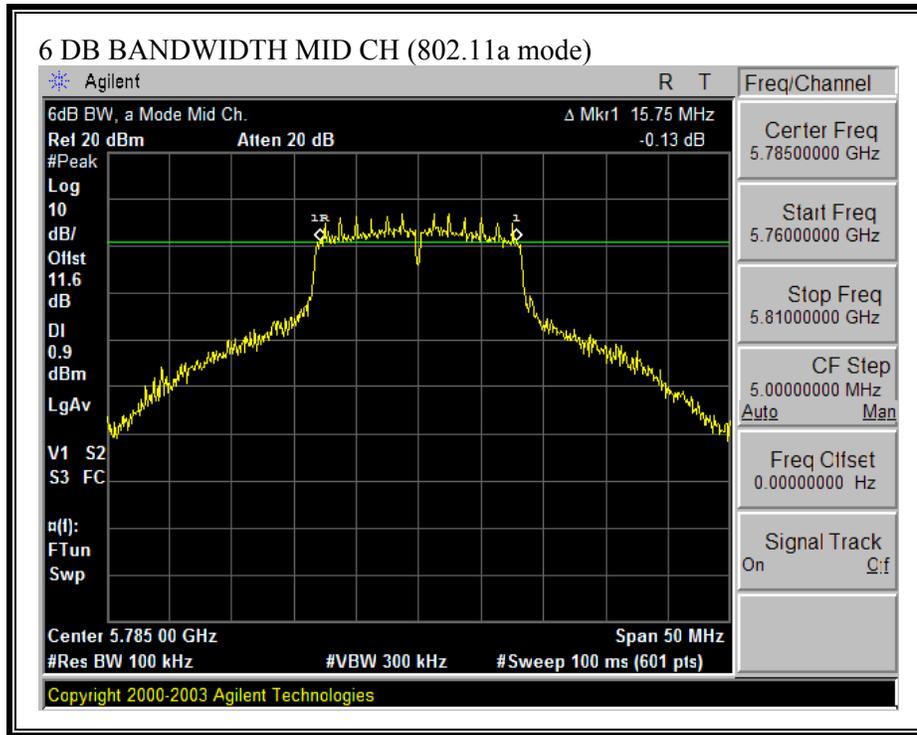

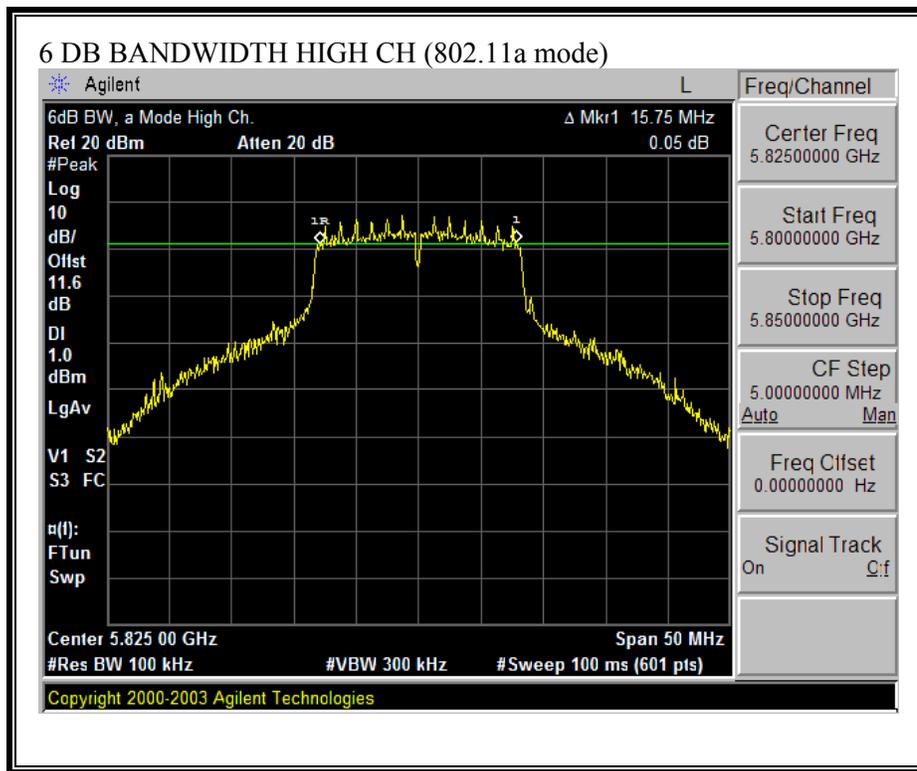

## 7.2. 99% BANDWIDTH

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

### 2.4 GHz BAND RESULTS

No non-compliance noted:

#### 802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	14.9257
Middle	2437	14.7842
High	2462	14.7074

#### 802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5049
Middle	2437	16.6365
High	2462	16.2288


**5.8 GHz BAND RESULTS**


No non-compliance noted:


802.11a Mode

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>99% Bandwidth (MHz)</b>
Low	5745	16.525
Middle	5785	16.5651
High	5825	16.4861


**99% BANDWIDTH (802.11b MODE)**

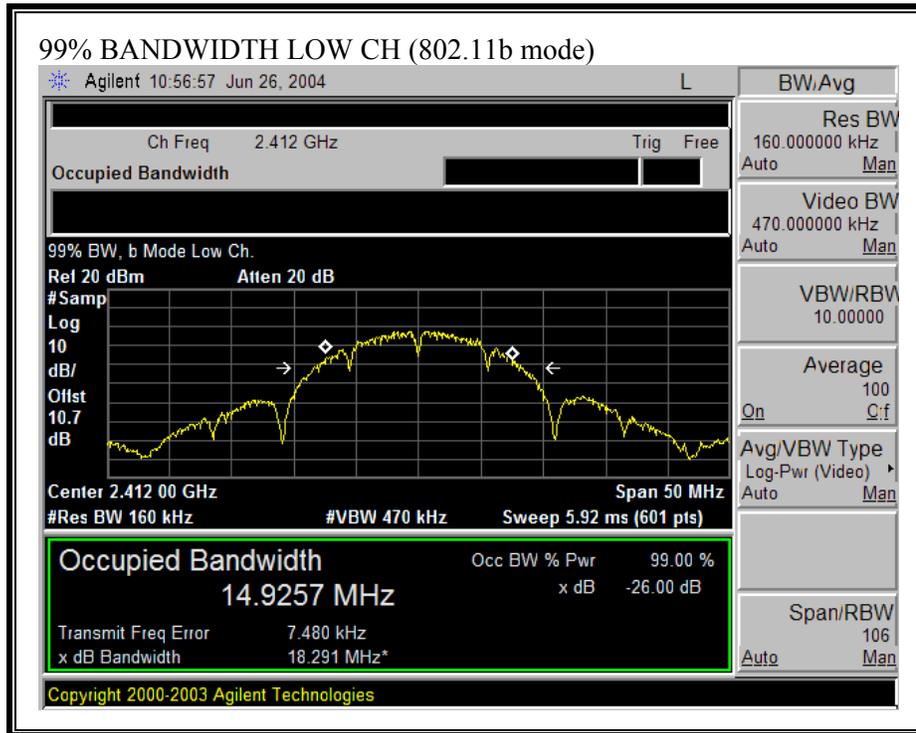


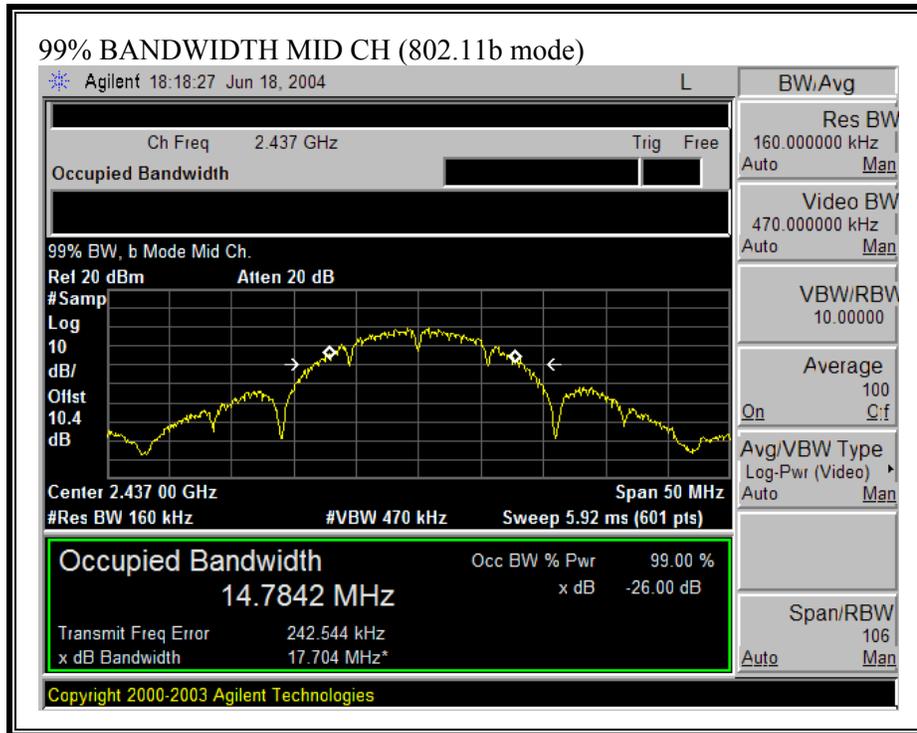


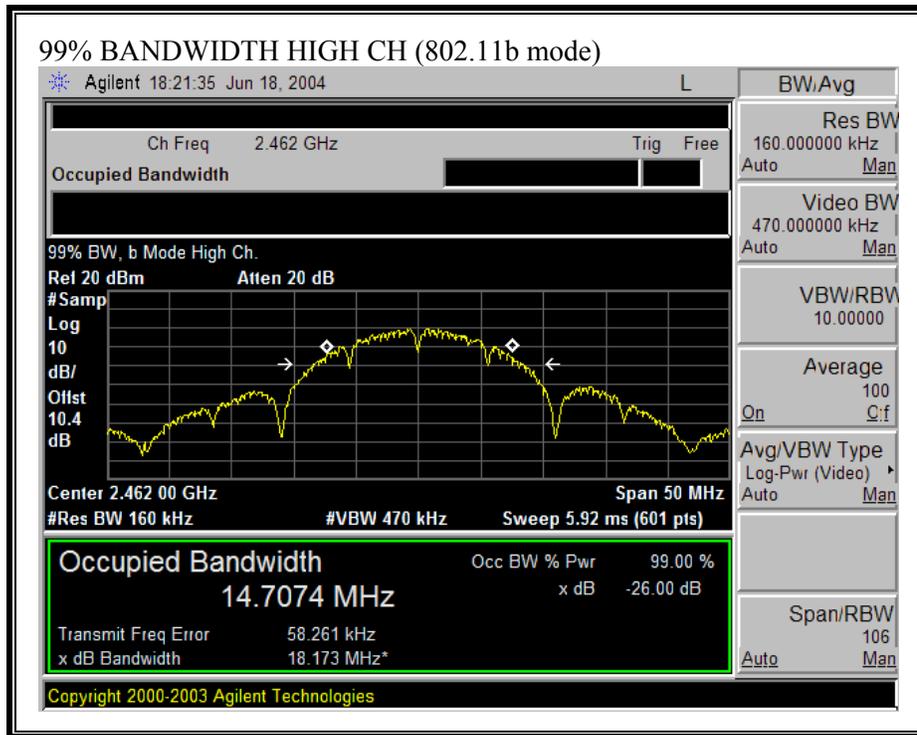


**99% BANDWIDTH (802.11g MODE)**

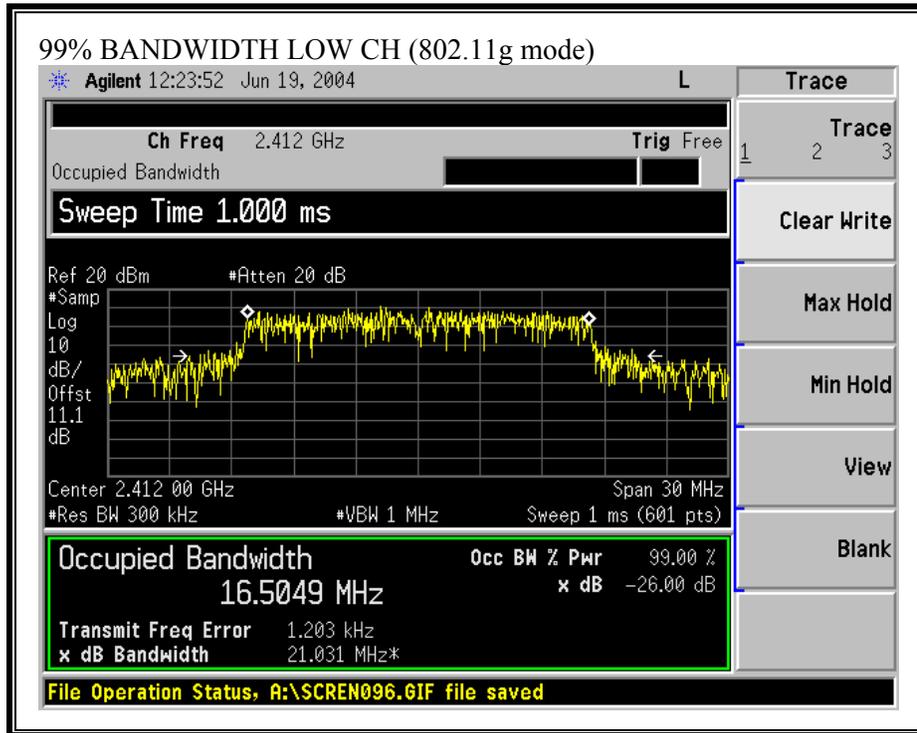


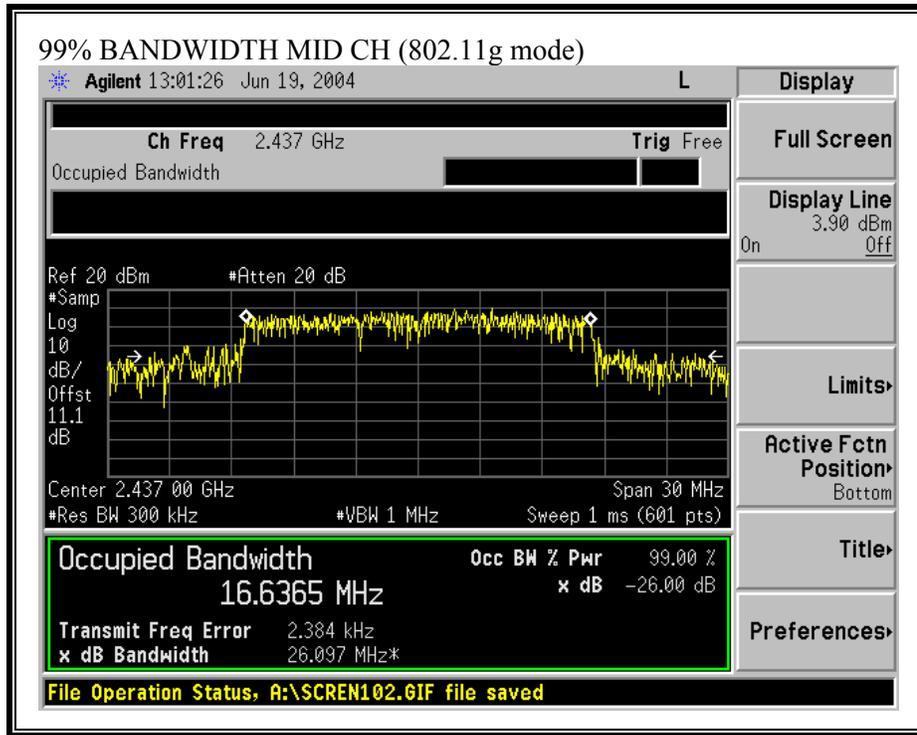


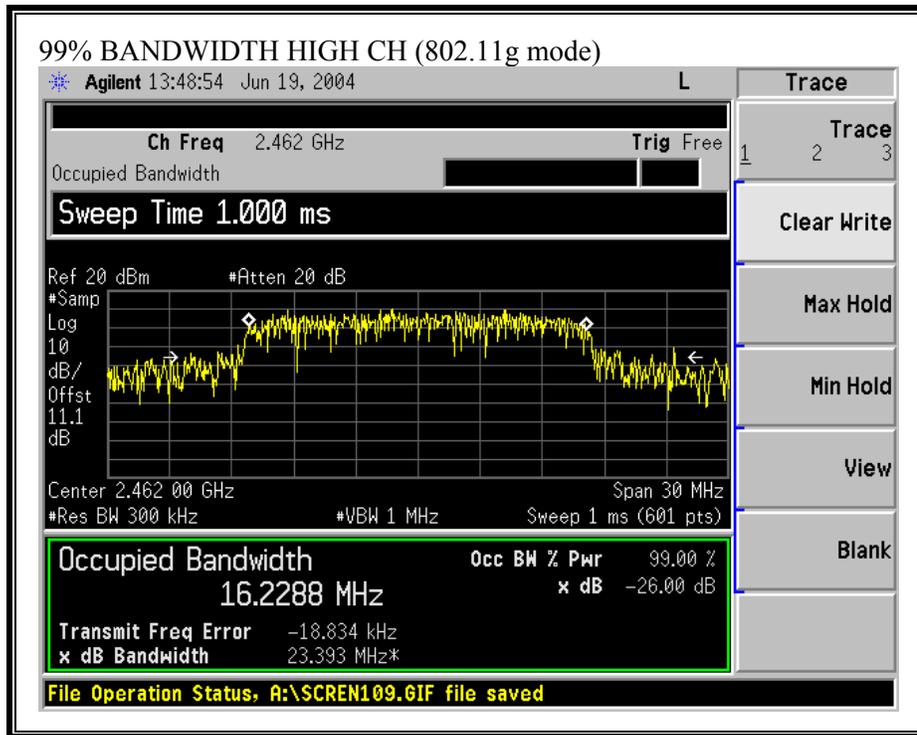

**99% BANDWIDTH (802.11a MODE)**

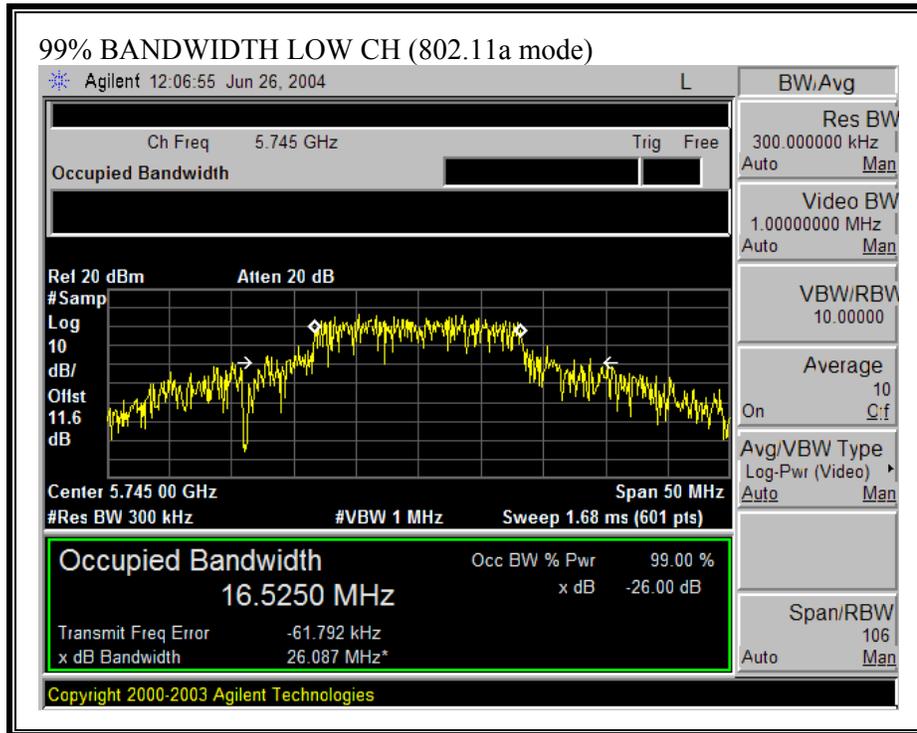

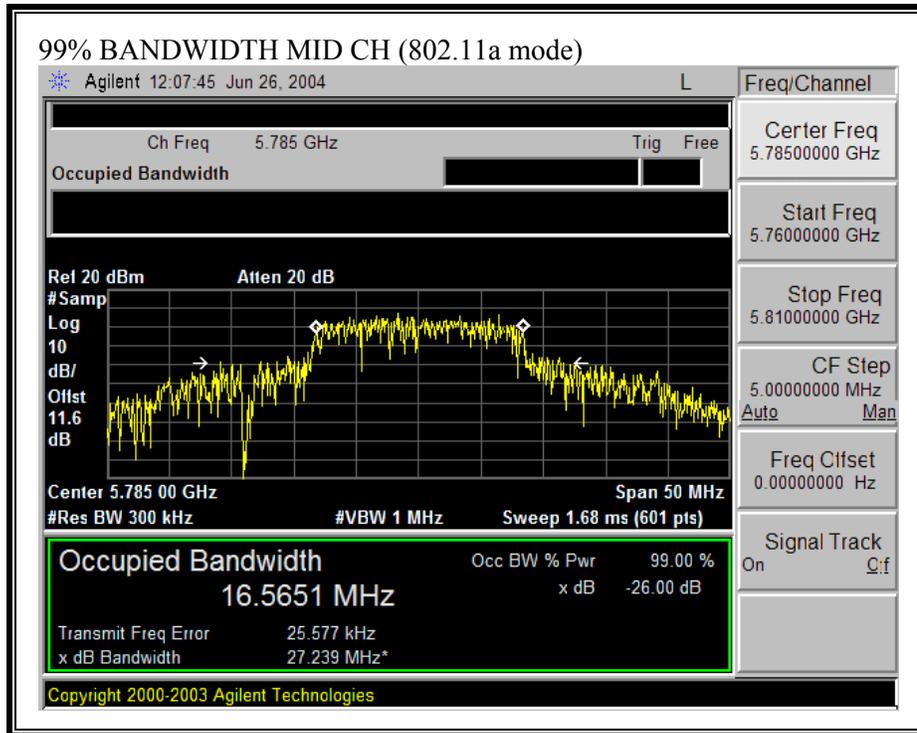

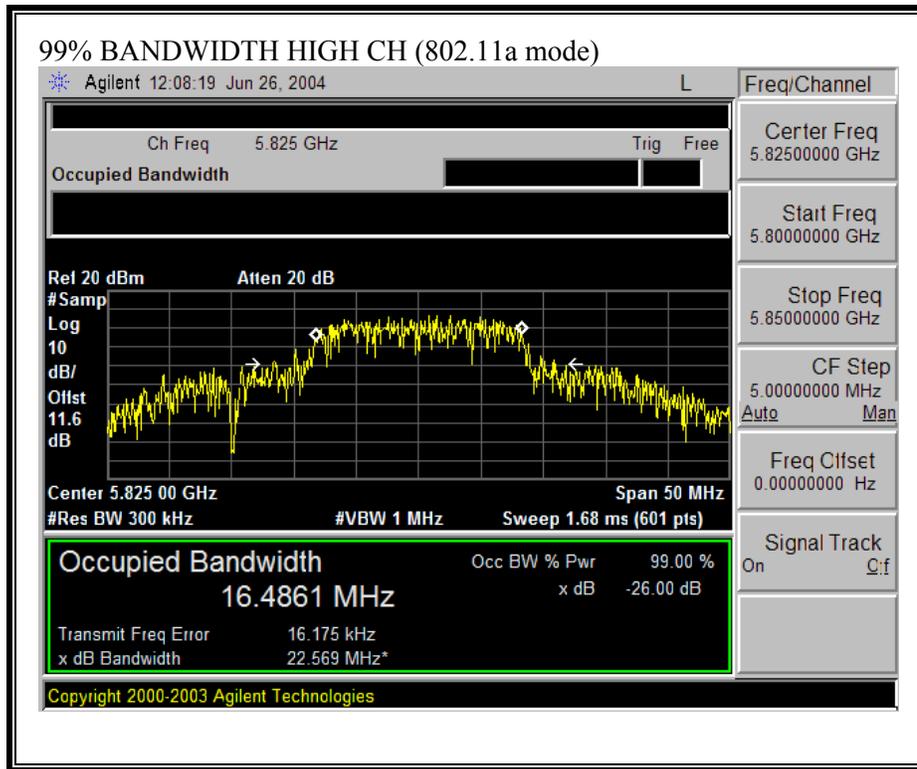

### 7.3. PEAK OUTPUT POWER

#### PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

#### 2.4 GHZ BAND RESULTS

No non-compliance noted:

##### 802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	17.24	30	-12.76
Middle	2437	18.91	30	-11.09
High	2462	19.24	30	-10.76

##### 802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	24.10	30	-5.90
Middle	2437	24.06	30	-5.94
High	2462	23.97	30	-6.03


**5.8 GHZ BAND RESULTS**


No non-compliance noted:


802.11a Mode

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Peak Power (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	5745	21.00	30	-9.00
Middle	5785	20.59	30	-9.41
High	5825	20.65	30	-9.35


**OUTPUT POWER (802.11b MODE)**

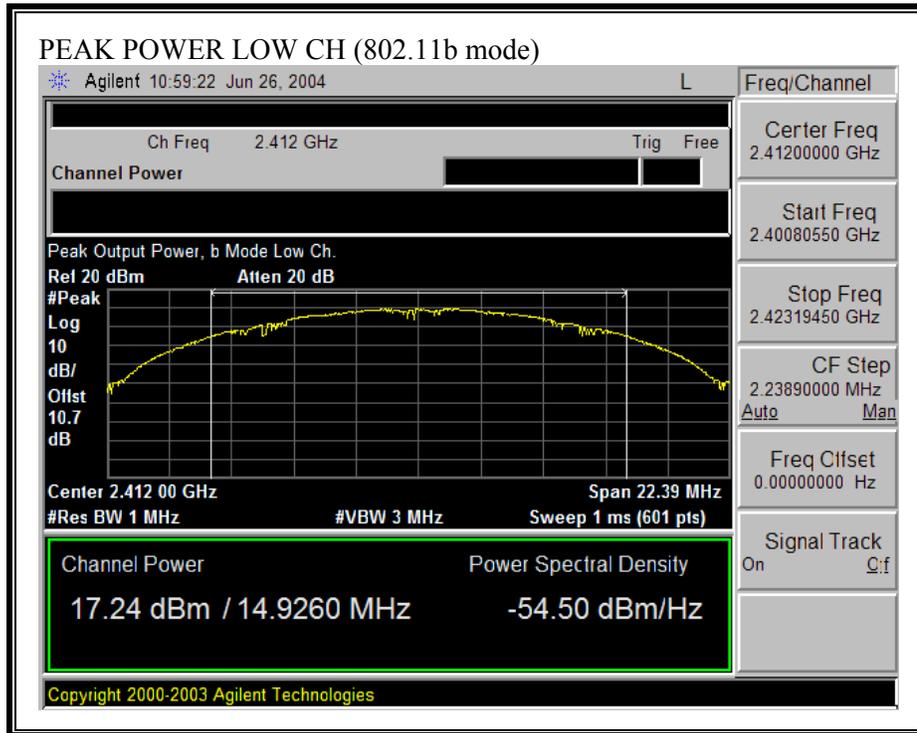


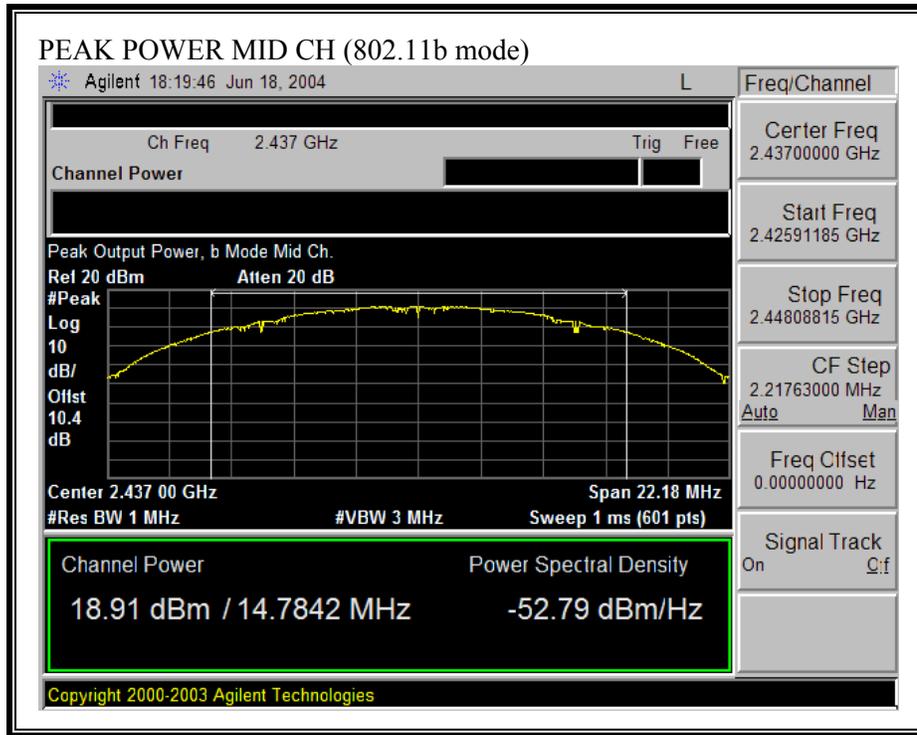


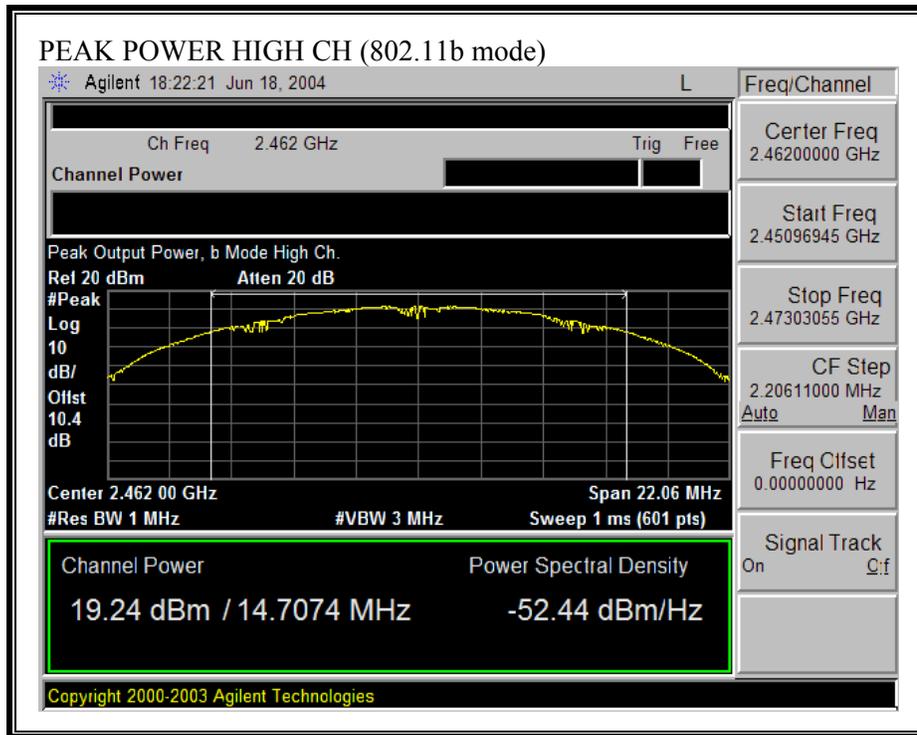


**OUTPUT POWER (802.11g MODE)**

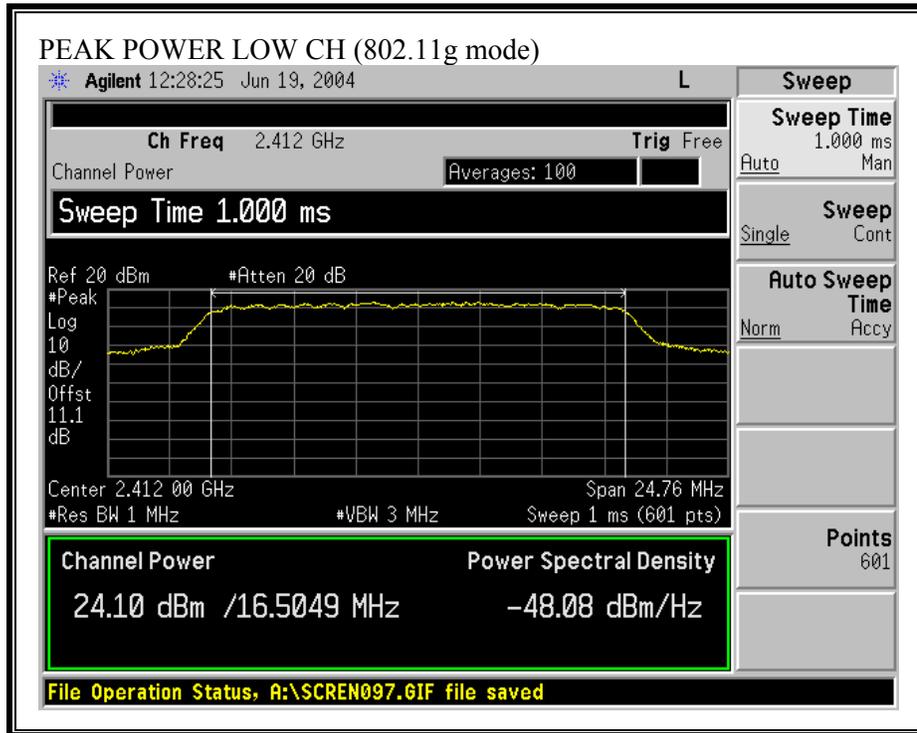


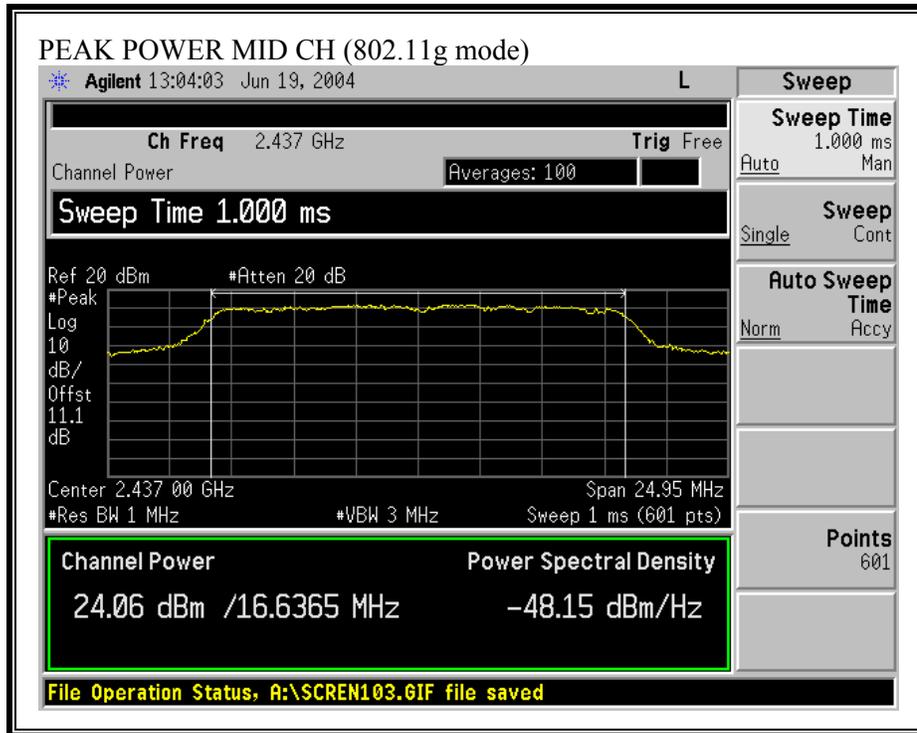


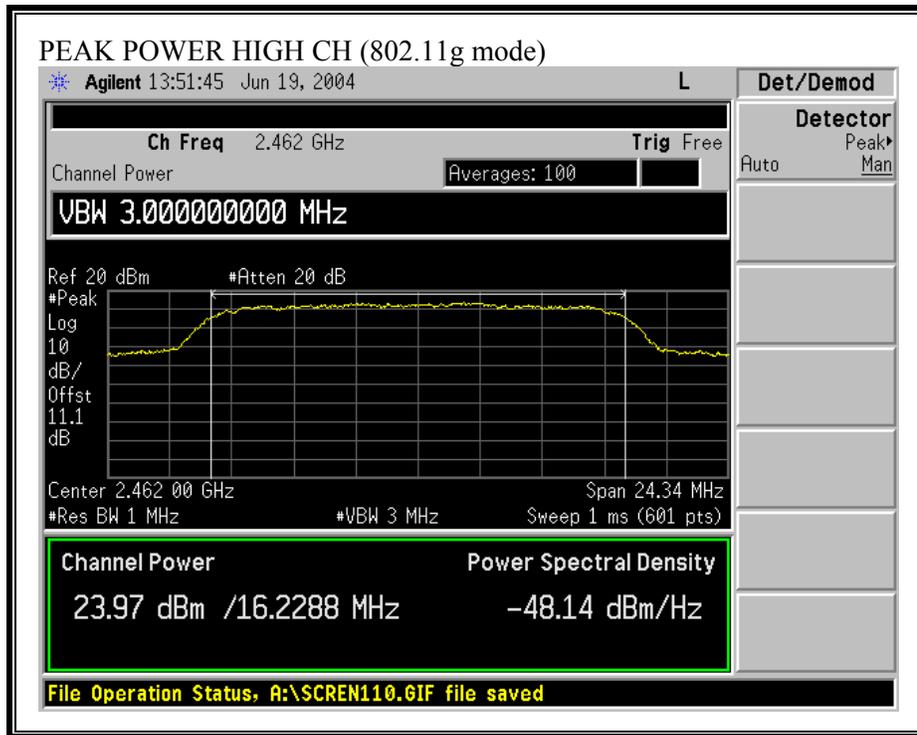

**OUTPUT POWER (802.11a MODE)**

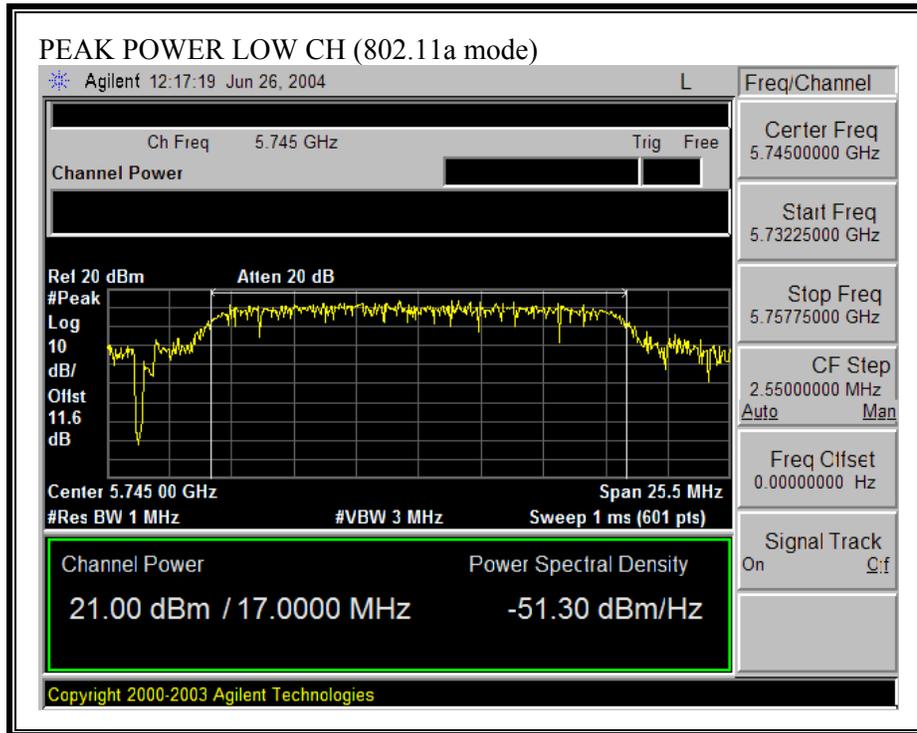

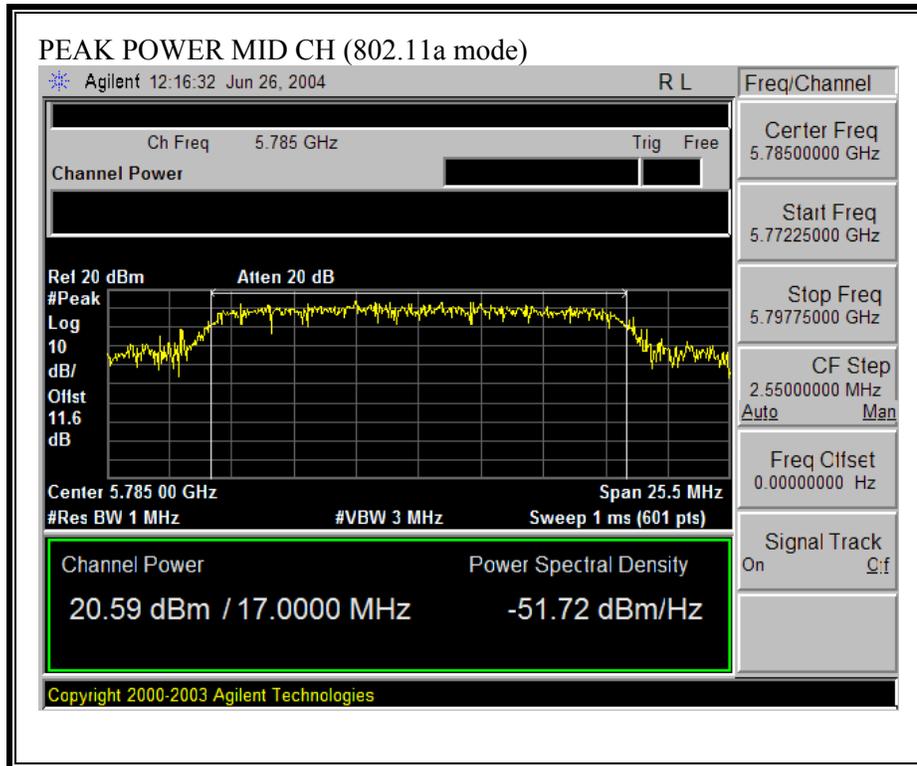

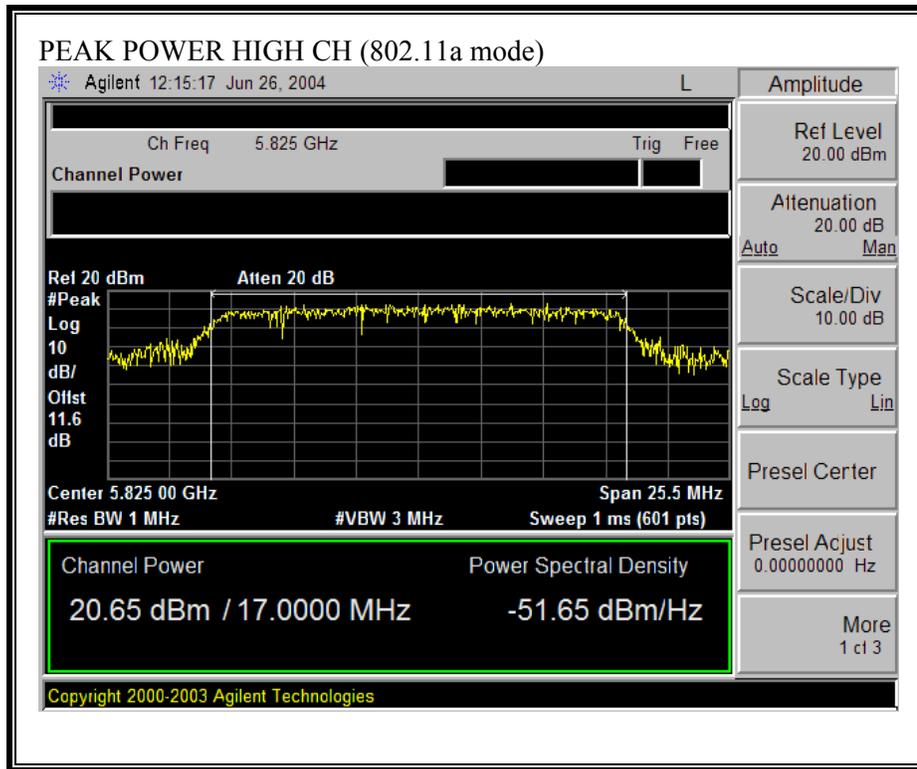

## 7.4. MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.

## **LIMITS**

From §1.1310 Table 1 (B), S = 1.0 mW/cm<sup>2</sup>

### 7.4.1. MPE, INSPIRON 510M LAPTOP WITH PHYCOMP ANTENNA SET

#### 2.4 GHz BAND RESULTS

No non-compliance noted

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	19.24	2.90	3.61
802.11g	1.0	24.10	2.90	6.31

#### 5.8 GHz BAND RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11a	1.0	21.00	3.10	4.52

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

### 7.4.2. MPE, INSPIRON 300M LAPTOP WITH WISTRON ANTENNA SET

#### 2.4 GHz BAND RESULTS

No non-compliance noted

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	19.24	1.22	2.97
802.11g	1.0	24.10	1.22	5.20

#### 5.8 GHz BAND RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11a	1.0	21.00	2.20	4.08

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

### 7.4.3. MPE, INSPIRON 300M LAPTOP WITH HITACHI ANTENNA SET

#### 2.4 GHz BAND RESULTS

No non-compliance noted

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	19.24	1.70	3.14
802.11g	1.0	24.10	1.70	5.50

#### 5.8 GHz BAND RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm <sup>2</sup> )	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11a	1.0	21.00	3.70	4.84

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## 7.5. AVERAGE POWER

### AVERAGE POWER LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### 2.4 GHZ BAND RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.4 dB (including 10 dB pad and 0.4 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 802.11b Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	15.40
Middle	2437	17.30
High	2462	17.10

#### 802.11g Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	15.50
Middle	2437	15.50
High	2462	15.30

### **5.8 GHZ BAND RESULTS**

No non-compliance noted:

The cable assembly insertion loss of 11.6 dB (including 10 dB pad and 1.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 802.11a Mode

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Average Power (dBm)</b>
Low	5745	17.20
Middle	5785	17.10
High	5825	17.10

## 7.6. PEAK POWER SPECTRAL DENSITY

### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

### 2.4 GHz BAND RESULTS

No non-compliance noted:

#### 802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-9.54	8	-17.54
Middle	2437	-6.93	8	-14.93
High	2462	-8.56	8	-16.56

#### 802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-4.93	8	-12.93
Middle	2437	-5.25	8	-13.25
High	2462	-4.80	8	-12.80


**5.8 GHz BAND RESULTS**


No non-compliance noted:


802.11a Mode

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>PPSD (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>
Low	5745	-8.02	8	-16.02
Middle	5785	-7.73	8	-15.73
High	5825	-6.43	8	-14.43


**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

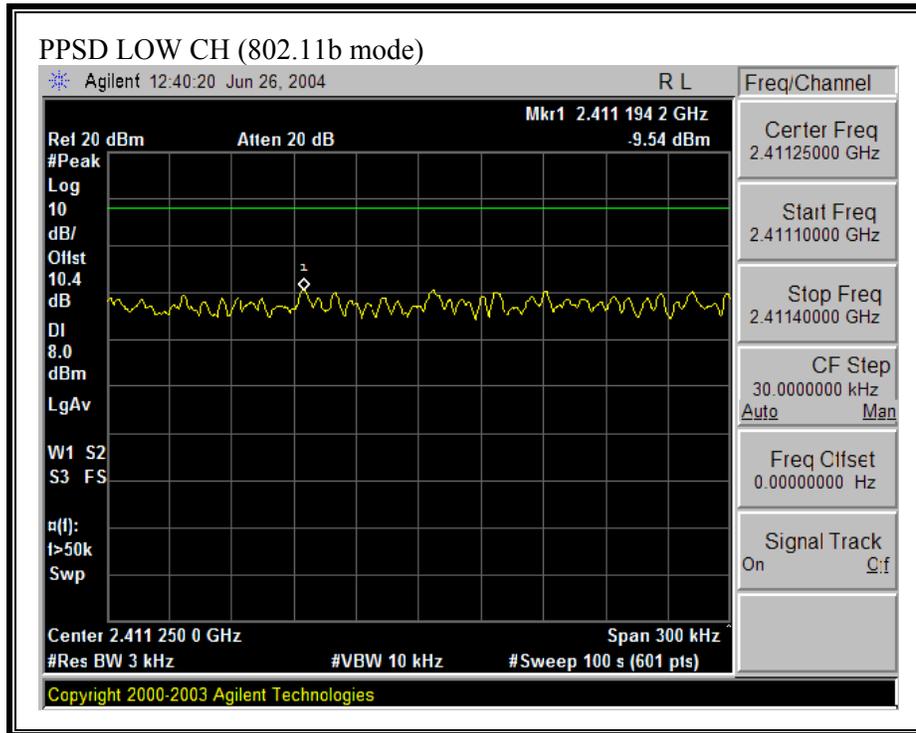


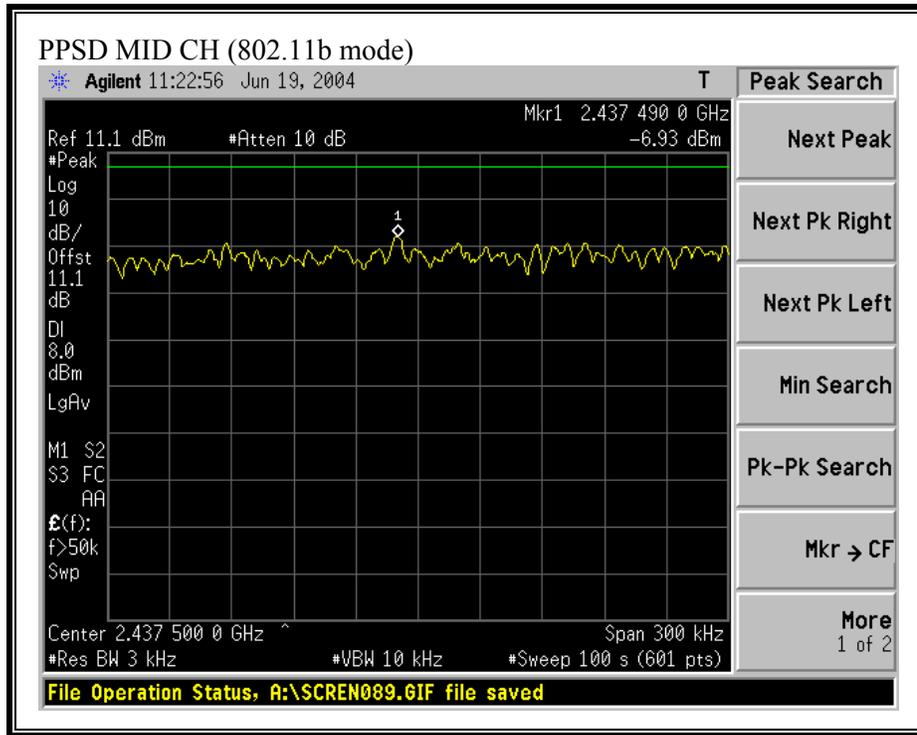


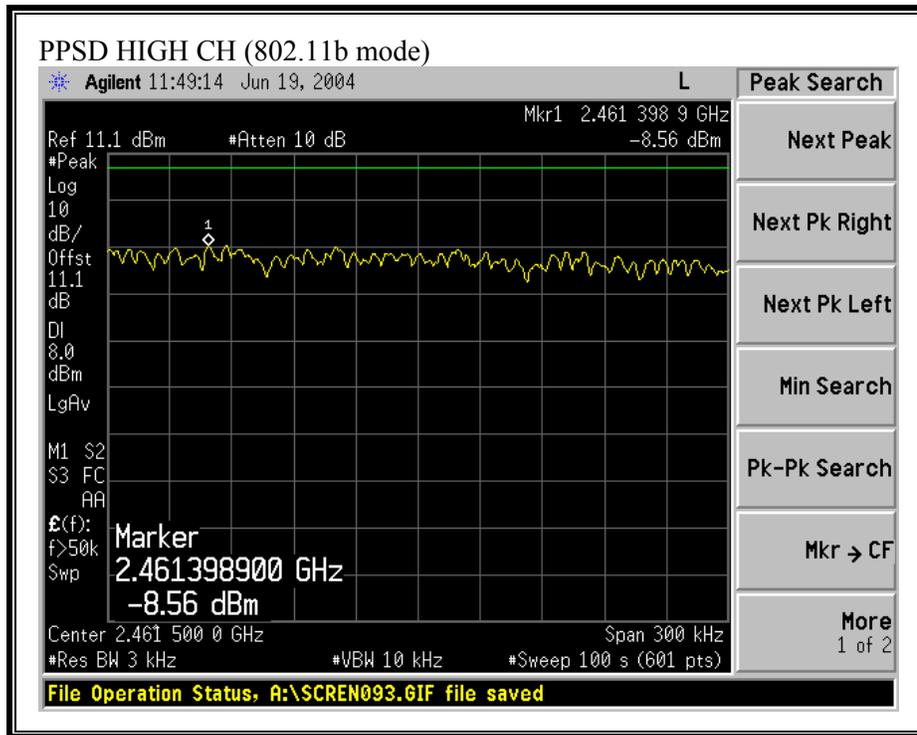


**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

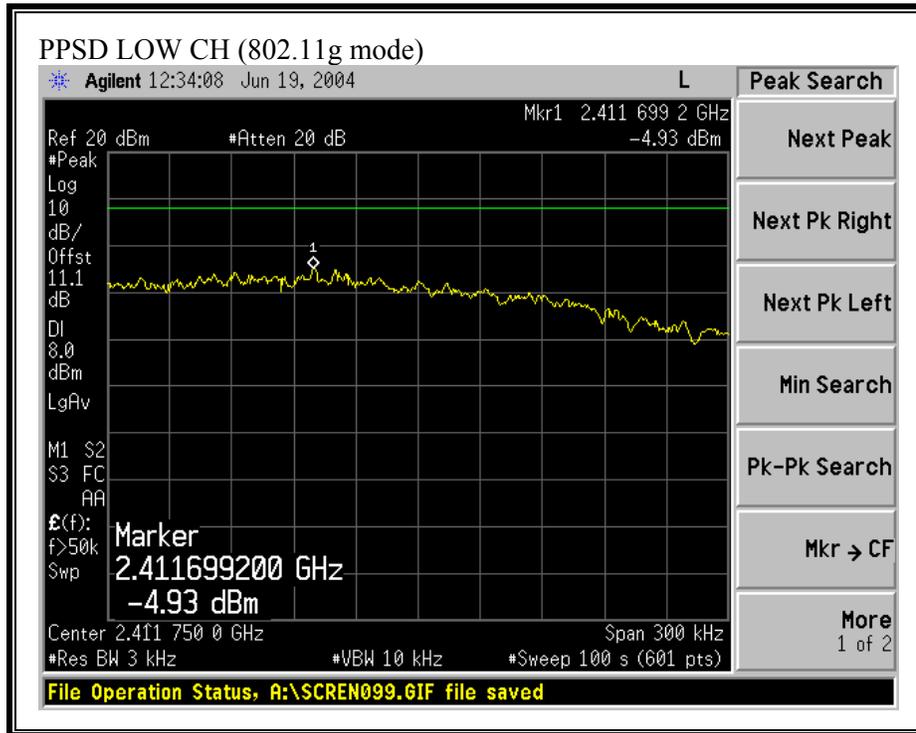


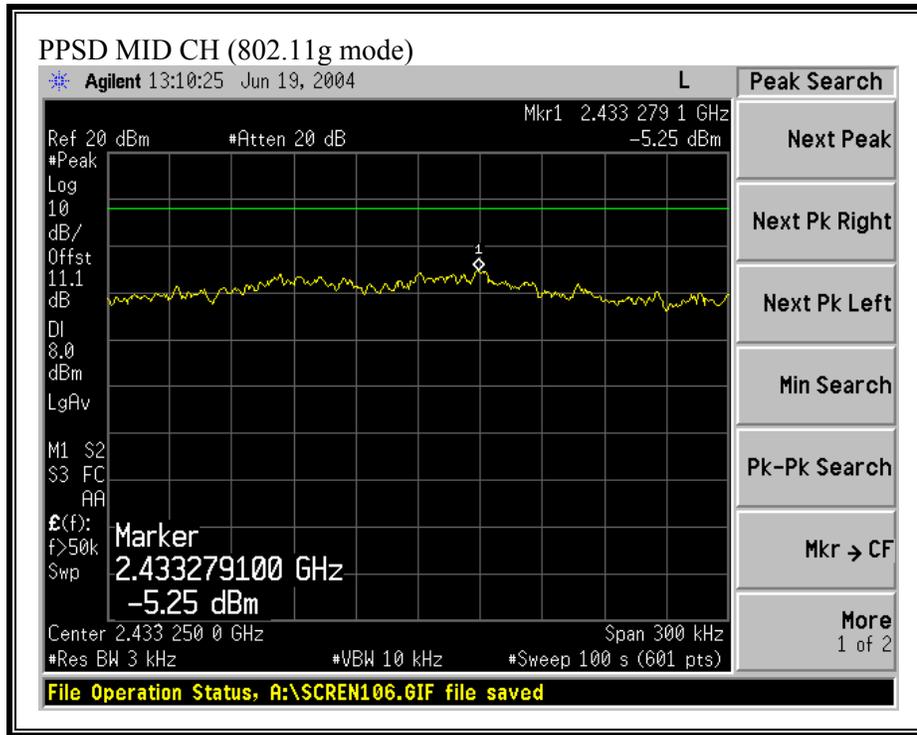


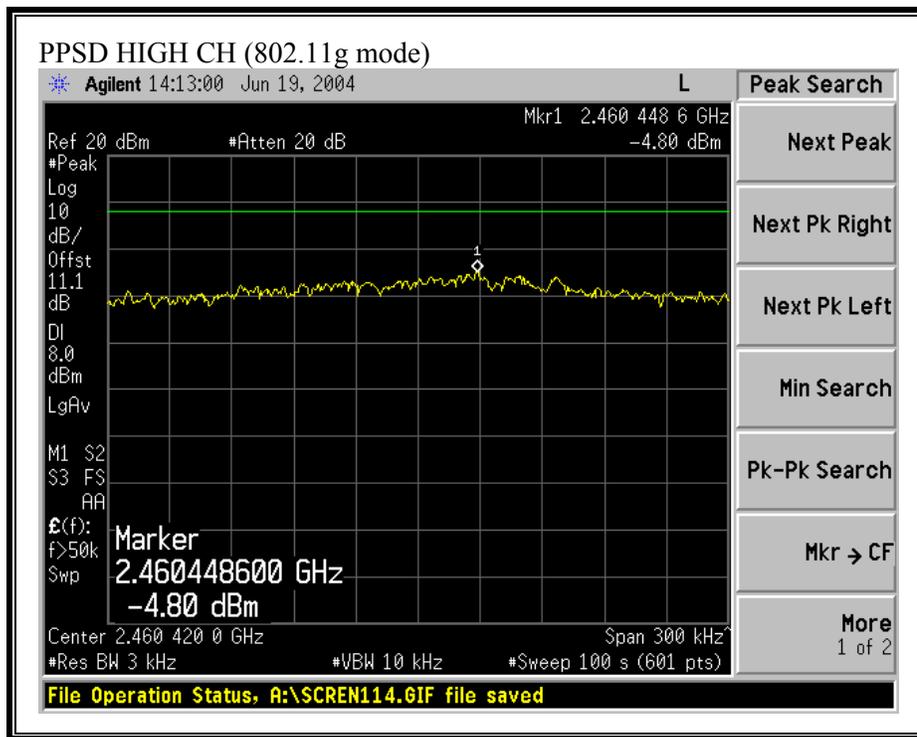

**PEAK POWER SPECTRAL DENSITY (802.11a MODE)**

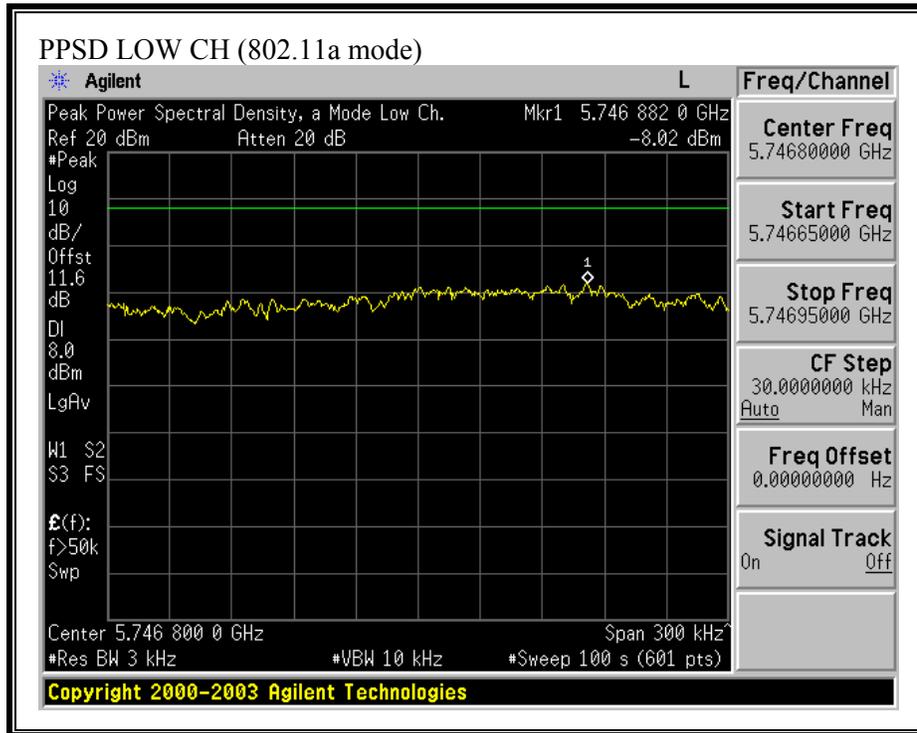

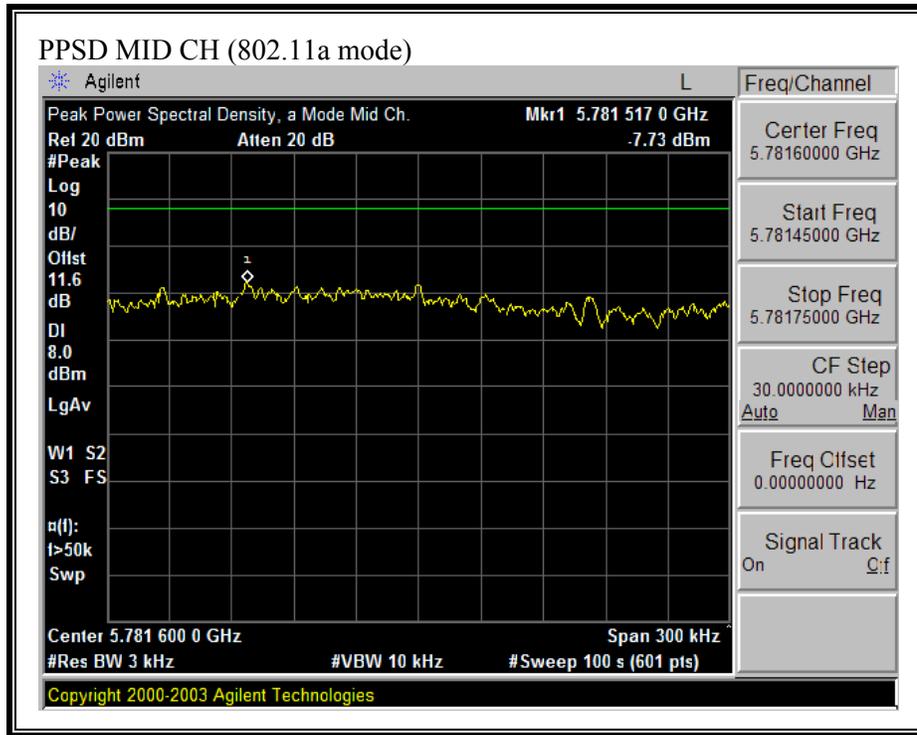

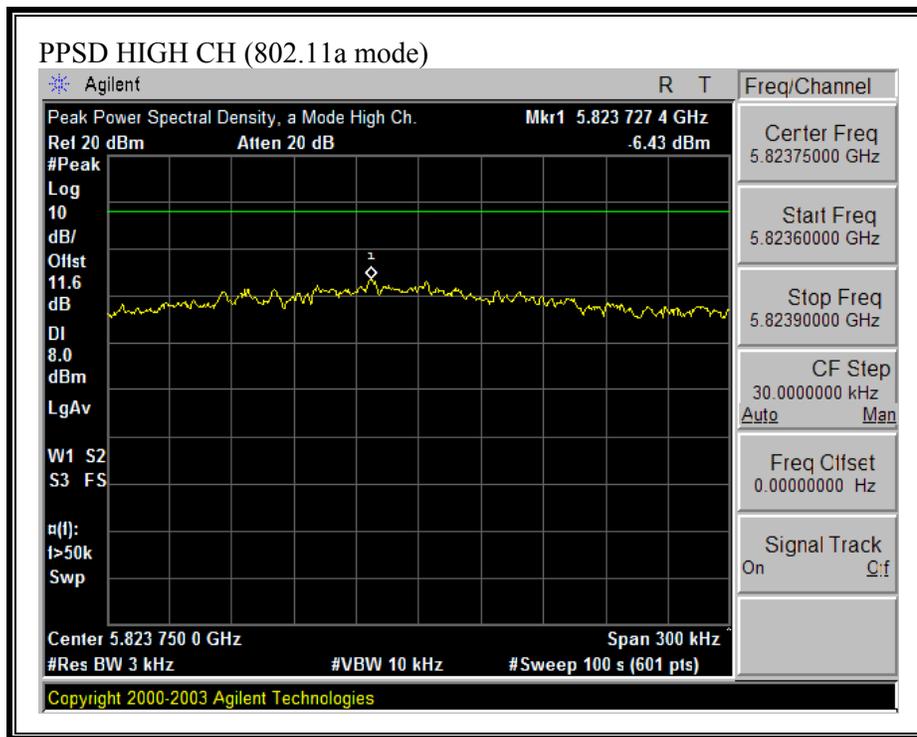

## 7.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 5.8 GHz band.

### RESULTS


No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

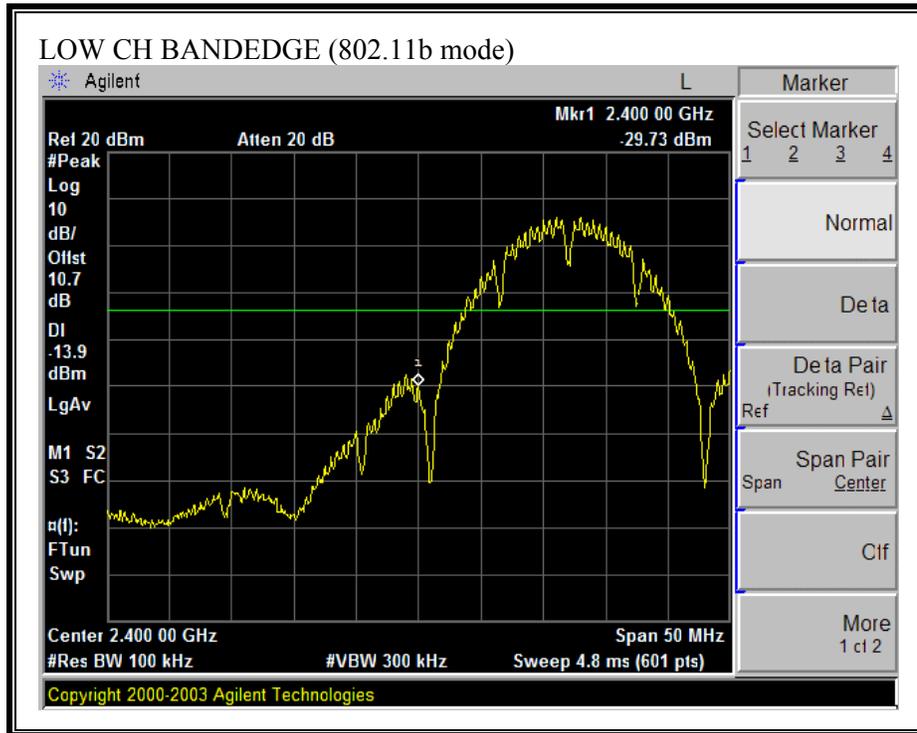

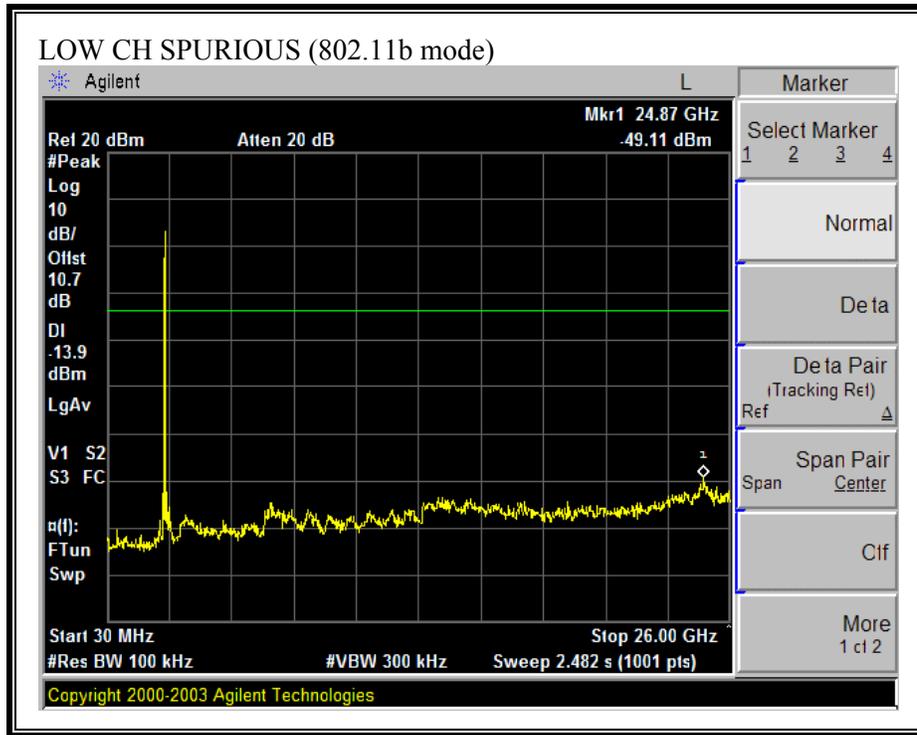



**SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)**

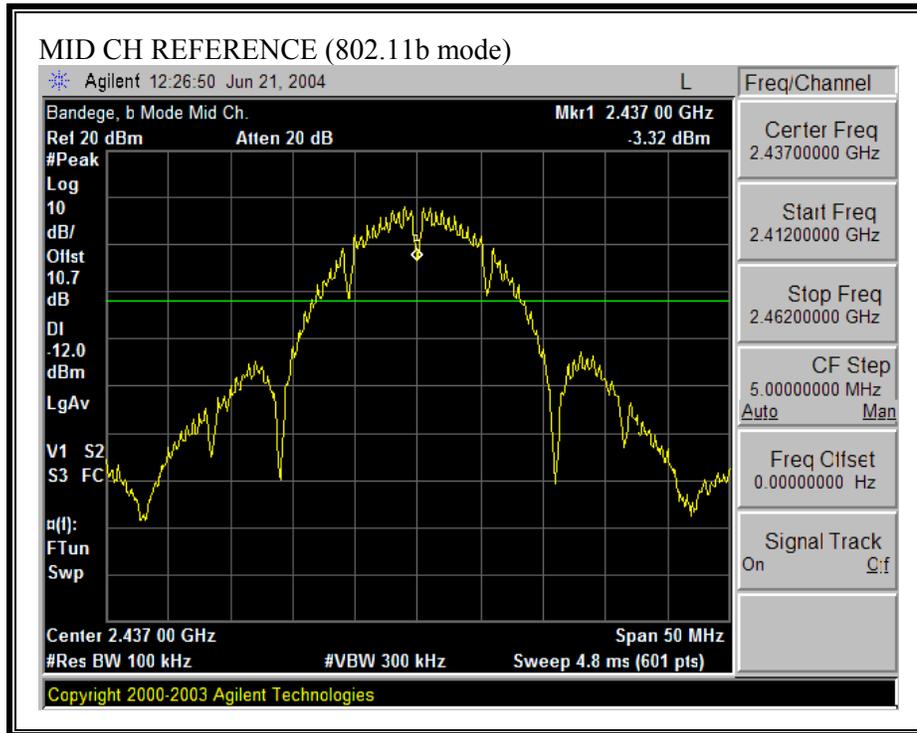

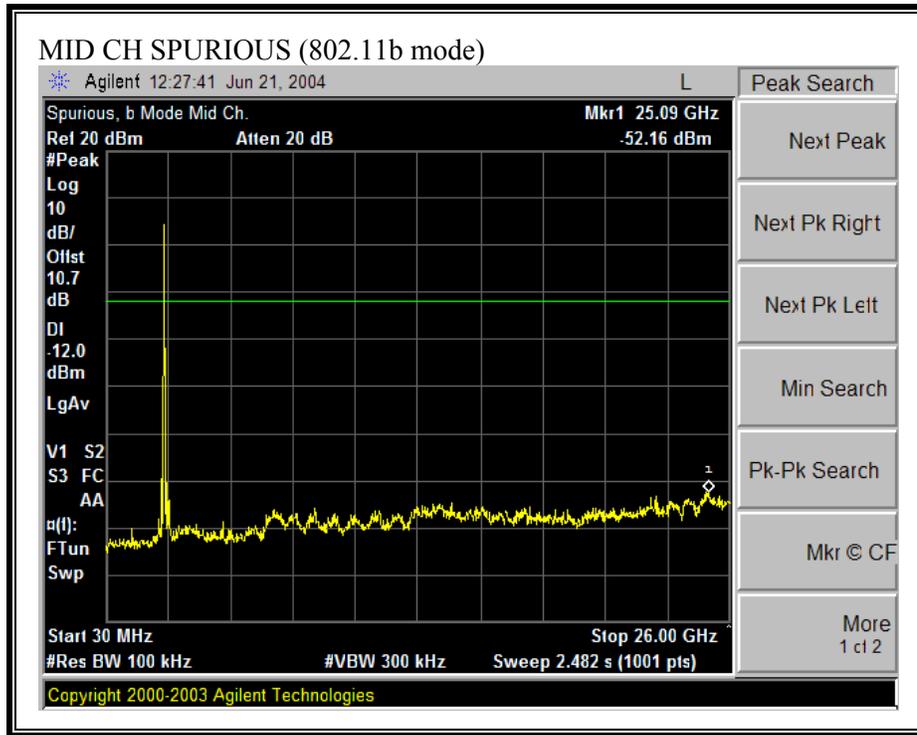



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

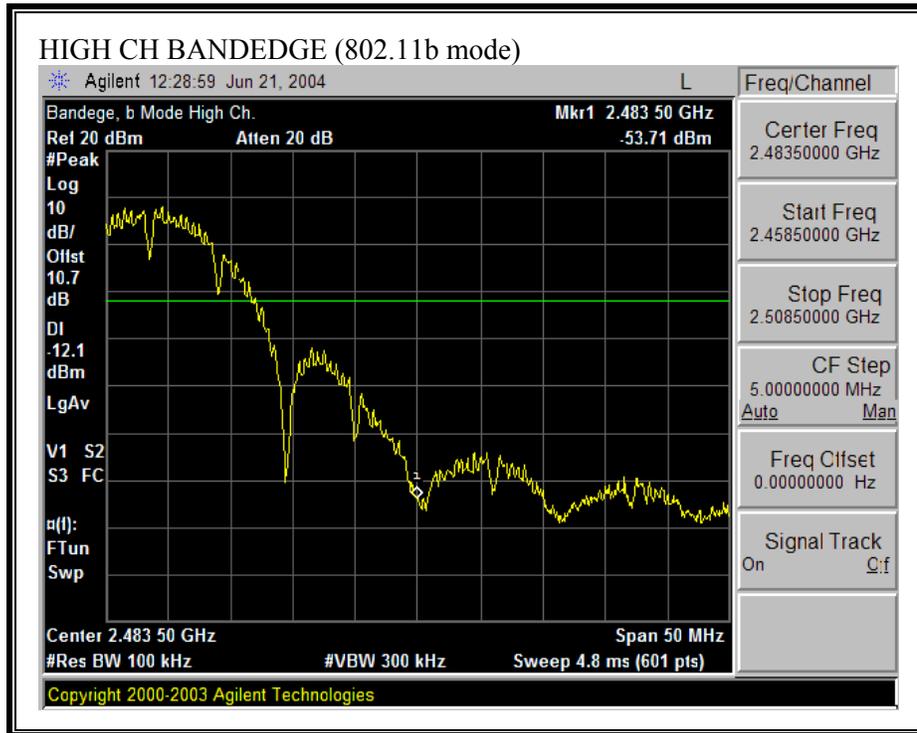

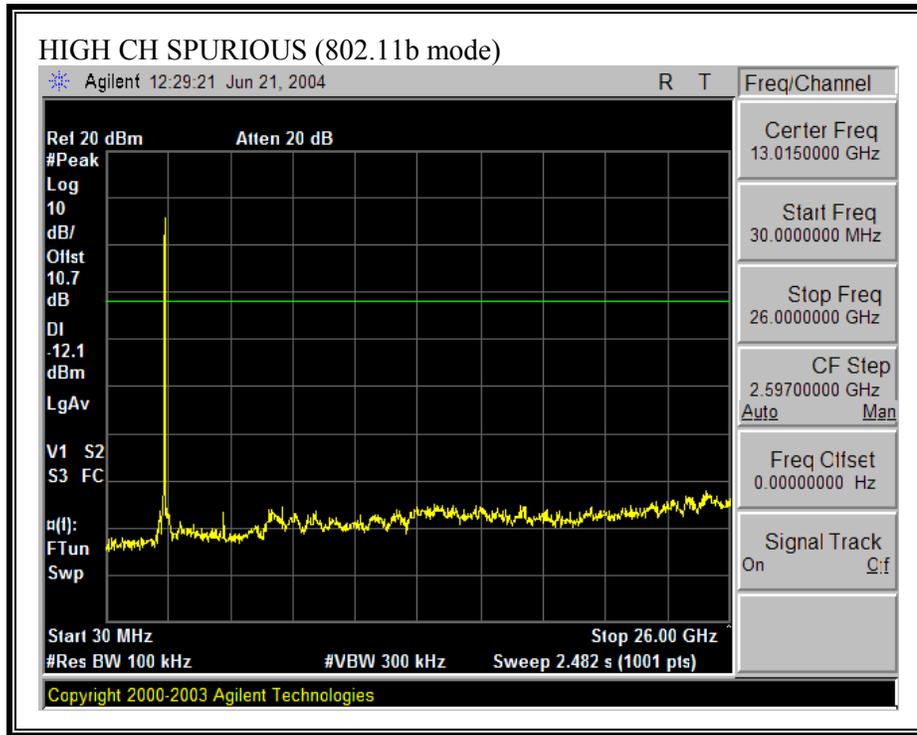



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

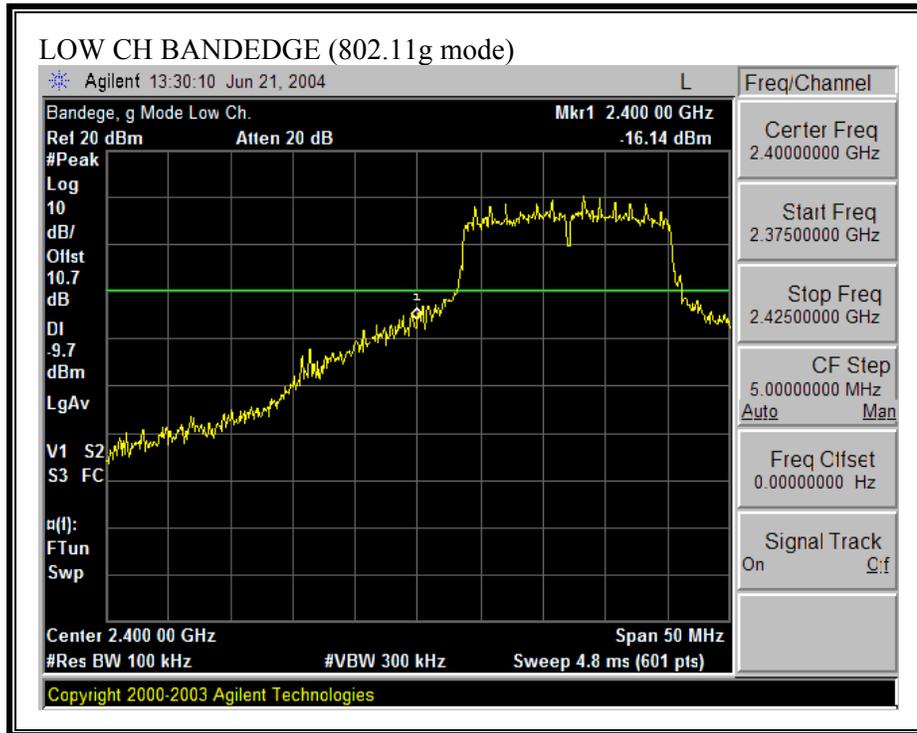

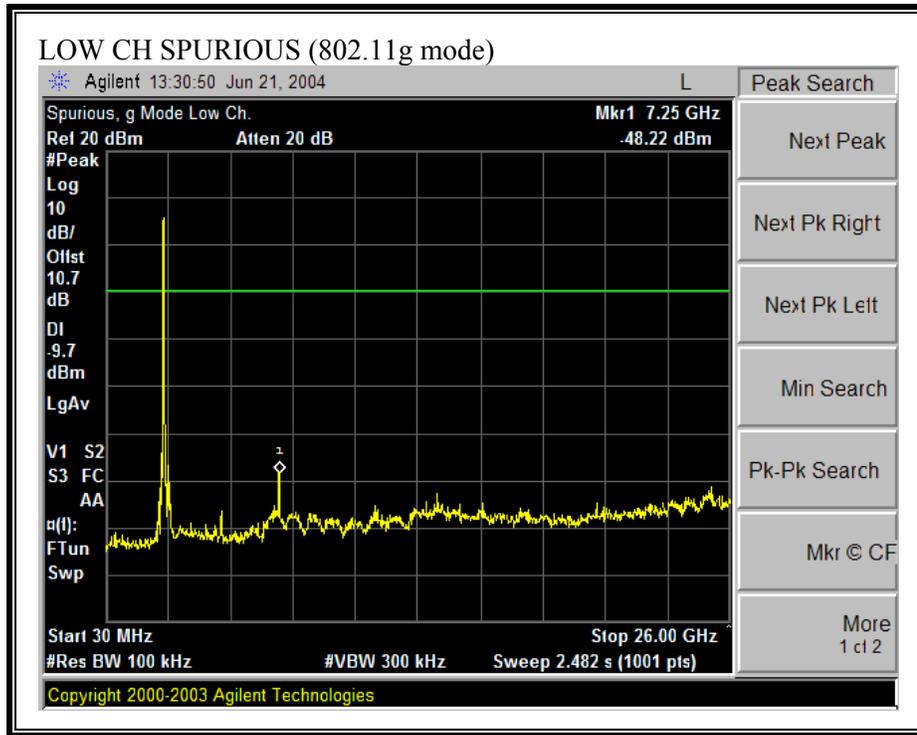



**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

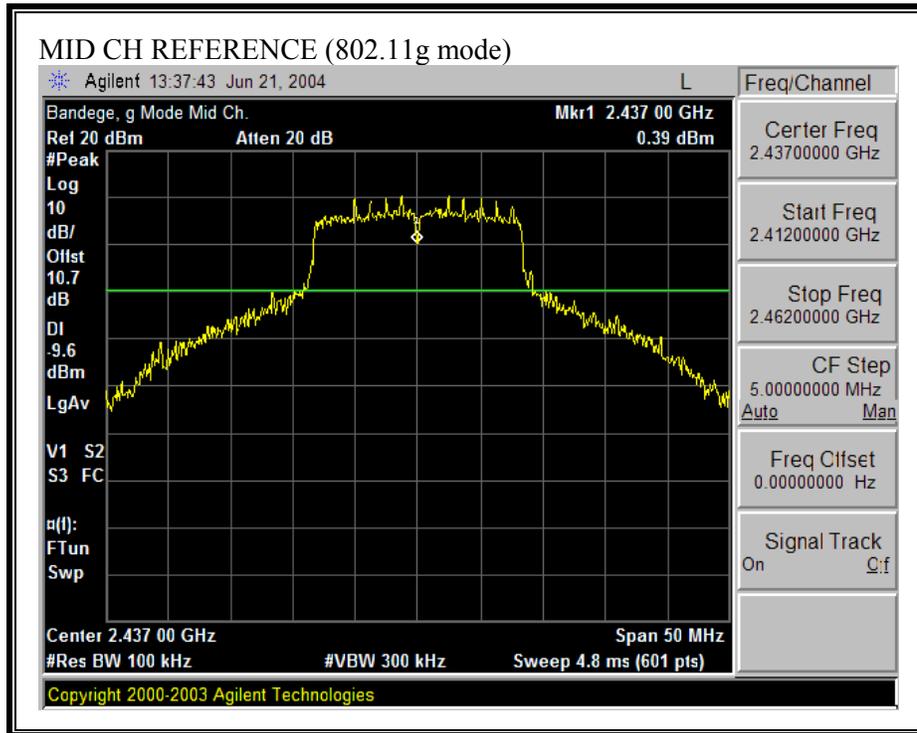

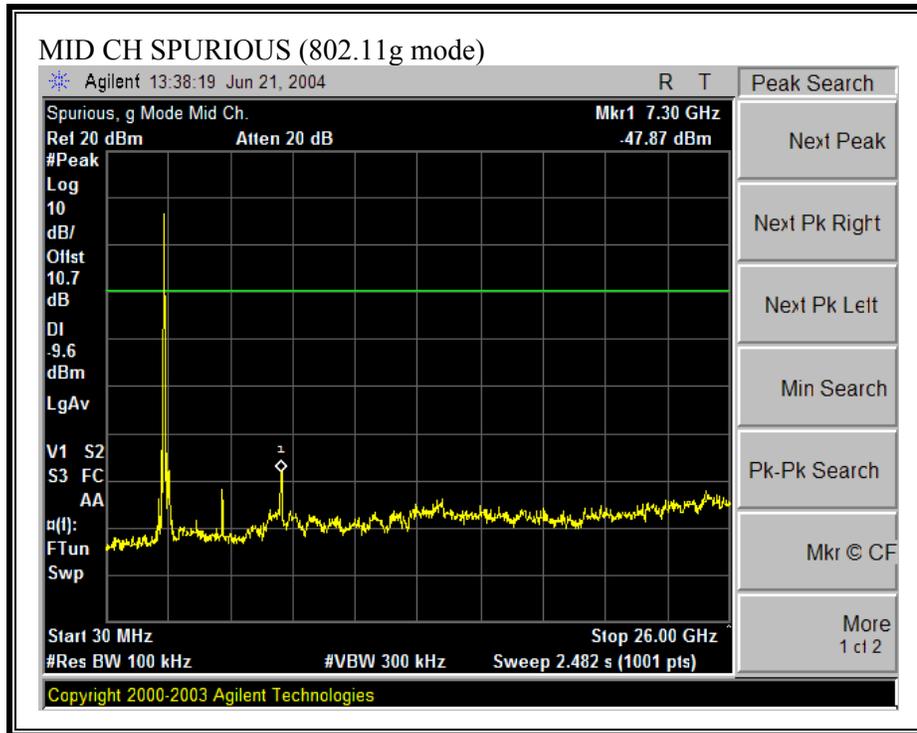



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)**

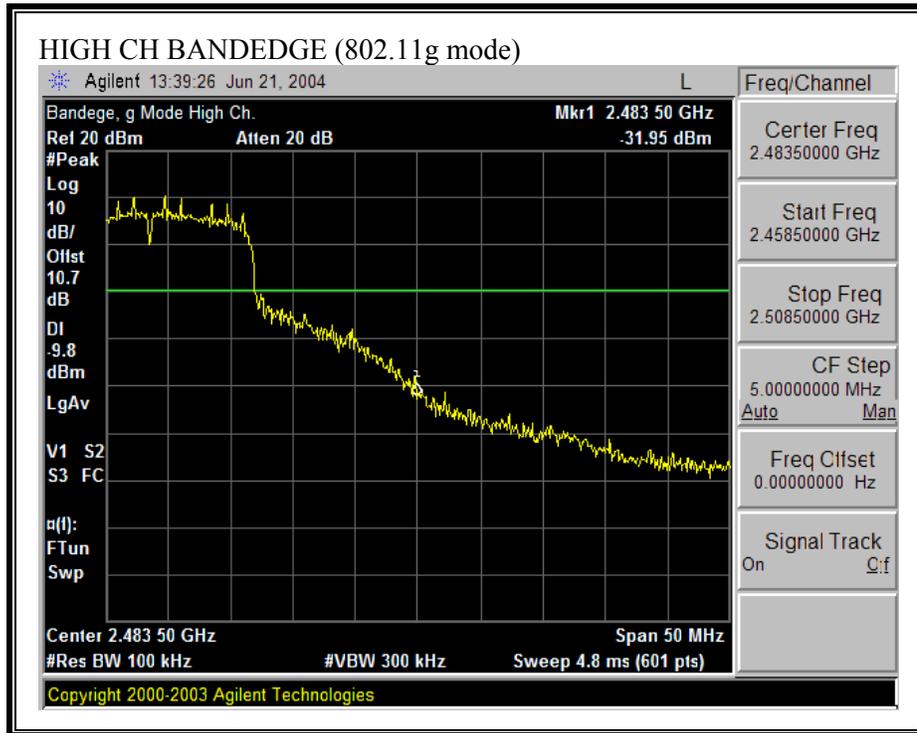

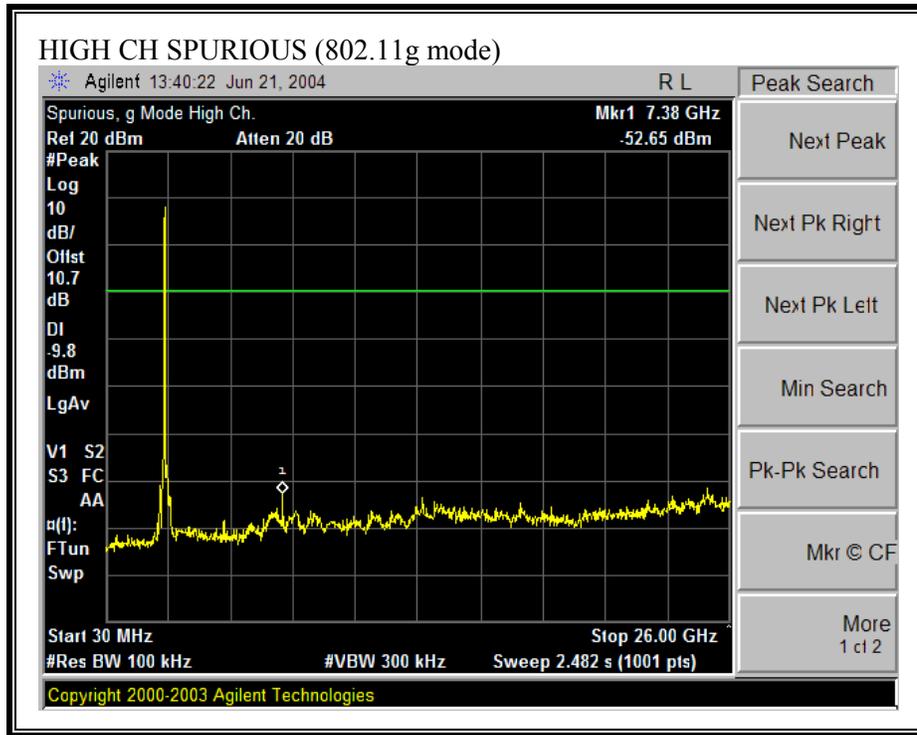



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11a MODE)**

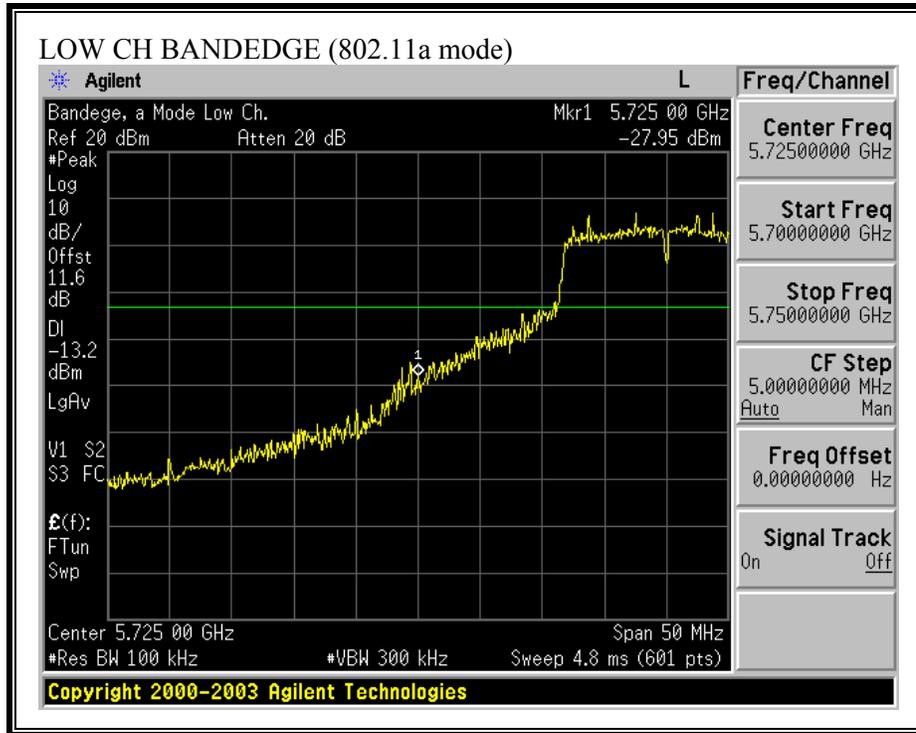

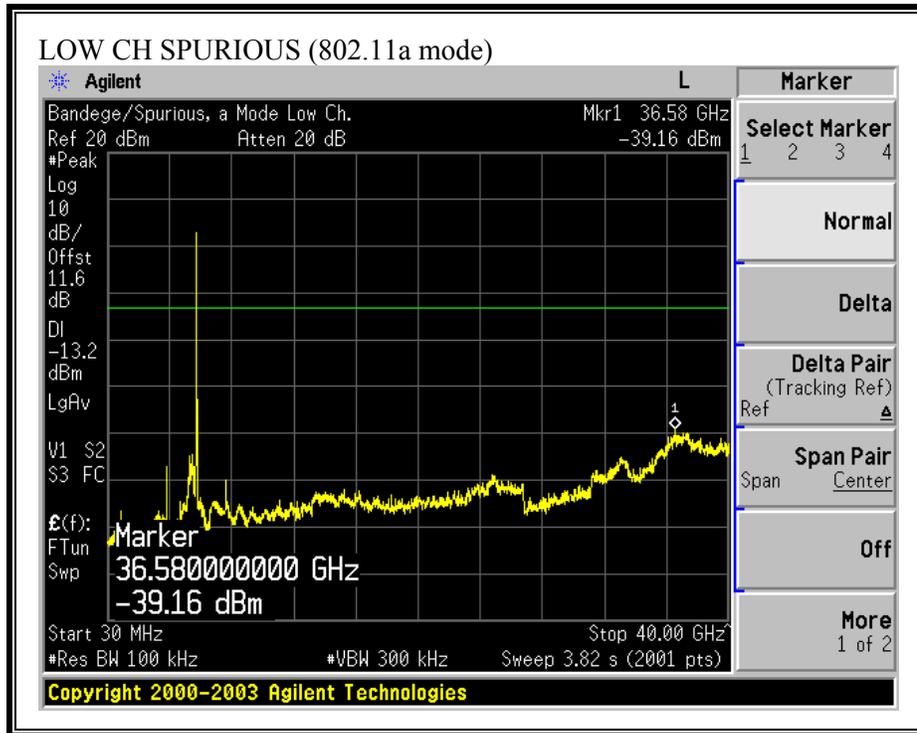



**SPURIOUS EMISSIONS, MID CHANNEL (802.11a MODE)**

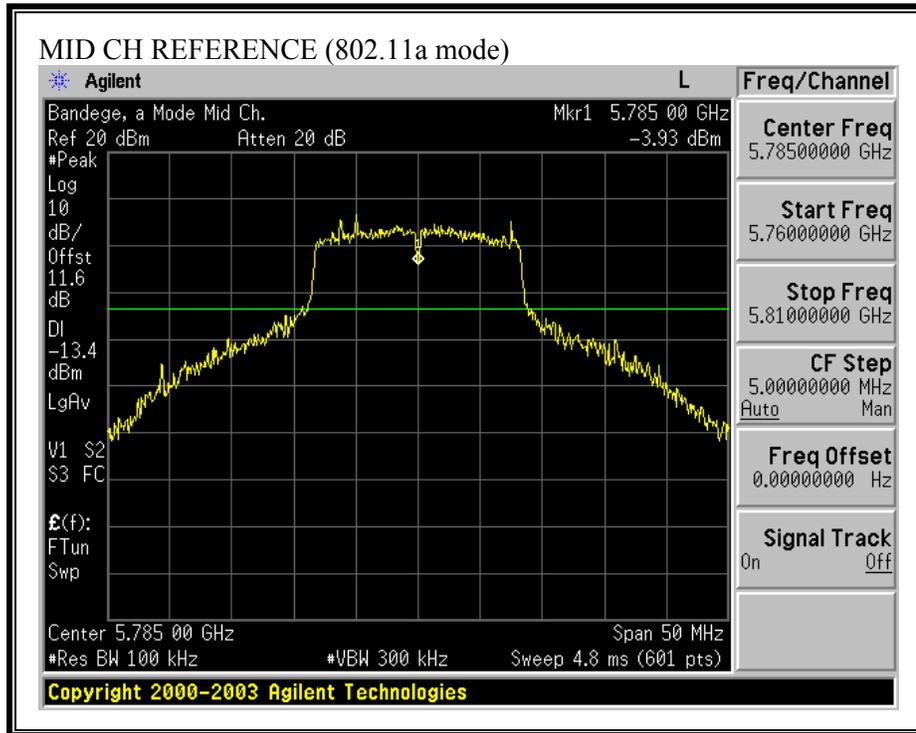

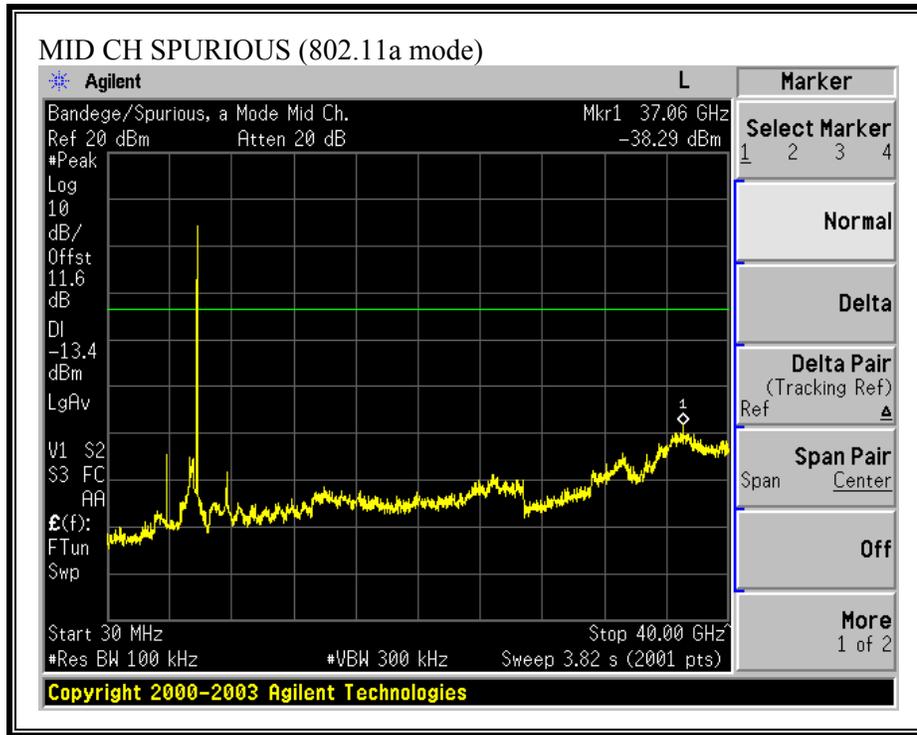

**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11a MODE)**

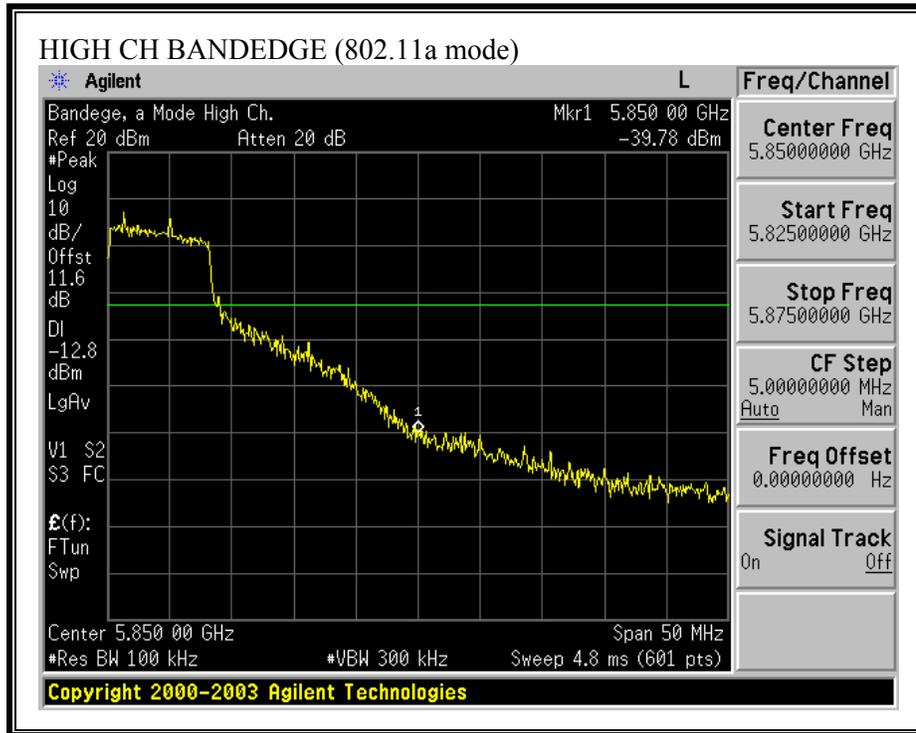

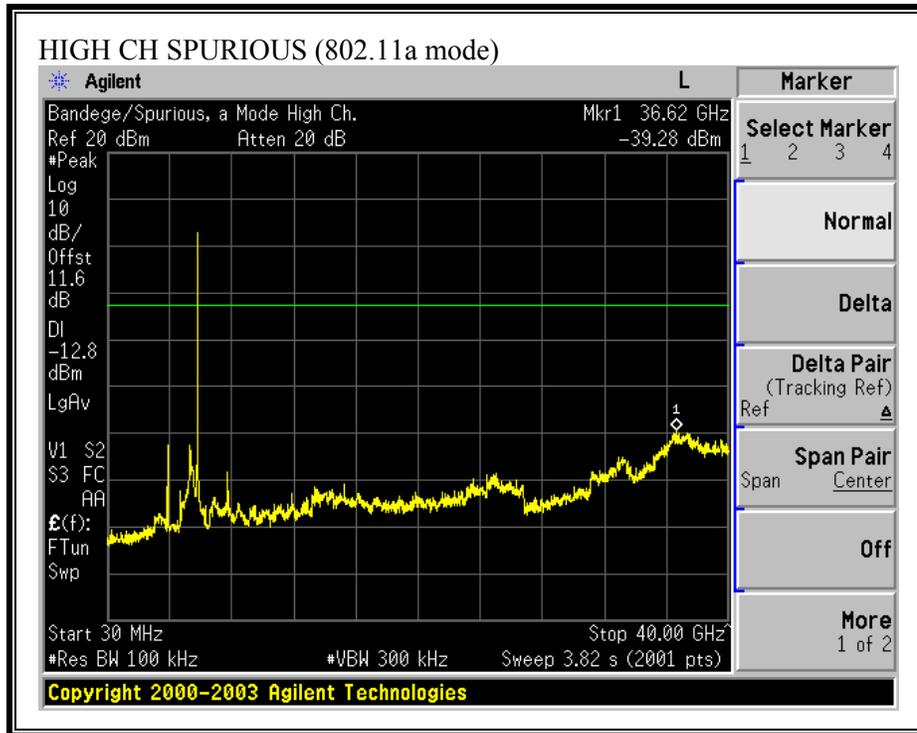

## 7.8. RADIATED EMISSIONS

### 7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels of the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels of the 5.8 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


## **RESULTS**

No non-compliance noted:


### 7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, PRECISION M60 LAPTOP WITH WISTRON ANTENNA SET


#### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

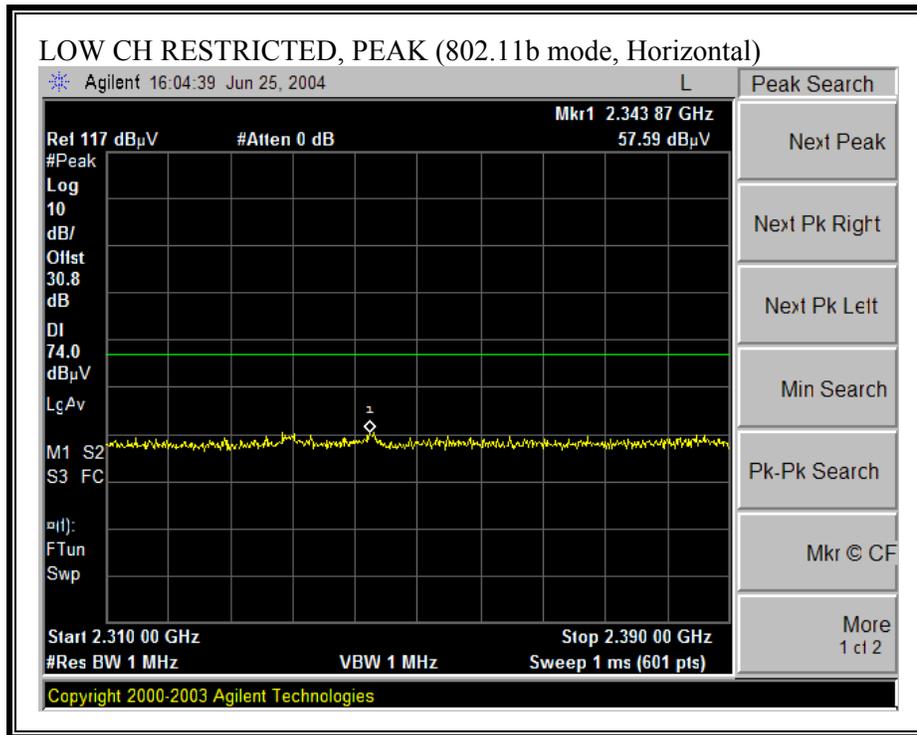

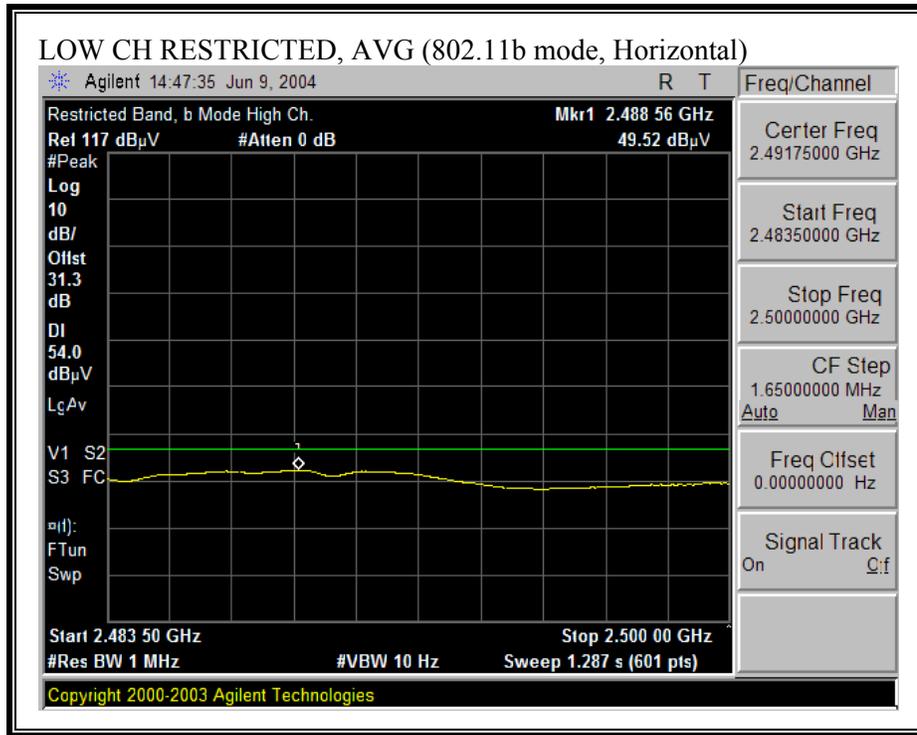



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

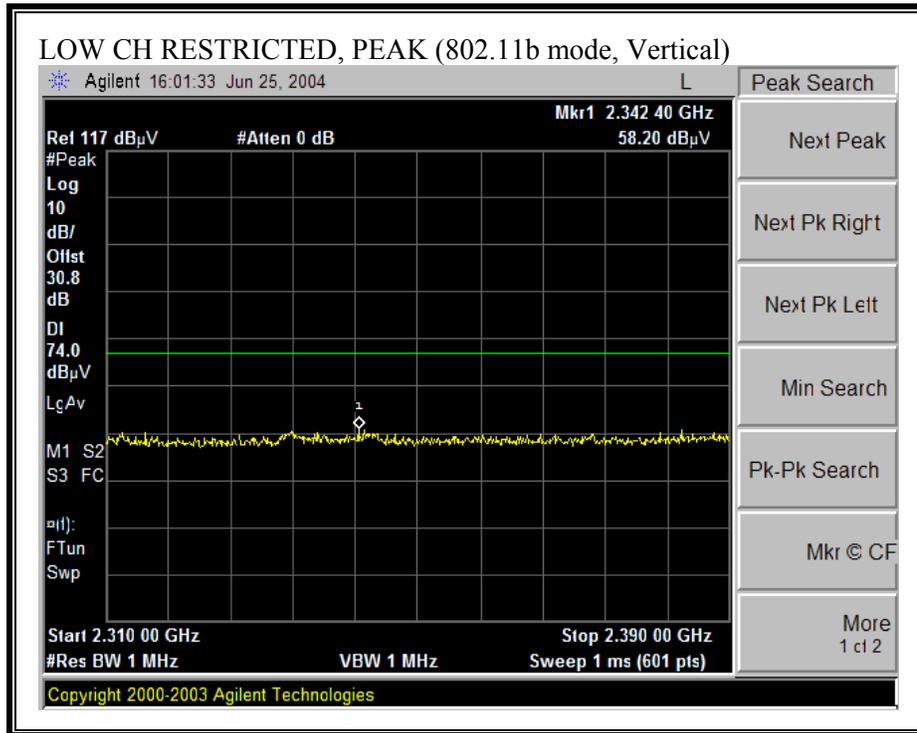

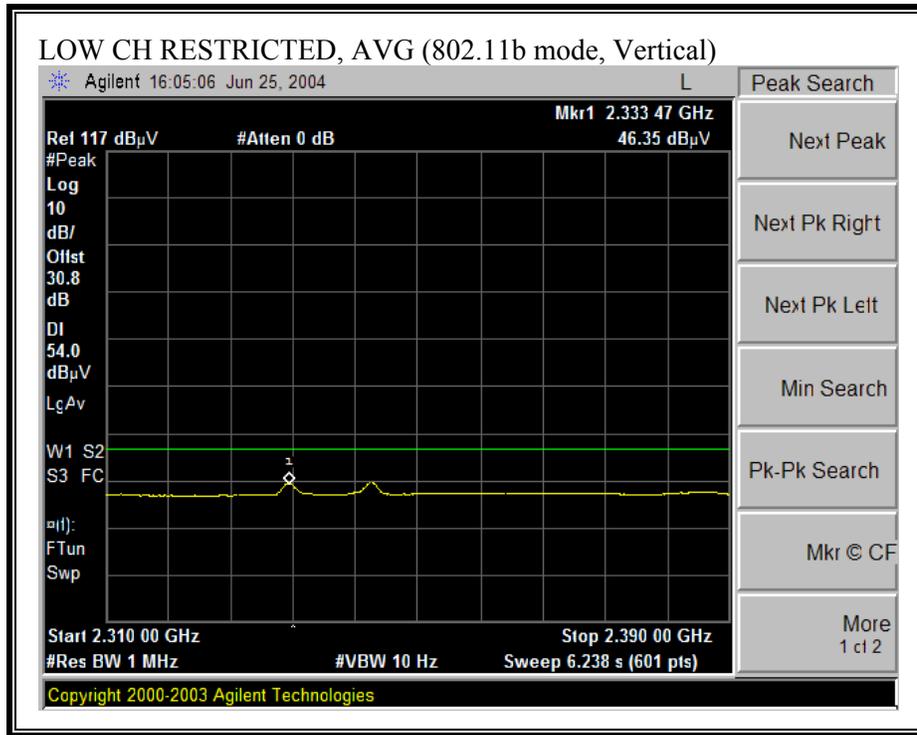



**RESTRICTED BANDEGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

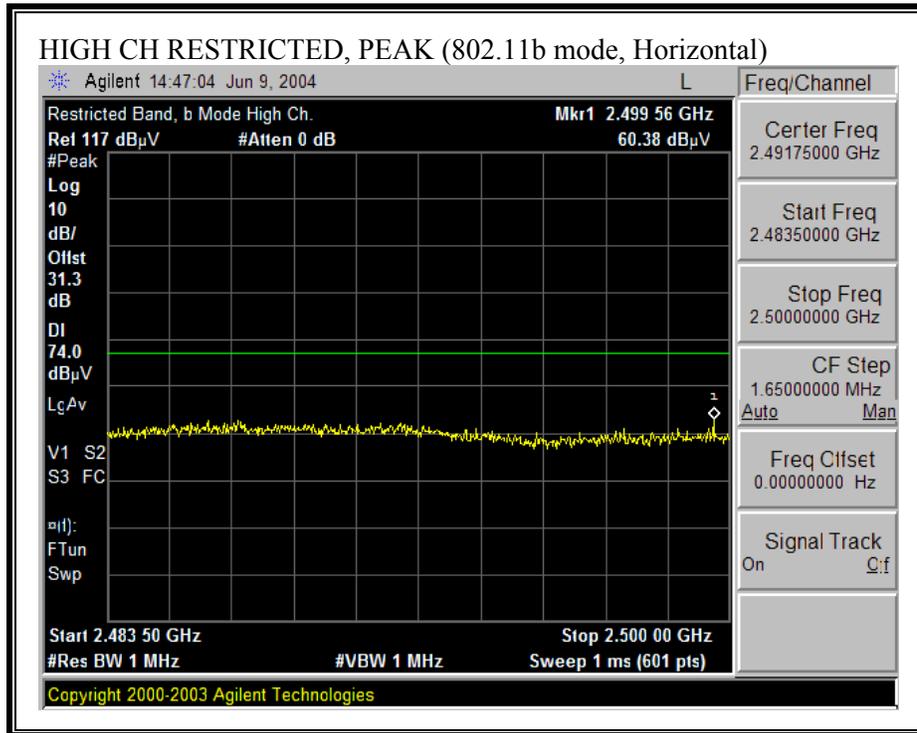

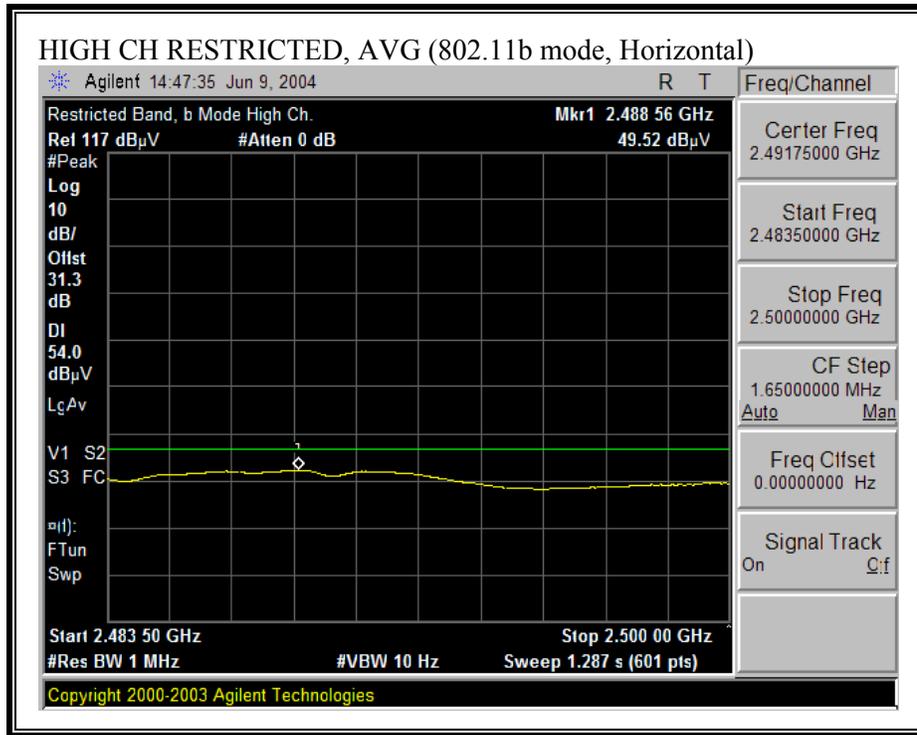

**RESTRICTED BANDEGE (b MODE, HIGH CHANNEL, VERTICAL)**

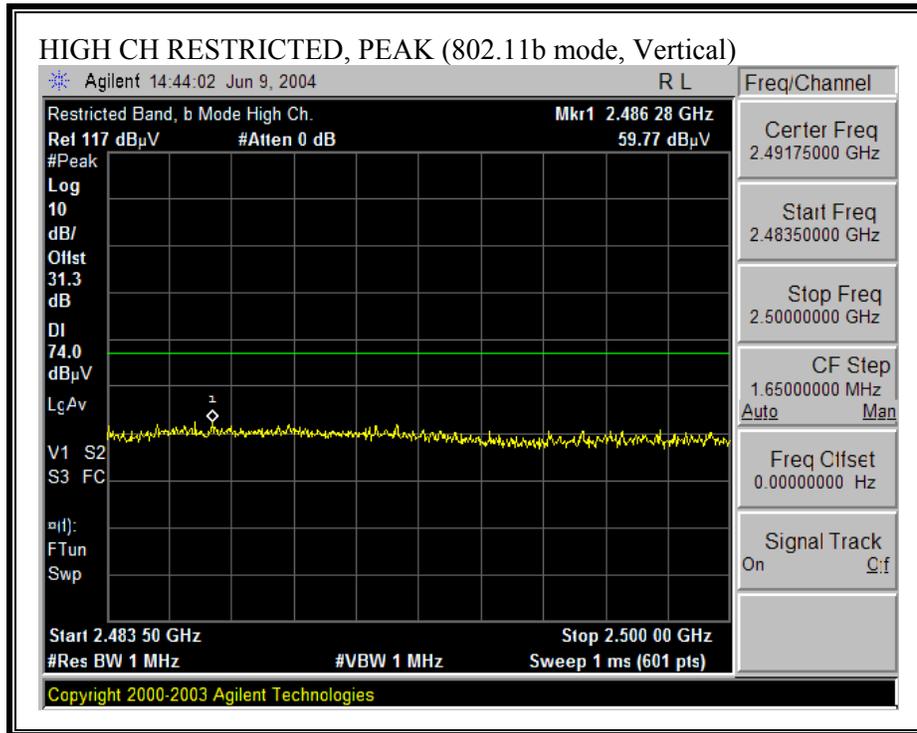

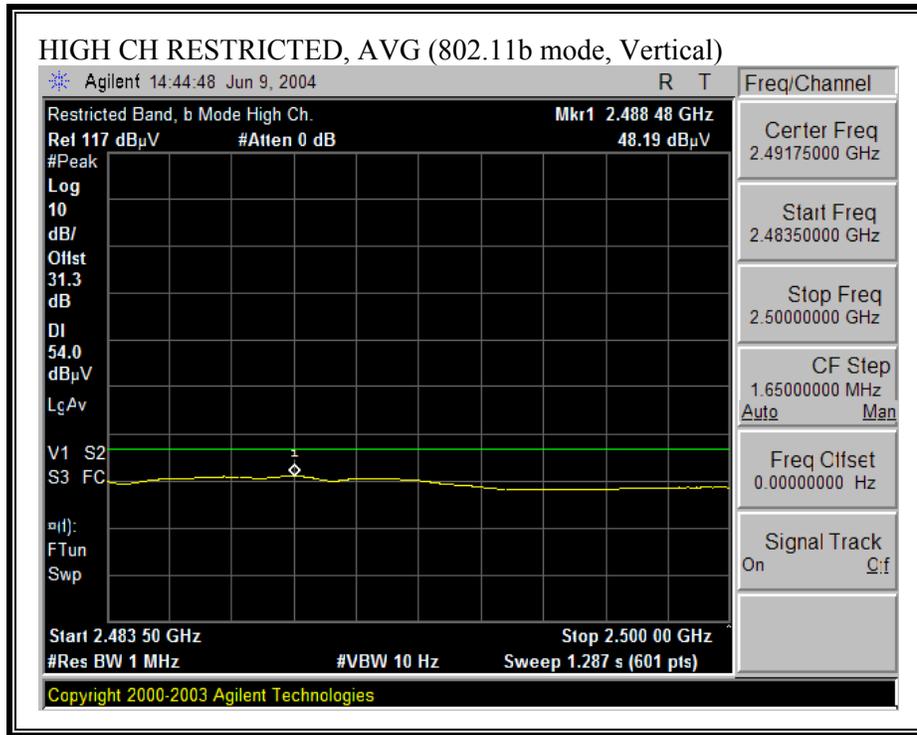

**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**

06/24/04 **High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN  
 Project #: 04U2790-1  
 Company: INTEL  
 EUT Descr.: 802.11abg DELL LAPTOP\_PRECISION M60\_WNC ON BASE  
 EUT M/N: WM3A2195ABG INTEL CARD  
 Test Target: FCC15.247  
 Mode Oper: TX\_11b\_LOW / MID / HI CHANNELS\_HARMONIC SPUR

**Test Equipment:**

EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifer 1-26GHz T87 Miteq 924342	Pre-amplifer 26-40GHz	Horn > 18GHz
---	--	--	-----------------------	--------------

HI Frequency Cables  
 (2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Limit: FCC 15.205

**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth


**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth


f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>LOW CH 2.412GHz</b>															
4.824	9.8	38.0	36.7	33.4	2.9	-44.7	0.0	1.0	30.5	29.2	74.0	54.0	-43.5	-24.8	V
4.824	9.8	48.9	38.8	33.4	2.9	-44.7	0.0	1.0	41.4	31.3	74.0	54.0	-32.6	-22.7	H
<b>MID CH 2.437GHz</b>															
4.874	9.8	46.2	39.1	33.4	2.9	-44.7	0.0	1.0	38.7	31.6	74.0	54.0	-35.3	-22.4	V
7.311	9.8	43.0	31.5	35.8	3.8	-44.5	0.0	1.0	39.1	27.6	74.0	54.0	-34.9	-26.4	V
4.874	9.8	48.6	42.3	33.4	2.9	-44.7	0.0	1.0	41.1	34.8	74.0	54.0	-32.9	-19.2	H
7.311	9.8	43.7	31.5	35.8	3.8	-44.5	0.0	1.0	39.8	27.6	74.0	54.0	-34.2	-26.4	H
<b>HI CH 2.462GHz</b>															
4.924	9.8	45.0	38.5	33.5	2.9	-44.8	0.0	1.0	37.6	31.1	74.0	54.0	-36.4	-22.9	V
7.386	9.8	44.0	32.8	36.0	3.9	-44.5	0.0	1.0	40.3	29.1	74.0	54.0	-33.7	-24.9	V
4.924	9.8	50.0	44.5	33.5	2.9	-44.8	0.0	1.0	42.6	37.1	74.0	54.0	-31.4	-16.9	H
7.386	9.8	45.0	35.3	36.0	3.9	-44.5	0.0	1.0	41.3	31.6	74.0	54.0	-32.7	-22.4	H

NO OTHER RADIATED EMISSION WERE DETECTED UP TO 10TH HARMONIC


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

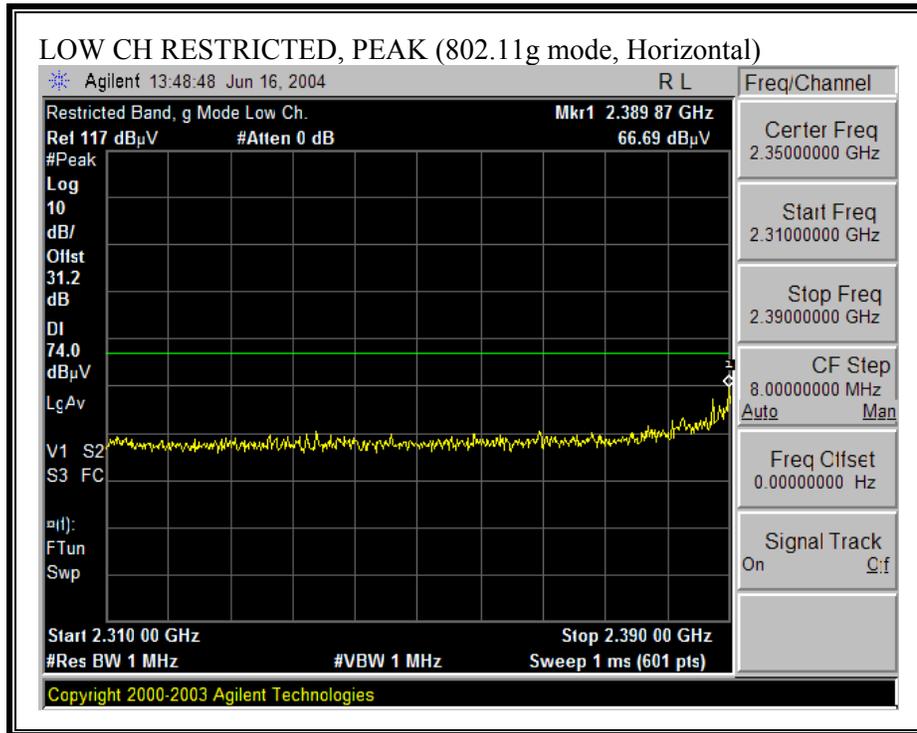

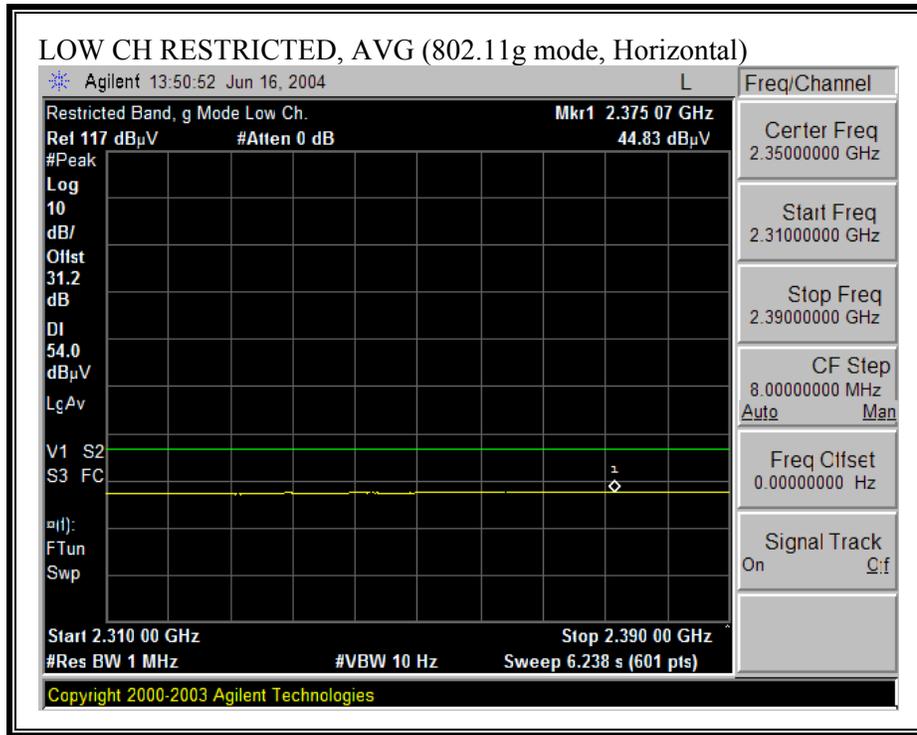



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

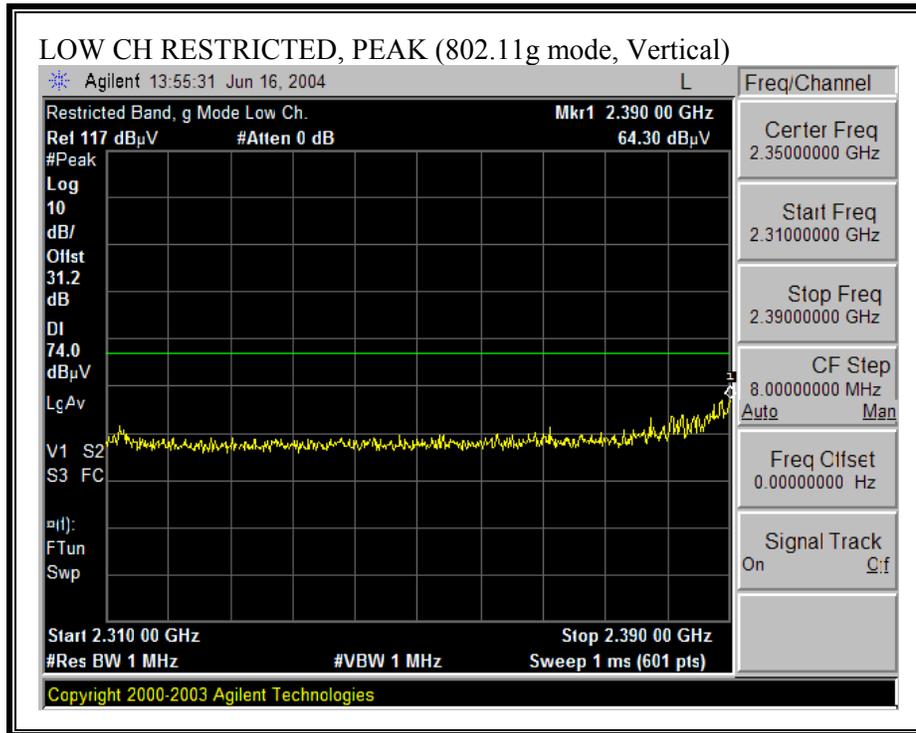

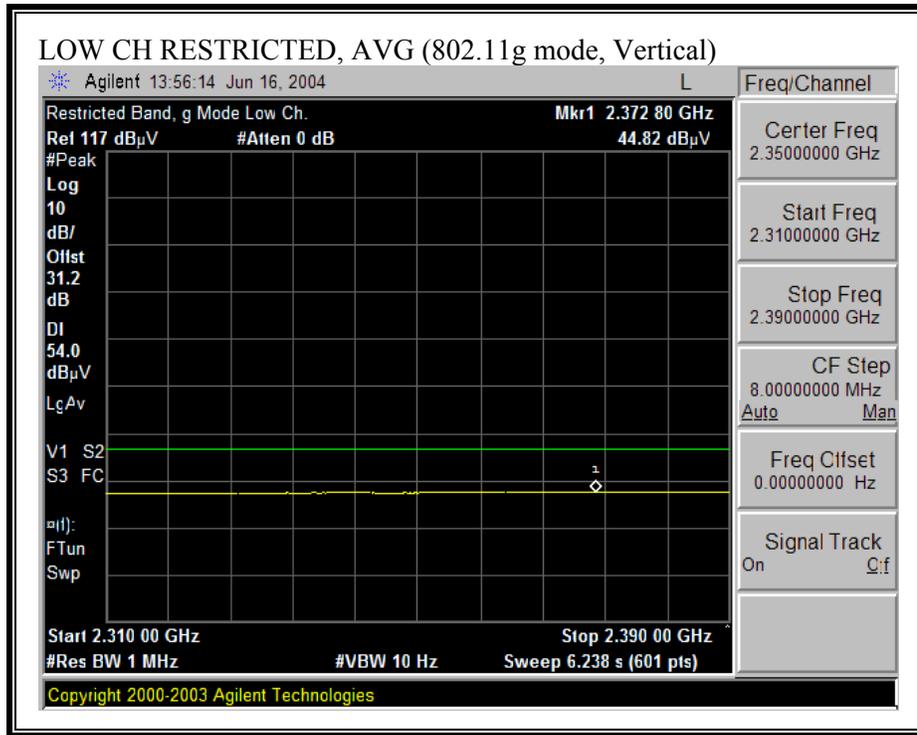



**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

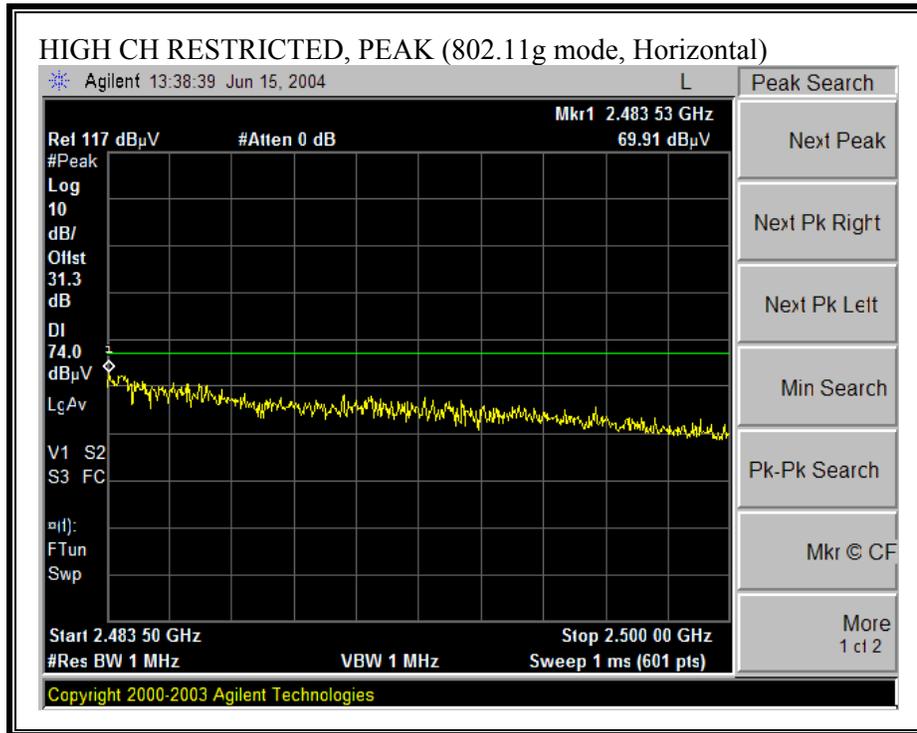

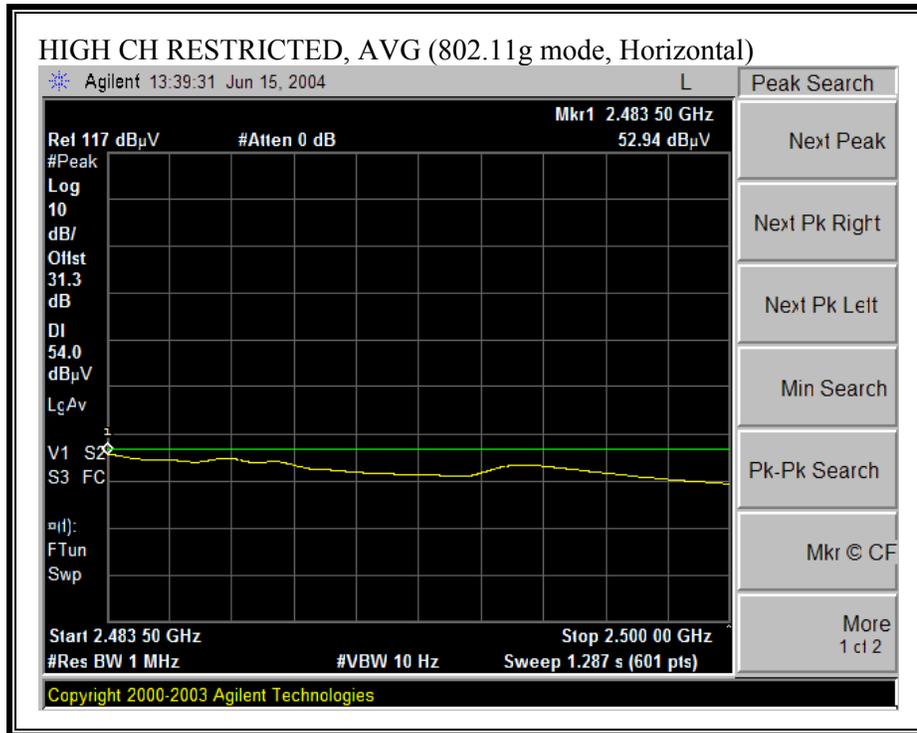

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

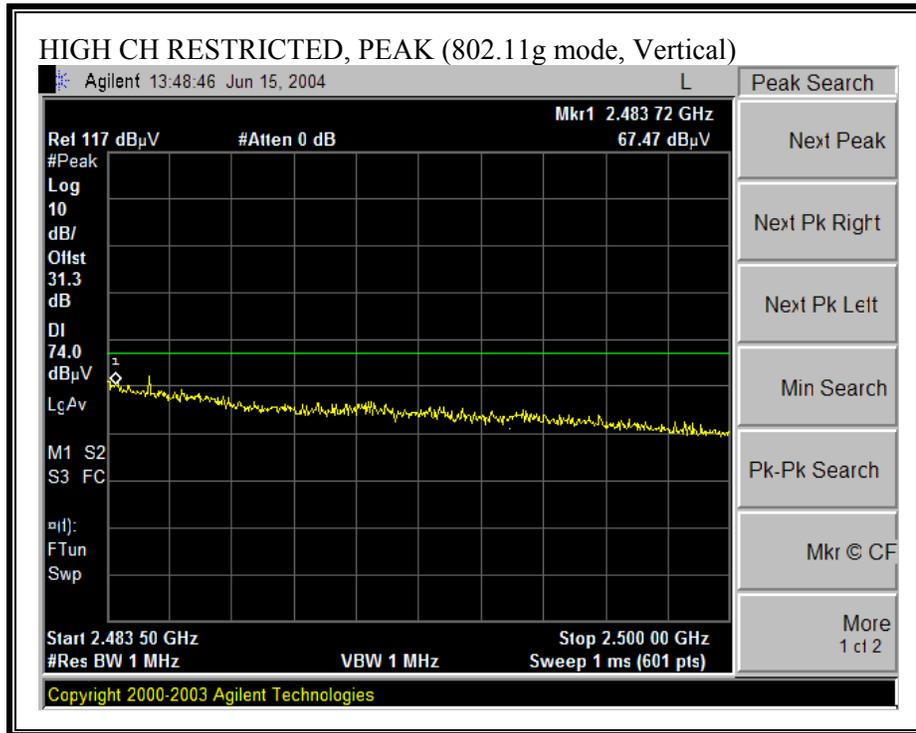

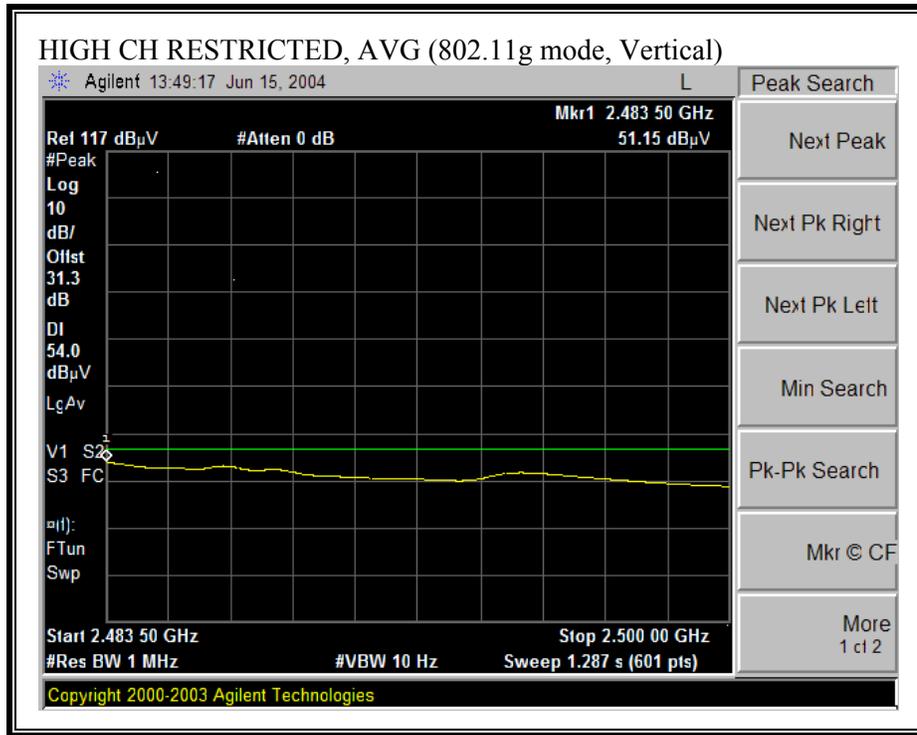

**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**

06/14/04 High Frequency Measurement  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN  
 Project #: 04U2790-1  
 Company: INTEL  
 EUT Descrip.: 802.11abg\_INSPIRON M60\_WNC ANTENNA ON BASE  
 EUT M/N: WM3A2195ABG INTEL CARD  
 Test Target: FCC15.247  
 Mode Oper: TX\_11g\_LOW / MID / HI CHANNELS\_HARMONIC SPUR

**Test Equipment:**

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifer 1-26GHz T87 Miteq 924342	Pre-amplifer 26-40GHz	Horn > 18GHz
---	--	--	-----------------------	--------------

Hi Frequency Cables  
 (2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Limit  
 FCC 15.205

**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth

**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>LOW CH 2.412GHz</b>															
4.824	9.8	47.2	33.9	33.1	2.9	-44.7	0.0	1.0	39.4	26.1	74.0	54.0	-34.6	-27.9	V
4.824	9.8	46.5	33.8	33.1	2.9	-44.7	0.0	1.0	38.8	26.1	74.0	54.0	-35.2	-27.9	H
<b>MID CH 2.437GHz</b>															
4.874	9.8	46.3	34.5	33.1	2.9	-44.7	0.0	1.0	38.6	26.8	74.0	54.0	-35.4	-27.2	V
7.311	9.8	45.4	33.2	36.2	3.8	-44.5	0.0	1.0	41.9	29.7	74.0	54.0	-32.1	-24.3	V
4.874	9.8	46.8	34.8	33.1	2.9	-44.7	0.0	1.0	39.1	27.1	74.0	54.0	-34.9	-26.9	H
7.311	9.8	45.7	34.3	36.2	3.8	-44.5	0.0	1.0	42.2	30.8	74.0	54.0	-31.8	-23.2	H
<b>HI CH 2.462GHz</b>															
4.924	9.8	46.0	35.0	33.2	2.9	-44.8	0.0	1.0	38.3	27.3	74.0	54.0	-35.7	-26.7	V
7.386	9.8	45.0	34.6	36.3	3.9	-44.5	0.0	1.0	41.7	31.3	74.0	54.0	-32.3	-22.7	V
4.924	9.8	52.5	39.0	33.2	2.9	-44.8	0.0	1.0	44.8	31.3	74.0	54.0	-29.2	-22.7	H
7.386	9.8	47.8	36.6	36.3	3.9	-44.5	0.0	1.0	44.5	33.3	74.0	54.0	-29.5	-20.7	H

NO OTHER RADIATED EMISSION WERE DETECTED UP TO 10TH HARMONIC

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

**HARMONICS AND SPURIOUS EMISSIONS (a MODE)**

06/25/04 High Frequency Measurement  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN  
 Project #: 04U2790-1  
 Company: INTEL  
 EUT Descrip.: 802.11abg DELL LAPTOP\_PRECISION M60  
 EUT M/N: WM3A2195ABG INTEL CARD  
 Test Target: FCC15.247  
 Mode Oper: TX\_11a 5.745-5.825GHz\_LOW / MID / HI CHANNELS\_HARMONIC SPUR

**Test Equipment:**

EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifer 1-26GHz T87 Miteq 924342	Pre-amplifer 26-40GHz	Horn > 18GHz
---	--	--	-----------------------	--------------

Hi Frequency Cables  
 (2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Limit  
 FCC 15.205

**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth

**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth


f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>LOW CH 5.745GHz</b>															
11.490	9.8	42.0	30.3	38.8	6.1	-41.5	0.0	1.0	46.3	34.6	74.0	54.0	-27.7	-19.4	V
11.490	9.8	45.3	31.9	38.8	6.1	-41.5	0.0	1.0	49.6	36.2	74.0	54.0	-24.4	-17.8	H
<b>MID CH 5.785GHz</b>															
11.570	9.8	42.0	30.3	38.8	6.1	-41.6	0.0	1.0	46.3	34.6	74.0	54.0	-27.7	-19.4	V
11.570	9.8	43.8	31.7	38.8	6.1	-41.6	0.0	1.0	48.1	36.0	74.0	54.0	-25.9	-18.0	H
<b>HI CH 5.825GHz</b>															
11.650	9.8	43.0	30.7	38.9	6.1	-41.7	0.0	1.0	47.3	35.0	74.0	54.0	-26.7	-19.0	V
11.650	9.8	44.0	32.8	38.9	6.1	-41.7	0.0	1.0	48.3	37.1	74.0	54.0	-25.7	-16.9	H


**NO OTHER RADIATED EMISSION WERE DETECTED UP TO 10TH HARMONIC**

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


### 7.8.3. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, PRECISION M60 LAPTOP WITH HITACHI ANTENNA SET


#### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

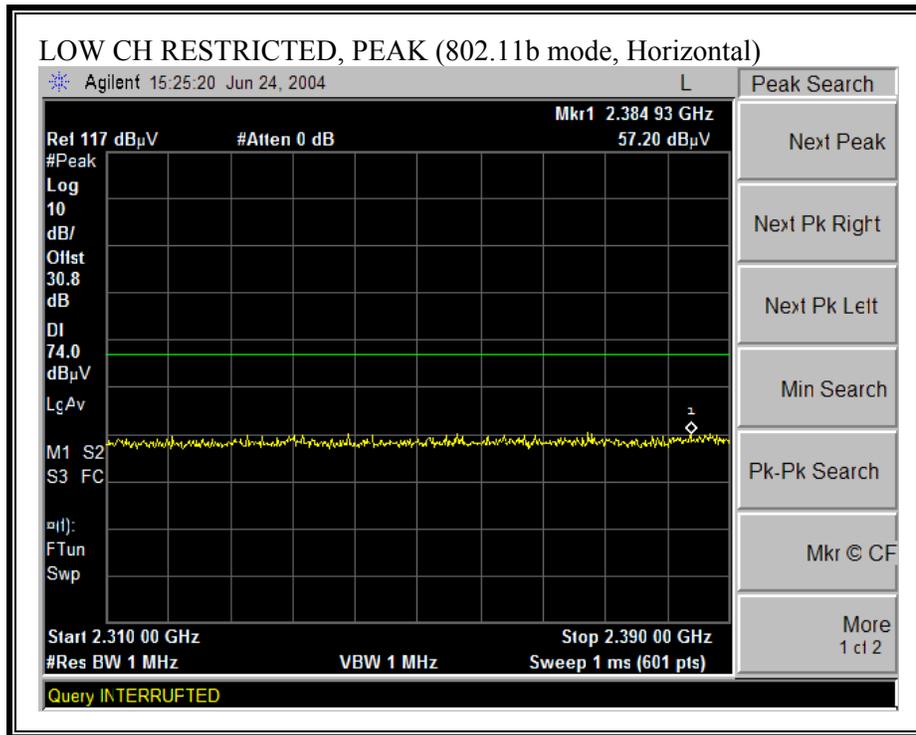

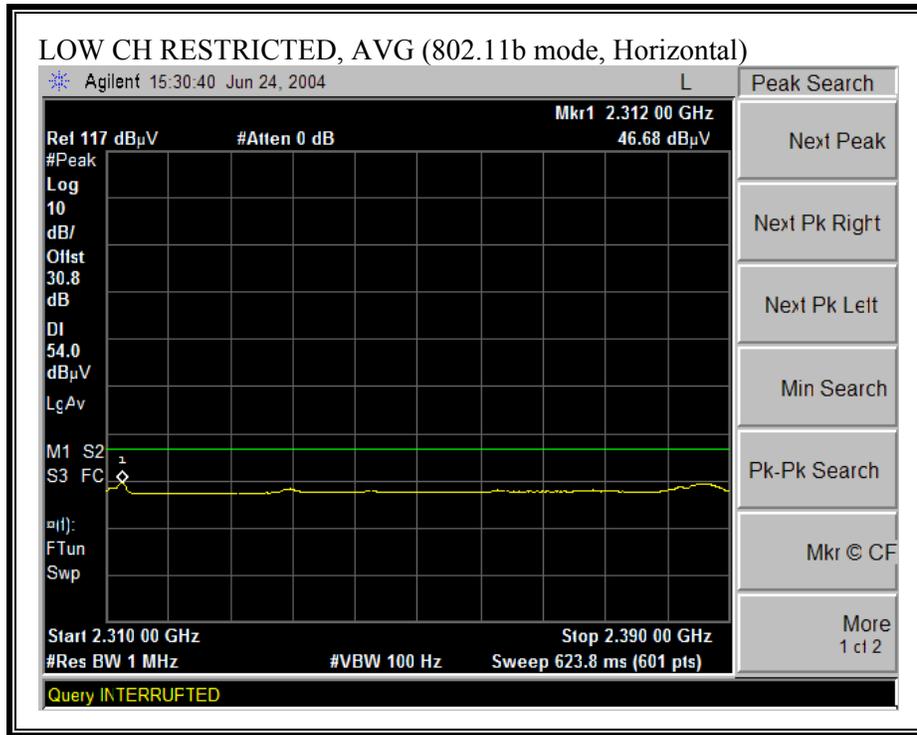



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

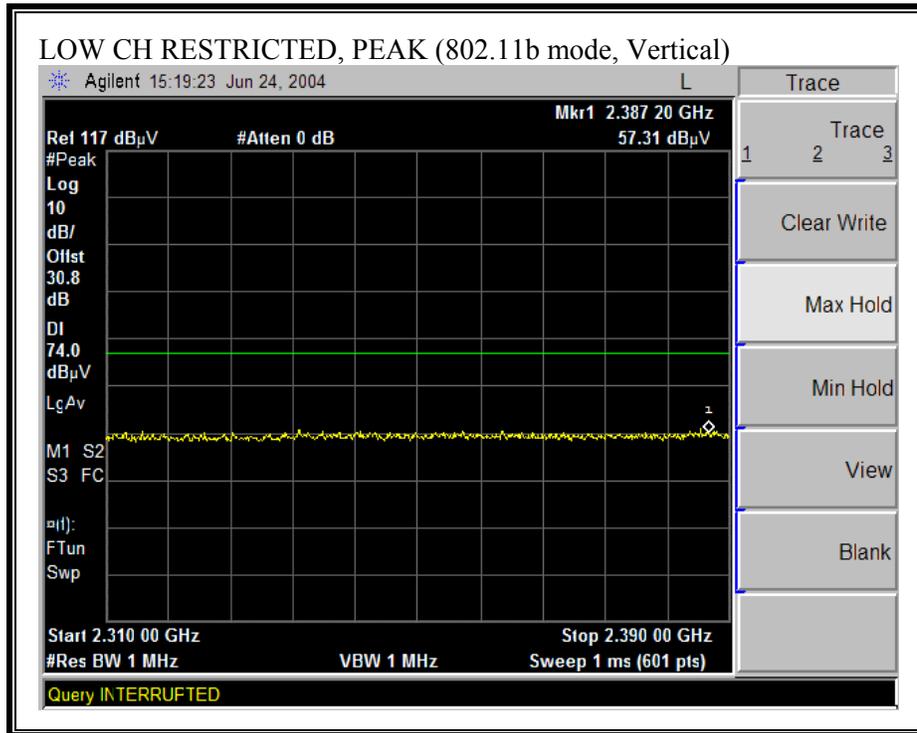

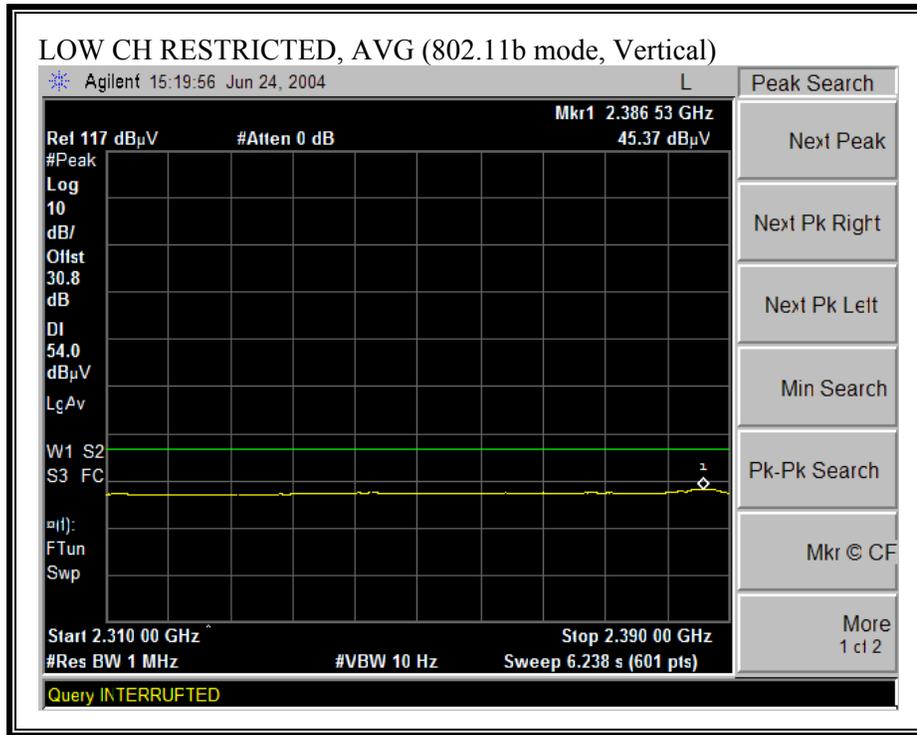



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

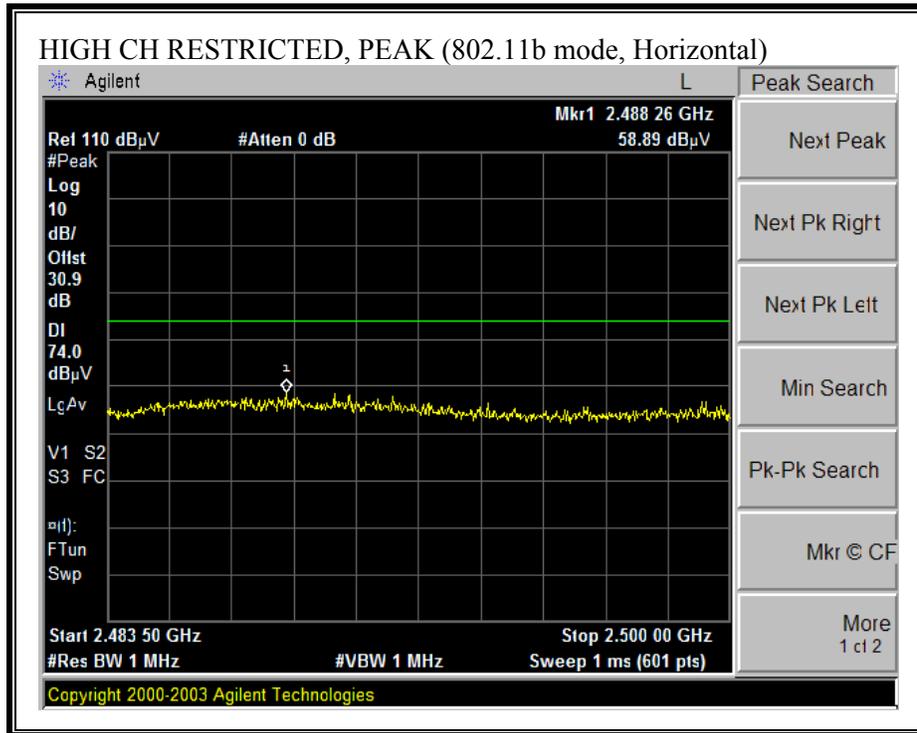

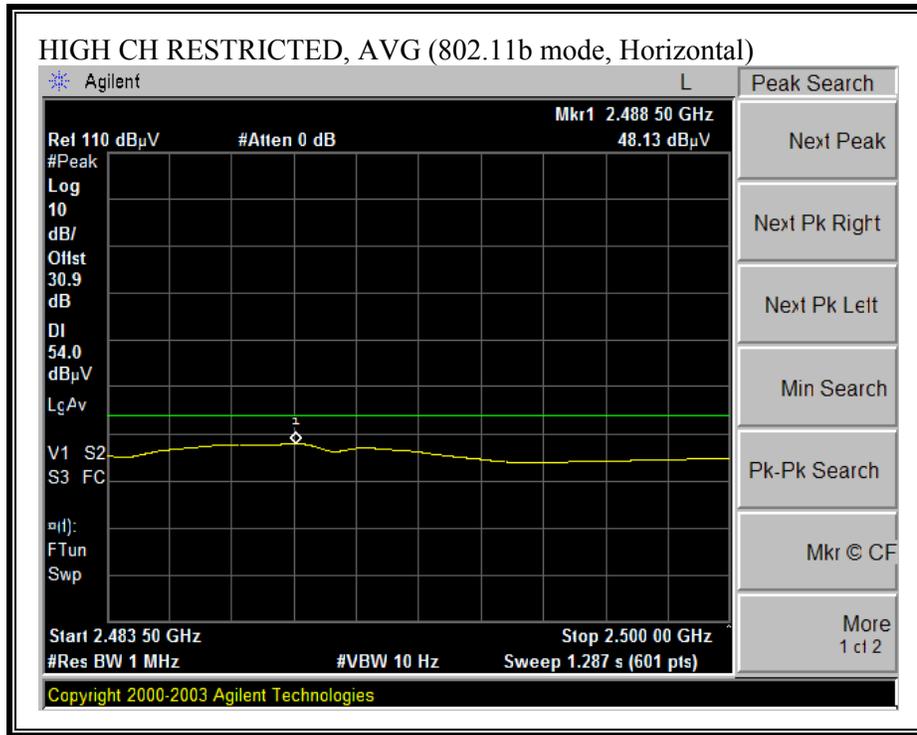

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

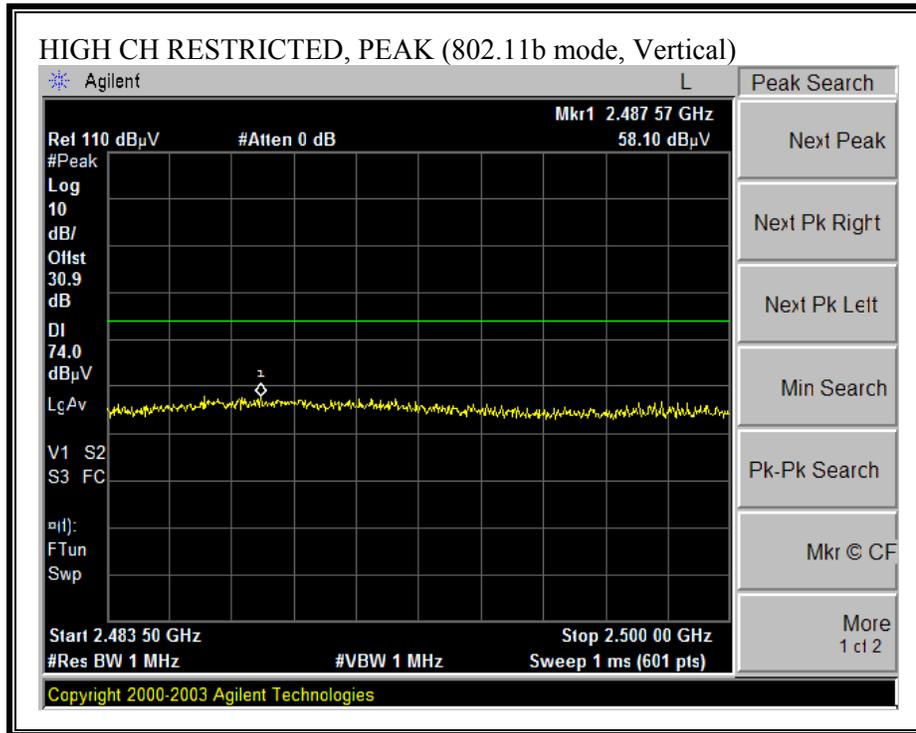

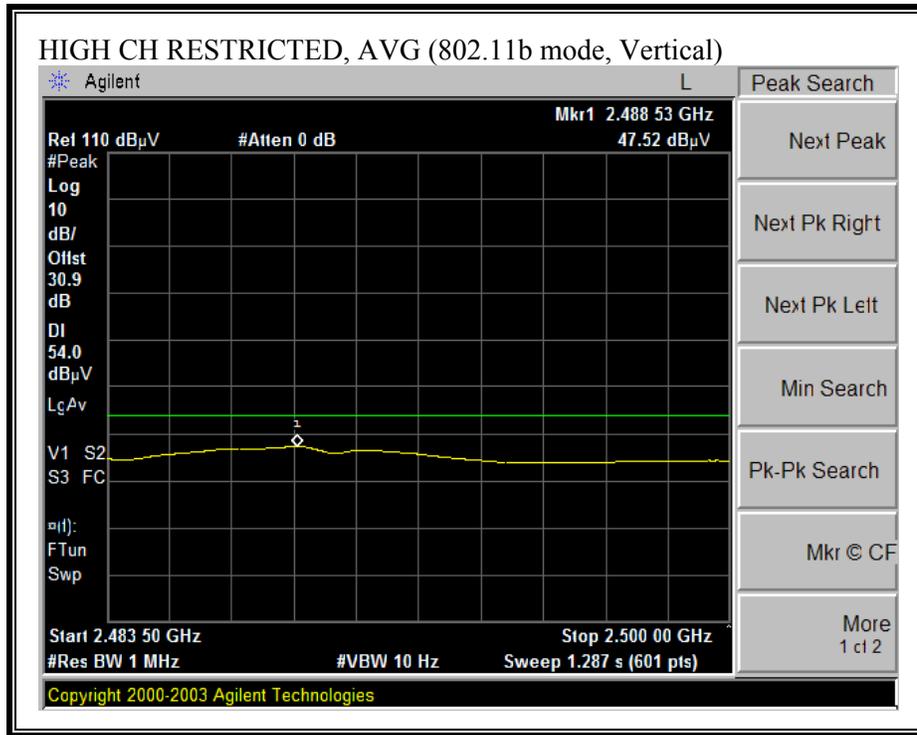

**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**

06/22/04 **High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Test Engr:** David Garcia  
**Project #:** 04U2790  
**Company:** Intel  
**EUT Descrip.:** 802.11 a/b/g WLAN Mini PCI card  
**EUT M/N:** WM3B2195ABG  
**Test Target:** FCC 15.247  
**Mode Oper:** 11b mode, Hitachi antenna at base, m60 platform

**Test Equipment:**

EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifer 1-26GHz T63 Miteq 646456	Pre-amplifer 26-40GHz	Horn > 18GHz
---	--	--	-----------------------	--------------

Hi Frequency Cables:  (2 ft)  (2.0 ft)  (3 ft)  (12 ft)

Limit: FCC 15.205


**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth


**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>11b 2412 Channel</b>															
4.824	9.8	46.9	41.3	33.4	2.9	-35.3	0.0	1.0	48.8	43.2	74.0	54.0	-25.2	-10.8	V
4.824	9.8	43.8	34.7	33.4	2.9	-35.3	0.0	1.0	45.7	36.6	74.0	54.0	-28.3	-17.4	H
<b>11b 2437 Channel</b>															
4.874	9.8	53.0	48.1	33.4	2.9	-35.3	0.0	1.0	55.0	50.1	74.0	54.0	-19.0	-3.9	V
7.311	9.8	46.2	36.0	35.8	3.7	-34.6	0.0	1.0	52.1	41.9	74.0	54.0	-21.9	-12.1	V
4.874	9.8	47.8	43.6	33.4	2.9	-35.3	0.0	1.0	49.8	45.6	74.0	54.0	-24.2	-8.4	H
7.311	9.8	46.8	38.9	35.8	3.7	-34.6	0.0	1.0	52.7	44.8	74.0	54.0	-21.3	-9.2	H
<b>11b 2462 Channel</b>															
4.924	9.8	46.9	39.7	33.5	2.9	-35.3	0.0	1.0	49.0	41.8	74.0	54.0	-25.0	-12.2	V
7.386	9.8	45.9	34.2	36.0	3.7	-34.5	0.0	1.0	52.0	40.3	74.0	54.0	-22.0	-13.7	V
4.924	9.8	44.6	35.6	33.5	2.9	-35.3	0.0	1.0	46.7	37.7	74.0	54.0	-27.3	-16.3	H
7.386	9.8	45.3	36.9	36.0	3.7	-34.5	0.0	1.0	51.4	43.0	74.0	54.0	-22.6	-11.0	H


f Measurement Frequency      Amp Preamp Gain      Avg Lim Average Field Strength Limit  
 Dist Distance to Antenna      D Corr Distance Correct to 3 meters      Pk Lim Peak Field Strength Limit  
 Read Analyzer Reading      Avg Average Field Strength @ 3 m      Avg Mar Margin vs. Average Limit  
 AF Antenna Factor      Peak Calculated Peak Field Strength      Pk Mar Margin vs. Peak Limit  
 CL Cable Loss      HPF High Pass Filter


**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

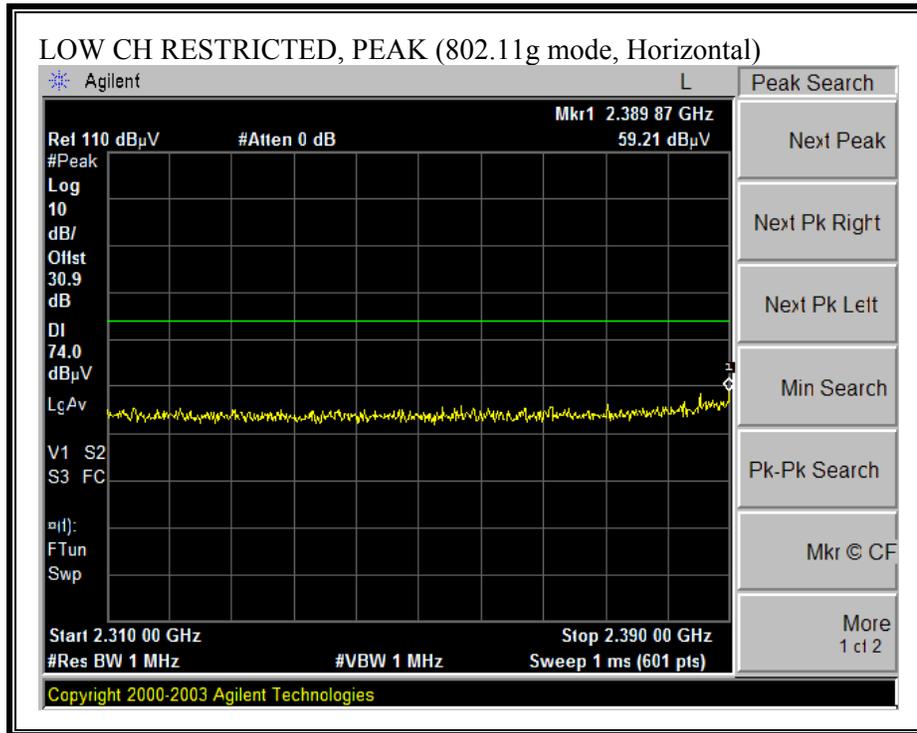

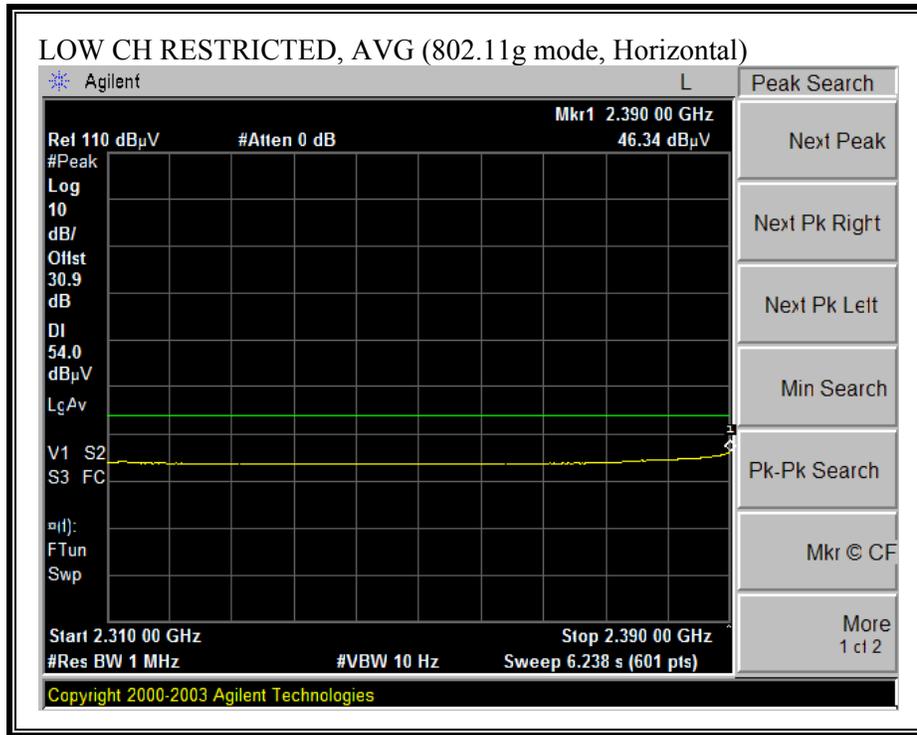



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

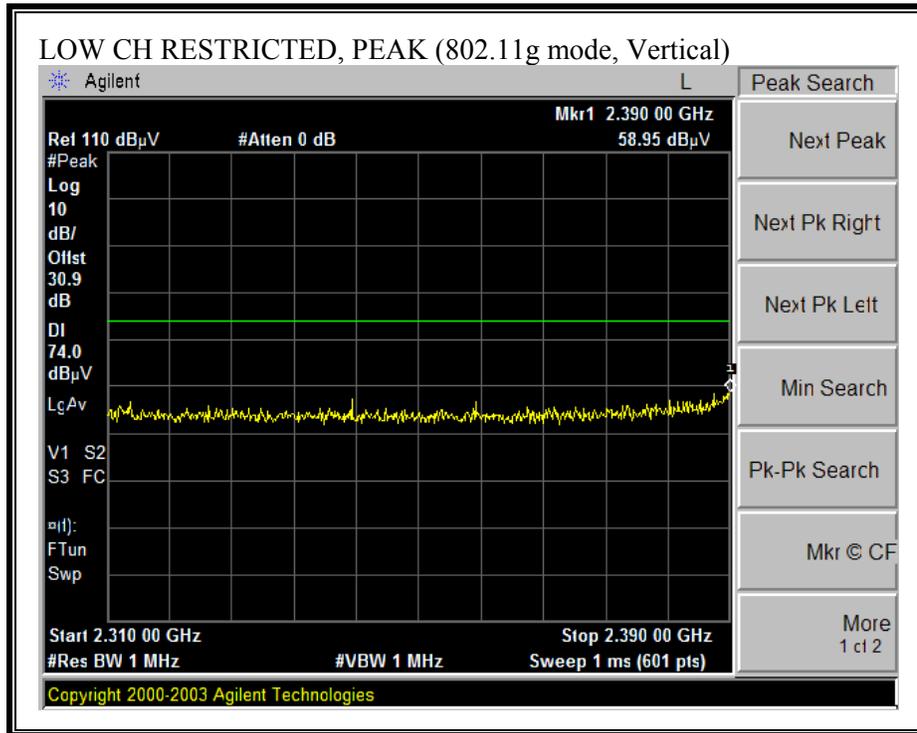

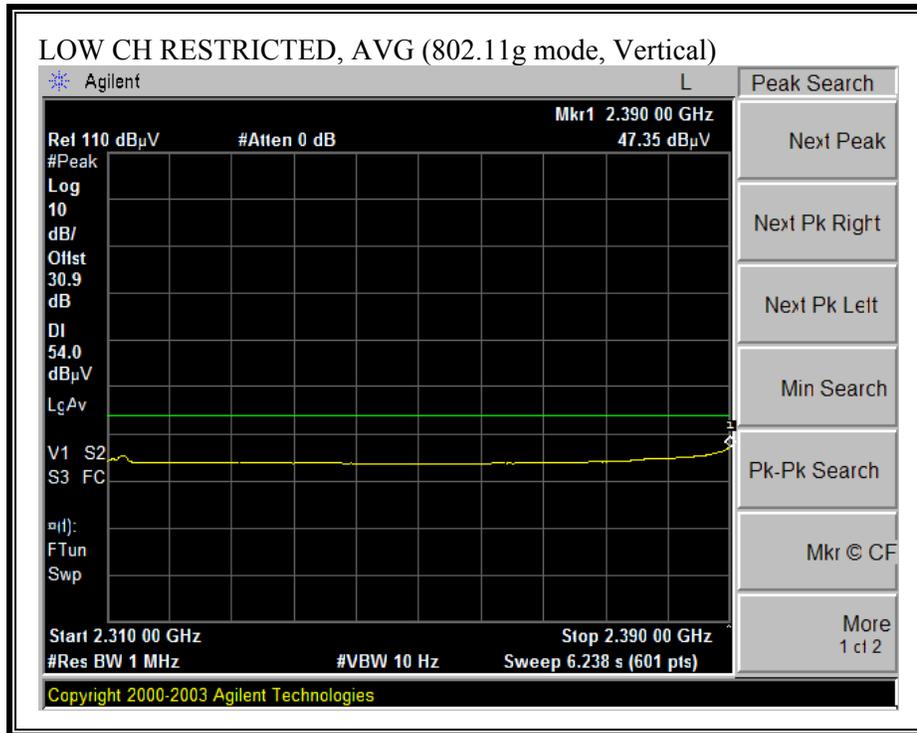



**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

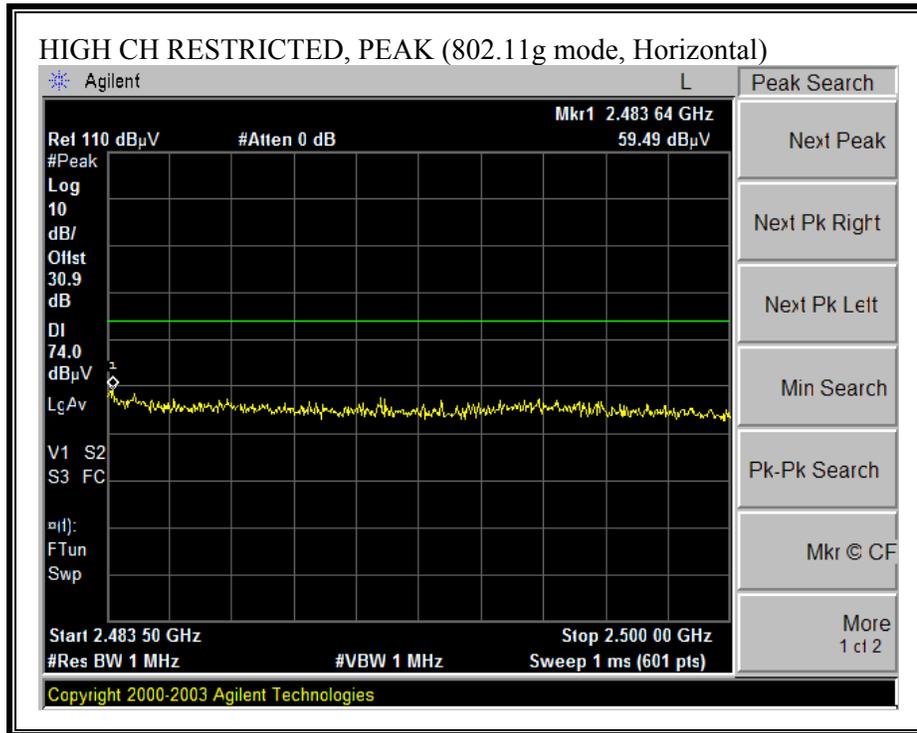

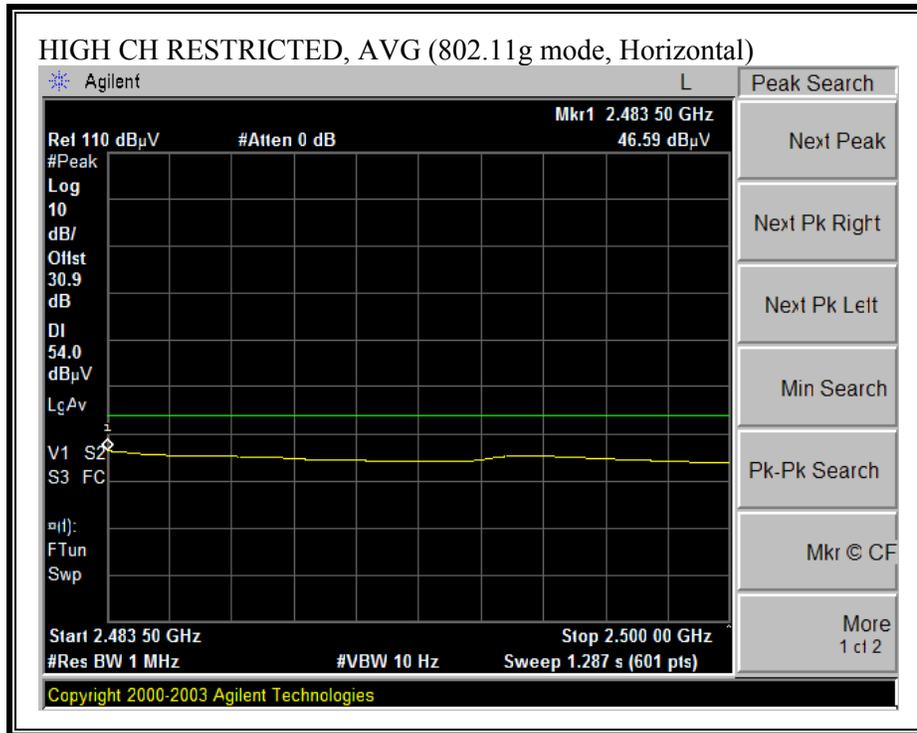

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

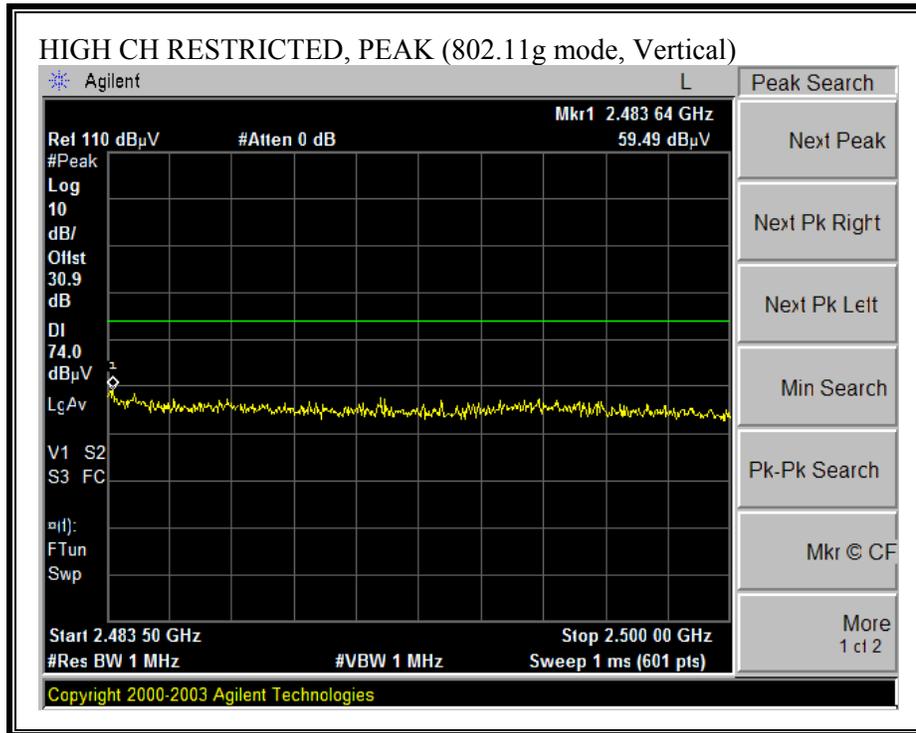

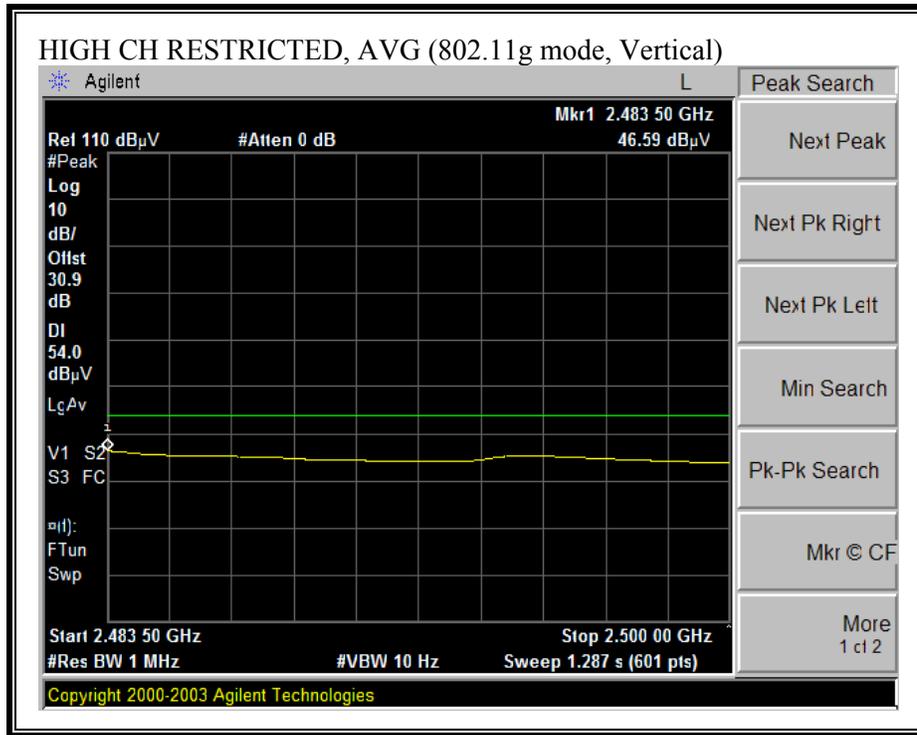

**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**

06/22/04 **High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Test Engr:** David Garcia  
**Project #:** 04U2790  
**Company:** Intel  
**EUT Descrip.:** 802.11 a/b/g WLAN Mini PCI card  
**EUT M/N:** WM3B2195ABG  
**Test Target:** FCC 15.247  
**Mode Oper:** 11g mode, Hitachi antenna at base, m60 platform

**Test Equipment:**

EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifier 1-26GHz T63 Miteq 646456	Pre-amplifier 26-40GHz	Horn > 18GHz
---	--	---	------------------------	--------------

Hi Frequency Cables:  (2 ft)  (2.0 ft)  (3 ft)  (12 ft)

Limit: FCC 15.205

**Peak Measurements:** 1 MHz Resolution Bandwidth, 1MHz Video Bandwidth  
**Average Measurements:** 1 MHz Resolution Bandwidth, 10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>11g 2412 Channel</b>															
4.824	9.8	44.0	31.6	33.4	2.9	-35.3	0.0	1.0	45.9	33.5	74.0	54.0	-28.1	-20.5	V
4.824	9.8	43.8	32.0	33.4	2.9	-35.3	0.0	1.0	45.7	33.9	74.0	54.0	-28.3	-20.1	H
<b>11g 2437 Channel</b>															
4.874	9.8	44.5	33.2	33.4	2.9	-35.3	0.0	1.0	46.5	35.2	74.0	54.0	-27.5	-18.8	V
7.311	9.8	43.1	31.8	35.8	3.7	-34.6	0.0	1.0	49.0	37.7	74.0	54.0	-25.0	-16.3	V
4.874	9.8	43.9	32.9	33.4	2.9	-35.3	0.0	1.0	45.9	34.9	74.0	54.0	-28.1	-19.1	H
<b>11g 2462 Channel</b>															
4.924	9.8	43.2	31.7	33.5	2.9	-35.3	0.0	1.0	45.3	33.8	74.0	54.0	-28.7	-20.2	V
4.924	9.8	42.9	31.0	33.5	2.9	-35.3	0.0	1.0	45.0	33.1	74.0	54.0	-29.0	-20.9	H

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

**HARMONICS AND SPURIOUS EMISSIONS (a MODE)**

06/24/04 High Frequency Measurement  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN  
 Project #: 04U2790  
 Company: INTEL  
 EUT Descrip.: 802.11abg DELL LAPTOP\_ M60 (HITACH ON BASE)  
 EUT M/N: WM3A2195ABG INTEL CARD  
 Test Target: FCC15.247  
 Mode Oper: TX\_11a 5.745-5.825GHz\_LOW / MID / HI CHANNELS\_HARMONIC SPUR

**Test Equipment:**

EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifer 1-26GHz T87 Miteq 924342	Pre-amplifer 26-40GHz	Horn > 18GHz
---	--	--	-----------------------	--------------

Hi Frequency Cables  
 (2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Limit  
 FCC 15.205

**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth

**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth


f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>LOW CH 5.745GHz</b>															
11.490	9.8	48.5	34.8	38.8	6.1	-41.5	0.0	1.0	52.8	39.1	74.0	54.0	-21.2	-14.9	V
11.490	9.8	46.3	33.7	38.8	6.1	-41.5	0.0	1.0	50.6	38.0	74.0	54.0	-23.4	-16.0	H
<b>MID CH 5.785GHz</b>															
11.570	9.8	46.8	34.0	38.8	6.1	-41.6	0.0	1.0	51.1	38.3	74.0	54.0	-22.9	-15.7	V
11.570	9.8	44.4	32.3	38.8	6.1	-41.6	0.0	1.0	48.7	36.6	74.0	54.0	-25.3	-17.4	H
<b>HI CH 5.825GHz</b>															
11.650	9.8	46.5	33.7	38.9	6.1	-41.7	0.0	1.0	50.8	38.0	74.0	54.0	-23.2	-16.0	V
11.650	9.8	44.0	32.8	38.9	6.1	-41.7	0.0	1.0	48.3	37.1	74.0	54.0	-25.7	-16.9	H


**NO OTHER RADIATED EMISSION WERE DETECTED UP TO 10TH HARMONIC**

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


### 7.8.4. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, INSPIRON 510M LAPTOP WITH PHYCOMP ANTENNA SET


#### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

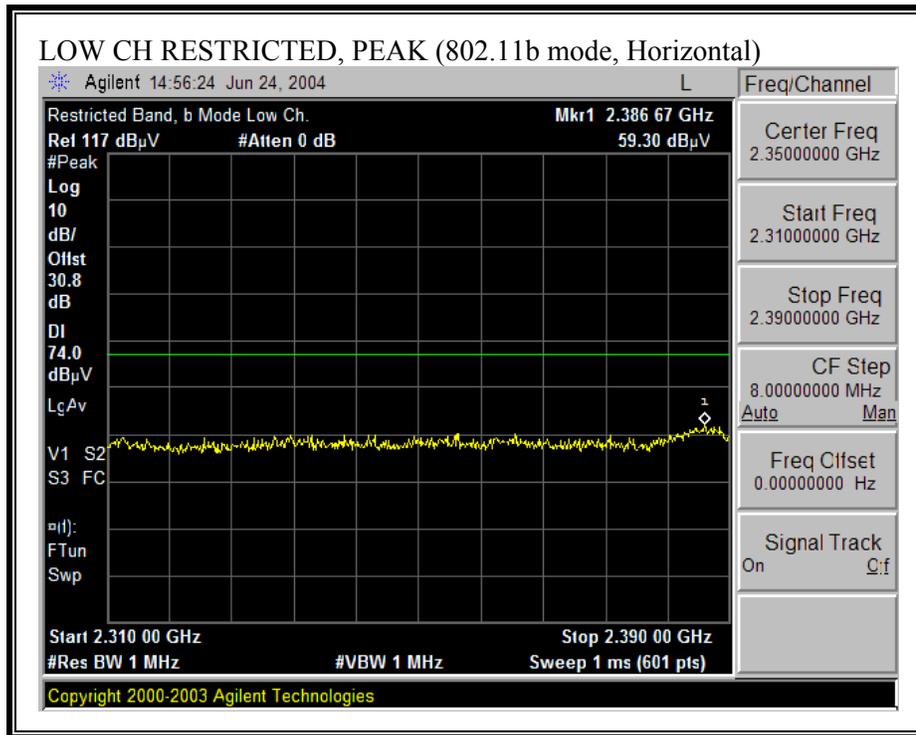

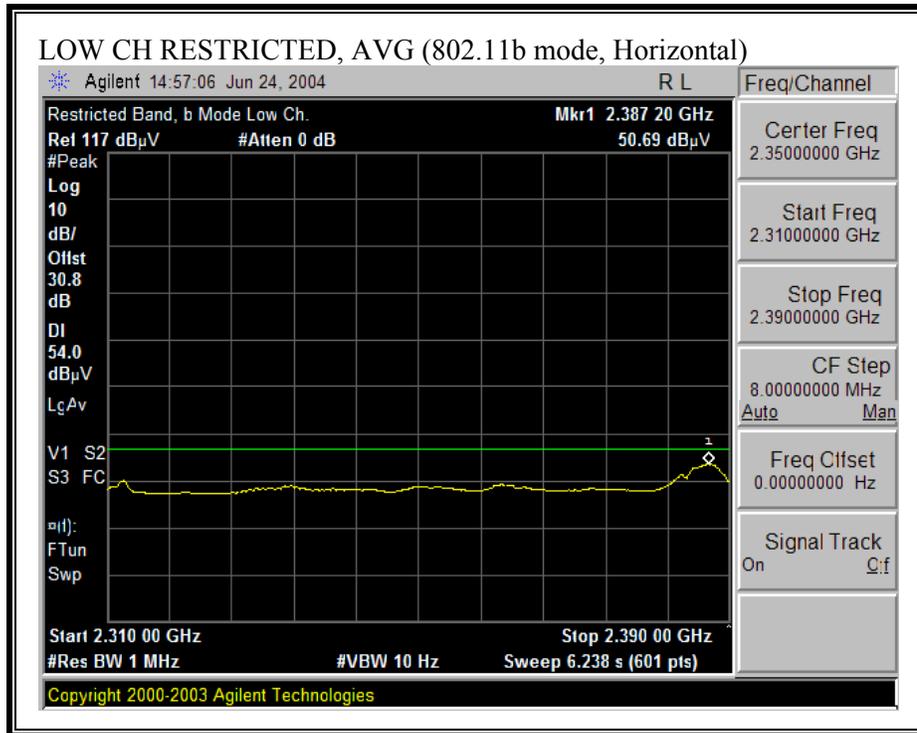



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

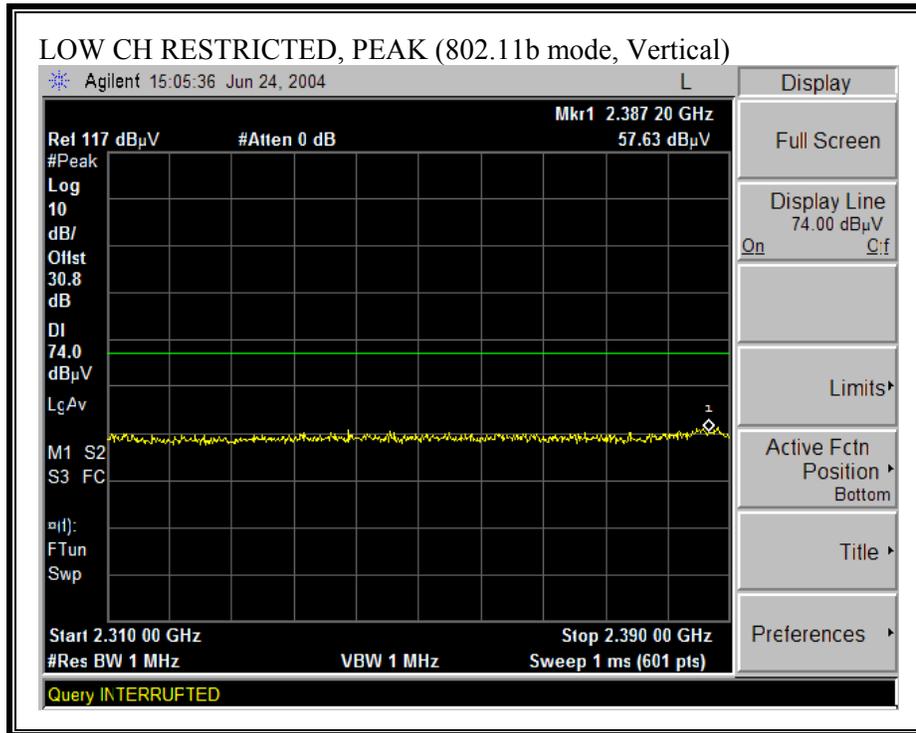

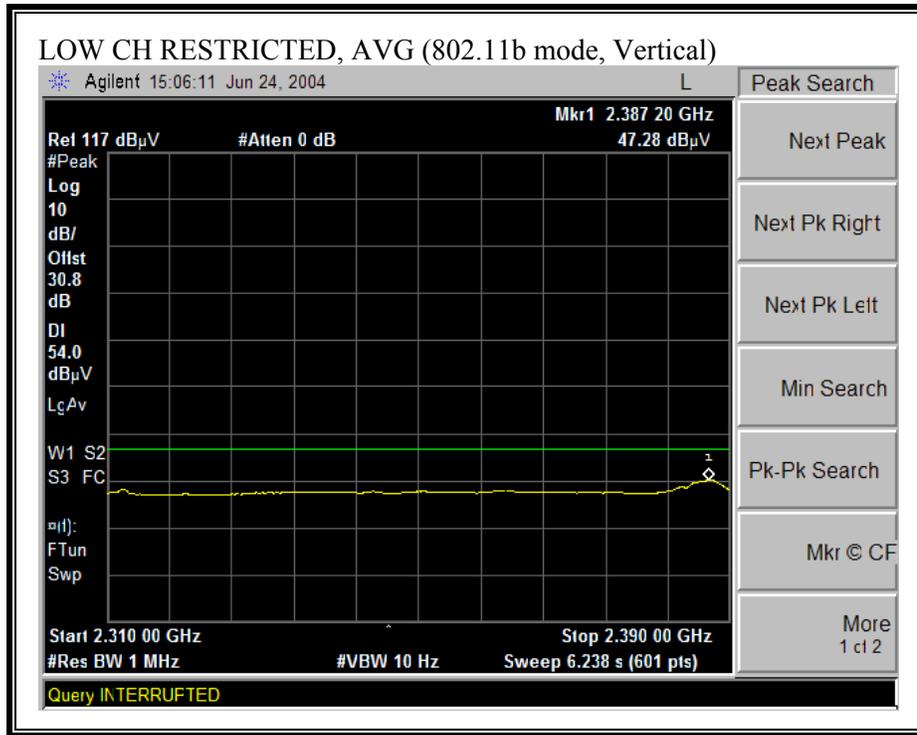



**RESTRICTED BANDEGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

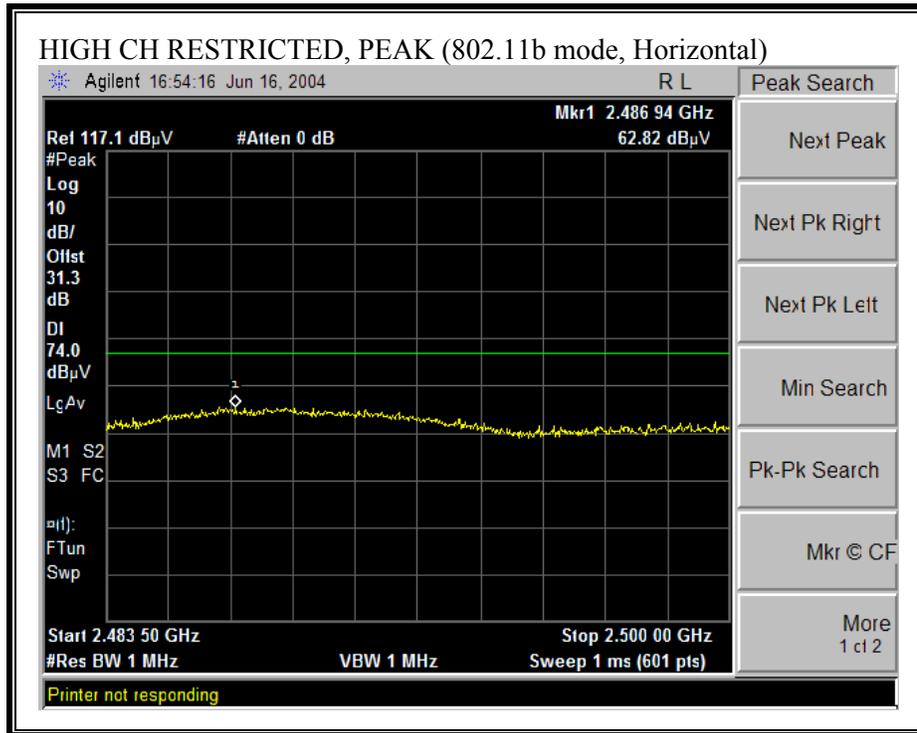

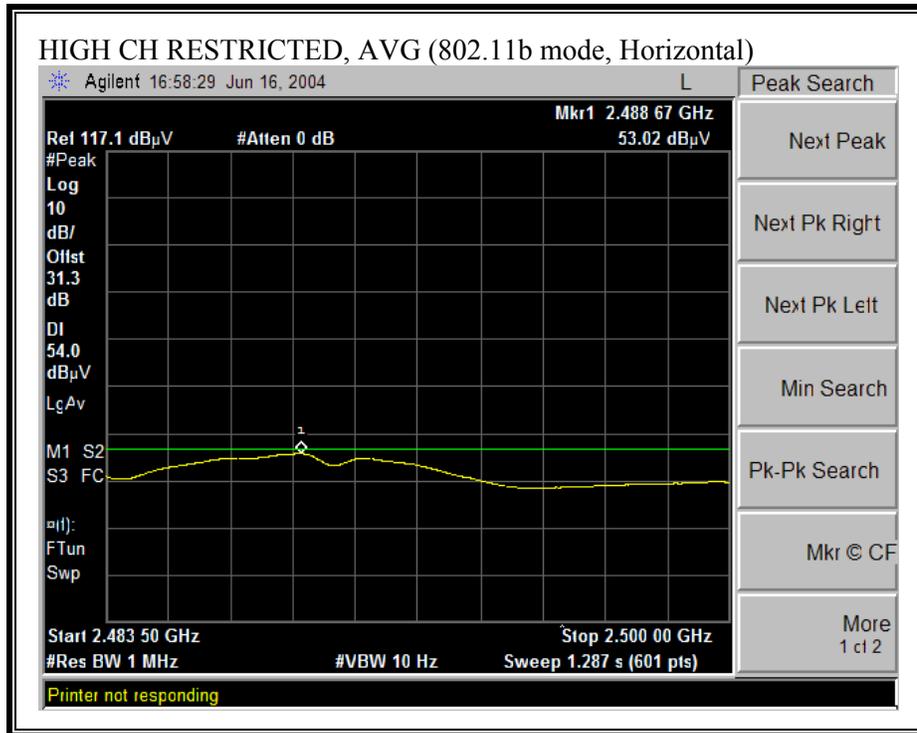

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

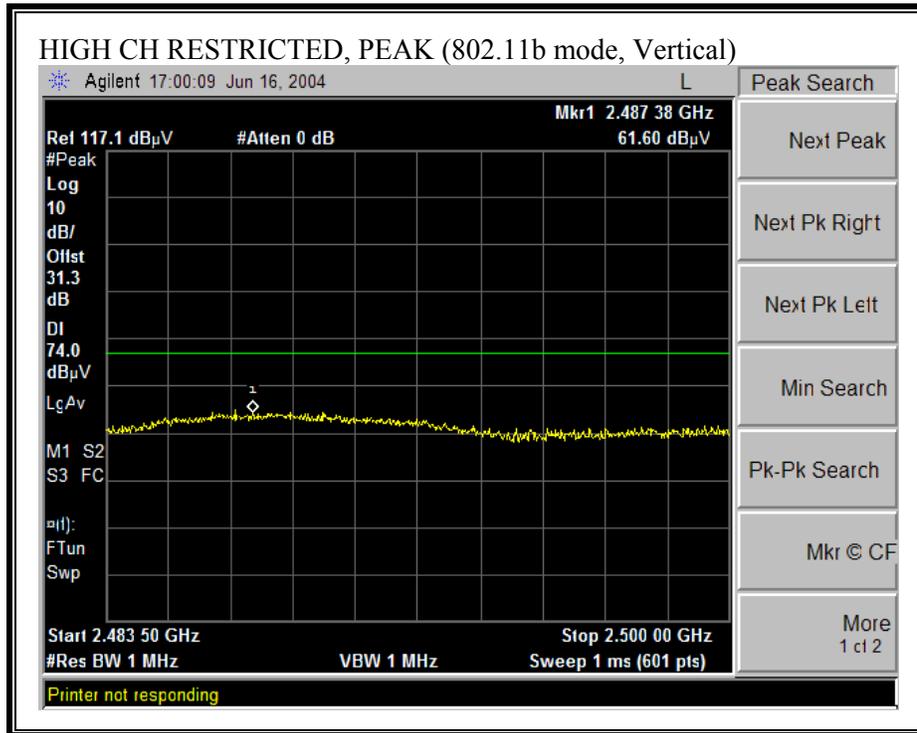

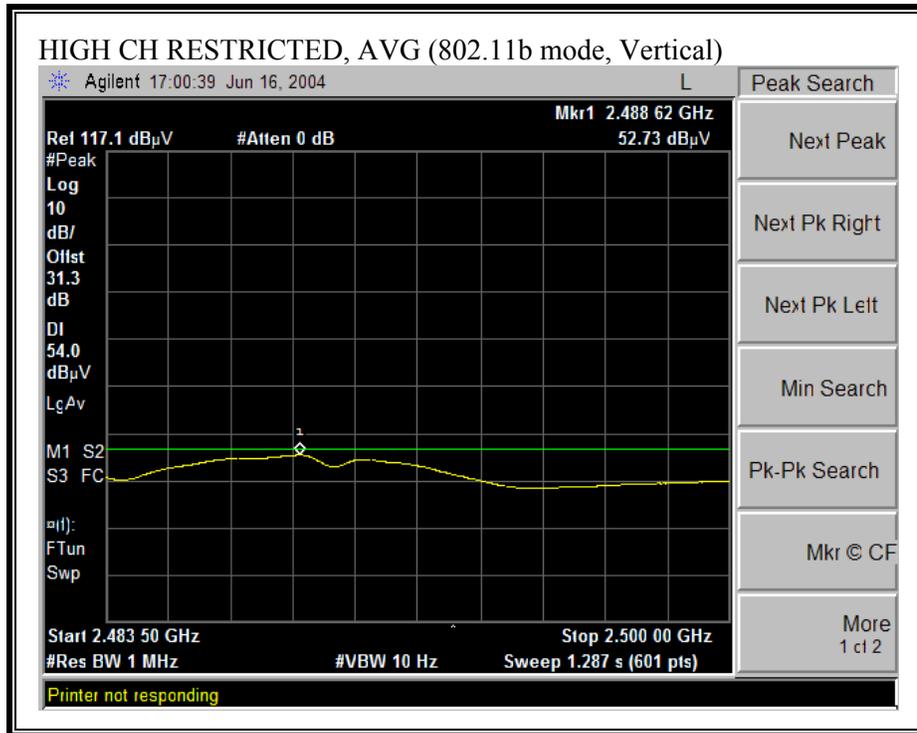

**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**

06/24/04 High Frequency Measurement  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN  
 Project #: 04U2790-3  
 Company: INTEL  
 EUT Descrip.: 802.11abg\_INSPIRON 510M\_PHY ON LCD  
 EUT M/N: WM3A2195ABG INTEL CARD  
 Test Target: FCC15.247  
 Mode Oper: TX\_11b\_LOW / MID / HI CHANNELS\_HARMONIC SPUR

**Test Equipment:**

EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifier 1-26GHz T87 Miteq 924342	Pre-amplifier 26-40GHz	Horn > 18GHz
---	--	---	------------------------	--------------

Hi Frequency Cables  
 (2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Limit  
 FCC 15.205

**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth


**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth


f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>LOW CH 2.412GHz</b>															
4.824	9.8	52.0	44.9	33.4	2.9	-44.7	0.0	1.0	44.5	37.4	74.0	54.0	-29.5	-16.6	V
4.824	9.8	53.7	45.3	33.4	2.9	-44.7	0.0	1.0	46.2	37.8	74.0	54.0	-27.8	-16.2	H
<b>MID CH 2.437GHz</b>															
4.874	9.8	49.4	41.7	33.4	2.9	-44.7	0.0	1.0	41.9	34.2	74.0	54.0	-32.1	-19.8	V
7.311	9.8	47.4	38.8	35.8	3.8	-44.5	0.0	1.0	43.5	34.9	74.0	54.0	-30.5	-19.1	V
4.874	9.8	48.2	40.2	33.4	2.9	-44.7	0.0	1.0	40.7	32.7	74.0	54.0	-33.3	-21.3	H
7.311	9.8	47.0	38.2	35.8	3.8	-44.5	0.0	1.0	43.1	34.3	74.0	54.0	-30.9	-19.7	H
<b>HI CH 2.462GHz</b>															
4.924	9.8	49.7	42.2	33.5	2.9	-44.8	0.0	1.0	42.3	34.8	74.0	54.0	-31.7	-19.2	V
7.386	9.8	47.2	38.4	36.0	3.9	-44.5	0.0	1.0	43.5	34.7	74.0	54.0	-30.5	-19.3	V
4.924	9.8	51.2	44.0	33.5	2.9	-44.8	0.0	1.0	43.8	36.6	74.0	54.0	-30.2	-17.4	H
7.386	9.8	48.2	40.6	36.0	3.9	-44.5	0.0	1.0	44.5	36.9	74.0	54.0	-29.5	-17.1	H

NO OTHER RADIATED EMISSION WERE DETECTED UP TO 10TH HARMONIC


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

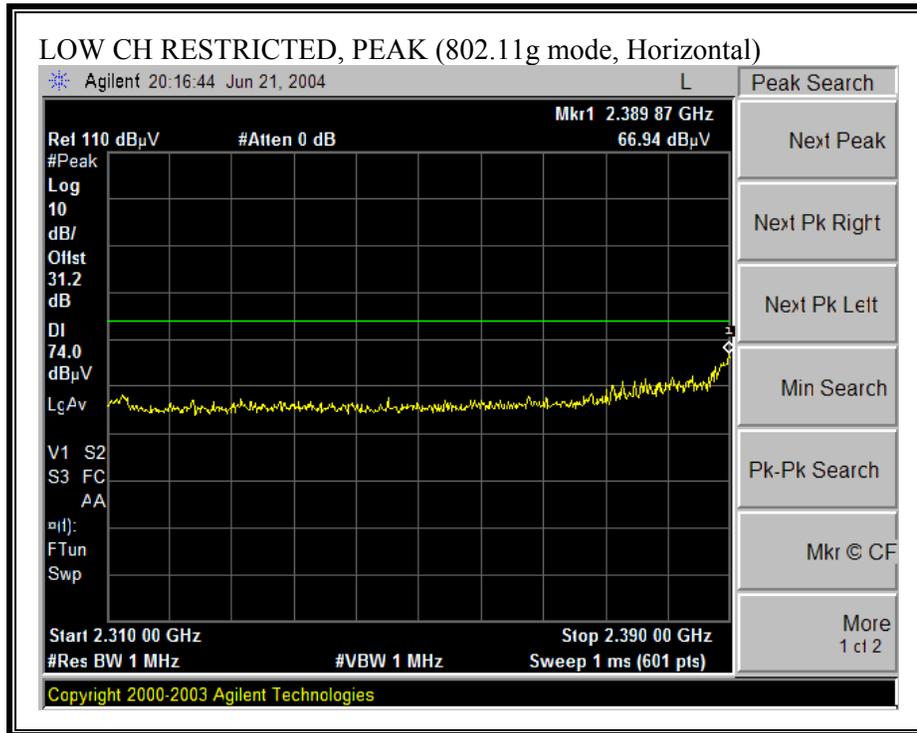

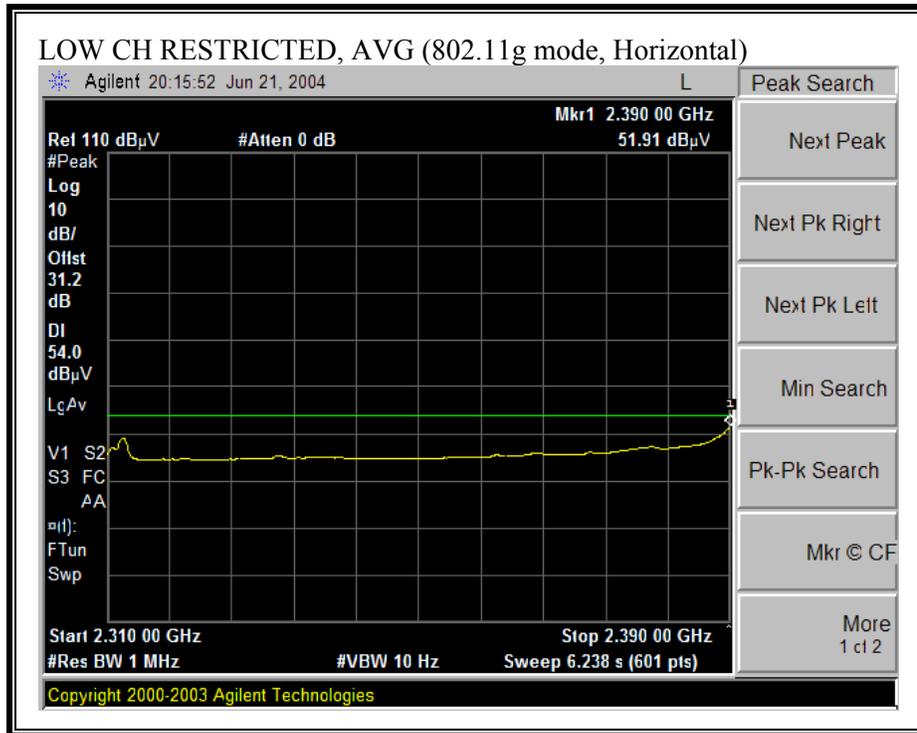



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

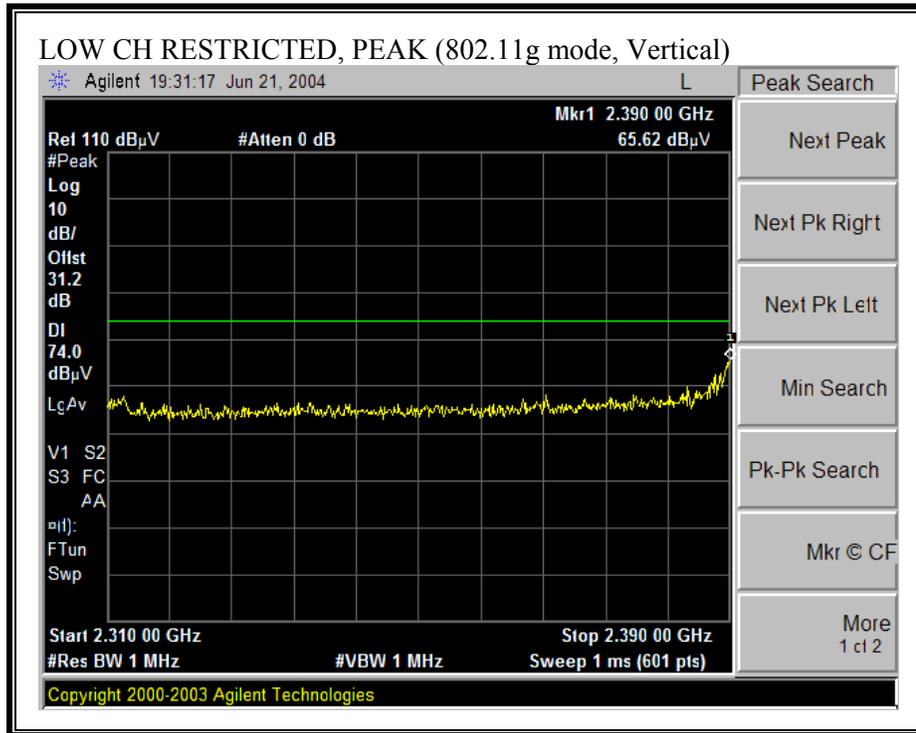

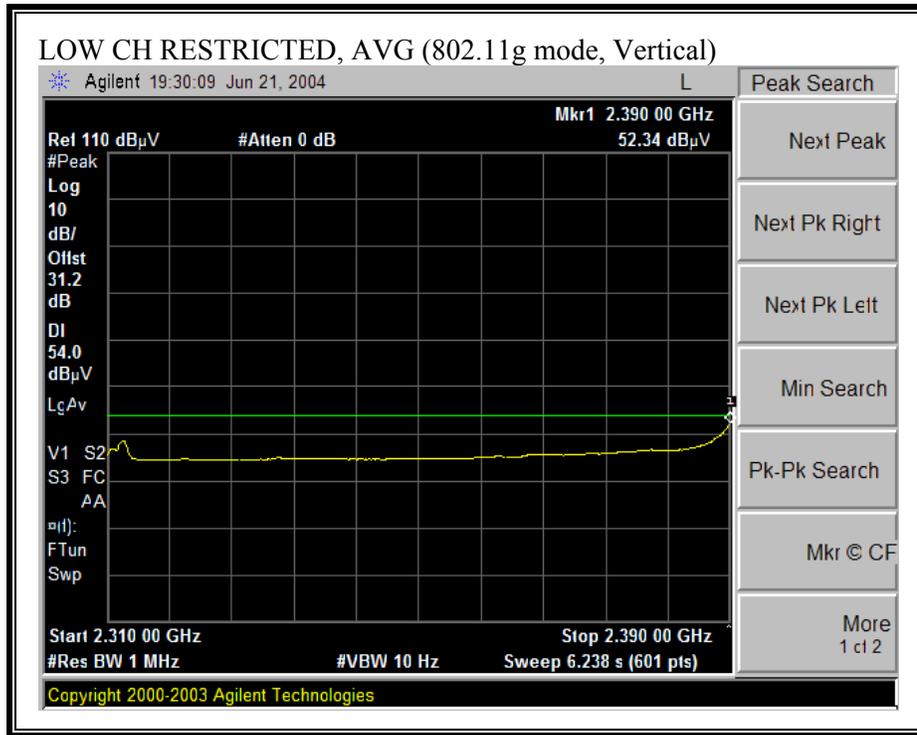



**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

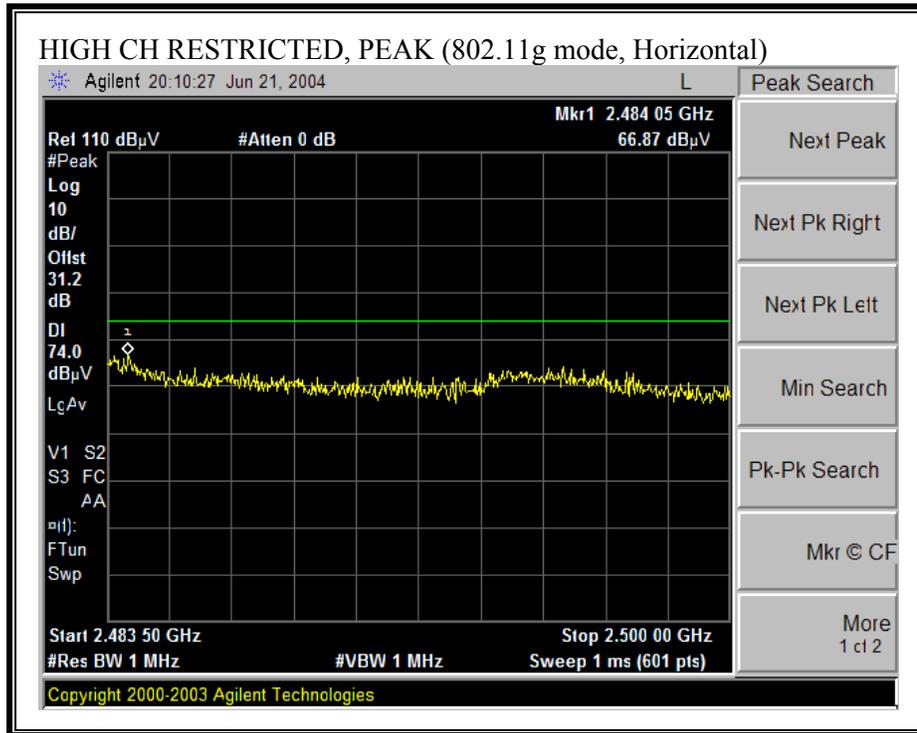

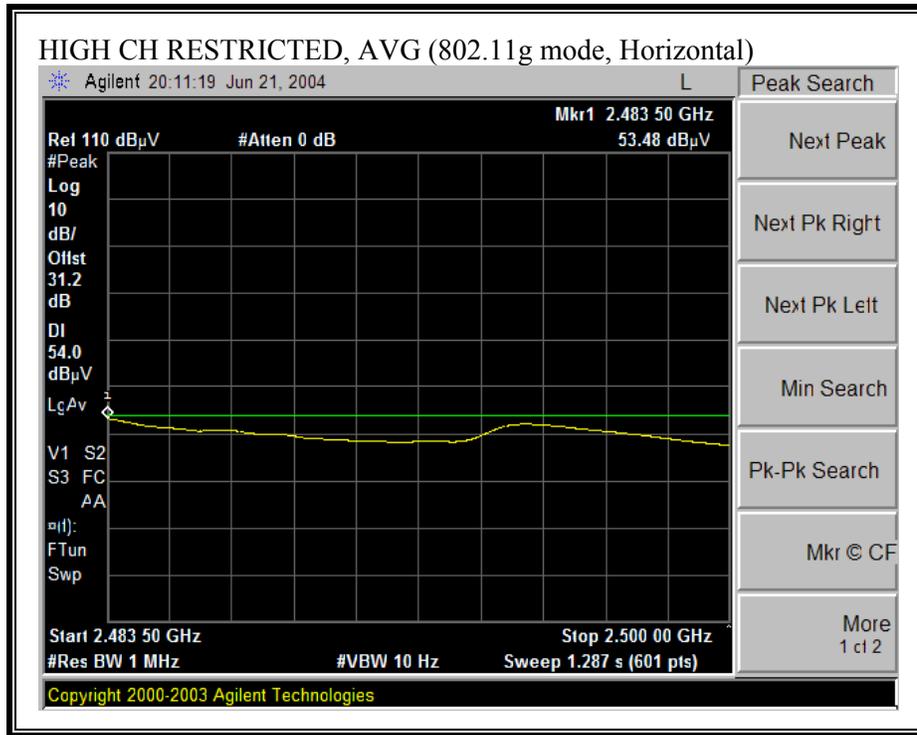

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

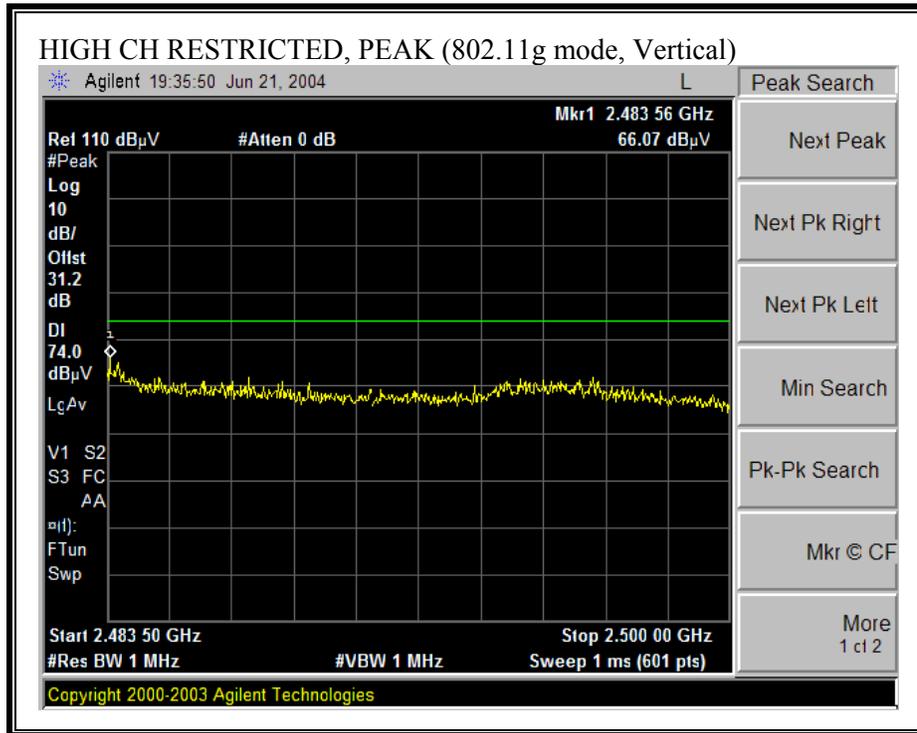

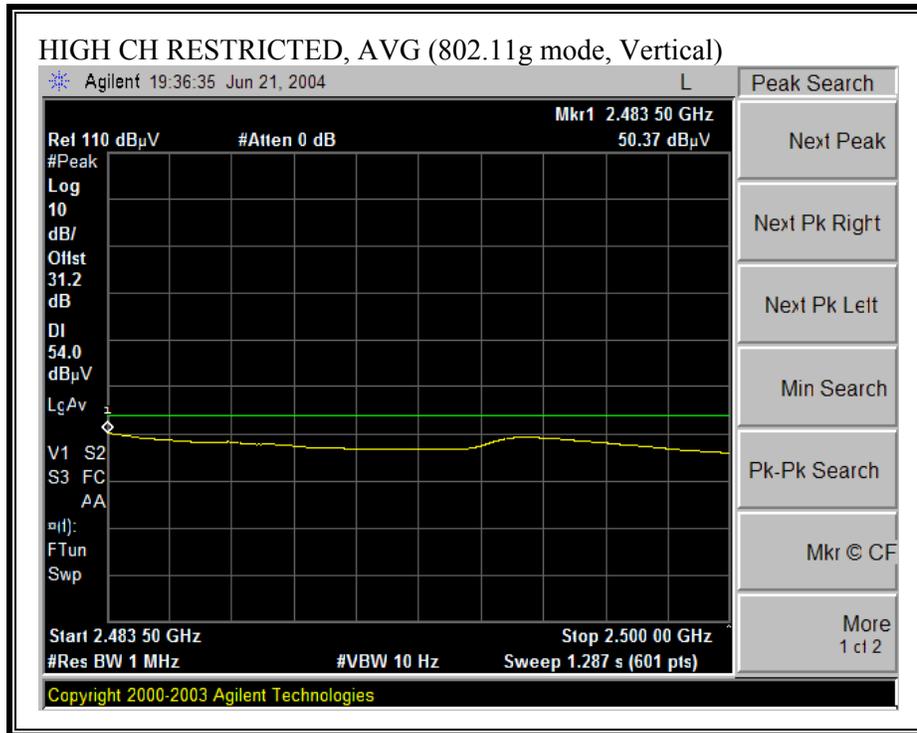

**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**

06/22/04 High Frequency Measurement  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN  
 Project #: 04U2790  
 Company: INTEL  
 EUT Descrip.: 802.11abg DELL LAPTOP\_510M (PHY ON LCD)  
 EUT M/N: WM3A2195ABG INTEL CARD  
 Test Target: FCC15.247  
 Mode Oper: TX\_11g\_LOW / MID / HI CHANNELS\_HARMONIC SPUR

**Test Equipment:**

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifer 1-26GHz T87 Miteq 924342	Pre-amplifer 26-40GHz	Horn > 18GHz
---	--	--	-----------------------	--------------

Hi Frequency Cables:  (2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Limit: FCC 15.205

**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth

**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>LOW CH 2.412GHz</b>															
4.824	9.8	58.9	46.8	33.1	2.9	-44.7	0.0	1.0	51.2	39.1	74.0	54.0	-22.8	-14.9	V
4.824	9.8	57.3	43.8	33.1	2.9	-44.7	0.0	1.0	49.6	36.1	74.0	54.0	-24.4	-17.9	H
<b>MID CH 2.437GHz</b>															
4.874	9.8	49.8	36.2	33.1	2.9	-44.7	0.0	1.0	42.0	28.5	74.0	54.0	-32.0	-25.5	V
7.311	9.8	47.5	35.0	36.2	3.8	-44.5	0.0	1.0	44.0	31.5	74.0	54.0	-30.0	-22.5	V
4.874	9.8	48.7	36.0	33.1	2.9	-44.7	0.0	1.0	41.0	28.3	74.0	54.0	-33.0	-25.7	H
7.311	9.8	46.0	34.6	36.2	3.8	-44.5	0.0	1.0	42.5	31.1	74.0	54.0	-31.5	-22.9	H
<b>HI CH 2.462GHz</b>															
4.924	9.8	53.3	41.0	33.2	2.9	-44.8	0.0	1.0	45.6	33.2	74.0	54.0	-28.4	-20.8	V
7.386	9.8	48.2	36.2	36.3	3.9	-44.5	0.0	1.0	44.9	32.9	74.0	54.0	-29.1	-21.1	V
4.924	9.8	52.8	41.0	33.2	2.9	-44.8	0.0	1.0	45.1	33.3	74.0	54.0	-28.9	-20.7	H
7.386	9.8	47.0	34.4	36.3	3.9	-44.5	0.0	1.0	43.7	31.1	74.0	54.0	-30.3	-22.9	H

NO OTHER RADIATED EMISSION WERE DETECTED UP TO 10TH HARMONIC

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

**HARMONICS AND SPURIOUS EMISSIONS (a MODE)**

06/24/04 High Frequency Measurement  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN  
 Project #: 04U2790  
 Company: INTEL  
 EUT Descrip.: 802.11abg DELL LAPTOP\_ 510M (PHY ON LCD)  
 EUT M/N: WM3A2195ABG INTEL CARD  
 Test Target: FCC15.247  
 Mode Oper: TX\_11a 5.745-5.825GHz\_LOW / MID / HI CHANNELS\_HARMONIC SPUR

**Test Equipment:**

EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifer 1-26GHz T87 Miteq 924342	Pre-amplifer 26-40GHz	Horn > 18GHz
---	--	--	-----------------------	--------------

Hi Frequency Cables  
 (2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Limit  
 FCC 15.205

**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth

**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth


f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>LOW CH 5.745GHz</b>															
11.490	9.8	47.5	35.3	38.8	6.1	-41.5	0.0	1.0	51.8	39.6	74.0	54.0	-22.2	-14.4	V
11.490	9.8	45.3	34.1	38.8	6.1	-41.5	0.0	1.0	49.6	38.4	74.0	54.0	-24.4	-15.6	H
<b>MID CH 5.785GHz</b>															
11.570	9.8	46.8	34.0	38.8	6.1	-41.6	0.0	1.0	51.1	38.3	74.0	54.0	-22.9	-15.7	V
11.570	9.8	45.0	33.6	38.8	6.1	-41.6	0.0	1.0	49.3	37.9	74.0	54.0	-24.7	-16.1	H
<b>HI CH 5.825GHz</b>															
11.650	9.8	46.5	33.7	38.9	6.1	-41.7	0.0	1.0	50.8	38.0	74.0	54.0	-23.2	-16.0	V
11.650	9.8	44.0	32.8	38.9	6.1	-41.7	0.0	1.0	48.3	37.1	74.0	54.0	-25.7	-16.9	H


NO OTHER RADIATED EMISSION WERE DETECTED UP TO 10TH HARMONIC

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


### 7.8.5. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHz, INSPIRON 300M LAPTOP WITH WISTRON ANTENNA SET


#### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

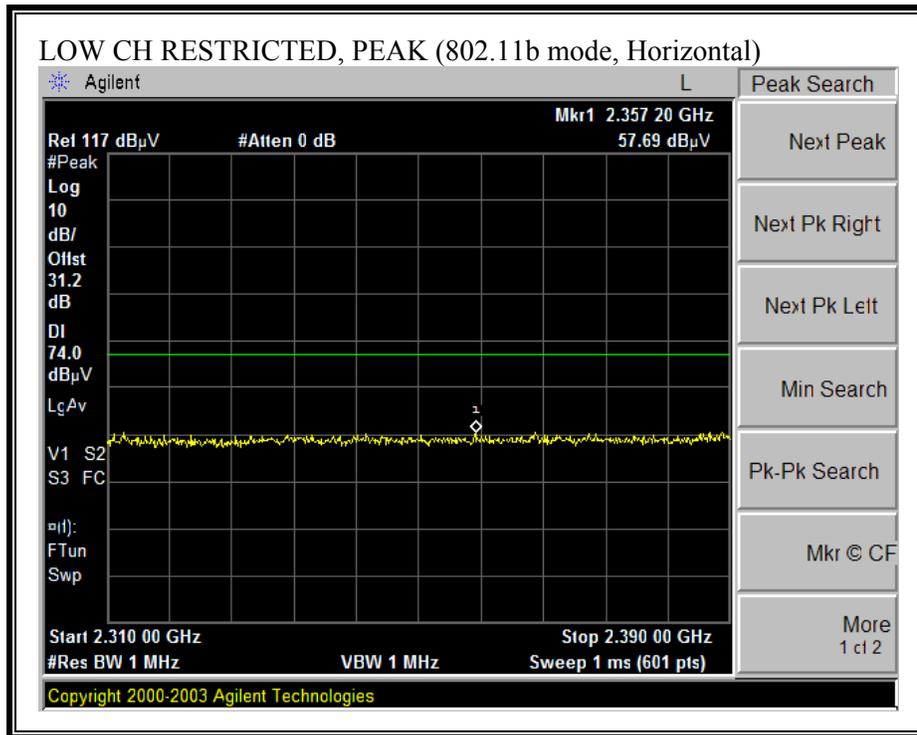

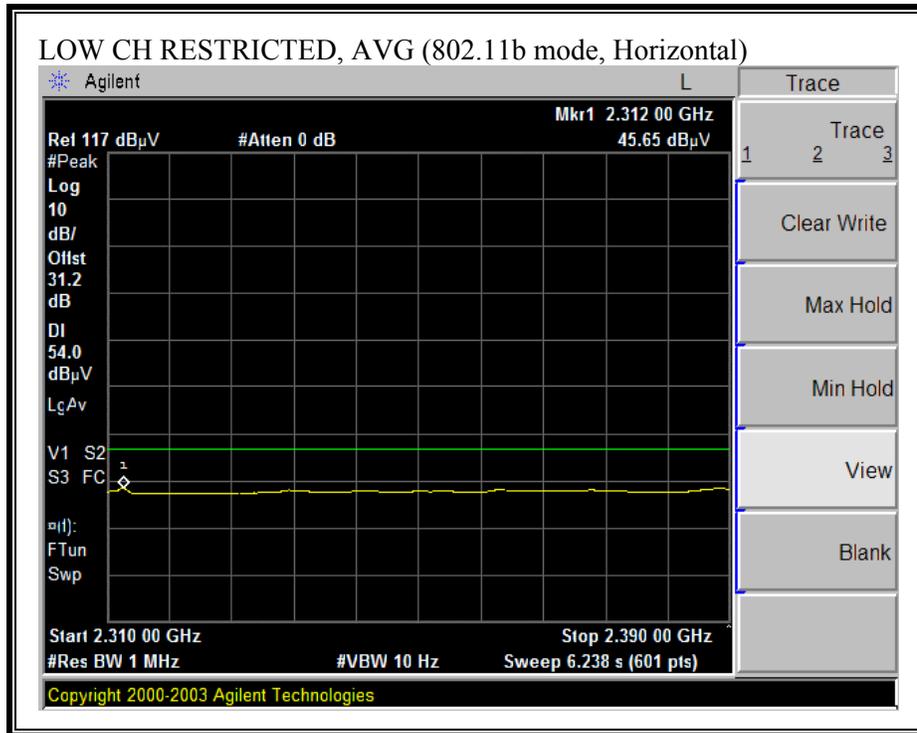



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

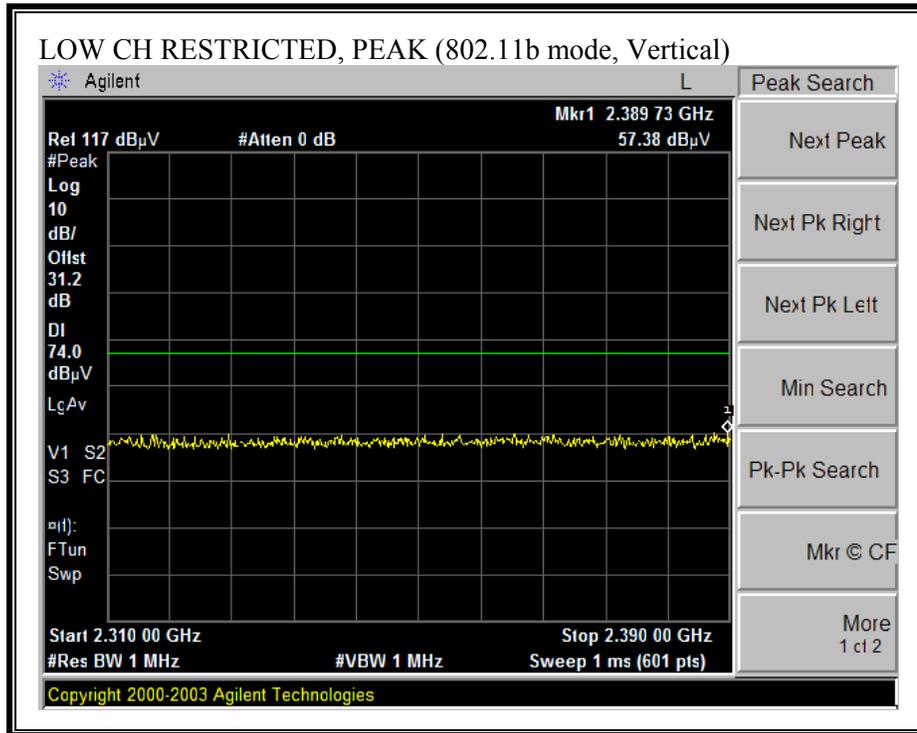

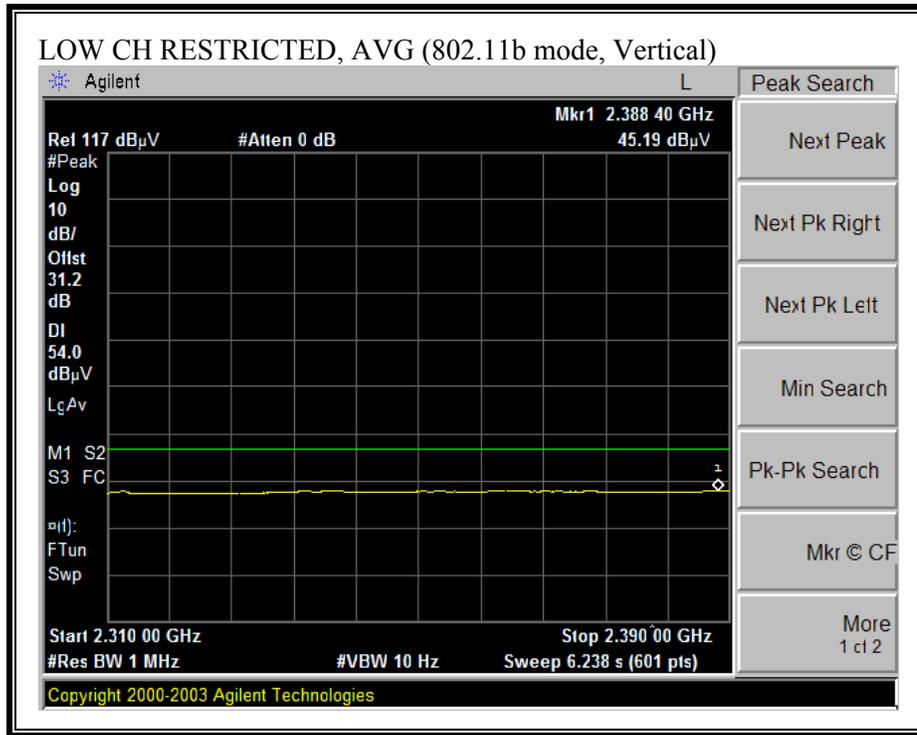



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

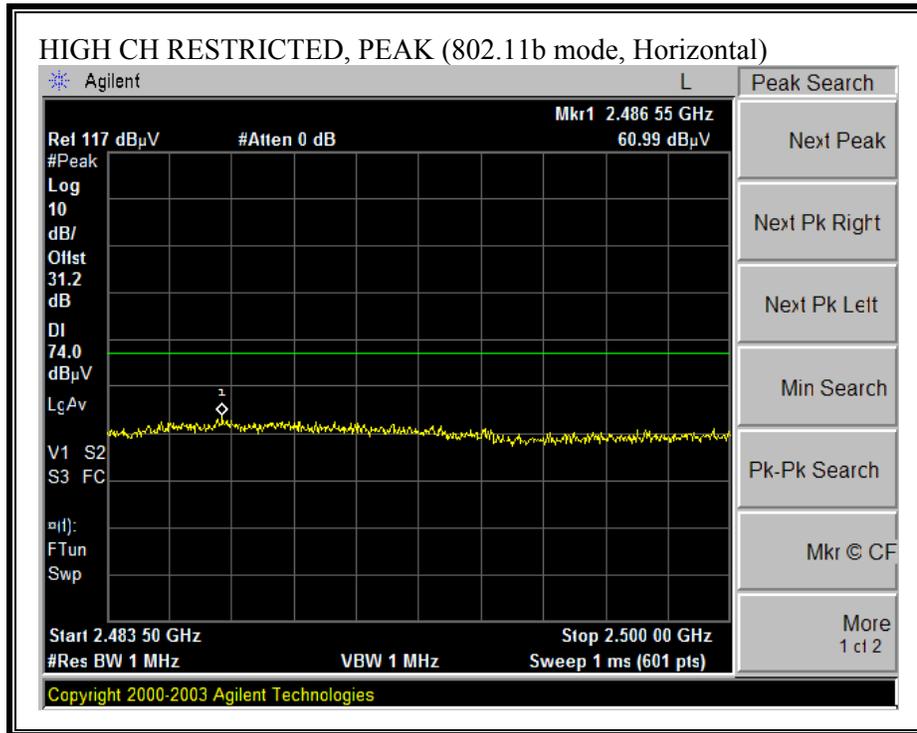

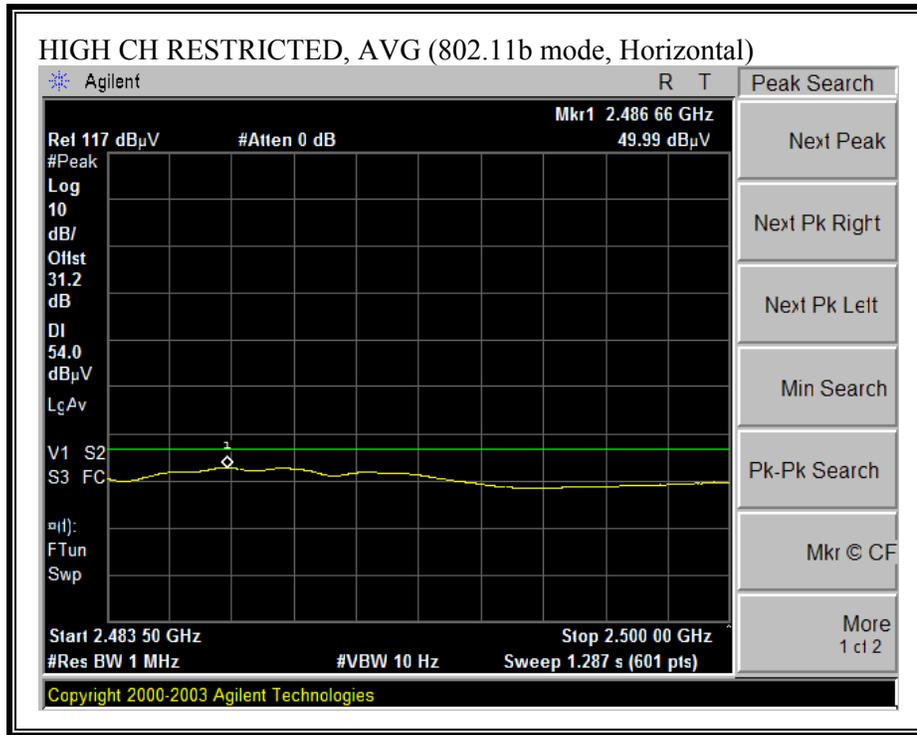

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

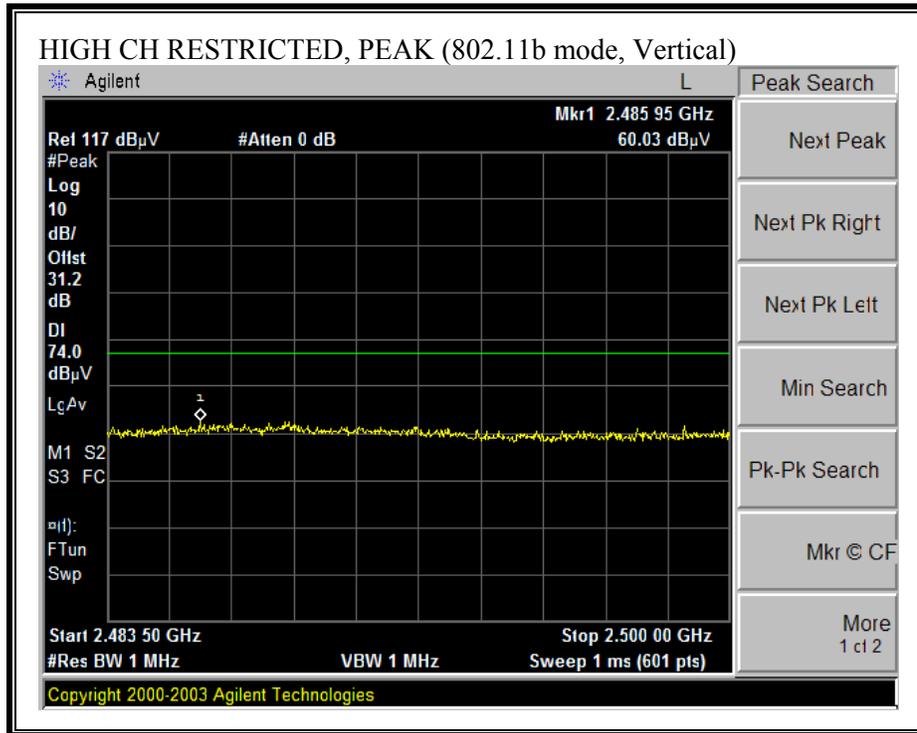

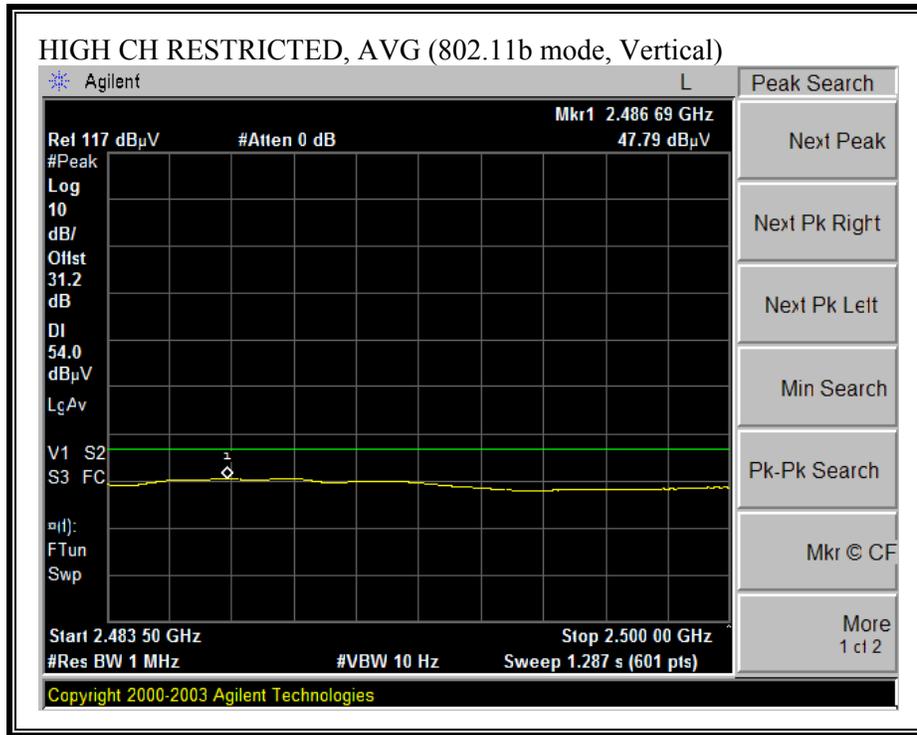

**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**

07/06/04 High Frequency Measurement  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN  
 Project #: 04U2790  
 Company: INTEL  
 EUT Descrip.: 802.11abg DELL LAPTOP\_INSPIRON 300M\_WNC ANTENNA AT BASE\_LAPTOP UNDOCK (worstcase)  
 EUT M/N: WM3A2195ABG INTEL CARD  
 Test Target: FCC15.247  
 Mode Oper: TX\_11b\_LOW / MID / HI CHANNELS\_HARMONIC SPUR

**Test Equipment:**

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Spectrum Analyzer Agilent E4446A Analyzer	Pre-amplifier 1-26GHz T87 Miteq 924342	Pre-amplifier 26-40GHz	Horn > 18GHz
---	--	---	------------------------	--------------

Hi Frequency Cables:  (2 ft)  (2~3 ft)  (4~6 ft)  (12 ft)

Limit: FCC 15.205

**Peak Measurements:**  
 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth

**Average Measurements:**  
 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
<b>LOW CH 2.412GHz</b>															
4.824	9.8	57.6	54.7	33.1	2.9	-44.7	0.0	1.0	49.9	47.0	74.0	54.0	-24.1	-7.0	V
4.824	9.8	56.0	53.0	33.1	2.9	-44.7	0.0	1.0	48.3	45.3	74.0	54.0	-25.7	-8.7	H
<b>MID CH 2.437GHz</b>															
4.874	9.8	46.5	37.3	33.1	2.9	-44.7	0.0	1.0	38.8	29.6	74.0	54.0	-35.2	-24.4	V
7.311	9.8	45.0	34.4	36.2	3.8	-44.5	0.0	1.0	41.5	30.9	74.0	54.0	-32.5	-23.1	V
4.874	9.8	46.9	39.1	33.1	2.9	-44.7	0.0	1.0	39.2	31.4	74.0	54.0	-34.8	-22.6	H
7.311	9.8	44.5	34.4	36.2	3.8	-44.5	0.0	1.0	41.0	30.9	74.0	54.0	-33.0	-23.1	H
<b>HI CH 2.462GHz</b>															
4.924	9.8	48.0	36.6	33.2	2.9	-44.8	0.0	1.0	40.3	28.9	74.0	54.0	-33.7	-25.1	V
7.386	9.8	47.0	35.1	36.3	3.9	-44.5	0.0	1.0	43.7	31.8	74.0	54.0	-30.3	-22.2	V
4.924	9.8	47.5	38.9	33.2	2.9	-44.8	0.0	1.0	39.8	31.2	74.0	54.0	-34.2	-22.8	H
7.386	9.8	45.0	34.3	36.3	3.9	-44.5	0.0	1.0	41.7	31.0	74.0	54.0	-32.3	-23.0	H

NO OTHER RADIATED EMISSION WERE DETECTED UP TO 10TH HARMONIC

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

