



# MEASUREMENT REPORT

## FCC PART 15 Subpart C WLAN 802.11b/g/n

---

**FCC ID:** HD5-EDA50211

**APPLICANT:** Honeywell International Inc  
Honeywell Sensing & Productivity Solutions

**Application Type:** Certification

**Product:** Mobile Computer

**Model No.:** EDA50-211

**Brand Name:** Honeywell

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15 Subpart C (Section 15.247)

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v04

**Test Date:** May 04 ~ June 02, 2017

Reviewed By : Jame Yuan  
( Jame Yuan )

Approved By : Marlin Chen  
( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v04. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
1704RSU05701	Rev. 01	Initial report	06-05-2017	Valid

# CONTENTS

Description	Page
<b>§2.1033 General Information.....</b>	<b>5</b>
<b>1. INTRODUCTION.....</b>	<b>6</b>
1.1. Scope.....	6
1.2. MRT Test Location.....	6
<b>2. PRODUCT INFORMATION.....</b>	<b>7</b>
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operating Frequency and Channel List.....	8
2.4. Test Mode.....	8
2.5. Description of Test Software.....	9
2.6. Device Capabilities.....	10
2.7. Test Configuration.....	11
2.8. EMI Suppression Device(s)/Modifications.....	11
2.9. Labeling Requirements.....	11
<b>3. DESCRIPTION of TEST.....</b>	<b>12</b>
3.1. Evaluation Procedure.....	12
3.2. AC Line Conducted Emissions.....	12
3.3. Radiated Emissions.....	13
<b>4. ANTENNA REQUIREMENTS.....</b>	<b>14</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>15</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>16</b>
<b>7. TEST RESULT.....</b>	<b>17</b>
7.1. Summary.....	17
7.2. 6dB Bandwidth Measurement.....	18
7.2.1. Test Limit.....	18
7.2.2. Test Procedure used.....	18
7.2.3. Test Setting.....	18
7.2.4. Test Setup.....	18
7.2.5. Test Result.....	19
7.3. Output Power Measurement.....	23
7.3.1. Test Limit.....	23
7.3.2. Test Procedure Used.....	23
7.3.3. Test Setting.....	23

7.3.4.	Test Setup .....	23
7.3.5.	Test Result of Output Power .....	24
7.4.	Power Spectral Density Measurement .....	26
7.4.1.	Test Limit .....	26
7.4.2.	Test Procedure Used .....	26
7.4.3.	Test Setting.....	26
7.4.4.	Test Setup .....	26
7.4.5.	Test Result.....	27
7.5.	Conducted Band Edge and Out-of-Band Emissions .....	31
7.5.1.	Test Limit .....	31
7.5.2.	Test Procedure Used .....	31
7.5.3.	Test Setting.....	31
7.5.4.	Test Setup .....	32
7.5.5.	Test Result.....	33
7.6.	Radiated Spurious Emission Measurement .....	40
7.6.1.	Test Limit .....	40
7.6.2.	Test Procedure Used .....	40
7.6.3.	Test Setting.....	40
7.6.4.	Test Setup .....	42
7.6.5.	Test Result.....	44
7.7.	Radiated Restricted Band Edge Measurement.....	55
7.7.1.	Test Limit .....	55
7.7.2.	Test Procedure Used .....	56
7.7.3.	Test Setup .....	56
7.7.4.	Test Result.....	57
7.8.	AC Conducted Emissions Measurement .....	81
7.8.1.	Test Limit .....	81
7.8.2.	Test Setup .....	81
7.8.3.	Test Result.....	82
<b>8.</b>	<b>CONCLUSION .....</b>	<b>84</b>

## §2.1033 General Information

<b>Applicant:</b>	Honeywell International Inc Honeywell Sensing & Productivity Solutions
<b>Applicant Address:</b>	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
<b>Manufacturer:</b>	Honeywell International Inc Honeywell Sensing & Productivity Solutions
<b>Manufacturer Address:</b>	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT Registration No.:</b>	809388
<b>FCC Rule Part(s):</b>	Part 15.247
<b>Model No.:</b>	EDA50-211
<b>FCC ID:</b>	HD5-EDA50211
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
<b>FCC Classification:</b>	Digital Transmission System (DTS)

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	Mobile Computer
Model No.:	EDA50-211
Brand Name:	Honeywell
Hardware Version:	V2.0
Software Version:	205.01.00.0006.eng
IMEI:	356074080038511
Wi-Fi Specification:	802.11a/b/g/n
Bluetooth Specification:	v4.0 dual mode
GSM Operation Band (s):	E-GSM 850 / DCS 1900
WCDMA Operation Band (s):	Band II / V
LTE Operation Band (s):	FDD Band 2/4/7
NFC:	13.56MHz
GPS:	1575.42MHz
<b>Components</b>	
Adapter	Model No.: ADS-12B-06 05010E Input Power: 100 - 240V ~ 50/60Hz, Max. 0.3A Output Power: 5VDC 2.0A

### 2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20: 2412 ~ 2462MHz 802.11n-HT40: 2422 ~ 2452MHz
Channel Number:	802.11b/g/n-HT20: 11 802.11n-HT40: 7
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 72.2Mbps
Antenna Type / Antenna Gain:	FPC Antenna / 2.4dBi
Maximum Output Power:	802.11b: 20.57dBm 802.11g: 21.67dBm 802.11n-HT20: 20.95dBm

Note: For other features of this EUT, test report will be issued separately.

### 2.3. Operating Frequency and Channel List

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

### 2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-HT20



## 2.5. Description of Test Software

The test utility software used during testing was “QRCT Version3.0.105.0”.

Power Parameter Value

Test Mode	Channel No.	Test Frequency (MHz)	Power Parameter Value
802.11b	01	2412	15.0
	06	2437	15.0
	11	2462	16.5
802.11g	01	2412	14.0
	06	2437	13.5
	11	2462	11.5
802.11n-HT20	01	2412	11.5
	06	2437	11.5
	11	2462	12.0

## 2.6. Device Capabilities


This device contains the following capabilities:

2.4GHz WLAN (DTS), 5GHz WLAN (UNII), Bluetooth (v4.0 dual mode), NFC, GSM 850/1900 WCDMA Band II/V, LTE FDD Band 2/4/7


**Note:** 2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	97.72%
802.11g	89.16%
802.11n-HT20	89.20%


### 802.11b - Duty Cycle

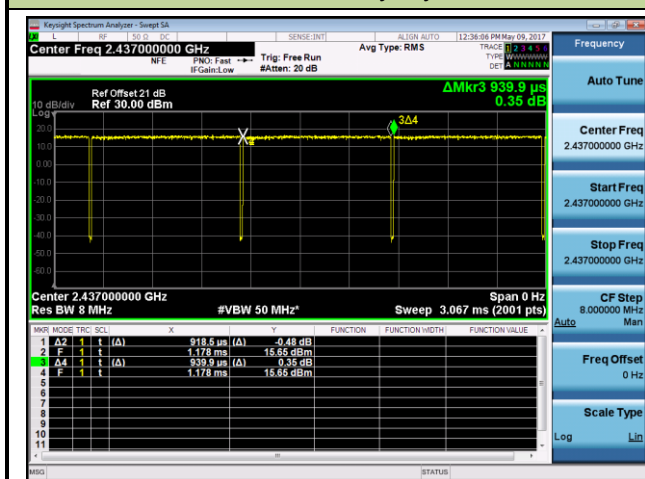

### 802.11g - Duty Cycle

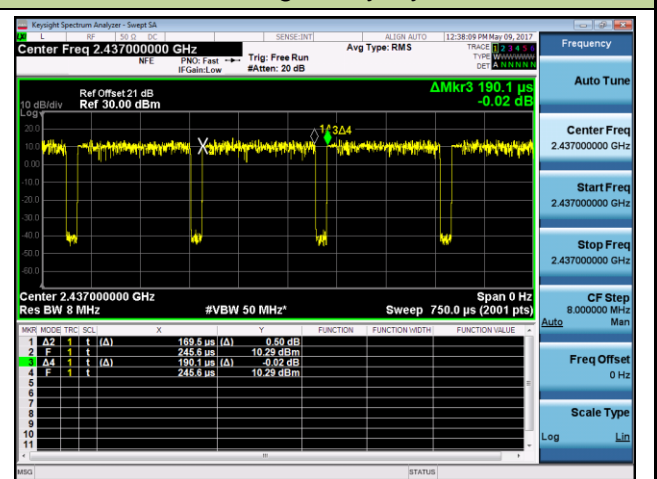

### 802.11n-HT20 - Duty Cycle

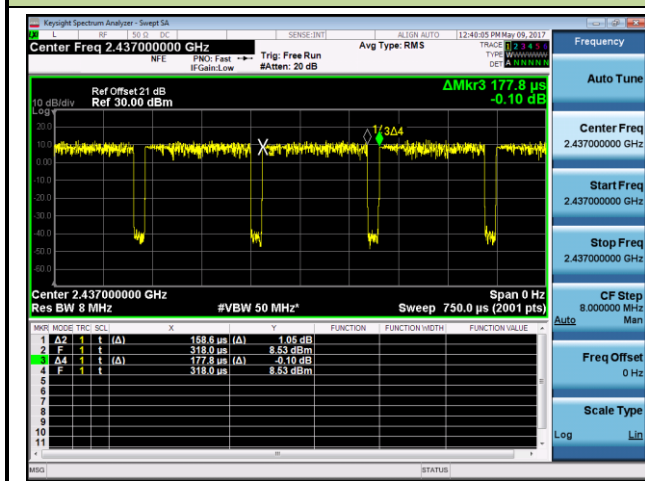

## **2.7. Test Configuration**

The **Mobile Computer FCC ID: HD5-EDA50211** was tested per the guidance of KDB 558074 D01v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## **2.8. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.9. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION of TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v04 were used in the measurement of the **Mobile Computer**.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Mobile Computer** is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The **Mobile Computer FCC ID: HD5-EDA50211** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emission - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2017/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2017/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2017/06/20
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06181	1 year	2017/12/20
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	1 year	2018/05/09

### Radiated Emissions - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MRTSUE06125	1 year	2017/08/19
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2017/06/21
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2018/04/15
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2017/11/21
TRILOG Antenna	Schwarzbeck	VULB9168	MRTSUE06172	1 year	2017/11/19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2017/11/19
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2017/12/30
Digital Thermometer & Hygrometer	Minggao	N/A	MRTSUE06170	1 year	2017/12/14
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2017/05/10

### Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2018/04/25
USB wideband power sensor	Boonton	55006	MRTSUE06109	1 year	2018/04/25
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06180	1 year	2017/12/20

Software	Version	Function
e3	V 8.3.5	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement - SR2</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: 3.46dB
<b>Radiated Emission Measurement - AC1</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
<b>Spurious Emissions, Conducted - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Power Spectrum Density - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.15dB
<b>Occupied Bandwidth - TR3</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%



## 7. TEST RESULT

### 7.1. Summary

**Product Name:** Mobile Computer  
**FCC ID:** HD5-EDA50211  
**FCC Classification:** Digital Transmission System (DTS)  
**Data Rate / MCS** 1Mbps for 802.11b;  
**Tested:** 6Mbps for 802.11g;  
MCS7 for 802.11n-HT20;

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a) (2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b) (3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8.0\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc(Peak)}$		Pass	Section 7.5
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

KDB 558074 D01v04 - Section 8.2 Option 2

### 7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

### 7.2.4. Test Setup

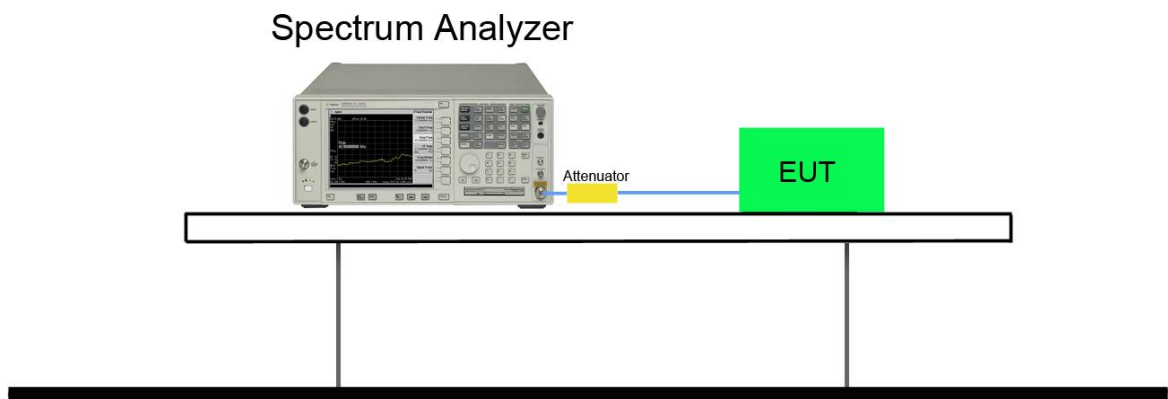

### 7.2.5. Test Result

Product	Mobile Computer	Temperature	25°C
Test Engineer	Will Yan	Relative Humidity	52%
Test Site	TR3	Test Date	2017/05/09

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	11Mbps	01	2412	7.85	≥ 0.5	Pass
802.11b	11Mbps	06	2437	8.99	≥ 0.5	Pass
802.11b	11Mbps	11	2462	8.35	≥ 0.5	Pass
802.11g	54Mbps	01	2412	16.48	≥ 0.5	Pass
802.11g	54Mbps	06	2437	16.49	≥ 0.5	Pass
802.11g	54Mbps	11	2462	16.46	≥ 0.5	Pass
802.11n-HT20	MCS7	01	2412	17.69	≥ 0.5	Pass
802.11n-HT20	MCS7	06	2437	17.66	≥ 0.5	Pass
802.11n-HT20	MCS7	11	2462	17.64	≥ 0.5	Pass

## 802.11b 6dB Bandwidth


### Channel 01 (2412MHz)



### Channel 06 (2437MHz)




### Channel 11 (2462MHz)

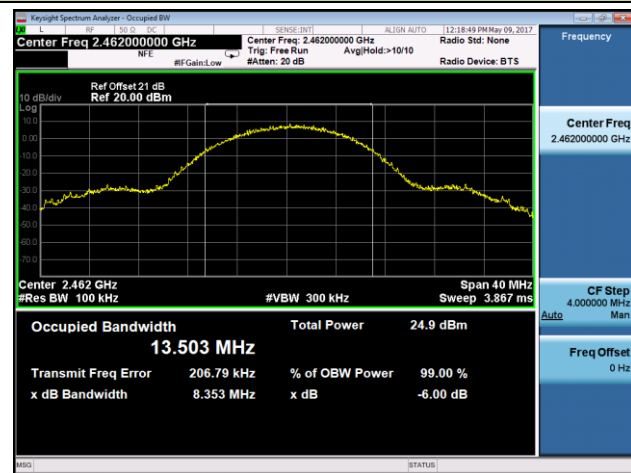


## 802.11g 6dB Bandwidth

### Channel 01 (2412MHz)

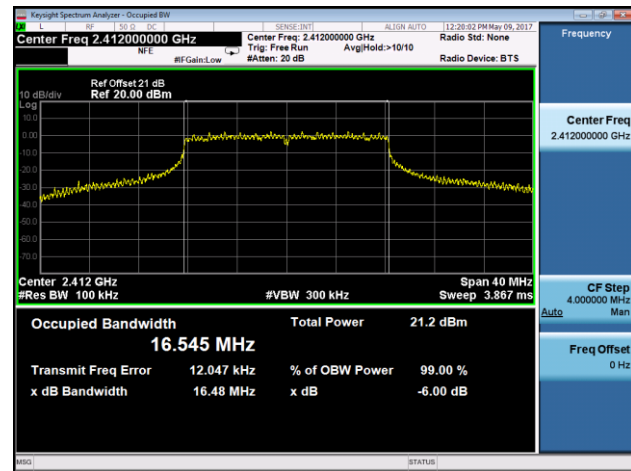

### Channel 06 (2437MHz)

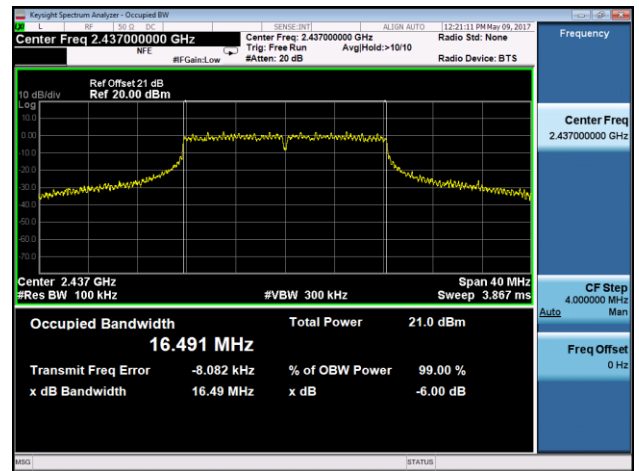

### Channel 11 (2462MHz)




## 802.11n-HT20 6dB Bandwidth


### Channel 01 (2412MHz)



### Channel 06 (2437MHz)

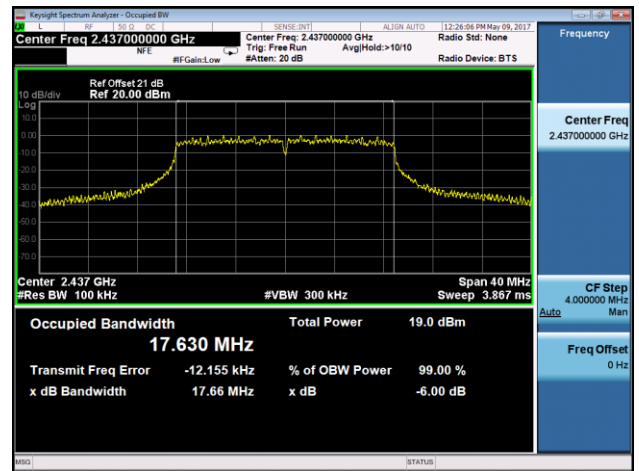

### Channel 11 (2462MHz)

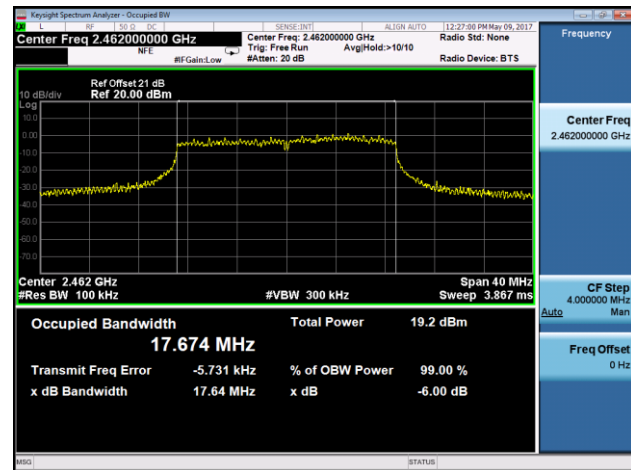

### 7.3. Output Power Measurement

#### 7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

#### 7.3.2. Test Procedure Used


KDB 558074 D01v04 - Section 9.1.2 PKPM1 Peak Power Method (for signals with  $BW \leq 50\text{MHz}$ )

#### 7.3.3. Test Setting

##### **Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq 50\text{MHz}$ )**

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### 7.3.4. Test Setup

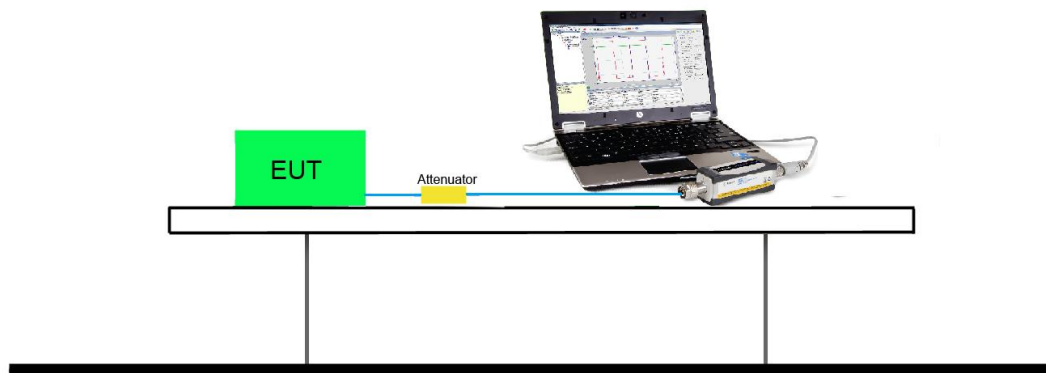

### 7.3.5. Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below table.  
the maximum power output (yellow marker) for final test of each channel.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate/ MCS	Power (dBm)
802.11b	20	6	2437	1Mbps	20.12
				5.5Mbps	20.32
				11Mbps	20.57
802.11g	20	6	2437	6Mbps	21.06
				24Mbps	21.30
				54Mbps	21.48
802.11n	20	6	2437	MCS0	20.45
				MCS4	20.73
				MCS7	20.95



Product	Mobile Computer	Temperature	23°C
Test Engineer	Will Yan	Relative Humidity	51%
Test Site	TR3	Test Date	2017/05/07

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
11b	11Mbps	01	2412	20.51	≤ 30.00	Pass
11b	11Mbps	06	2437	20.57	≤ 30.00	Pass
11b	11Mbps	11	2462	17.77	≤ 30.00	Pass
11g	54Mbps	01	2412	21.67	≤ 30.00	Pass
11g	54Mbps	06	2437	21.48	≤ 30.00	Pass
11g	54Mbps	11	2462	16.27	≤ 30.00	Pass
11n-HT20	MCS7	01	2412	20.62	≤ 30.00	Pass
11n-HT20	MCS7	06	2437	20.95	≤ 30.00	Pass
11n-HT20	MCS7	11	2462	18.07	≤ 30.00	Pass

#### **Average Power for report**

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
11b	11Mbps	01	2412	18.17	≤ 30.00	Pass
11b	11Mbps	06	2437	18.36	≤ 30.00	Pass
11b	11Mbps	11	2462	15.76	≤ 30.00	Pass
11g	54Mbps	01	2412	15.32	≤ 30.00	Pass
11g	54Mbps	06	2437	15.19	≤ 30.00	Pass
11g	54Mbps	11	2462	10.45	≤ 30.00	Pass
11n-HT20	MCS7	01	2412	13.13	≤ 30.00	Pass
11n-HT20	MCS7	06	2437	13.48	≤ 30.00	Pass
11n-HT20	MCS7	11	2462	10.91	≤ 30.00	Pass

## 7.4. Power Spectral Density Measurement

### 7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


### 7.4.2. Test Procedure Used

KDB 558074 D01v04 - Section 10.2 Method PKPSD

### 7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### 7.4.4. Test Setup

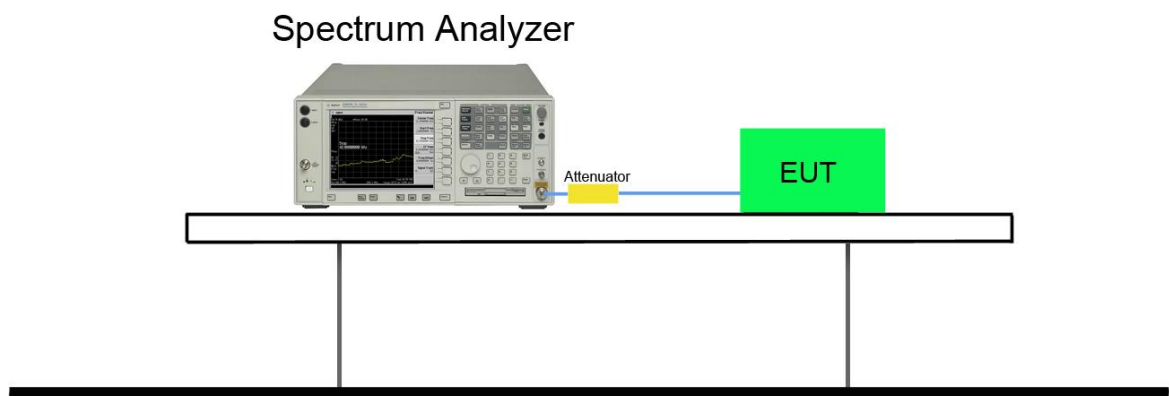


#### 7.4.5. Test Result

Product	Mobile Computer	Temperature	25°C
Test Engineer	Will Yan	Relative Humidity	52%
Test Site	TR3	Test Date	2017/05/09

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/ 3kHz)	Result
11b	11Mbps	01	2412	-2.39	≤ 8.00	Pass
11b	11Mbps	06	2437	-5.44	≤ 8.00	Pass
11b	11Mbps	11	2462	-5.74	≤ 8.00	Pass
11g	54Mbps	01	2412	-10.51	≤ 8.00	Pass
11g	54Mbps	06	2437	-9.77	≤ 8.00	Pass
11g	54Mbps	11	2462	-8.97	≤ 8.00	Pass
11n-HT20	MCS7	01	2412	-12.27	≤ 8.00	Pass
11n-HT20	MCS7	06	2437	-11.91	≤ 8.00	Pass
11n-HT20	MCS7	11	2462	-11.20	≤ 8.00	Pass

## 802.11b PSD


### Channel 01 (2412MHz)

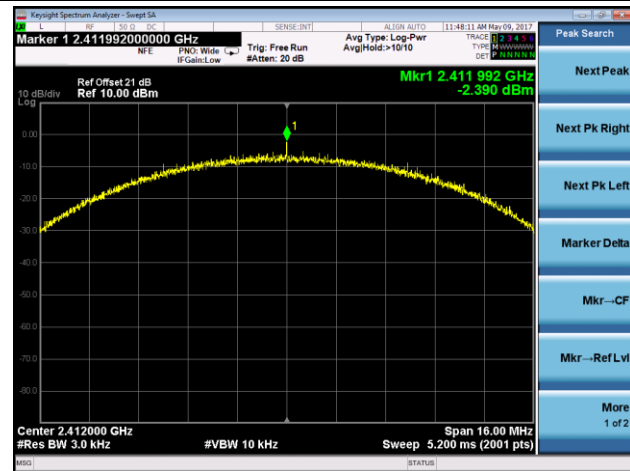

### Channel 06 (2437MHz)




### Channel 11 (2462MHz)

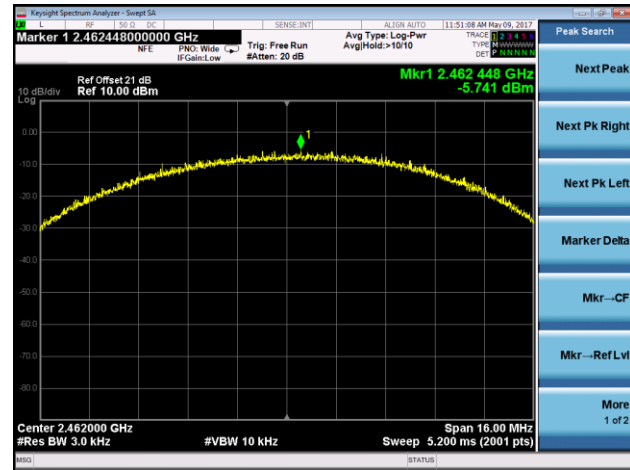


## 802.11g PSD


## Channel 01 (2412MHz)

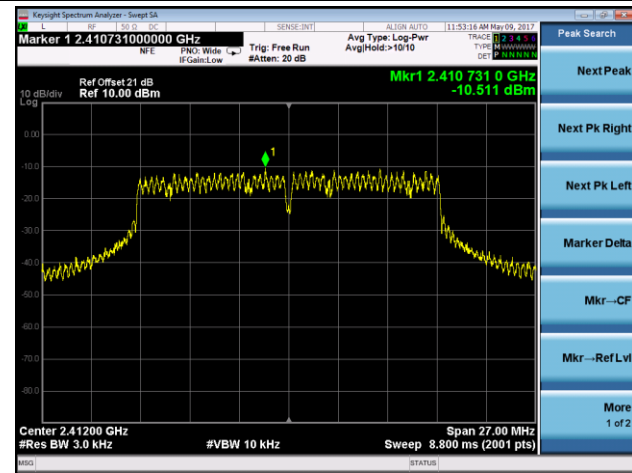

## Channel 06 (2437MHz)

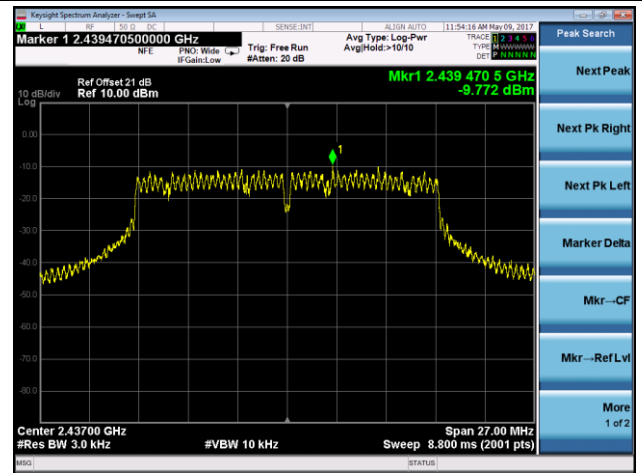


## Channel 11 (2462MHz)

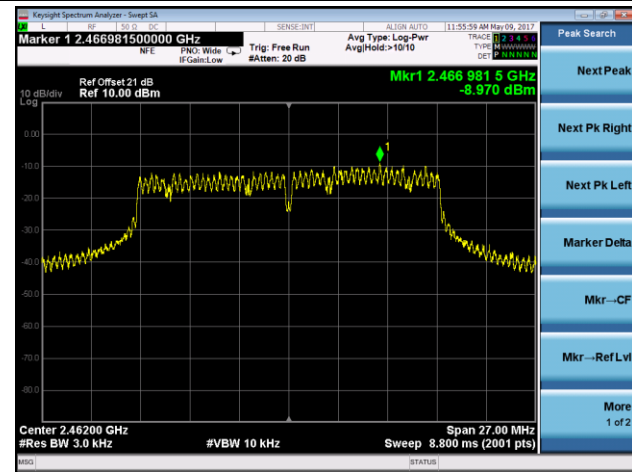


## 802.11n-HT20 PSD


## Channel 01 (2412MHz)

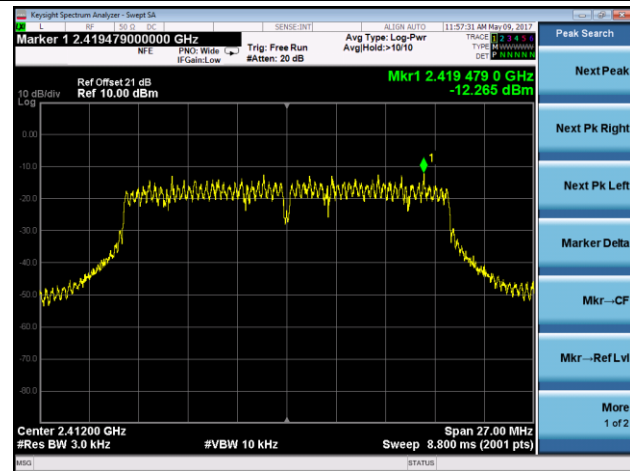

## Channel 06 (2437MHz)

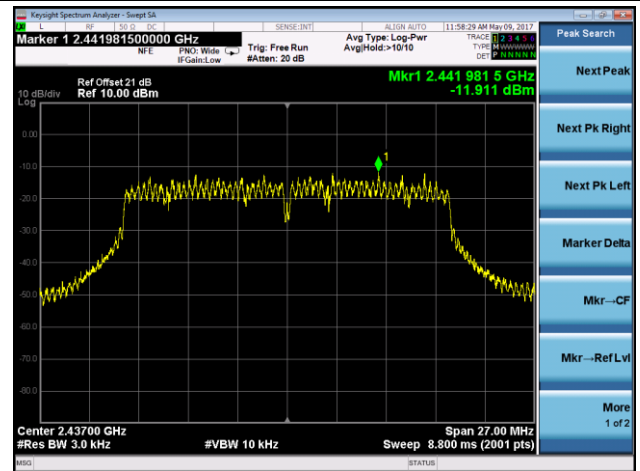

## Channel 11 (2462MHz)

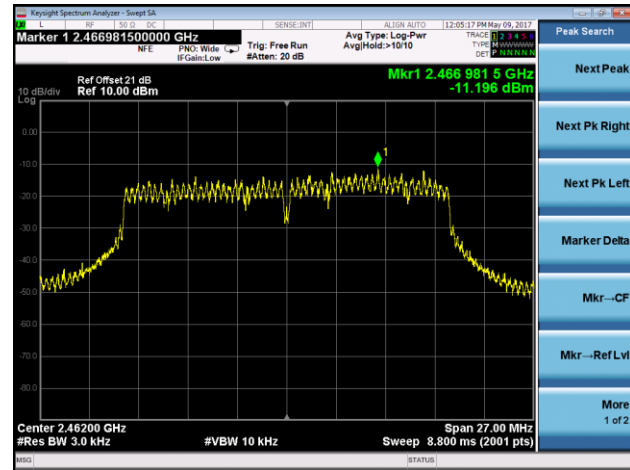

## **7.5. Conducted Band Edge and Out-of-Band Emissions**

### **7.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### **7.5.2. Test Procedure Used**

KDB 558074 D01v04 - Section 11.2 & Section 11.3

### **7.5.3. Test Settling**


#### **1. Reference level measurement**

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW  $\geq 3 \times$  RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

#### **2. Emission level measurement**

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

#### 7.5.4. Test Setup

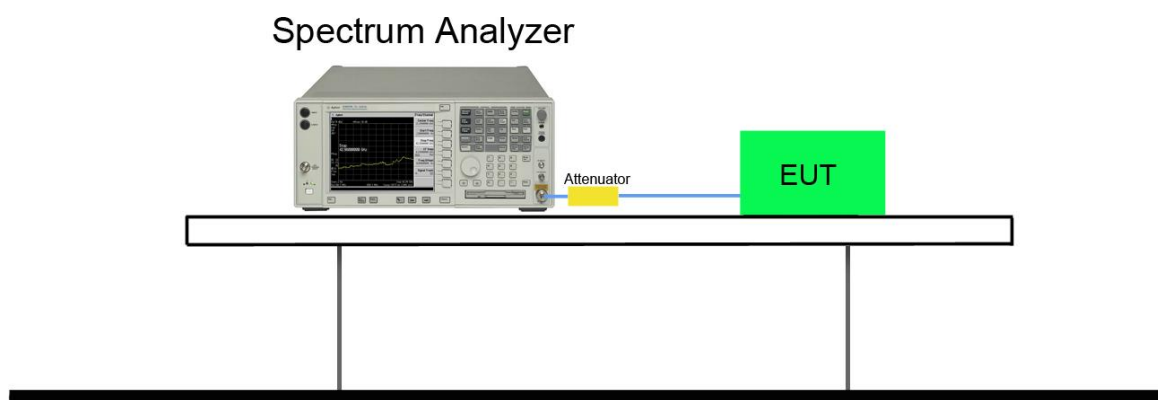



### 7.5.5. Test Result


Product	Mobile Computer	Temperature	25°C
Test Engineer	Will Yan	Relative Humidity	52%
Test Site	TR3	Test Date	2017/05/09

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit	Result
802.11b	11Mbps	01	2412	20dBc	Pass
802.11b	11Mbps	06	2437	20dBc	Pass
802.11b	11Mbps	11	2462	20dBc	Pass
802.11g	54Mbps	01	2412	20dBc	Pass
802.11g	54Mbps	06	2437	20dBc	Pass
802.11g	54Mbps	11	2462	20dBc	Pass
802.11n-HT20	MCS7	01	2412	20dBc	Pass
802.11n-HT20	MCS7	06	2437	20dBc	Pass
802.11n-HT20	MCS7	11	2462	20dBc	Pass


## 802.11b Out-of-Band Emissions

### Channel 01 (2412MHz)


#### 100kHz PSD reference Level

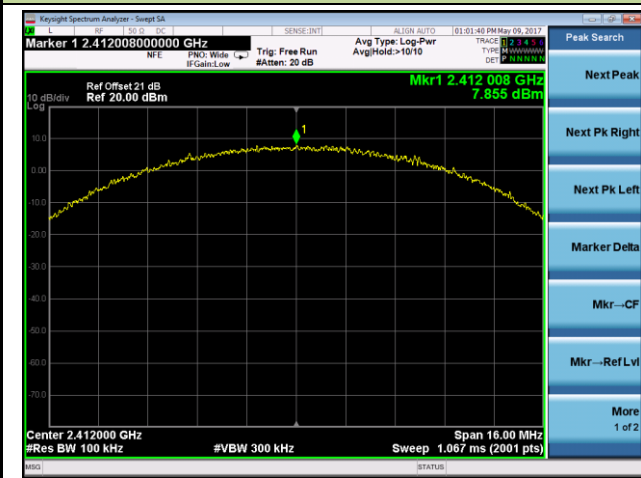

#### Low Band Edge

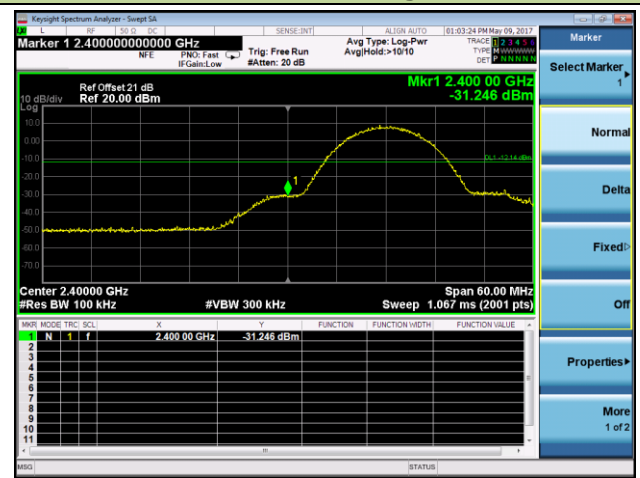


#### Spurious Emission

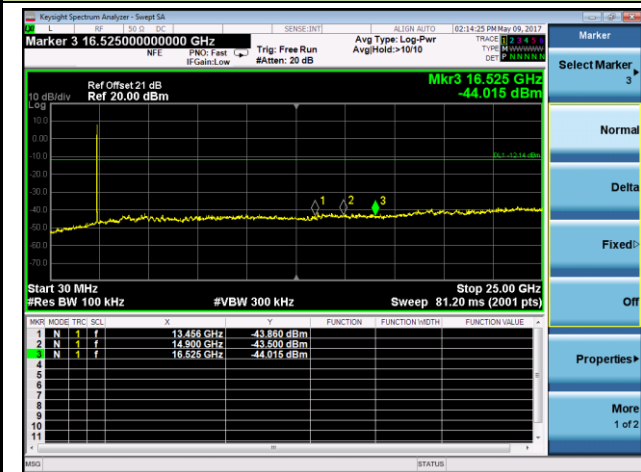


### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

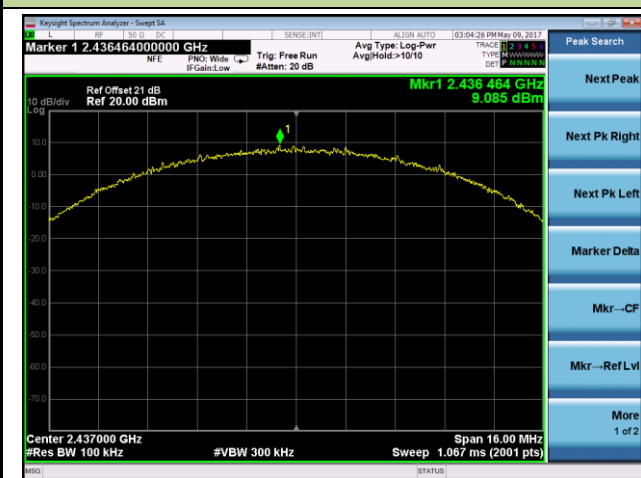


#### Spurious Emission

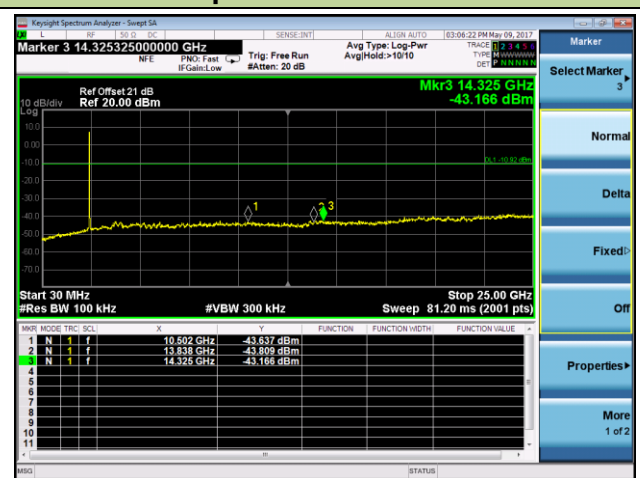


## Channel 11 (2462MHz)


### 100kHz PSD reference Level

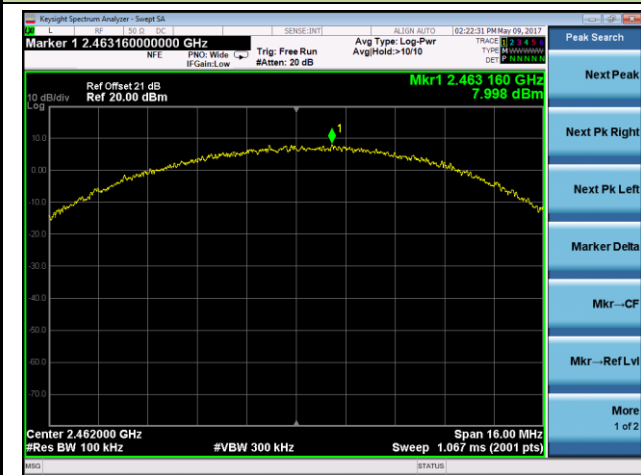

### High Band Edge

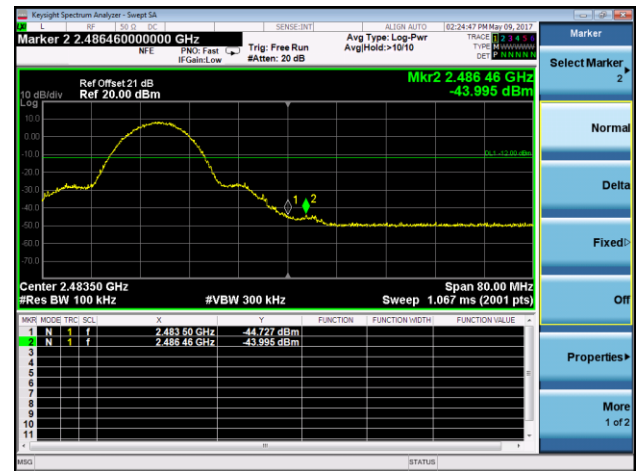


### Spurious Emission

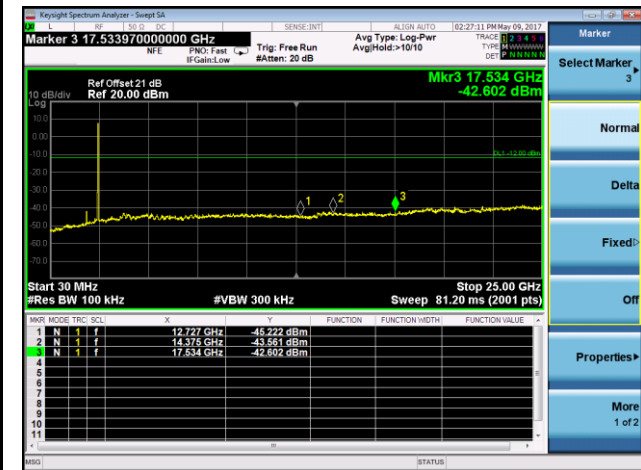


## 802.11g Out-of-Band Emissions

## Channel 01 (2412MHz)


### 100kHz PSD reference Level

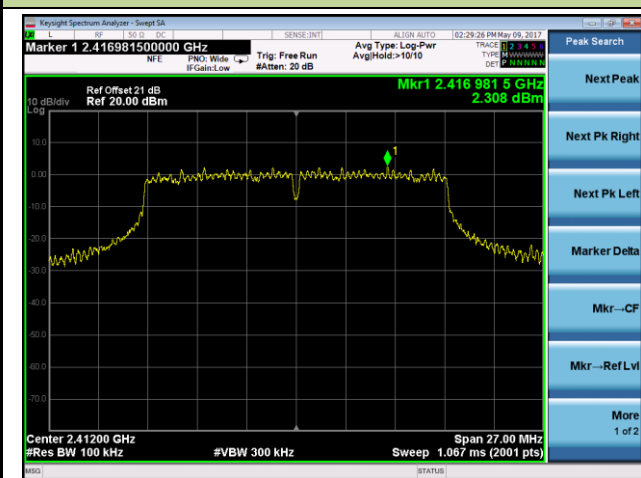

### Low Band Edge

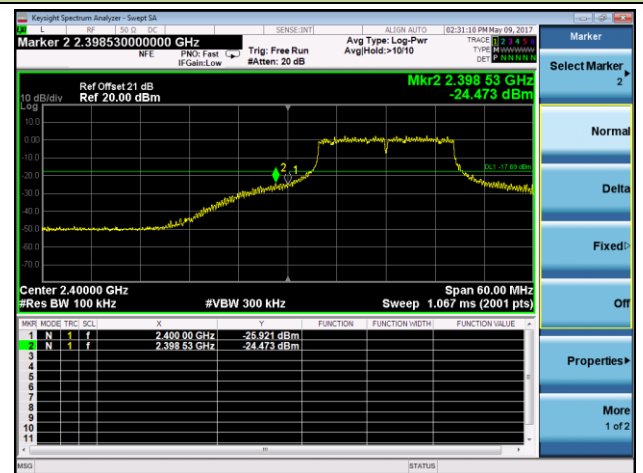


## Spurious Emission

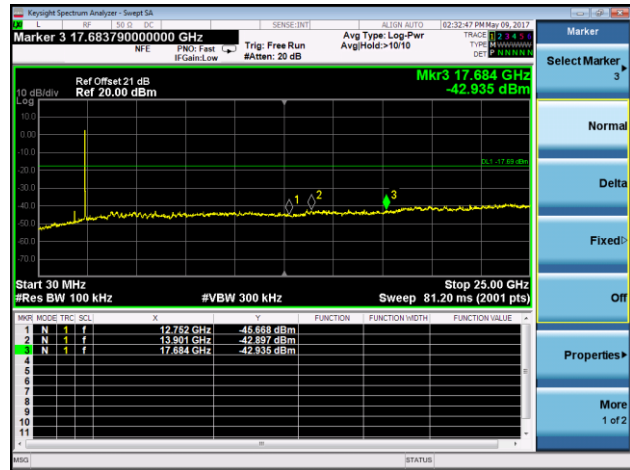


### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

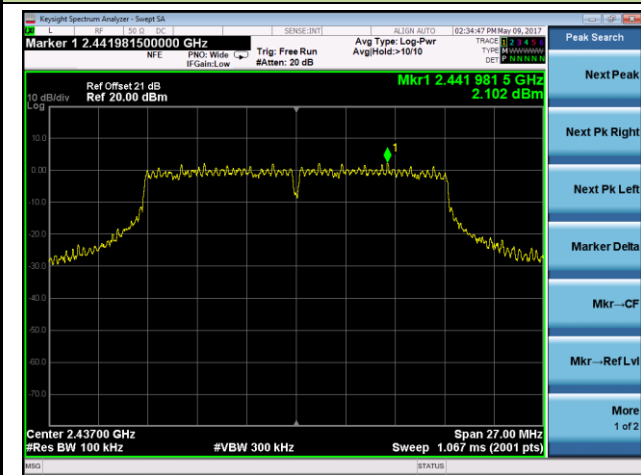


#### Spurious Emission

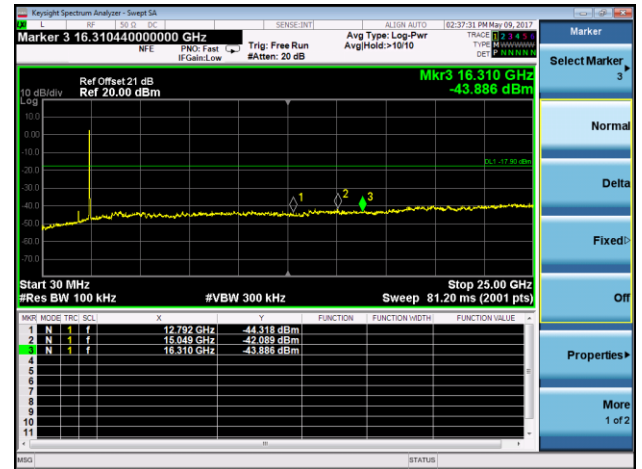


### Channel 11 (2462MHz)


#### 100kHz PSD reference Level

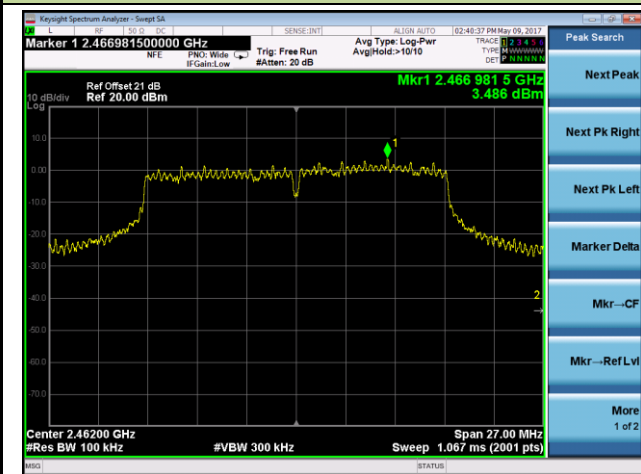

#### High Band Edge

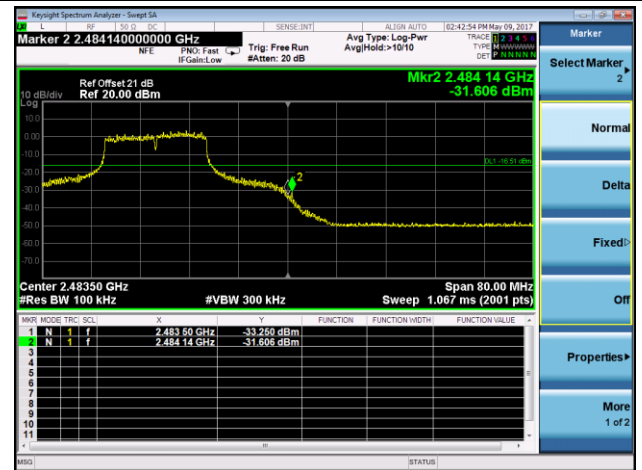


#### Spurious Emission

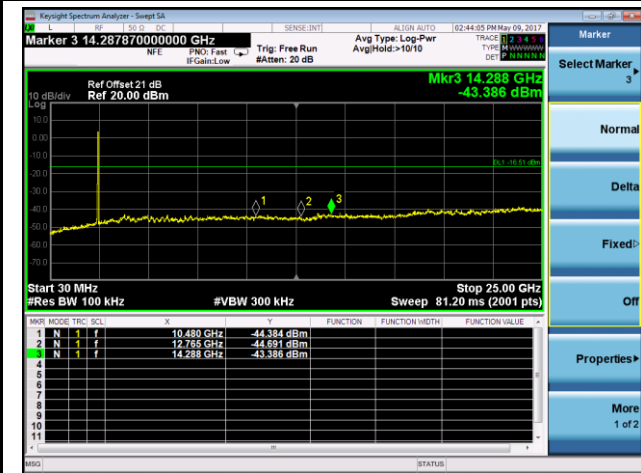


## 802.11n-HT20 Out-of-Band Emissions

### Channel 01 (2412MHz)


#### 100kHz PSD reference Level

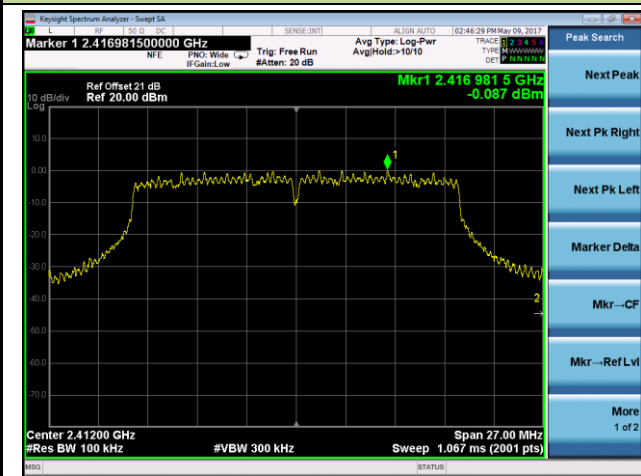

#### Low Band Edge

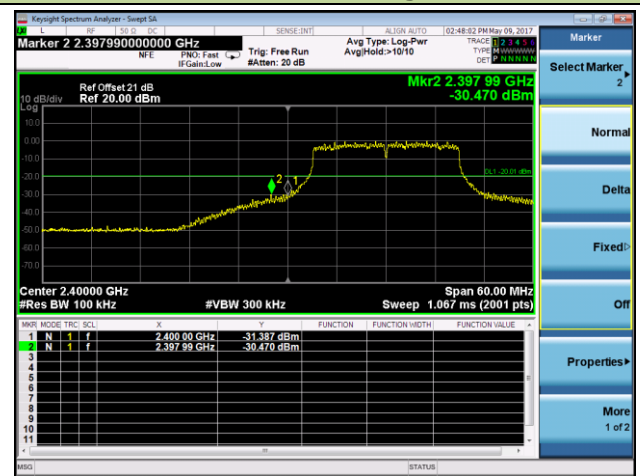


#### Spurious Emission

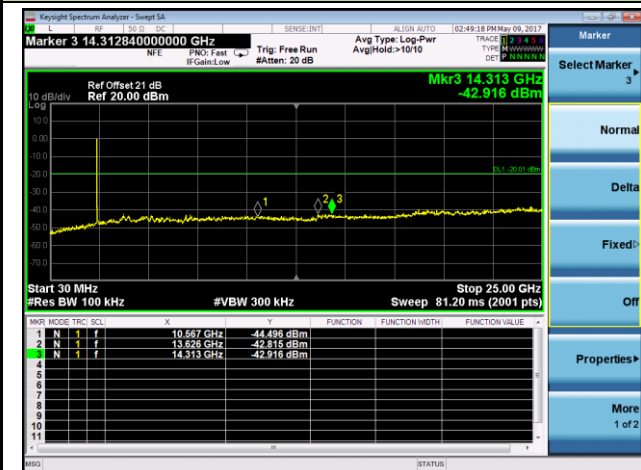


### Channel 06 (2437MHz)

#### 100kHz PSD reference Level

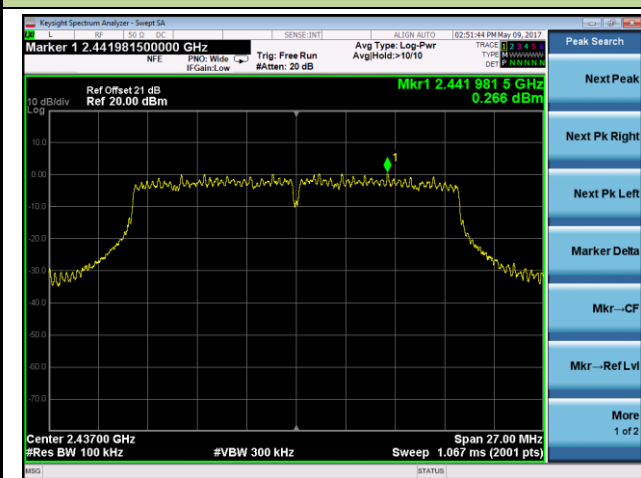


#### Spurious Emission

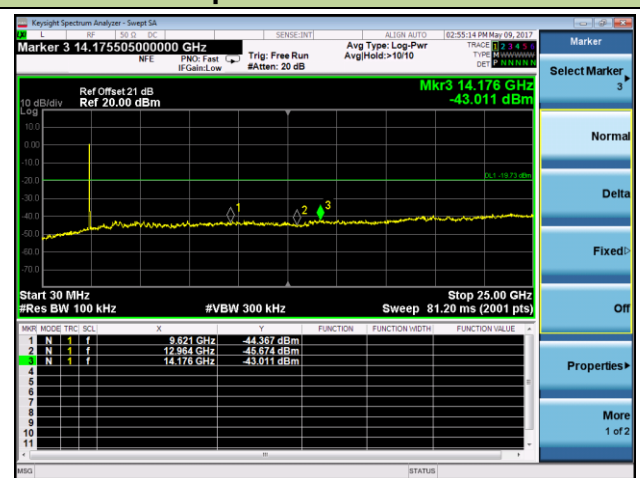


## Channel 11 (2462MHz)


### 100kHz PSD reference Level

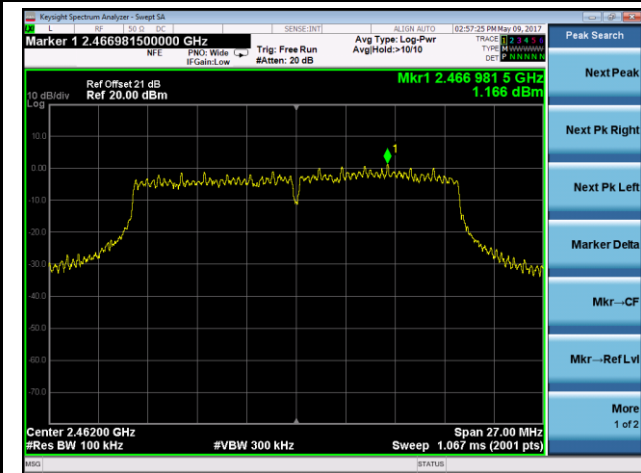

### High Band Edge

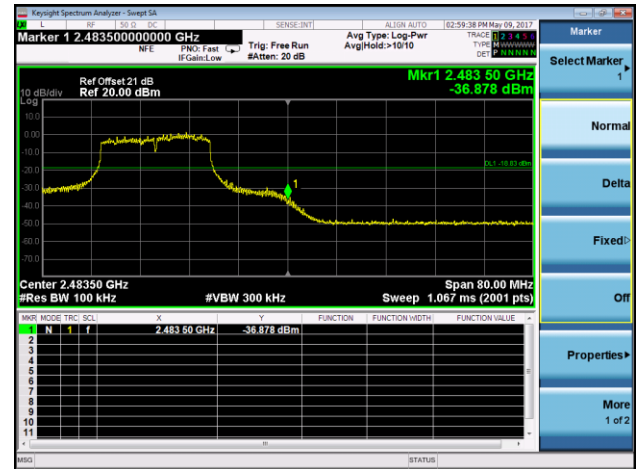

### Spurious Emission

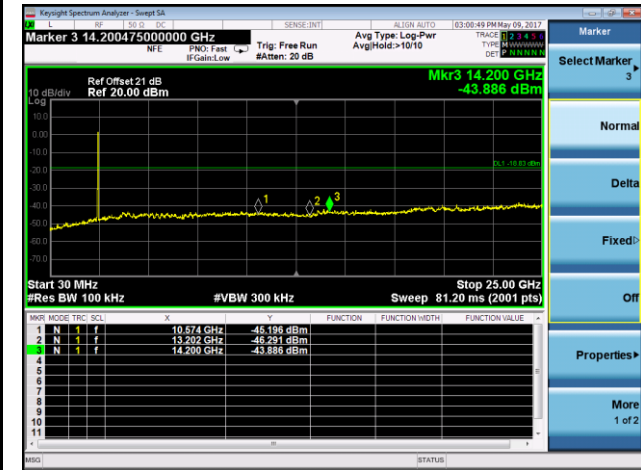

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.6.2. Test Procedure Used

KDB 558074 D01v04 - Section 12.2.3 (quasi-peak measurements)

KDB 558074 D01v04 - Section 12.2.4 (peak power measurements)

KDB 558074 D01v04 - Section 12.2.5 (average power measurements)

### 7.6.3. Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple