

FCC Test Report

Report No.: AGC13372240901FR01

FCC ID : 2ASNS-C2

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Two Way Radio

BRAND NAME : RETEVIS

MODEL NAME : C2

APPLICANT: Shenzhen Retevis Technology Co., Ltd.

DATE OF ISSUE : Oct. 25, 2024

STANDARD(S) : FCC Part 95 Subpart E

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 67

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 25, 2024	Valid	Initial Release




Table of Contents

1. General Information	
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	7
2.3 Related Submittal(S) / Grant (S)	8
2.4 Test Methodology	8
2.5 Calculation of Emission Indicators	8
2.6 Special Accessories	8
2.7 Equipment Modifications	8
2.8 Antenna Requirement	
3. Test Environment	10
3.1 Address of The Test Laboratory	10
3.2 Test Facility	10
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	1′
3.5 List of Equipment Used	12
4. System Test Configuration	13
4.1 EUT Configuration	13
4.2 EUT Exercise	13
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	13
4.5 Summary of Test Results	14
5. Description of Test Modes	
6. Frequency Stability	
6.1 Provisions Applicable	16
6.2 Measurement Procedure	16
6.3 Measurement Setup	16
6.4 Measurement Result	
7. 26dB Emission Bandwidth and 99% Occupied Bandwidth	19
7.1 Provisions Applicable	19
7.2 Measurement Procedure	
7.3 Measurement Setup	
7.4 Measurement Result	
8. Spurious Radiated Emission	24
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup	
8.4 Measurement Result	
8.5 Emission Mask Measurement Part	
9. Modulation Characteristics	45

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/





	9.1 Provisions Applicable	. 45
	9.2 Measurement Procedure	. 45
	9.3 Measurement Setup	. 45
	9.4 Measurement Result	. 46
10	. Maximum Transmitter Power	. 52
	10.1 Provisions Applicable	. 52
	10.2 Measurement Procedure	
	10.3 Measurement Setup	. 53
	10.4 Measurement Result	
11	. Spurious Emission on Antenna Port	. 58
	11.1 Provisions Applicable	. 58
	11.2 Measurement Procedure	. 58
	11.3 Measurement Setup	. 58
	11.4 Measurement Result	
12	. Audio Low Pass Filter Response	. 63
	12.1 Provisions Applicable	
	12.2 Measurement Procedure	
	12.3 Measurement Setup	
	12.4 Measurement Result	
Αr	pendix I: Photographs of Test Setup	
	pendix II: Photographs of Test EUT	



Page 5 of 67

1. General Information

Applicant	Shenzhen Retevis Technology Co., Ltd.
Address	Room 700, 7/F, 13-C, Zhonghaixin Science&Technology Park, No.12 Ganli 6th Road, Jihua Street, Longgang District, Shenzhen, China
Manufacturer	Shenzhen Retevis Technology Co., Ltd.
Address	Room 700, 7/F, 13-C, Zhonghaixin Science&Technology Park, No.12 Ganli 6th Road, Jihua Street, Longgang District, Shenzhen, China
Factory	N/A
Address	N/A
Product Designation	Two Way Radio
Brand Name	RETEVIS
Test Model	C2
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Sep. 14, 2024
Date of Test	Sep. 14, 2024~Oct. 25, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-GMRS-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo zhang	
	Bibo Zhang (Project Engineer)	Oct. 25, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Oct. 25, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Oct. 25, 2024



Page 6 of 67

2. Product Information

2.1 Product Technical Description

Communication Type	Voice / Tone only	
	462.5500MHz-462.7250MHz (GMRS 462 MHz main channels)	
Operation Fraguency Bongs	462.5625MHz-462.7125MHz (GMRS 462 MHz interstitial channels)	
Operation Frequency Range	467.5500MHz-467.7250MHz (GMRS 467 MHz main channels)	
	467.5625MHz-467.7125MHz (GMRS 467 MHz interstitial channels)	
Hardware Version	C2 V1.7	
Software Version	C2 version V2.1	
Modulation Type	FM	
Channel Separation	12.5 kHz/25 kHz	
Emission Bandwidth	9.825 kHz (5W-12.5kHz), 9.834 kHz (0.5W-12.5kHz)	
Emission bandwidin	15.004 kHz (5W-25kHz), 15.006 kHz (0.5W-25kHz)	
Emission Designator	11K0F3E/16K0F3E	
Number of Channels:	30 Channels	
Rated Output Power	5W/0.5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)	
Maximum Transmitter Power	36.91dBm (5W-12.5kHz) 26.93dBm (0.5W-12.5kHz)	
Maximum Hansmiller Fower	36.93dBm (5W-25kHz) 26.95dBm (0.5W-25kHz)	
Antenna Designation	Detachable Antenna	
Antenna Gain	1.5dBi	
Frequency Tolerance	1.099ppm	
Power Supply	DC 7.4V 2000mAh	



Page 7 of 67

2.2 Test Frequency List

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Channel. No	CH. Freq	Rated Power	CH. No	CH. Freq	Rated Power
1	462.5625		15	462.5500	
2	462.5875		16	462.5750	
3	462.6125		17	462.6000	
4	462.6375	5W	18	462.6250	5W
5	462.6625		19	462.6500	SVV
6	462.6875		20	462.6750	
7	462.7125		21	462.7000	
8	467.5625		22	462.7250	
9	467.5875		23	467.5500	
10	467.6125		24	467.5750	
11	467.6375	0.5W	25	467.6000	
12	467.6625		26	467.6250	5W
13	467.6875		27	467.6500	300
14	467.7125		28	467.6750	
			29	467.7000	
			30	467.7250	



Report No.: AGC13372240901FR01 Page 8 of 67

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2ASNS-C2**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title	
1	FCC 47 CFR Part 95	Personal Radio Services	
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations	
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	
5	KDB 888861 D01	888861 D01 Part 95 GMRS FRS v01	

2.5 Calculation of Emission Indicators

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

For FM Mode (Channel Spacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 2.5 kHz) = 11 kHz = 11KO

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 5.0 kHz) = 16 kHz = 16K0

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

2.6 Special Accessories

Not available for this EUT intended for grant.

2.7 Equipment Modifications

Not available for this EUT intended for grant.



Page 9 of 67

2.8 Antenna Requirement

Excerpt from §95.1787 of the FCC Rules/Regulations:

The antenna of each GMRS Transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the GMRS unit.
- (2) Digital data transmissions may contain location information, or requesting location information from one or more other GMRS or FRS units, or containing a brief text message to another specific GMRS or FRS unit. Digital data transmissions may be initiated by a manual action of the operator or on an automatic or periodic basis, and a GMRS unit receiving an interrogation request may automatically respond with its location.
- (3) GMRS units must not be capable of transmitting digital data on the 467 MHz main channels.
- (4) Digital data transmissions must not exceed one second in duration.

User	Applicable Conditions		
	This GMRS device does not support digital transmission		
	The antenna of this device is permanently attached.		
\boxtimes	Configuration with external detachable antenna		
	☐ This GMRS device has a fixed antenna port		
Conclusion: The unit complies with the requirement of §95.1787.			



Page 10 of 67

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 11 of 67

3.3 Environmental Conditions

	Normal Conditions	Extreme Conditions
Temperature range (°C)	15 - 35	-30 - 50
Relative humidty range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Power supply	DC 7.4V	LV DC 6.29V/HV DC 8.51V
i ower suppry	DC 7.4V	LV DC 0.23V/11V DC 0.31V

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	±0.5%
Transmitter power conducted	±0.8dB
Transmitter power Radiated	±1.3dB
Conducted spurious emission 9kHz-40 GHz	±2.7dB
Conducted Emission	±3.2 dB
Radiated Emission below 1GHz	±3.9 dB
Radiated Emission above 1GHz	±4.8 dB
Occupied Channel Bandwidth	±2 %
FM deviation	±2 %
Audio level	±0.98dB
Low Pass Filter Response	±0.65dB
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %



Report No.: AGC13372240901FR01 Page 12 of 67

3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E086	Spectrum Analyzer	KEYSIGHT	N9020A	MY53300860	2024-05-23	2025-05-22		
\boxtimes	AGC-EM-E002	Wireless Connectivity Tester	HP	8920B	US35010161	2024-05-24	2025-05-23		
	AGC-ER-E059	Signal Generator	Agilent	N5182B	MY53050647	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2024-05-23	2025-05-22		
\boxtimes	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2024-07-24	2026-07-23		
	AGC-EM-A007	30dB Attenuator	Weinachel	58-30-33	ML030	2023-06-01	2025-05-31		
\boxtimes	AGC-EM-E040	Directional coupler	Werlatone	C5571-10	99463	2024-02-01	2026-01-31		
\boxtimes		RF Connection Cable	N/A	1#	N/A	Each time	N/A		
		RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2025-01-04	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2025-03-22	
\boxtimes	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2025-06-02	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-11-13	2024-11-12	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2024-05-28	2026-05-27	
\boxtimes	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2024-05-23	2025-05-22	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
\boxtimes	AGC-EM-A088	UHF Filter	Microwave	N26460M1	498705	2024-05-23	2025-05-22	

• Te	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
\boxtimes	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0			



Page 13 of 67

4. System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

4.4 Equipment Used in Tested System

Th The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	Huawei	HW-200440C00	Input(AC):100V-240V 50/60Hz 2.4A Output(DC):USB-C(5V/3A)	1.0m unshielded

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Battery	BL2	Retevis	Retevis DC 7.4V 2000mAh	
2	Charger	DC2	Retevis	Input: AC 5V 1A Output: DC 8.4V 0.5A	N/A
3	Lanyard	N/A	N/A	N/A	0.5m unshielded
4	Back Clip	N/A	N/A	N/A	N/A



Page 14 of 67

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	FCC 47 CFR PART 95	Antenna Equipment	Pass
2	§ 95.1767& 2.1046(a)	Maximum Transmitter Power	Pass
3	§95.1775& 2.1047(a) (b)	Modulation Limit	Pass
4	§95.1775& 2.1047(a)	Audio Frequency Response	Pass
4	§95.1775(e)	Audio Low Pass Filter Response	Pass
5	§95.1773& 2.1049	26dB Emission Bandwidth and 99% Occupied Bandwidth	Pass
6	§95.1779& 2.1049	Emission Mask	Pass
7	§95.1765& 2.1055(a) (1)	Frequency Stability	Pass
9	§95.1779& 2.1051	Spurious Emission on Antenna Port	Pass
10	§95.1779& 2.1053	Spurious Radiated Emission	Pass



Page 15 of 67

5. Description of Test Modes

The EUT (**Two Way Radio**) has been tested under normal operating condition. (GMRS TX) are chosen for testing at each channel separation.

No.	Test Mode Description	Channel Separation
1	GMRS TX Channel 4	12.5/25 kHz
2	GMRS TX Channel 11	12.5 kHz
3	GMRS TX Channel 19	12.5/25 kHz
4	GMRS TX Channel 27	12.5/25 kHz

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details



Report No.: AGC13372240901FR01 Page 16 of 67

6. Frequency Stability

6.1 Provisions Applicable

Standard Applicable [Part 95.1765] The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

- The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth of 12.5 kHz or less must remain within 2.5 ppm
- The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth greater than 12.5 kHz must remain within 5 ppm

6.2 Measurement Procedure


6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
 Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 7.4V.
- Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 Measurement Setup

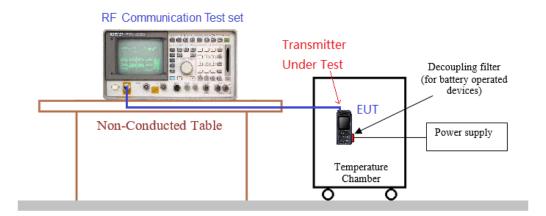




Report No.: AGC13372240901FR01 Page 17 of 67

6.4 Measurement Result

	12.5 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS-5W								
Test conditions			Frequency	error (ppm)					
Voltage	Temp		Test Freque	ency (MHz)		Limit (ppm)	Result		
(V)	(℃)	462.6375	462.6500	467.6500	/				
	-30	0.492	0.653	1.045	/				
	-20	0.959	0.901	0.629	/		Pass		
	-10	0.792	1.050	0.606	/	2.5			
	0	0.566	0.797	0.799	/				
7.40	10	0.512	0.588	0.659	/				
	20	0.873	0.517	0.924	/				
	30	0.889	0.847	0.830	/				
	40	0.997	0.753	0.762	/				
	50	0.888	1.009	0.849	/				
8.51	20	0.920	0.545	0.596	/				
6.29	20	0.665	0.517	0.975	/				

	12.5 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS-0.5W								
Test c	onditions								
Voltage	Temp		Test Freque	ency (MHz)		Limit (ppm)	Result		
(V)	(℃)	462.6375	462.6500	467.6500	467.6375	(ββ)			
	-30	0.492 0.653 1.045	0.794						
	-20	0.959	0.901	0.629	0.388				
	-10	0.792	1.050	0.606	0.847				
	0	0.566	0.797	0.799	0.661				
7.40	10	0.512	0.588	0.659	0.925				
	20	0.873	0.517	0.924	0.459	2.5	Pass		
	30	0.889	0.847	0.830	0.385				
	40	0.997	0.753	0.762	0.835				
	50	0.888	1.009	0.849	0.571				
8.51	20	0.920	0.545	0.596	0.533				
6.29	20	0.665	0.517	0.975	0.901				





	25 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS-5W							
Test c	onditions		Frequency	error (ppm)				
Voltage	Temp		Test Frequ	ency (MHz)		Limit (ppm)	Result	
(V)	(℃)	462.6375	462.6500	467.6500	/	(ββιιι)		
	-30	0.724	0.844	0.844	/			
	-20	0.896	0.837	1.092	/			
	-10	1.090	0.783	0.790	/			
	0	0.612	0.921	0.608	/			
7.40	10	0.815	0.720	0.549	/			
	20	0.755	0.961	0.958	/	5	Pass	
	30	0.891	0.678	0.680	/			
	40	1.036	1.000	0.994	/			
	50	1.099	0.878	0.846	/			
8.51	20	0.905	0.567	0.673	/			
6.29	20	0.997	0.919	0.673	/			

	25 kHz Channel Separation, FM modulation, Assigned Frequency For GMRS-0.5W								
Test c	onditions		Frequency	error (ppm)					
Voltage	Temp		Test Freque	ency (MHz)		Limit (ppm)	Result		
(V)	(℃)	462.6375	462.6500	467.6500	/	(PP)			
	-30	0.724	0.844	0.844	/				
	-20	0.896	0.837	1.092	/				
	-10	1.090	0.783	0.790	/				
	0	0.612	0.921	0.608	/				
7.40	10	0.815	0.720	0.549	/				
	20	0.755	0.961	0.958	/	5	Pass		
	30	0.891	0.678	0.680	/				
	40	1.036	1.000	0.994	/				
	50	1.099	0.878	0.846	/				
8.51	20	0.905	0.567	0.673	/]			
6.29	20	0.997	0.919	0.673	/				



Report No.: AGC13372240901FR01 Page 19 of 67

7. 26dB Emission Bandwidth and 99% Occupied Bandwidth

7.1 Provisions Applicable

FCC Part 95.1773: GMRS Main channels: the authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz main channels, or any of the 467 MHz main channels.


Interstitial channels:

The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz interstitial channels, and is 12.5 kHz for GMRS transmitters operating on any of the 467 MHz interstitial channels. Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

7.2 Measurement Procedure

- The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.
- 2. For rated system deviation is 2.5 kHz for 12.5kHz channel spacing.
- 3. For rated system deviation is 3.0 kHz for 25kHz channel spacing.
- 4. Spectrum set as follow:
- 5. Centre frequency = Fundamental Frequency
- 6. Span=50kHz for 12.5kHz Channel Spacing, RBW=300Hz, VBW=1kHz, Sweep = Auto.
- 7. Span=50kHz for 25kHz Channel Spacing, RBW=300Hz, VBW=1kHz, Sweep = Auto.
- 8. Detector Function = Peak, Trace = Max Hold
- 9. Set 99% Occupied Bandwidth and 26dB Emission Bandwidth.
- 10. Measure and record the results in the test report.

7.3 Measurement Setup

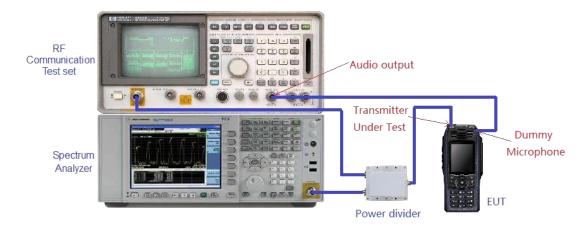




Page 20 of 67

7.4 Measurement Result


	Emission Bandwidth Measurement Result-GMRS-5W							
Operating Frequency		12.5 kHz Channel Sepa	ration					
(MHz)	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Limits (kHz)	Result				
462.6375	9.816	10.45	20.0	Pass				
462.6500	9.825	10.46	20.0	Pass				
467.6500	9.802	10.44	20.0	Pass				
	Emission Bandwidth Measu	urement Result-GMRS-0	.5W					
Operating Frequency	12.5 kHz Channel Separation							
(MHz)	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Limits (kHz)	Result				
462.6375	9.820	10.46	20.0	Pass				
462.6500	9.832	10.45	20.0	Pass				
467.6500	9.801	10.44	20.0	Pass				
467.6375	9.834	10.47	12.5	Pass				


	Emission Bandwidth Meas	surement Result-GMRS-	5W						
Operating Frequency	25 kHz Channel Separation								
(MHz)	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Limits (kHz)	Result					
462.6375	15.004	15.68	20.0	Pass					
462.6500	14.999	15.71	20.0	Pass					
467.6500	14.973	15.60	20.0	Pass					
	Emission Bandwidth Measu	rement Result-GMRS-0	.5W						
Operating Frequency	25 kHz Channel Separation								
(MHz)	Occupied Bandwidth (kHz)	Emission Bandwidth (kHz)	Limits (kHz)	Result					
462.6375	14.999	15.71	20.0	Pass					
462.6500	15.006	15.68	20.0	Pass					
467.6500	14.974	15.67	20.0	Pass					







Test plot as follows:

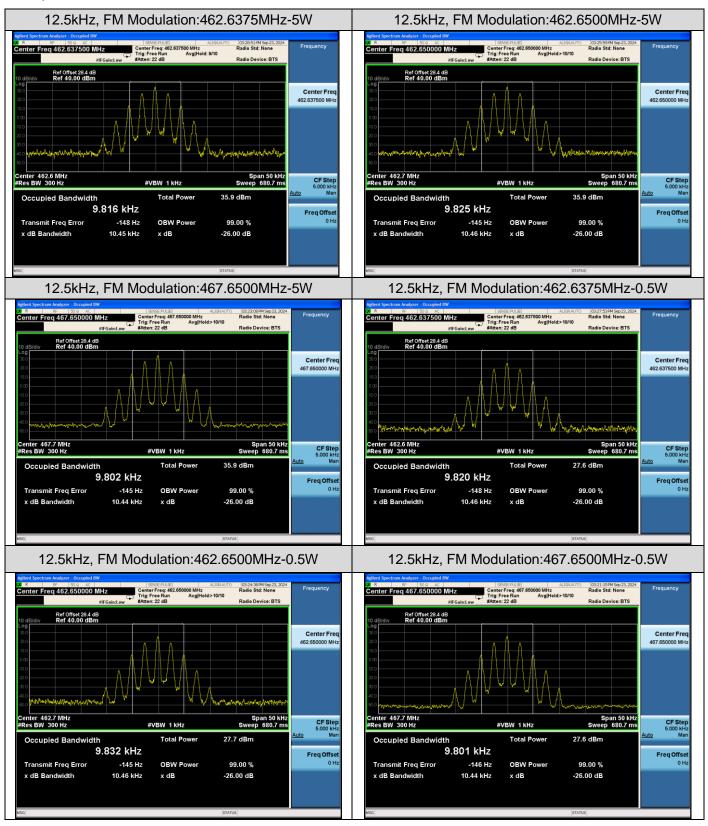






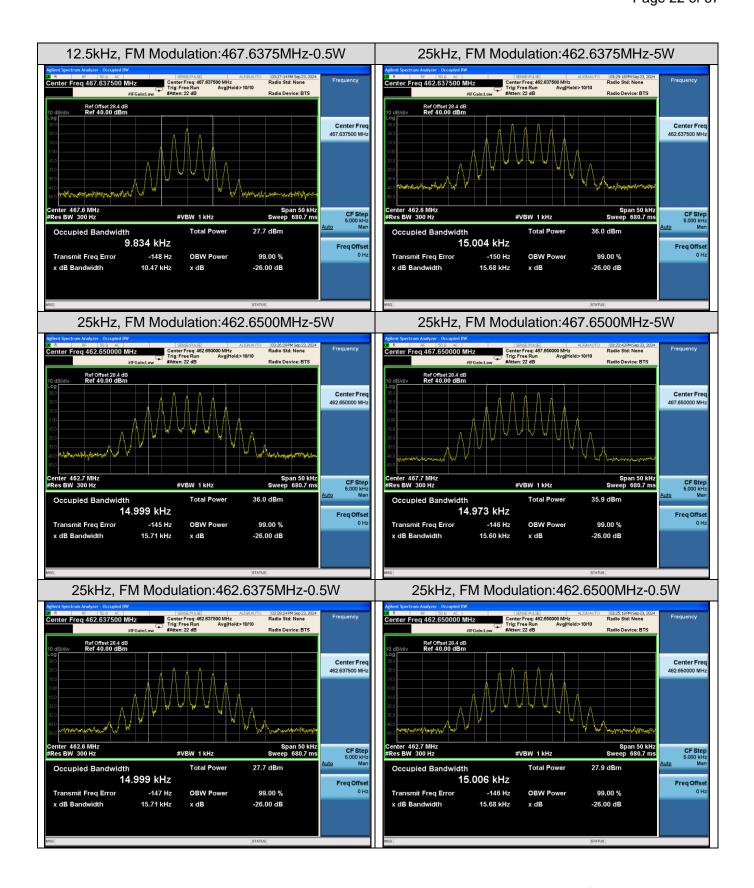





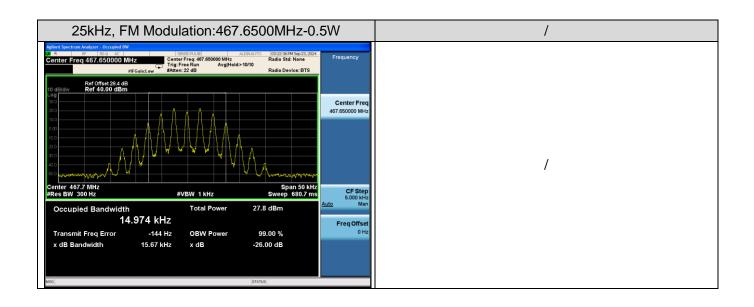



Report No.: AGC13372240901FR01 Page 24 of 67

8. Spurious Radiated Emission

8.1 Provisions Applicable

Standard Applicable [FCC Part 95.1779] According to FCC section 95.1779, the unwanted emission should be attenuated below TP by at least 43+10 log (Transmit Power) dB

8.2 Measurement Procedure

Each GMRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section

a) Emission masks. Emission masks applicable to transmitting equipment in the GMRS are defined by the requirements in the following table. The numbers in the attenuation requirements column refer to rule paragraph numbers under paragraph (b) of this section.

Emission types filter	Attenuation requirements
A1D, A3E, F1D, G1D, F2D, F3E, G3E with audio filter	(1), (2), (7)
A1D, A3E, F1D, G1D, F3E, G3E without audio filter	(3), (4), (7)
H1D, J1D, R1D, H3E, J3E, R2E	(5), (6), (7)

- Filtering noted for GMRS transmitters refers to the requirement in §95.1775(e).
- 2) Unwanted emission power may be measured as either mean power or peak envelope power, provided that the transmitter output power is measured the same way.
- b) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:
- 1) 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 3) 83 log (fd ÷ 5) dB on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz up to and including 10 kHz.
- 4) 116 log (fd ÷ 6.1) dB or 50 + 10 log (P) dB, whichever is the lesser attenuation, on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz), of more than 10 kHz up to and including 250% of the authorized bandwidth.
- 5) 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 150% of the authorized bandwidth.
- 6) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 150% up to and including 250% of the authorized bandwidth.
- 7) 43 + 10 log (P) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.




Page 25 of 67

Detailed Overview of the Test Method is as Follows:


- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set 3) Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The 6) measurement results are amend as described below:Power(EIRP)=PMea- Pcl - Ga
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi. 8)
- Test the EUT in the lowest channel, the middle channel the Highest channel


8.3 Measurement Setup







Radiated Emissions 30MHz to 1GHz Test setup

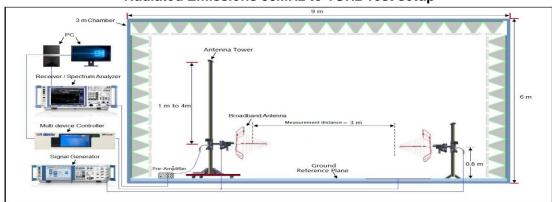

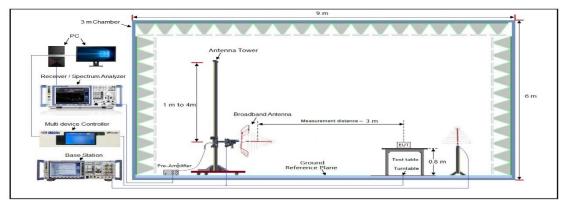

Radiated Emissions Above 1GHz Test setup

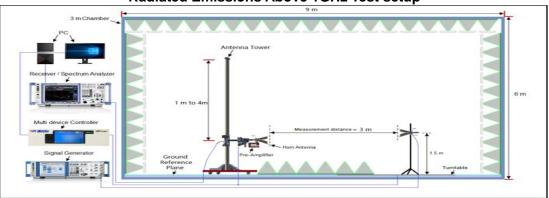

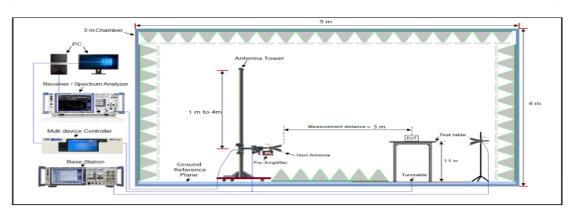




Page 27 of 67


8.4 Measurement Result

Preliminary calculation	Final Result
At least 43+10 log (P) =43+10log (5) =49.99 (dB)	Limit=P- Preliminary calculation=36.99-49.99=-13 dBm
At least 43+10 log (P) =43+10log (0.5) =39.99 (dB)	Limit=P- Preliminary calculation=26.99-39.99=-13 dBm


- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)
- 3. Margin=Limit- Level






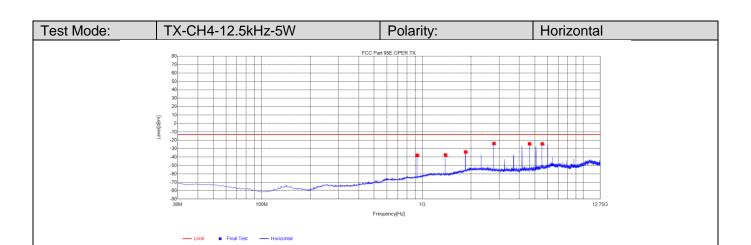


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-75.79	-37.73	-13.00	24.73	38.06	107	Horizontal
2	1387.7888	-33.30	-37.41	-13.00	24.41	-4.11	66	Horizontal
3	1850.7851	-34.03	-33.85	-13.00	20.85	0.18	35	Horizontal
4	2775.6026	-25.76	-23.79	-13.00	10.79	1.97	319	Horizontal
5	4626.4126	-28.67	-24.10	-13.00	11.10	4.57	35	Horizontal
6	5552.4052	-30.08	-24.20	-13.00	11.20	5.88	76	Horizontal

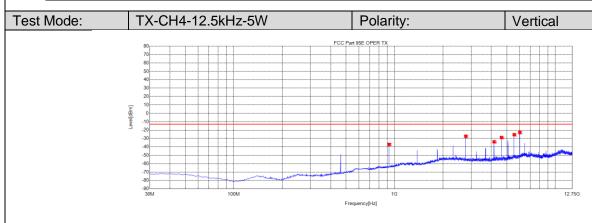


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-75.14	-37.08	-13.00	24.08	38.06	1	Vertical
2	2775.6026	-29.30	-27.33	-13.00	14.33	1.97	37	Vertical
3	4163.4163	-37.07	-33.94	-13.00	20.94	3.13	353	Vertical
4	4626.4126	-33.38	-28.81	-13.00	15.81	4.57	180	Vertical
5	5552.4052	-31.35	-25.47	-13.00	12.47	5.88	201	Vertical
6	6014.2264	-29.57	-22.85	-13.00	9.85	6.72	180	Vertical





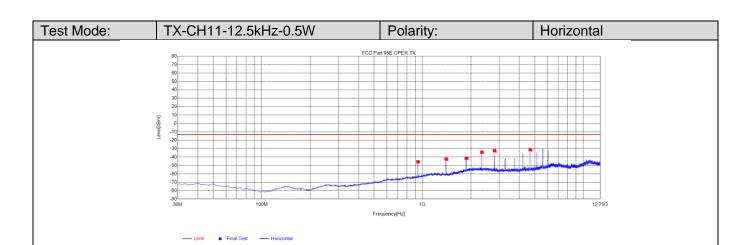


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-83.82	-45.58	-13.00	32.58	38.24	248	Horizontal
2	1403.0653	-38.22	-42.33	-13.00	29.33	-4.11	57	Horizontal
3	1870.7621	-41.66	-41.22	-13.00	28.22	0.44	36	Horizontal
4	2338.4588	-36.48	-34.12	-13.00	21.12	2.36	341	Horizontal
5	2806.1556	-34.24	-32.33	-13.00	19.33	1.91	320	Horizontal
6	4676.9427	-35.70	-31.08	-13.00	18.08	4.62	36	Horizontal

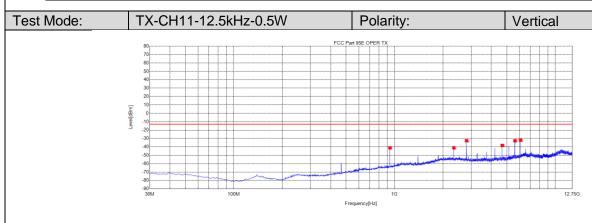


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-79.43	-41.19	-13.00	28.19	38.24	359	Vertical
2	2338.4588	-43.44	-41.08	-13.00	28.08	2.36	84	Vertical
3	2806.1556	-34.54	-32.63	-13.00	19.63	1.91	28	Vertical
4	4676.9427	-42.86	-38.24	-13.00	25.24	4.62	179	Vertical
5	5612.3362	-38.65	-32.66	-13.00	19.66	5.99	210	Vertical
6	6080.033	-38.87	-32.02	-13.00	19.02	6.85	190	Vertical


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





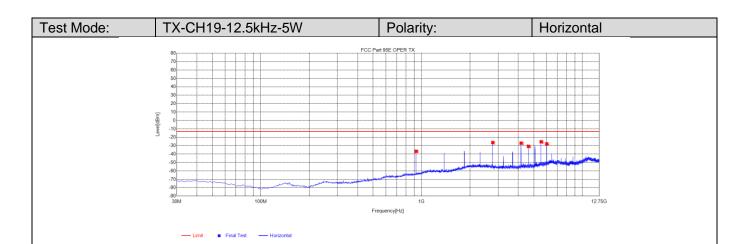


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-74.70	-36.64	-13.00	23.64	38.06	117	Horizontal
2	2775.6026	-28.24	-26.27	-13.00	13.27	1.97	312	Horizontal
3	4164.5915	-30.06	-26.92	-13.00	13.92	3.14	312	Horizontal
4	4626.4126	-35.29	-30.72	-13.00	17.72	4.57	24	Horizontal
5	5552.4052	-31.23	-25.35	-13.00	12.35	5.88	270	Horizontal
6	6014.2264	-34.47	-27.75	-13.00	14.75	6.72	270	Horizontal

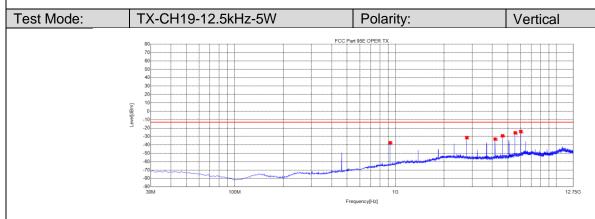


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-75.59	-37.53	-13.00	24.53	38.06	28	Vertical
2	2775.6026	-33.34	-31.37	-13.00	18.37	1.97	38	Vertical
3	4164.5915	-36.22	-33.08	-13.00	20.08	3.14	1	Vertical
4	4626.4126	-33.77	-29.20	-13.00	16.20	4.57	186	Vertical
5	5552.4052	-31.54	-25.66	-13.00	12.66	5.88	204	Vertical
6	6014.2264	-30.80	-24.08	-13.00	11.08	6.72	186	Vertical


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






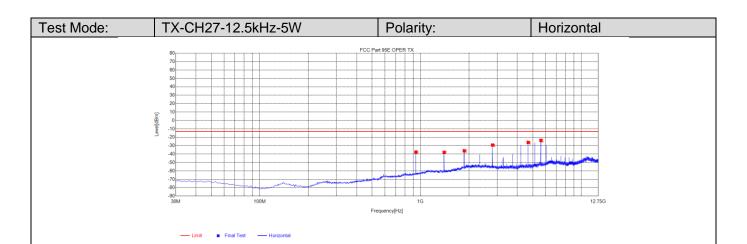


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-75.80	-37.56	-13.00	24.56	38.24	272	Horizontal
2	1403.0653	-33.83	-37.94	-13.00	24.94	-4.11	46	Horizontal
3	1870.7621	-36.46	-36.02	-13.00	23.02	0.44	25	Horizontal
4	2806.1556	-31.13	-29.22	-13.00	16.22	1.91	121	Horizontal
5	4676.9427	-30.71	-26.09	-13.00	13.09	4.62	36	Horizontal
6	5612.3362	-29.67	-23.68	-13.00	10.68	5.99	67	Horizontal

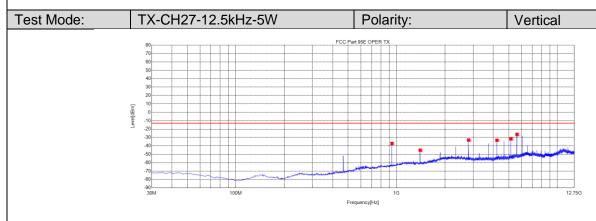


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-75.39	-37.15	-13.00	24.15	38.24	350	Vertical
2	1403.0653	-41.05	-45.16	-13.00	32.16	-4.11	9	Vertical
3	2806.1556	-35.00	-33.09	-13.00	20.09	1.91	29	Vertical
4	4209.2459	-36.61	-33.30	-13.00	20.30	3.31	360	Vertical
5	5144.6395	-36.87	-31.65	-13.00	18.65	5.22	358	Vertical
6	5612.3362	-32.28	-26.29	-13.00	13.29	5.99	206	Vertical






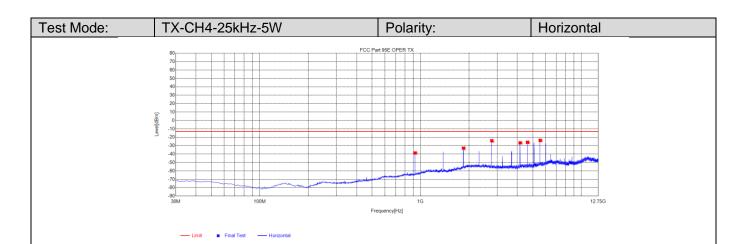


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-76.73	-38.67	-13.00	25.67	38.06	114	Horizontal
2	1850.7851	-33.08	-32.90	-13.00	19.90	0.18	34	Horizontal
3	2775.6026	-26.06	-24.09	-13.00	11.09	1.97	318	Horizontal
4	4163.4163	-29.73	-26.60	-13.00	13.60	3.13	55	Horizontal
5	4626.4126	-30.52	-25.95	-13.00	12.95	4.57	45	Horizontal
6	5552.4052	-29.55	-23.67	-13.00	10.67	5.88	66	Horizontal

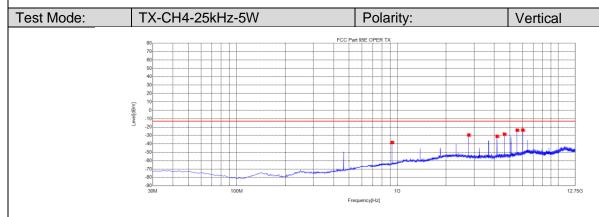


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-76.38	-38.32	-13.00	25.32	38.06	28	Vertical
2	2775.6026	-31.39	-29.42	-13.00	16.42	1.97	38	Vertical
3	4163.4163	-34.13	-31.00	-13.00	18.00	3.13	353	Vertical
4	4626.4126	-33.06	-28.49	-13.00	15.49	4.57	174	Vertical
5	5552.4052	-29.54	-23.66	-13.00	10.66	5.88	194	Vertical
6	6014.2264	-30.25	-23.53	-13.00	10.53	6.72	184	Vertical





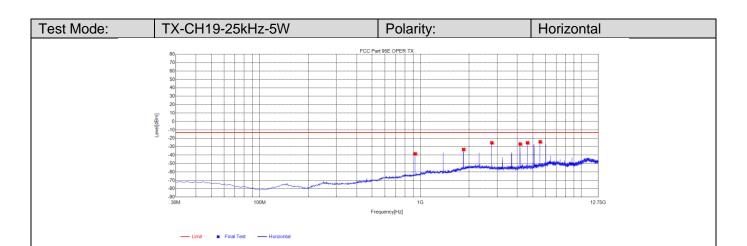


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-76.50	-38.44	-13.00	25.44	38.06	112	Horizontal
2	1850.7851	-33.45	-33.27	-13.00	20.27	0.18	29	Horizontal
3	2775.6026	-27.36	-25.39	-13.00	12.39	1.97	322	Horizontal
4	4163.4163	-29.95	-26.82	-13.00	13.82	3.13	40	Horizontal
5	4626.4126	-29.93	-25.36	-13.00	12.36	4.57	40	Horizontal
6	5552.4052	-30.09	-24.21	-13.00	11.21	5.88	81	Horizontal

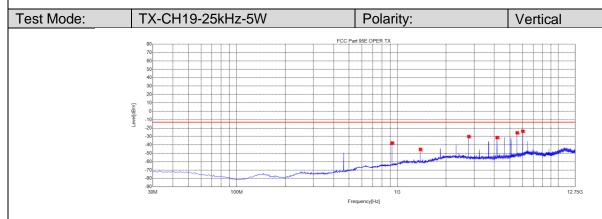


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-75.83	-37.77	-13.00	24.77	38.06	30	Vertical
2	1387.7888	-41.27	-45.38	-13.00	32.38	-4.11	10	Vertical
3	2775.6026	-32.10	-30.13	-13.00	17.13	1.97	41	Vertical
4	4164.5915	-34.51	-31.37	-13.00	18.37	3.14	10	Vertical
5	5552.4052	-31.50	-25.62	-13.00	12.62	5.88	194	Vertical
6	6014.2264	-30.43	-23.71	-13.00	10.71	6.72	184	Vertical


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






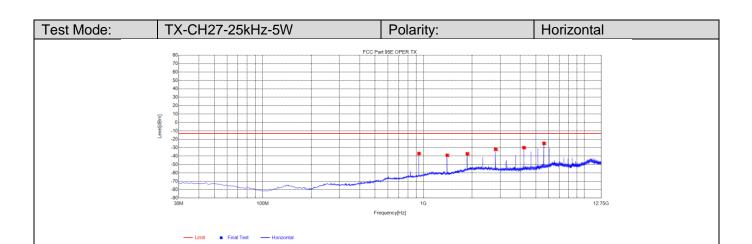


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-75.14	-36.90	-13.00	23.90	38.24	123	Horizontal
2	1403.0653	-34.88	-38.99	-13.00	25.99	-4.11	48	Horizontal
3	1870.7621	-37.58	-37.14	-13.00	24.14	0.44	17	Horizontal
4	2806.1556	-33.73	-31.82	-13.00	18.82	1.91	321	Horizontal
5	4209.2459	-33.20	-29.89	-13.00	16.89	3.31	17	Horizontal
6	5612.3362	-30.76	-24.77	-13.00	11.77	5.99	59	Horizontal

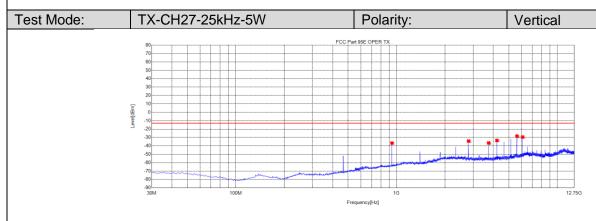


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-74.93	-36.69	-13.00	23.69	38.24	353	Vertical
2	2806.1556	-36.13	-34.22	-13.00	21.22	1.91	26	Vertical
3	3741.5492	-38.92	-36.53	-13.00	23.53	2.39	282	Vertical
4	4209.2459	-36.87	-33.56	-13.00	20.56	3.31	1	Vertical
5	5612.3362	-34.32	-28.33	-13.00	15.33	5.99	205	Vertical
6	6080.033	-36.30	-29.45	-13.00	16.45	6.85	184	Vertical





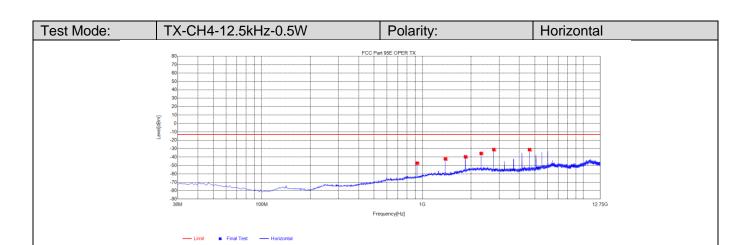


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-85.24	-47.18	-13.00	34.18	38.06	261	Horizontal
2	1387.7888	-38.01	-42.12	-13.00	29.12	-4.11	72	Horizontal
3	1850.7851	-39.82	-39.64	-13.00	26.64	0.18	30	Horizontal
4	2313.7814	-37.92	-35.59	-13.00	22.59	2.33	323	Horizontal
5	2775.6026	-33.03	-31.06	-13.00	18.06	1.97	312	Horizontal
6	4626.4126	-35.65	-31.08	-13.00	18.08	4.57	41	Horizontal

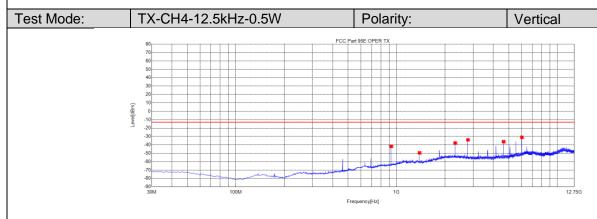


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-79.90	-41.84	-13.00	28.84	38.06	10	Vertical
2	1387.7888	-45.36	-49.47	-13.00	36.47	-4.11	160	Vertical
3	2313.7814	-40.01	-37.68	-13.00	24.68	2.33	80	Vertical
4	2775.6026	-36.00	-34.03	-13.00	21.03	1.97	38	Vertical
5	4626.4126	-40.75	-36.18	-13.00	23.18	4.57	180	Vertical
6	6014.2264	-37.63	-30.91	-13.00	17.91	6.72	180	Vertical


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






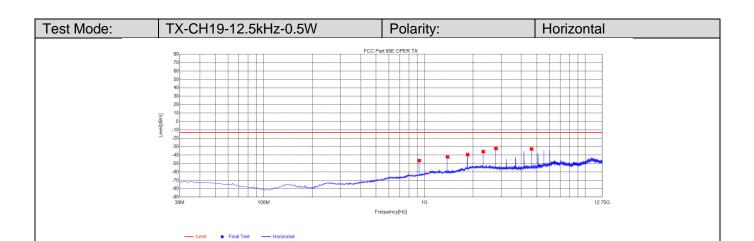


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-84.56	-46.50	-13.00	33.50	38.06	233	Horizontal
2	1387.7888	-37.98	-42.09	-13.00	29.09	-4.11	70	Horizontal
3	1850.7851	-39.51	-39.33	-13.00	26.33	0.18	38	Horizontal
4	2313.7814	-38.09	-35.76	-13.00	22.76	2.33	322	Horizontal
5	2775.6026	-33.97	-32.00	-13.00	19.00	1.97	311	Horizontal
6	4626.4126	-37.16	-32.59	-13.00	19.59	4.57	28	Horizontal

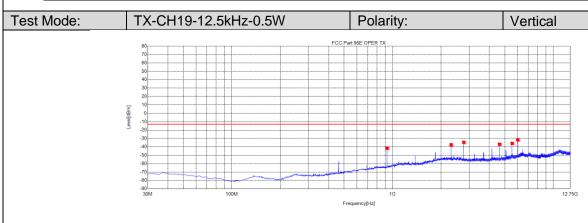


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-79.75	-41.69	-13.00	28.69	38.06	10	Vertical
2	2313.7814	-39.82	-37.49	-13.00	24.49	2.33	79	Vertical
3	2775.6026	-36.58	-34.61	-13.00	21.61	1.97	37	Vertical
4	4626.4126	-41.47	-36.90	-13.00	23.90	4.57	169	Vertical
5	5552.4052	-41.77	-35.89	-13.00	22.89	5.88	200	Vertical
6	6014.2264	-38.35	-31.63	-13.00	18.63	6.72	180	Vertical






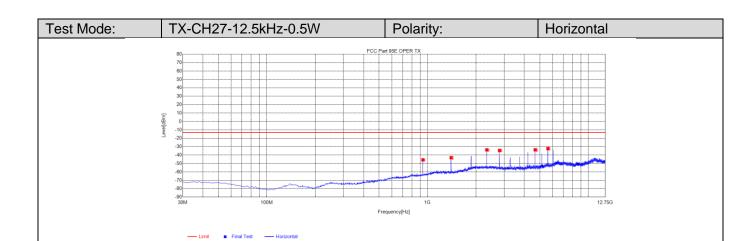


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-83.89	-45.65	-13.00	32.65	38.24	249	Horizontal
2	1403.0653	-38.93	-43.04	-13.00	30.04	-4.11	61	Horizontal
3	2338.4588	-36.10	-33.74	-13.00	20.74	2.36	335	Horizontal
4	2806.1556	-36.41	-34.50	-13.00	21.50	1.91	313	Horizontal
5	4676.9427	-38.30	-33.68	-13.00	20.68	4.62	31	Horizontal
6	5612.3362	-38.18	-32.19	-13.00	19.19	5.99	79	Horizontal

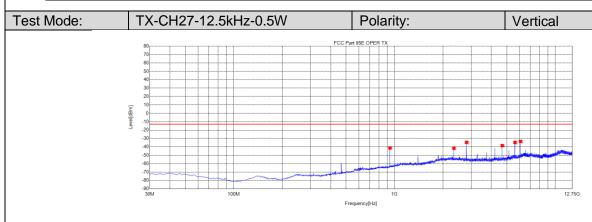


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-79.58	-41.34	-13.00	28.34	38.24	360	Vertical
2	2338.4588	-43.88	-41.52	-13.00	28.52	2.36	82	Vertical
3	2806.1556	-36.51	-34.60	-13.00	21.60	1.91	39	Vertical
4	4676.9427	-43.14	-38.52	-13.00	25.52	4.62	184	Vertical
5	5612.3362	-40.65	-34.66	-13.00	21.66	5.99	204	Vertical
6	6080.033	-40.31	-33.46	-13.00	20.46	6.85	194	Vertical






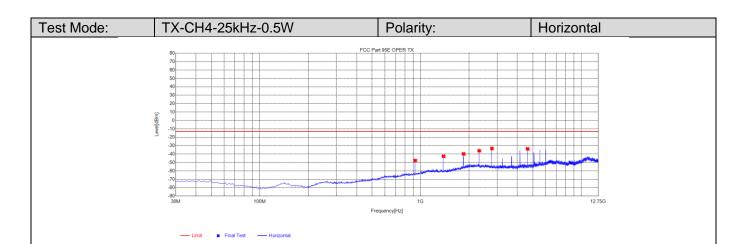


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-85.59	-47.53	-13.00	34.53	38.06	239	Horizontal
2	1387.7888	-38.41	-42.52	-13.00	29.52	-4.11	72	Horizontal
3	1850.7851	-39.82	-39.64	-13.00	26.64	0.18	34	Horizontal
4	2313.7814	-38.32	-35.99	-13.00	22.99	2.33	323	Horizontal
5	2775.6026	-35.24	-33.27	-13.00	20.27	1.97	239	Horizontal
6	4626.4126	-38.27	-33.70	-13.00	20.70	4.57	34	Horizontal

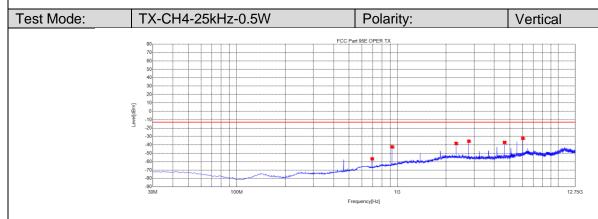


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	694.45	-91.61	-56.60	-13.00	43.60	35.01	101	Vertical
2	926.28	-80.39	-42.33	-13.00	29.33	38.06	1	Vertical
3	2313.7814	-40.59	-38.26	-13.00	25.26	2.33	80	Vertical
4	2775.6026	-37.62	-35.65	-13.00	22.65	1.97	18	Vertical
5	4626.4126	-41.60	-37.03	-13.00	24.03	4.57	184	Vertical
6	6014.2264	-38.88	-32.16	-13.00	19.16	6.72	174	Vertical





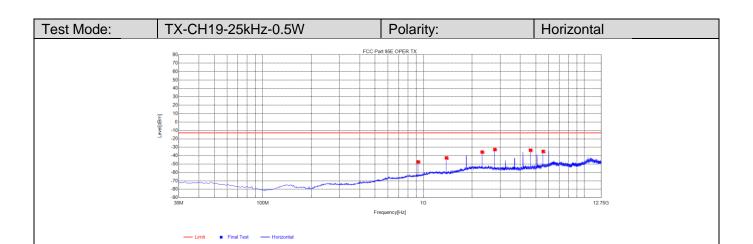


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-85.49	-47.43	-13.00	34.43	38.06	260	Horizontal
2	1387.7888	-38.56	-42.67	-13.00	29.67	-4.11	75	Horizontal
3	2313.7814	-38.05	-35.72	-13.00	22.72	2.33	301	Horizontal
4	2775.6026	-34.76	-32.79	-13.00	19.79	1.97	322	Horizontal
5	4626.4126	-38.11	-33.54	-13.00	20.54	4.57	44	Horizontal
6	5552.4052	-40.88	-35.00	-13.00	22.00	5.88	75	Horizontal

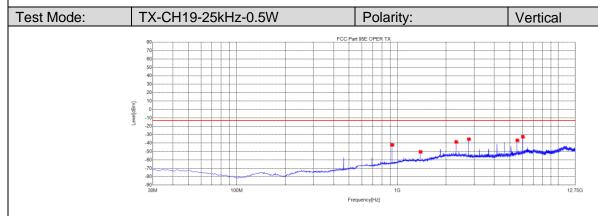


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.28	-80.16	-42.10	-13.00	29.10	38.06	18	Vertical
2	1387.7888	-46.26	-50.37	-13.00	37.37	-4.11	169	Vertical
3	2313.7814	-40.83	-38.50	-13.00	25.50	2.33	75	Vertical
4	2775.6026	-37.24	-35.27	-13.00	22.27	1.97	37	Vertical
5	5552.4052	-42.47	-36.59	-13.00	23.59	5.88	200	Vertical
6	6014.2264	-39.07	-32.35	-13.00	19.35	6.72	190	Vertical


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





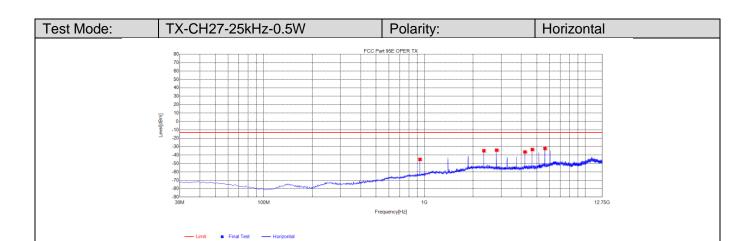


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-83.36	-45.12	-13.00	32.12	38.24	245	Horizontal
2	2338.4588	-37.15	-34.79	-13.00	21.79	2.36	331	Horizontal
3	2806.1556	-36.03	-34.12	-13.00	21.12	1.91	214	Horizontal
4	4209.2459	-39.51	-36.20	-13.00	23.20	3.31	42	Horizontal
5	4676.9427	-37.94	-33.32	-13.00	20.32	4.62	42	Horizontal
6	5612.3362	-38.01	-32.02	-13.00	19.02	5.99	64	Horizontal

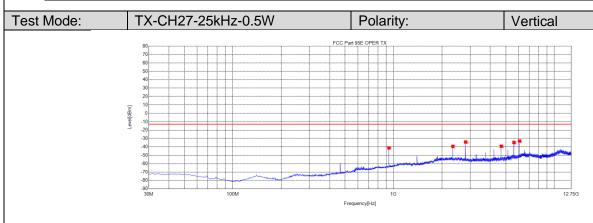

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.98	-79.51	-41.27	-13.00	28.27	38.24	350	Vertical
2	2338.4588	-41.76	-39.40	-13.00	26.40	2.36	82	Vertical
3	2806.1556	-36.11	-34.20	-13.00	21.20	1.91	29	Vertical
4	4676.9427	-43.86	-39.24	-13.00	26.24	4.62	172	Vertical
5	5612.3362	-40.67	-34.68	-13.00	21.68	5.99	204	Vertical
6	6080.033	-39.81	-32.96	-13.00	19.96	6.85	183	Vertical

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






8.5 Emission Mask Measurement Part

The detailed procedure employed for Emission Mask measurements are specified as following:


- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- Centre frequency = fundamental frequency, Span=150kHz for 12.5kHz and 25kHz channel spacing, RBW=300Hz, VBW=1000Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz, Sweep = auto, Detector function = peak, Trace = max hold
- 2. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 3. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
 The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 5. Measure and record the results in the test report.







Test plot as follows:

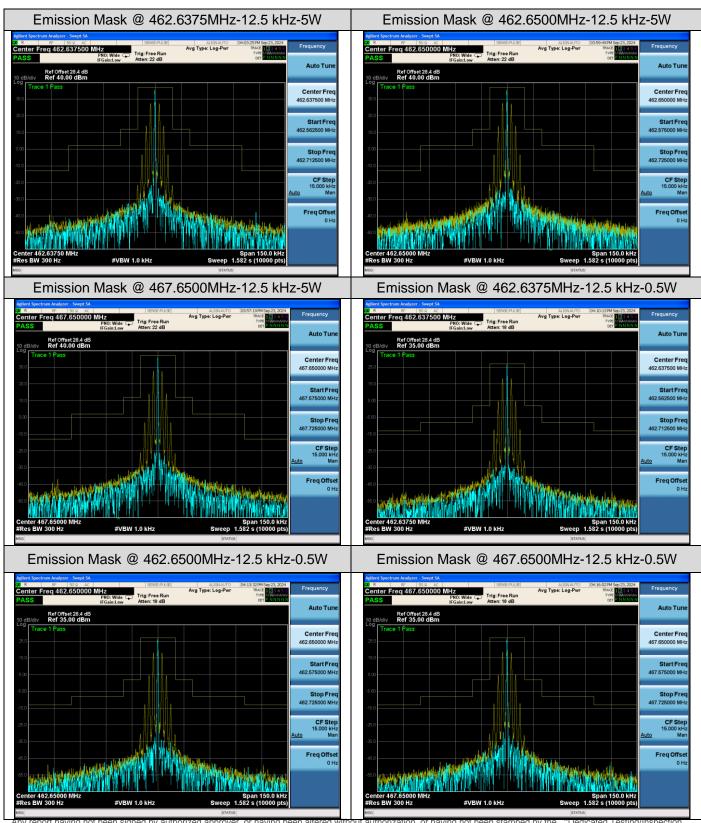

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.