


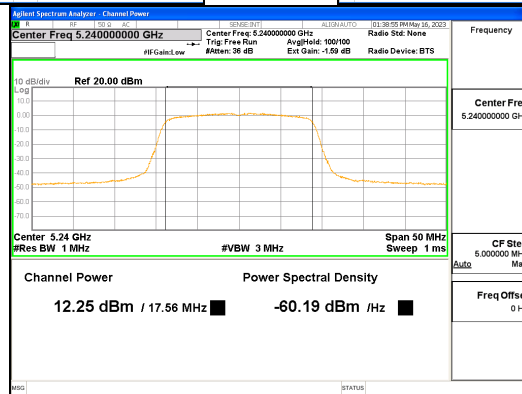
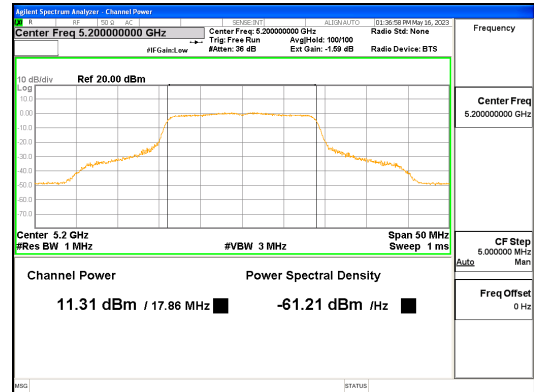
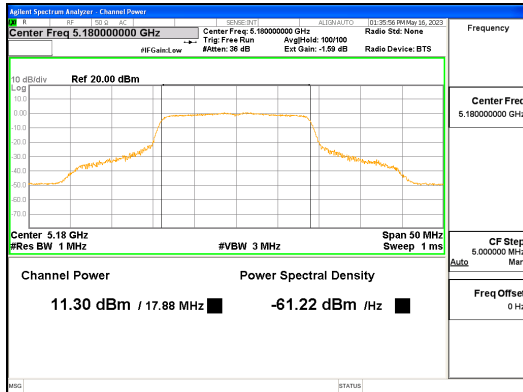
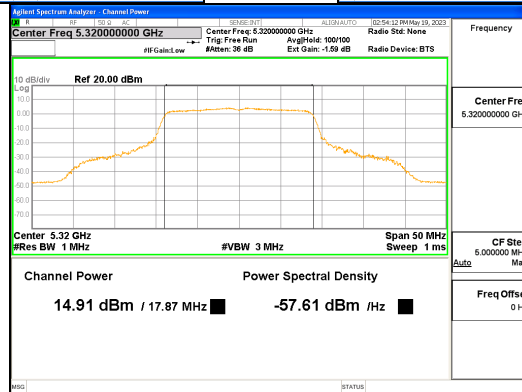
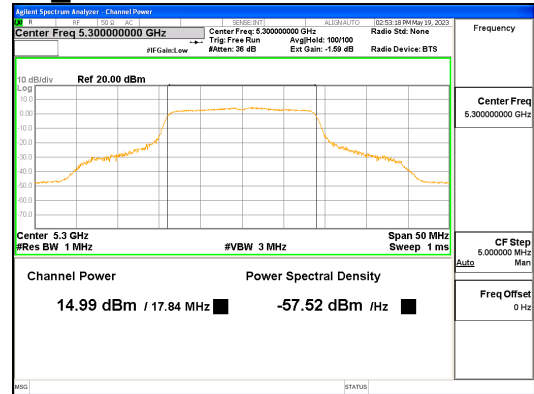
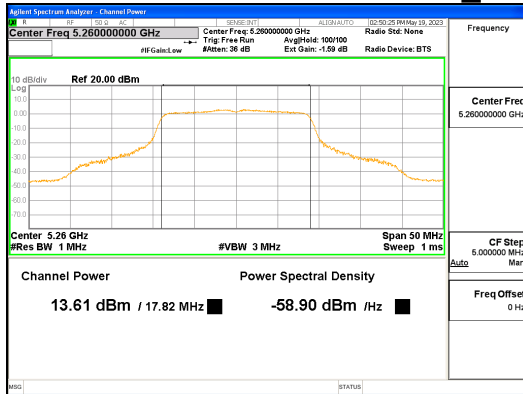
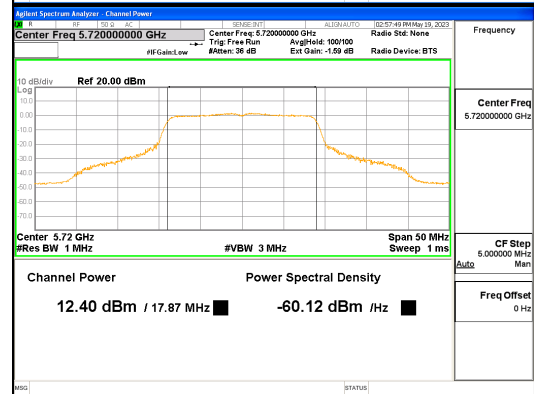


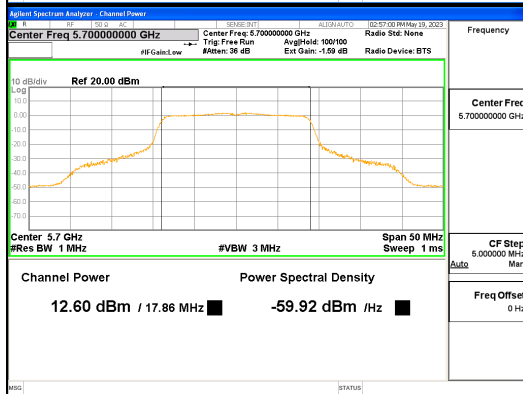




ANT R_802.11n_HT20_UNII 1

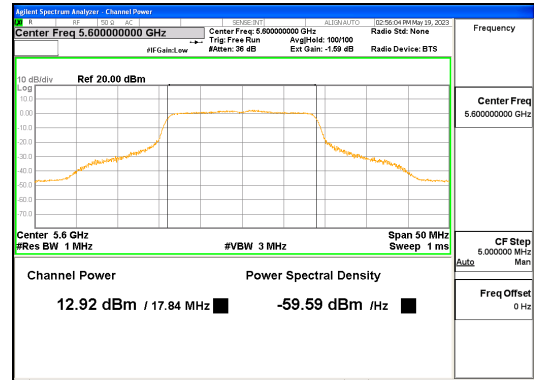




ANT R_802.11n_HT20_UNII 2A

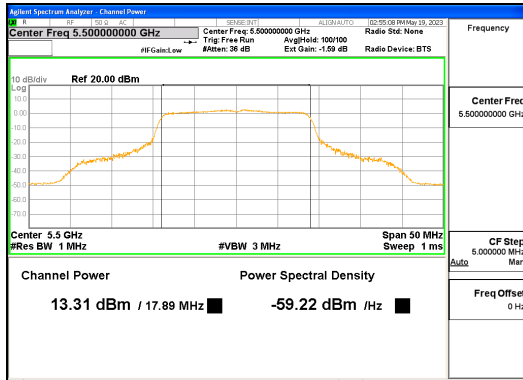




ANT R_802.11n_HT20_UNII 2C

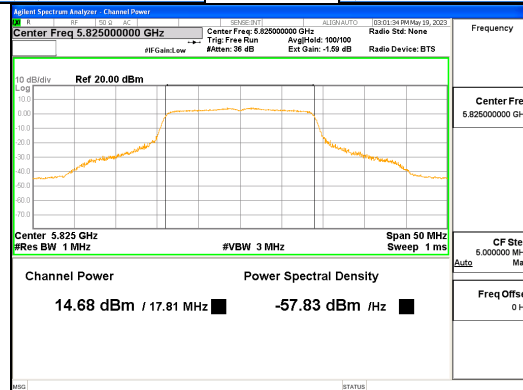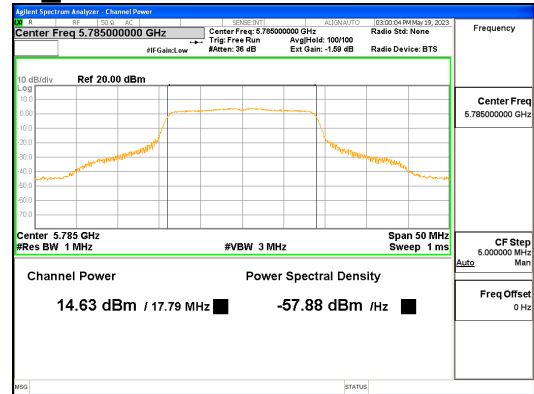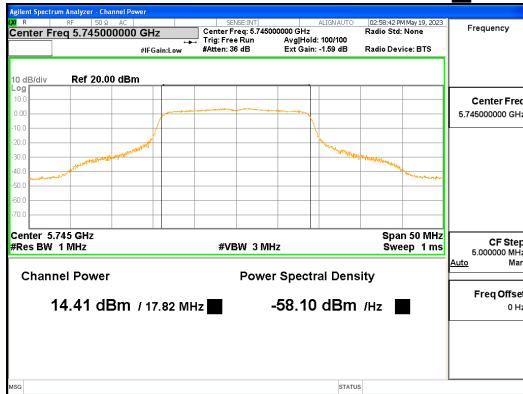





ANT R_802.11n_HT20_UNII 3

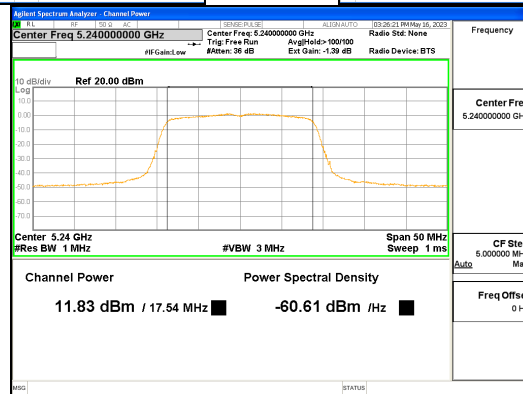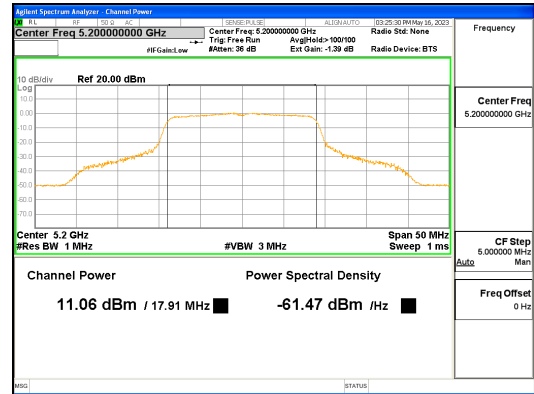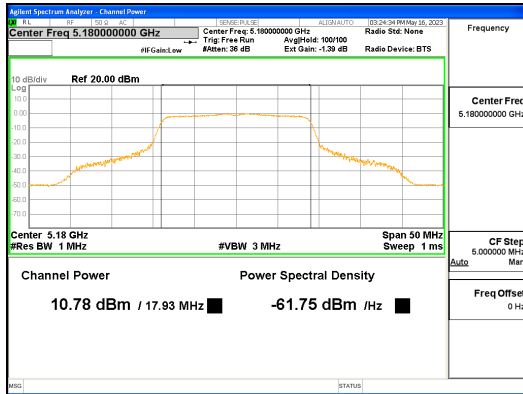




ANT L_802.11ac_VHT20_UNII 1

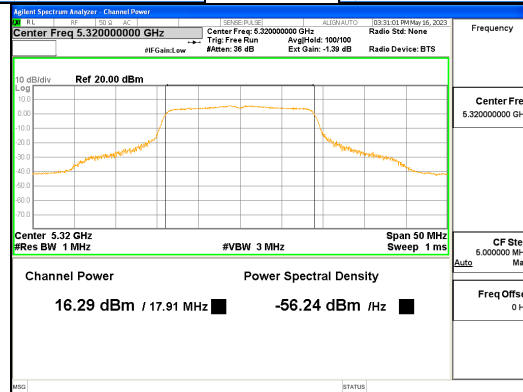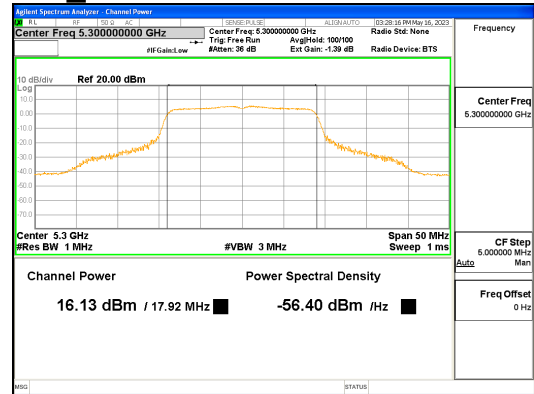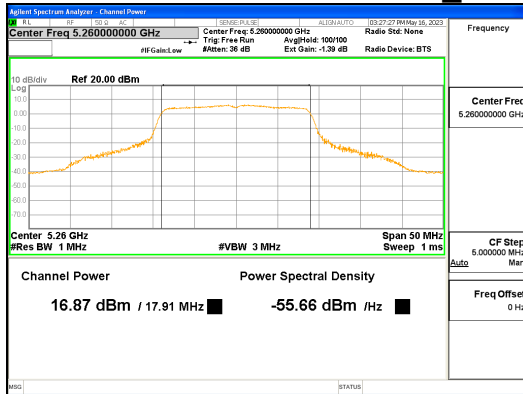




ANT L_802.11ac_VHT20_UNII 2A

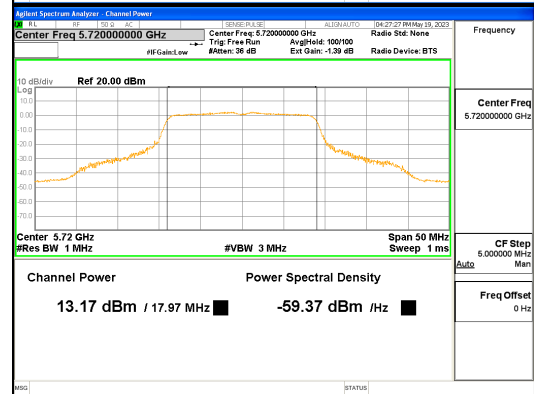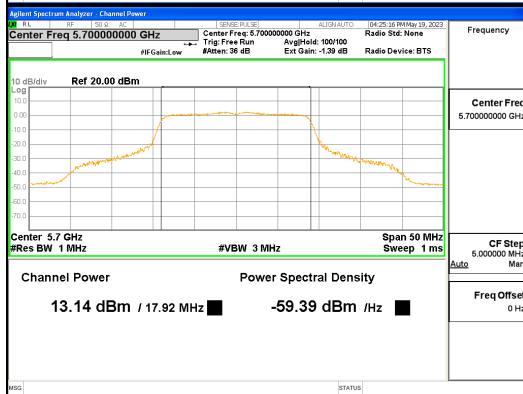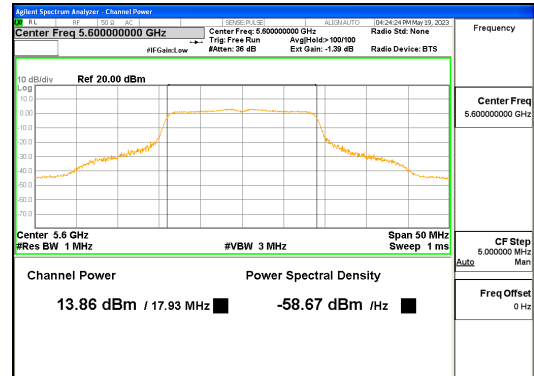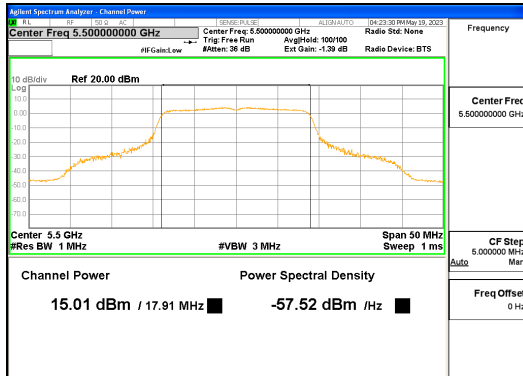




ANT L_802.11ac_VHT20_UNII 2C

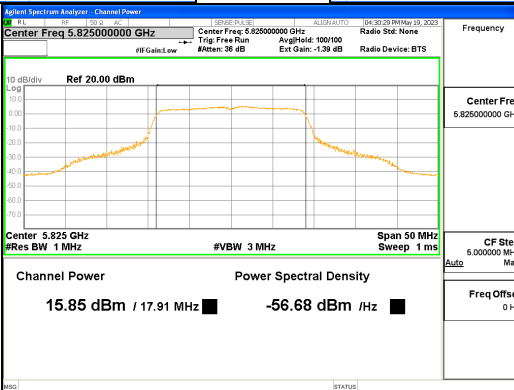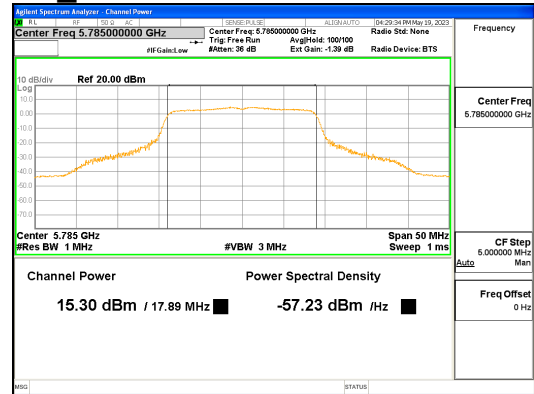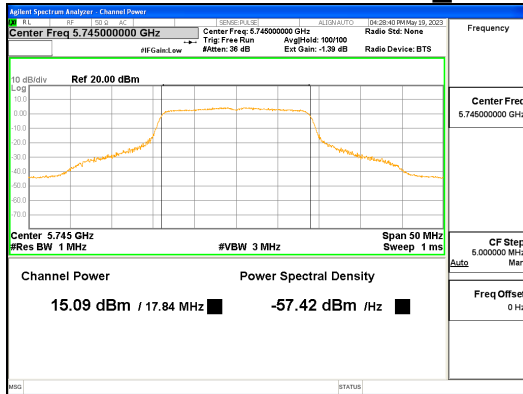





ANT L_802.11ac_VHT20_UNII 3

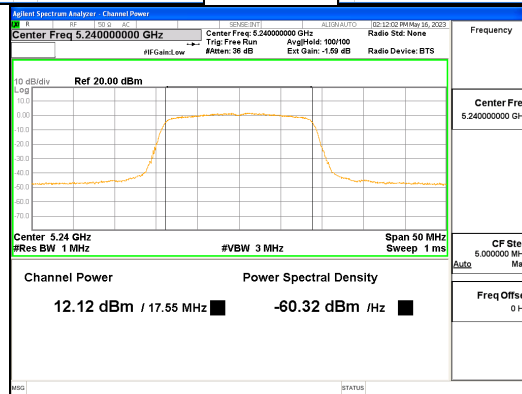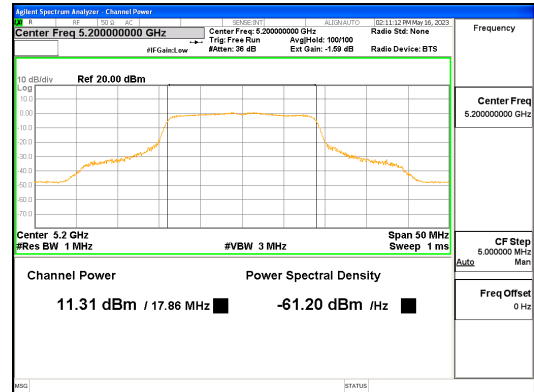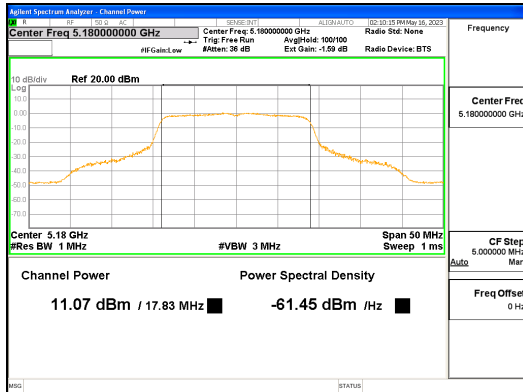




ANT R_802.11ac_VHT20_UNII 1

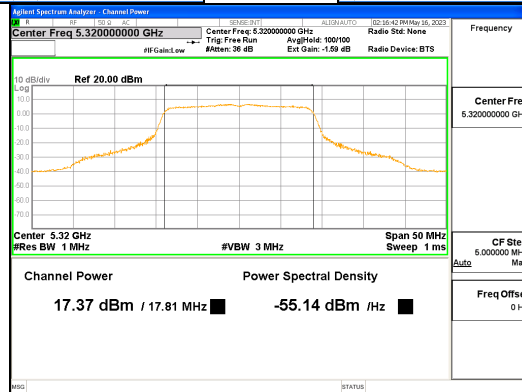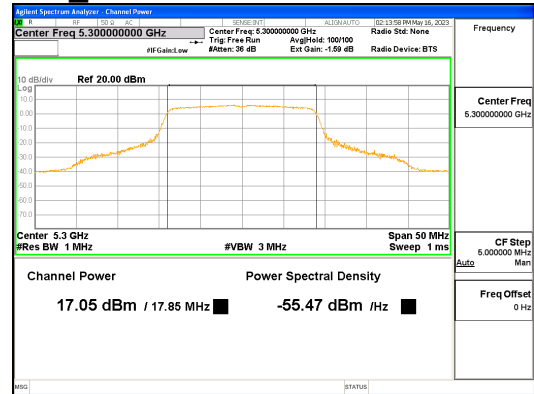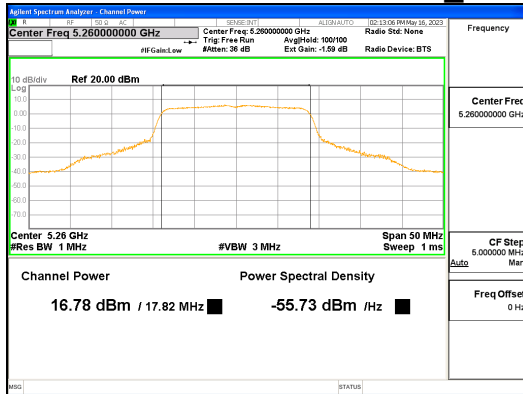



ANT R_802.11ac_VHT20_UNII 2A

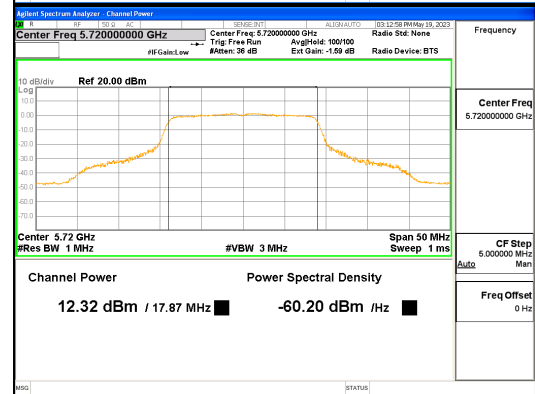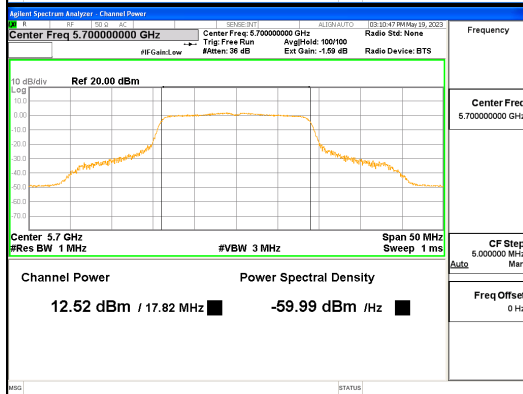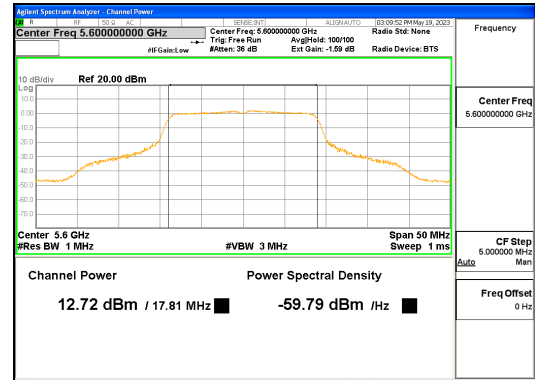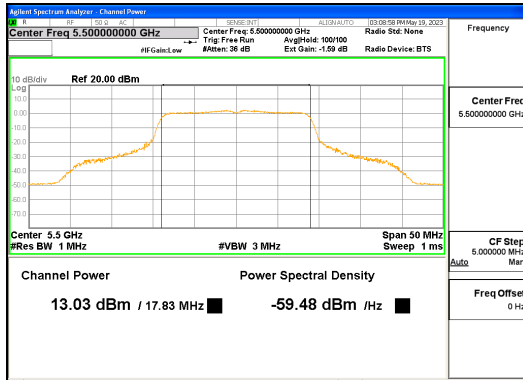



ANT R_802.11ac_VHT20_UNII 2C

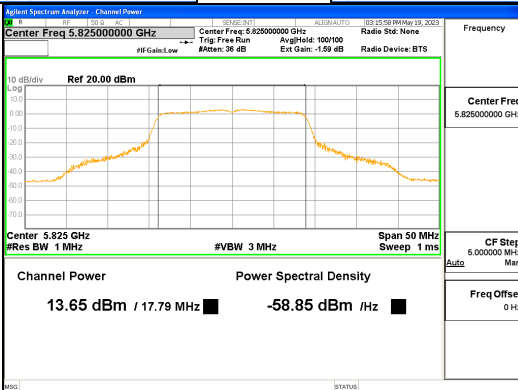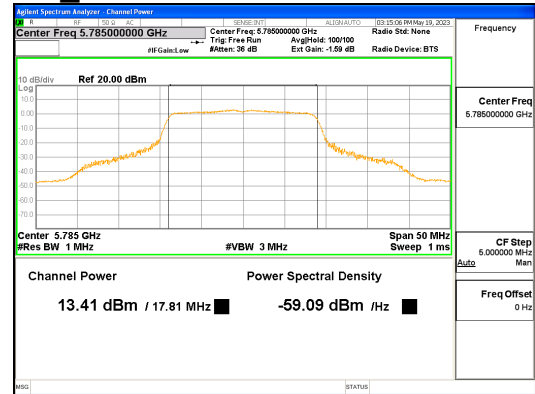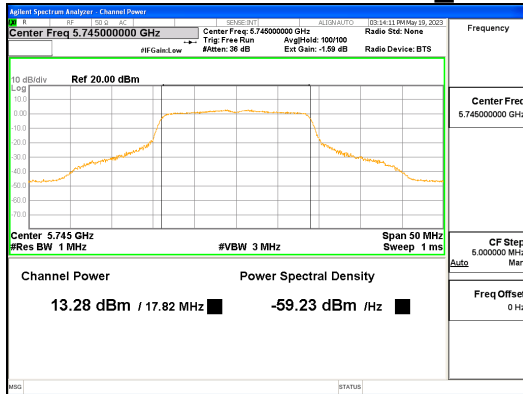





ANT R_802.11ac_VHT20_UNII 3

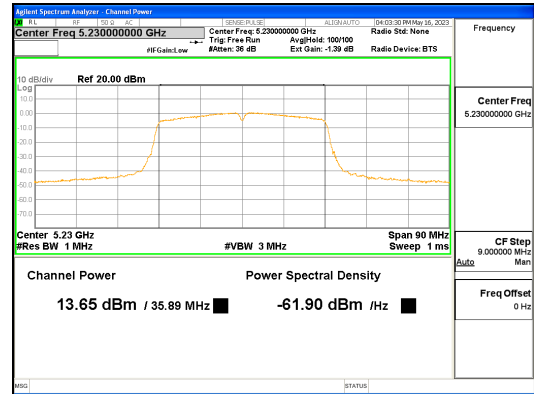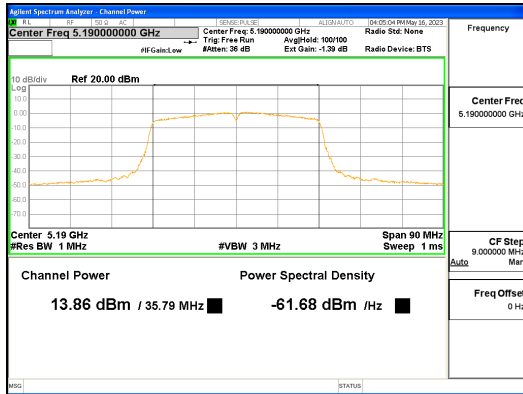

ANT L_802.11n_HT40_UNII 1

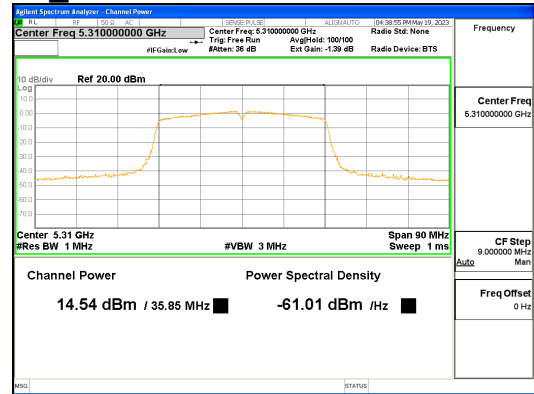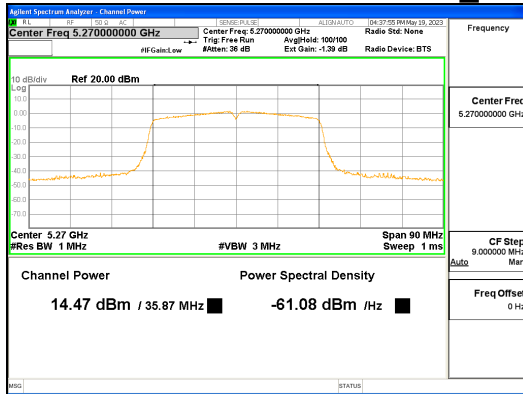

ANT L_802.11n_HT40_UNII 2A

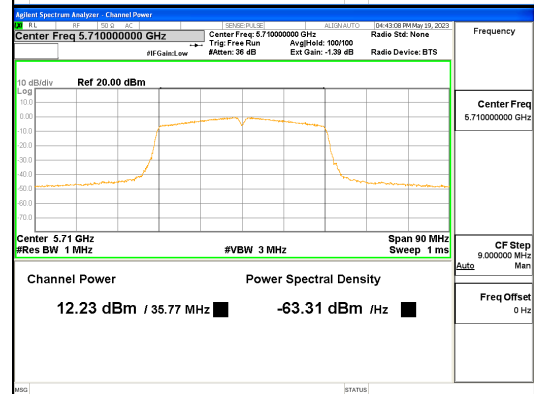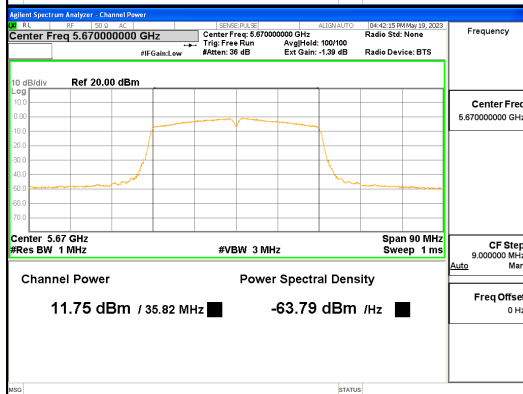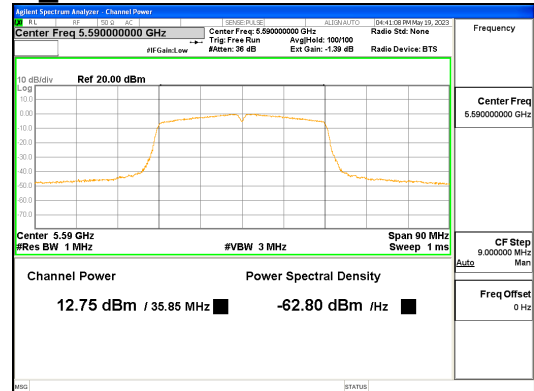
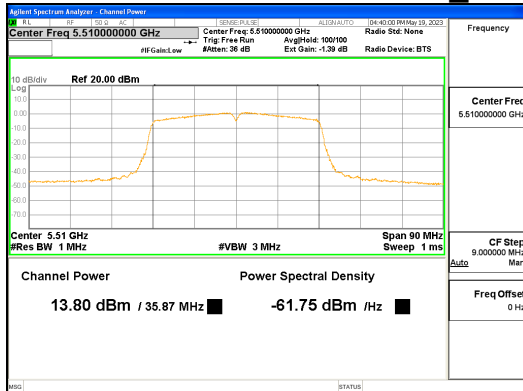


ANT L_802.11n_HT40_UNII 2C





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501



Report No.:
CTK-2023-01326
Page (161) / (539) Pages

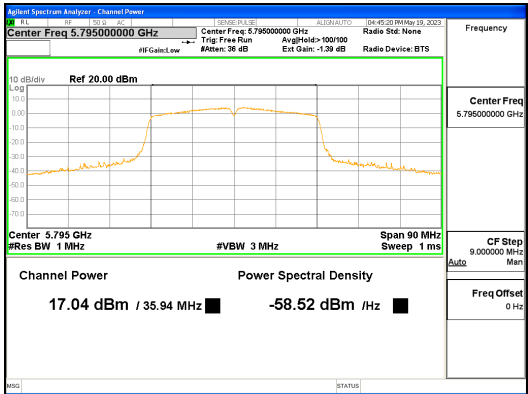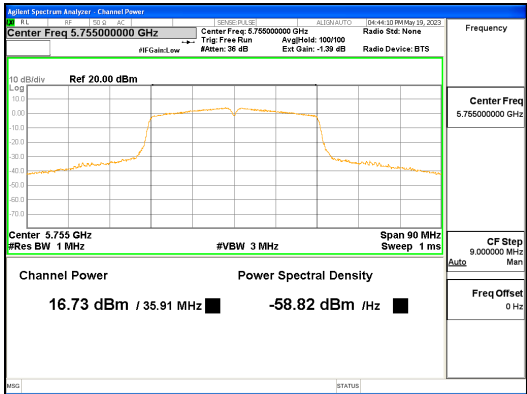





ANT L_802.11n_HT40_UNII 3

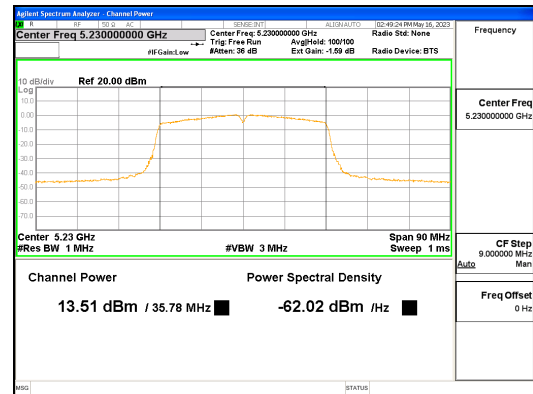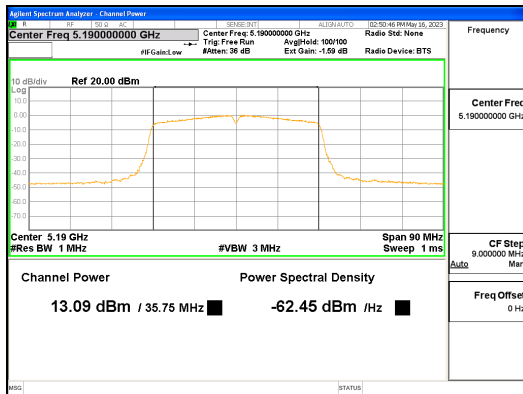

ANT R_802.11n_HT40_UNII 1

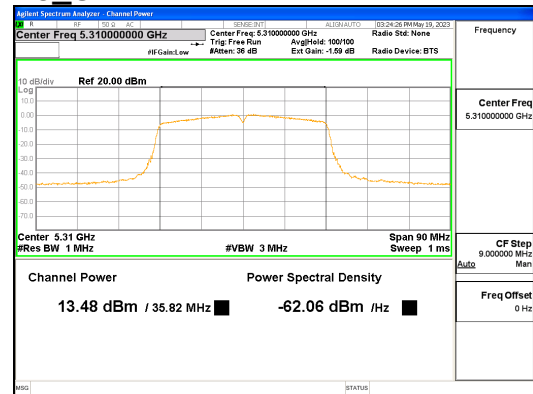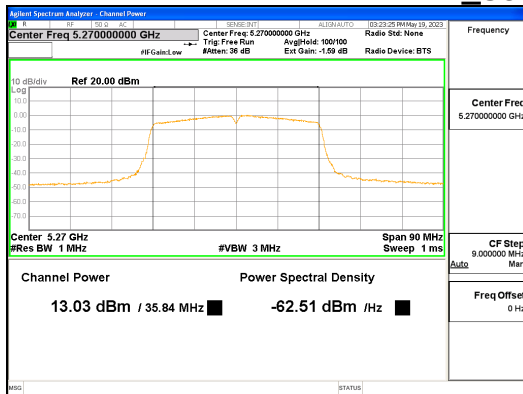

ANT R_802.11n_HT40_UNII 2A

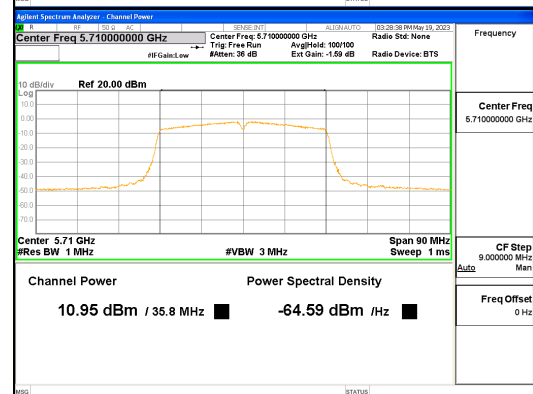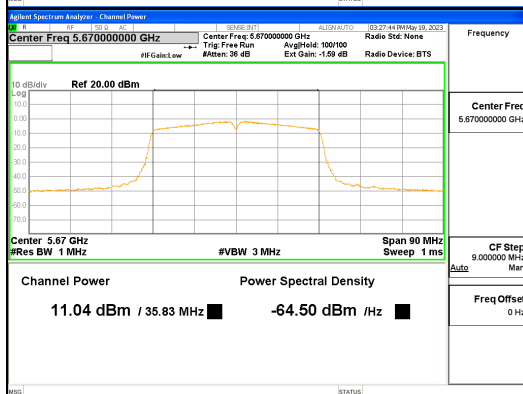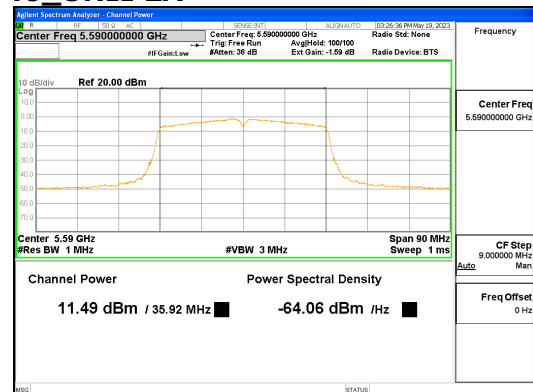
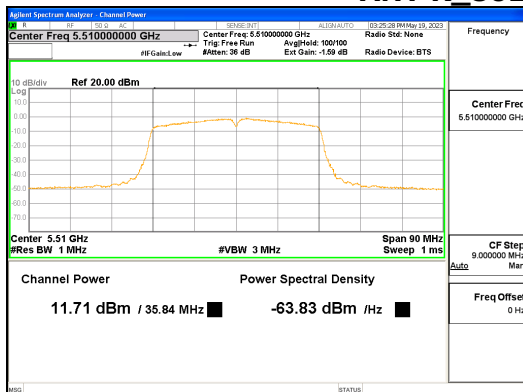


ANT R_802.11n_HT40_UNII 2C




CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501




Report No.:
CTK-2023-01326
Page (163) / (539) Pages

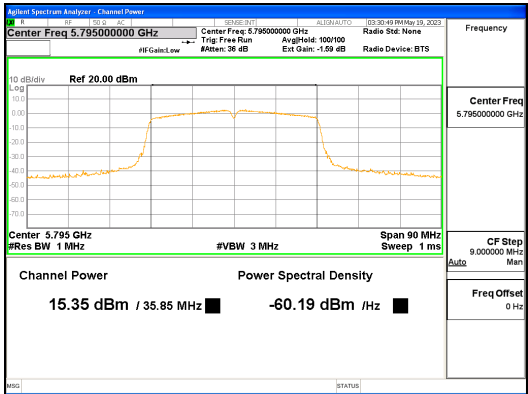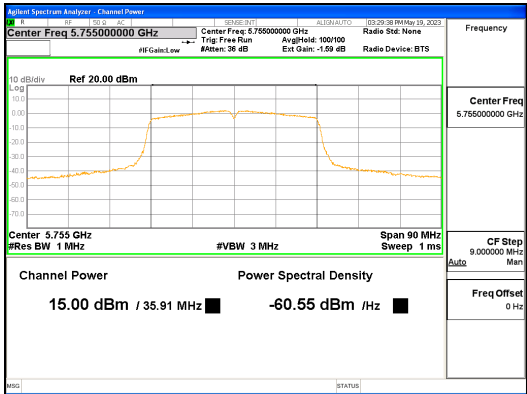





ANT R_802.11n_HT40_UNII 3

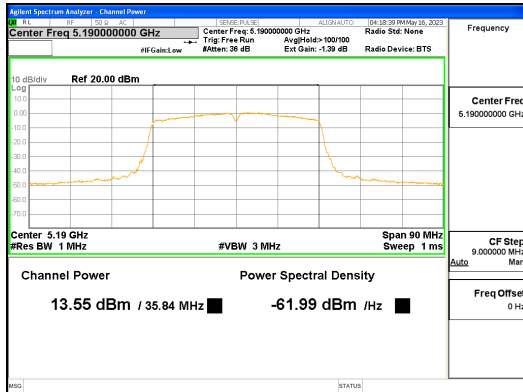

ANT L_802.11ac_VHT40_UNII 1

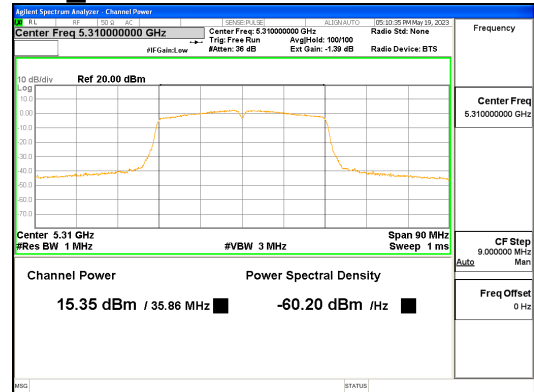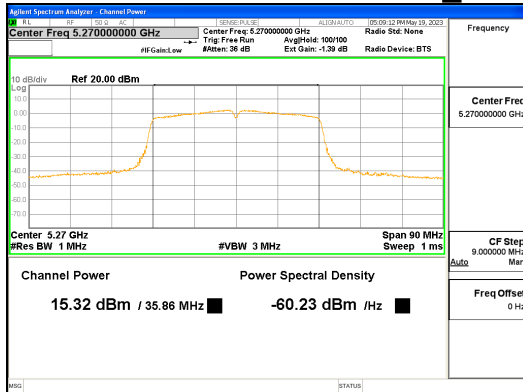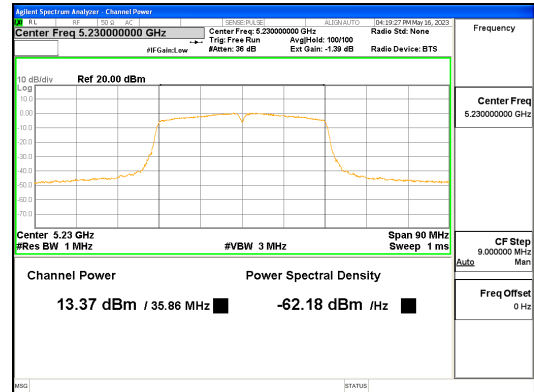

ANT L_802.11ac_VHT40_UNII 2A

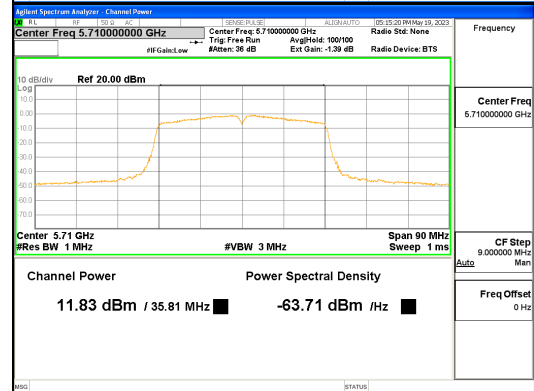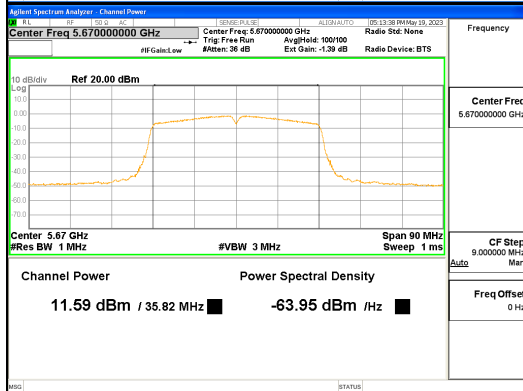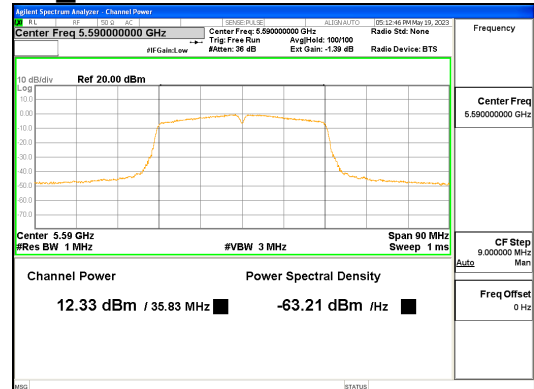
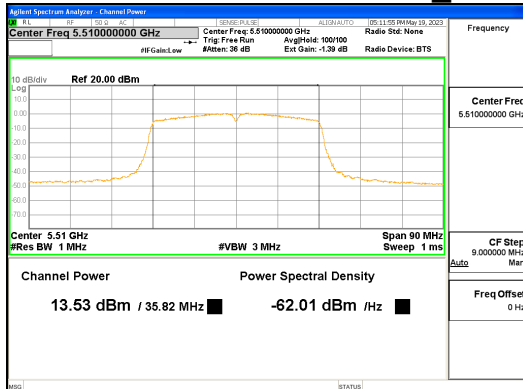


ANT L_802.11ac_VHT40_UNII 2C





CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501



Report No.:
CTK-2023-01326
Page (165) / (539) Pages

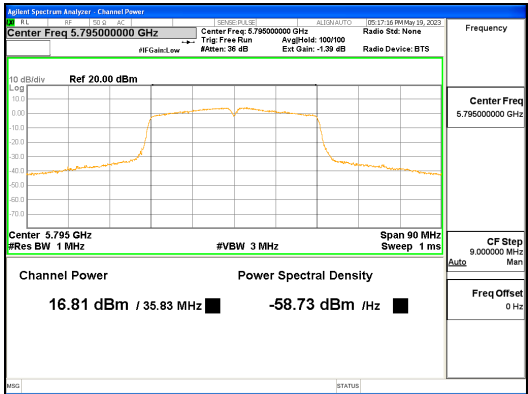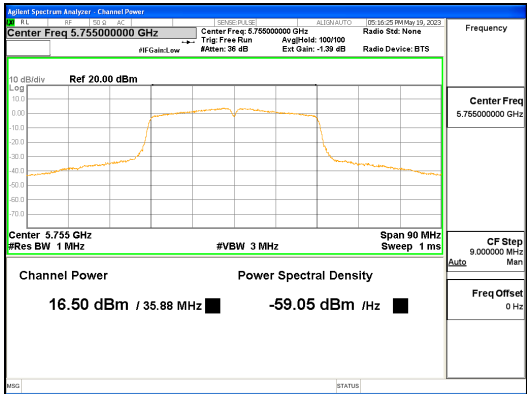





ANT L_802.11ac_VHT40_UNII 3

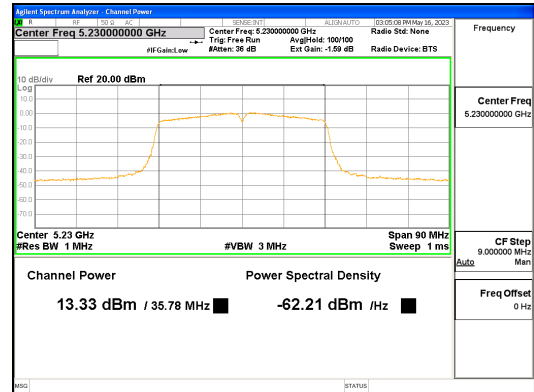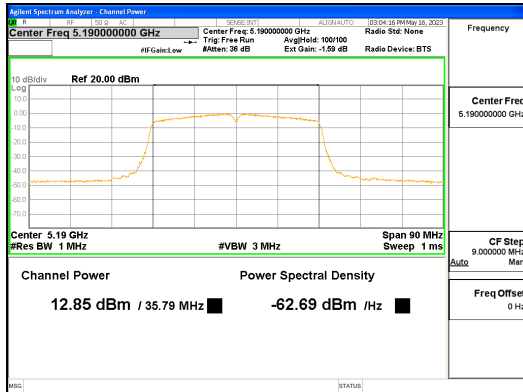

ANT R_802.11ac_VHT40_UNII 1

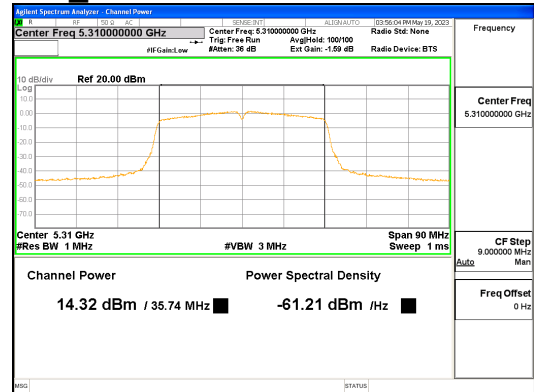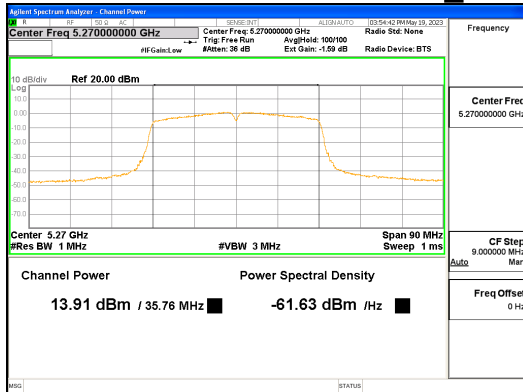

ANT R_802.11ac_VHT40_UNII 2A

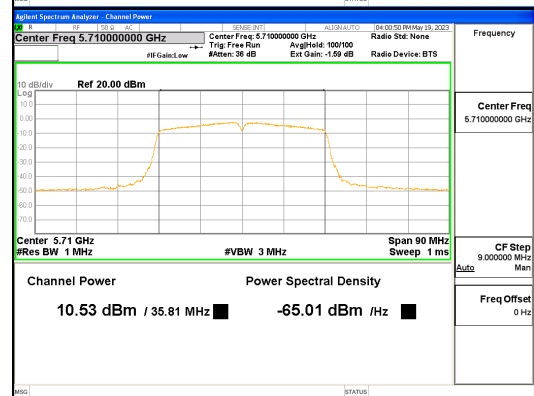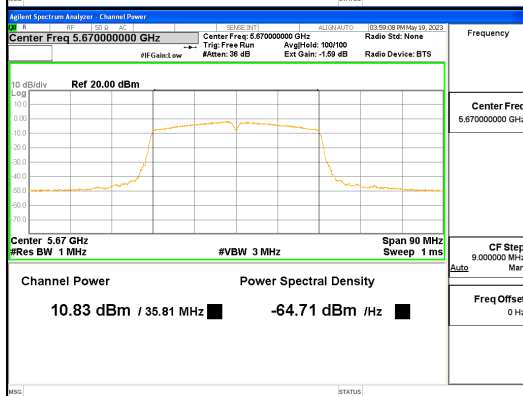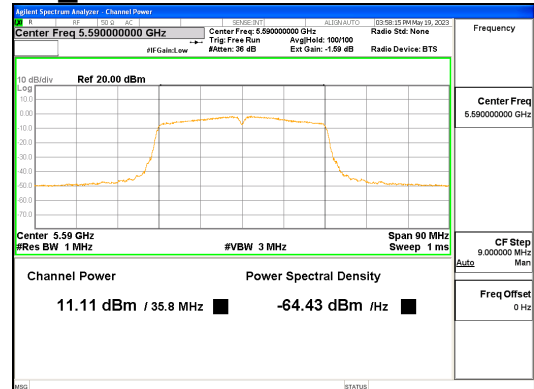
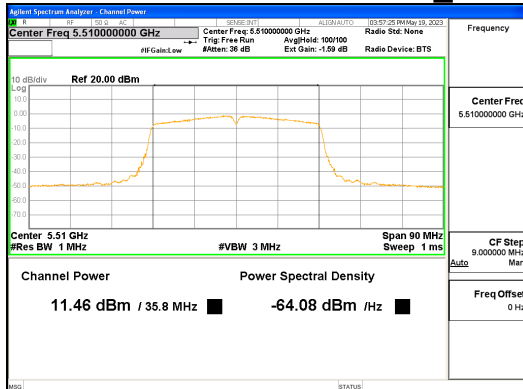


ANT R_802.11ac_VHT40_UNII 2C




CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2023-01326
Page (167) / (539) Pages

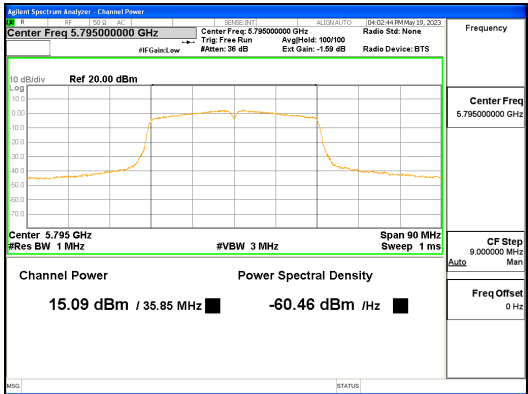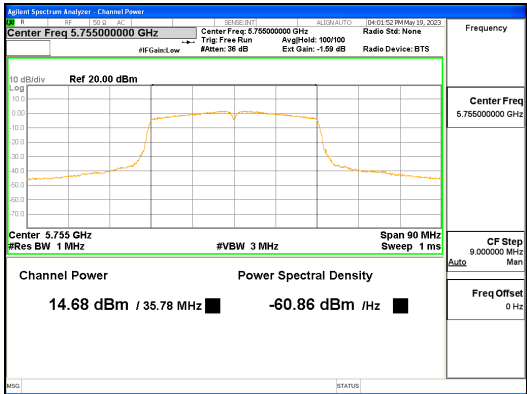




ANT R_802.11ac_VHT40_UNII 3

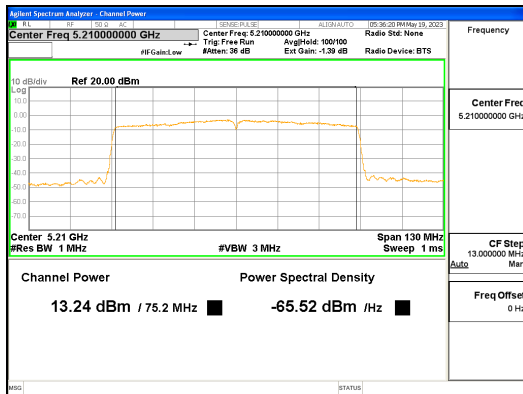


ANT L_802.11ac_VHT80_UNII 1

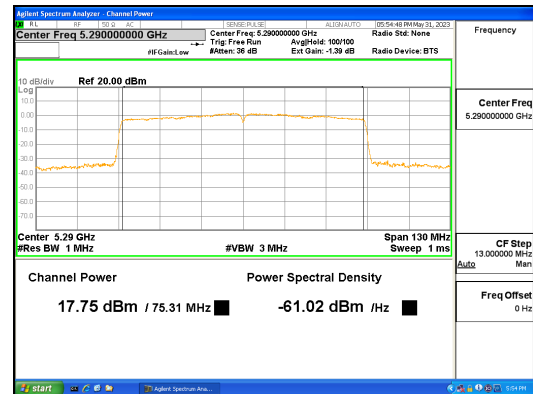


ANT L_802.11ac_VHT80_UNII 2A

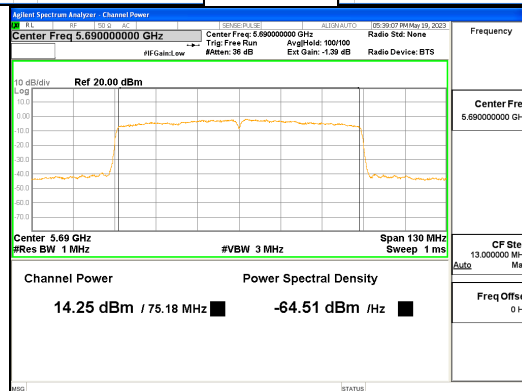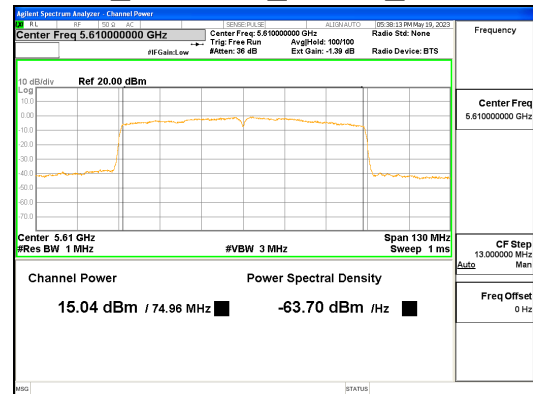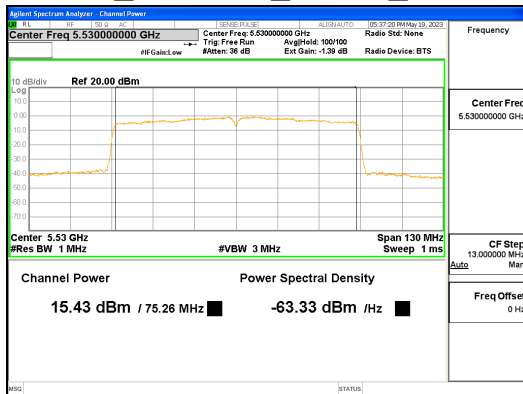


ANT L_802.11ac_VHT80_UNII 2C

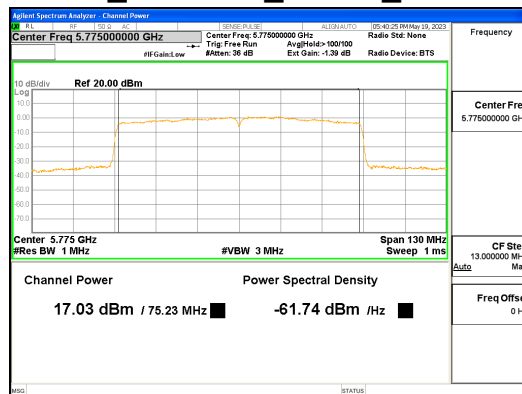




ANT L_802.11ac_VHT80_UNII 3

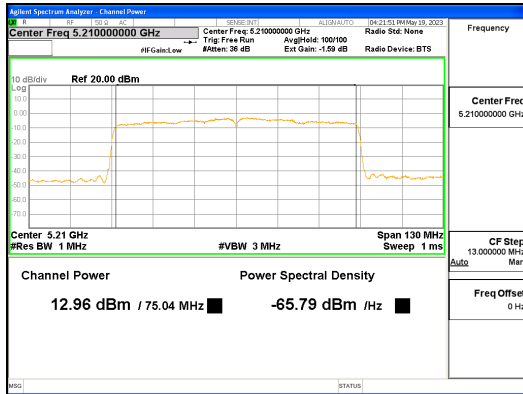


ANT R_802.11ac_VHT80_UNII 1

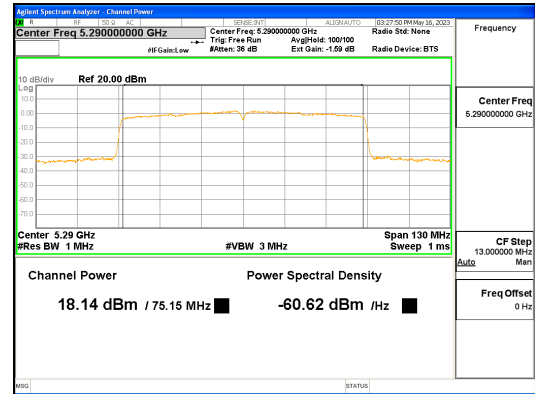

ANT R_802.11ac_VHT80_UNII 2A

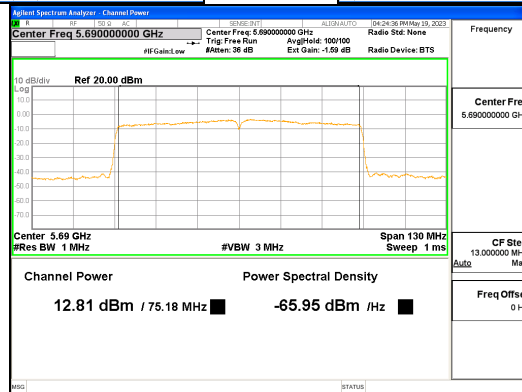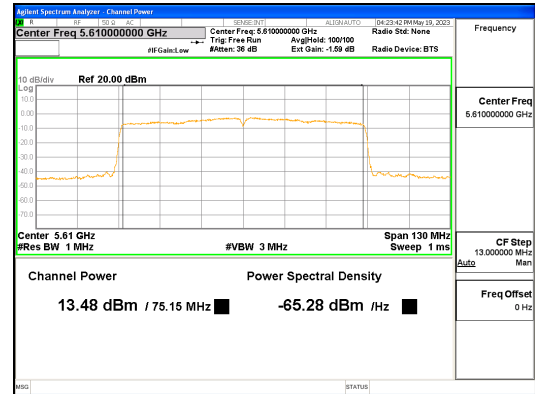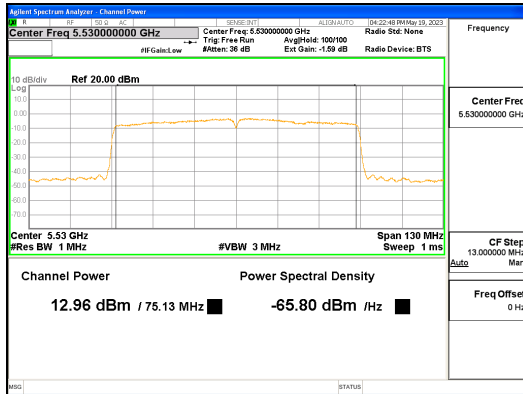

ANT R_802.11ac_VHT80_UNII 2C

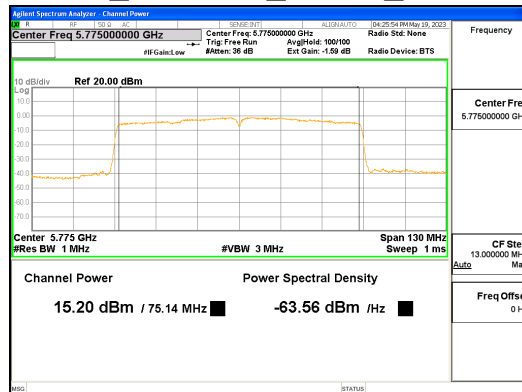

ANT R_802.11ac_VHT80_UNII 3

4.4 Power Spectral Density

Test Procedures

KDB 789033 – Section F (Method SA-2, Maximum Power Spectral Density)
KDB 662911 D01, D02 (Multiple Transmitter Output)
ANSI C63.10-2013 – Section 12.5

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 1 MHz, 500 KHz (UNII 3)
- b) VBW = 3 MHz, 1.5 MHz (UNII 3)
- c) Sweep time = auto
- d) Detector = power averaging (rms)
- e) Trace mode = Average at least 100
- f) Duty cycle factor = $10\log(1/x)$

Test mode	Duty Cycle Factor (dB)
802.11a	0.13
802.11n_HT20	0.13
802.11n_HT40	0.28
802.11ac_VHT20	0.26
802.11ac_VHT40	0.50
802.11ac_VHT80	0.89
802.11ax_HE20_26T	0.21
802.11ax_HE20_52T	0.21
802.11ax_HE20_106T	0.23
802.11ax_HE20_242T	0.26
802.11ax_HE40_26T	0.21
802.11ax_HE40_52T	0.22
802.11ax_HE40_106T	0.24
802.11ax_HE40_242T	0.27
802.11ax HE40 484T	0.28
802.11ax HE80 26T	0.21
802.11ax HE80 52T	0.22
802.11ax HE80 106T	0.23
802.11ax HE80 242T	0.27
802.11ax HE80 484T	0.27
802.11ax HE80 996T	0.29

Limit

Operating Mode	Mode	ANT Configuration	ANT Gain (dBi)	Band	Limit (dBm)
SISO	802.11a/n/ac/ax	ANT L, ANT R	1.36, 1.95	UNII 1	11.00
				UNII 2A	11.00
			1.49, 1.98	UNII 2C	11.00
				UNII 3	30.00
MIMO (2Tx)	802.11n/ac/ax	ANT L + ANT R	4.67	UNII 1	11.00
				UNII 2A	11.00
			4.75	UNII 2C	11.00
				UNII 3	30.00

Note :

Per KDB 662911, the MIMO directional gain is calculated using the following formula, Where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Test Data

ANT L(SISO)

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	6.02	0.13	6.15	11.00	4.85
	5 200	6.37	0.13	6.50	11.00	4.50
	5 240	7.34	0.13	7.47	11.00	3.53
	5 260	9.27	0.13	9.40	11.00	1.60
	5 300	8.54	0.13	8.67	11.00	2.33
	5 320	8.79	0.13	8.92	11.00	2.08
	5 500	3.57	0.13	3.70	11.00	7.30
	5 600	2.40	0.13	2.53	11.00	8.47
	5 700	1.84	0.13	1.97	11.00	9.03
	5 720	1.87	0.13	2.00	11.00	9.00
	5 745	4.13	0.13	4.26	30.00	25.74
	5 785	4.36	0.13	4.49	30.00	25.51
	5 825	4.95	0.13	5.08	30.00	24.92
802.11n _HT20	5 180	0.19	0.13	0.32	11.00	10.68
	5 200	0.53	0.13	0.66	11.00	10.34
	5 240	1.46	0.13	1.59	11.00	9.41
	5 260	3.77	0.13	3.90	11.00	7.10
	5 300	4.94	0.13	5.07	11.00	5.93
	5 320	4.51	0.13	4.64	11.00	6.36
	5 500	4.48	0.13	4.61	11.00	6.39
	5 600	3.42	0.13	3.55	11.00	7.45
	5 700	2.81	0.13	2.94	11.00	8.06
	5 720	2.57	0.13	2.70	11.00	8.30
	5 745	2.80	0.13	2.93	30.00	27.07
	5 785	3.10	0.13	3.23	30.00	26.77
	5 825	3.55	0.13	3.68	30.00	26.32
802.11ac _VHT20	5 180	0.23	0.26	0.49	11.00	10.51
	5 200	0.36	0.26	0.62	11.00	10.38
	5 240	1.24	0.26	1.50	11.00	9.50
	5 260	6.11	0.26	6.37	11.00	4.63
	5 300	5.36	0.26	5.62	11.00	5.38
	5 320	5.43	0.26	5.69	11.00	5.31
	5 500	4.17	0.26	4.43	11.00	6.57

	5 600	3.41	0.26	3.67	11.00	7.33
	5 700	2.36	0.26	2.62	11.00	8.38
	5 720	2.45	0.26	2.71	11.00	8.29
	5 745	1.87	0.26	2.13	30.00	27.87
	5 785	1.77	0.26	2.03	30.00	27.97
	5 825	2.38	0.26	2.64	30.00	27.36
802.11n _HT40	5 190	1.10	0.28	1.38	11.00	9.62
	5 230	0.64	0.28	0.92	11.00	10.08
	5 270	1.54	0.28	1.82	11.00	9.18
	5 310	1.81	0.28	2.09	11.00	8.91
	5 510	1.30	0.28	1.58	11.00	9.42
	5 590	0.15	0.28	0.43	11.00	10.57
	5 670	-0.91	0.28	-0.63	11.00	11.63
	5 710	-0.47	0.28	-0.19	11.00	11.19
	5 755	1.17	0.28	1.45	30.00	28.55
	5 795	1.57	0.28	1.85	30.00	28.15
802.11ac _VHT40	5 190	0.63	0.50	1.13	11.00	9.87
	5 230	0.81	0.50	1.31	11.00	9.69
	5 270	2.34	0.50	2.84	11.00	8.16
	5 310	2.53	0.50	3.03	11.00	7.97
	5 510	0.74	0.50	1.24	11.00	9.76
	5 590	-0.30	0.50	0.20	11.00	10.80
	5 670	-1.31	0.50	-0.81	11.00	11.81
	5 710	-0.80	0.50	-0.30	11.00	11.30
	5 755	0.88	0.50	1.38	30.00	28.62
	5 795	1.52	0.50	2.02	30.00	27.98
802.11ac _VHT80	5 210	-2.80	0.89	-1.91	11.00	12.91
	5 290	3.31	0.89	4.20	11.00	6.80
	5 530	-0.67	0.89	0.22	11.00	10.78
	5 610	-0.77	0.89	0.12	11.00	10.88
	5 690	-1.82	0.89	-0.93	11.00	11.93
	5 775	-1.71	0.89	-0.82	30.00	30.82
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _26T	5 180	Low	0.21	0.21	0.42	11.00	10.58	
		Mid	-0.43	0.21	-0.22	11.00	11.22	
		High	0.68	0.21	0.89	11.00	10.11	
	5 200	Low	0.20	0.21	0.41	11.00	10.59	
		Mid	-0.18	0.21	0.03	11.00	10.97	
		High	0.58	0.21	0.79	11.00	10.21	
	5 240	Low	0.71	0.21	0.92	11.00	10.08	
		Mid	0.16	0.21	0.37	11.00	10.63	
		High	1.12	0.21	1.33	11.00	9.67	
	5 260	Low	6.70	0.21	6.91	11.00	4.09	
		Mid	5.71	0.21	5.92	11.00	5.08	
		High	6.53	0.21	6.74	11.00	4.26	
	5 300	Low	5.76	0.21	5.97	11.00	5.03	
		Mid	5.06	0.21	5.27	11.00	5.73	
		High	6.16	0.21	6.37	11.00	4.63	
	5 320	Low	5.69	0.21	5.90	11.00	5.10	
		Mid	5.30	0.21	5.51	11.00	5.49	
		High	6.51	0.21	6.72	11.00	4.28	
	5 500	Low	6.43	0.21	6.64	11.00	4.36	
		Mid	5.67	0.21	5.88	11.00	5.12	
		High	6.73	0.21	6.94	11.00	4.06	
	5 600	Low	6.00	0.21	6.21	11.00	4.79	
		Mid	4.98	0.21	5.19	11.00	5.81	
		High	6.23	0.21	6.44	11.00	4.56	
	5 700	Low	5.39	0.21	5.60	11.00	5.40	
		Mid	4.70	0.21	4.91	11.00	6.09	
		High	5.43	0.21	5.64	11.00	5.36	
	5 720	Low	5.51	0.21	5.72	11.00	5.28	
		Mid	4.30	0.21	4.51	11.00	6.49	
		High	5.37	0.21	5.58	11.00	5.42	
	5 745	Low	5.49	0.21	5.70	30.00	24.30	
		Mid	6.16	0.21	6.37	30.00	23.63	
		High	5.96	0.21	6.17	30.00	23.83	
	5 785	Low	5.81	0.21	6.02	30.00	23.98	
		Mid	6.15	0.21	6.36	30.00	23.64	
		High	6.24	0.21	6.45	30.00	23.55	
	5 825	Low	6.53	0.21	6.74	30.00	23.26	
		Mid	6.75	0.21	6.96	30.00	23.04	
		High	6.99	0.21	7.20	30.00	22.80	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _52T	5 180	Low	-0.20	0.21	0.01	11.00	10.99	
		Mid	-0.08	0.21	0.13	11.00	10.87	
		High	0.30	0.21	0.51	11.00	10.49	
	5 200	Low	-0.07	0.21	0.14	11.00	10.86	
		Mid	0.37	0.21	0.58	11.00	10.42	
		High	0.48	0.21	0.69	11.00	10.31	
	5 240	Low	0.32	0.21	0.53	11.00	10.47	
		Mid	1.06	0.21	1.27	11.00	9.73	
		High	1.21	0.21	1.42	11.00	9.58	
	5 260	Low	6.14	0.21	6.35	11.00	4.65	
		Mid	6.18	0.21	6.39	11.00	4.61	
		High	6.19	0.21	6.40	11.00	4.60	
	5 300	Low	5.66	0.21	5.87	11.00	5.13	
		Mid	5.76	0.21	5.97	11.00	5.03	
		High	5.67	0.21	5.88	11.00	5.12	
	5 320	Low	5.64	0.21	5.85	11.00	5.15	
		Mid	5.87	0.21	6.08	11.00	4.92	
		High	6.08	0.21	6.29	11.00	4.71	
	5 500	Low	6.09	0.21	6.30	11.00	4.70	
		Mid	6.73	0.21	6.94	11.00	4.06	
		High	6.40	0.21	6.61	11.00	4.39	
	5 600	Low	5.89	0.21	6.10	11.00	4.90	
		Mid	6.00	0.21	6.21	11.00	4.79	
		High	5.78	0.21	5.99	11.00	5.01	
	5 700	Low	5.12	0.21	5.33	11.00	5.67	
		Mid	5.57	0.21	5.78	11.00	5.22	
		High	5.39	0.21	5.60	11.00	5.40	
	5 720	Low	5.14	0.21	5.35	11.00	5.65	
		Mid	5.19	0.21	5.40	11.00	5.60	
		High	4.85	0.21	5.06	11.00	5.94	
	5 745	Low	3.06	0.21	3.27	30.00	26.73	
		Mid	3.45	0.21	3.66	30.00	26.34	
		High	3.12	0.21	3.33	30.00	26.67	
	5 785	Low	3.08	0.21	3.29	30.00	26.71	
		Mid	3.37	0.21	3.58	30.00	26.42	
		High	3.54	0.21	3.75	30.00	26.25	
	5 825	Low	3.87	0.21	4.08	30.00	25.92	
		Mid	4.30	0.21	4.51	30.00	25.49	
		High	3.89	0.21	4.10	30.00	25.90	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _106T	5 180	Low	0.00	0.23	0.23	11.00	10.77	
		Mid	-					
		High	0.17	0.23	0.40	11.00	10.60	
	5 200	Low	0.32	0.23	0.55	11.00	10.45	
		Mid	-					
		High	0.39	0.23	0.62	11.00	10.38	
	5 240	Low	0.94	0.23	1.17	11.00	9.83	
		Mid	-					
		High	1.50	0.23	1.73	11.00	9.27	
	5 260	Low	6.44	0.23	6.67	11.00	4.33	
		Mid	-					
		High	6.57	0.23	6.80	11.00	4.20	
	5 300	Low	5.95	0.23	6.18	11.00	4.82	
		Mid	-					
		High	6.03	0.23	6.26	11.00	4.74	
	5 320	Low	5.62	0.23	5.85	11.00	5.15	
		Mid	-					
		High	5.78	0.23	6.01	11.00	4.99	
	5 500	Low	3.41	0.23	3.64	11.00	7.36	
		Mid	-					
		High	3.64	0.23	3.87	11.00	7.13	
	5 600	Low	3.50	0.23	3.73	11.00	7.27	
		Mid	-					
		High	3.52	0.23	3.75	11.00	7.25	
	5 700	Low	1.51	0.23	1.74	11.00	9.26	
		Mid	-					
		High	1.86	0.23	2.09	11.00	8.91	
	5 720	Low	1.68	0.23	1.91	11.00	9.09	
		Mid	-					
		High	1.50	0.23	1.73	11.00	9.27	
	5 745	Low	2.42	0.23	2.65	30.00	27.35	
		Mid	-					
		High	2.65	0.23	2.88	30.00	27.12	
	5 785	Low	2.65	0.23	2.88	30.00	27.12	
		Mid	-					
		High	3.14	0.23	3.37	30.00	26.63	
	5 825	Low	3.02	0.23	3.25	30.00	26.75	
		Mid	-					
		High	3.27	0.23	3.50	30.00	26.50	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _242T	5 180	0.36	0.26	0.62	11.00	10.38
	5 200	1.04	0.26	1.30	11.00	9.70
	5 240	1.14	0.26	1.40	11.00	9.60
	5 260	4.30	0.26	4.56	11.00	6.44
	5 300	4.40	0.26	4.66	11.00	6.34
	5 320	4.47	0.26	4.73	11.00	6.27
	5 500	2.73	0.26	2.99	11.00	8.01
	5 600	1.77	0.26	2.03	11.00	8.97
	5 700	0.94	0.26	1.20	11.00	9.80
	5 720	1.01	0.26	1.27	11.00	9.73
	5 745	1.69	0.26	1.95	30.00	28.05
	5 785	1.76	0.26	2.02	30.00	27.98
	5 825	2.44	0.26	2.70	30.00	27.30
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _26T	5 190	Low	0.02	0.21	0.23	11.00	10.77
		Mid	0.45	0.21	0.66	11.00	10.34
		High	0.43	0.21	0.64	11.00	10.36
	5 230	Low	0.53	0.21	0.74	11.00	10.26
		Mid	0.69	0.21	0.90	11.00	10.10
		High	0.81	0.21	1.02	11.00	9.98
	5 270	Low	5.87	0.21	6.08	11.00	4.92
		Mid	6.22	0.21	6.43	11.00	4.57
		High	6.46	0.21	6.67	11.00	4.33
	5 310	Low	6.10	0.21	6.31	11.00	4.69
		Mid	6.67	0.21	6.88	11.00	4.12
		High	6.46	0.21	6.67	11.00	4.33
	5 510	Low	7.13	0.21	7.34	11.00	3.66
		Mid	7.71	0.21	7.92	11.00	3.08
		High	7.19	0.21	7.40	11.00	3.60
	5 590	Low	6.94	0.21	7.15	11.00	3.85
		Mid	7.31	0.21	7.52	11.00	3.48
		High	7.13	0.21	7.34	11.00	3.66
	5 670	Low	4.81	0.21	5.02	11.00	5.98
		Mid	4.97	0.21	5.18	11.00	5.82
		High	4.31	0.21	4.52	11.00	6.48
	5 710	Low	4.57	0.21	4.78	11.00	6.22
		Mid	5.26	0.21	5.47	11.00	5.53
		High	4.59	0.21	4.80	11.00	6.20
	5 755	Low	6.13	0.21	6.34	30.00	23.66
		Mid	6.31	0.21	6.52	30.00	23.48
		High	6.19	0.21	6.40	30.00	23.60
	5 795	Low	6.03	0.21	6.24	30.00	23.76
		Mid	6.54	0.21	6.75	30.00	23.25
		High	6.43	0.21	6.64	30.00	23.36
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _52T	5 190	Low	0.20	0.22	0.42	11.00	10.58
		Mid	1.04	0.22	1.26	11.00	9.74
		High	1.16	0.22	1.38	11.00	9.62
	5 230	Low	0.53	0.22	0.75	11.00	10.25
		Mid	1.55	0.22	1.77	11.00	9.23
		High	1.15	0.22	1.37	11.00	9.63
	5 270	Low	5.51	0.22	5.73	11.00	5.27
		Mid	5.92	0.22	6.14	11.00	4.86
		High	6.08	0.22	6.30	11.00	4.70
	5 310	Low	5.89	0.22	6.11	11.00	4.89
		Mid	6.34	0.22	6.56	11.00	4.44
		High	6.51	0.22	6.73	11.00	4.27
	5 510	Low	7.12	0.22	7.34	11.00	3.66
		Mid	7.22	0.22	7.44	11.00	3.56
		High	7.08	0.22	7.30	11.00	3.70
	5 590	Low	6.47	0.22	6.69	11.00	4.31
		Mid	6.77	0.22	6.99	11.00	4.01
		High	6.61	0.22	6.83	11.00	4.17
	5 670	Low	4.32	0.22	4.54	11.00	6.46
		Mid	4.92	0.22	5.14	11.00	5.86
		High	4.28	0.22	4.50	11.00	6.50
	5 710	Low	4.45	0.22	4.67	11.00	6.33
		Mid	4.80	0.22	5.02	11.00	5.98
		High	4.27	0.22	4.49	11.00	6.51
	5 755	Low	3.82	0.22	4.04	30.00	25.96
		Mid	3.81	0.22	4.03	30.00	25.97
		High	3.42	0.22	3.64	30.00	26.36
	5 795	Low	3.87	0.22	4.09	30.00	25.91
		Mid	4.25	0.22	4.47	30.00	25.53
		High	3.47	0.22	3.69	30.00	26.31
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _106T	5 190	Low	0.73	0.24	0.97	11.00	10.03
		Mid	1.00	0.24	1.24	11.00	9.76
		High	1.08	0.24	1.32	11.00	9.68
	5 230	Low	0.90	0.24	1.14	11.00	9.86
		Mid	1.04	0.24	1.28	11.00	9.72
		High	1.26	0.24	1.50	11.00	9.50
	5 270	Low	5.46	0.24	5.70	11.00	5.30
		Mid	5.54	0.24	5.78	11.00	5.22
		High	5.85	0.24	6.09	11.00	4.91
	5 310	Low	5.84	0.24	6.08	11.00	4.92
		Mid	6.29	0.24	6.53	11.00	4.47
		High	6.67	0.24	6.91	11.00	4.09
	5 510	Low	5.52	0.24	5.76	11.00	5.24
		Mid	5.49	0.24	5.73	11.00	5.27
		High	5.52	0.24	5.76	11.00	5.24
	5 590	Low	5.13	0.24	5.37	11.00	5.63
		Mid	5.36	0.24	5.60	11.00	5.40
		High	5.26	0.24	5.50	11.00	5.50
	5 670	Low	3.36	0.24	3.60	11.00	7.40
		Mid	3.19	0.24	3.43	11.00	7.57
		High	2.85	0.24	3.09	11.00	7.91
	5 710	Low	2.94	0.24	3.18	11.00	7.82
		Mid	3.09	0.24	3.33	11.00	7.67
		High	2.94	0.24	3.18	11.00	7.82
	5 755	Low	2.12	0.24	2.36	30.00	27.64
		Mid	1.94	0.24	2.18	30.00	27.82
		High	1.97	0.24	2.21	30.00	27.79
	5 795	Low	2.30	0.24	2.54	30.00	27.46
		Mid	2.16	0.24	2.40	30.00	27.60
		High	2.01	0.24	2.25	30.00	27.75
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _242T	5 190	Low	0.00	0.27	0.27	11.00	10.73
		Mid	-				
		High	0.27	0.27	0.54	11.00	10.46
	5 230	Low	0.30	0.27	0.57	11.00	10.43
		Mid	-				
		High	0.40	0.27	0.67	11.00	10.33
	5 270	Low	3.02	0.27	3.29	11.00	7.71
		Mid	-				
		High	3.50	0.27	3.77	11.00	7.23
	5 310	Low	3.60	0.27	3.87	11.00	7.13
		Mid	-				
		High	3.58	0.27	3.85	11.00	7.15
	5 510	Low	2.71	0.27	2.98	11.00	8.02
		Mid	-				
		High	2.77	0.27	3.04	11.00	7.96
	5 590	Low	2.62	0.27	2.89	11.00	8.11
		Mid	-				
		High	2.36	0.27	2.63	11.00	8.37
	5 670	Low	0.25	0.27	0.52	11.00	10.48
		Mid	-				
		High	0.29	0.27	0.56	11.00	10.44
	5 710	Low	0.22	0.27	0.49	11.00	10.51
		Mid	-				
		High	0.08	0.27	0.35	11.00	10.65
	5 755	Low	-0.09	0.27	0.18	30.00	29.82
		Mid	-				
		High	-0.63	0.27	-0.36	30.00	30.36
	5 795	Low	0.15	0.27	0.42	30.00	29.58
		Mid	-				
		High	-0.13	0.27	0.14	30.00	29.86
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _484T	5 190	-0.71	0.28	-0.43	11.00	11.43
	5 230	-0.46	0.28	-0.18	11.00	11.18
	5 270	1.40	0.28	1.68	11.00	9.32
	5 310	1.61	0.28	1.89	11.00	9.11
	5 510	-0.91	0.28	-0.63	11.00	11.63
	5 590	-1.39	0.28	-1.11	11.00	12.11
	5 670	-3.16	0.28	-2.88	11.00	13.88
	5 710	-2.91	0.28	-2.63	11.00	13.63
	5 755	0.29	0.28	0.57	30.00	29.43
	5 795	0.32	0.28	0.60	30.00	29.40
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _26T	5 210	Low	-0.11	0.21	0.10	11.00	10.90
		Mid	0.09	0.21	0.30	11.00	10.70
		High	0.60	0.21	0.81	11.00	10.19
	5 290	Low	5.15	0.21	5.36	11.00	5.64
		Mid	5.61	0.21	5.82	11.00	5.18
		High	6.32	0.21	6.53	11.00	4.47
	5 530	Low	6.99	0.21	7.20	11.00	3.80
		Mid	6.95	0.21	7.16	11.00	3.84
		High	7.39	0.21	7.60	11.00	3.40
	5 610	Low	6.46	0.21	6.67	11.00	4.33
		Mid	6.81	0.21	7.02	11.00	3.98
		High	6.60	0.21	6.81	11.00	4.19
	5 690	Low	4.42	0.21	4.63	11.00	6.37
		Mid	4.50	0.21	4.71	11.00	6.29
		High	4.40	0.21	4.61	11.00	6.39
	5 775	Low	5.83	0.21	6.04	30.00	23.96
		Mid	5.70	0.21	5.91	30.00	24.09
		High	6.17	0.21	6.38	30.00	23.62
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _52T	5 210	Low	-0.30	0.22	-0.08	11.00	11.08
		Mid	0.18	0.22	0.40	11.00	10.60
		High	0.75	0.22	0.97	11.00	10.03
	5 290	Low	5.48	0.22	5.70	11.00	5.30
		Mid	5.75	0.22	5.97	11.00	5.03
		High	5.93	0.22	6.15	11.00	4.85
	5 530	Low	6.51	0.22	6.73	11.00	4.27
		Mid	6.64	0.22	6.86	11.00	4.14
		High	7.19	0.22	7.41	11.00	3.59
	5 610	Low	6.38	0.22	6.60	11.00	4.40
		Mid	6.64	0.22	6.86	11.00	4.14
		High	6.27	0.22	6.49	11.00	4.51
	5 690	Low	3.93	0.22	4.15	11.00	6.85
		Mid	4.38	0.22	4.60	11.00	6.40
		High	4.46	0.22	4.68	11.00	6.32
	5 775	Low	2.34	0.22	2.56	30.00	27.44
		Mid	2.03	0.22	2.25	30.00	27.75

		High	1.99	0.22	2.21	30.00	27.79
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _106T	5 210	Low	0.04	0.23	0.27	11.00	10.73
		Mid	0.10	0.23	0.33	11.00	10.67
		High	0.52	0.23	0.75	11.00	10.25
	5 290	Low	5.46	0.23	5.69	11.00	5.31
		Mid	5.84	0.23	6.07	11.00	4.93
		High	6.43	0.23	6.66	11.00	4.34
	5 530	Low	6.74	0.23	6.97	11.00	4.03
		Mid	6.74	0.23	6.97	11.00	4.03
		High	7.10	0.23	7.33	11.00	3.67
	5 610	Low	6.14	0.23	6.37	11.00	4.63
		Mid	6.44	0.23	6.67	11.00	4.33
		High	6.52	0.23	6.75	11.00	4.25
	5 690	Low	5.14	0.23	5.37	11.00	5.63
		Mid	5.26	0.23	5.49	11.00	5.51
		High	5.04	0.23	5.27	11.00	5.73
	5 775	Low	1.24	0.23	1.47	30.00	28.53
		Mid	0.88	0.23	1.11	30.00	28.89
		High	0.90	0.23	1.13	30.00	28.87
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _242T	5 210	Low	0.25	0.27	0.52	11.00	10.48
		Mid	0.54	0.27	0.81	11.00	10.19
		High	0.64	0.27	0.91	11.00	10.09
	5 290	Low	3.27	0.27	3.54	11.00	7.46
		Mid	3.58	0.27	3.85	11.00	7.15
		High	3.74	0.27	4.01	11.00	6.99
	5 530	Low	3.68	0.27	3.95	11.00	7.05
		Mid	3.78	0.27	4.05	11.00	6.95
		High	3.81	0.27	4.08	11.00	6.92
	5 610	Low	3.46	0.27	3.73	11.00	7.27
		Mid	3.92	0.27	4.19	11.00	6.81
		High	4.01	0.27	4.28	11.00	6.72
	5 690	Low	2.39	0.27	2.66	11.00	8.34
		Mid	2.30	0.27	2.57	11.00	8.43

	High	2.39	0.27	2.66	11.00	8.34
5 775	Low	-1.35	0.27	-1.08	30.00	31.08
	Mid	-1.34	0.27	-1.07	30.00	31.07
	High	-0.59	0.27	-0.32	30.00	30.32
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE80 _484T	5 210	Low	-2.35	0.27	-2.08	11.00	13.08	
		Mid	-					
		High	-1.87	0.27	-1.60	11.00	12.60	
	5 290	Low	-0.62	0.27	-0.35	11.00	11.35	
		Mid	-					
		High	-0.11	0.27	0.16	11.00	10.84	
	5 530	Low	-1.37	0.27	-1.10	11.00	12.10	
		Mid	-					
		High	-0.86	0.27	-0.59	11.00	11.59	
	5 610	Low	-1.39	0.27	-1.12	11.00	12.12	
		Mid	-					
		High	-0.88	0.27	-0.61	11.00	11.61	
	5 690	Low	-3.85	0.27	-3.58	11.00	14.58	
		Mid	-					
		High	-3.81	0.27	-3.54	11.00	14.54	
	5 775	Low	-4.23	0.27	-3.96	30.00	33.96	
		Mid	-					
		High	-3.80	0.27	-3.53	30.00	33.53	
Measurement uncertainty		± 1.5 dB						

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _996T	5 210	-3.72	0.29	-3.43	11.00	14.43
	5 290	-2.21	0.29	-1.92	11.00	12.92
	5 530	-4.21	0.29	-3.92	11.00	14.92
	5 610	-4.59	0.29	-4.30	11.00	15.30
	5 690	-6.54	0.29	-6.25	11.00	17.25
	5 775	-4.86	0.29	-4.57	30.00	34.57
Measurement uncertainty		± 1.5 dB				

ANT R(SISO)

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 180	6.58	0.13	6.71	11.00	4.29
	5 200	6.54	0.13	6.67	11.00	4.33
	5 240	7.46	0.13	7.59	11.00	3.41
	5 260	9.26	0.13	9.39	11.00	1.61
	5 300	9.65	0.13	9.78	11.00	1.22
	5 320	9.74	0.13	9.87	11.00	1.13
	5 500	2.02	0.13	2.15	11.00	8.85
	5 600	1.64	0.13	1.77	11.00	9.23
	5 700	1.18	0.13	1.31	11.00	9.69
	5 720	0.93	0.13	1.06	11.00	9.94
	5 745	2.26	0.13	2.39	30.00	27.61
	5 785	2.47	0.13	2.60	30.00	27.40
	5 825	2.49	0.13	2.62	30.00	27.38
802.11n _HT20	5 180	0.70	0.13	0.83	11.00	10.17
	5 200	0.88	0.13	1.01	11.00	9.99
	5 240	1.91	0.13	2.04	11.00	8.96
	5 260	3.19	0.13	3.32	11.00	7.68
	5 300	4.55	0.13	4.68	11.00	6.32
	5 320	4.43	0.13	4.56	11.00	6.44
	5 500	2.80	0.13	2.93	11.00	8.07
	5 600	2.36	0.13	2.49	11.00	8.51
	5 700	2.15	0.13	2.28	11.00	8.72
	5 720	1.64	0.13	1.77	11.00	9.23
	5 745	1.01	0.13	1.14	30.00	28.86
	5 785	1.21	0.13	1.34	30.00	28.66
	5 825	1.30	0.13	1.43	30.00	28.57
802.11ac _VHT20	5 180	0.65	0.26	0.91	11.00	10.09
	5 200	0.63	0.26	0.89	11.00	10.11
	5 240	1.83	0.26	2.09	11.00	8.91
	5 260	6.39	0.26	6.65	11.00	4.35
	5 300	6.52	0.26	6.78	11.00	4.22
	5 320	6.68	0.26	6.94	11.00	4.06
	5 500	2.49	0.26	2.75	11.00	8.25
	5 600	2.27	0.26	2.53	11.00	8.47

	5 700	1.97	0.26	2.23	11.00	8.77
	5 720	1.42	0.26	1.68	11.00	9.32
	5 745	-0.04	0.26	0.22	30.00	29.78
	5 785	0.30	0.26	0.56	30.00	29.44
	5 825	0.34	0.26	0.60	30.00	29.40
802.11n _HT40	5 190	0.46	0.28	0.74	11.00	10.26
	5 230	1.20	0.28	1.48	11.00	9.52
	5 270	0.67	0.28	0.95	11.00	10.05
	5 310	1.20	0.28	1.48	11.00	9.52
	5 510	-1.07	0.28	-0.79	11.00	11.79
	5 590	-1.08	0.28	-0.80	11.00	11.80
	5 670	-1.65	0.28	-1.37	11.00	12.37
	5 710	-1.66	0.28	-1.38	11.00	12.38
	5 755	-0.67	0.28	-0.39	30.00	30.39
	5 795	-0.20	0.28	0.08	30.00	29.92
802.11ac _VHT40	5 190	0.26	0.50	0.76	11.00	10.24
	5 230	0.77	0.50	1.27	11.00	9.73
	5 270	1.37	0.50	1.87	11.00	9.13
	5 310	1.65	0.50	2.15	11.00	8.85
	5 510	-1.34	0.50	-0.84	11.00	11.84
	5 590	-1.35	0.50	-0.85	11.00	11.85
	5 670	-1.54	0.50	-1.04	11.00	12.04
	5 710	-2.13	0.50	-1.63	11.00	12.63
	5 755	-0.67	0.50	-0.17	30.00	30.17
	5 795	-0.35	0.50	0.15	30.00	29.85
802.11ac _VHT80	5 210	-2.79	0.89	-1.90	11.00	12.90
	5 290	2.12	0.89	3.01	11.00	7.99
	5 530	-2.66	0.89	-1.77	11.00	12.77
	5 610	-2.47	0.89	-1.58	11.00	12.58
	5 690	-3.10	0.89	-2.21	11.00	13.21
	5 775	-2.99	0.89	-2.10	30.00	32.10
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _26T	5 180	Low	0.63	0.21	0.84	11.00	10.16	
		Mid	-0.24	0.21	-0.03	11.00	11.03	
		High	0.71	0.21	0.92	11.00	10.08	
	5 200	Low	0.96	0.21	1.17	11.00	9.83	
		Mid	-0.01	0.21	0.20	11.00	10.80	
		High	1.07	0.21	1.28	11.00	9.72	
	5 240	Low	1.38	0.21	1.59	11.00	9.41	
		Mid	0.39	0.21	0.60	11.00	10.40	
		High	1.78	0.21	1.99	11.00	9.01	
	5 260	Low	6.34	0.21	6.55	11.00	4.45	
		Mid	5.72	0.21	5.93	11.00	5.07	
		High	6.82	0.21	7.03	11.00	3.97	
	5 300	Low	6.81	0.21	7.02	11.00	3.98	
		Mid	5.66	0.21	5.87	11.00	5.13	
		High	7.11	0.21	7.32	11.00	3.68	
	5 320	Low	6.84	0.21	7.05	11.00	3.95	
		Mid	6.16	0.21	6.37	11.00	4.63	
		High	7.15	0.21	7.36	11.00	3.64	
	5 500	Low	6.66	0.21	6.87	11.00	4.13	
		Mid	5.49	0.21	5.70	11.00	5.30	
		High	6.72	0.21	6.93	11.00	4.07	
	5 600	Low	6.85	0.21	7.06	11.00	3.94	
		Mid	6.11	0.21	6.32	11.00	4.68	
		High	6.69	0.21	6.90	11.00	4.10	
	5 700	Low	4.30	0.21	4.51	11.00	6.49	
		Mid	3.81	0.21	4.02	11.00	6.98	
		High	4.48	0.21	4.69	11.00	6.31	
	5 720	Low	4.26	0.21	4.47	11.00	6.53	
		Mid	3.77	0.21	3.98	11.00	7.02	
		High	4.72	0.21	4.93	11.00	6.07	
	5 745	Low	4.33	0.21	4.54	30.00	25.46	
		Mid	4.54	0.21	4.75	30.00	25.25	
		High	4.37	0.21	4.58	30.00	25.42	
	5 785	Low	4.64	0.21	4.85	30.00	25.15	
		Mid	4.56	0.21	4.77	30.00	25.23	
		High	5.11	0.21	5.32	30.00	24.68	
	5 825	Low	4.82	0.21	5.03	30.00	24.97	
		Mid	5.09	0.21	5.30	30.00	24.70	
		High	4.81	0.21	5.02	30.00	24.98	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _52T	5 180	Low	0.54	0.21	0.75	11.00	10.25	
		Mid	0.91	0.21	1.12	11.00	9.88	
		High	0.84	0.21	1.05	11.00	9.95	
	5 200	Low	0.49	0.21	0.70	11.00	10.30	
		Mid	0.78	0.21	0.99	11.00	10.01	
		High	0.78	0.21	0.99	11.00	10.01	
	5 240	Low	1.09	0.21	1.30	11.00	9.70	
		Mid	1.33	0.21	1.54	11.00	9.46	
		High	1.40	0.21	1.61	11.00	9.39	
	5 260	Low	6.14	0.21	6.35	11.00	4.65	
		Mid	6.56	0.21	6.77	11.00	4.23	
		High	6.42	0.21	6.63	11.00	4.37	
	5 300	Low	6.53	0.21	6.74	11.00	4.26	
		Mid	6.95	0.21	7.16	11.00	3.84	
		High	6.96	0.21	7.17	11.00	3.83	
	5 320	Low	7.03	0.21	7.24	11.00	3.76	
		Mid	7.26	0.21	7.47	11.00	3.53	
		High	6.78	0.21	6.99	11.00	4.01	
	5 500	Low	6.55	0.21	6.76	11.00	4.24	
		Mid	6.61	0.21	6.82	11.00	4.18	
		High	6.40	0.21	6.61	11.00	4.39	
	5 600	Low	6.98	0.21	7.19	11.00	3.81	
		Mid	7.20	0.21	7.41	11.00	3.59	
		High	7.05	0.21	7.26	11.00	3.74	
	5 700	Low	4.41	0.21	4.62	11.00	6.38	
		Mid	4.37	0.21	4.58	11.00	6.42	
		High	4.37	0.21	4.58	11.00	6.42	
	5 720	Low	4.21	0.21	4.42	11.00	6.58	
		Mid	4.48	0.21	4.69	11.00	6.31	
		High	4.49	0.21	4.70	11.00	6.30	
	5 745	Low	1.58	0.21	1.79	30.00	28.21	
		Mid	1.90	0.21	2.11	30.00	27.89	
		High	1.83	0.21	2.04	30.00	27.96	
	5 785	Low	1.89	0.21	2.10	30.00	27.90	
		Mid	2.17	0.21	2.38	30.00	27.62	
		High	2.15	0.21	2.36	30.00	27.64	
	5 825	Low	1.67	0.21	1.88	30.00	28.12	
		Mid	2.15	0.21	2.36	30.00	27.64	
		High	2.16	0.21	2.37	30.00	27.63	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _106T	5 180	Low	0.74	0.23	0.97	11.00	10.03	
		Mid	-					
		High	1.16	0.23	1.39	11.00	9.61	
	5 200	Low	0.75	0.23	0.98	11.00	10.02	
		Mid	-					
		High	0.89	0.23	1.12	11.00	9.88	
	5 240	Low	1.75	0.23	1.98	11.00	9.02	
		Mid	-					
		High	1.78	0.23	2.01	11.00	8.99	
	5 260	Low	6.29	0.23	6.52	11.00	4.48	
		Mid	-					
		High	6.44	0.23	6.67	11.00	4.33	
	5 300	Low	6.44	0.23	6.67	11.00	4.33	
		Mid	-					
		High	6.71	0.23	6.94	11.00	4.06	
	5 320	Low	6.78	0.23	7.01	11.00	3.99	
		Mid	-					
		High	6.93	0.23	7.16	11.00	3.84	
	5 500	Low	1.85	0.23	2.08	11.00	8.92	
		Mid	-					
		High	1.64	0.23	1.87	11.00	9.13	
	5 600	Low	2.64	0.23	2.87	11.00	8.13	
		Mid	-					
		High	2.47	0.23	2.70	11.00	8.30	
	5 700	Low	1.16	0.23	1.39	11.00	9.61	
		Mid	-					
		High	1.26	0.23	1.49	11.00	9.51	
	5 720	Low	0.90	0.23	1.13	11.00	9.87	
		Mid	-					
		High	1.32	0.23	1.55	11.00	9.45	
	5 745	Low	0.48	0.23	0.71	30.00	29.29	
		Mid	-					
		High	0.49	0.23	0.72	30.00	29.28	
	5 785	Low	0.73	0.23	0.96	30.00	29.04	
		Mid	-					
		High	0.93	0.23	1.16	30.00	28.84	
	5 825	Low	0.96	0.23	1.19	30.00	28.81	
		Mid	-					
		High	1.02	0.23	1.25	30.00	28.75	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _242T	5 180	1.10	0.26	1.36	11.00	9.64
	5 200	1.29	0.26	1.55	11.00	9.45
	5 240	1.39	0.26	1.65	11.00	9.35
	5 260	3.28	0.26	3.54	11.00	7.46
	5 300	4.02	0.26	4.28	11.00	6.72
	5 320	4.26	0.26	4.52	11.00	6.48
	5 500	0.82	0.26	1.08	11.00	9.92
	5 600	0.87	0.26	1.13	11.00	9.87
	5 700	0.07	0.26	0.33	11.00	10.67
	5 720	0.42	0.26	0.68	11.00	10.32
	5 745	-0.15	0.26	0.11	30.00	29.89
	5 785	0.00	0.26	0.26	30.00	29.74
	5 825	0.45	0.26	0.71	30.00	29.29
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _26T	5 190	Low	0.91	0.21	1.12	11.00	9.88
		Mid	1.21	0.21	1.42	11.00	9.58
		High	0.80	0.21	1.01	11.00	9.99
	5 230	Low	0.97	0.21	1.18	11.00	9.82
		Mid	1.18	0.21	1.39	11.00	9.61
		High	0.92	0.21	1.13	11.00	9.87
	5 270	Low	6.03	0.21	6.24	11.00	4.76
		Mid	6.58	0.21	6.79	11.00	4.21
		High	6.37	0.21	6.58	11.00	4.42
	5 310	Low	6.19	0.21	6.40	11.00	4.60
		Mid	7.17	0.21	7.38	11.00	3.62
		High	6.40	0.21	6.61	11.00	4.39
	5 510	Low	5.36	0.21	5.57	11.00	5.43
		Mid	5.19	0.21	5.40	11.00	5.60
		High	5.08	0.21	5.29	11.00	5.71
	5 590	Low	5.49	0.21	5.70	11.00	5.30
		Mid	5.93	0.21	6.14	11.00	4.86
		High	5.69	0.21	5.90	11.00	5.10
	5 670	Low	4.71	0.21	4.92	11.00	6.08
		Mid	4.82	0.21	5.03	11.00	5.97
		High	4.17	0.21	4.38	11.00	6.62
	5 710	Low	4.27	0.21	4.48	11.00	6.52
		Mid	4.56	0.21	4.77	11.00	6.23
		High	4.01	0.21	4.22	11.00	6.78
	5 755	Low	6.79	0.21	7.00	30.00	23.00
		Mid	6.86	0.21	7.07	30.00	22.93
		High	6.88	0.21	7.09	30.00	22.91
	5 795	Low	6.73	0.21	6.94	30.00	23.06
		Mid	7.13	0.21	7.34	30.00	22.66
		High	7.54	0.21	7.75	30.00	22.25
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _52T	5 190	Low	0.90	0.22	1.12	11.00	9.88
		Mid	1.16	0.22	1.38	11.00	9.62
		High	1.18	0.22	1.40	11.00	9.60
	5 230	Low	1.03	0.22	1.25	11.00	9.75
		Mid	1.33	0.22	1.55	11.00	9.45
		High	1.06	0.22	1.28	11.00	9.72
	5 270	Low	5.90	0.22	6.12	11.00	4.88
		Mid	6.37	0.22	6.59	11.00	4.41
		High	6.38	0.22	6.60	11.00	4.40
	5 310	Low	5.97	0.22	6.19	11.00	4.81
		Mid	6.78	0.22	7.00	11.00	4.00
		High	6.40	0.22	6.62	11.00	4.38
	5 510	Low	5.18	0.22	5.40	11.00	5.60
		Mid	4.97	0.22	5.19	11.00	5.81
		High	4.96	0.22	5.18	11.00	5.82
	5 590	Low	5.19	0.22	5.41	11.00	5.59
		Mid	5.66	0.22	5.88	11.00	5.12
		High	5.50	0.22	5.72	11.00	5.28
	5 670	Low	4.24	0.22	4.46	11.00	6.54
		Mid	4.17	0.22	4.39	11.00	6.61
		High	3.88	0.22	4.10	11.00	6.90
	5 710	Low	4.17	0.22	4.39	11.00	6.61
		Mid	4.22	0.22	4.44	11.00	6.56
		High	3.88	0.22	4.10	11.00	6.90
	5 755	Low	3.94	0.22	4.16	30.00	25.84
		Mid	4.37	0.22	4.59	30.00	25.41
		High	4.10	0.22	4.32	30.00	25.68
	5 795	Low	4.35	0.22	4.57	30.00	25.43
		Mid	4.25	0.22	4.47	30.00	25.53
		High	4.74	0.22	4.96	30.00	25.04
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _106T	5 190	Low	0.93	0.24	1.17	11.00	9.83
		Mid	1.23	0.24	1.47	11.00	9.53
		High	1.46	0.24	1.70	11.00	9.30
	5 230	Low	1.37	0.24	1.61	11.00	9.39
		Mid	1.68	0.24	1.92	11.00	9.08
		High	1.54	0.24	1.78	11.00	9.22
	5 270	Low	5.90	0.24	6.14	11.00	4.86
		Mid	6.31	0.24	6.55	11.00	4.45
		High	6.06	0.24	6.30	11.00	4.70
	5 310	Low	6.23	0.24	6.47	11.00	4.53
		Mid	6.78	0.24	7.02	11.00	3.98
		High	6.40	0.24	6.64	11.00	4.36
	5 510	Low	4.54	0.24	4.78	11.00	6.22
		Mid	4.64	0.24	4.88	11.00	6.12
		High	4.82	0.24	5.06	11.00	5.94
	5 590	Low	4.80	0.24	5.04	11.00	5.96
		Mid	5.03	0.24	5.27	11.00	5.73
		High	4.61	0.24	4.85	11.00	6.15
	5 670	Low	3.31	0.24	3.55	11.00	7.45
		Mid	3.58	0.24	3.82	11.00	7.18
		High	3.41	0.24	3.65	11.00	7.35
	5 710	Low	3.61	0.24	3.85	11.00	7.15
		Mid	3.30	0.24	3.54	11.00	7.46
		High	3.42	0.24	3.66	11.00	7.34
	5 755	Low	1.81	0.24	2.05	30.00	27.95
		Mid	1.97	0.24	2.21	30.00	27.79
		High	2.36	0.24	2.60	30.00	27.40
	5 795	Low	1.74	0.24	1.98	30.00	28.02
		Mid	2.22	0.24	2.46	30.00	27.54
		High	2.43	0.24	2.67	30.00	27.33
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _242T	5 190	Low	0.47	0.27	0.74	11.00	10.26
		Mid	-				
		High	0.42	0.27	0.69	11.00	10.31
	5 230	Low	0.78	0.27	1.05	11.00	9.95
		Mid	-				
		High	0.73	0.27	1.00	11.00	10.00
	5 270	Low	3.74	0.27	4.01	11.00	6.99
		Mid	-				
		High	4.16	0.27	4.43	11.00	6.57
	5 310	Low	4.41	0.27	4.68	11.00	6.32
		Mid	-				
		High	4.54	0.27	4.81	11.00	6.19
	5 510	Low	1.83	0.27	2.10	11.00	8.90
		Mid	-				
		High	1.93	0.27	2.20	11.00	8.80
	5 590	Low	1.78	0.27	2.05	11.00	8.95
		Mid	-				
		High	1.83	0.27	2.10	11.00	8.90
	5 670	Low	0.82	0.27	1.09	11.00	9.91
		Mid	-				
		High	0.79	0.27	1.06	11.00	9.94
	5 710	Low	0.54	0.27	0.81	11.00	10.19
		Mid	-				
		High	0.44	0.27	0.71	11.00	10.29
	5 755	Low	-0.23	0.27	0.04	30.00	29.96
		Mid	-				
		High	-0.18	0.27	0.09	30.00	29.91
	5 795	Low	0.03	0.27	0.30	30.00	29.70
		Mid	-				
		High	-0.18	0.27	0.09	30.00	29.91
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _484T	5 190	-0.28	0.28	0.00	11.00	11.00
	5 230	-0.85	0.28	-0.57	11.00	11.57
	5 270	0.86	0.28	1.14	11.00	9.86
	5 310	0.85	0.28	1.13	11.00	9.87
	5 510	-3.11	0.28	-2.83	11.00	13.83
	5 590	-2.22	0.28	-1.94	11.00	12.94
	5 670	-3.80	0.28	-3.52	11.00	14.52
	5 710	-3.94	0.28	-3.66	11.00	14.66
	5 755	-1.30	0.28	-1.02	30.00	31.02
	5 795	-1.39	0.28	-1.11	30.00	31.11
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _26T	5 210	Low	0.64	0.21	0.85	11.00	10.15
		Mid	0.61	0.21	0.82	11.00	10.18
		High	0.87	0.21	1.08	11.00	9.92
	5 290	Low	6.22	0.21	6.43	11.00	4.57
		Mid	6.16	0.21	6.37	11.00	4.63
		High	6.71	0.21	6.92	11.00	4.08
	5 530	Low	5.77	0.21	5.98	11.00	5.02
		Mid	5.84	0.21	6.05	11.00	4.95
		High	6.40	0.21	6.61	11.00	4.39
	5 610	Low	6.92	0.21	7.13	11.00	3.87
		Mid	6.62	0.21	6.83	11.00	4.17
		High	6.46	0.21	6.67	11.00	4.33
	5 690	Low	5.11	0.21	5.32	11.00	5.68
		Mid	5.04	0.21	5.25	11.00	5.75
		High	4.80	0.21	5.01	11.00	5.99
	5 775	Low	5.40	0.21	5.61	30.00	24.39
		Mid	4.63	0.21	4.84	30.00	25.16
		High	5.55	0.21	5.76	30.00	24.24
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _52T	5 210	Low	0.14	0.22	0.36	11.00	10.64
		Mid	0.19	0.22	0.41	11.00	10.59
		High	0.67	0.22	0.89	11.00	10.11
	5 290	Low	5.92	0.22	6.14	11.00	4.86
		Mid	5.99	0.22	6.21	11.00	4.79
		High	7.03	0.22	7.25	11.00	3.75
	5 530	Low	5.79	0.22	6.01	11.00	4.99
		Mid	6.03	0.22	6.25	11.00	4.75
		High	5.62	0.22	5.84	11.00	5.16
	5 610	Low	6.41	0.22	6.63	11.00	4.37
		Mid	6.26	0.22	6.48	11.00	4.52
		High	6.28	0.22	6.50	11.00	4.50
	5 690	Low	4.75	0.22	4.97	11.00	6.03
		Mid	4.52	0.22	4.74	11.00	6.26
		High	4.94	0.22	5.16	11.00	5.84
	5 775	Low	1.69	0.22	1.91	30.00	28.09
		Mid	1.19	0.22	1.41	30.00	28.59

		High	1.69	0.22	1.91	30.00	28.09
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _106T	5 210	Low	0.32	0.23	0.55	11.00	10.45
		Mid	0.61	0.23	0.84	11.00	10.16
		High	0.84	0.23	1.07	11.00	9.93
	5 290	Low	6.13	0.23	6.36	11.00	4.64
		Mid	6.23	0.23	6.46	11.00	4.54
		High	6.99	0.23	7.22	11.00	3.78
	5 530	Low	5.64	0.23	5.87	11.00	5.13
		Mid	5.72	0.23	5.95	11.00	5.05
		High	5.60	0.23	5.83	11.00	5.17
	5 610	Low	5.79	0.23	6.02	11.00	4.98
		Mid	5.63	0.23	5.86	11.00	5.14
		High	5.90	0.23	6.13	11.00	4.87
	5 690	Low	5.21	0.23	5.44	11.00	5.56
		Mid	5.11	0.23	5.34	11.00	5.66
		High	5.01	0.23	5.24	11.00	5.76
	5 775	Low	0.49	0.23	0.72	30.00	29.28
		Mid	0.05	0.23	0.28	30.00	29.72
		High	0.66	0.23	0.89	30.00	29.11
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _242T	5 210	Low	0.55	0.27	0.82	11.00	10.18
		Mid	1.01	0.27	1.28	11.00	9.72
		High	0.96	0.27	1.23	11.00	9.77
	5 290	Low	3.06	0.27	3.33	11.00	7.67
		Mid	3.77	0.27	4.04	11.00	6.96
		High	3.95	0.27	4.22	11.00	6.78
	5 530	Low	2.76	0.27	3.03	11.00	7.97
		Mid	2.58	0.27	2.85	11.00	8.15
		High	2.94	0.27	3.21	11.00	7.79
	5 610	Low	2.79	0.27	3.06	11.00	7.94
		Mid	2.73	0.27	3.00	11.00	8.00
		High	2.82	0.27	3.09	11.00	7.91
	5 690	Low	2.04	0.27	2.31	11.00	8.69
		Mid	1.96	0.27	2.23	11.00	8.77

		High	2.13	0.27	2.40	11.00	8.60
	5 775	Low	-1.94	0.27	-1.67	30.00	31.67
		Mid	-1.76	0.27	-1.49	30.00	31.49
		High	-1.64	0.27	-1.37	30.00	31.37
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _484T	5 210	Low	-2.43	0.27	-2.16	11.00	13.16
		Mid	-				
		High	-1.91	0.27	-1.64	11.00	12.64
	5 290	Low	-0.56	0.27	-0.29	11.00	11.29
		Mid	-				
		High	0.30	0.27	0.57	11.00	10.43
	5 530	Low	-2.28	0.27	-2.01	11.00	13.01
		Mid	-				
		High	-2.32	0.27	-2.05	11.00	13.05
	5 610	Low	-1.64	0.27	-1.37	11.00	12.37
		Mid	-				
		High	-1.97	0.27	-1.70	11.00	12.70
	5 690	Low	-3.34	0.27	-3.07	11.00	14.07
		Mid	-				
		High	-3.66	0.27	-3.39	11.00	14.39
	5 775	Low	-4.36	0.27	-4.09	30.00	34.09
		Mid	-				
		High	-4.07	0.27	-3.80	30.00	33.80
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _996T	5 210	-3.68	0.29	-3.39	11.00	14.39
	5 290	-3.46	0.29	-3.17	11.00	14.17
	5 530	-6.31	0.29	-6.02	11.00	17.02
	5 610	-5.58	0.29	-5.29	11.00	16.29
	5 690	-6.84	0.29	-6.55	11.00	17.55
	5 775	-6.45	0.29	-6.16	30.00	36.16
Measurement uncertainty		± 1.5 dB				

ANT L + ANT R(MIMO)

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11n _HT20	5 180	3.46	0.13	3.59	11.00	7.41
	5 200	3.72	0.13	3.85	11.00	7.15
	5 240	4.70	0.13	4.83	11.00	6.17
	5 260	6.50	0.13	6.63	11.00	4.37
	5 300	7.76	0.13	7.89	11.00	3.11
	5 320	7.48	0.13	7.61	11.00	3.39
	5 500	6.73	0.13	6.86	11.00	4.14
	5 600	5.93	0.13	6.06	11.00	4.94
	5 700	5.50	0.13	5.63	11.00	5.37
	5 720	5.14	0.13	5.27	11.00	5.73
	5 745	5.01	0.13	5.14	30.00	24.86
	5 785	5.27	0.13	5.40	30.00	24.60
	5 825	5.58	0.13	5.71	30.00	24.29
802.11ac _VHT20	5 180	3.46	0.26	3.72	11.00	7.28
	5 200	3.51	0.26	3.77	11.00	7.23
	5 240	4.56	0.26	4.82	11.00	6.18
	5 260	9.26	0.26	9.52	11.00	1.48
	5 300	8.99	0.26	9.25	11.00	1.75
	5 320	9.11	0.26	9.37	11.00	1.63
	5 500	6.42	0.26	6.68	11.00	4.32
	5 600	5.89	0.26	6.15	11.00	4.85
	5 700	5.18	0.26	5.44	11.00	5.56
	5 720	4.98	0.26	5.24	11.00	5.76
	5 745	4.03	0.26	4.29	30.00	25.71
	5 785	4.11	0.26	4.37	30.00	25.63
	5 825	4.49	0.26	4.75	30.00	25.25
802.11n _HT40	5 190	3.80	0.28	4.08	11.00	6.92
	5 230	3.94	0.28	4.22	11.00	6.78
	5 270	4.14	0.28	4.42	11.00	6.58
	5 310	4.53	0.28	4.81	11.00	6.19
	5 510	3.29	0.28	3.57	11.00	7.43
	5 590	2.59	0.28	2.87	11.00	8.13
	5 670	1.75	0.28	2.03	11.00	8.97
	5 710	1.99	0.28	2.27	11.00	8.73

	5 755	3.36	0.28	3.64	30.00	26.36
	5 795	3.78	0.28	4.06	30.00	25.94
802.11ac _VHT40	5 190	3.46	0.50	3.96	11.00	7.04
	5 230	3.80	0.50	4.30	11.00	6.70
	5 270	4.89	0.50	5.39	11.00	5.61
	5 310	5.12	0.50	5.62	11.00	5.38
	5 510	2.83	0.50	3.33	11.00	7.67
	5 590	2.22	0.50	2.72	11.00	8.28
	5 670	1.59	0.50	2.09	11.00	8.91
	5 710	1.60	0.50	2.10	11.00	8.90
	5 755	3.18	0.50	3.68	30.00	26.32
	5 795	3.70	0.50	4.20	30.00	25.80
802.11ac _VHT80	5 210	0.22	0.89	1.11	11.00	9.89
	5 290	5.77	0.89	6.66	11.00	4.34
	5 530	1.46	0.89	2.35	11.00	8.65
	5 610	1.47	0.89	2.36	11.00	8.64
	5 690	0.60	0.89	1.49	11.00	9.51
	5 775	0.71	0.89	1.60	30.00	28.40
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _26T	5 180	Low	3.44	0.21	3.65	11.00	7.35	
		Mid	2.68	0.21	2.89	11.00	8.11	
		High	3.71	0.21	3.92	11.00	7.08	
	5 200	Low	3.61	0.21	3.82	11.00	7.18	
		Mid	2.92	0.21	3.13	11.00	7.87	
		High	3.84	0.21	4.05	11.00	6.95	
	5 240	Low	4.07	0.21	4.28	11.00	6.72	
		Mid	3.29	0.21	3.50	11.00	7.50	
		High	4.47	0.21	4.68	11.00	6.32	
	5 260	Low	9.53	0.21	9.74	11.00	1.26	
		Mid	8.73	0.21	8.94	11.00	2.06	
		High	9.69	0.21	9.90	11.00	1.10	
	5 300	Low	9.33	0.21	9.54	11.00	1.46	
		Mid	8.38	0.21	8.59	11.00	2.41	
		High	9.67	0.21	9.88	11.00	1.12	
	5 320	Low	9.31	0.21	9.52	11.00	1.48	
		Mid	8.76	0.21	8.97	11.00	2.03	
		High	9.85	0.21	10.06	11.00	0.94	
	5 500	Low	9.56	0.21	9.77	11.00	1.23	
		Mid	8.59	0.21	8.80	11.00	2.20	
		High	9.74	0.21	9.95	11.00	1.05	
	5 600	Low	9.46	0.21	9.67	11.00	1.33	
		Mid	8.59	0.21	8.80	11.00	2.20	
		High	9.48	0.21	9.69	11.00	1.31	
	5 700	Low	7.89	0.21	8.10	11.00	2.90	
		Mid	7.29	0.21	7.50	11.00	3.50	
		High	7.99	0.21	8.20	11.00	2.80	
	5 720	Low	7.94	0.21	8.15	11.00	2.85	
		Mid	7.05	0.21	7.26	11.00	3.74	
		High	8.07	0.21	8.28	11.00	2.72	
	5 745	Low	7.96	0.21	8.17	30.00	21.83	
		Mid	8.44	0.21	8.65	30.00	21.35	
		High	8.25	0.21	8.46	30.00	21.54	
	5 785	Low	8.27	0.21	8.48	30.00	21.52	
		Mid	8.44	0.21	8.65	30.00	21.35	
		High	8.72	0.21	8.93	30.00	21.07	
	5 825	Low	8.77	0.21	8.98	30.00	21.02	
		Mid	9.01	0.21	9.22	30.00	20.78	
		High	9.05	0.21	9.26	30.00	20.74	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _52T	5 180	Low	3.20	0.21	3.41	11.00	7.59	
		Mid	3.45	0.21	3.66	11.00	7.34	
		High	3.59	0.21	3.80	11.00	7.20	
	5 200	Low	3.23	0.21	3.44	11.00	7.56	
		Mid	3.59	0.21	3.80	11.00	7.20	
		High	3.64	0.21	3.85	11.00	7.15	
	5 240	Low	3.73	0.21	3.94	11.00	7.06	
		Mid	4.21	0.21	4.42	11.00	6.58	
		High	4.32	0.21	4.53	11.00	6.47	
	5 260	Low	9.15	0.21	9.36	11.00	1.64	
		Mid	9.38	0.21	9.59	11.00	1.41	
		High	9.32	0.21	9.53	11.00	1.47	
	5 300	Low	9.13	0.21	9.34	11.00	1.66	
		Mid	9.41	0.21	9.62	11.00	1.38	
		High	9.37	0.21	9.58	11.00	1.42	
	5 320	Low	9.40	0.21	9.61	11.00	1.39	
		Mid	9.63	0.21	9.84	11.00	1.16	
		High	9.45	0.21	9.66	11.00	1.34	
	5 500	Low	9.34	0.21	9.55	11.00	1.45	
		Mid	9.68	0.21	9.89	11.00	1.11	
		High	9.41	0.21	9.62	11.00	1.38	
	5 600	Low	9.48	0.21	9.69	11.00	1.31	
		Mid	9.65	0.21	9.86	11.00	1.14	
		High	9.47	0.21	9.68	11.00	1.32	
	5 700	Low	7.79	0.21	8.00	11.00	3.00	
		Mid	8.02	0.21	8.23	11.00	2.77	
		High	7.92	0.21	8.13	11.00	2.87	
	5 720	Low	7.71	0.21	7.92	11.00	3.08	
		Mid	7.86	0.21	8.07	11.00	2.93	
		High	7.68	0.21	7.89	11.00	3.11	
	5 745	Low	5.39	0.21	5.60	30.00	24.40	
		Mid	5.75	0.21	5.96	30.00	24.04	
		High	5.53	0.21	5.74	30.00	24.26	
	5 785	Low	5.54	0.21	5.75	30.00	24.25	
		Mid	5.82	0.21	6.03	30.00	23.97	
		High	5.91	0.21	6.12	30.00	23.88	
	5 825	Low	5.92	0.21	6.13	30.00	23.87	
		Mid	6.37	0.21	6.58	30.00	23.42	
		High	6.12	0.21	6.33	30.00	23.67	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)	
802.11ax _HE20 _106T	5 180	Low	3.40	0.23	3.63	11.00	7.37	
		Mid	-					
		High	3.70	0.23	3.93	11.00	7.07	
	5 200	Low	3.55	0.23	3.78	11.00	7.22	
		Mid	-					
		High	3.66	0.23	3.89	11.00	7.11	
	5 240	Low	4.37	0.23	4.60	11.00	6.40	
		Mid	-					
		High	4.65	0.23	4.88	11.00	6.12	
	5 260	Low	9.38	0.23	9.61	11.00	1.39	
		Mid	-					
		High	9.52	0.23	9.75	11.00	1.25	
	5 300	Low	9.21	0.23	9.44	11.00	1.56	
		Mid	-					
		High	9.39	0.23	9.62	11.00	1.38	
	5 320	Low	9.25	0.23	9.48	11.00	1.52	
		Mid	-					
		High	9.40	0.23	9.63	11.00	1.37	
	5 500	Low	5.71	0.23	5.94	11.00	5.06	
		Mid	-					
		High	5.76	0.23	5.99	11.00	5.01	
	5 600	Low	6.10	0.23	6.33	11.00	4.67	
		Mid	-					
		High	6.04	0.23	6.27	11.00	4.73	
	5 700	Low	4.35	0.23	4.58	11.00	6.42	
		Mid	-					
		High	4.58	0.23	4.81	11.00	6.19	
	5 720	Low	4.32	0.23	4.55	11.00	6.45	
		Mid	-					
		High	4.42	0.23	4.65	11.00	6.35	
	5 745	Low	4.57	0.23	4.80	30.00	25.20	
		Mid	-					
		High	4.71	0.23	4.94	30.00	25.06	
	5 785	Low	4.81	0.23	5.04	30.00	24.96	
		Mid	-					
		High	5.18	0.23	5.41	30.00	24.59	
	5 825	Low	5.12	0.23	5.35	30.00	24.65	
		Mid	-					
		High	5.30	0.23	5.53	30.00	24.47	
	Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE20 _242T	5 180	3.76	0.26	4.02	11.00	6.98
	5 200	4.18	0.26	4.44	11.00	6.56
	5 240	4.28	0.26	4.54	11.00	6.46
	5 260	6.83	0.26	7.09	11.00	3.91
	5 300	7.22	0.26	7.48	11.00	3.52
	5 320	7.38	0.26	7.64	11.00	3.36
	5 500	4.89	0.26	5.15	11.00	5.85
	5 600	4.35	0.26	4.61	11.00	6.39
	5 700	3.54	0.26	3.80	11.00	7.20
	5 720	3.74	0.26	4.00	11.00	7.00
	5 745	3.88	0.26	4.14	30.00	25.86
	5 785	3.98	0.26	4.24	30.00	25.76
	5 825	4.57	0.26	4.83	30.00	25.17
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _26T	5 190	Low	3.50	0.21	3.71	11.00	7.29
		Mid	3.86	0.21	4.07	11.00	6.93
		High	3.63	0.21	3.84	11.00	7.16
	5 230	Low	3.77	0.21	3.98	11.00	7.02
		Mid	3.95	0.21	4.16	11.00	6.84
		High	3.88	0.21	4.09	11.00	6.91
	5 270	Low	8.96	0.21	9.17	11.00	1.83
		Mid	9.41	0.21	9.62	11.00	1.38
		High	9.43	0.21	9.64	11.00	1.36
	5 310	Low	9.16	0.21	9.37	11.00	1.63
		Mid	9.94	0.21	10.15	11.00	0.85
		High	9.44	0.21	9.65	11.00	1.35
	5 510	Low	9.34	0.21	9.55	11.00	1.45
		Mid	9.64	0.21	9.85	11.00	1.15
		High	9.27	0.21	9.48	11.00	1.52
	5 590	Low	9.29	0.21	9.50	11.00	1.50
		Mid	9.68	0.21	9.89	11.00	1.11
		High	9.48	0.21	9.69	11.00	1.31
	5 670	Low	7.77	0.21	7.98	11.00	3.02
		Mid	7.91	0.21	8.12	11.00	2.88
		High	7.25	0.21	7.46	11.00	3.54
	5 710	Low	7.43	0.21	7.64	11.00	3.36
		Mid	7.93	0.21	8.14	11.00	2.86
		High	7.32	0.21	7.53	11.00	3.47
	5 755	Low	9.48	0.21	9.69	30.00	20.31
		Mid	9.60	0.21	9.81	30.00	20.19
		High	9.56	0.21	9.77	30.00	20.23
	5 795	Low	9.40	0.21	9.61	30.00	20.39
		Mid	9.86	0.21	10.07	30.00	19.93
		High	10.03	0.21	10.24	30.00	19.76
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _52T	5 190	Low	3.57	0.22	3.79	11.00	7.21
		Mid	4.11	0.22	4.33	11.00	6.67
		High	4.18	0.22	4.40	11.00	6.60
	5 230	Low	3.80	0.22	4.02	11.00	6.98
		Mid	4.45	0.22	4.67	11.00	6.33
		High	4.12	0.22	4.34	11.00	6.66
	5 270	Low	8.72	0.22	8.94	11.00	2.06
		Mid	9.16	0.22	9.38	11.00	1.62
		High	9.24	0.22	9.46	11.00	1.54
	5 310	Low	8.94	0.22	9.16	11.00	1.84
		Mid	9.58	0.22	9.80	11.00	1.20
		High	9.47	0.22	9.69	11.00	1.31
	5 510	Low	9.27	0.22	9.49	11.00	1.51
		Mid	9.25	0.22	9.47	11.00	1.53
		High	9.16	0.22	9.38	11.00	1.62
	5 590	Low	8.89	0.22	9.11	11.00	1.89
		Mid	9.26	0.22	9.48	11.00	1.52
		High	9.10	0.22	9.32	11.00	1.68
	5 670	Low	7.29	0.22	7.51	11.00	3.49
		Mid	7.57	0.22	7.79	11.00	3.21
		High	7.09	0.22	7.31	11.00	3.69
	5 710	Low	7.32	0.22	7.54	11.00	3.46
		Mid	7.53	0.22	7.75	11.00	3.25
		High	7.09	0.22	7.31	11.00	3.69
	5 755	Low	6.89	0.22	7.11	30.00	22.89
		Mid	7.11	0.22	7.33	30.00	22.67
		High	6.78	0.22	7.00	30.00	23.00
	5 795	Low	7.13	0.22	7.35	30.00	22.65
		Mid	7.26	0.22	7.48	30.00	22.52
		High	7.16	0.22	7.38	30.00	22.62
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _106T	5 190	Low	3.84	0.24	4.08	11.00	6.92
		Mid	4.13	0.24	4.37	11.00	6.63
		High	4.28	0.24	4.52	11.00	6.48
	5 230	Low	4.15	0.24	4.39	11.00	6.61
		Mid	4.38	0.24	4.62	11.00	6.38
		High	4.41	0.24	4.65	11.00	6.35
	5 270	Low	8.70	0.24	8.94	11.00	2.06
		Mid	8.95	0.24	9.19	11.00	1.81
		High	8.97	0.24	9.21	11.00	1.79
	5 310	Low	9.05	0.24	9.29	11.00	1.71
		Mid	9.55	0.24	9.79	11.00	1.21
		High	9.55	0.24	9.79	11.00	1.21
	5 510	Low	8.07	0.24	8.31	11.00	2.69
		Mid	8.10	0.24	8.34	11.00	2.66
		High	8.19	0.24	8.43	11.00	2.57
	5 590	Low	7.98	0.24	8.22	11.00	2.78
		Mid	8.21	0.24	8.45	11.00	2.55
		High	7.96	0.24	8.20	11.00	2.80
	5 670	Low	6.35	0.24	6.59	11.00	4.41
		Mid	6.40	0.24	6.64	11.00	4.36
		High	6.15	0.24	6.39	11.00	4.61
	5 710	Low	6.30	0.24	6.54	11.00	4.46
		Mid	6.21	0.24	6.45	11.00	4.55
		High	6.20	0.24	6.44	11.00	4.56
	5 755	Low	4.98	0.24	5.22	30.00	24.78
		Mid	4.97	0.24	5.21	30.00	24.79
		High	5.18	0.24	5.42	30.00	24.58
	5 795	Low	5.04	0.24	5.28	30.00	24.72
		Mid	5.20	0.24	5.44	30.00	24.56
		High	5.24	0.24	5.48	30.00	24.52
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _242T	5 190	Low	3.25	0.27	3.52	11.00	7.48
		Mid	-				
		High	3.36	0.27	3.63	11.00	7.37
	5 230	Low	3.56	0.27	3.83	11.00	7.17
		Mid	-				
		High	3.58	0.27	3.85	11.00	7.15
	5 270	Low	6.41	0.27	6.68	11.00	4.32
		Mid	-				
		High	6.85	0.27	7.12	11.00	3.88
	5 310	Low	7.03	0.27	7.30	11.00	3.70
		Mid	-				
		High	7.10	0.27	7.37	11.00	3.63
	5 510	Low	5.30	0.27	5.57	11.00	5.43
		Mid	-				
		High	5.38	0.27	5.65	11.00	5.35
	5 590	Low	5.23	0.27	5.50	11.00	5.50
		Mid	-				
		High	5.11	0.27	5.38	11.00	5.62
	5 670	Low	3.55	0.27	3.82	11.00	7.18
		Mid	-				
		High	3.56	0.27	3.83	11.00	7.17
	5 710	Low	3.39	0.27	3.66	11.00	7.34
		Mid	-				
		High	3.27	0.27	3.54	11.00	7.46
	5 755	Low	2.85	0.27	3.12	30.00	26.88
		Mid	-				
		High	2.61	0.27	2.88	30.00	27.12
	5 795	Low	3.10	0.27	3.37	30.00	26.63
		Mid	-				
		High	2.86	0.27	3.13	30.00	26.87
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE40 _484T	5 190	2.52	0.28	2.80	11.00	8.20
	5 230	2.36	0.28	2.64	11.00	8.36
	5 270	4.15	0.28	4.43	11.00	6.57
	5 310	4.26	0.28	4.54	11.00	6.46
	5 510	1.14	0.28	1.42	11.00	9.58
	5 590	1.23	0.28	1.51	11.00	9.49
	5 670	-0.46	0.28	-0.18	11.00	11.18
	5 710	-0.38	0.28	-0.10	11.00	11.10
	5 755	2.58	0.28	2.86	30.00	27.14
	5 795	2.56	0.28	2.84	30.00	27.16
Measurement uncertainty		± 1.5 dB				

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _26T	5 210	Low	3.29	0.21	3.50	11.00	7.50
		Mid	3.37	0.21	3.58	11.00	7.42
		High	3.75	0.21	3.96	11.00	7.04
	5 290	Low	8.73	0.21	8.94	11.00	2.06
		Mid	8.90	0.21	9.11	11.00	1.89
		High	9.53	0.21	9.74	11.00	1.26
	5 530	Low	9.43	0.21	9.64	11.00	1.36
		Mid	9.44	0.21	9.65	11.00	1.35
		High	9.93	0.21	10.14	11.00	0.86
	5 610	Low	9.71	0.21	9.92	11.00	1.08
		Mid	9.73	0.21	9.94	11.00	1.06
		High	9.54	0.21	9.75	11.00	1.25
	5 690	Low	7.79	0.21	8.00	11.00	3.00
		Mid	7.79	0.21	8.00	11.00	3.00
		High	7.61	0.21	7.82	11.00	3.18
	5 775	Low	8.63	0.21	8.84	30.00	21.16
		Mid	8.21	0.21	8.42	30.00	21.58
		High	8.88	0.21	9.09	30.00	20.91
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _52T	5 210	Low	2.94	0.22	3.16	11.00	7.84
		Mid	3.20	0.22	3.42	11.00	7.58
		High	3.72	0.22	3.94	11.00	7.06
	5 290	Low	8.72	0.22	8.94	11.00	2.06
		Mid	8.88	0.22	9.10	11.00	1.90
		High	9.53	0.22	9.75	11.00	1.25
	5 530	Low	9.18	0.22	9.40	11.00	1.60
		Mid	9.36	0.22	9.58	11.00	1.42
		High	9.49	0.22	9.71	11.00	1.29
	5 610	Low	9.41	0.22	9.63	11.00	1.37
		Mid	9.46	0.22	9.68	11.00	1.32
		High	9.29	0.22	9.51	11.00	1.49
	5 690	Low	7.37	0.22	7.59	11.00	3.41
		Mid	7.46	0.22	7.68	11.00	3.32
		High	7.72	0.22	7.94	11.00	3.06
	5 775	Low	5.04	0.22	5.26	30.00	24.74
		Mid	4.64	0.22	4.86	30.00	25.14

		High	4.85	0.22	5.07	30.00	24.93
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _106T	5 210	Low	3.19	0.23	3.42	11.00	7.58
		Mid	3.37	0.23	3.60	11.00	7.40
		High	3.69	0.23	3.92	11.00	7.08
	5 290	Low	8.82	0.23	9.05	11.00	1.95
		Mid	9.05	0.23	9.28	11.00	1.72
		High	9.73	0.23	9.96	11.00	1.04
	5 530	Low	9.24	0.23	9.47	11.00	1.53
		Mid	9.27	0.23	9.50	11.00	1.50
		High	9.42	0.23	9.65	11.00	1.35
	5 610	Low	8.98	0.23	9.21	11.00	1.79
		Mid	9.06	0.23	9.29	11.00	1.71
		High	9.23	0.23	9.46	11.00	1.54
	5 690	Low	8.19	0.23	8.42	11.00	2.58
		Mid	8.20	0.23	8.43	11.00	2.57
		High	8.04	0.23	8.27	11.00	2.73
	5 775	Low	3.89	0.23	4.12	30.00	25.88
		Mid	3.50	0.23	3.73	30.00	26.27
		High	3.79	0.23	4.02	30.00	25.98
Measurement uncertainty		± 1.5 dB					




Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _242T	5 210	Low	3.41	0.27	3.68	11.00	7.32
		Mid	3.79	0.27	4.06	11.00	6.94
		High	3.81	0.27	4.08	11.00	6.92
	5 290	Low	6.18	0.27	6.45	11.00	4.55
		Mid	6.69	0.27	6.96	11.00	4.04
		High	6.86	0.27	7.13	11.00	3.87
	5 530	Low	6.25	0.27	6.52	11.00	4.48
		Mid	6.23	0.27	6.50	11.00	4.50
		High	6.41	0.27	6.68	11.00	4.32
	5 610	Low	6.15	0.27	6.42	11.00	4.58
		Mid	6.38	0.27	6.65	11.00	4.35
		High	6.47	0.27	6.74	11.00	4.26
	5 690	Low	5.23	0.27	5.50	11.00	5.50
		Mid	5.14	0.27	5.41	11.00	5.59

		High	5.27	0.27	5.54	11.00	5.46
	5 775	Low	1.38	0.27	1.65	30.00	28.35
		Mid	1.47	0.27	1.74	30.00	28.26
		High	1.93	0.27	2.20	30.00	27.80
Measurement uncertainty		± 1.5 dB					




Test Mode	Frequency (MHz)	RU Index	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _484T	5 210	Low	0.62	0.27	0.89	11.00	10.11
		Mid	-				
		High	1.12	0.27	1.39	11.00	9.61
	5 290	Low	2.42	0.27	2.69	11.00	8.31
		Mid	-				
		High	3.11	0.27	3.38	11.00	7.62
	5 530	Low	1.21	0.27	1.48	11.00	9.52
		Mid	-				
		High	1.48	0.27	1.75	11.00	9.25
	5 610	Low	1.50	0.27	1.77	11.00	9.23
		Mid	-				
		High	1.62	0.27	1.89	11.00	9.11
	5 690	Low	-0.58	0.27	-0.31	11.00	11.31
		Mid	-				
		High	-0.72	0.27	-0.45	11.00	11.45
	5 775	Low	-1.28	0.27	-1.01	30.00	31.01
		Mid	-				
		High	-0.92	0.27	-0.65	30.00	30.65
Measurement uncertainty		± 1.5 dB					

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Duty cycle Factor (dB)	Result Power Density (dBm)	Limit (dBm)	Margin (dB)
802.11ax _HE80 _996T	5 210	-0.69	0.29	-0.40	11.00	11.40
	5 290	0.22	0.29	0.51	11.00	10.49
	5 530	-2.12	0.29	-1.83	11.00	12.83
	5 610	-2.05	0.29	-1.76	11.00	12.76
	5 690	-3.68	0.29	-3.39	11.00	14.39
	5 775	-2.57	0.29	-2.28	30.00	32.28
Measurement uncertainty		± 1.5 dB				





See next pages for actual measured spectrum plots.

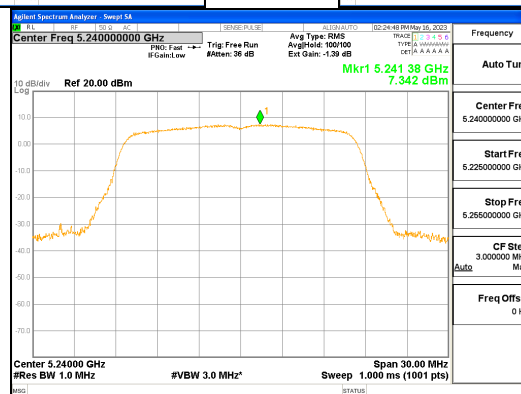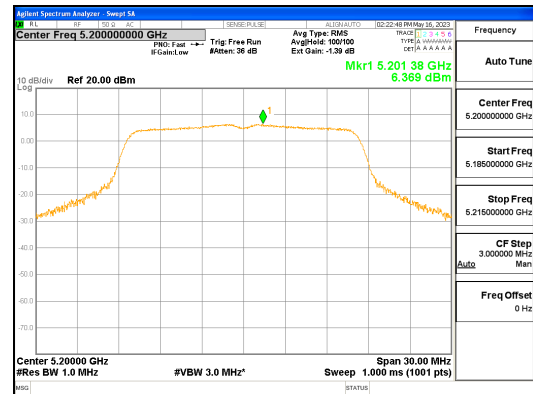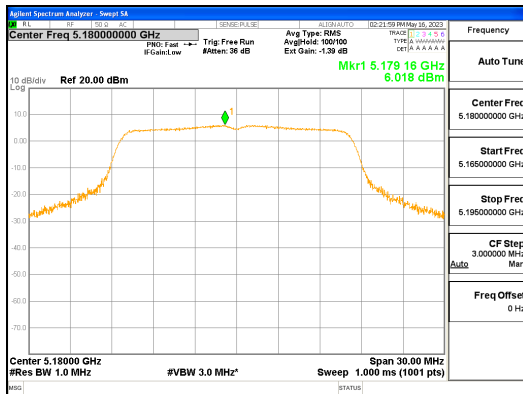




ANT L_802.11a_UNII 1

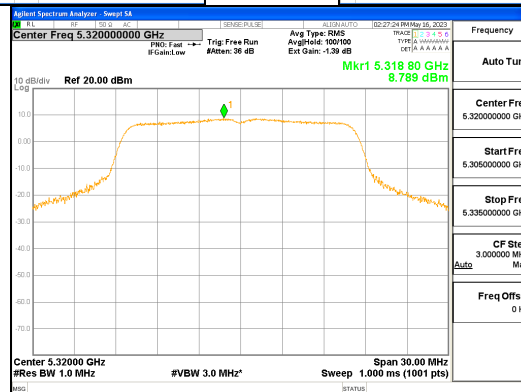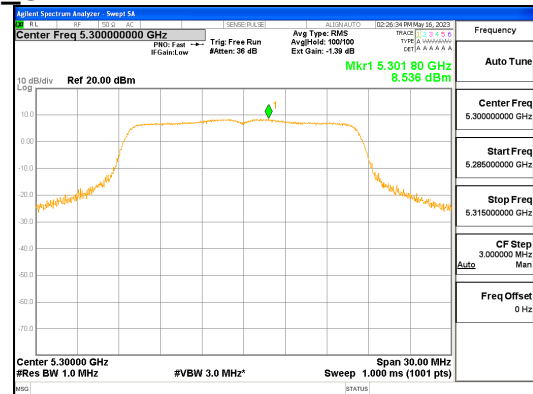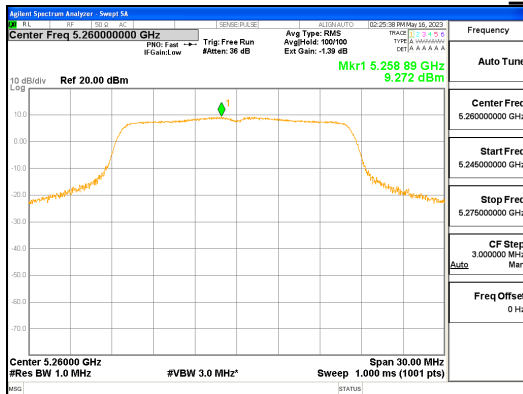




ANT L_802.11a_UNII 2A

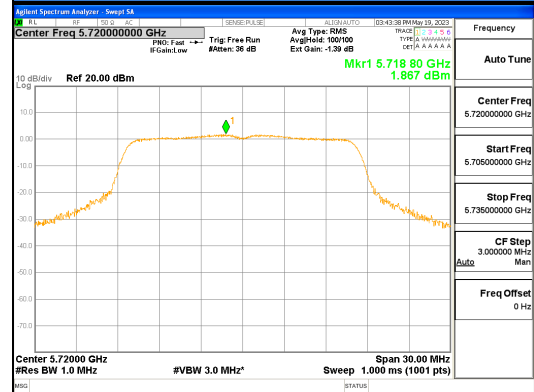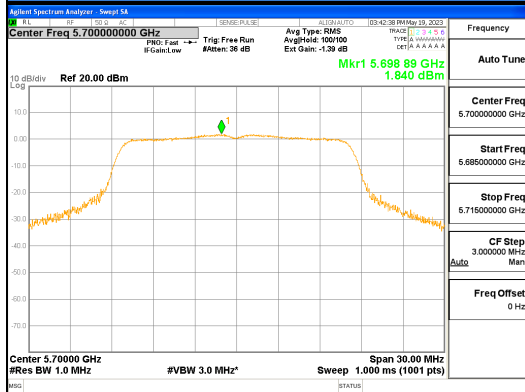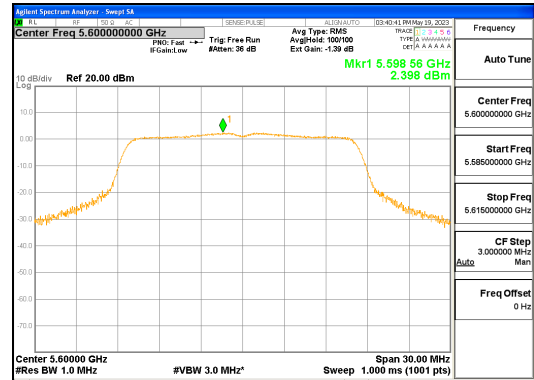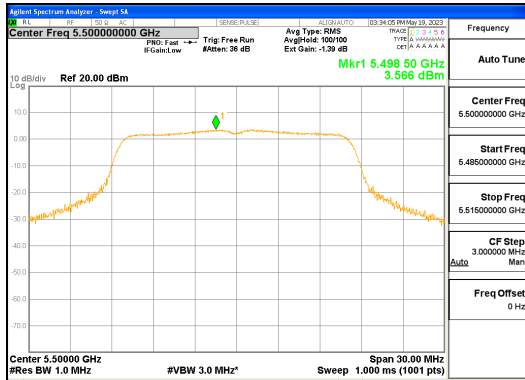




ANT L_802.11a_UNII 2C

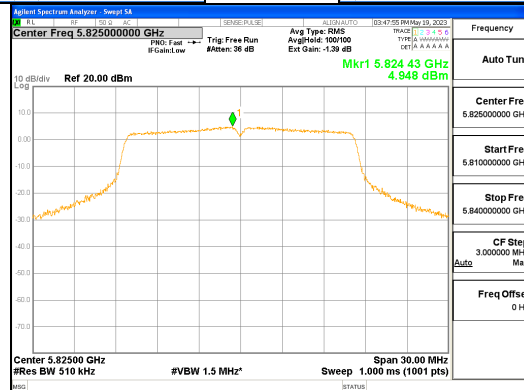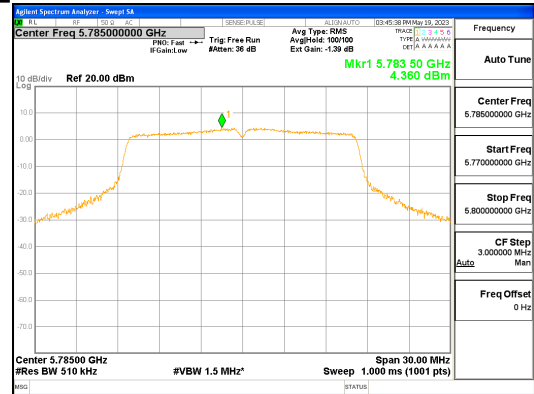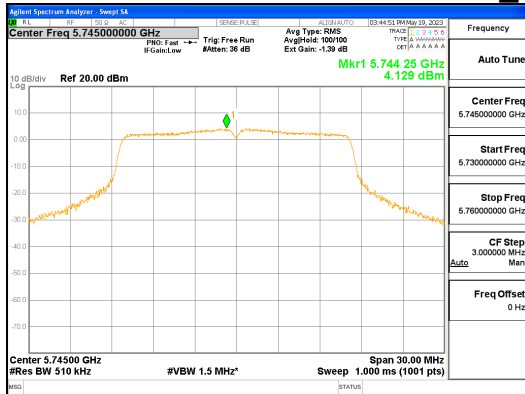





ANT L_802.11a_UNII 3

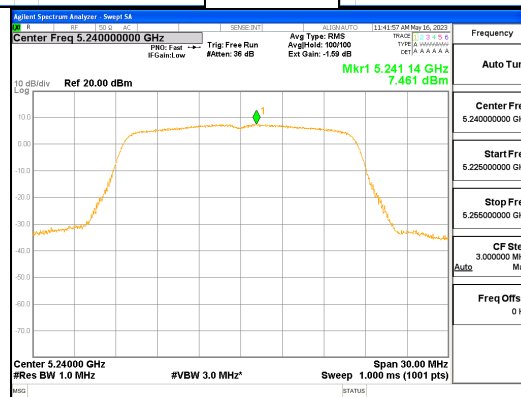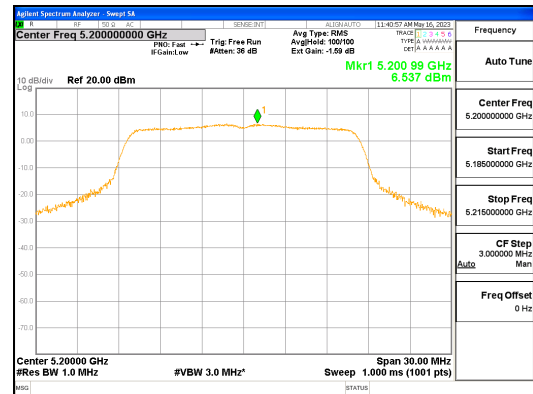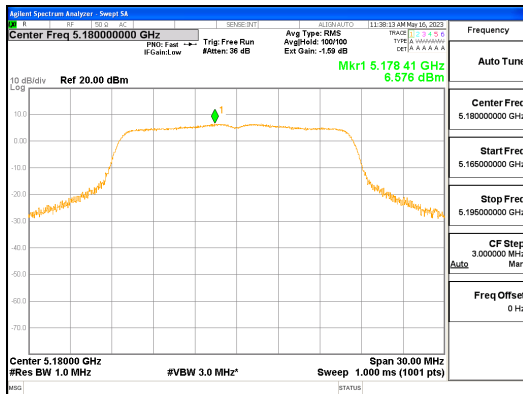




ANT R_802.11a_UNII 1

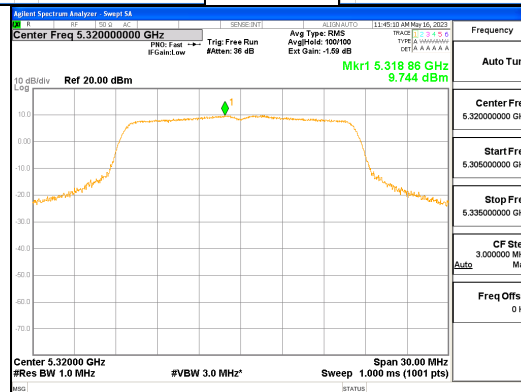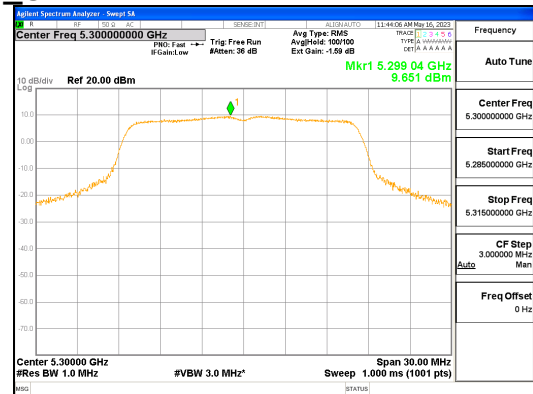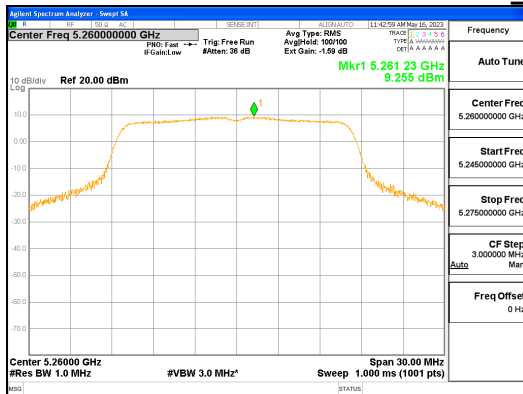




ANT R_802.11a_UNII 2A

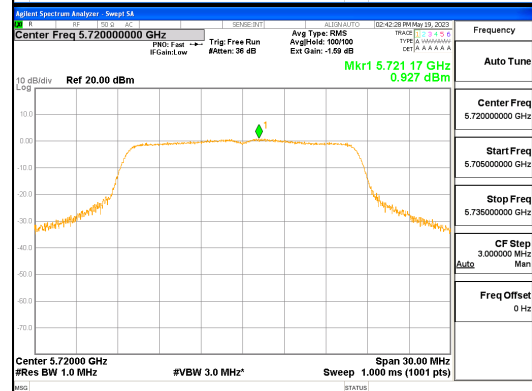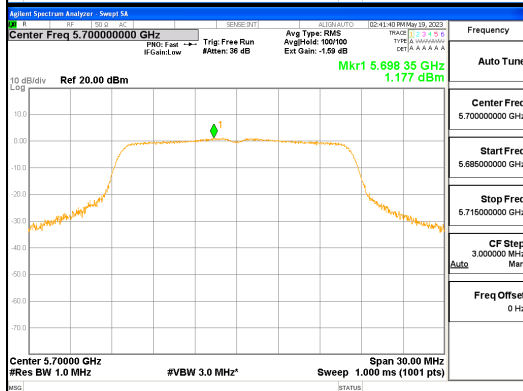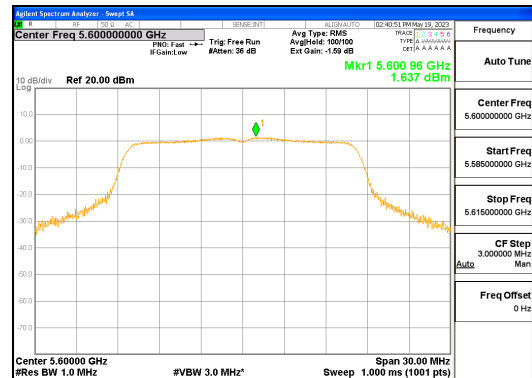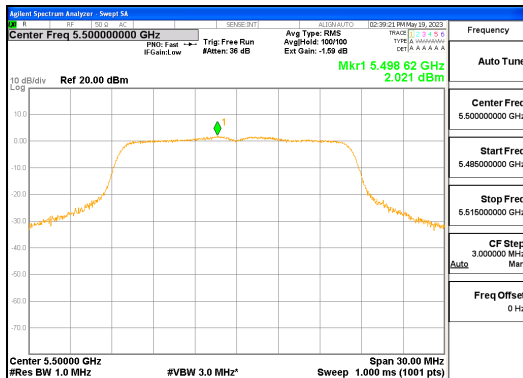




ANT R_802.11a_UNII 2C

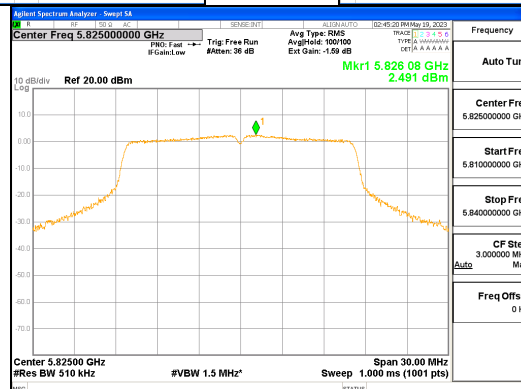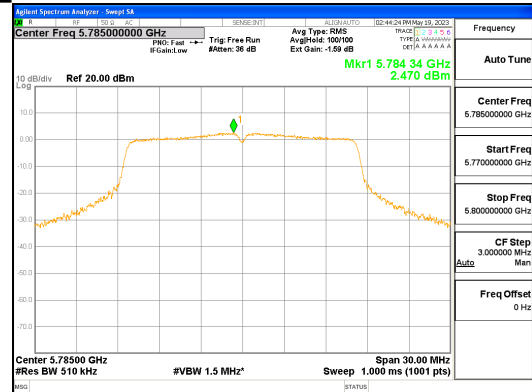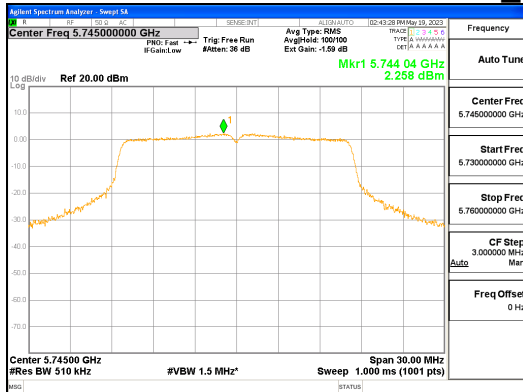





ANT R_802.11a_UNII 3

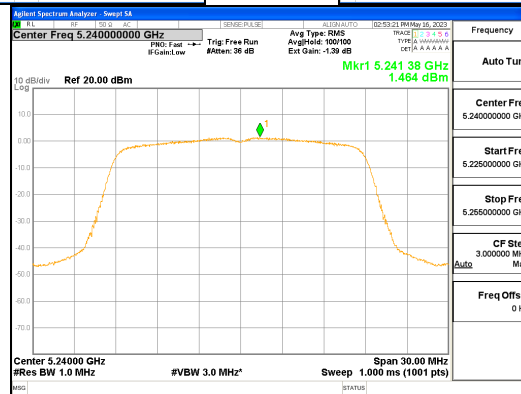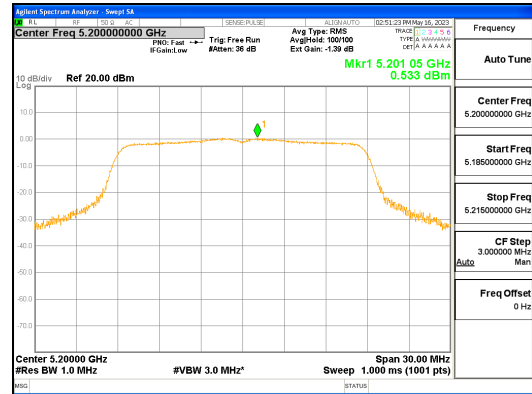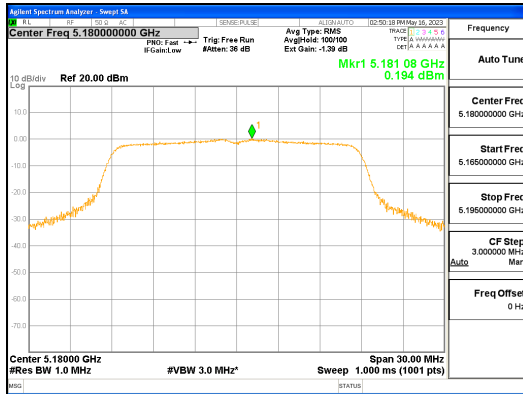




ANT L_802.11n_HT20_UNII 1

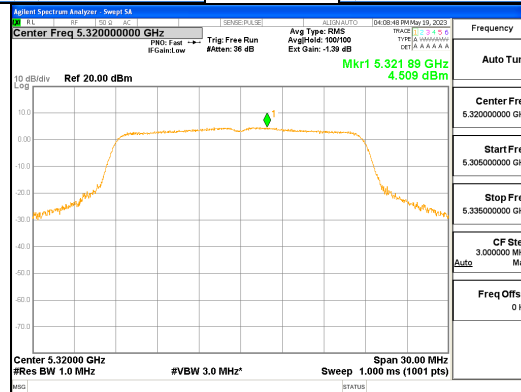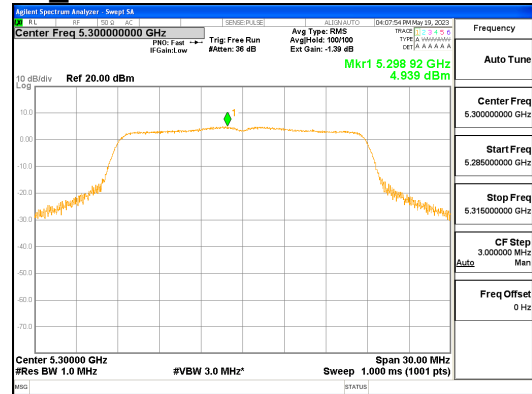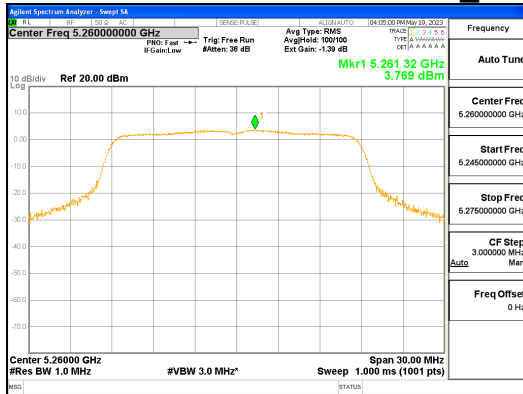




ANT L_802.11n_HT20_UNII 2A

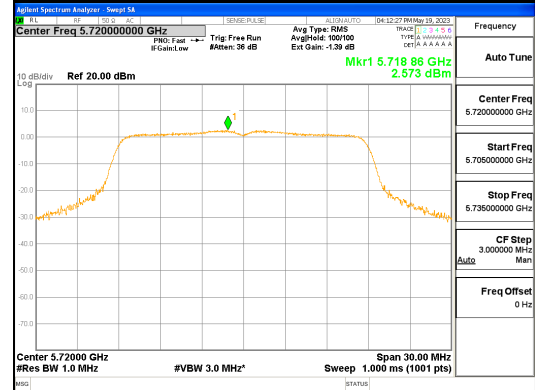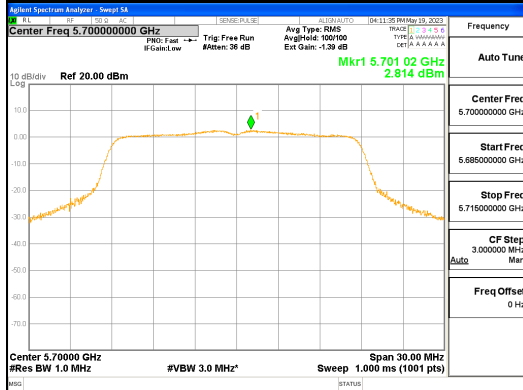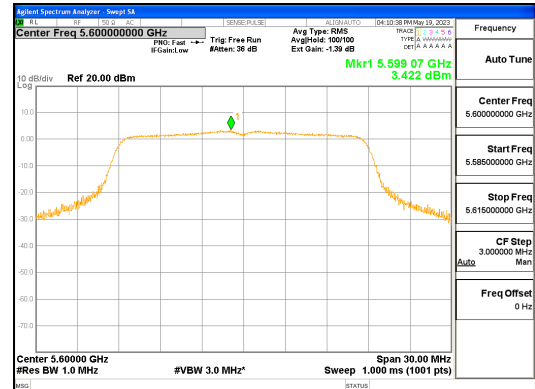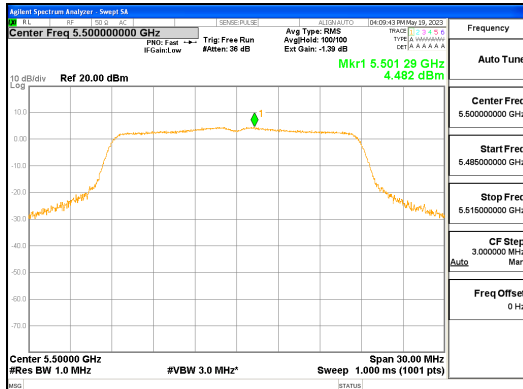




ANT L_802.11n_HT20_UNII 2C

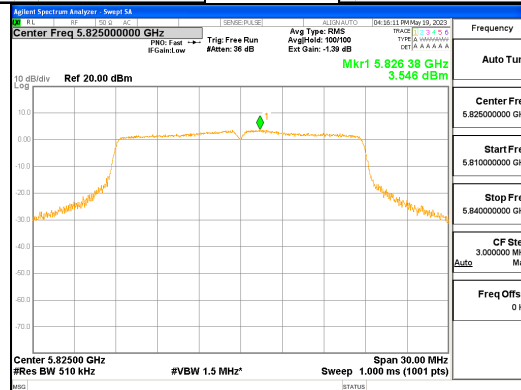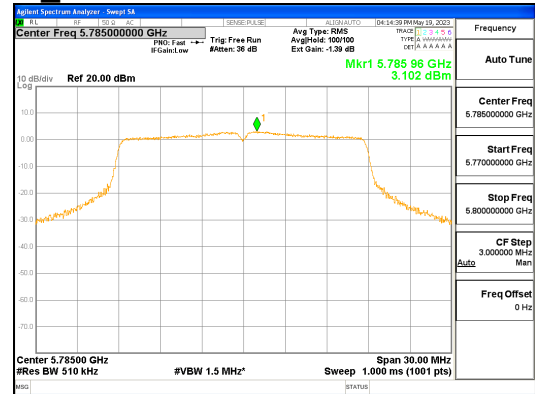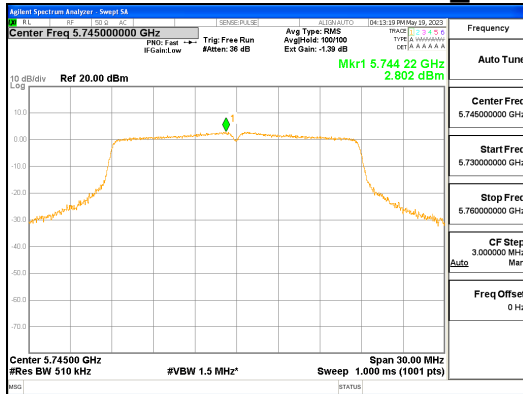





ANT L_802.11n_HT20_UNII 3

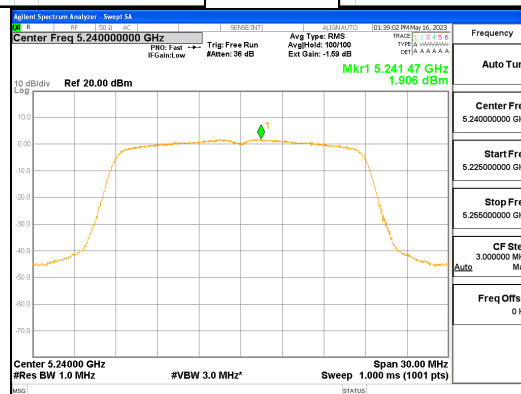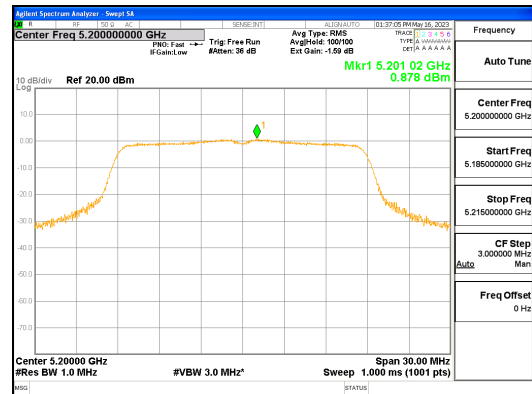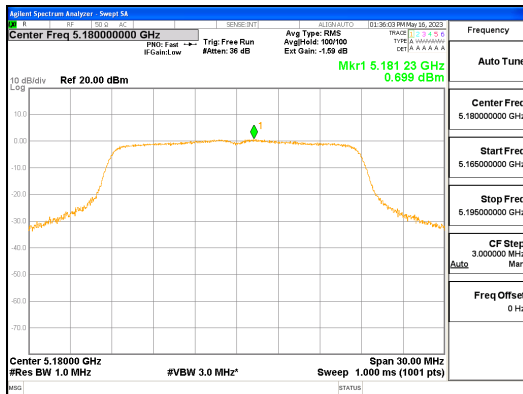




ANT R_802.11n_HT20_UNII 1

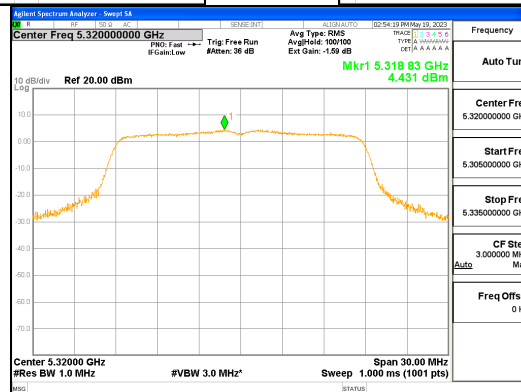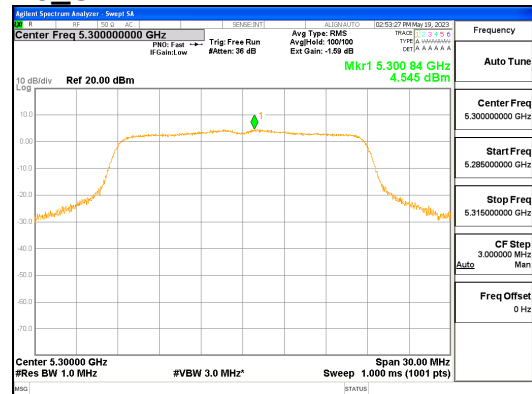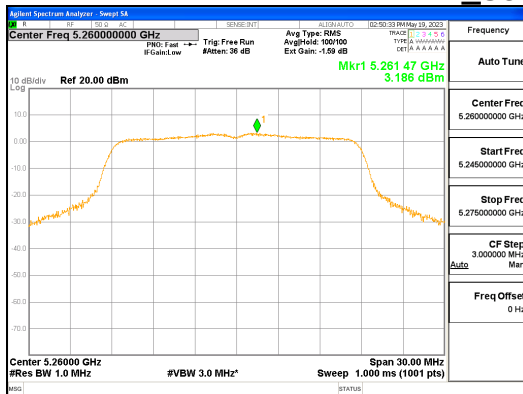




ANT R_802.11n_HT20_UNII 2A

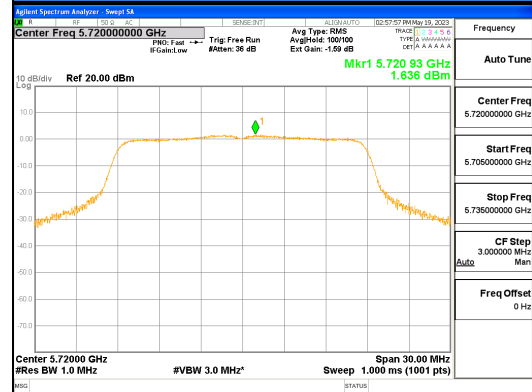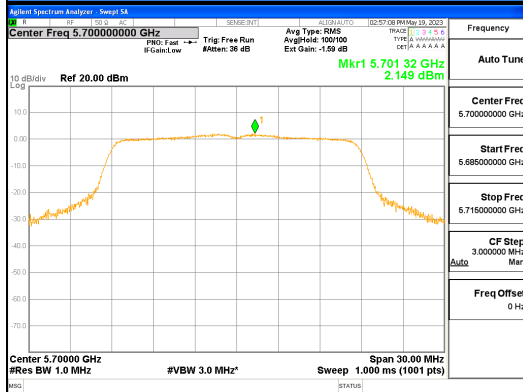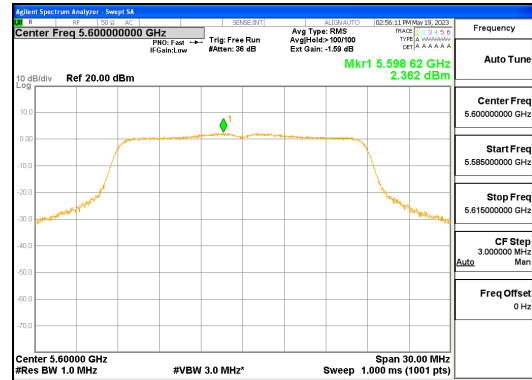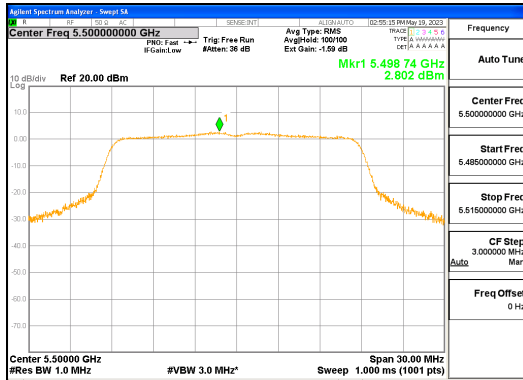




ANT R_802.11n_HT20_UNII 2C

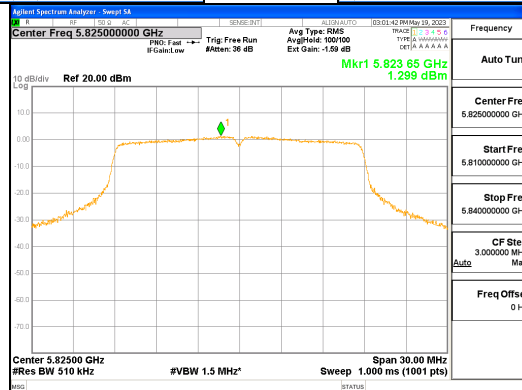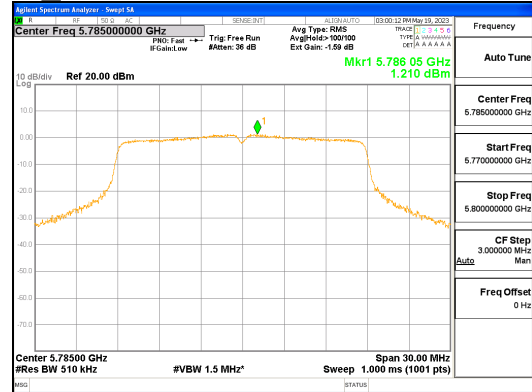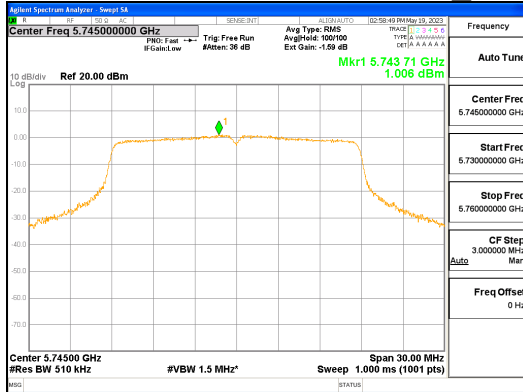





ANT R_802.11n_HT20_UNII 3

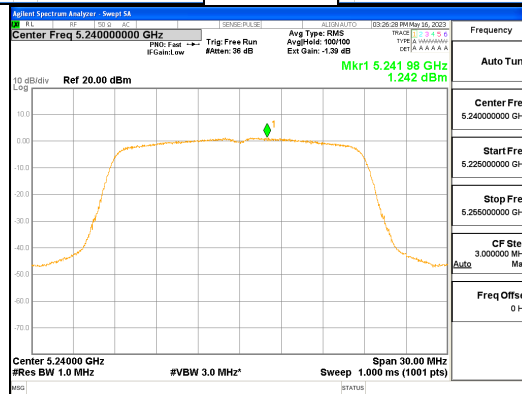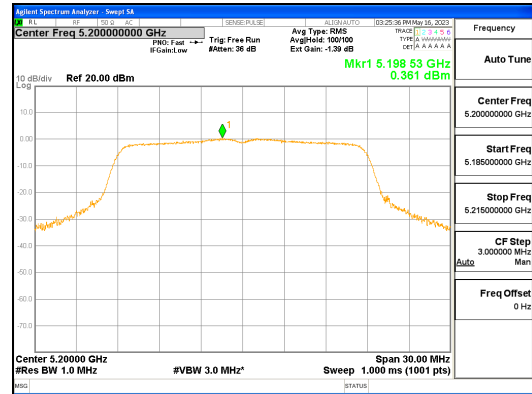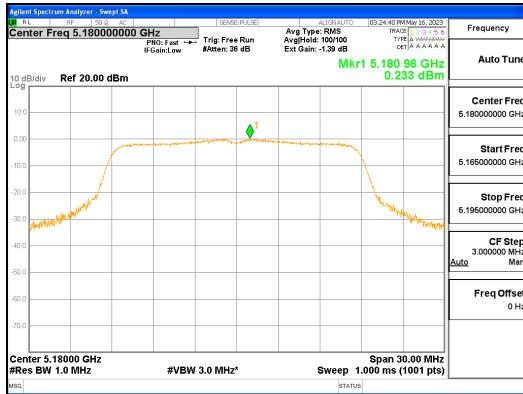




ANT L_802.11ac_VHT20_UNII 1

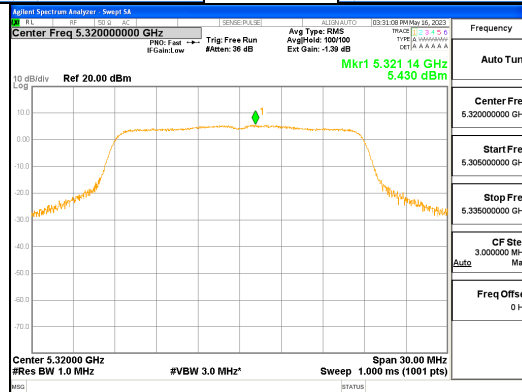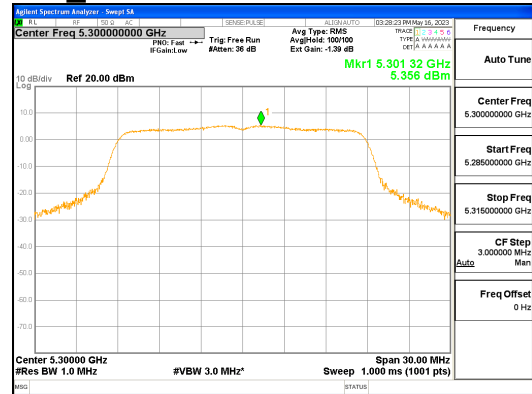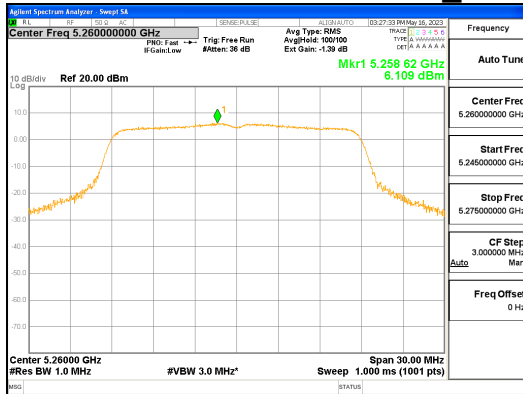

ANT L_802.11ac_VHT20_UNII 2A

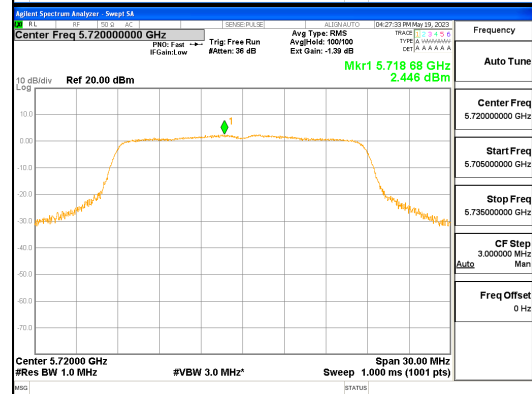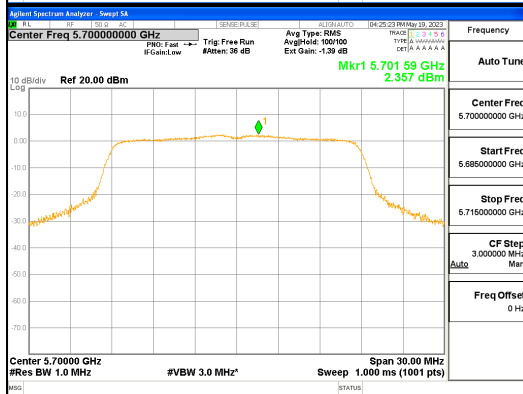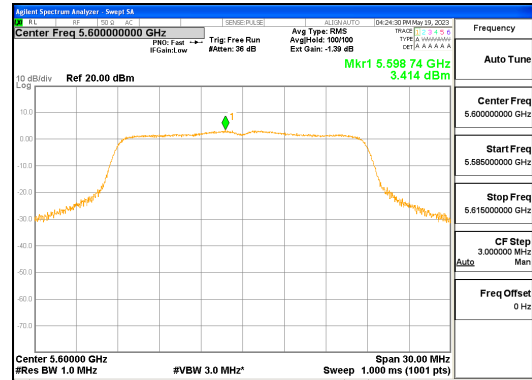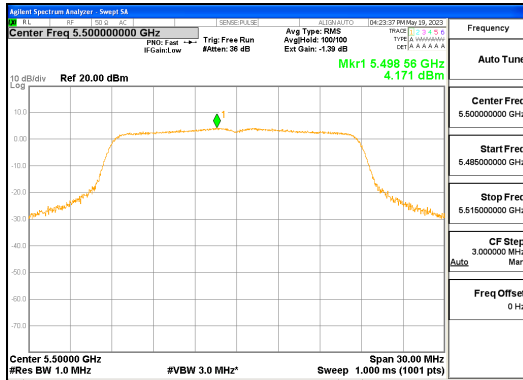

ANT L_802.11ac_VHT20_UNII 2C

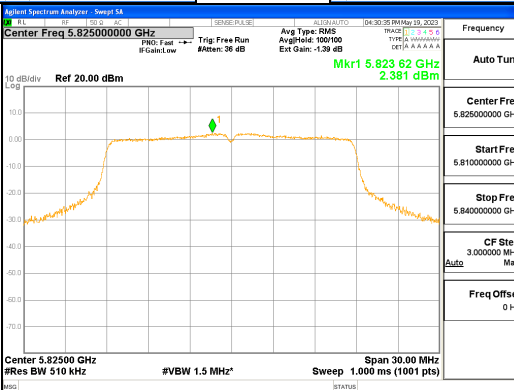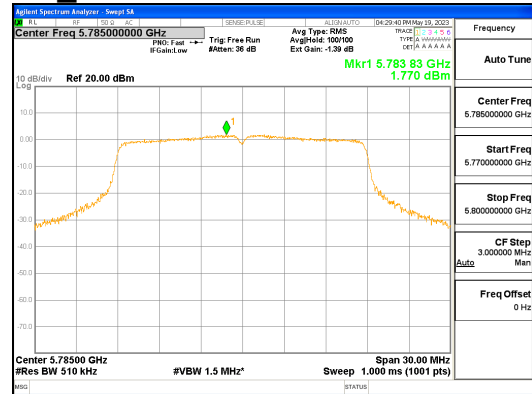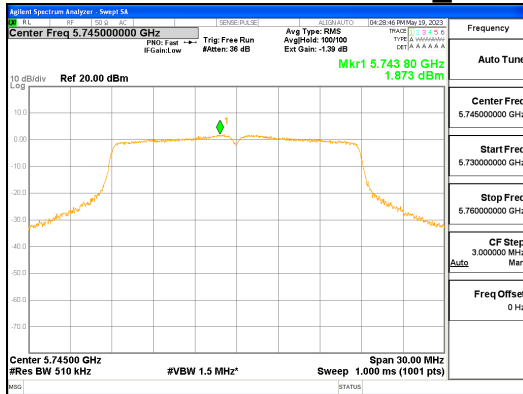

ANT L_802.11ac_VHT20_UNII 3