



Operation Frequency Range of 20dB Bandwidth within Hopping Mode - Right Earbud


DH5 - Channel 00 (2402MHz)

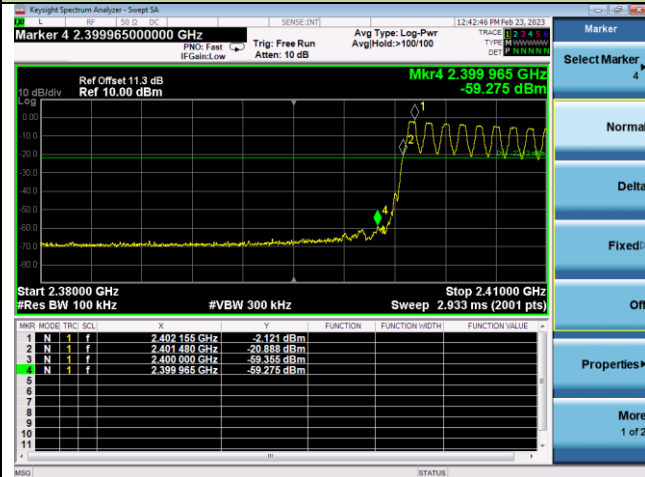


DH5 - Channel 78 (2480MHz)

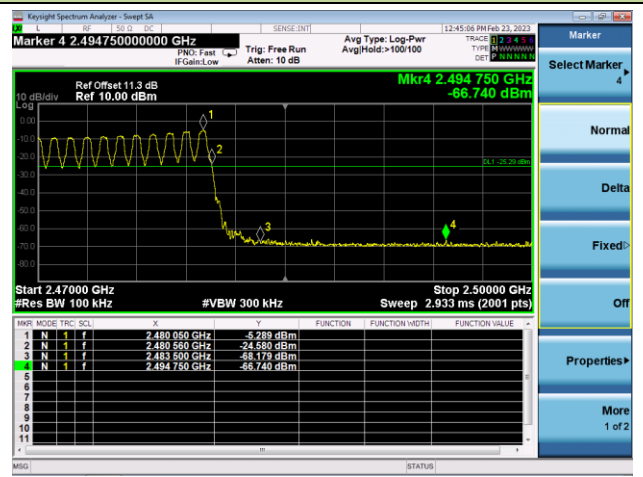


2DH5 - Channel 00 (2402MHz)

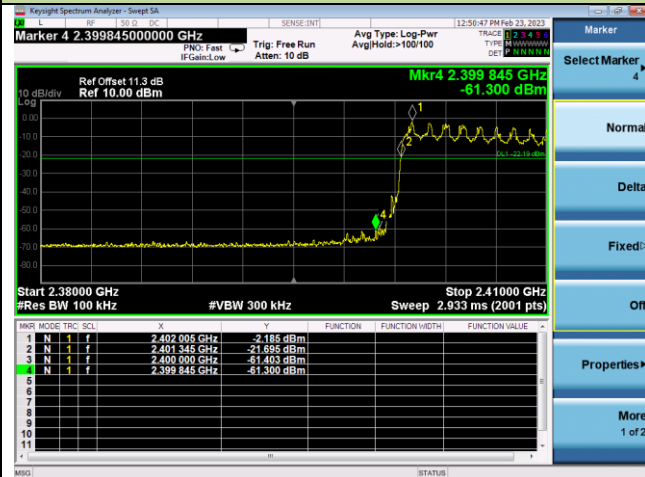


2DH5 - Channel 78 (2480MHz)

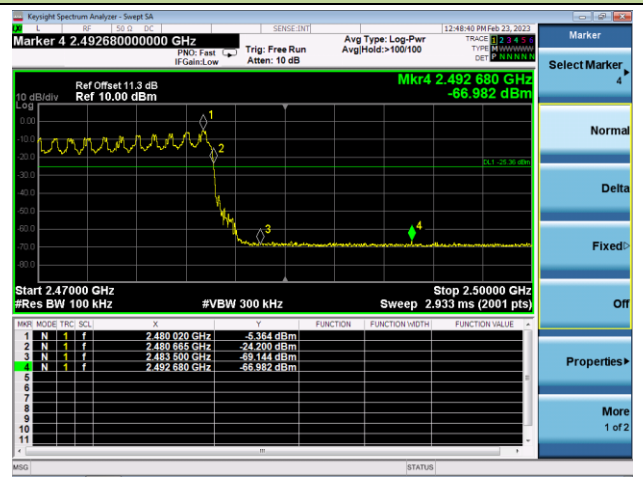

3DH5 - Channel 00 (2402MHz)

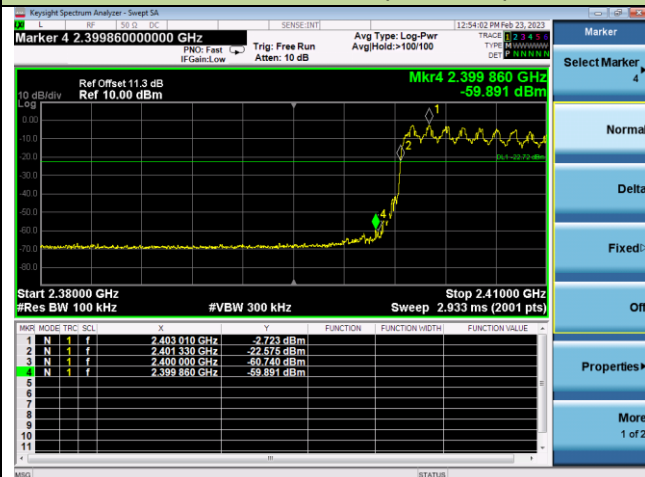

3DH5 - Channel 78 (2480MHz)

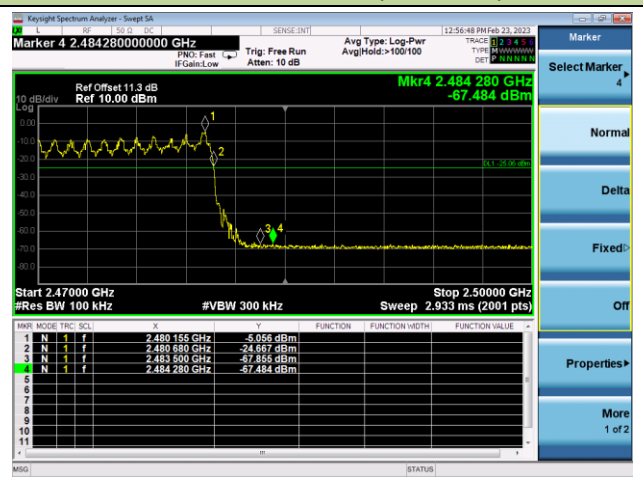


A.8 Conducted Spurious Emissions Test Result

Test Site	NS-TR2	Test Engineer	Flag Yang
Test Date	2023-02-20 ~ 2023-02-25		


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
Left Earbud				
DH5	00	2402	20dBc	Pass
	39	2441	20dBc	Pass
	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
	39	2441	20dBc	Pass
	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
	39	2441	20dBc	Pass
	78	2480	20dBc	Pass
Right Earbud				
DH5	00	2402	20dBc	Pass
	39	2441	20dBc	Pass
	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
	39	2441	20dBc	Pass
	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
	39	2441	20dBc	Pass
	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions - Left Earbud


Channel 00 (2402MHz)

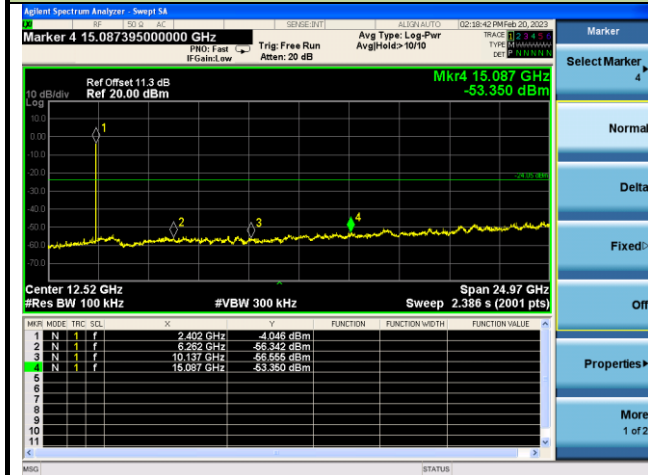

Channel 39 (2441MHz)

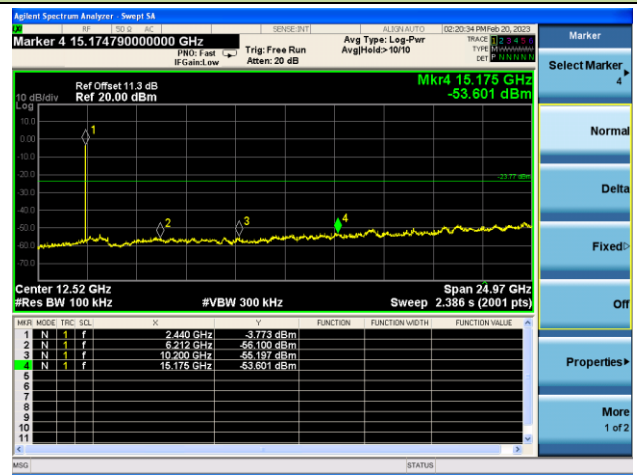


Channel 78 (2480MHz)

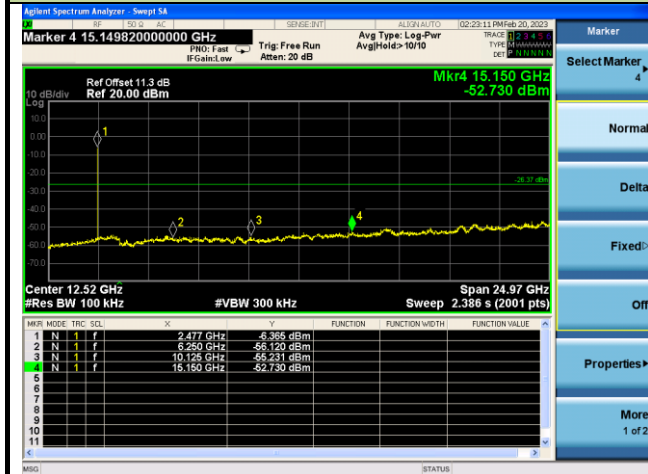


2DH5 Conducted Spurious Emissions - Left Earbud


Channel 00 (2402MHz)

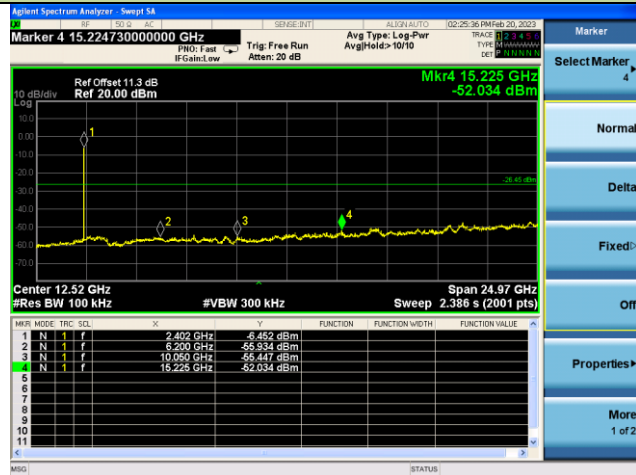

Channel 39 (2441MHz)

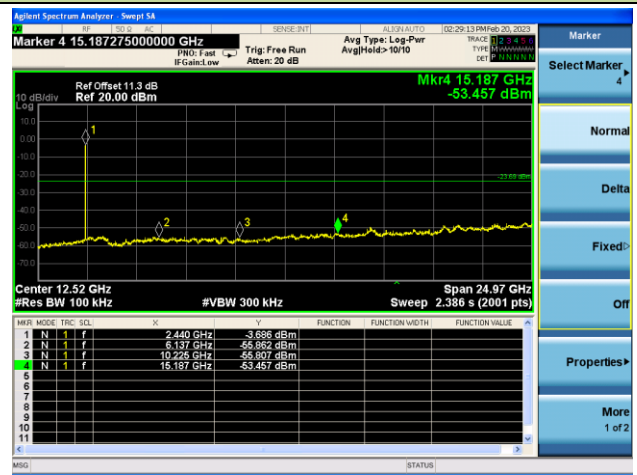


Channel 78 (2480MHz)

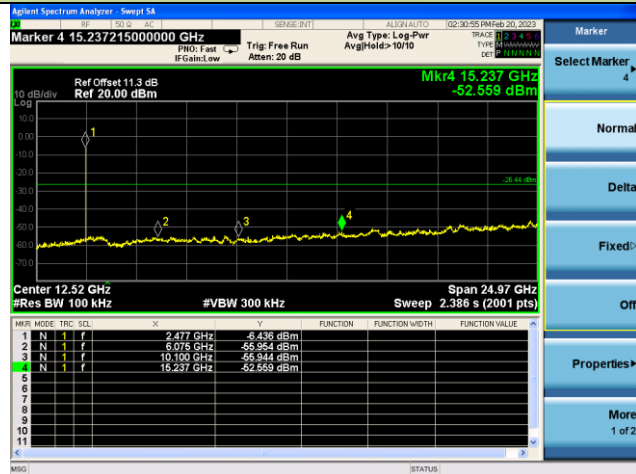


3DH5 Conducted Spurious Emissions - Left Earbud


Channel 00 (2402MHz)

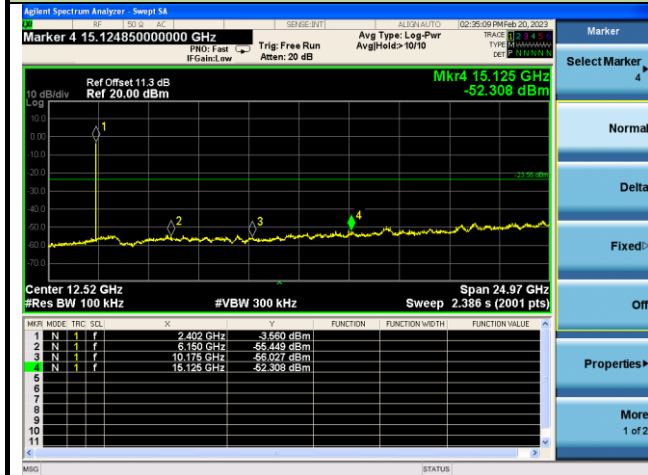

Channel 39 (2441MHz)

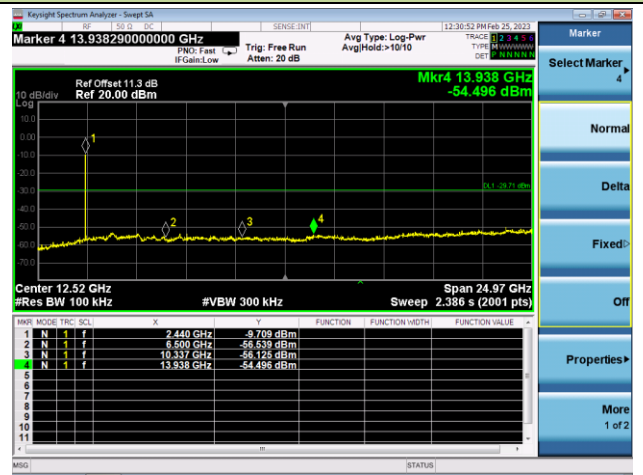


Channel 78 (2480MHz)

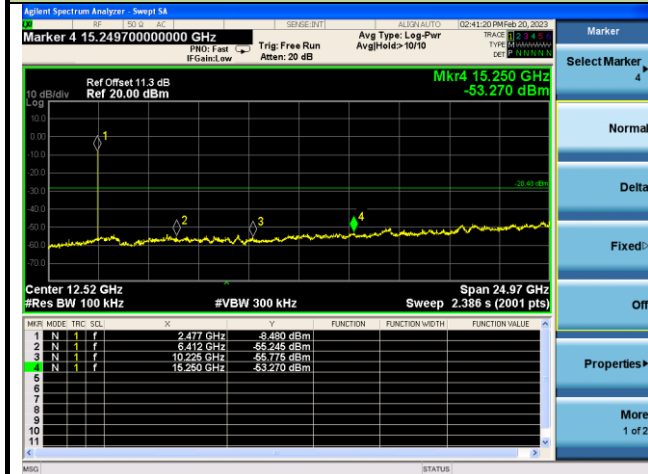


DH5 Conducted Spurious Emissions - Right Earbud


Channel 00 (2402MHz)

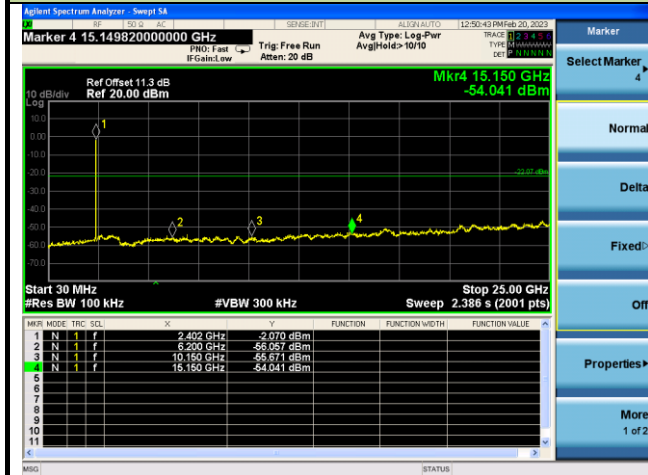

Channel 39 (2441MHz)

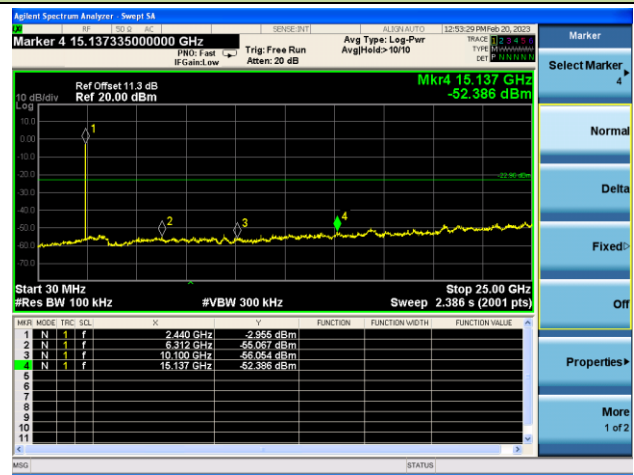


Channel 78 (2480MHz)

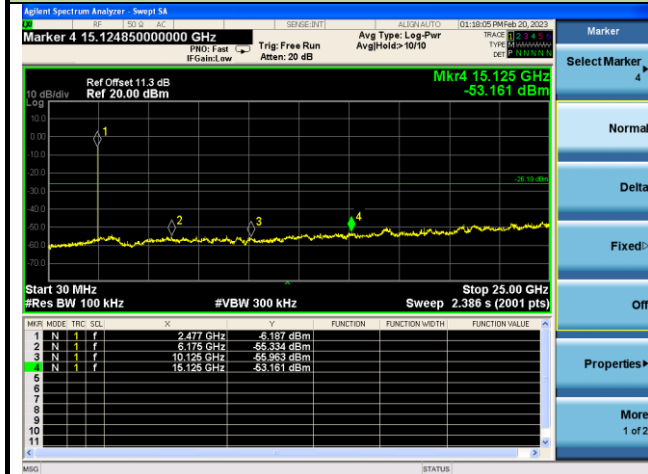


2DH5 Conducted Spurious Emissions - Right Earbud


Channel 00 (2402MHz)

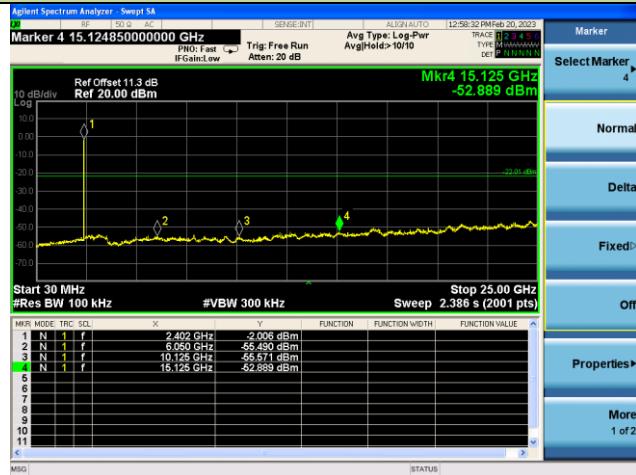

Channel 39 (2441MHz)

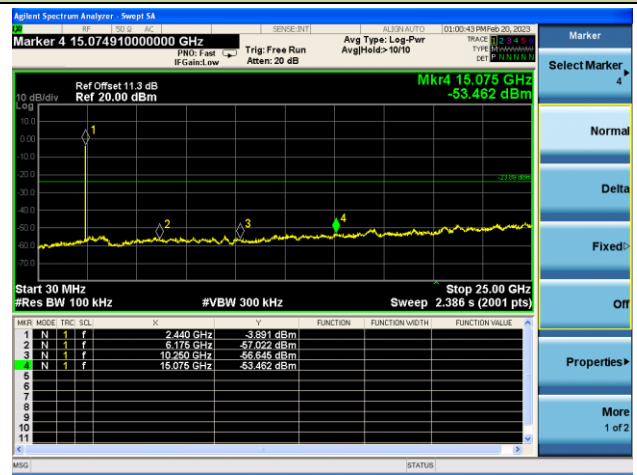


Channel 78 (2480MHz)

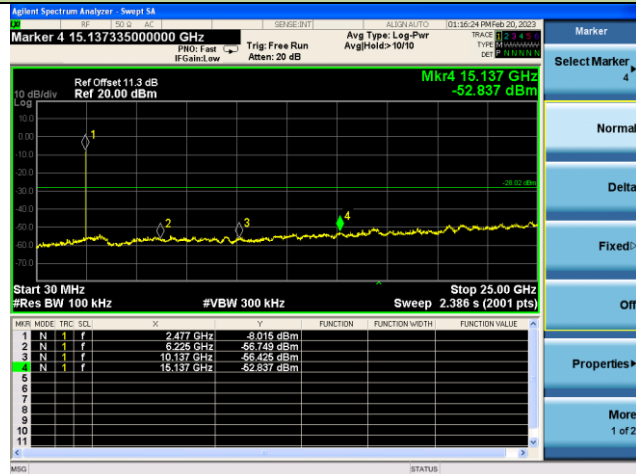


3DH5 Conducted Spurious Emissions - Right Earbud


Channel 00 (2402MHz)

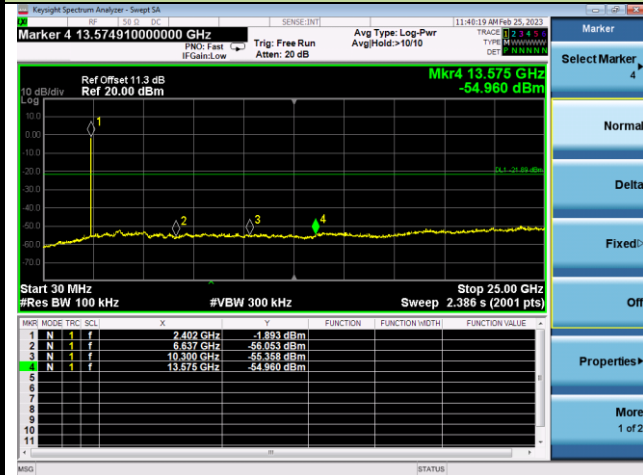

Channel 39 (2441MHz)

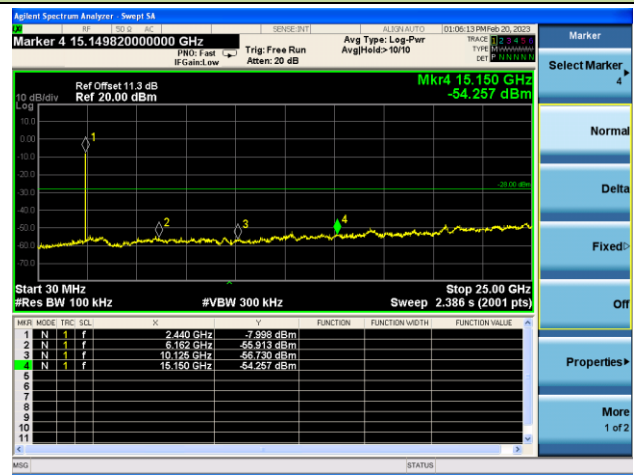

Channel 78 (2480MHz)

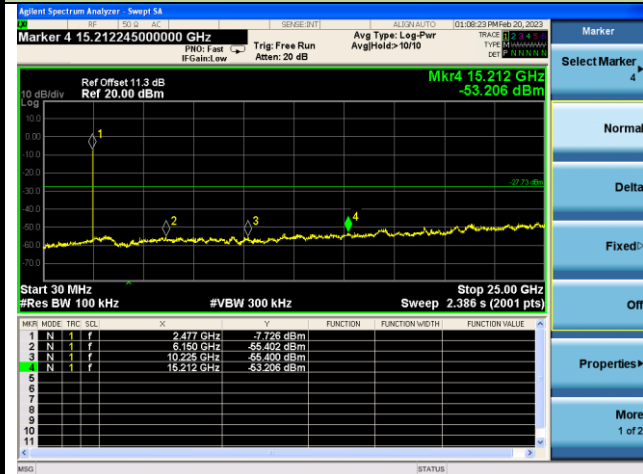

A.9 Radiated Spurious Emission Test Result

Test Site	NS-AC1	Test Engineer	Flag Yang
Test Date	2023-02-13	Test Mode:	DH5 - Left Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3609.5	38.8	-1.7	37.1	74.0	-36.9	Peak	Horizontal
	4808.0	40.2	1.5	41.7	74.0	-32.3	Peak	Horizontal
	6108.5	36.3	4.3	40.6	74.0	-33.4	Peak	Horizontal
	3660.5	38.2	-1.5	36.7	74.0	-37.3	Peak	Vertical
	5029.0	37.8	2.0	39.8	74.0	-34.2	Peak	Vertical
	6678.0	35.9	6.6	42.5	74.0	-31.5	Peak	Vertical
39	3703.0	38.4	-1.5	36.9	74.0	-37.1	Peak	Horizontal
	4978.0	36.9	1.8	38.7	74.0	-35.3	Peak	Horizontal
	6440.0	35.6	5.2	40.8	74.0	-33.2	Peak	Horizontal
	3660.5	38.7	-1.5	37.2	74.0	-36.8	Peak	Vertical
	4961.0	37.5	1.8	39.3	74.0	-34.7	Peak	Vertical
	6652.5	36.3	6.5	42.8	74.0	-31.2	Peak	Vertical
78	3720.0	39.6	-1.6	38.0	74.0	-36.0	Peak	Horizontal
	4689.0	36.5	1.8	38.3	74.0	-35.7	Peak	Horizontal
	5964.0	36.9	3.8	40.7	74.0	-33.3	Peak	Horizontal
	3941.0	39.3	-1.7	37.6	74.0	-36.4	Peak	Vertical
	5071.5	37.2	2.2	39.4	74.0	-34.6	Peak	Vertical
	6278.5	37.2	5.0	42.2	74.0	-31.8	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	NS-AC1	Test Engineer	Flag Yang
Test Date	2023-02-13	Test Mode:	2DH5 - Left Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3601.0	39.9	-1.8	38.1	74.0	-35.9	Peak	Horizontal
	4561.5	37.5	1.2	38.7	74.0	-35.3	Peak	Horizontal
	5947.0	36.9	3.9	40.8	74.0	-33.2	Peak	Horizontal
	3822.0	38.2	-1.3	36.9	74.0	-37.1	Peak	Vertical
	5131.0	37.3	2.3	39.6	74.0	-34.4	Peak	Vertical
	5964.0	36.8	3.8	40.6	74.0	-33.4	Peak	Vertical
39	4272.5	37.5	-0.3	37.2	74.0	-36.8	Peak	Horizontal
	5173.5	38.1	2.3	40.4	74.0	-33.6	Peak	Horizontal
	6661.0	36.8	6.4	43.2	74.0	-30.8	Peak	Horizontal
	3915.5	38.2	-1.7	36.5	74.0	-37.5	Peak	Vertical
	5122.5	37.0	2.3	39.3	74.0	-34.7	Peak	Vertical
	6567.5	36.2	6.2	42.4	74.0	-31.6	Peak	Vertical
78	3720.0	39.0	-1.6	37.4	74.0	-36.6	Peak	Horizontal
	4961.0	39.5	1.8	41.3	74.0	-32.7	Peak	Horizontal
	6414.5	36.1	5.4	41.5	74.0	-32.5	Peak	Horizontal
	3720.0	38.7	-1.6	37.1	74.0	-36.9	Peak	Vertical
	4842.0	36.8	1.5	38.3	74.0	-35.7	Peak	Vertical
	6278.5	36.5	5.0	41.5	74.0	-32.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Flag Yang
Test Date	2023-02-13	Test Mode:	3DH5 - Left Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3601.0	37.8	-1.8	36.0	74.0	-38.0	Peak	Horizontal
	4714.5	37.0	1.7	38.7	74.0	-35.3	Peak	Horizontal
	5972.5	36.5	3.7	40.2	74.0	-33.8	Peak	Horizontal
	3601.0	39.0	-1.8	37.2	74.0	-36.8	Peak	Vertical
	4646.5	36.3	1.5	37.8	74.0	-36.2	Peak	Vertical
	6278.5	35.8	5.0	40.8	74.0	-33.2	Peak	Vertical
39	3660.5	38.1	-1.5	36.6	74.0	-37.4	Peak	Horizontal
	5071.5	37.1	2.2	39.3	74.0	-34.7	Peak	Horizontal
	6287.0	36.2	5.0	41.2	74.0	-32.8	Peak	Horizontal
	3660.5	38.4	-1.5	36.9	74.0	-37.1	Peak	Vertical
	4842.0	36.8	1.5	38.3	74.0	-35.7	Peak	Vertical
	5964.0	37.1	3.8	40.9	74.0	-33.1	Peak	Vertical
78	3720.0	39.3	-1.6	37.7	74.0	-36.3	Peak	Horizontal
	4961.0	39.9	1.8	41.7	74.0	-32.3	Peak	Horizontal
	6941.5	35.8	7.7	43.5	74.0	-30.5	Peak	Horizontal
	3958.0	38.1	-1.8	36.3	74.0	-37.7	Peak	Vertical
	5122.5	37.9	2.3	40.2	74.0	-33.8	Peak	Vertical
	6593.0	36.3	6.2	42.5	74.0	-31.5	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	NS-AC1	Test Engineer	Flag Yang
Test Date	2023-02-22	Test Mode:	DH5 - Right Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3601.0	39.6	-1.8	37.8	74.0	-36.2	Peak	Horizontal
	4825.0	38.4	1.8	40.2	74.0	-33.8	Peak	Horizontal
	6338.0	37.3	5.1	42.4	74.0	-31.6	Peak	Horizontal
	3660.5	39.6	-1.5	38.1	74.0	-35.9	Peak	Vertical
	4663.5	38.0	1.5	39.5	74.0	-34.5	Peak	Vertical
	6253.0	38.2	4.6	42.8	74.0	-31.2	Peak	Vertical
39	3660.5	40.2	-1.5	38.7	74.0	-35.3	Peak	Horizontal
	4816.5	38.1	1.6	39.7	74.0	-34.3	Peak	Horizontal
	6278.5	36.8	5.0	41.8	74.0	-32.2	Peak	Horizontal
	3660.5	40.0	-1.5	38.5	74.0	-35.5	Peak	Vertical
	4791.0	38.4	1.6	40.0	74.0	-34.0	Peak	Vertical
	6380.5	37.3	5.2	42.5	74.0	-31.5	Peak	Vertical
78	3728.5	40.1	-1.5	38.6	74.0	-35.4	Peak	Horizontal
	4799.5	37.7	1.5	39.2	74.0	-34.8	Peak	Horizontal
	6372.0	36.4	5.2	41.6	74.0	-32.4	Peak	Horizontal
	3813.5	39.6	-1.3	38.3	74.0	-35.7	Peak	Vertical
	4893.0	38.3	1.6	39.9	74.0	-34.1	Peak	Vertical
	6525.0	37.8	6.0	43.8	74.0	-30.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Flag Yang
Test Date	2023-02-22	Test Mode:	2DH5 - Right Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3711.5	39.5	-1.6	37.9	74.0	-36.1	Peak	Horizontal
	4808.0	39.6	1.5	41.1	74.0	-32.9	Peak	Horizontal
	6278.5	36.8	5.0	41.8	74.0	-32.2	Peak	Horizontal
	3754.0	39.7	-1.2	38.5	74.0	-35.5	Peak	Vertical
	4808.0	37.9	1.5	39.4	74.0	-34.6	Peak	Vertical
	6346.5	36.7	5.1	41.8	74.0	-32.2	Peak	Vertical
39	3660.5	40.8	-1.5	39.3	74.0	-34.7	Peak	Horizontal
	5020.5	38.1	2.1	40.2	74.0	-33.8	Peak	Horizontal
	6423.0	37.1	5.4	42.5	74.0	-31.5	Peak	Horizontal
	3694.5	40.2	-1.4	38.8	74.0	-35.2	Peak	Vertical
	5097.0	37.6	2.6	40.2	74.0	-33.8	Peak	Vertical
	7077.5	36.7	8.7	45.4	74.0	-28.6	Peak	Vertical
78	3720.0	40.0	-1.6	38.4	74.0	-35.6	Peak	Horizontal
	4510.5	38.3	1.0	39.3	74.0	-34.7	Peak	Horizontal
	5615.5	39.2	2.4	41.6	74.0	-32.4	Peak	Horizontal
	3830.5	39.3	-1.2	38.1	74.0	-35.9	Peak	Vertical
	5275.5	38.6	1.7	40.3	74.0	-33.7	Peak	Vertical
	6941.5	36.3	7.7	44.0	74.0	-30.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Flag Yang
Test Date	2023-02-22	Test Mode:	3DH5 - Right Earbud
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3601.0	39.2	-1.8	37.4	74.0	-36.6	Peak	Horizontal
	4808.0	38.6	1.5	40.1	74.0	-33.9	Peak	Horizontal
	6491.0	37.1	5.7	42.8	74.0	-31.2	Peak	Horizontal
	3737.0	39.8	-1.4	38.4	74.0	-35.6	Peak	Vertical
	4587.0	38.2	1.3	39.5	74.0	-34.5	Peak	Vertical
	5904.5	37.8	3.6	41.4	74.0	-32.6	Peak	Vertical
39	3660.5	41.3	-1.5	39.8	74.0	-34.2	Peak	Horizontal
	4723.0	37.9	1.4	39.3	74.0	-34.7	Peak	Horizontal
	6202.0	36.6	4.6	41.2	74.0	-32.8	Peak	Horizontal
	3813.5	40.0	-1.3	38.7	74.0	-35.3	Peak	Vertical
	5071.5	37.9	2.2	40.1	74.0	-33.9	Peak	Vertical
	6474.0	36.6	5.8	42.4	74.0	-31.6	Peak	Vertical
78	3830.5	40.0	-1.2	38.8	74.0	-35.2	Peak	Horizontal
	4850.5	38.1	1.5	39.6	74.0	-34.4	Peak	Horizontal
	6397.5	37.1	5.3	42.4	74.0	-31.6	Peak	Horizontal
	3720.0	39.9	-1.6	38.3	74.0	-35.7	Peak	Vertical
	4842.0	38.2	1.5	39.7	74.0	-34.3	Peak	Vertical
	6431.5	37.1	5.3	42.4	74.0	-31.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: NS-AC1	Test Date: 2023-02-14
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Left Earbud	

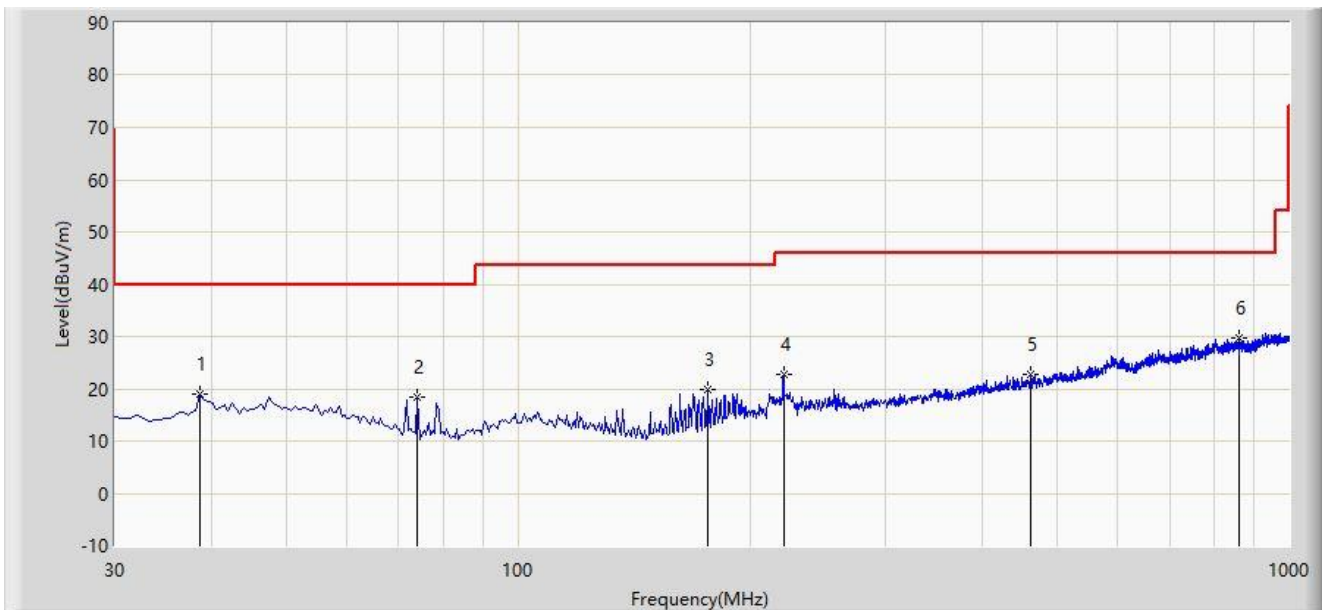

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		38.730	18.942	1.898	-21.058	40.000	17.044	PK
2		74.135	18.338	5.990	-21.662	40.000	12.349	PK
3		176.470	19.764	5.764	-23.736	43.500	14.000	PK
4		221.090	22.668	6.449	-23.332	46.000	16.218	PK
5		462.135	22.862	1.275	-23.138	46.000	21.587	PK
6	*	862.745	29.619	1.960	-16.381	46.000	27.660	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: NS-AC1	Test Date: 2023-02-14
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz- Left Earbud	

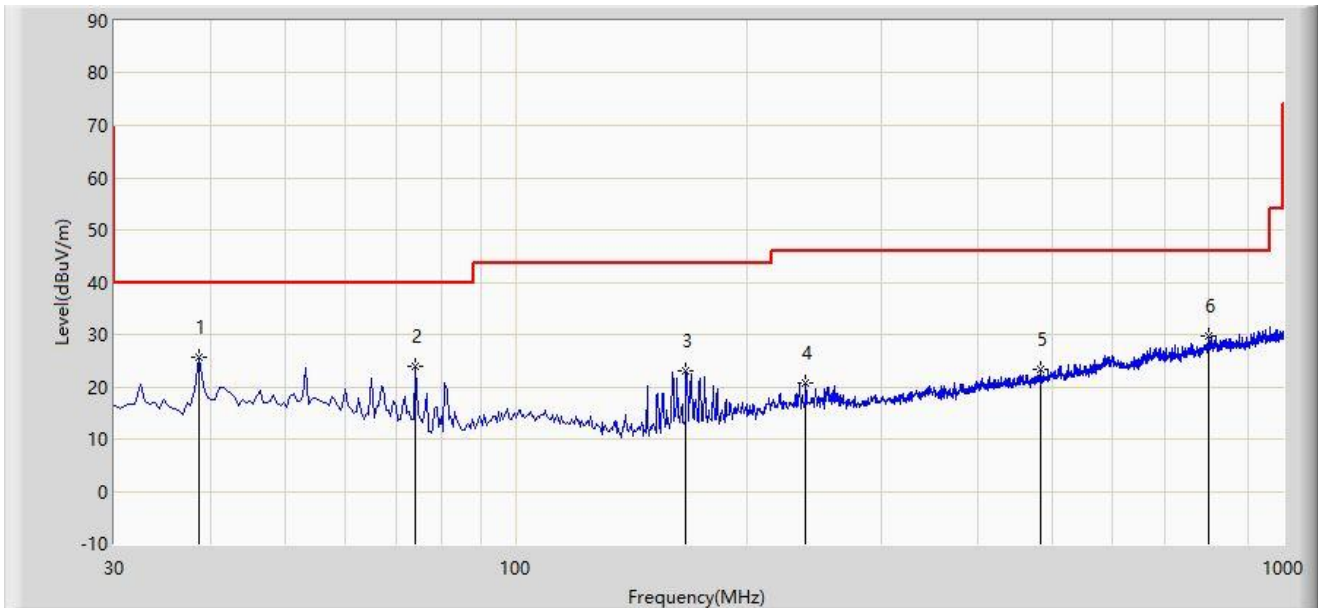

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	38.730	25.601	8.557	-14.399	40.000	17.044	PK
2		74.135	23.805	11.457	-16.195	40.000	12.349	PK
3		166.770	23.096	9.572	-20.404	43.500	13.524	PK
4		239.035	20.743	3.826	-25.257	46.000	16.917	PK
5		482.505	23.413	1.488	-22.587	46.000	21.925	PK
6		799.210	29.757	2.125	-16.243	46.000	27.632	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

A.10 Radiated Restricted Band Edge Test Result

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Left Earbud	

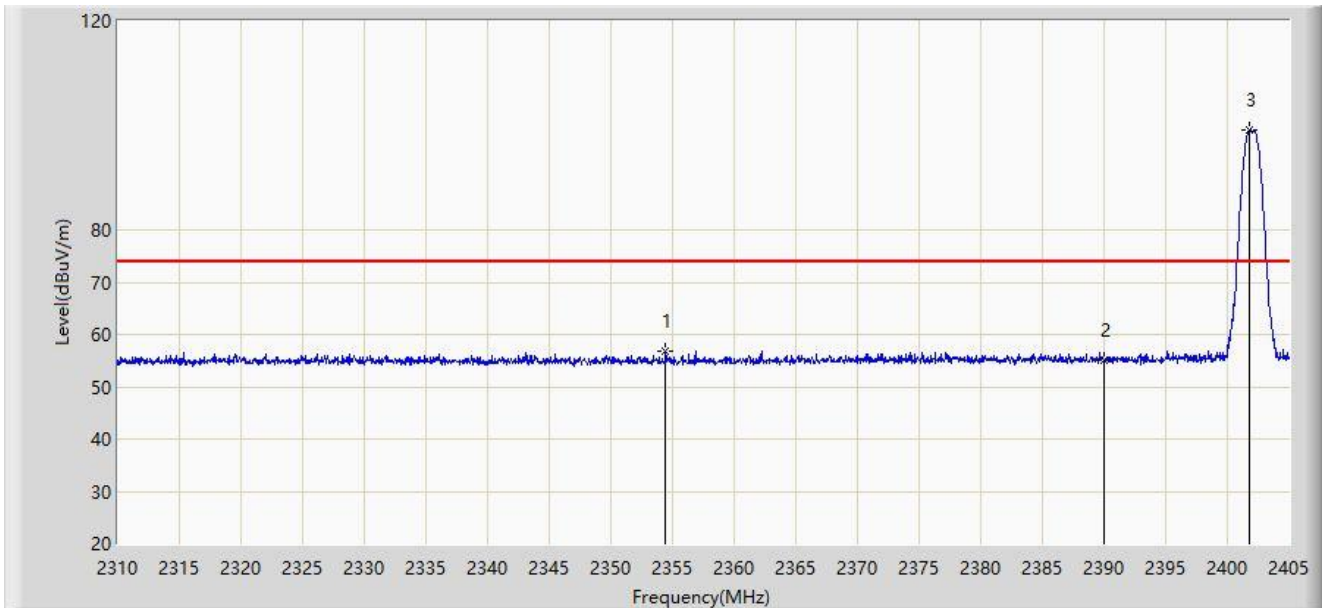


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2354.460	56.949	26.091	-17.051	74.000	30.858	PK
2		2390.000	55.041	24.218	-18.959	74.000	30.823	PK
3		2401.817	99.009	68.196	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Left Earbud	

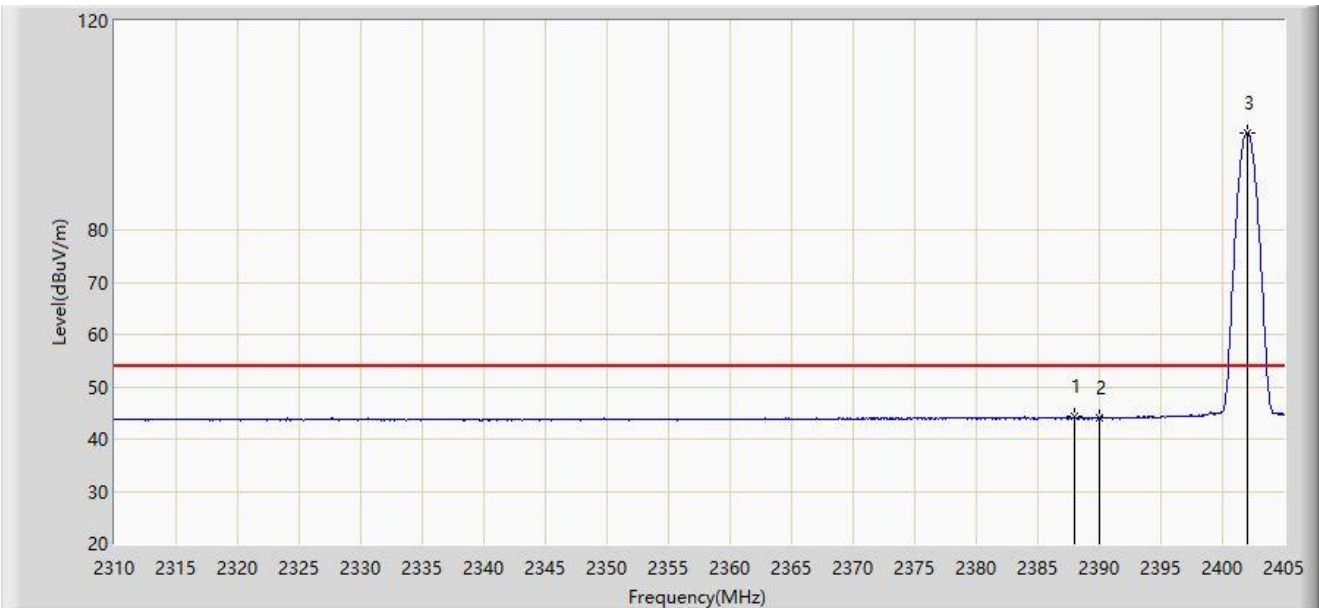


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.948	44.226	13.385	-9.774	54.000	30.842	AV
2		2390.000	44.022	13.199	-9.978	54.000	30.823	AV
3		2402.008	98.639	67.826	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Left Earbud	

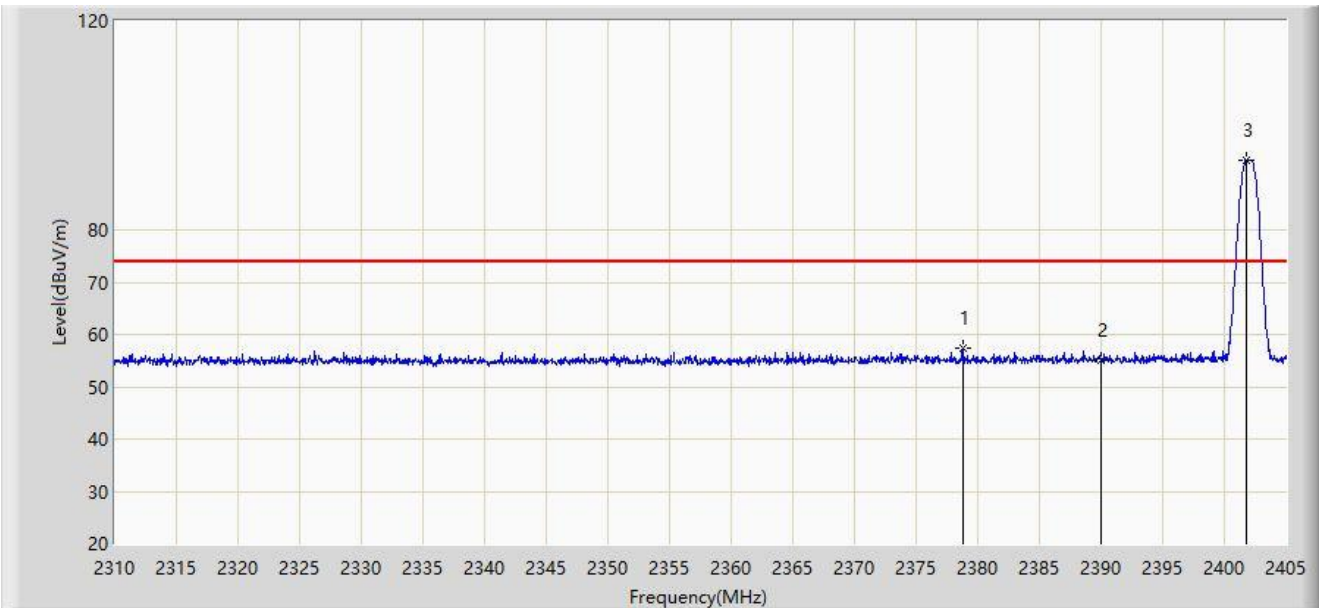


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2378.780	57.282	26.358	-16.718	74.000	30.924	PK
2		2390.000	54.978	24.155	-19.022	74.000	30.823	PK
3		2401.817	93.470	62.657	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Left Earbud	

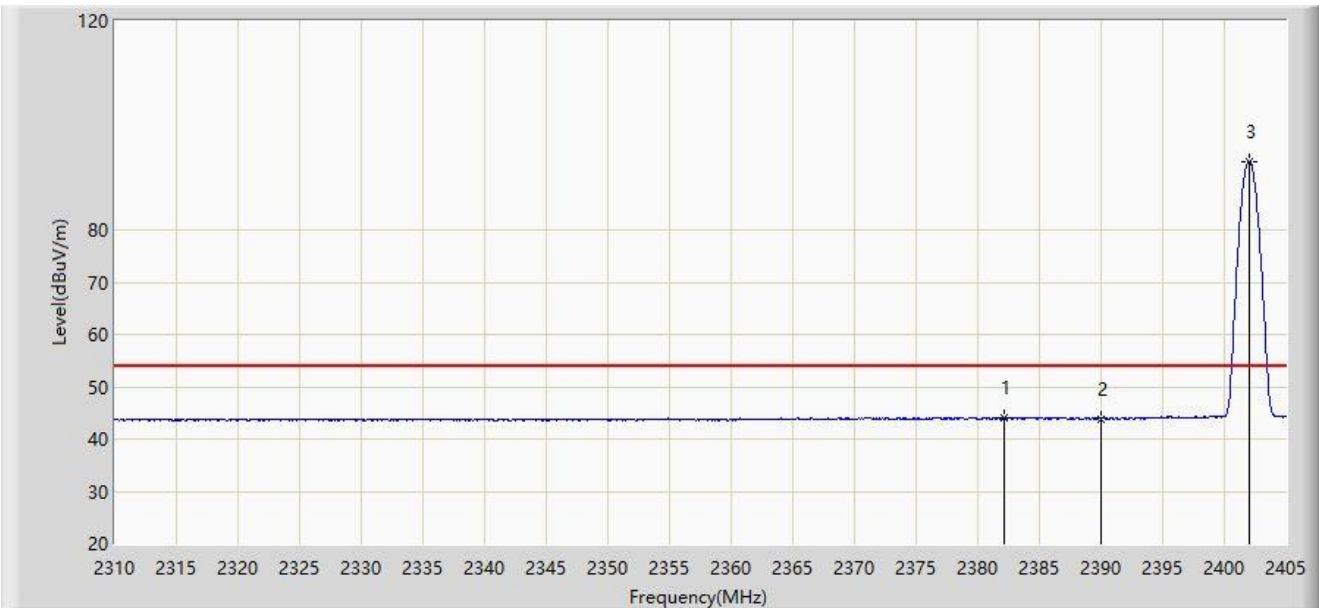


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2382.105	44.164	13.270	-9.836	54.000	30.894	AV
2		2390.000	43.888	13.065	-10.112	54.000	30.823	AV
3		2402.008	93.097	62.284	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz - Left Earbud	

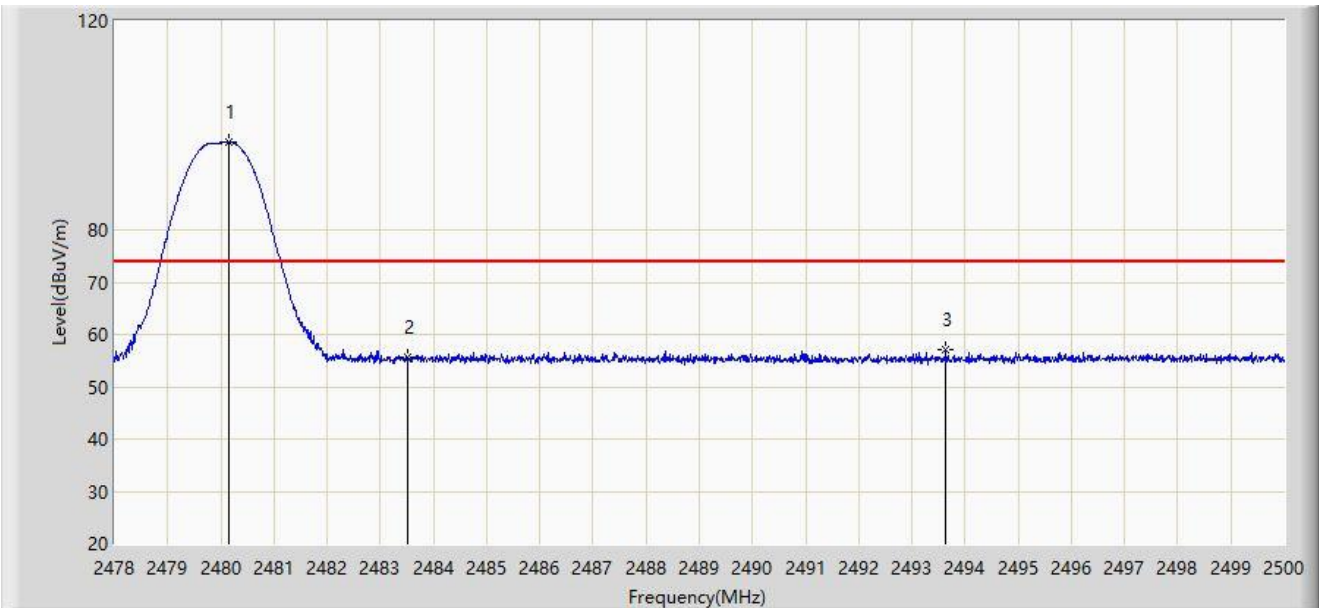


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.145	96.791	66.058	N/A	N/A	30.733	PK
2		2483.500	55.546	24.811	-18.454	74.000	30.734	PK
3	*	2493.642	57.007	26.266	-16.993	74.000	30.741	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz - Left Earbud	

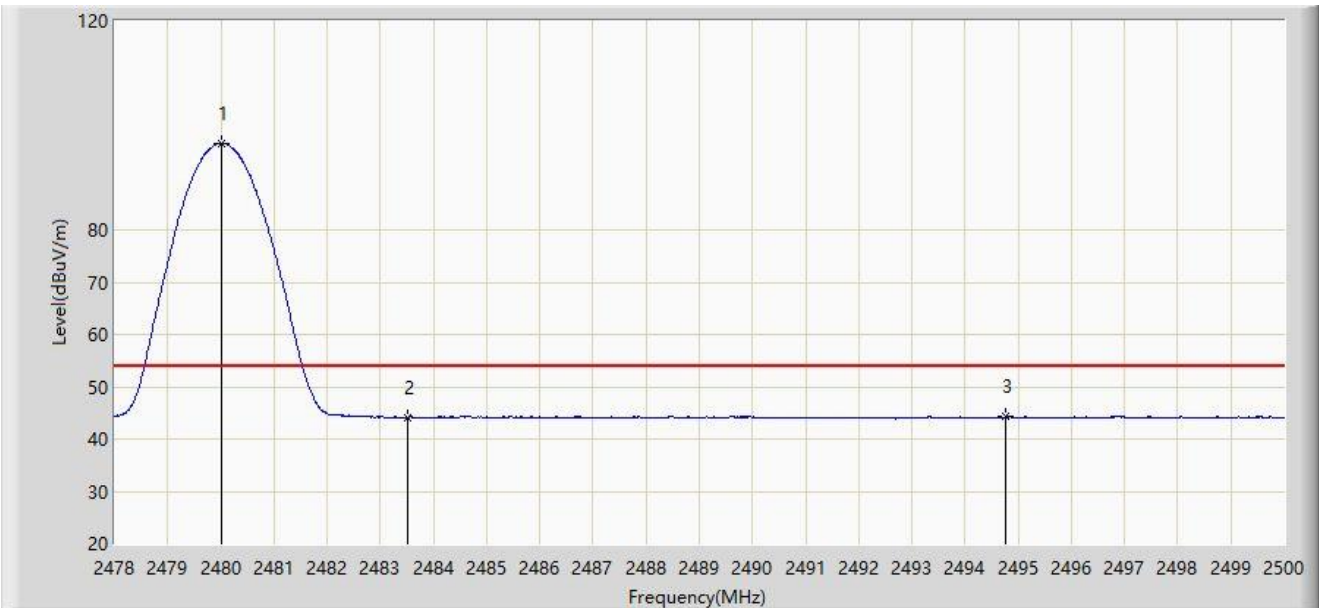


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	96.553	65.820	N/A	N/A	30.733	AV
2		2483.500	44.072	13.337	-9.928	54.000	30.734	AV
3	*	2494.775	44.332	13.591	-9.668	54.000	30.742	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz - Left Earbud	

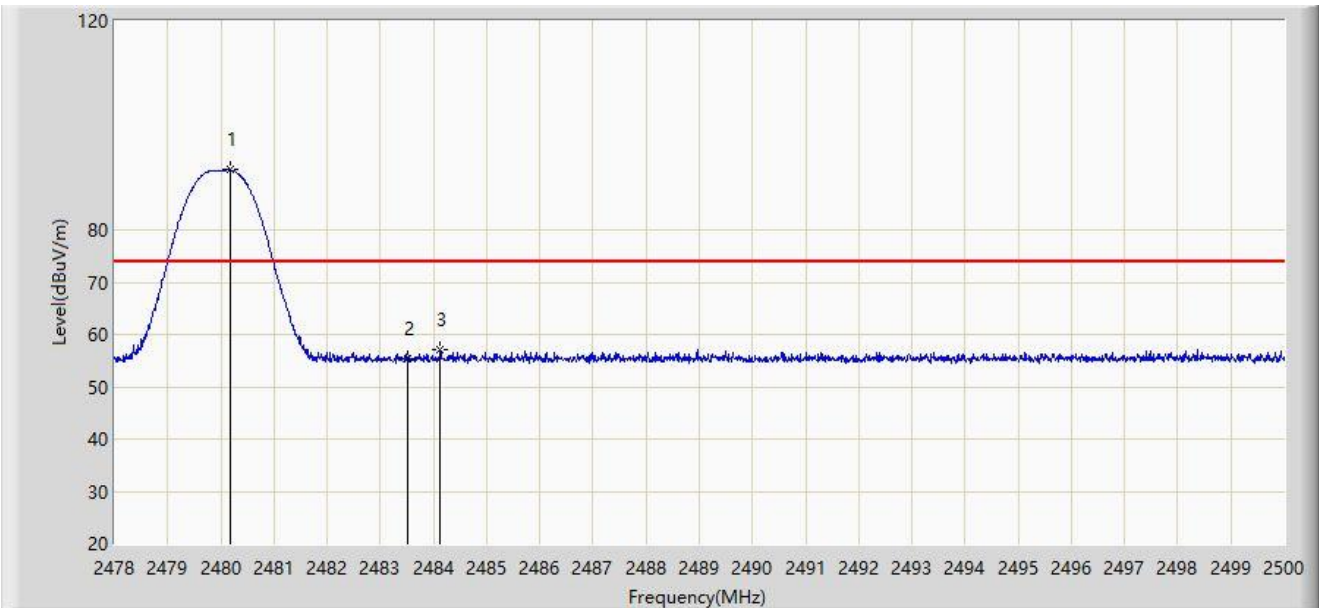


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.167	91.480	60.747	N/A	N/A	30.733	PK
2		2483.500	55.412	24.677	-18.588	74.000	30.734	PK
3	*	2484.127	57.170	26.435	-16.830	74.000	30.735	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz - Left Earbud	

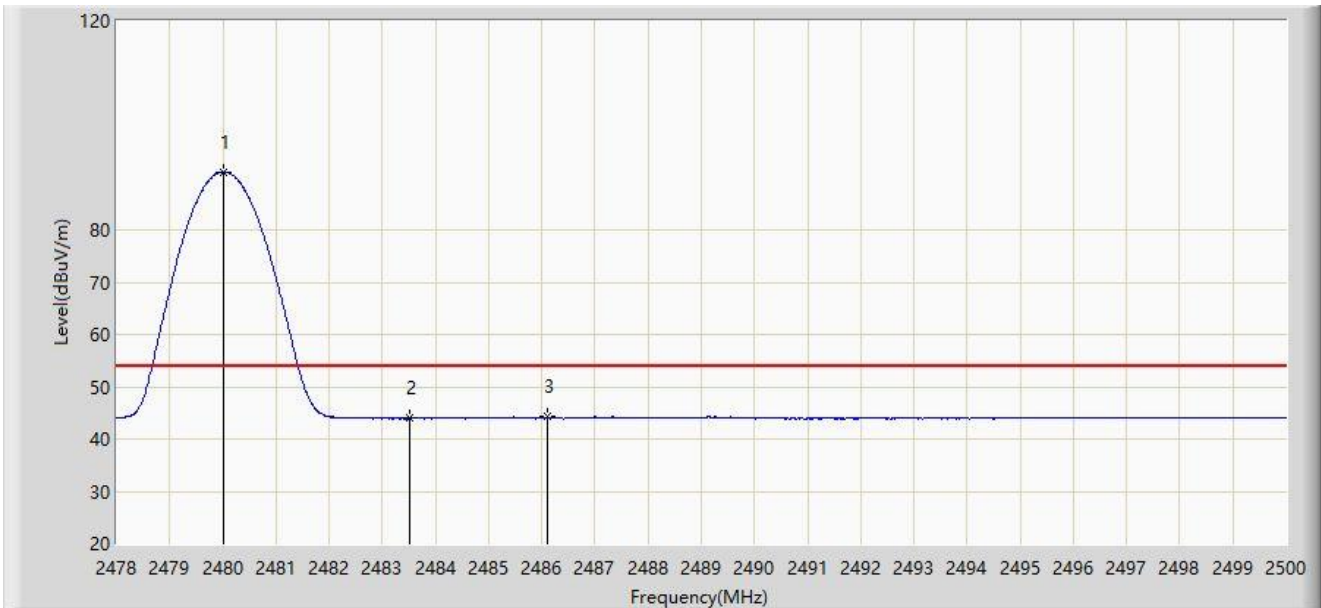


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	91.074	60.341	N/A	N/A	30.733	AV
2		2483.500	44.014	13.279	-9.986	54.000	30.734	AV
3	*	2486.107	44.308	13.572	-9.692	54.000	30.736	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz - Left Earbud	

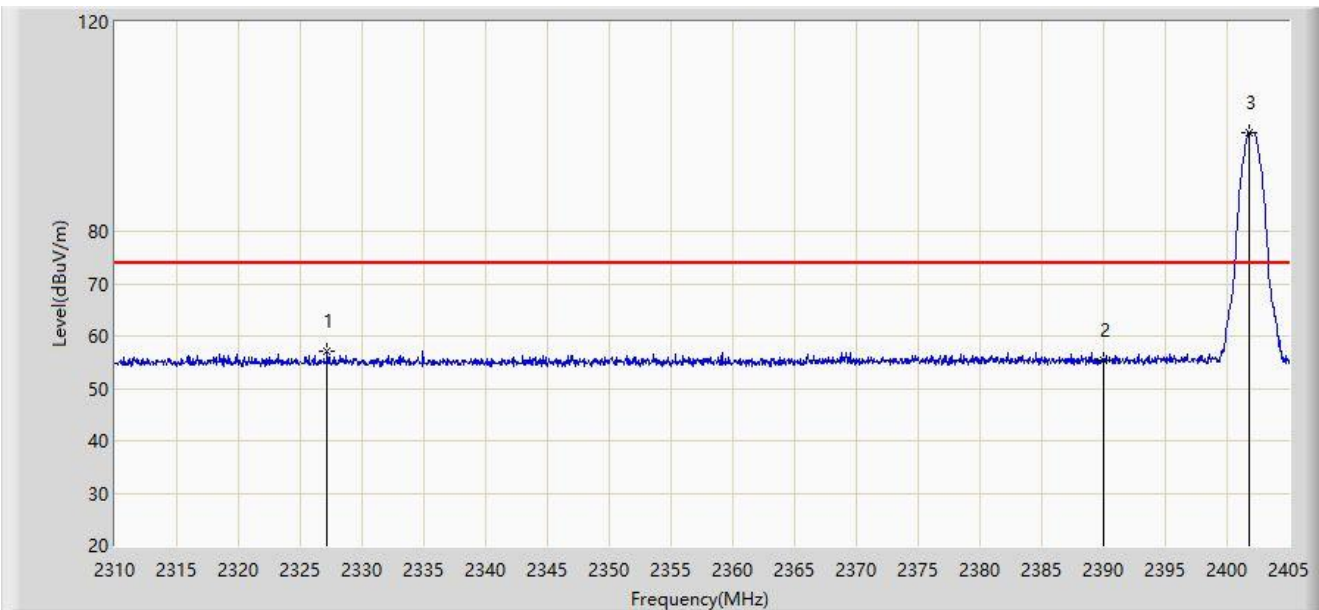


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2327.195	57.199	26.202	-16.801	74.000	30.997	PK
2		2390.000	55.283	24.460	-18.717	74.000	30.823	PK
3		2401.817	98.927	68.114	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz - Left Earbud	

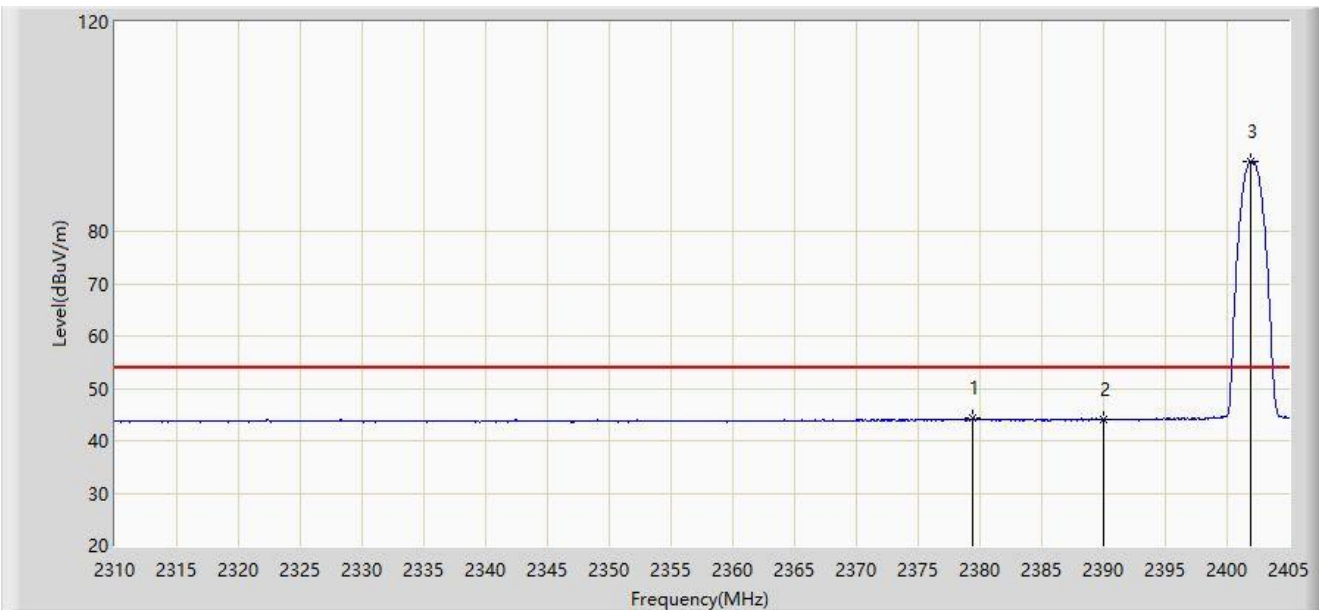


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2379.445	44.287	13.369	-9.713	54.000	30.918	AV
2		2390.000	43.959	13.136	-10.041	54.000	30.823	AV
3		2401.960	93.477	62.664	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz - Left Earbud	

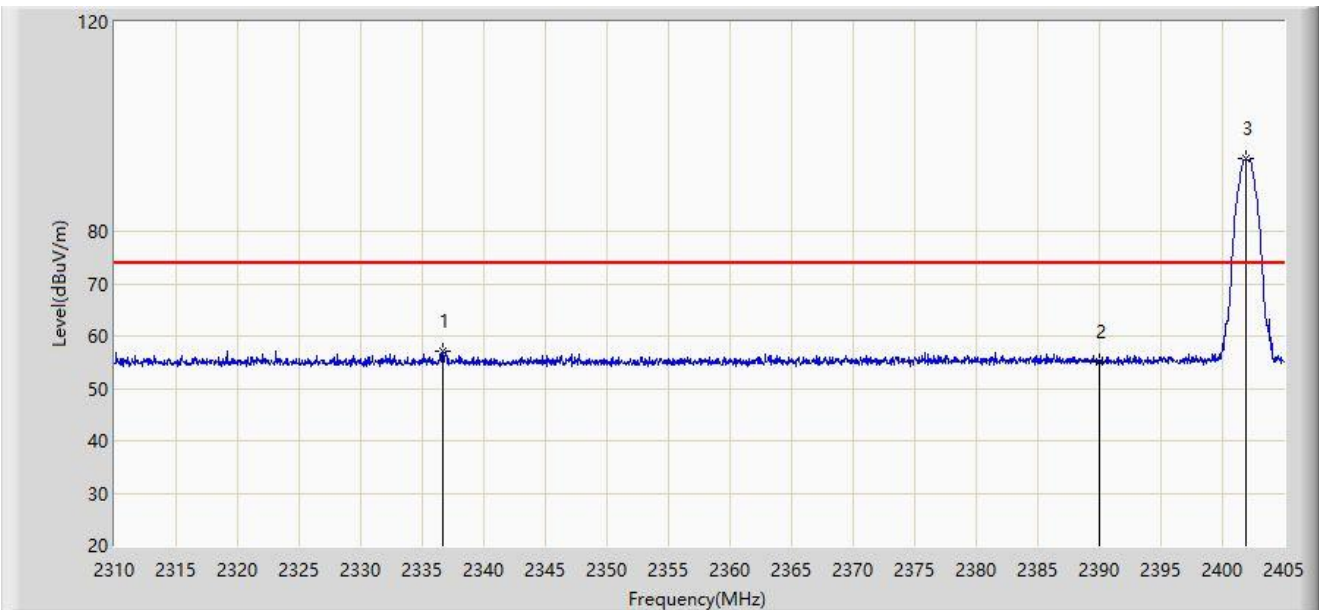


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2336.647	57.192	26.231	-16.808	74.000	30.961	PK
2		2390.000	55.211	24.388	-18.789	74.000	30.823	PK
3		2401.865	93.769	62.956	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz - Left Earbud	

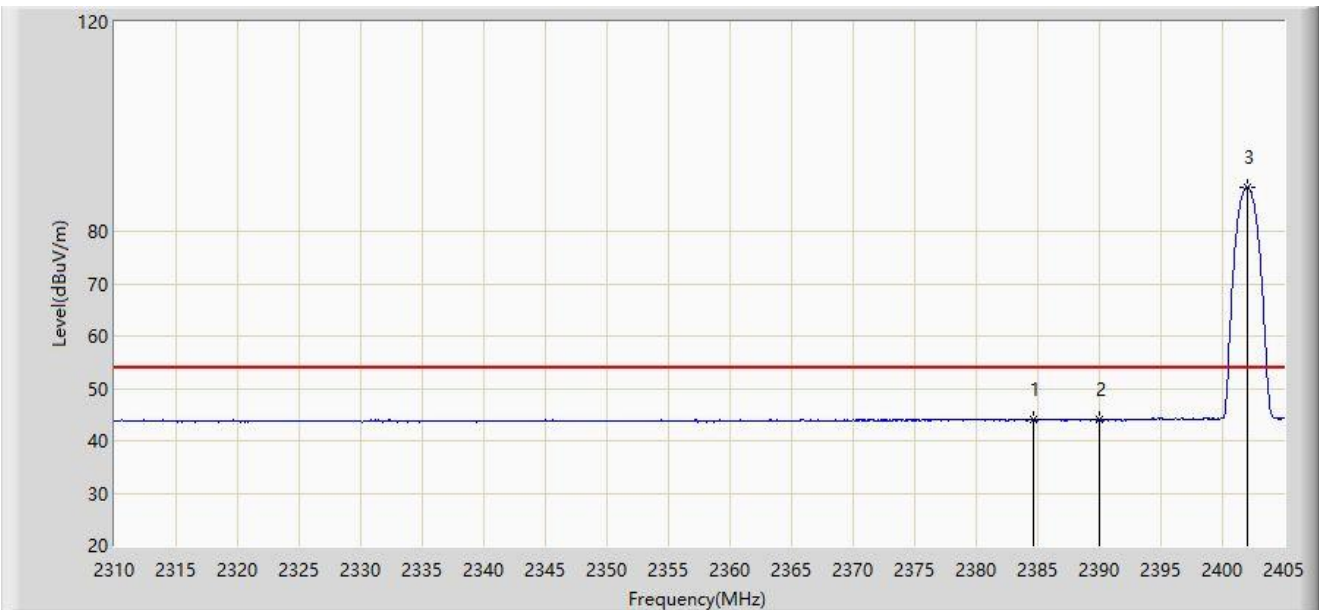


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.670	44.193	13.322	-9.807	54.000	30.871	AV
2		2390.000	44.019	13.196	-9.981	54.000	30.823	AV
3		2402.008	88.437	57.624	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz - Left Earbud	

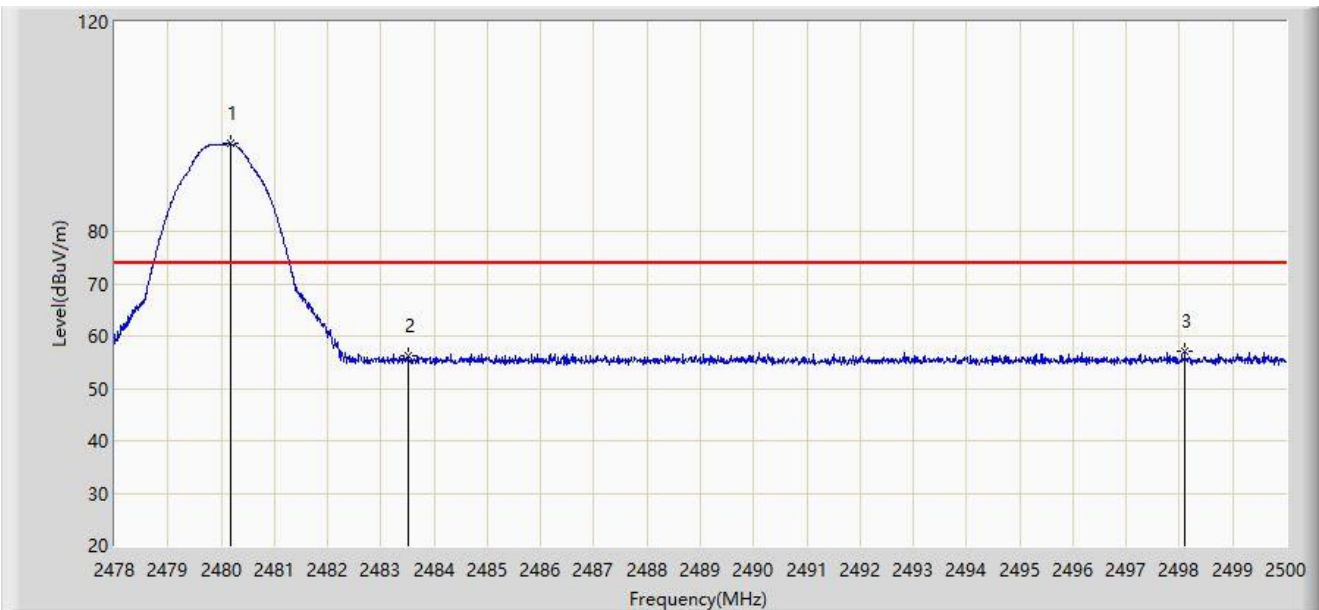


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.167	96.744	66.011	N/A	N/A	30.733	PK
2		2483.500	56.248	25.513	-17.752	74.000	30.734	PK
3	*	2498.097	57.133	26.391	-16.867	74.000	30.742	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz - Left Earbud	

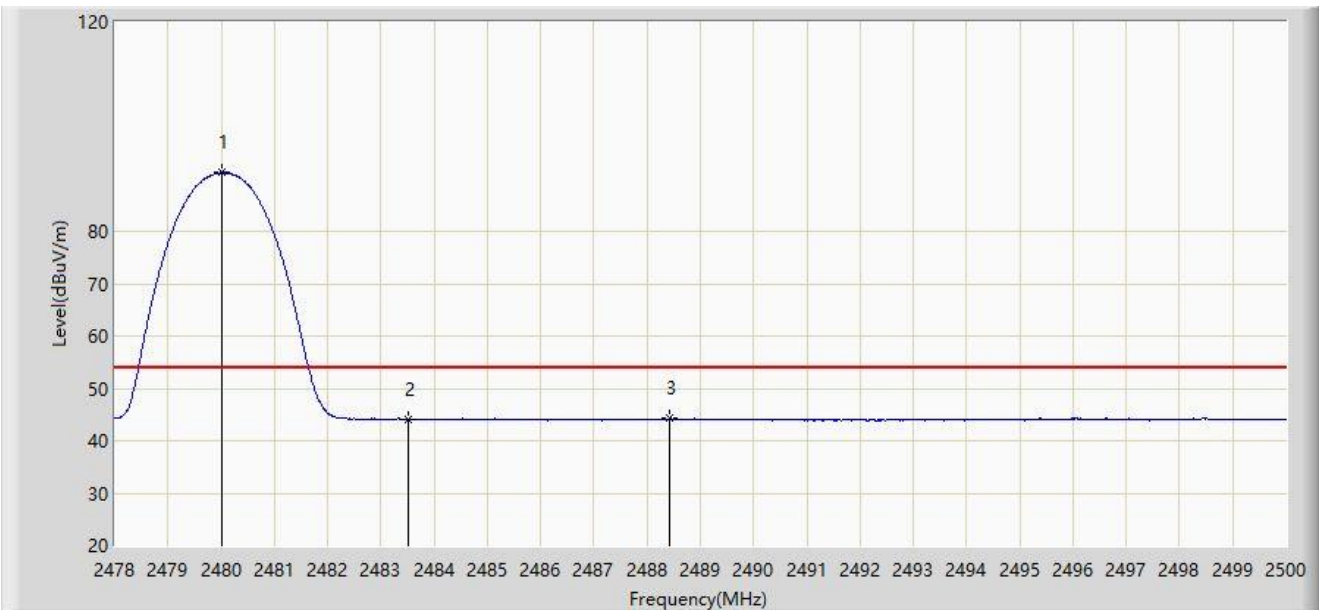


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	91.196	60.463	N/A	N/A	30.733	AV
2		2483.500	44.045	13.310	-9.955	54.000	30.734	AV
3	*	2488.428	44.290	13.552	-9.710	54.000	30.737	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz - Left Earbud	

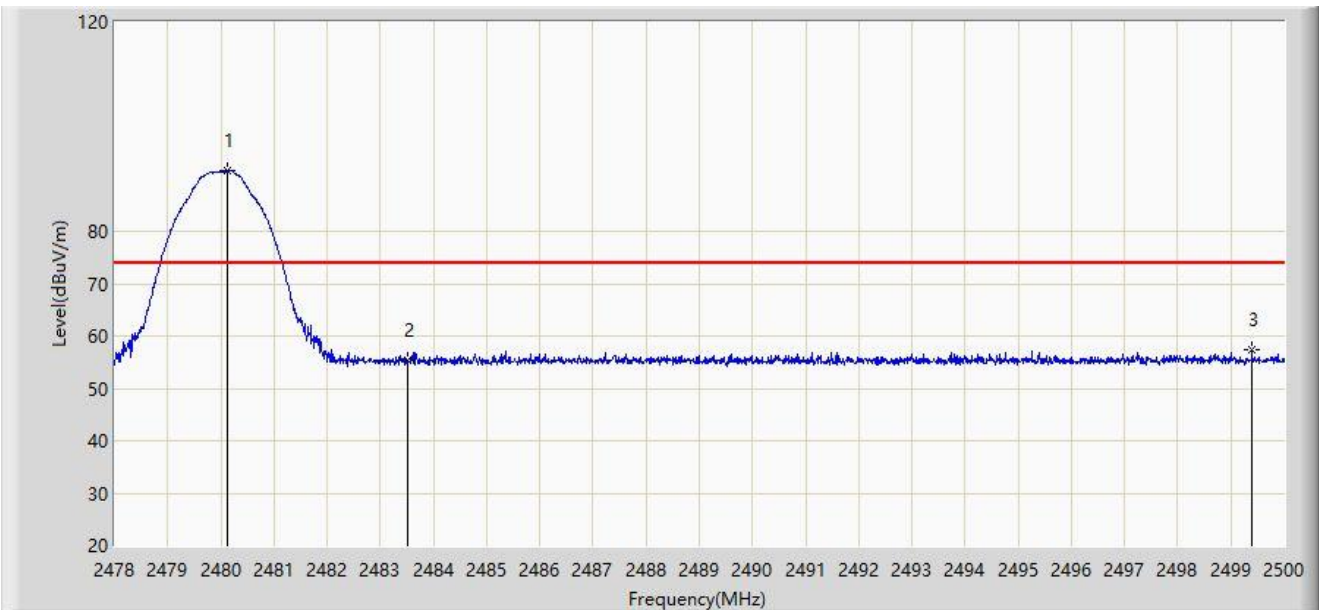


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2480.134	91.587	60.854	N/A	N/A	30.733	PK
2		2483.500	55.473	24.738	-18.527	74.000	30.734	PK
3	*	2499.395	57.360	26.618	-16.640	74.000	30.742	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz - Left Earbud	

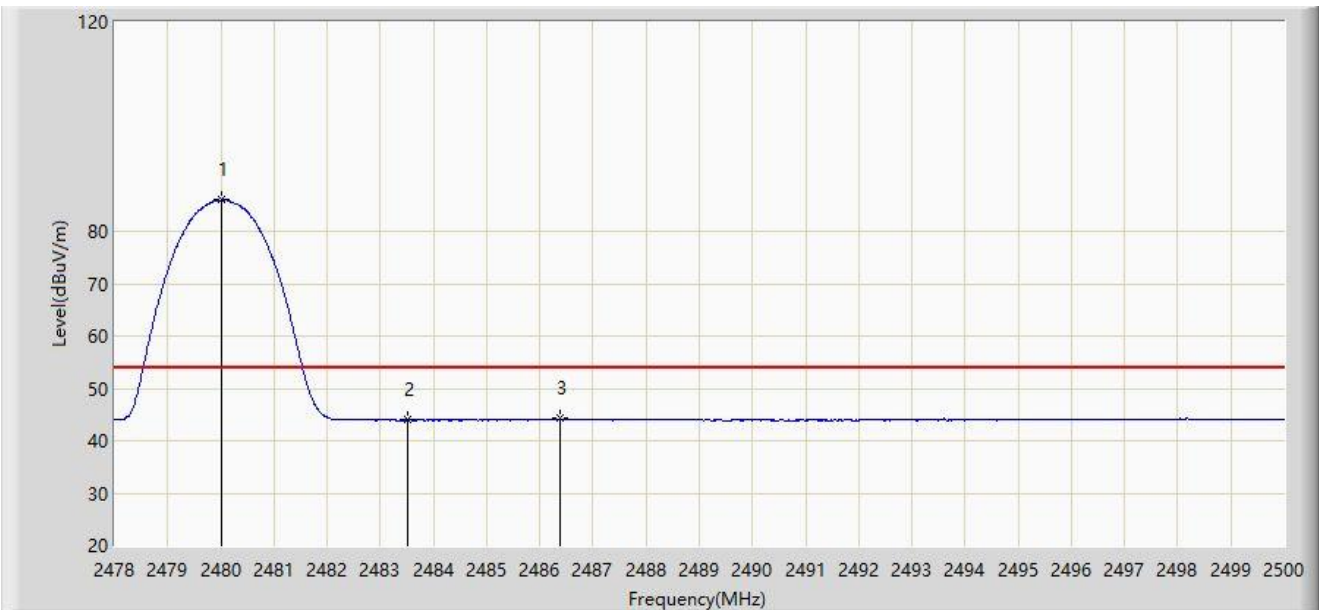


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	85.986	55.253	N/A	N/A	30.733	AV
2		2483.500	43.969	13.234	-10.031	54.000	30.734	AV
3	*	2486.371	44.225	13.489	-9.775	54.000	30.736	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz - Left Earbud	

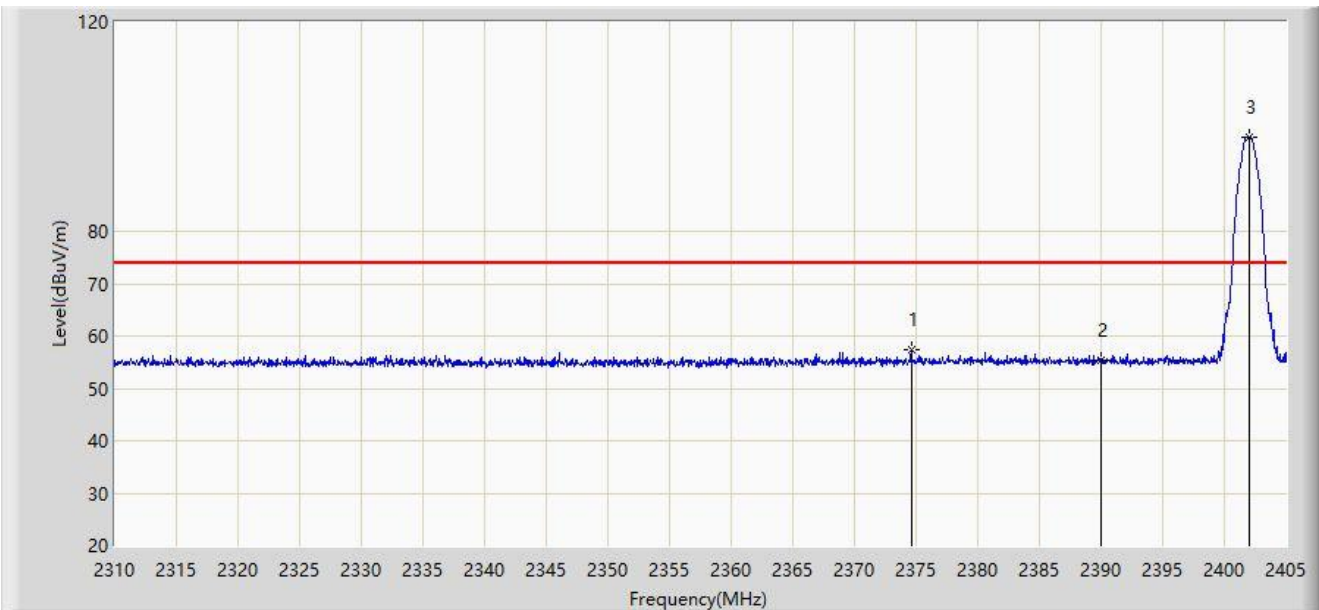


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2374.600	57.288	26.365	-16.712	74.000	30.923	PK
2		2390.000	55.397	24.574	-18.603	74.000	30.823	PK
3		2402.008	98.042	67.229	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz - Left Earbud	

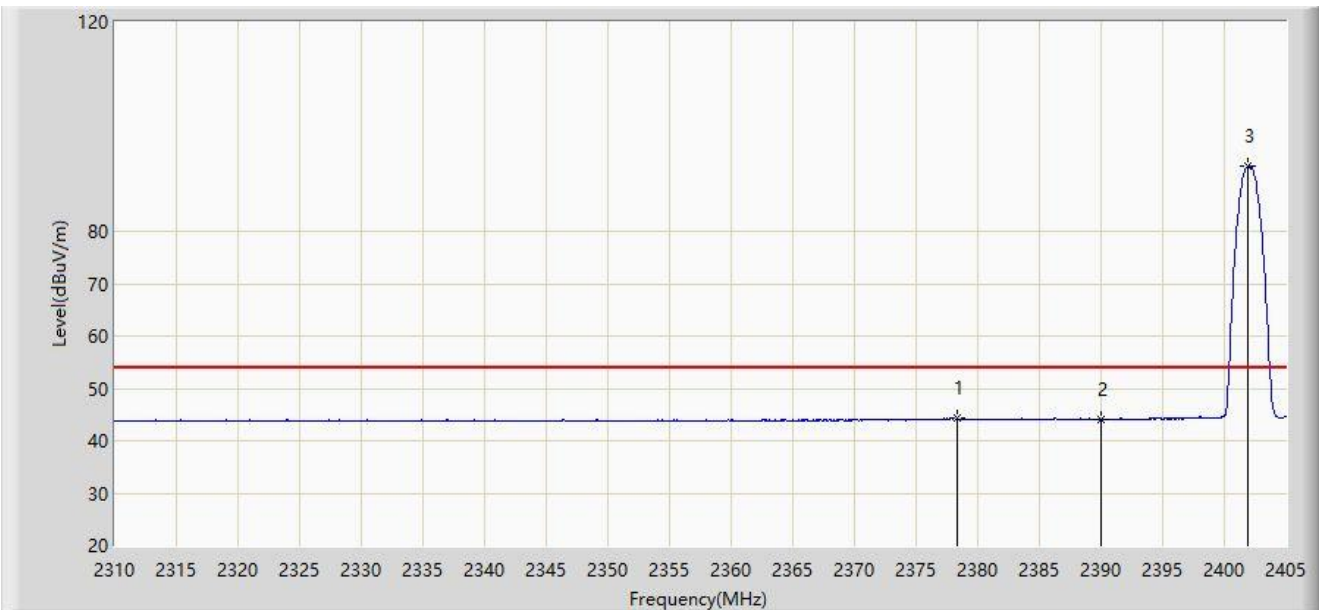


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2378.353	44.296	13.368	-9.704	54.000	30.928	AV
2		2390.000	44.073	13.250	-9.927	54.000	30.823	AV
3		2401.960	92.568	61.755	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz - Left Earbud	

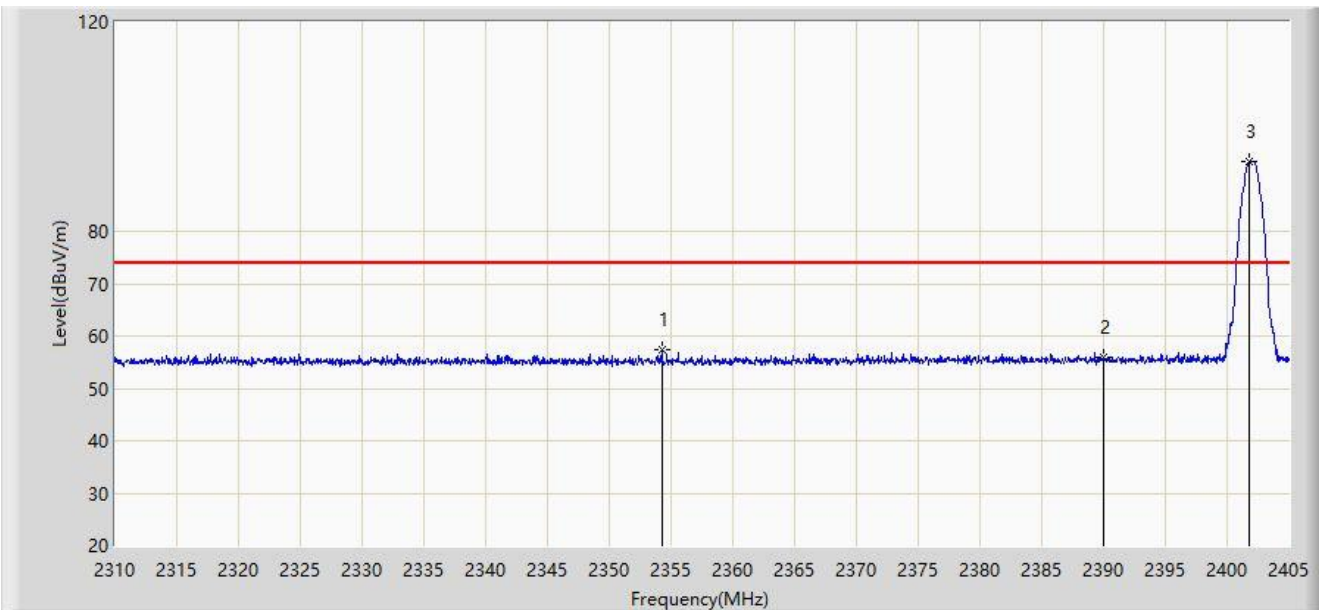


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2354.270	57.294	26.435	-16.706	74.000	30.860	PK
2		2390.000	55.864	25.041	-18.136	74.000	30.823	PK
3		2401.817	93.356	62.543	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz - Left Earbud	

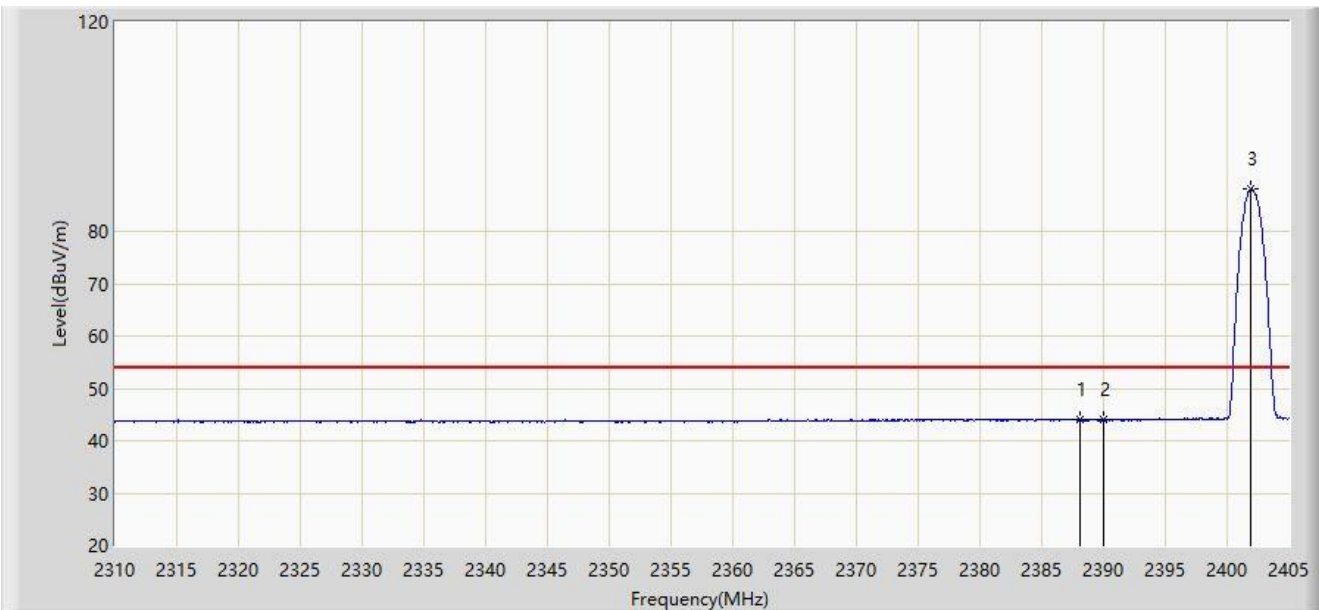


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.042	44.198	13.357	-9.802	54.000	30.840	AV
2		2390.000	44.019	13.196	-9.981	54.000	30.823	AV
3		2401.960	88.146	57.333	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz - Left Earbud	

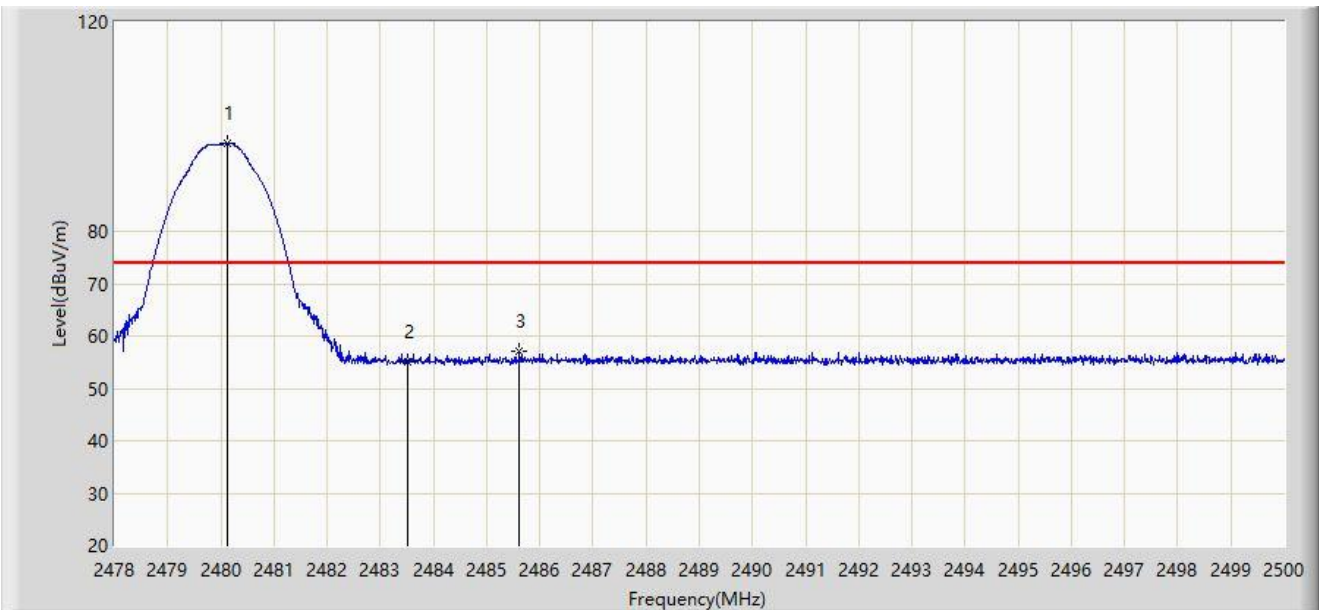


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.123	96.767	66.034	N/A	N/A	30.733	PK
2		2483.500	55.084	24.349	-18.916	74.000	30.734	PK
3	*	2485.612	57.178	26.442	-16.822	74.000	30.736	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz - Left Earbud	

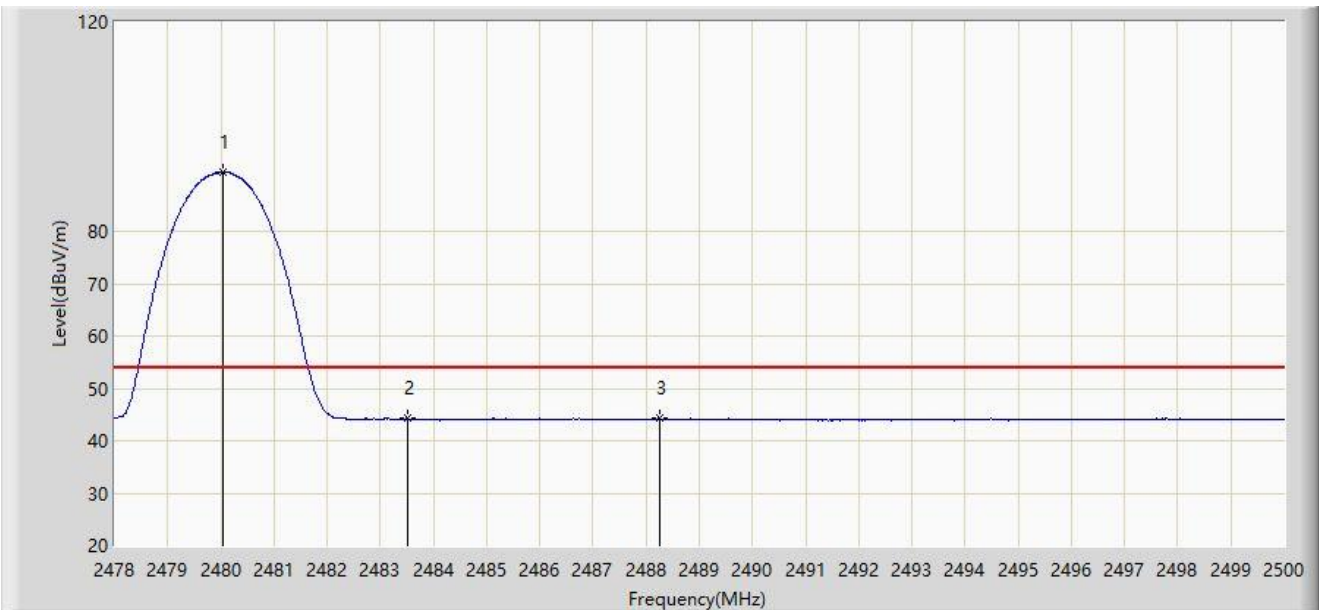


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.035	91.279	60.546	N/A	N/A	30.733	AV
2		2483.500	44.234	13.499	-9.766	54.000	30.734	AV
3	*	2488.252	44.308	13.571	-9.692	54.000	30.737	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz - Left Earbud	

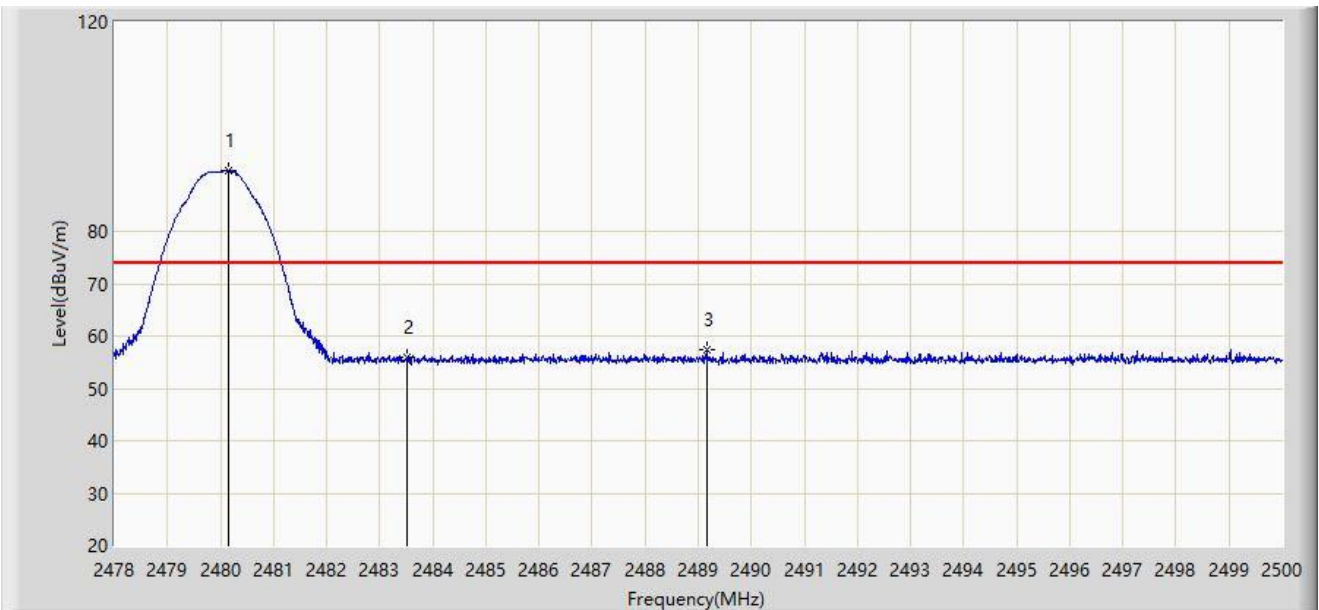


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2480.156	91.585	60.852	N/A	N/A	30.733	PK
2		2483.500	55.816	25.081	-18.184	74.000	30.734	PK
3	*	2489.154	57.250	26.512	-16.750	74.000	30.738	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz - Left Earbud	

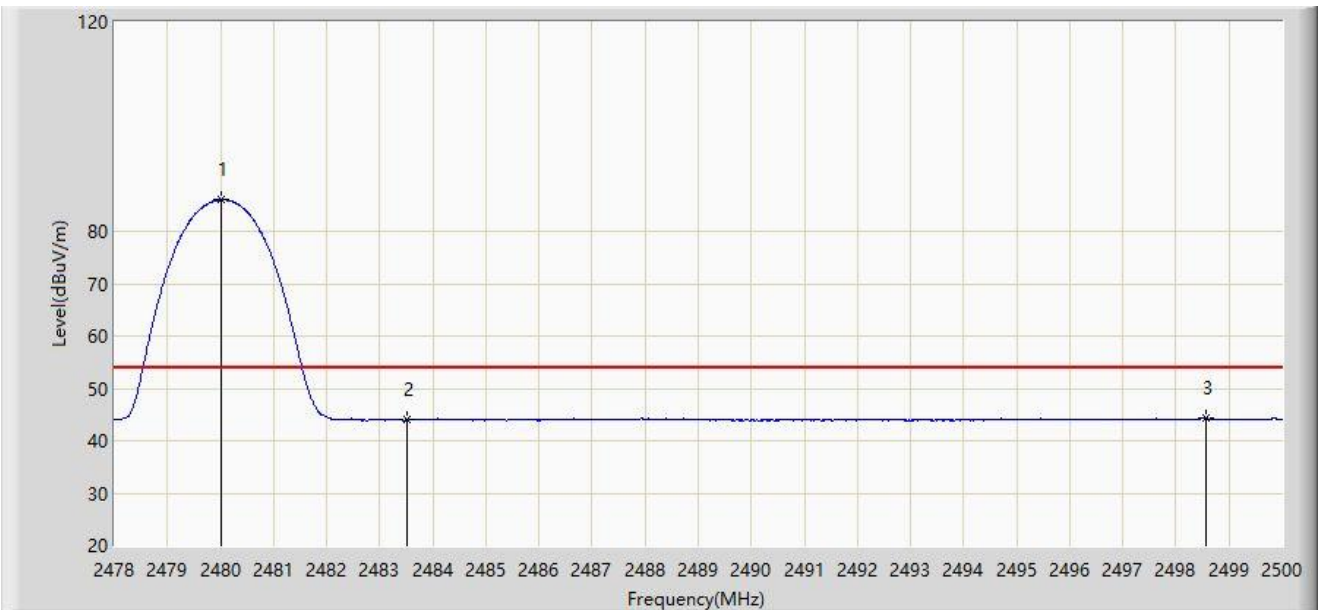


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.002	86.002	55.269	N/A	N/A	30.733	AV
2		2483.500	43.954	13.219	-10.046	54.000	30.734	AV
3	*	2498.570	44.329	13.587	-9.671	54.000	30.742	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Right Earbud	

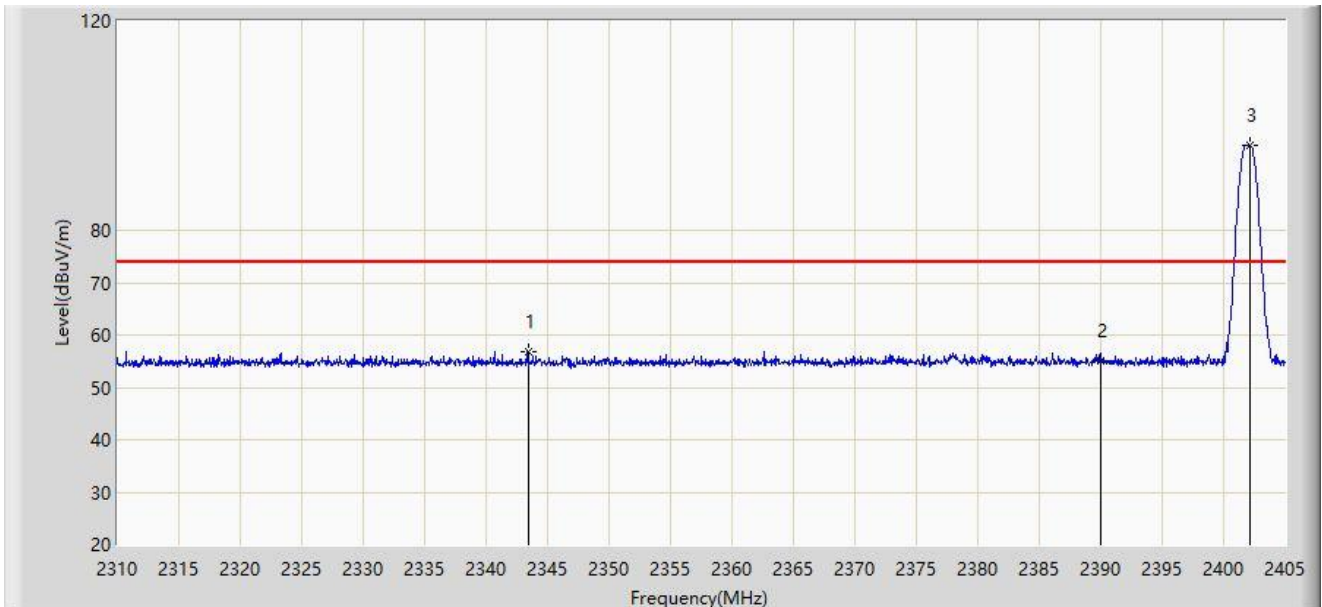


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2343.393	56.904	25.970	-17.096	74.000	30.935	PK
2		2390.000	54.981	24.158	-19.019	74.000	30.823	PK
3		2402.150	96.249	65.435	N/A	N/A	30.814	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Right Earbud	

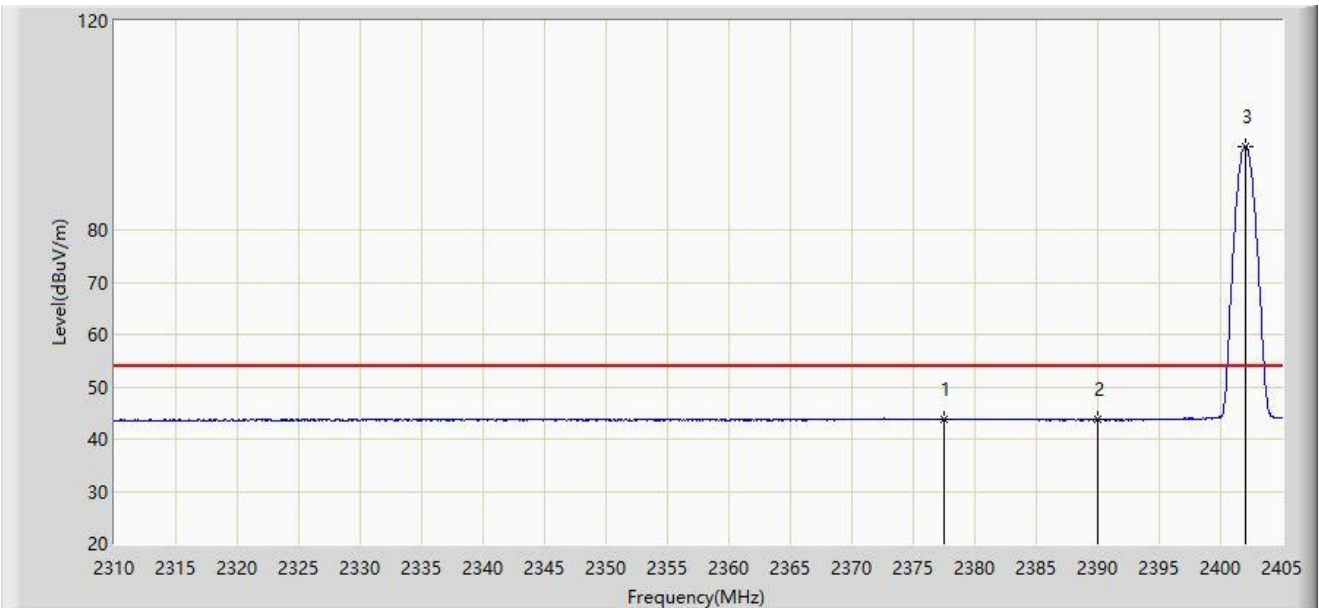


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2377.498	43.900	12.964	-10.100	54.000	30.936	AV
2		2390.000	43.674	12.851	-10.326	54.000	30.823	AV
3		2402.008	95.942	65.129	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Right Earbud	

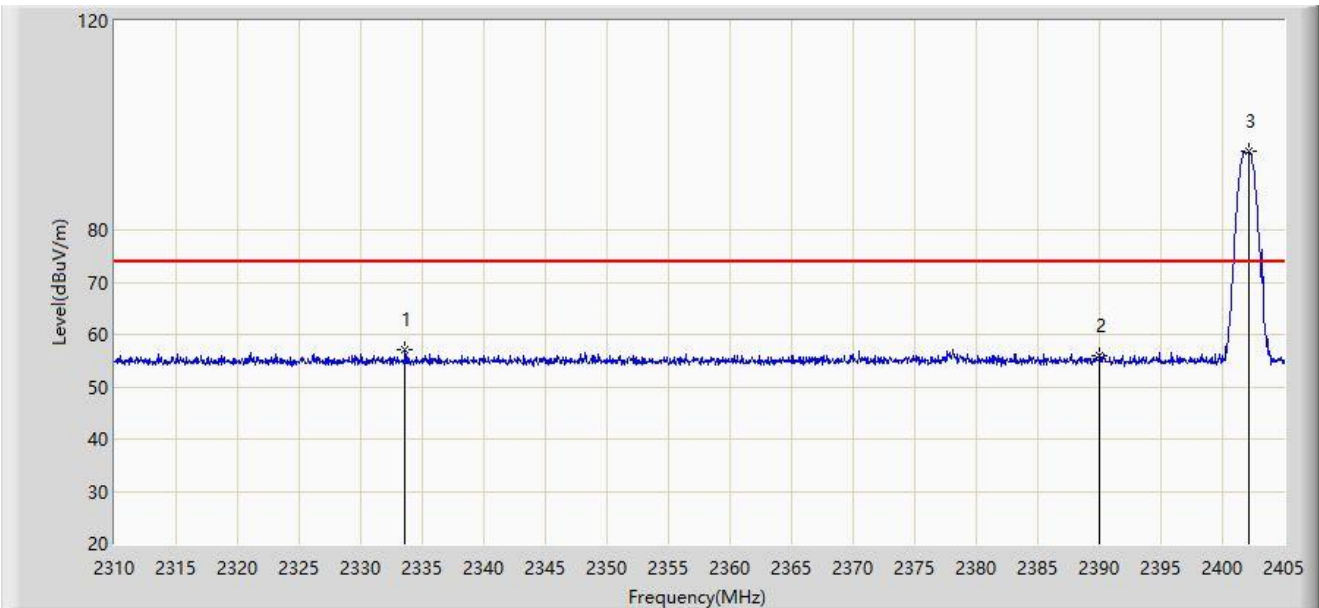


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2333.607	57.185	26.213	-16.815	74.000	30.973	PK
2		2390.000	55.837	25.014	-18.163	74.000	30.823	PK
3		2402.103	94.958	64.144	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2402MHz - Right Earbud	

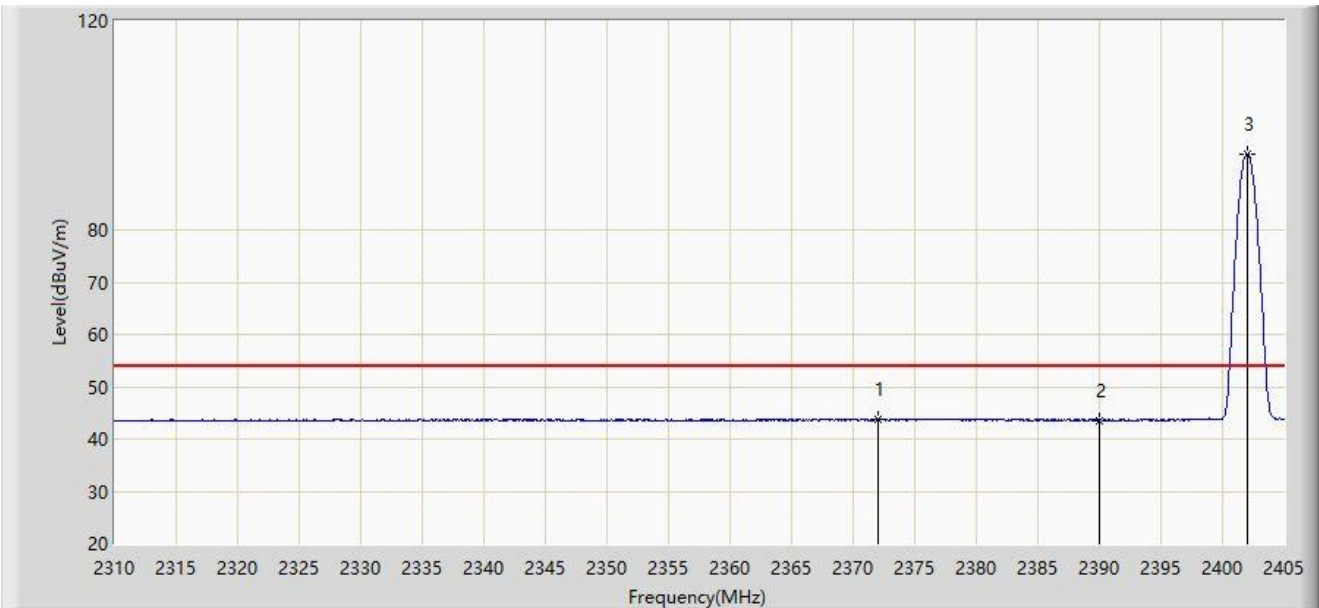


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2372.083	43.901	12.996	-10.099	54.000	30.906	AV
2		2390.000	43.621	12.798	-10.379	54.000	30.823	AV
3		2402.008	94.584	63.771	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz - Right Earbud	

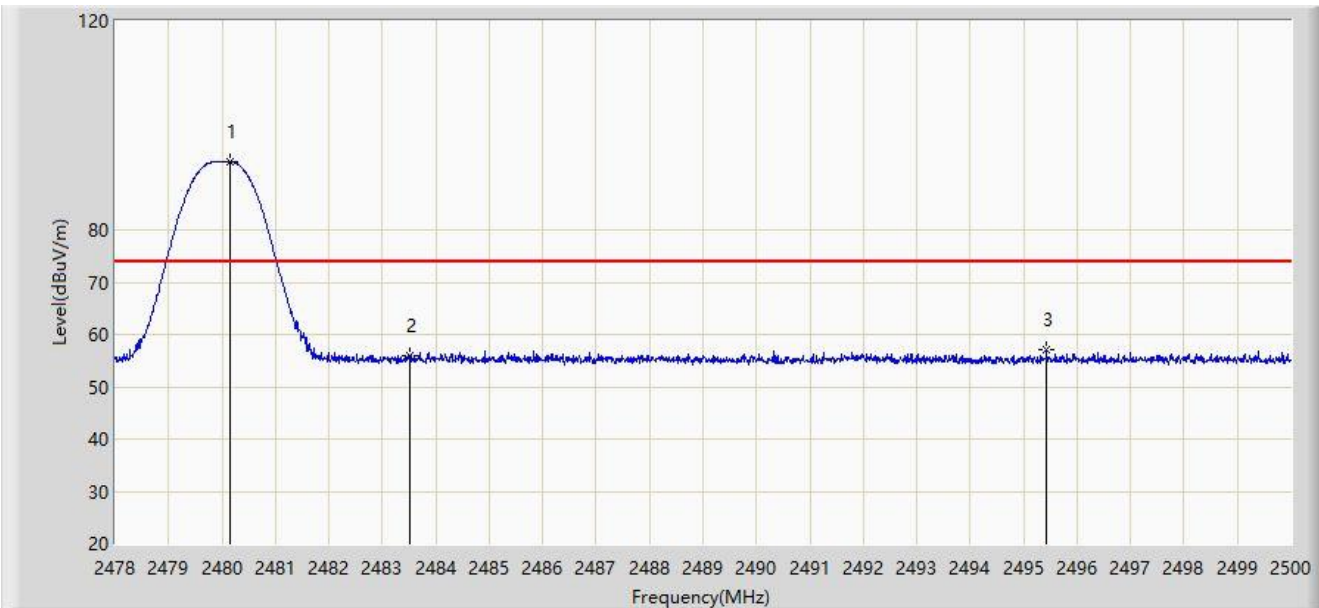


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2480.145	93.113	62.380	N/A	N/A	30.733	PK
2		2483.500	55.888	25.153	-18.112	74.000	30.734	PK
3	*	2495.424	57.082	26.340	-16.918	74.000	30.741	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz - Right Earbud	

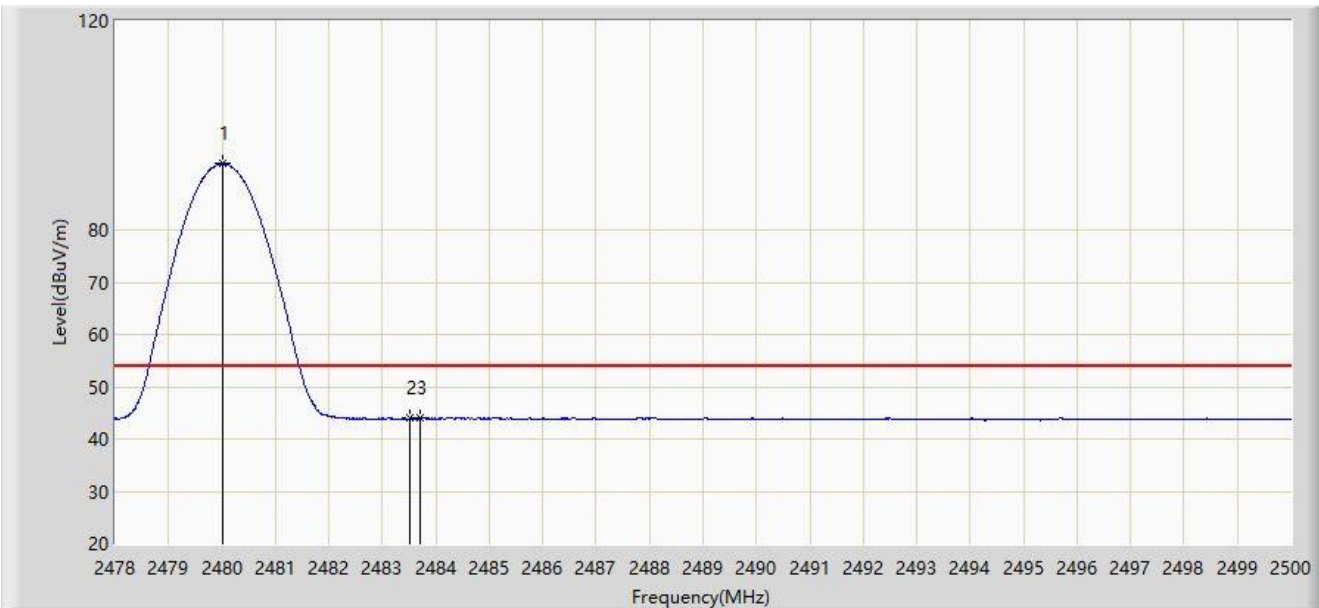


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.002	92.659	61.926	N/A	N/A	30.733	AV
2		2483.500	43.924	13.189	-10.076	54.000	30.734	AV
3	*	2483.720	44.097	13.362	-9.903	54.000	30.735	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz - Right Earbud	

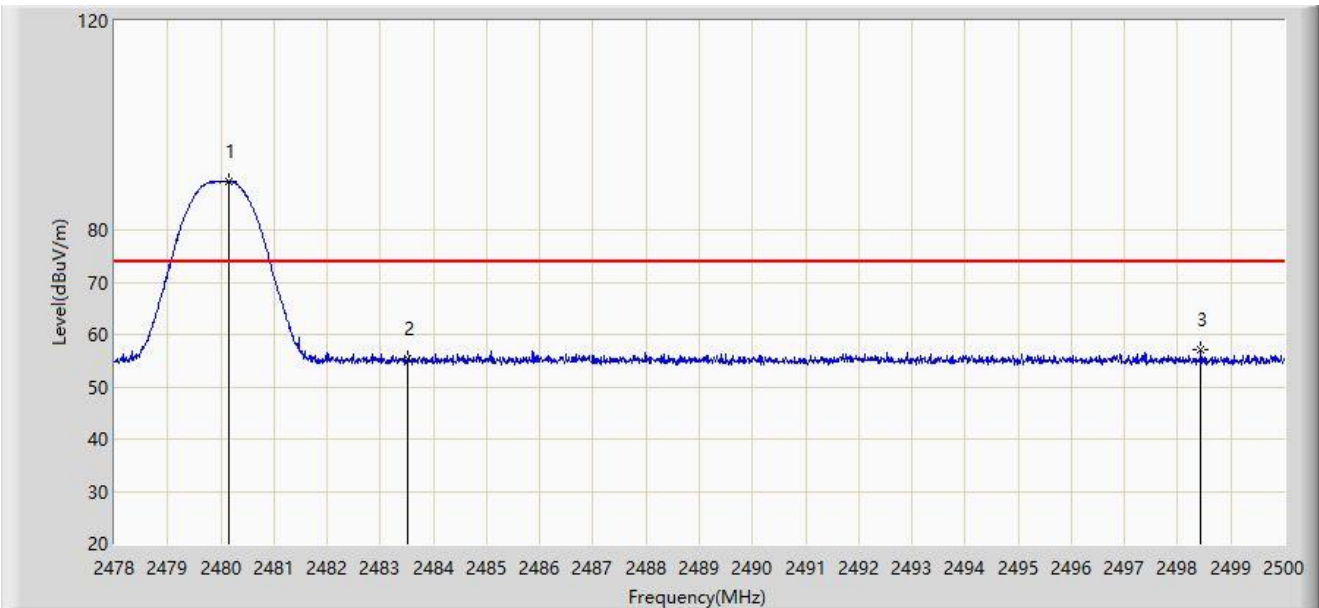


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.156	89.305	58.572	N/A	N/A	30.733	PK
2		2483.500	55.267	24.532	-18.733	74.000	30.734	PK
3	*	2498.438	57.036	26.294	-16.964	74.000	30.742	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by DH5 at 2480MHz - Right Earbud	

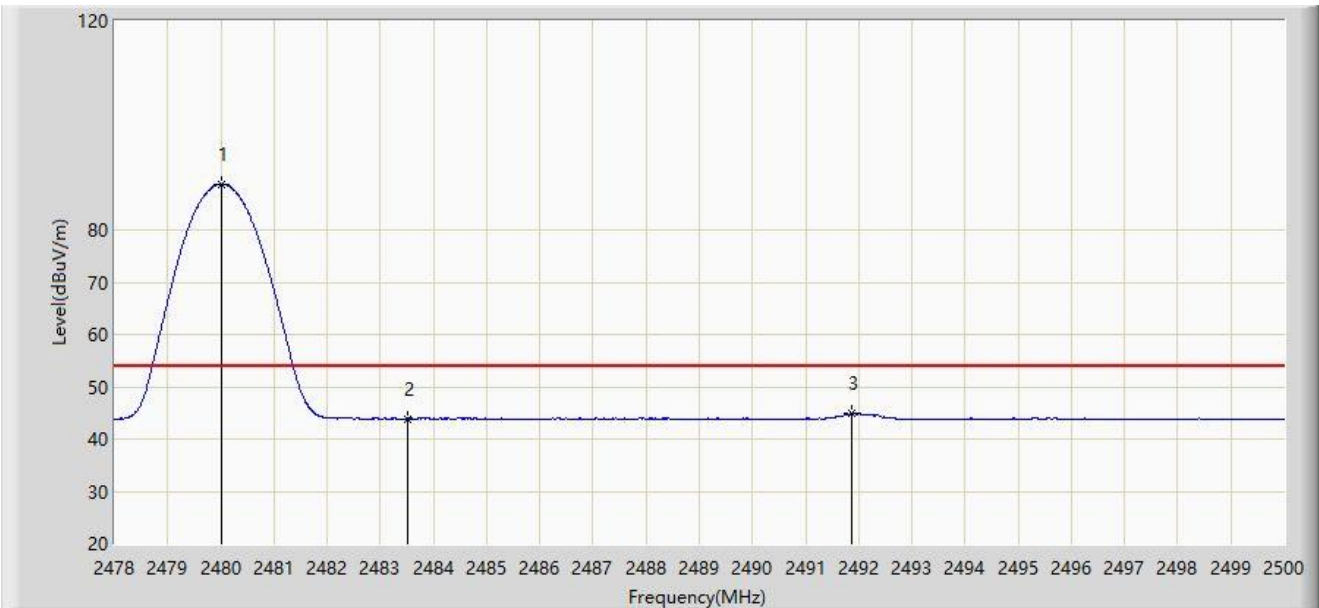


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	88.804	58.071	N/A	N/A	30.733	AV
2		2483.500	43.861	13.126	-10.139	54.000	30.734	AV
3	*	2491.871	45.044	14.304	-8.956	54.000	30.740	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz - Right Earbud	

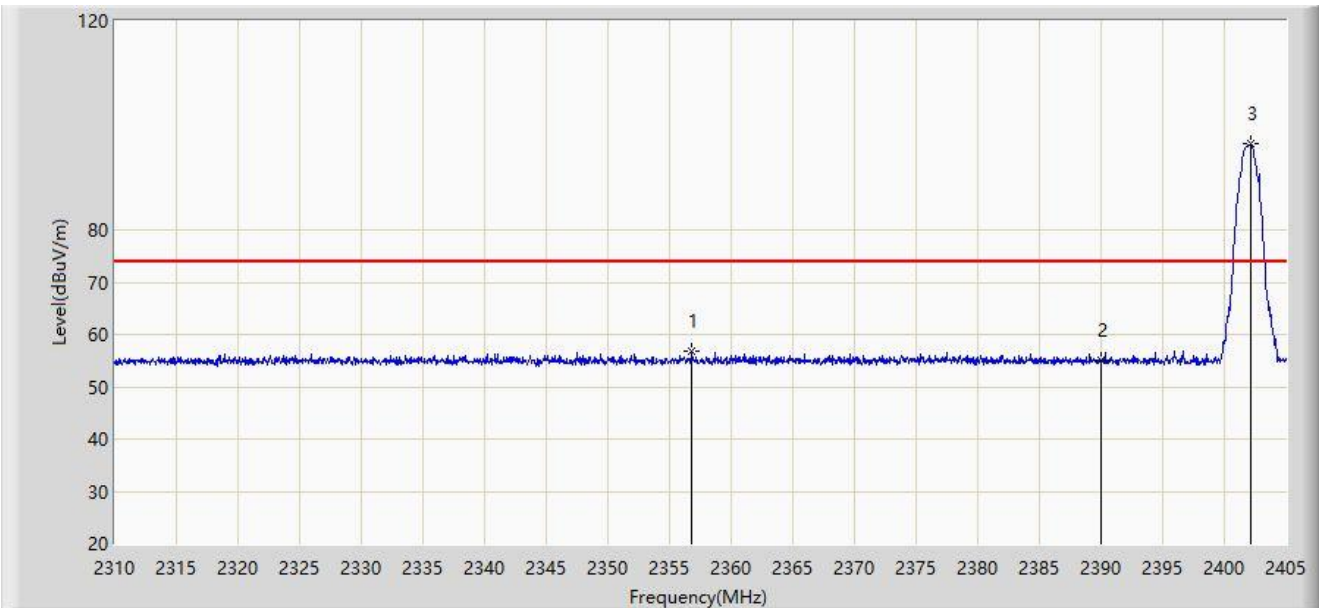


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2356.788	56.837	25.995	-17.163	74.000	30.843	PK
2		2390.000	54.958	24.135	-19.042	74.000	30.823	PK
3		2402.150	96.377	65.563	N/A	N/A	30.814	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz - Right Earbud	

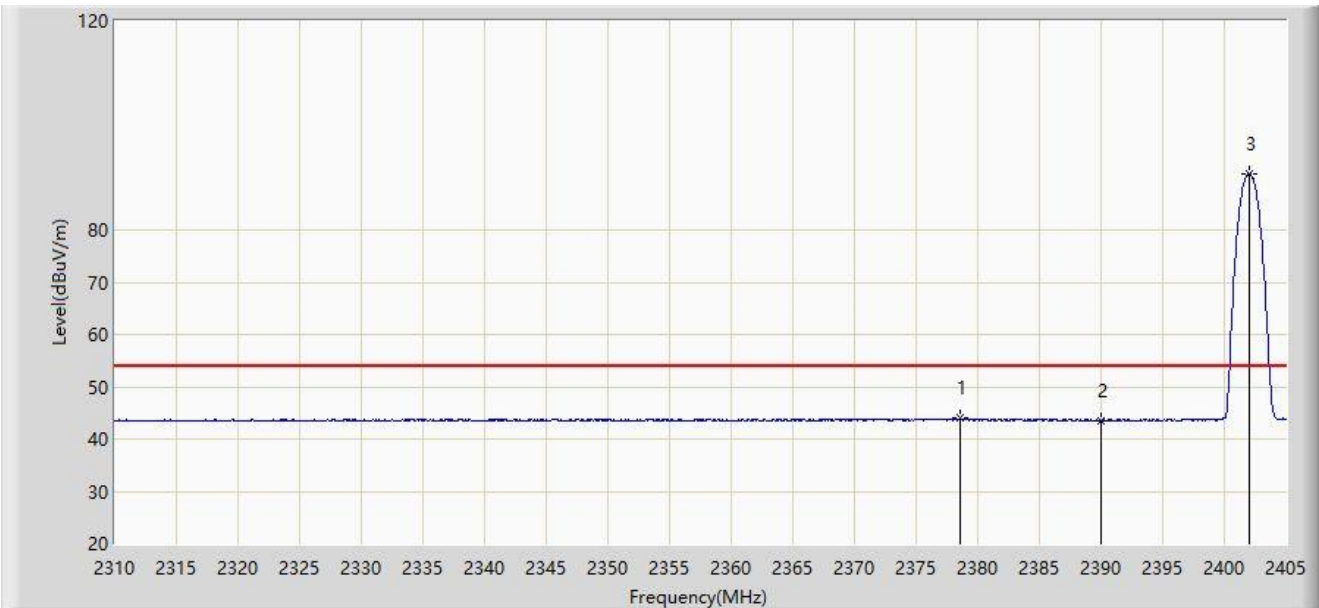


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2378.542	43.918	12.992	-10.082	54.000	30.926	AV
2		2390.000	43.547	12.724	-10.453	54.000	30.823	AV
3		2402.008	90.676	59.863	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz - Right Earbud	

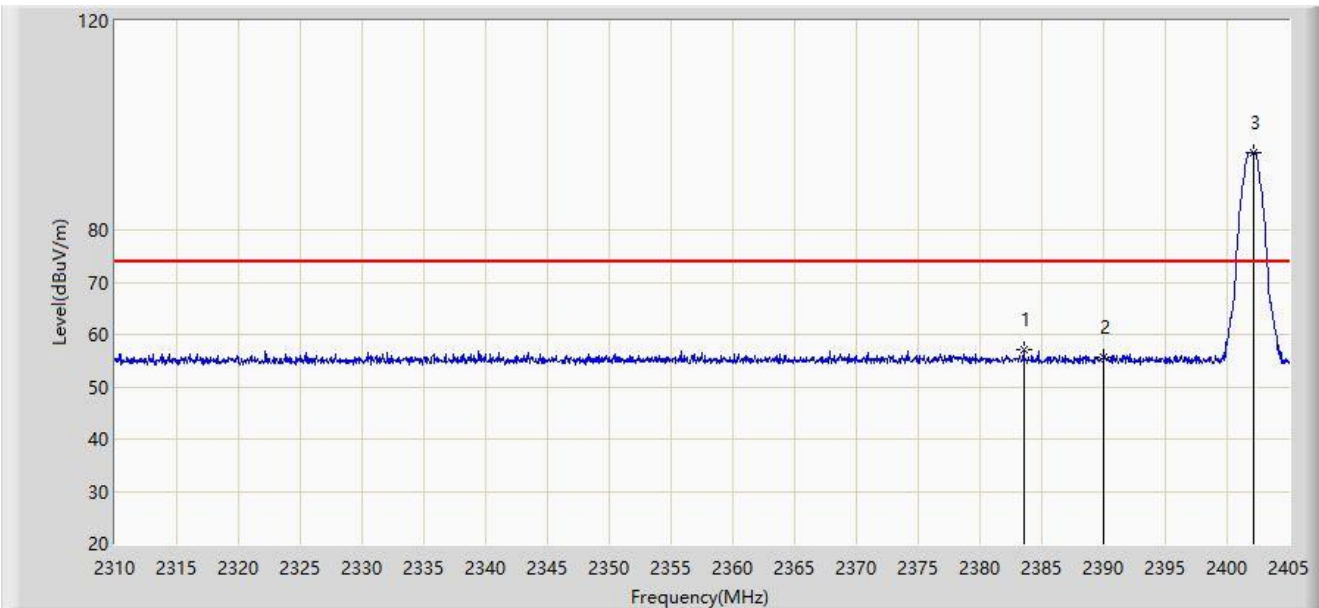


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2383.530	57.090	26.209	-16.910	74.000	30.881	PK
2		2390.000	55.780	24.957	-18.220	74.000	30.823	PK
3		2402.103	94.921	64.107	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2402MHz - Right Earbud	

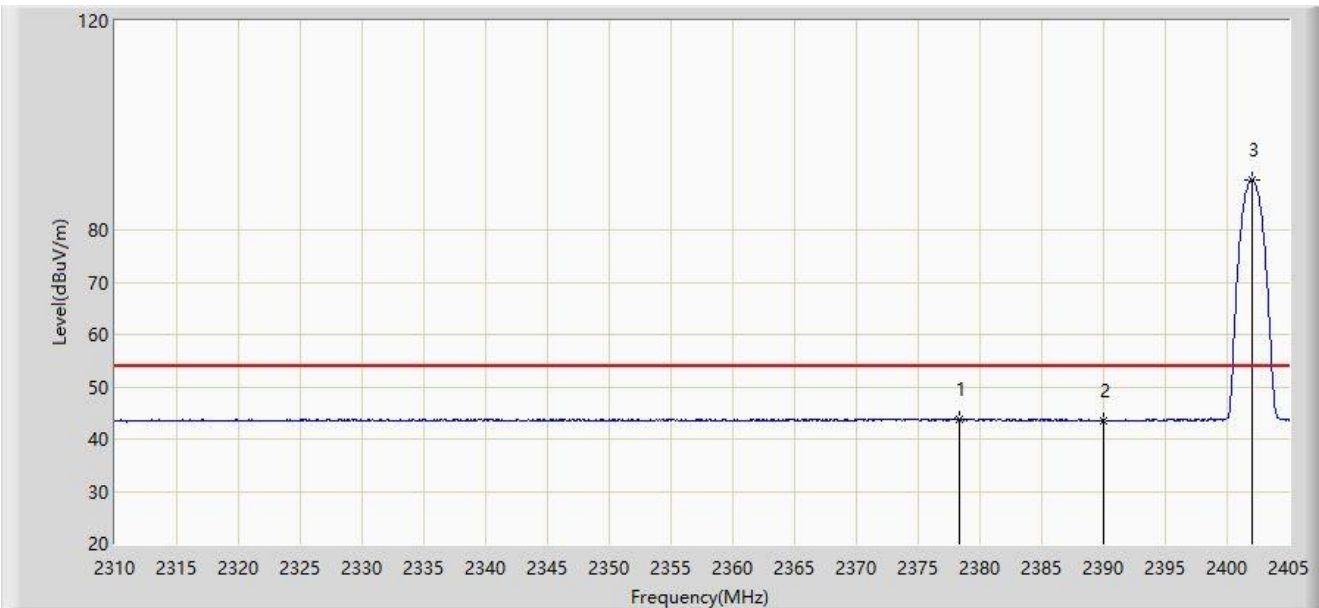


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2378.305	43.905	12.977	-10.095	54.000	30.928	AV
2		2390.000	43.503	12.680	-10.497	54.000	30.823	AV
3		2402.055	89.512	58.698	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz - Right Earbud	

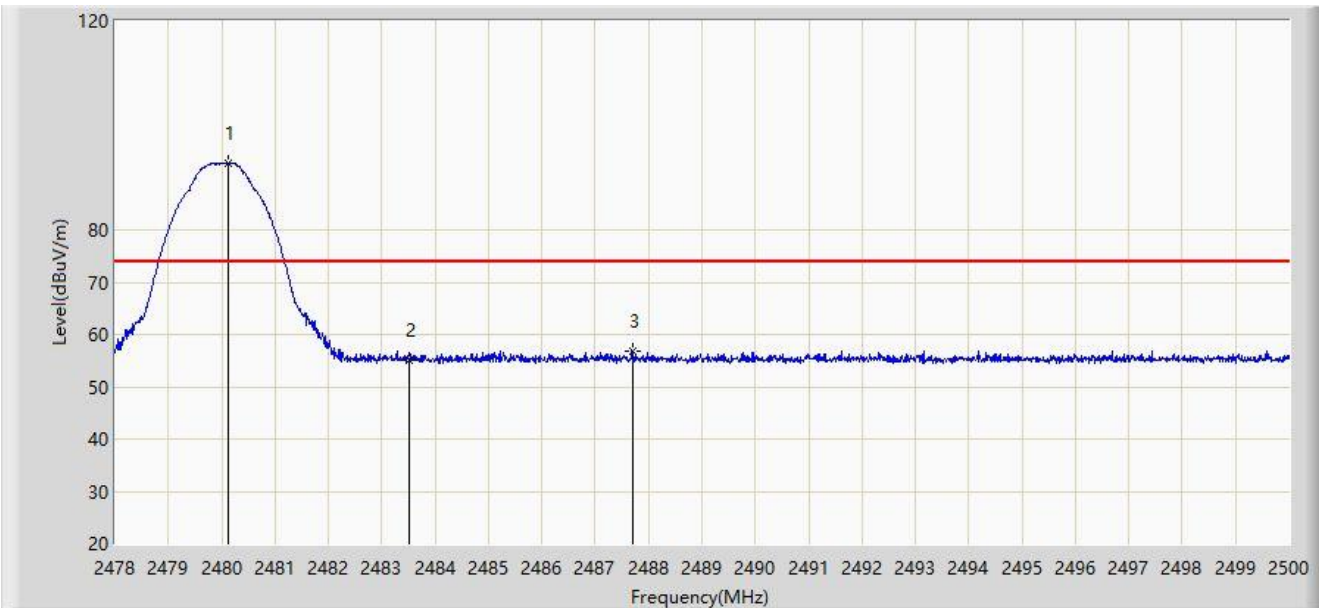


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.134	92.885	62.152	N/A	N/A	30.733	PK
2		2483.500	54.932	24.197	-19.068	74.000	30.734	PK
3	*	2487.702	56.954	26.217	-17.046	74.000	30.737	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz - Right Earbud	

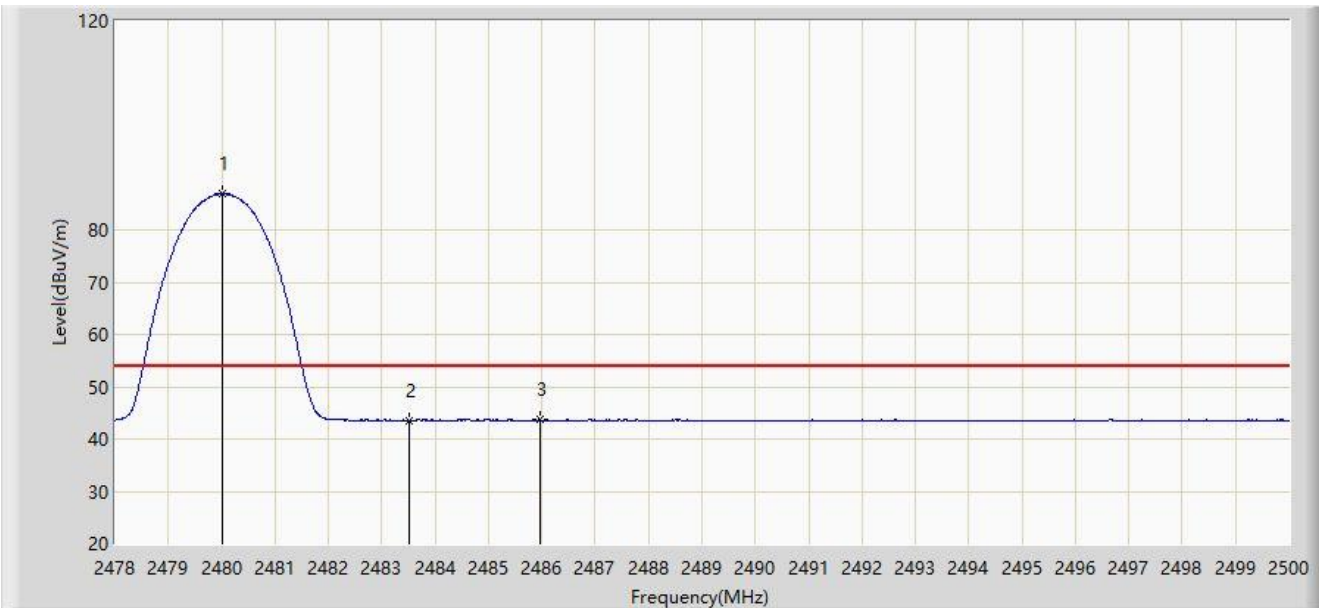


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	86.918	56.185	N/A	N/A	30.733	AV
2		2483.500	43.529	12.794	-10.471	54.000	30.734	AV
3	*	2485.964	43.792	13.056	-10.208	54.000	30.736	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz - Right Earbud	

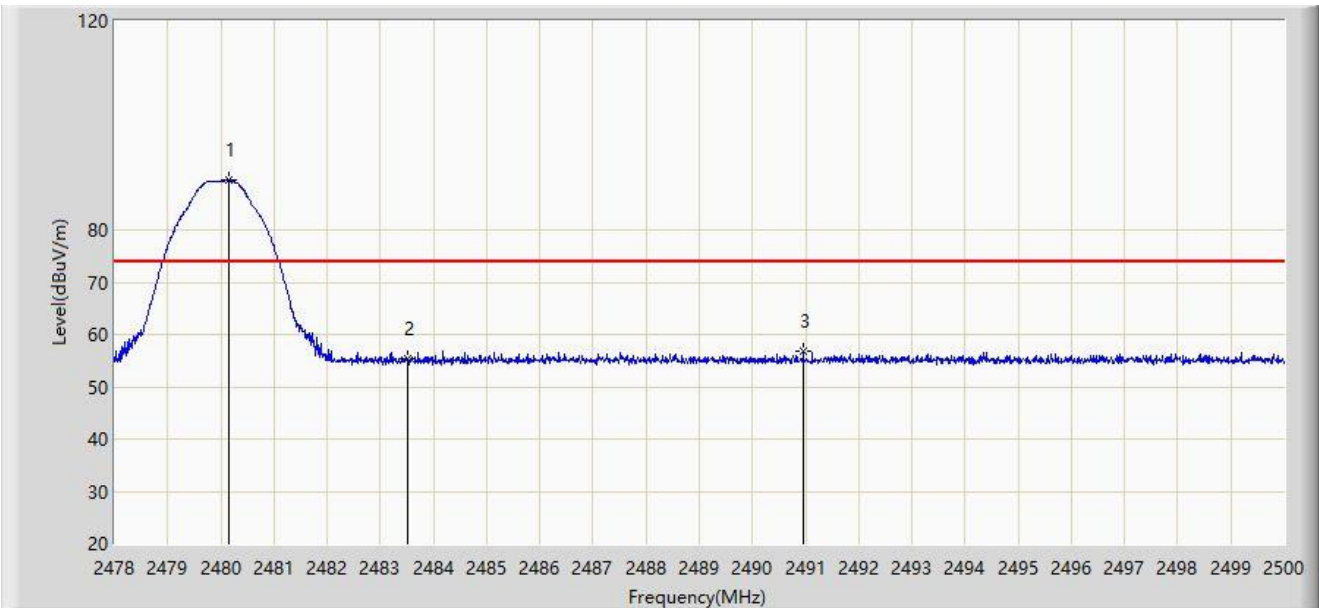


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.145	89.570	58.837	N/A	N/A	30.733	PK
2		2483.500	55.300	24.565	-18.700	74.000	30.734	PK
3	*	2490.958	56.933	26.194	-17.067	74.000	30.739	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 2DH5 at 2480MHz - Right Earbud	

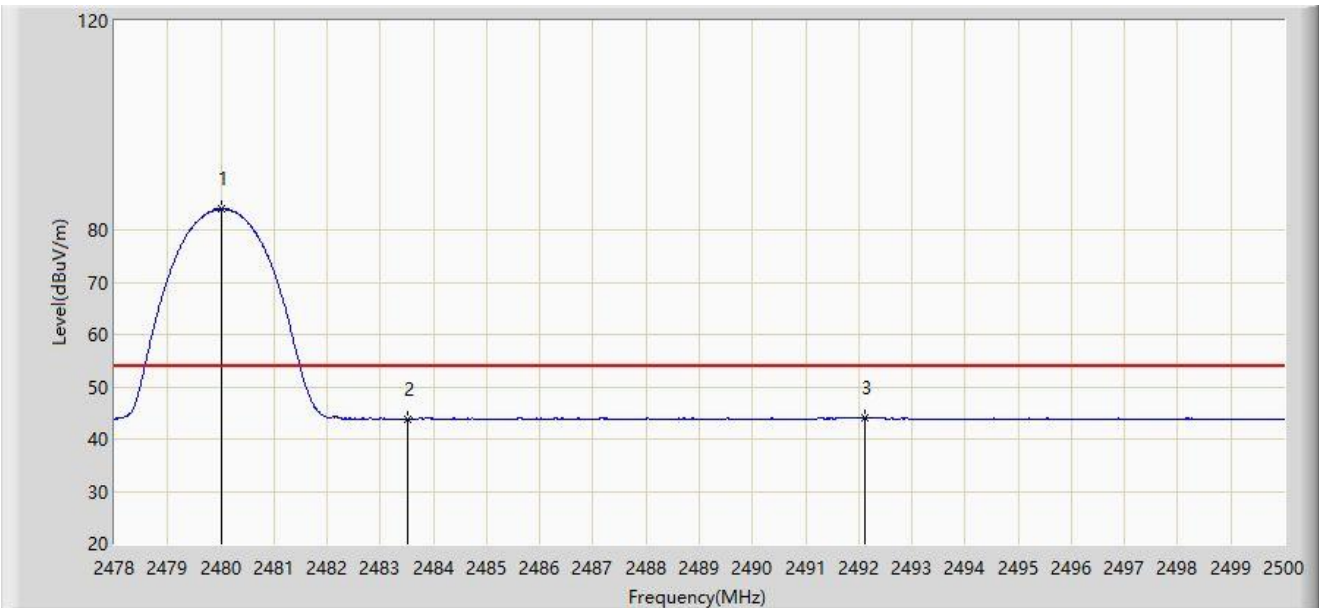


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	83.962	53.229	N/A	N/A	30.733	AV
2		2483.500	43.855	13.120	-10.145	54.000	30.734	AV
3	*	2492.113	44.180	13.440	-9.820	54.000	30.740	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz - Right Earbud	

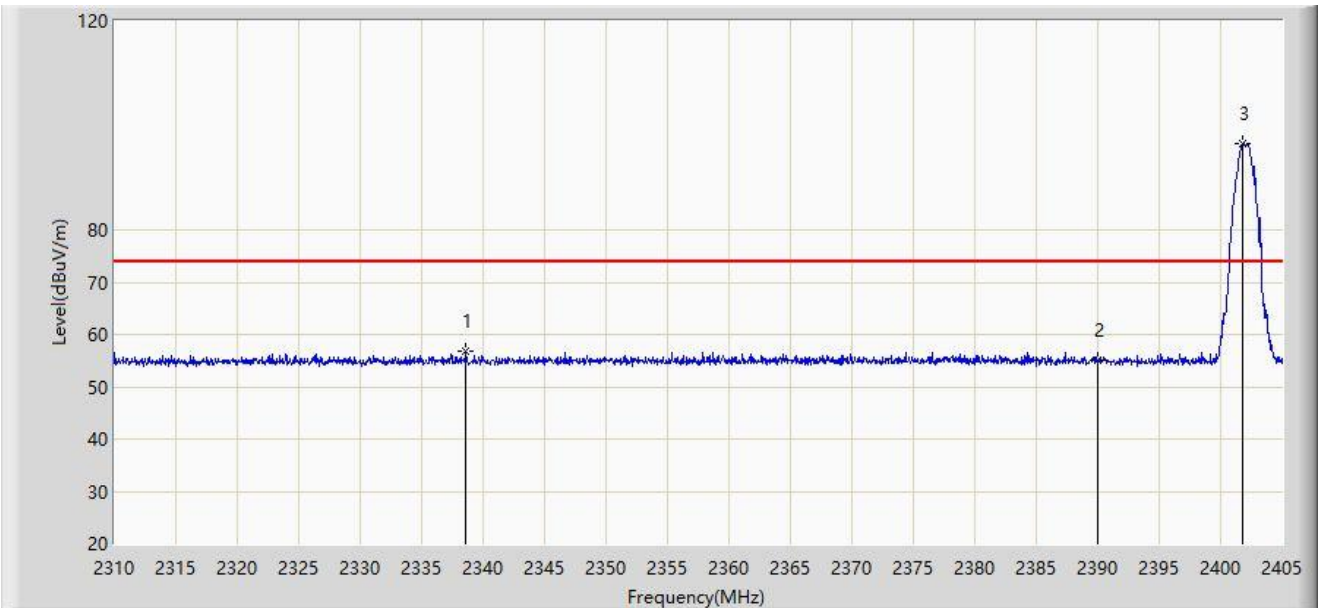


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2338.595	56.817	25.863	-17.183	74.000	30.954	PK
2		2390.000	55.114	24.291	-18.886	74.000	30.823	PK
3		2401.817	96.413	65.600	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz - Right Earbud	

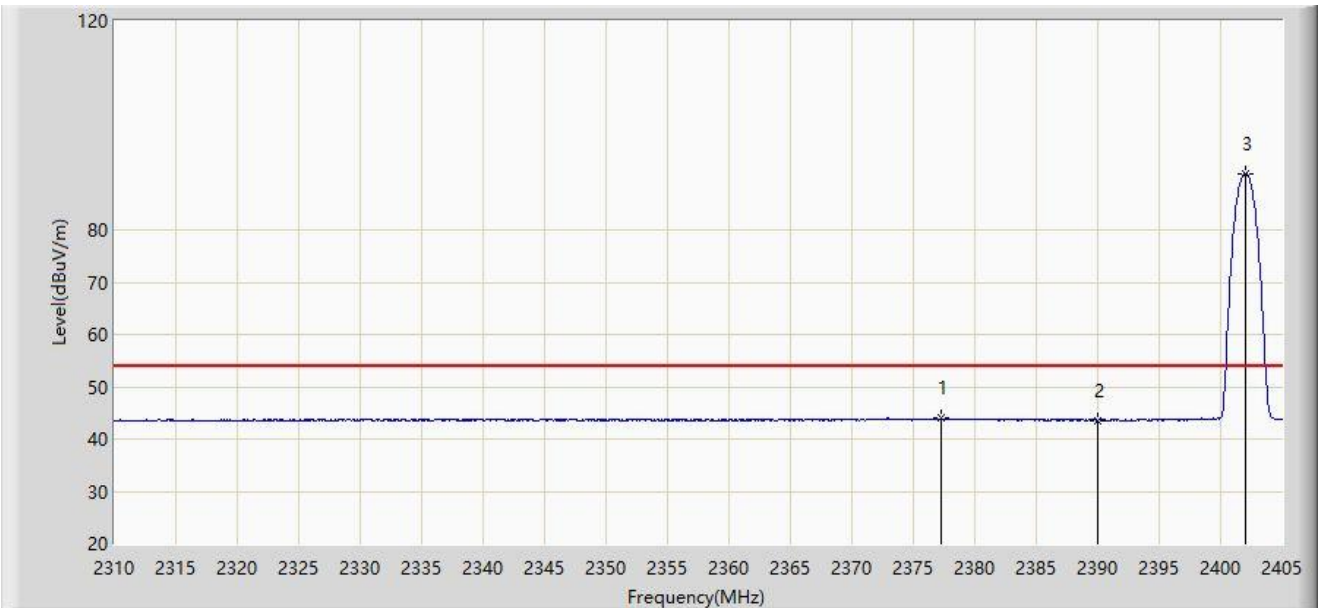


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2377.260	43.979	13.041	-10.021	54.000	30.937	AV
2		2390.000	43.602	12.779	-10.398	54.000	30.823	AV
3		2402.008	90.755	59.942	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz - Right Earbud	

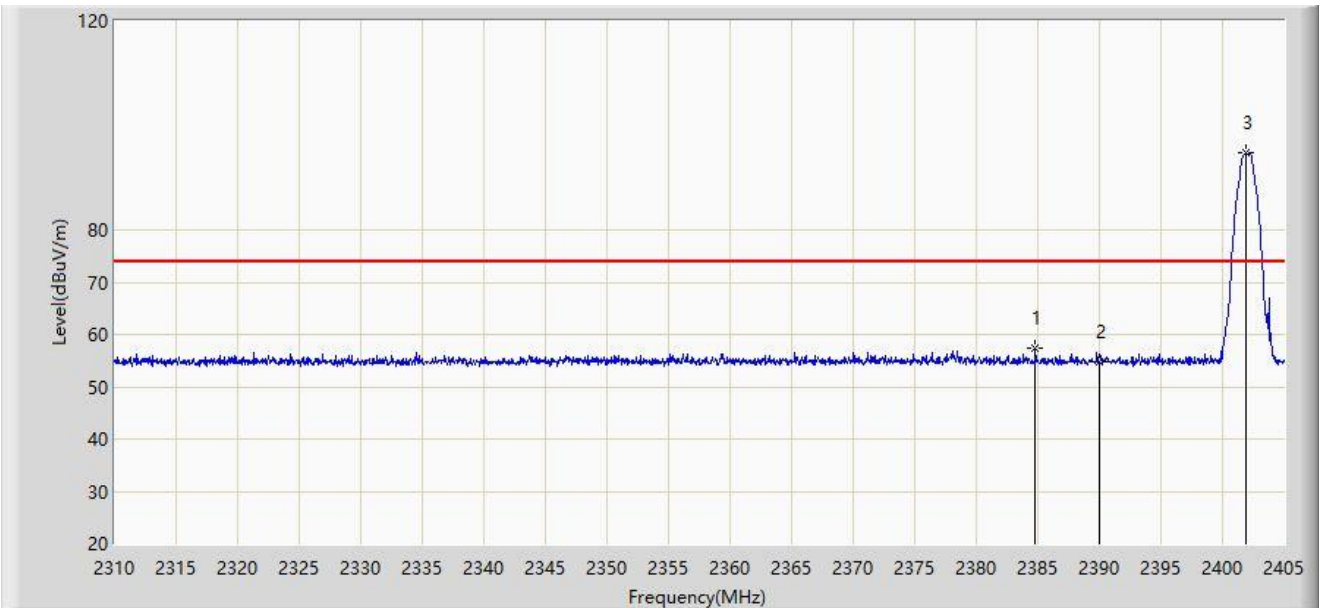


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2384.812	57.364	26.494	-16.636	74.000	30.870	PK
2		2390.000	54.770	23.947	-19.230	74.000	30.823	PK
3		2401.960	94.814	64.001	N/A	N/A	30.813	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2402MHz - Right Earbud	

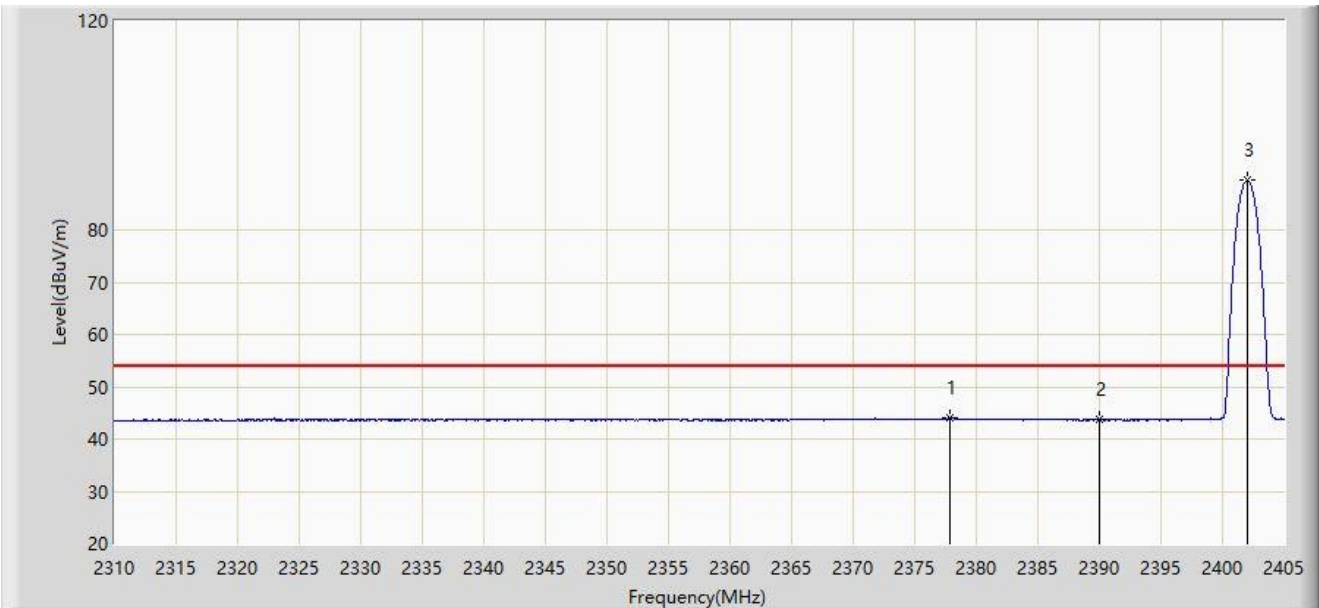


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2377.877	44.175	13.243	-9.825	54.000	30.932	AV
2		2390.000	43.747	12.924	-10.253	54.000	30.823	AV
3		2402.055	89.436	58.622	N/A	N/A	30.813	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz - Right Earbud	

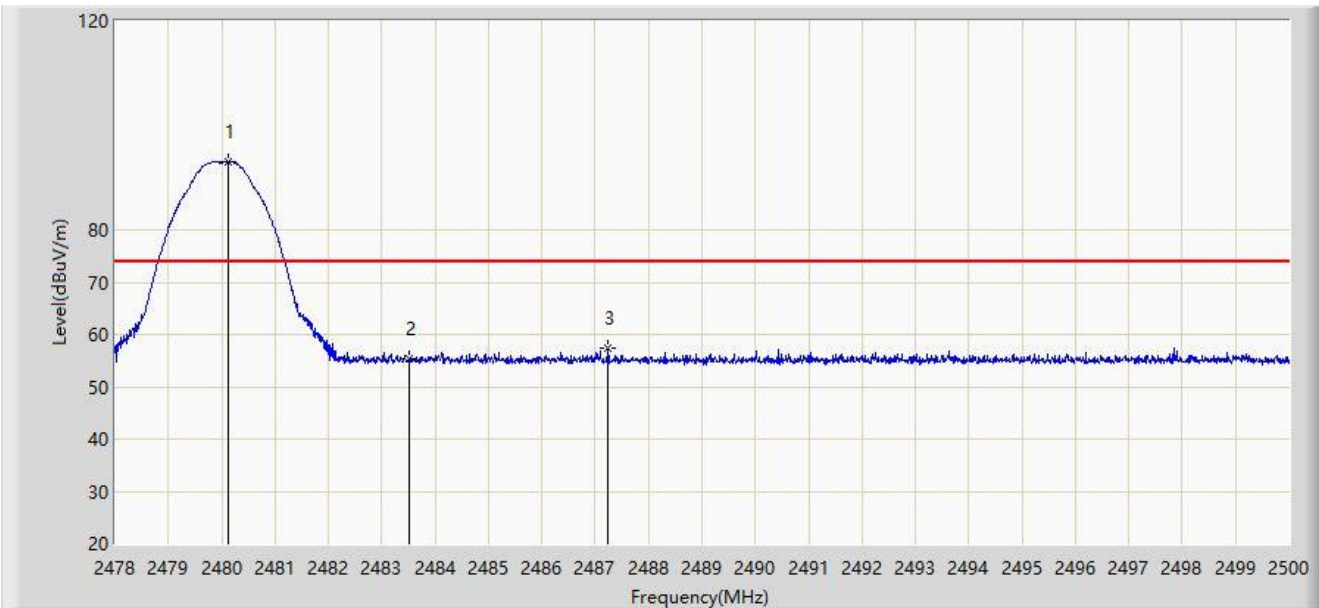


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.134	93.159	62.426	N/A	N/A	30.733	PK
2		2483.500	55.226	24.491	-18.774	74.000	30.734	PK
3	*	2487.240	57.365	26.628	-16.635	74.000	30.737	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz - Right Earbud	

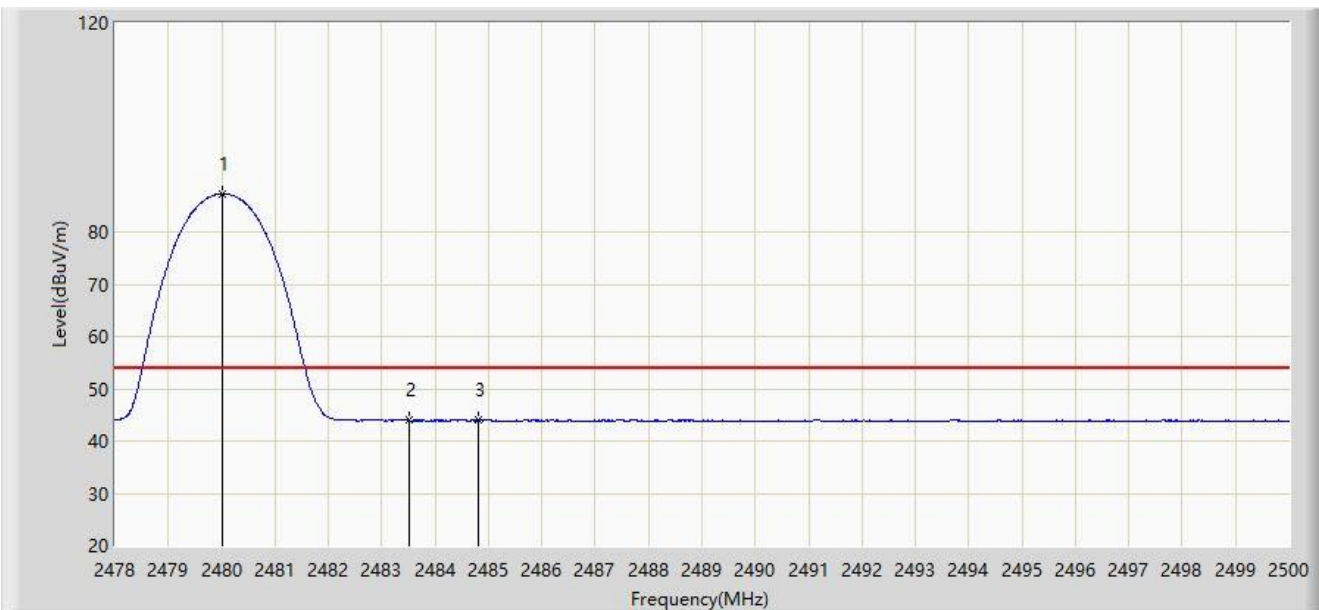


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.002	87.340	56.607	N/A	N/A	30.733	AV
2		2483.500	43.980	13.245	-10.020	54.000	30.734	AV
3	*	2484.798	44.116	13.381	-9.884	54.000	30.736	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz - Right Earbud	

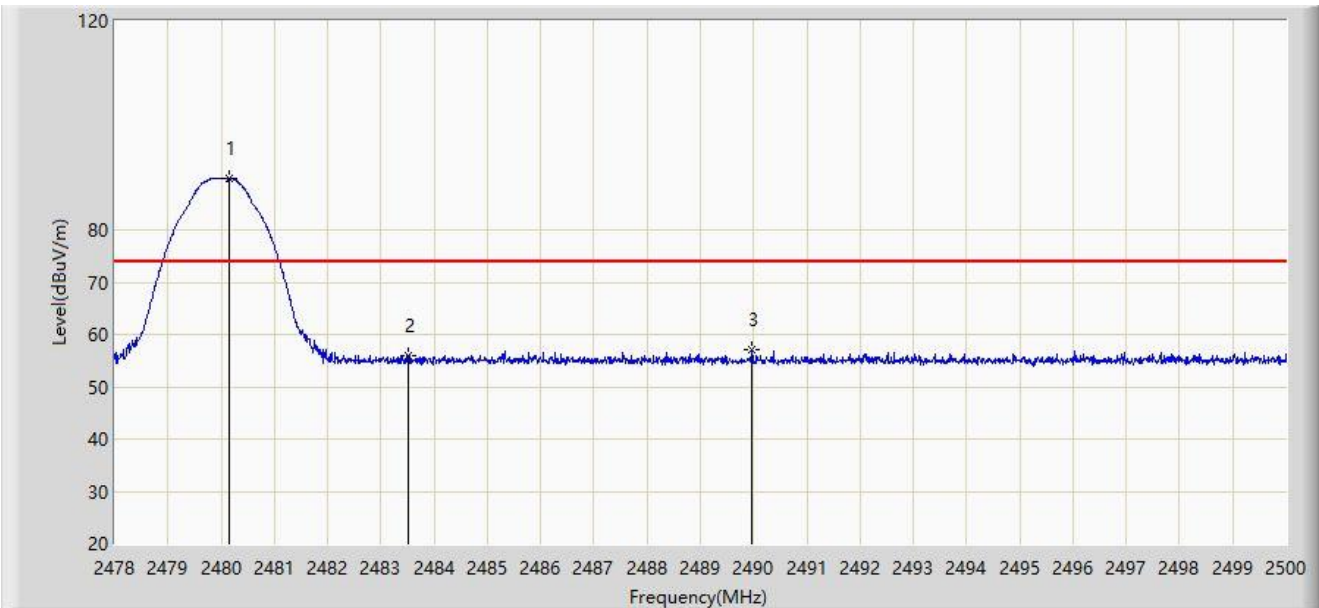


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.145	89.875	59.142	N/A	N/A	30.733	PK
2		2483.500	55.880	25.145	-18.120	74.000	30.734	PK
3	*	2489.968	57.054	26.316	-16.946	74.000	30.738	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2023-02-21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: True Wireless Noise Cancellation Earbuds Headphones	Power: By Battery
Test Mode: Transmit by 3DH5 at 2480MHz - Right Earbud	

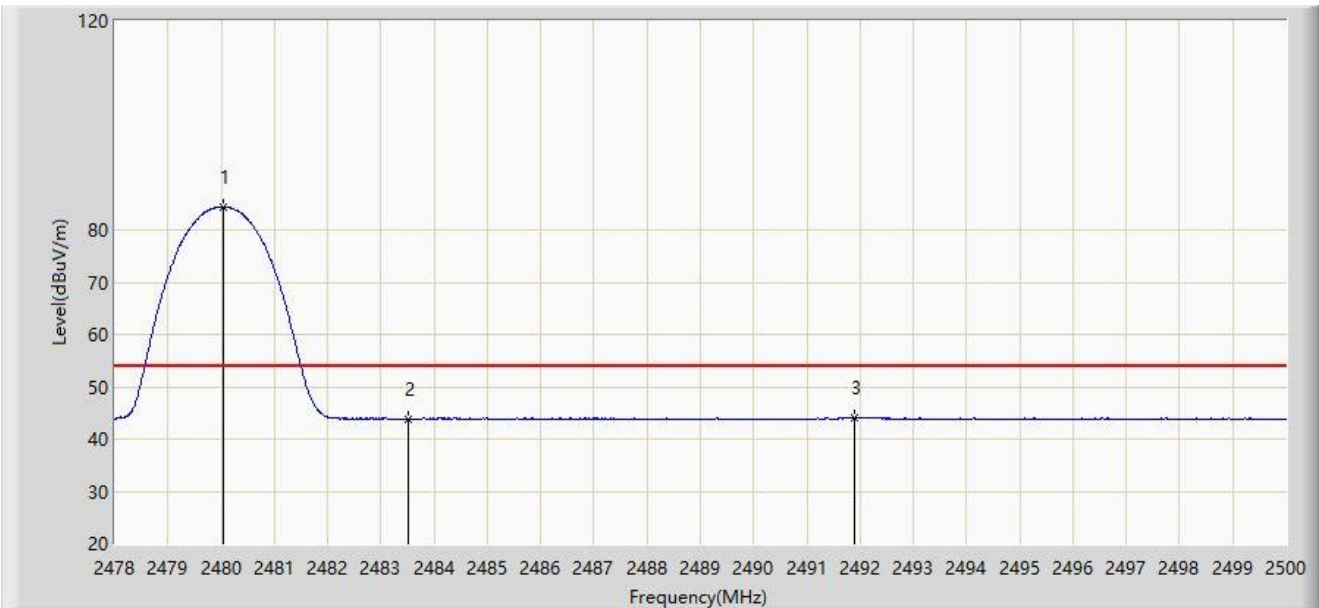

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.035	84.462	53.729	N/A	N/A	30.733	AV
2		2483.500	43.877	13.142	-10.123	54.000	30.734	AV
3	*	2491.904	44.176	13.436	-9.824	54.000	30.740	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.11 AC Conducted Emissions Test Result

The EUT was powered by battery and the EUT can not work when charging, so the item is not applicable.

Appendix B - Test Setup Photograph

Refer to “2302RSZ025-UT” file.

Appendix C - EUT Photograph

Refer to “ 2302RSZ025-UE” file.