


Spurious Radiated Emission Data


Name of EUT: WaveACCESS CU232 (ISM) (Config: OM08 antenna, File transfer 16QAM/QPSK)
 Serial Number: Date of Test: 25 February, 2000
 Temperature: 22°C Relative Humidity: 22%
 Product Class: B Test Facility: Open Area Test Site
 Test Specification: 47 CFR, Part 15.247 Measurement Distance: 3 meters
 File Number: 99092 (AP-ISM) Test Engineer: W. Anderson

Channel Freq		EUT Azimuth (Degrees)	Antenna Height(cm)	Antenna Polarity (H/V)	Meter Reading (average dBuV)	Meter Reading (peak dBuV)	Cable Loss (dB)	Antenna Factor (dB/m)	Average Field Intensity (dBuV/m)	Peak Field Intensity (dBuV/m)	Signal Type
2402.0		98	204	v	83	93	N/A	28.5	111.5	121.5	Intentional
Har #	Freq.(MHz)										
2	4804	310	144	v	8	19	N/A	33.1	41.1	52.1	Ambient
3	7206	0 -360	100-400	v/h	9	19	N/A	35.7	44.7	54.7	Ambient
4	9608	0 -360	100-400	v/h	11	21	N/A	37.2	48.2	58.2	Ambient
5	12010	0 -360	100-400	v/h	9	22	N/A	39.5	48.5	61.5	Ambient
6	14412	0 -360	100-400	v/h	7	20	N/A	38.7	45.7	58.7	Ambient
7	16814	0 -360	100-400	v/h	8	18	N/A	39.6	47.6	57.6	Ambient
8	19216	0 -360	100-400	v/h	2	14	4	40.3	46.3	54.3	Ambient
9	21618	0 -360	100-400	v/h	2	14	4.1	40.5	46.6	54.5	Ambient
10	24020	0 -360	100-400	v/h	2	14	4.4	40.5	46.9	54.5	Ambient
2440.0		90	200	v	84	94	N/A	28.5	112.5	122.5	Intentional
2	4880.0	0 -360	100-400	v/h	8	20	N/A	33.4	41.4	53.4	Ambient
3	7320	0 -360	100-400	v/h	9	20	N/A	35.8	44.8	55.8	Ambient
4	9760.0	0 -360	100-400	v/h	13	22	N/A	37.5	50.5	59.5	Ambient
5	12200	0 -360	100-400	v/h	11	20	N/A	39.5	50.5	59.5	Ambient
6	14640.0	0 -360	100-400	v/h	7	18	N/A	39.3	46.3	57.3	Ambient
7	17080.0	0 -360	100-400	v/h	8	18	N/A	40.5	48.5	58.5	Ambient
8	19520	0 -360	100-400	v/h	2	14	4	40.3	46.3	54.3	Ambient
9	21960.0	0 -360	100-400	v/h	2	14	4.1	40.5	46.6	54.5	Ambient
10	24400.0	0 -360	100-400	v/h	2	14	4.4	40.5	46.9	54.5	Ambient
2478.0		90	198	v	84	94	N/A	28.6	112.6	122.6	Intentional
2	4956	0 -360	100-400	v/h	7	18	N/A	33.8	40.8	51.8	Ambient
3	7434	0 -360	100-400	v/h	7	18	N/A	35.9	42.9	53.9	Ambient
4	9912.000	0 -360	100-400	v/h	13	22	N/A	37.7	50.7	59.7	Ambient
5	12390	0 -360	100-400	v/h	10	21	N/A	39.5	49.5	60.5	Ambient
6	14868.000	0 -360	100-400	h/v	5	17	N/A	39.9	44.9	56.9	Ambient
7	17346.000	0 -360	100-400	h/v	6	17	N/A	42.3	48.3	59.3	Ambient
8	19824	0 -360	100-400	h/v	2	14	4	40.3	46.3	54.3	Ambient
9	22302.000	0 -360	100-400	h/v	2	14	4.2	40.5	46.7	54.5	Ambient
10	24780.000	0 -360	100-400	h/v	2	14	4.4	40.5	46.9	54.5	Ambient

Notes: Highlighted rows indicate emission in the restricted bands.

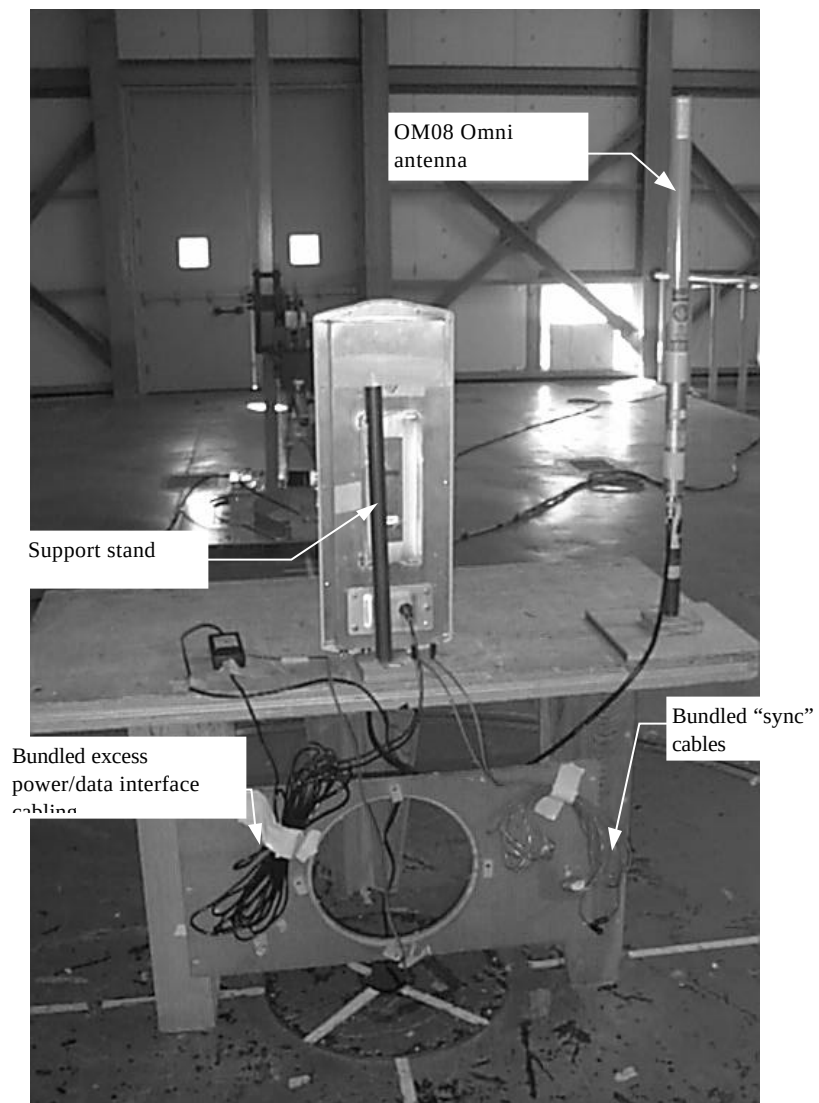

Rear view of EUT as see looking toward test measurement antenna.
Turntable azimuth at 180.

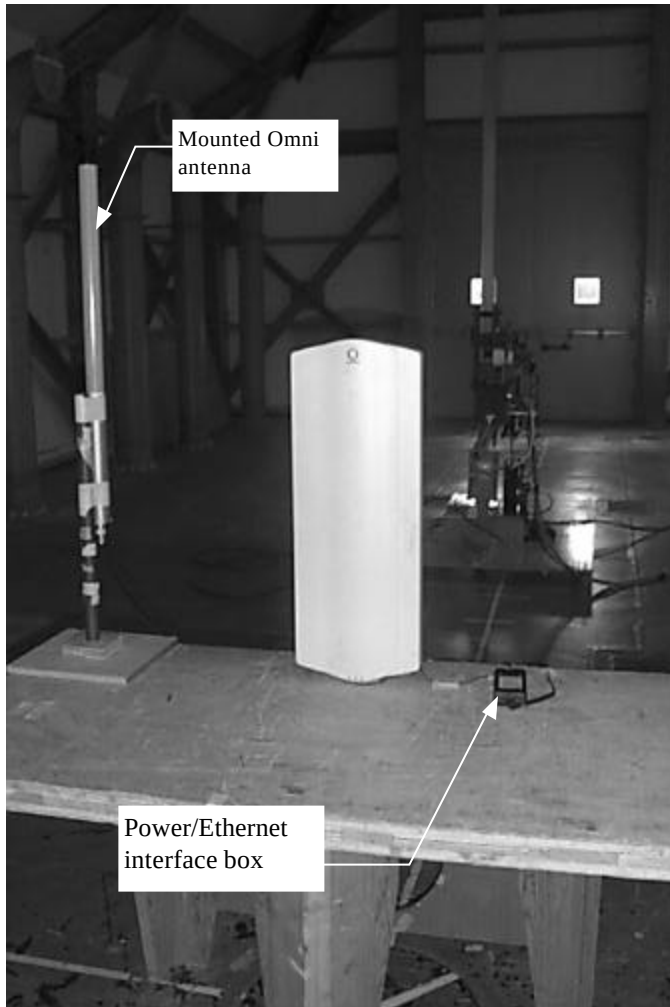

Front view of EUT as seen looking toward measurement antenna.
Turntable azimuth at 0 degrees.