


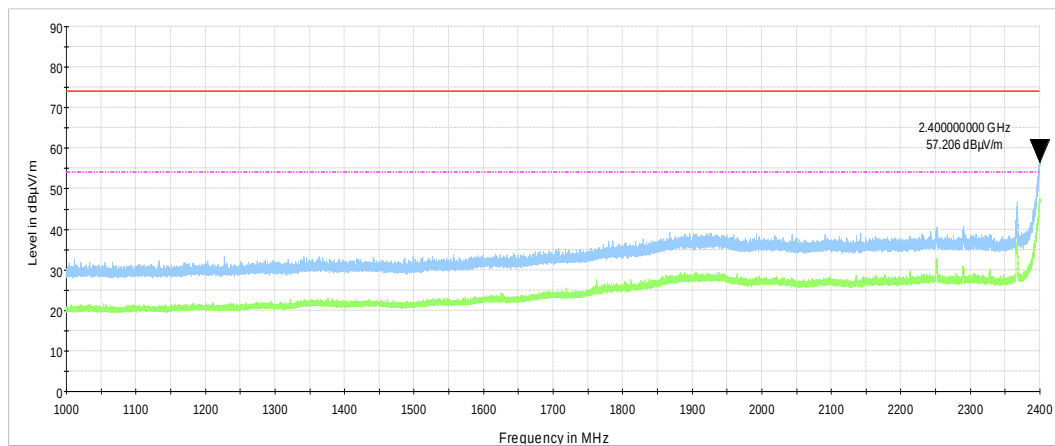


Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.21 Radiated emission measurements from 1000 to 2400 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #1

**Plot 7.2.22 Radiated emission measurements from 1000 to 2400 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #2

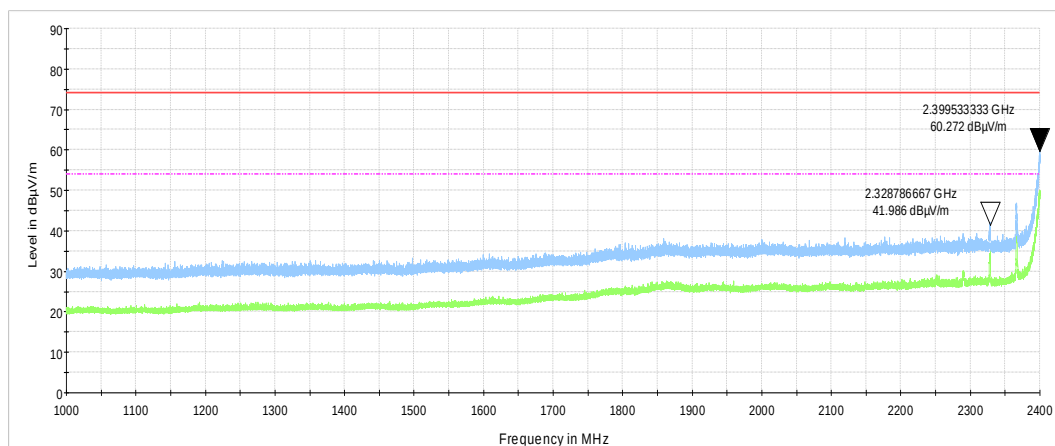



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.23 Radiated emission measurements from 1000 to 2400 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2445.0 MHz
EUT TX ANTENNA: #1

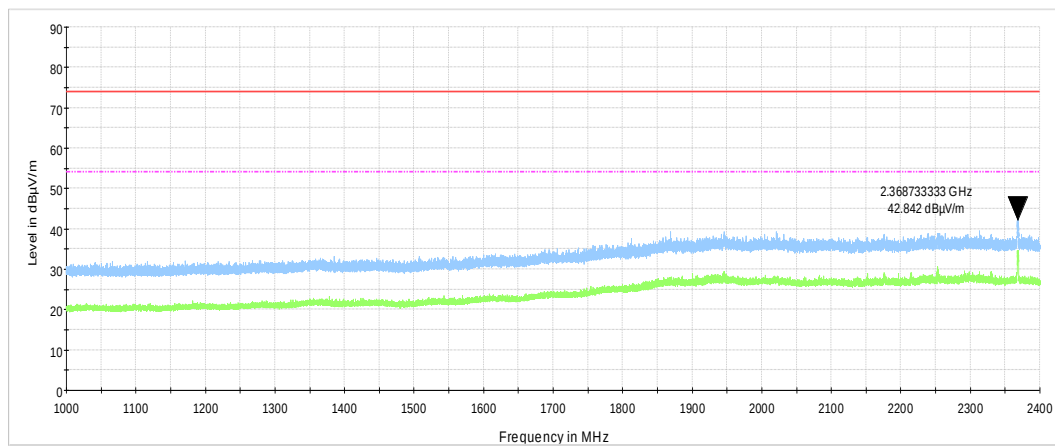

Plot 7.2.24 Radiated emission measurements from 1000 to 2400 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2445.0 MHz
EUT TX ANTENNA: #2

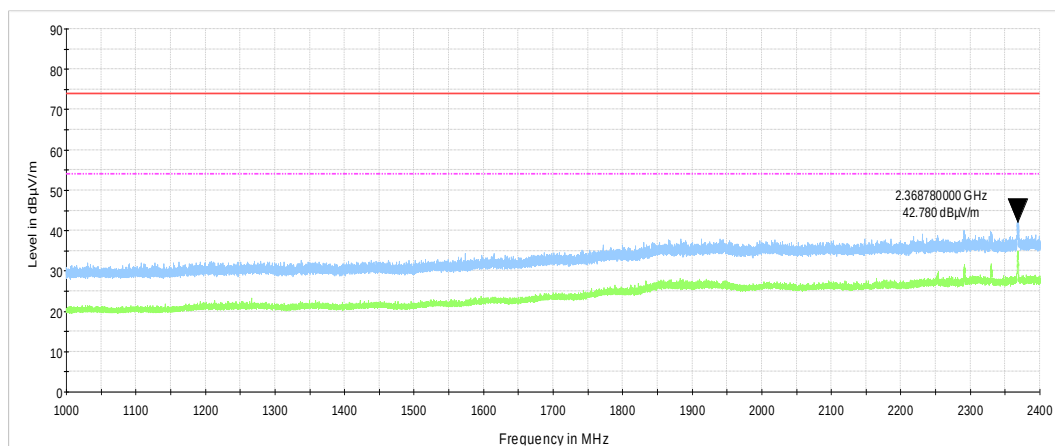





Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.25 Radiated emission measurements from 1000 to 2400 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2475.0 MHz
EUT TX ANTENNA: #1

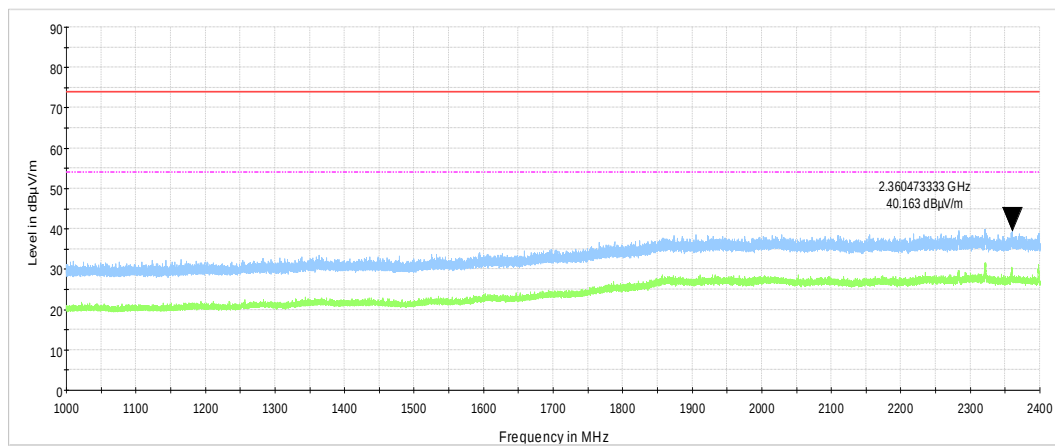**Plot 7.2.26 Radiated emission measurements from 1000 to 2400 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2475.0 MHz
EUT TX ANTENNA: #2

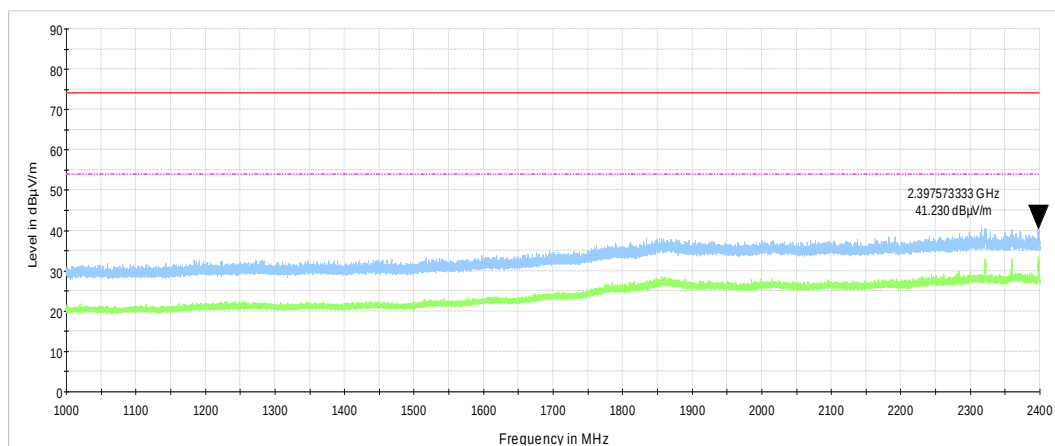





Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.27 Radiated emission measurements from 1000 to 2400 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2480.0 MHz
EUT TX ANTENNA: #1

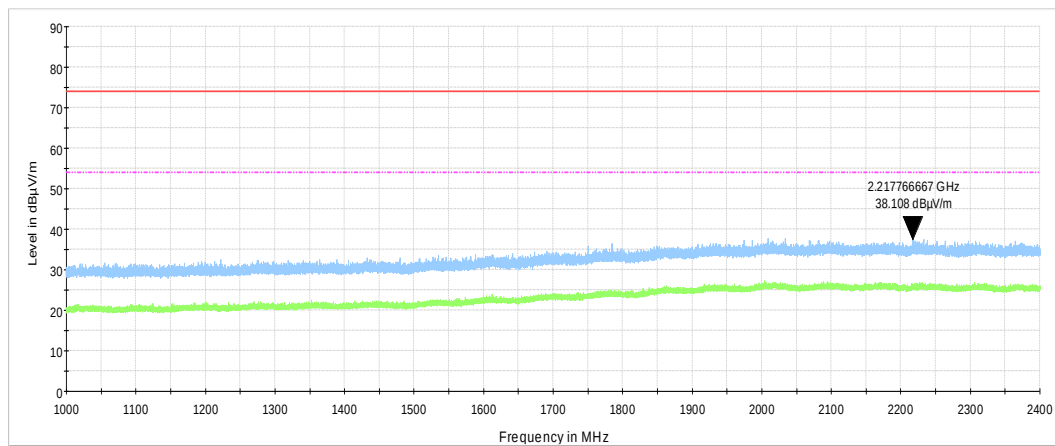**Plot 7.2.28 Radiated emission measurements from 1000 to 2400 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2480.0 MHz
EUT TX ANTENNA: #2

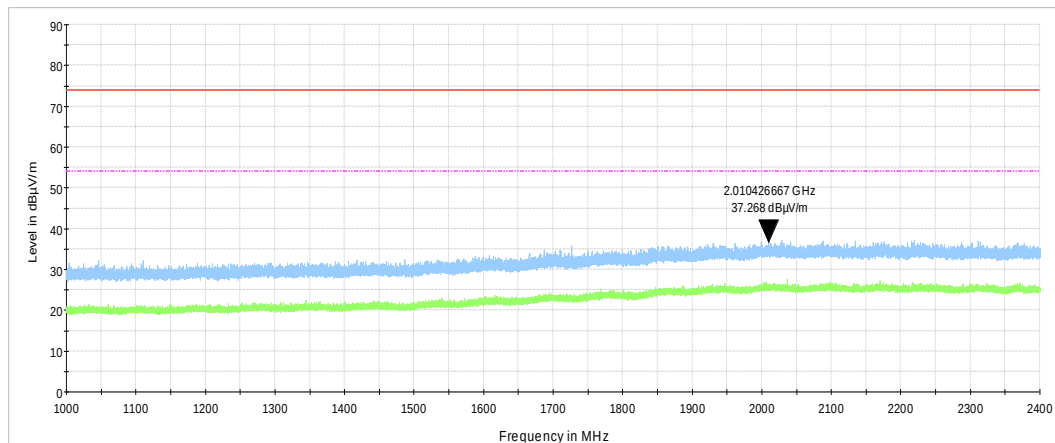



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification:		Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	
Test procedure:		ANSI C63.10 section 11.12.1	
Test mode:		Verdict: PASS	
Date(s):			
16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.29 Radiated emission measurements from 2400 to 2483.5 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #1

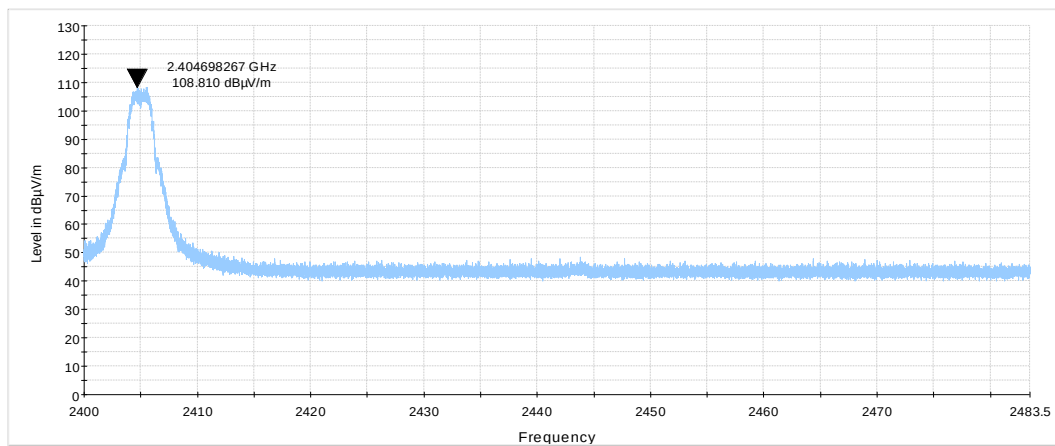

Plot 7.2.30 Radiated emission measurements from 2400 to 2483.5 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #2

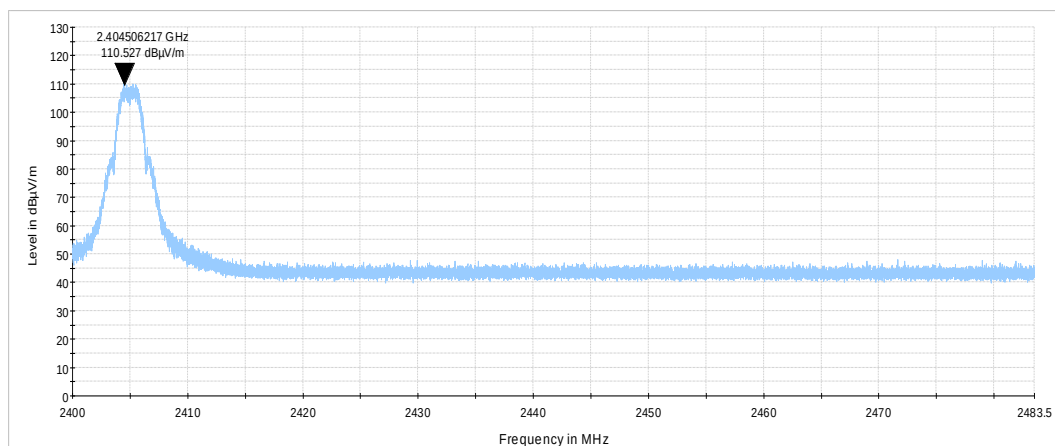



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.31 Radiated emission measurements from 2400 to 2483.5 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2445.0 MHz
EUT TX ANTENNA: #1

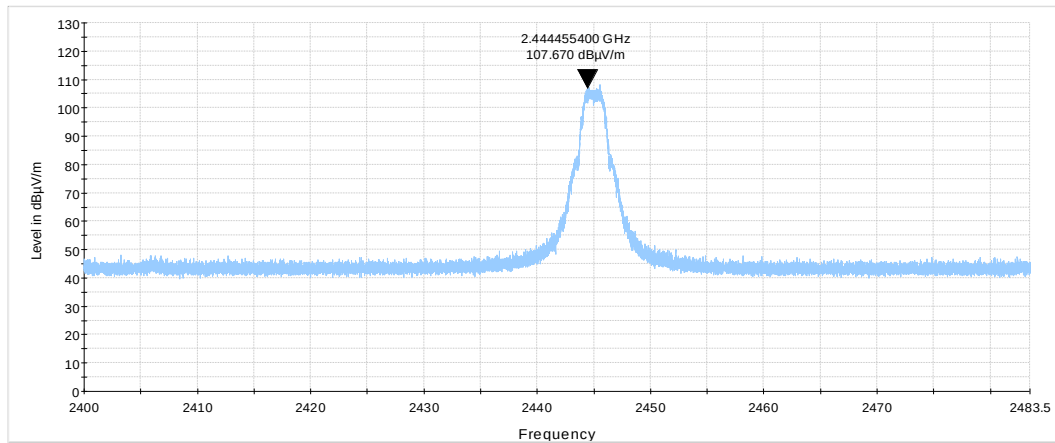

Plot 7.2.32 Radiated emission measurements from 2400 to 2483.5 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2445.0 MHz
EUT TX ANTENNA: #2

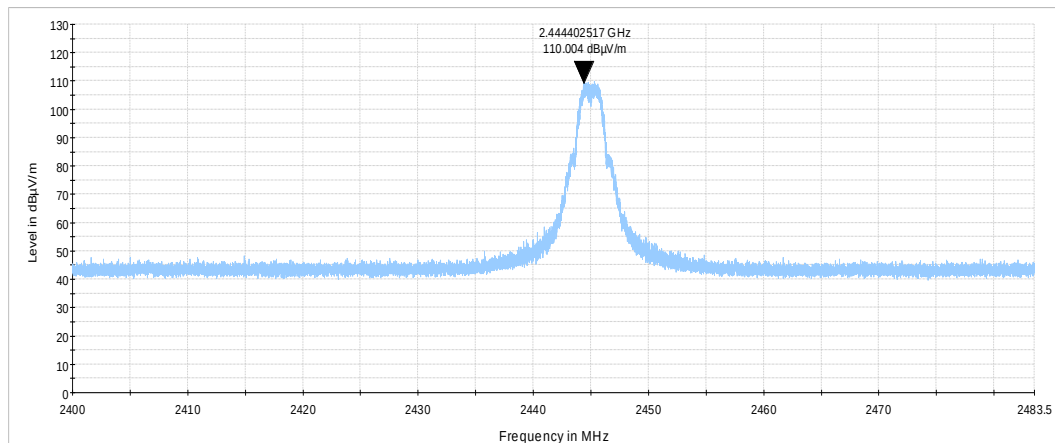



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.33 Radiated emission measurements from 2400 to 2483.5 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2475.0 MHz
EUT TX ANTENNA: #1

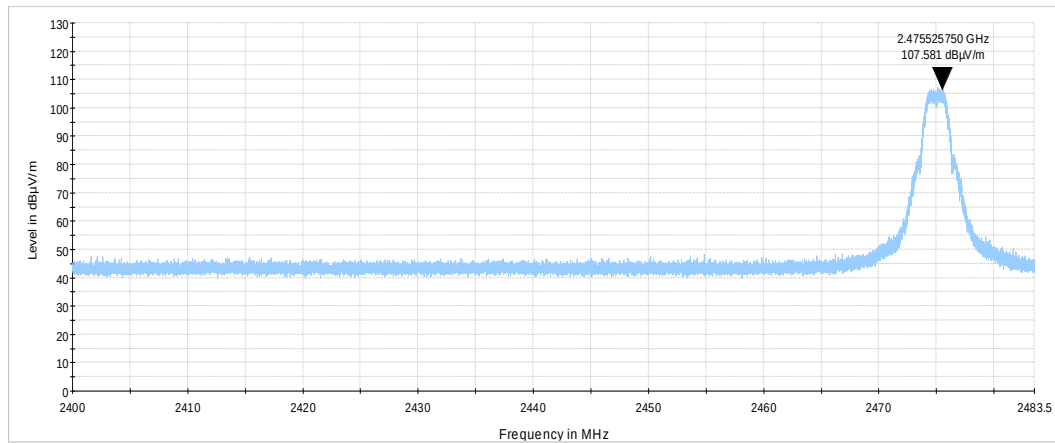

Plot 7.2.34 Radiated emission measurements from 2400 to 2483.5 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2475.0 MHz
EUT TX ANTENNA: #2

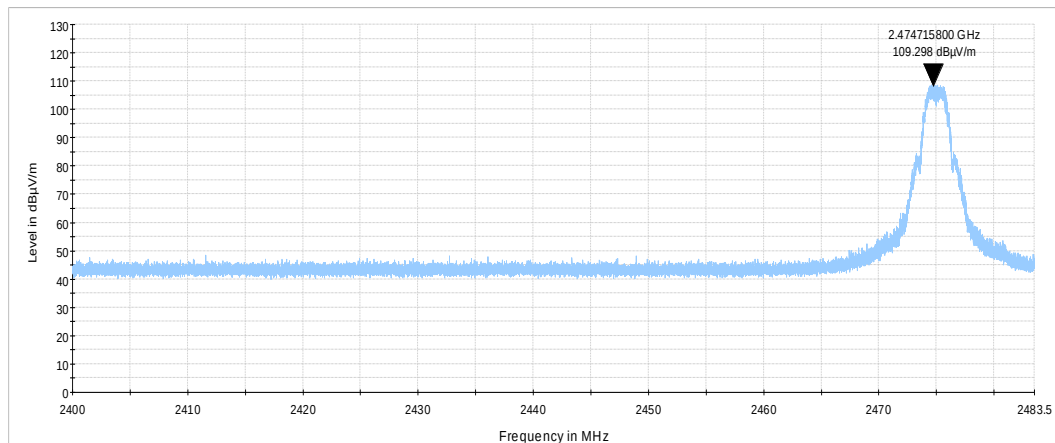





Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.35 Radiated emission measurements from 2400 to 2483.5 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2480.0 MHz
EUT TX ANTENNA: #1

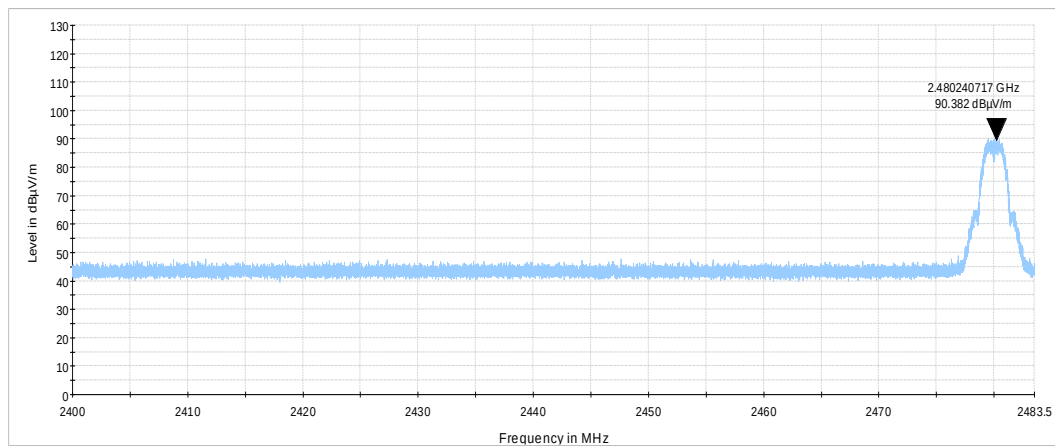**Plot 7.2.36 Radiated emission measurements from 2400 to 2483.5 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2480.0 MHz
EUT TX ANTENNA: #2

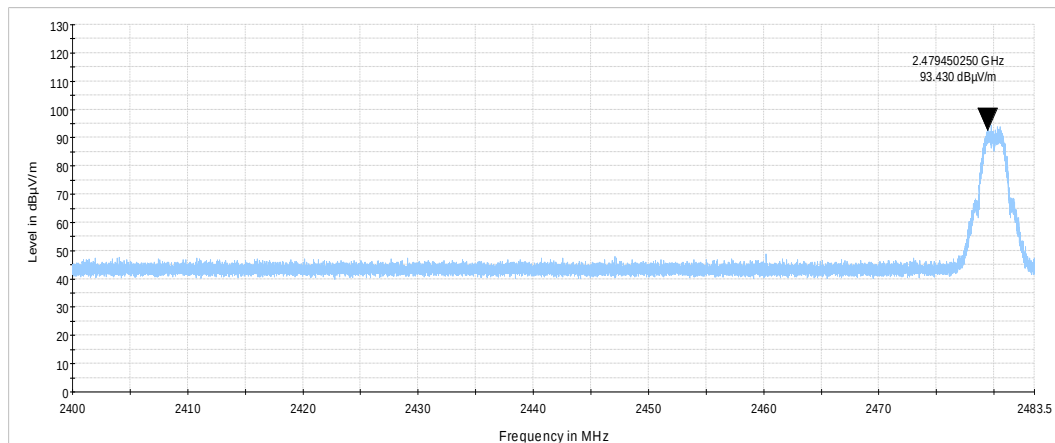



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.37 Radiated emission measurements from 2483.5 to 3000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #1

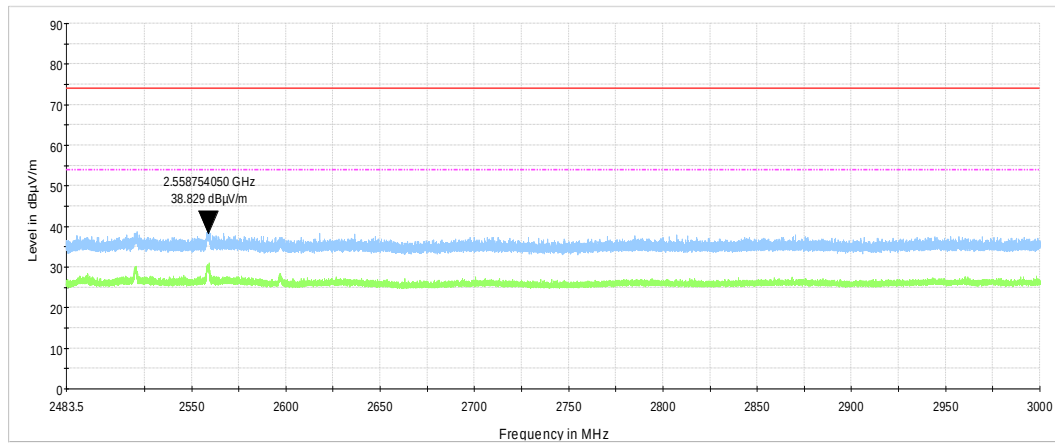

Plot 7.2.38 Radiated emission measurements from 2483.5 to 3000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #2

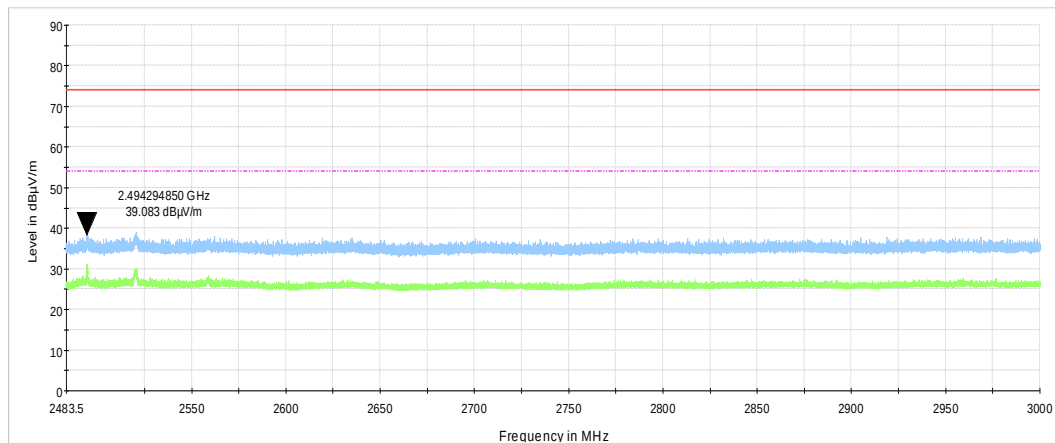



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.39 Radiated emission measurements from 3000 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #1

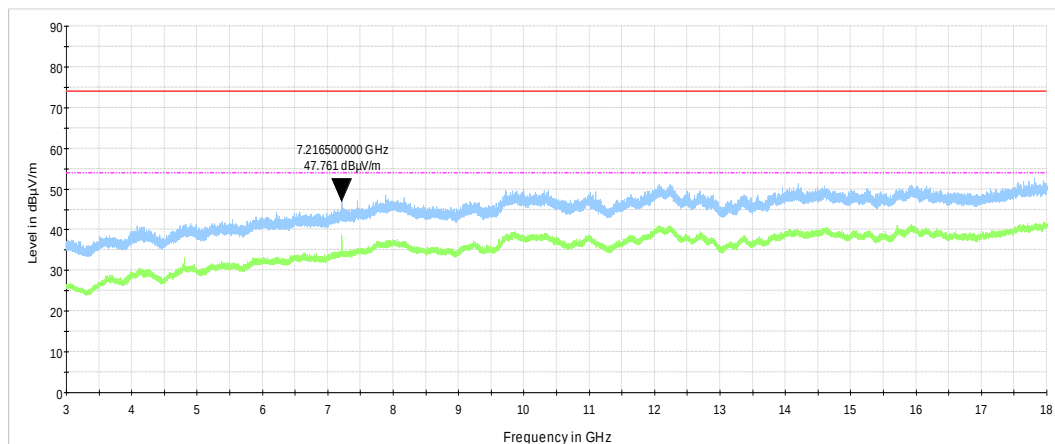

Plot 7.2.40 Radiated emission measurements from 3000 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #2

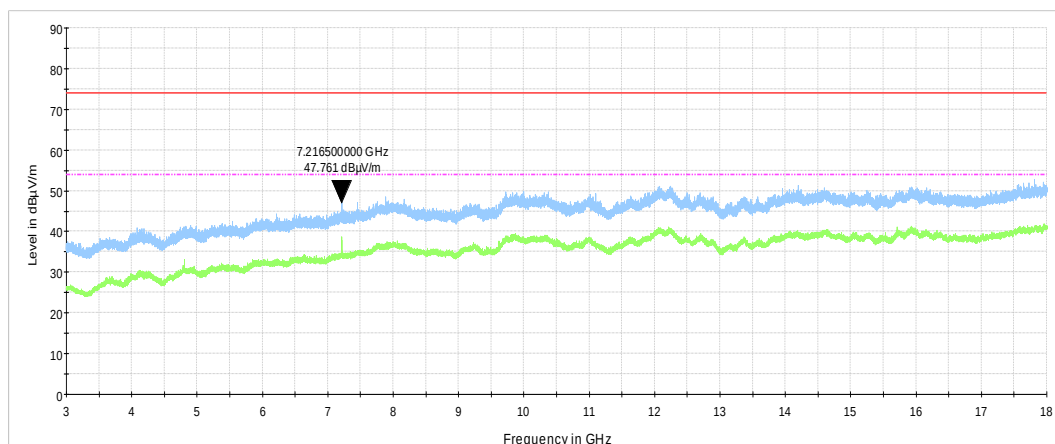





Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.41 Radiated emission measurements from 2483 to 18000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2445.0 MHz
EUT TX ANTENNA: #1

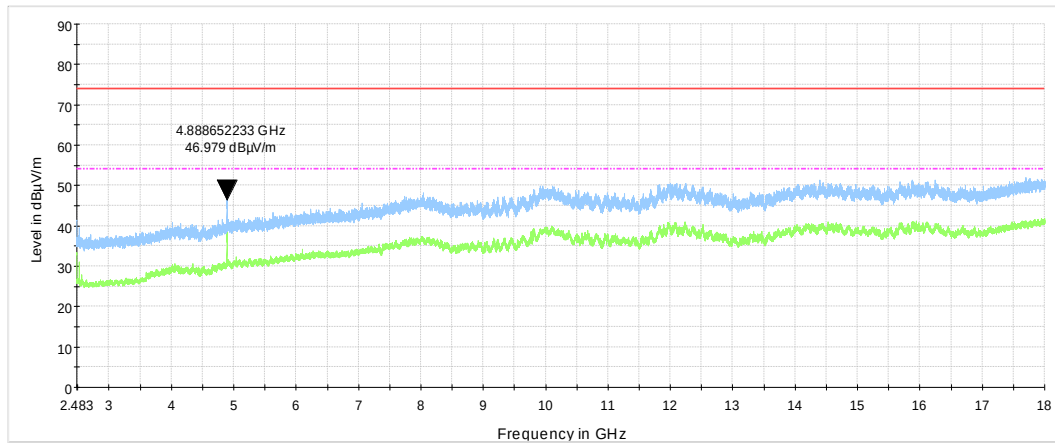**Plot 7.2.42 Radiated emission measurements from 2483 to 18000 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2445.0 MHz
EUT TX ANTENNA: #2

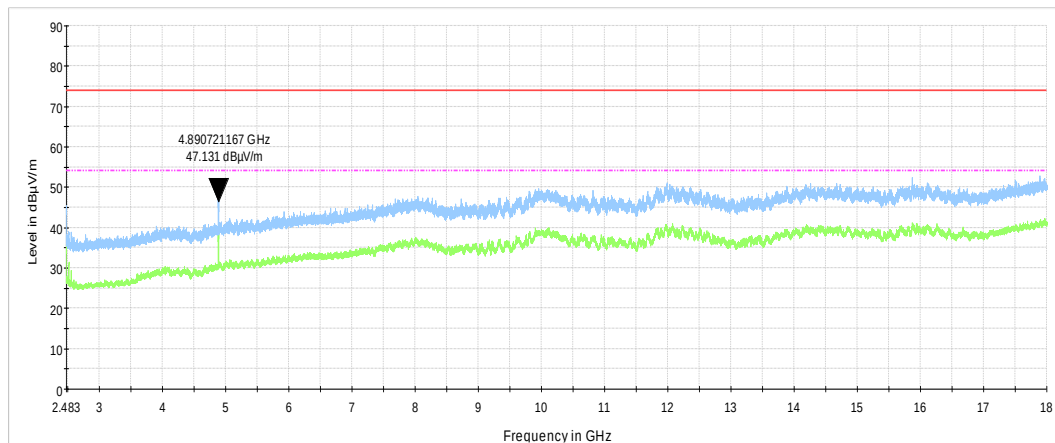



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.43 Radiated emission measurements from 2483 to 18000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2475.0 MHz
EUT TX ANTENNA: #1

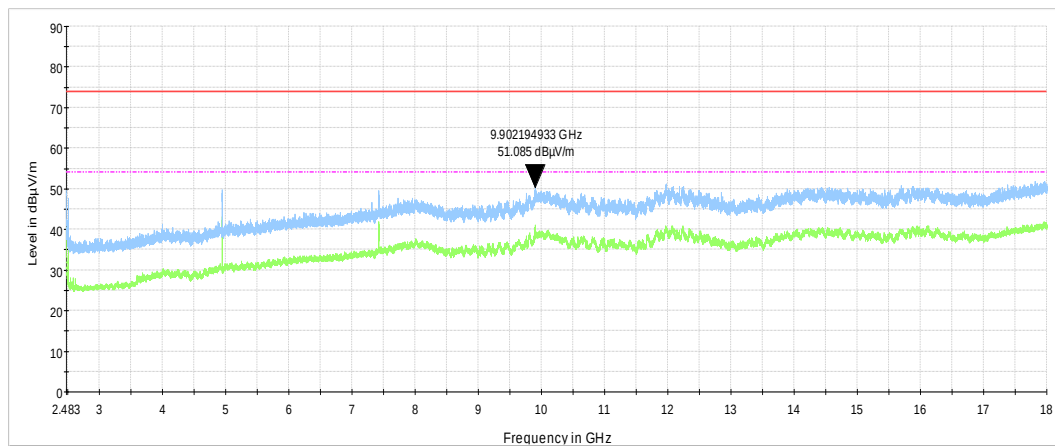

Plot 7.2.44 Radiated emission measurements from 2483 to 18000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2475.0 MHz
EUT TX ANTENNA: #2

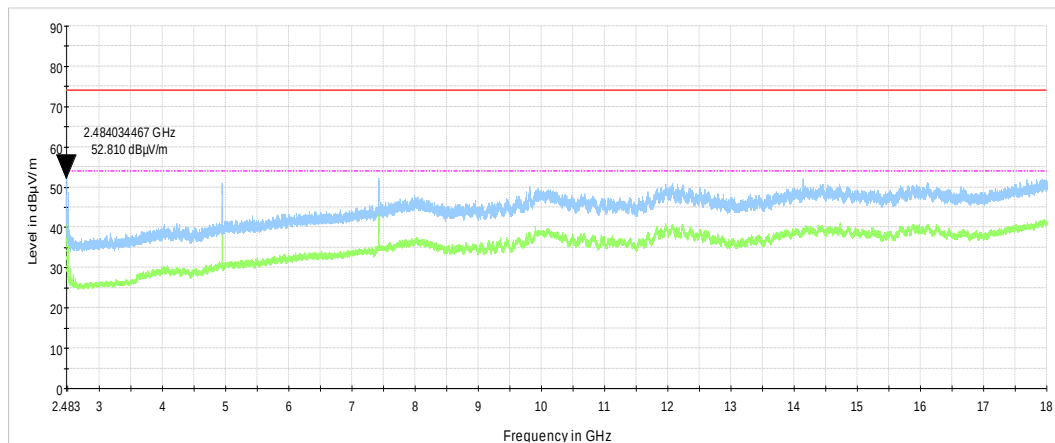



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.45 Radiated emission measurements from 2483 to 18000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2480.0 MHz
EUT TX ANTENNA: #1

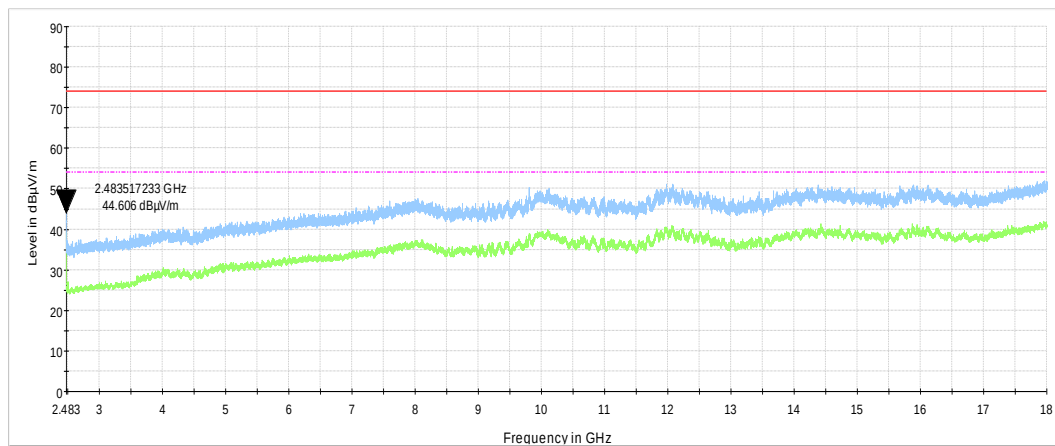

Plot 7.2.46 Radiated emission measurements from 2483 to 18000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2480.0 MHz
EUT TX ANTENNA: #2

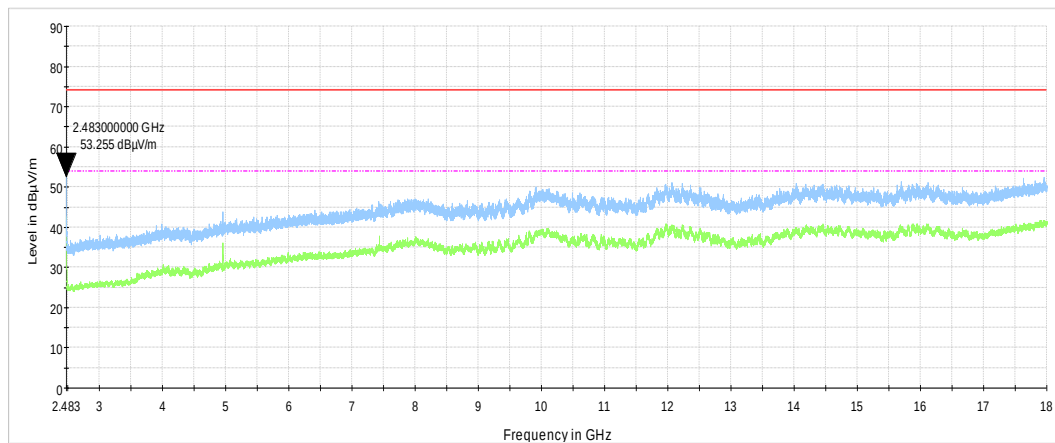



HERMON LABORATORIES


Report ID: VISRAD_FCC.35662

Date of Issue: 17-Jun-20

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			


Plot 7.2.47 Radiated emission measurements from 18 to 25 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #1

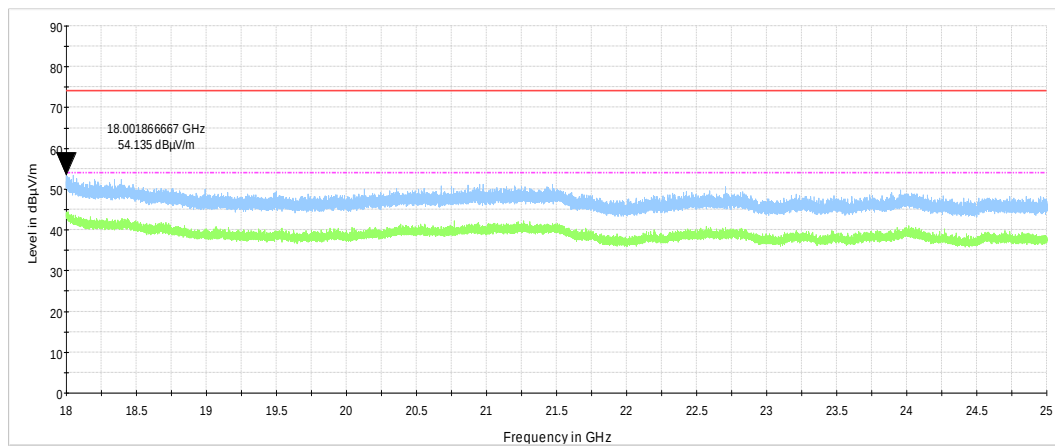

Plot 7.2.48 Radiated emission measurements from 18 to 25 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2405.0 MHz
EUT TX ANTENNA: #2

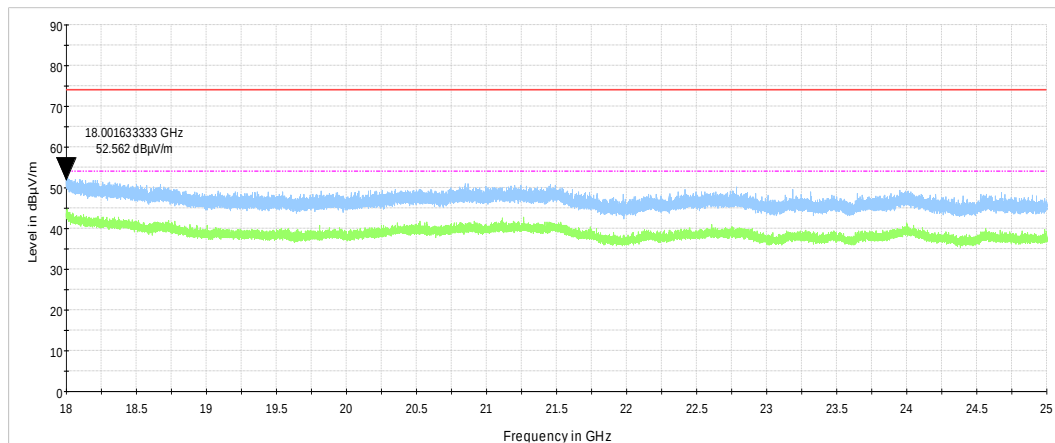




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 16-Dec-19			
Temperature: 22 °C	Relative Humidity: 47 %	Air Pressure: 1020 hPa	Power: 3 VDC
Remarks:			

Plot 7.2.49 Radiated emission measurements from 18 to 25 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2445.0 MHz
EUT TX ANTENNA: #1

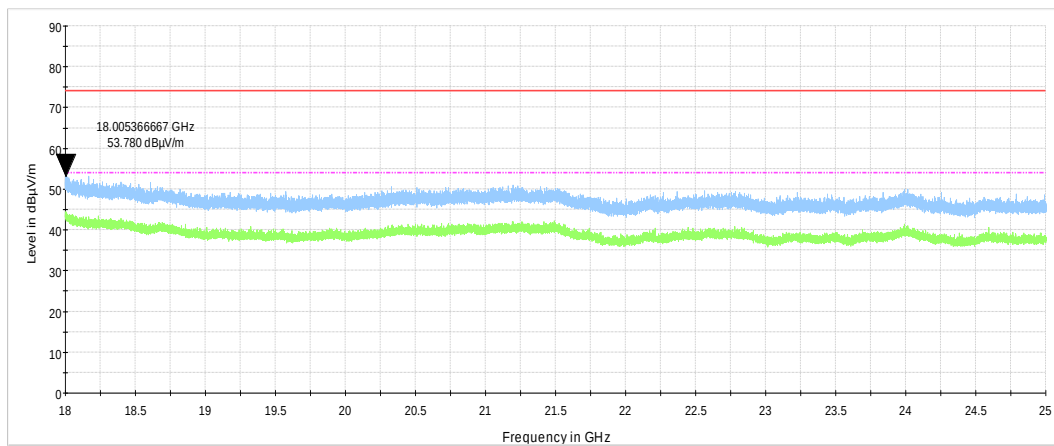**Plot 7.2.50 Radiated emission measurements from 18 to 25 GHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
CARRIER FREQUENCY: 2445.0 MHz
EUT TX ANTENNA: #2

