

Appendix B

Detailed Test Results

1. GSM
GSM850 for Head & Body
GSM1900 for Head & Body
2. WCDMA
WCDMA Band V for Head & Body
3. LTE
LTE Band 12 for Head & Body
LTE Band 41 for Head & Body
4. WIFI
WIFI 2.4G for Head & Body
WIFI 5G for Head & Body
5. BT
BT for Head & Body
6. NFC
NFC for Body

Test Laboratory: SGS-SAR Lab

K4 GSM850 GPRS 3TS Right Cheek

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.604$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.93, 9.93, 9.93); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.358 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.732 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.367 W/kg

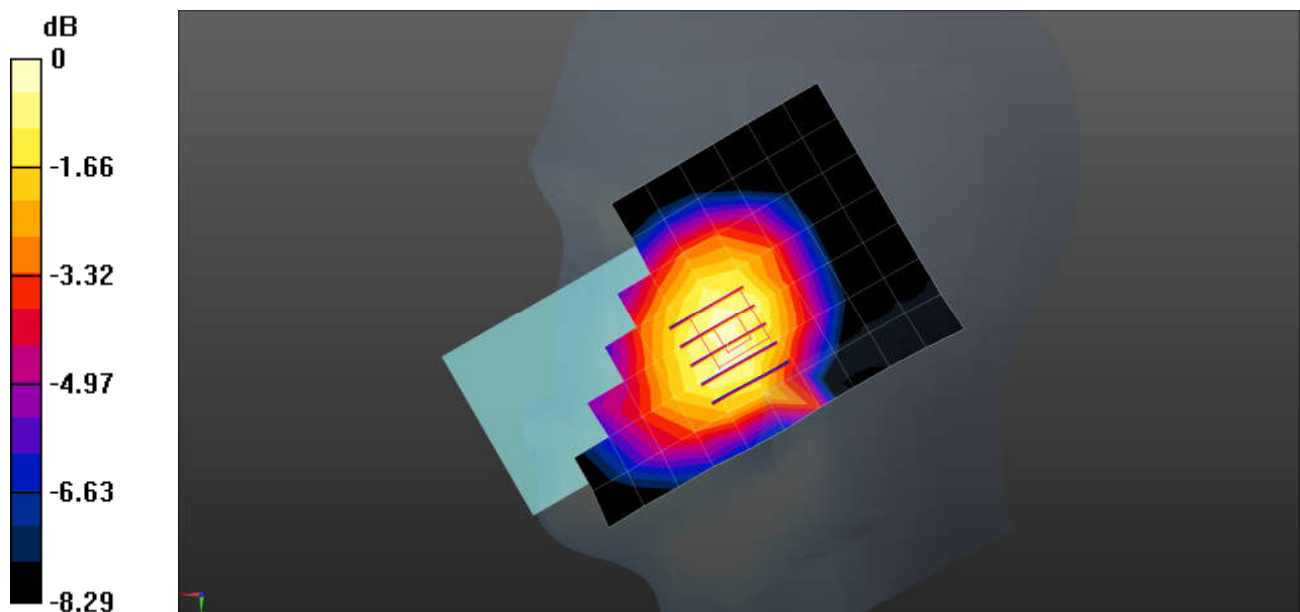

0 dB = 0.367 W/kg = -4.35 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 GSM850 GPRS 3TS 190CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.604$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.93, 9.93, 9.93); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.765 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.65 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.927 W/kg

SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.762 W/kg

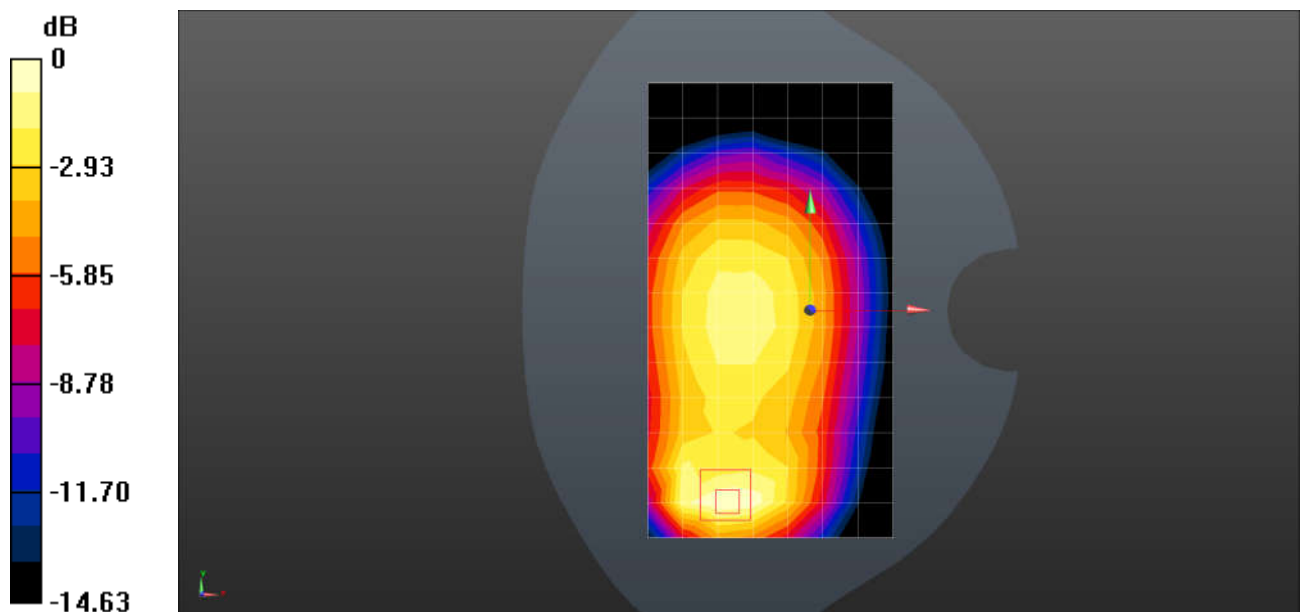

0 dB = 0.762 W/kg = -1.18 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 GSM1900 GPRS 4TS 661CH Left cheek

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.414$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.93, 9.93, 9.93); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.230 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.910 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.228 W/kg

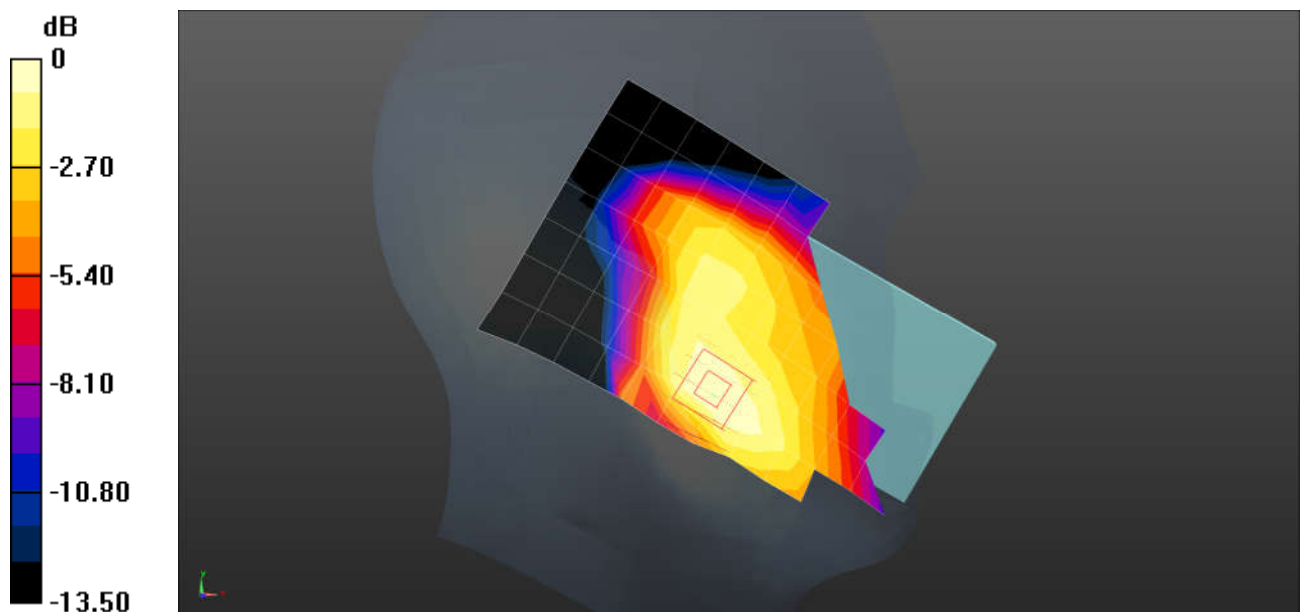

0 dB = 0.228 W/kg = -6.42 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 GSM1900 GPRS 4TS 661CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 39.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.31, 8.31, 8.31); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.529 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.723 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.620 W/kg

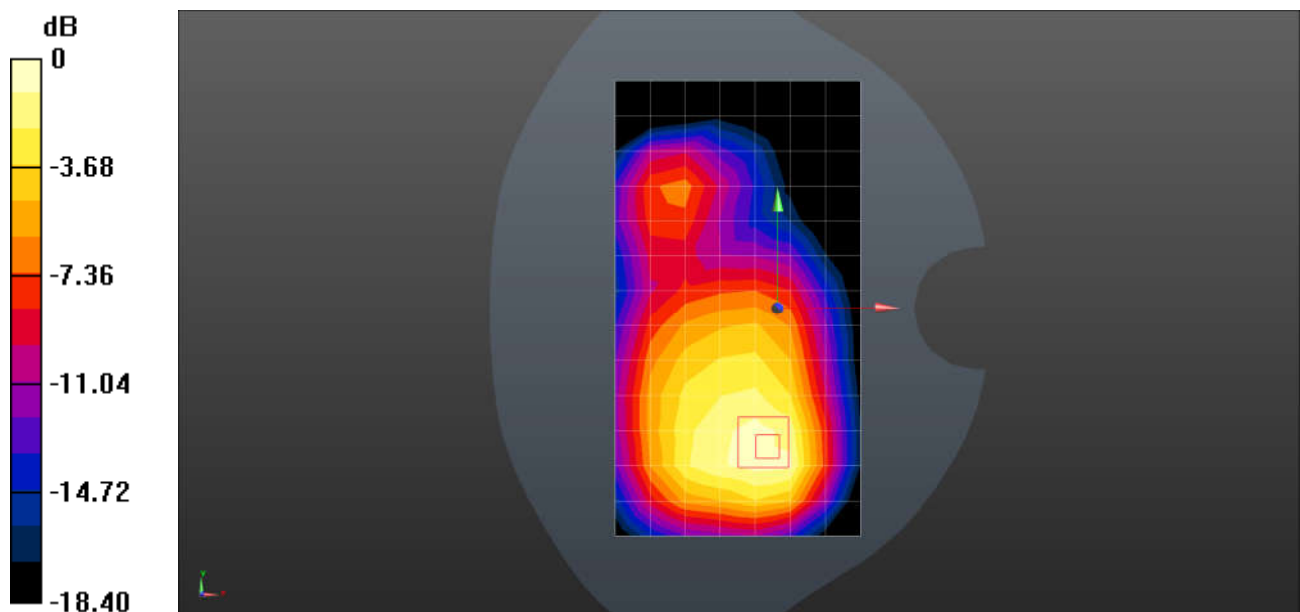

0 dB = 0.620 W/kg = -2.08 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WCDMA V RMC 4182CH Right cheek

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.609$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.93, 9.93, 9.93); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.547 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

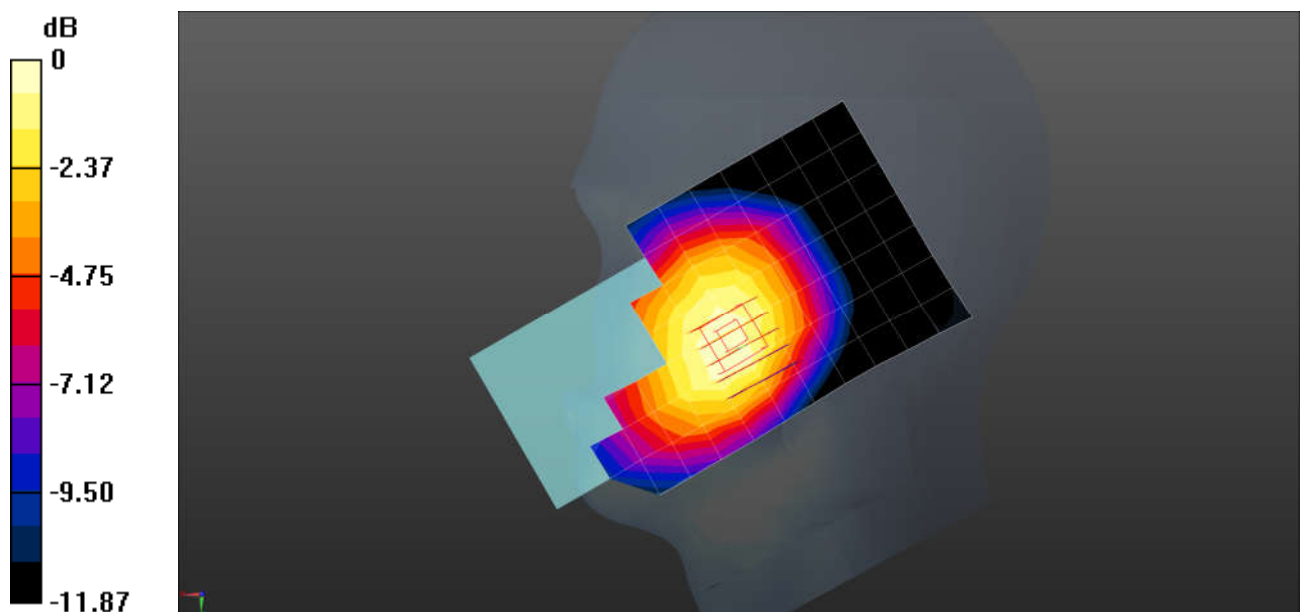

0 dB = 0.550 W/kg = -2.60 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WCDMA V RMC 4182CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 41.609$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.93, 9.93, 9.93); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.624 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.69 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.391 W/kg

Maximum value of SAR (measured) = 0.620 W/kg

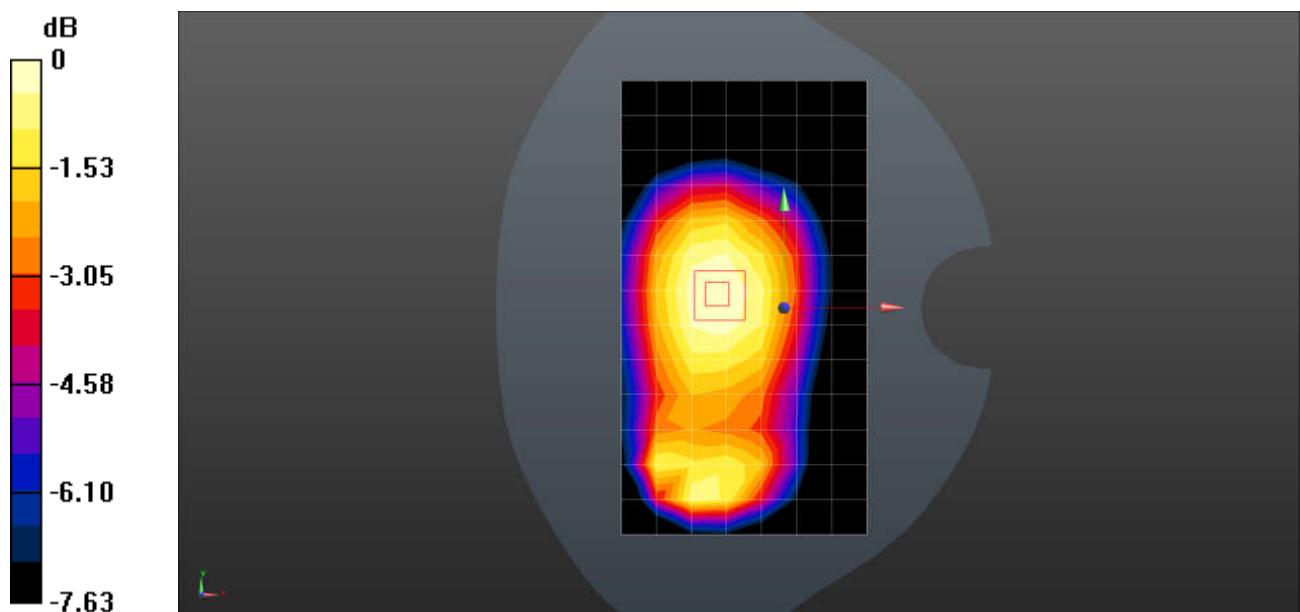

0 dB = 0.620 W/kg = -2.08 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 LTE Band 12 10M QPSK 1RB0 23095CH Right cheek

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.856$ S/m; $\epsilon_r = 42.912$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(10.33, 10.33, 10.33); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.249 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.013 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

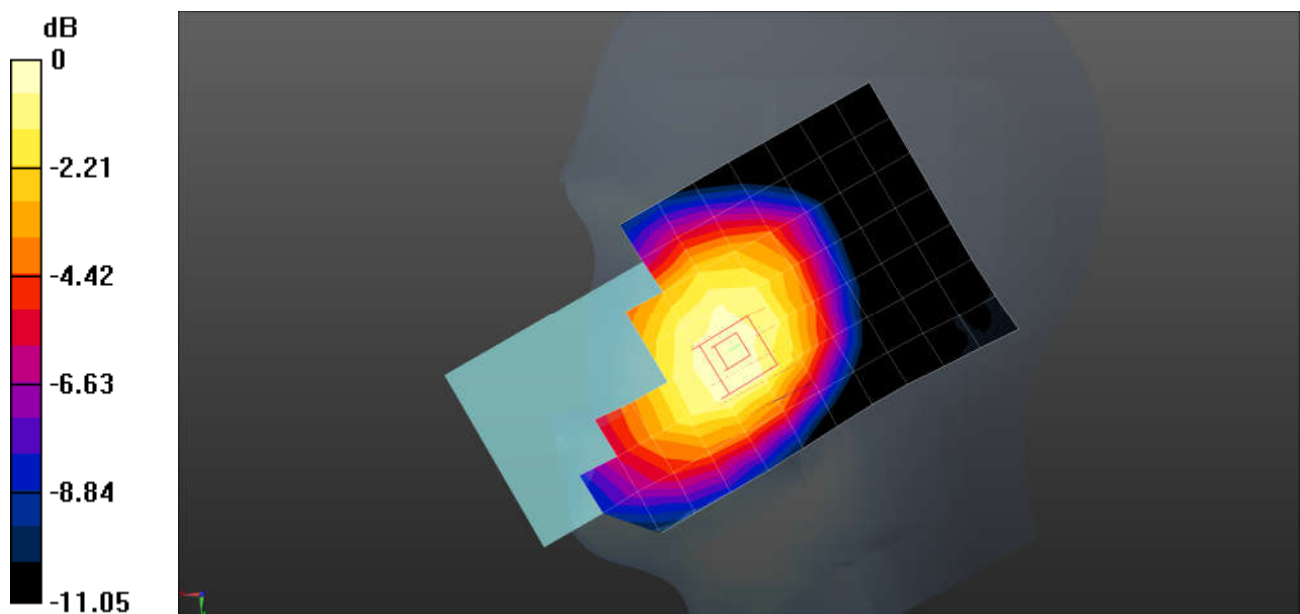

Test Laboratory: SGS-SAR Lab

K4 LTE Band 12 10M QPSK 1RB0 23095CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.856$ S/m; $\epsilon_r = 42.912$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(10.33, 10.33, 10.33); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.266 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

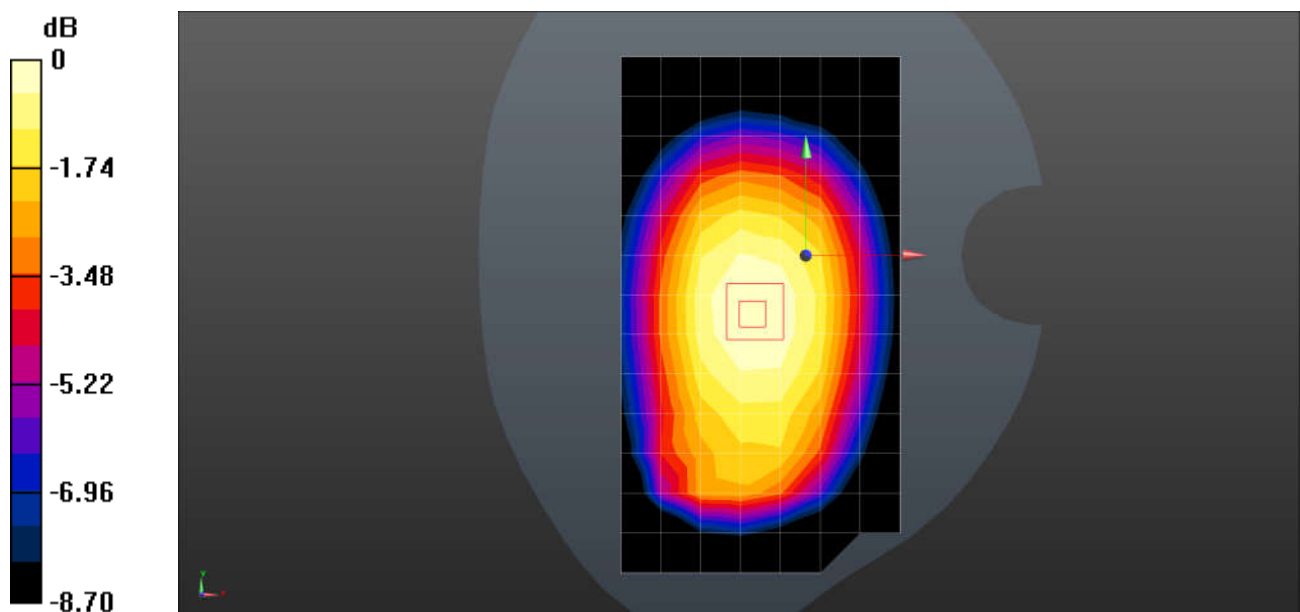

Test Laboratory: SGS-SAR Lab

K4 LTE Band 41 20M QPSK 1RB0 40620CH Left cheek

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 38.394$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.64, 7.64, 7.64); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.115 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.334 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

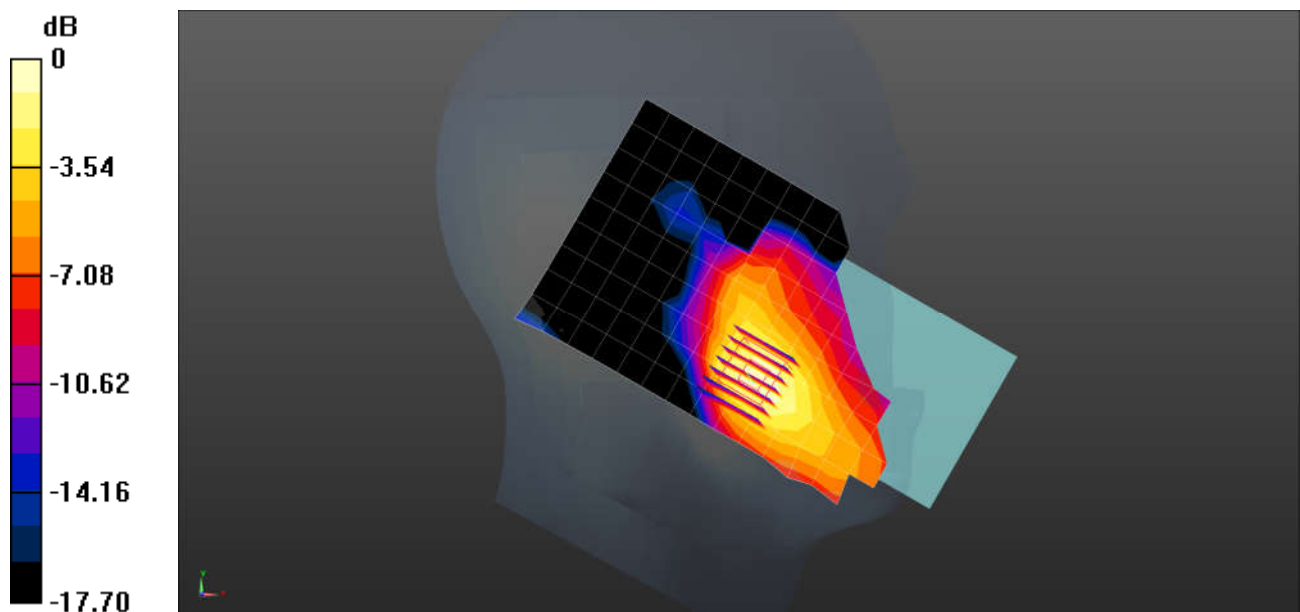

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 LTE Band 41 20M QPSK 1RB0 40620CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 38.394$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.64, 7.64, 7.64); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.600 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.870 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.976 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.780 W/kg

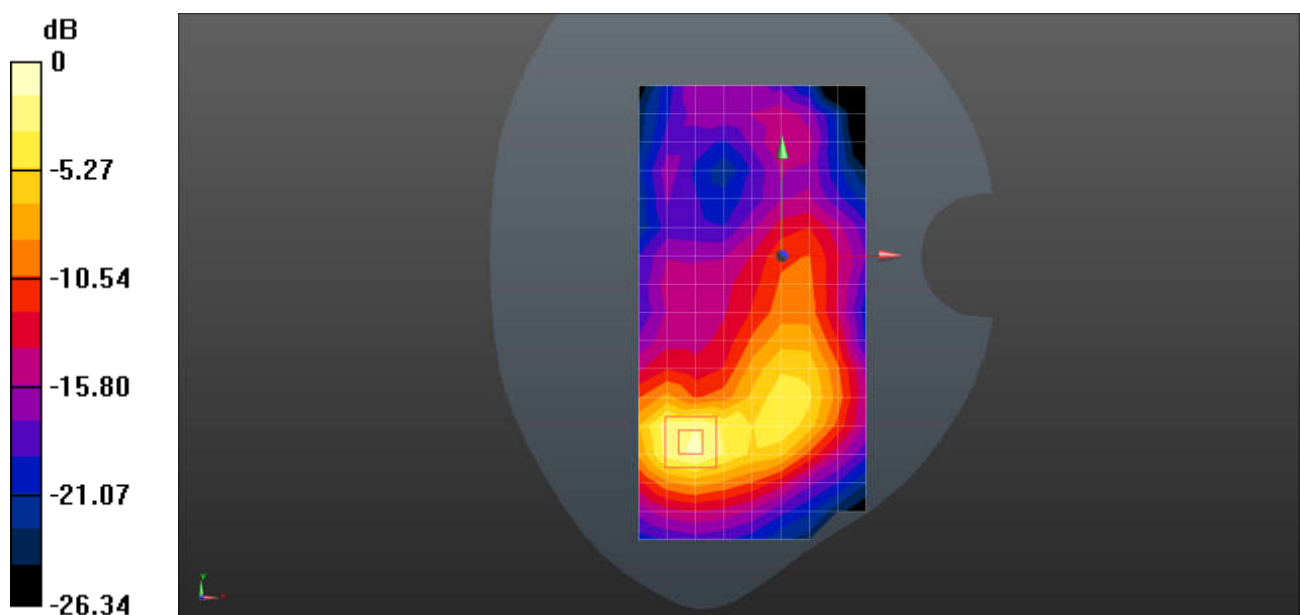

Test Laboratory: SGS-SAR Lab

K4 WIFI2.4G 802.11b 1CH Right cheek

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.013

Medium: HSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.728$ S/m; $\epsilon_r = 40.458$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.8, 7.8, 7.8); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.12 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.14 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

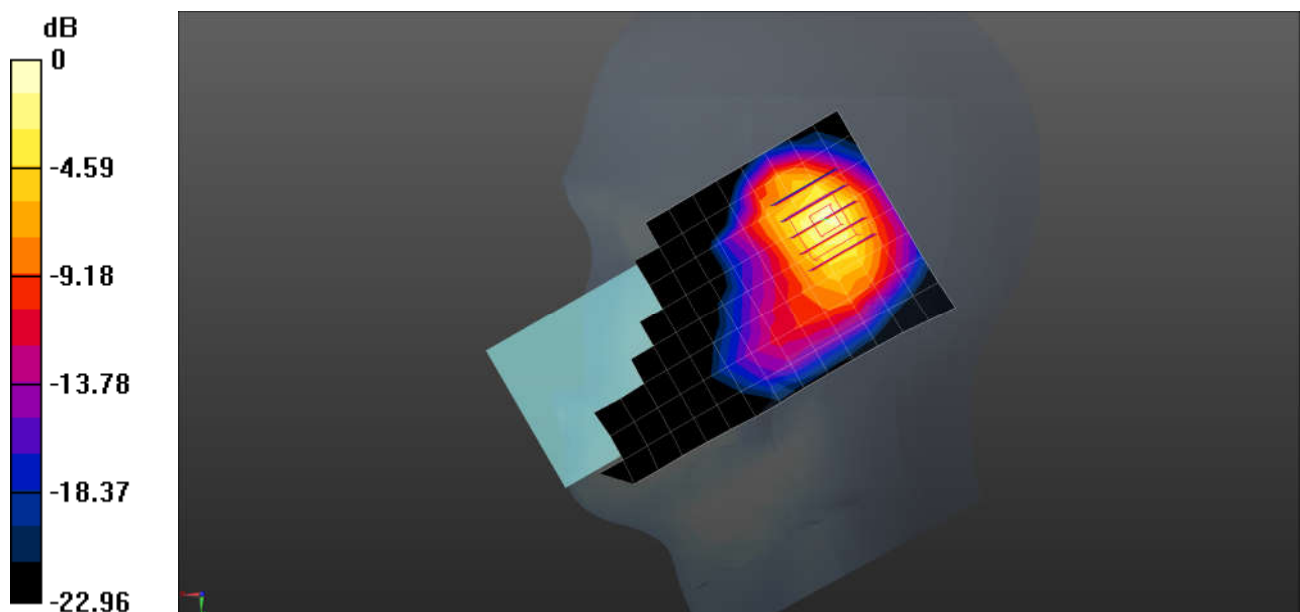

0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI2.4G 802.11b 11CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1.011

Medium: HSL2450;Medium parameters used: $f = 2462$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 40.351$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.8, 7.8, 7.8); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.707 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.150 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 0.737 W/kg

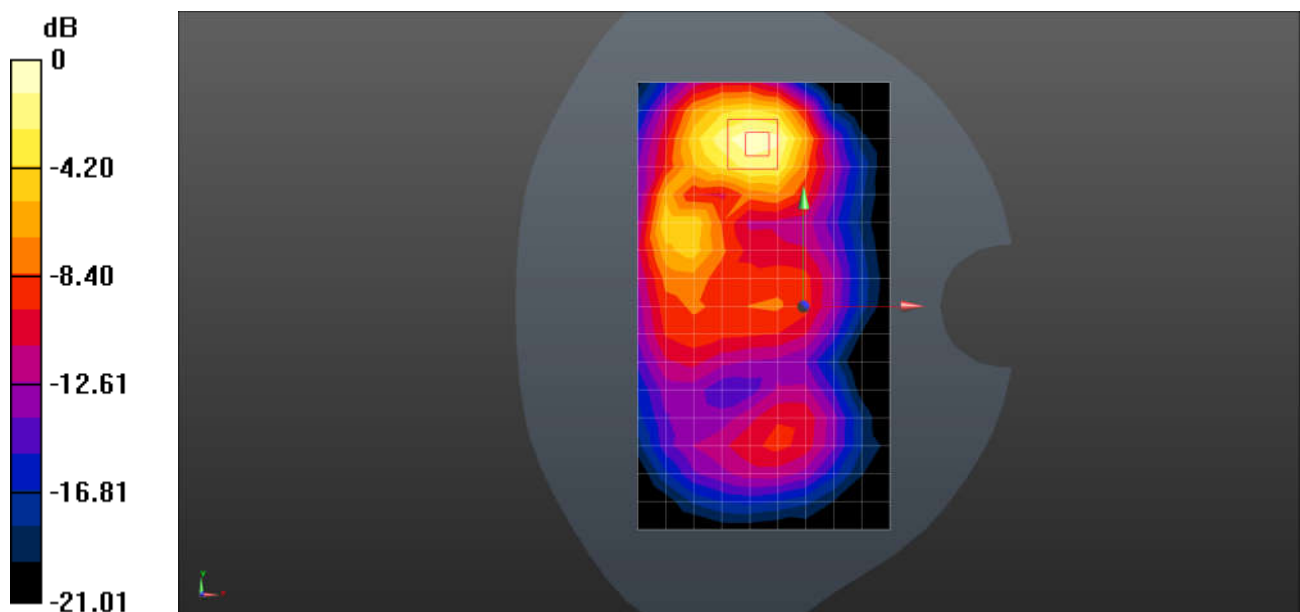

0 dB = 0.737 W/kg = -1.33 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 58CH Right tilted

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5310 MHz;Duty Cycle: 1:1.064

Medium: HSL5G;Medium parameters used: $f = 5310 \text{ MHz}$; $\sigma = 4.858 \text{ S/m}$; $\epsilon_r = 36.554$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.6, 5.6, 5.6); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.743 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 4.185 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.554 W/kg ; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

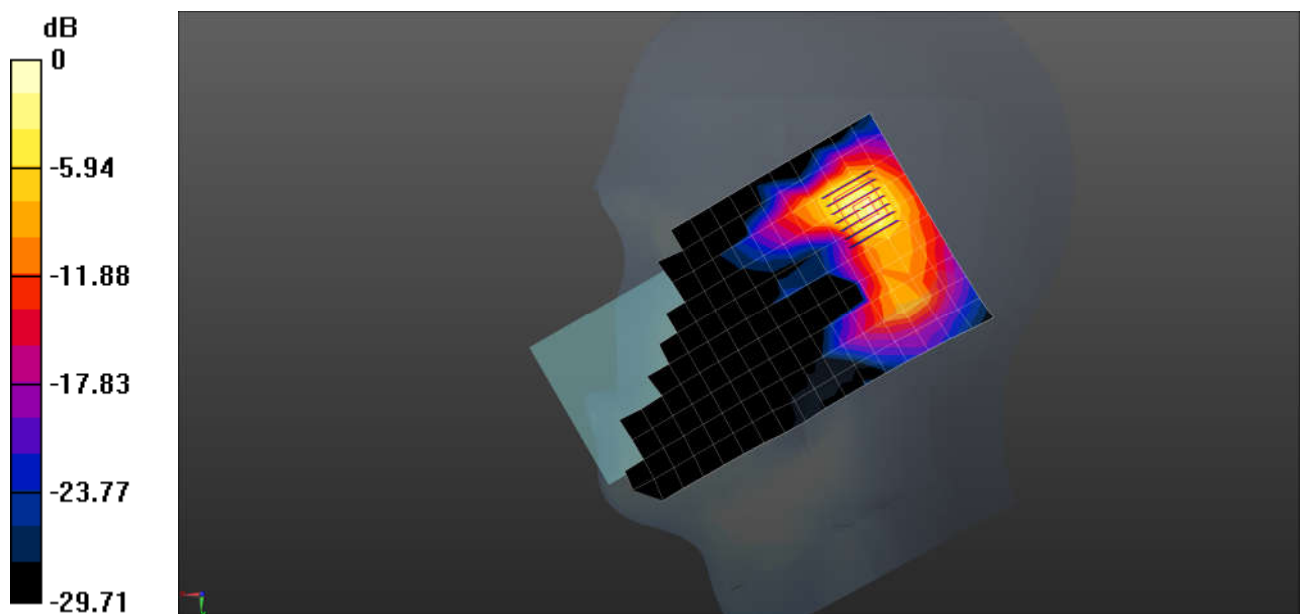

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 122CH Right tilted

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5620 MHz;Duty Cycle: 1:1.064

Medium: HSL5G;Medium parameters used: $f = 5620$ MHz; $\sigma = 5.23$ S/m; $\epsilon_r = 35.931$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.02, 5.02, 5.02); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.366 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 5.499 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.513 W/kg

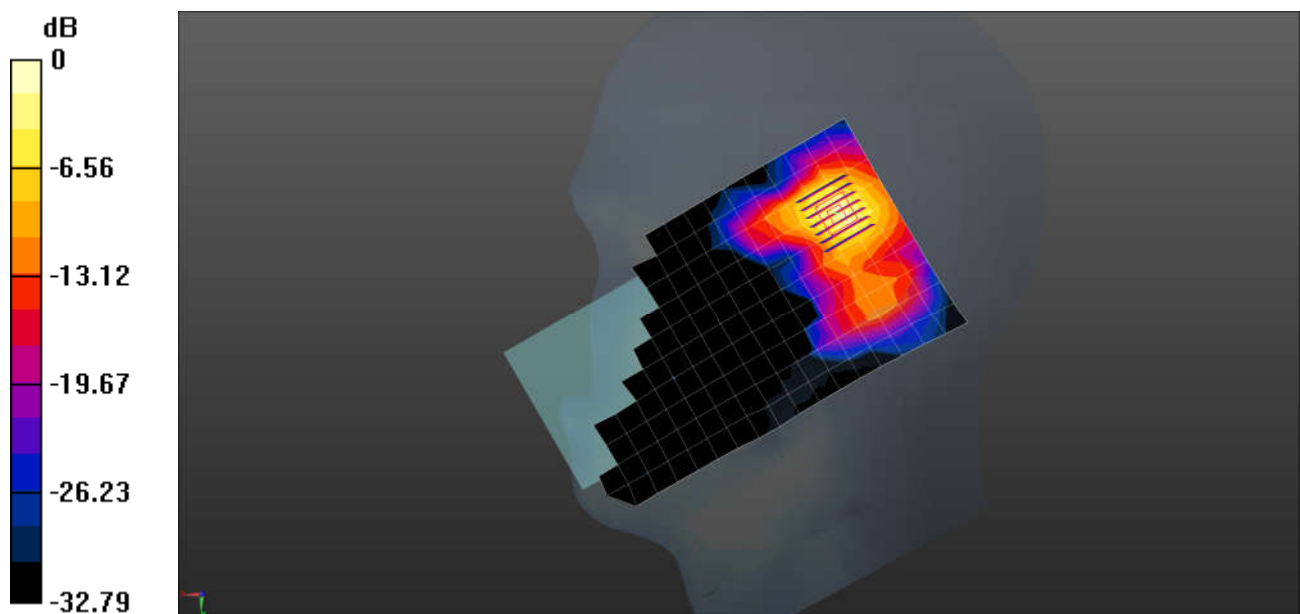

0 dB = 0.513 W/kg = -2.90 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 42CH Top side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5210 MHz;Duty Cycle: 1:1.064

Medium: HSL5G;Medium parameters used: $f = 5210 \text{ MHz}$; $\sigma = 4.777 \text{ S/m}$; $\epsilon_r = 36.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.6, 5.6, 5.6); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.384 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 2.695 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.253 W/kg ; SAR(10 g) = 0.108 W/kg

SMaximum value of SAR (measured) = 0.452 W/kg

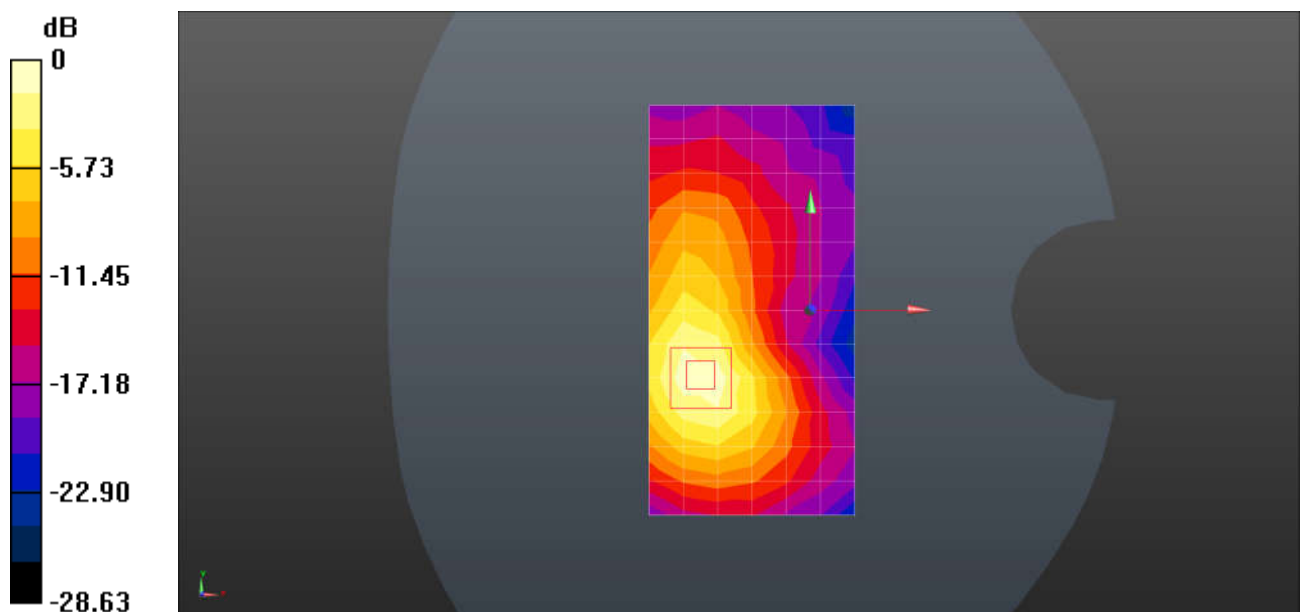

0 dB = 0.452 W/kg = -3.45 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 58CH Back side 0mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz; Duty Cycle: 1:1.064

Medium: HSL5G; Medium parameters used: $f = 5290$ MHz; $\sigma = 4.858$ S/m; $\epsilon_r = 36.554$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.6, 5.6, 5.6); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.98 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.91 W/kg

SAR(1 g) = 1.46 W/kg; SAR(10 g) = 0.517 W/kg

Maximum value of SAR (measured) = 2.38 W/kg

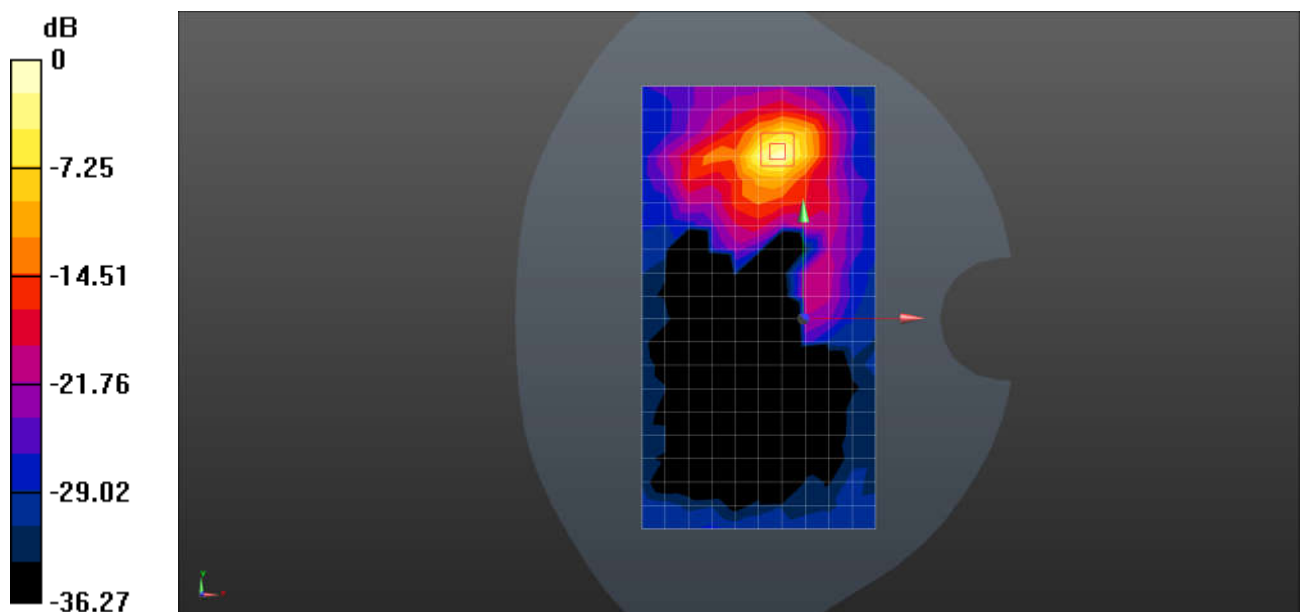

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 106CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5530 MHz;Duty Cycle: 1:1.064

Medium: HSL5G;Medium parameters used: $f = 5530 \text{ MHz}$; $\sigma = 5.115 \text{ S/m}$; $\epsilon_r = 36.197$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.02, 5.02, 5.02); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.141 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0.8580 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.139 W/kg ; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.143 W/kg

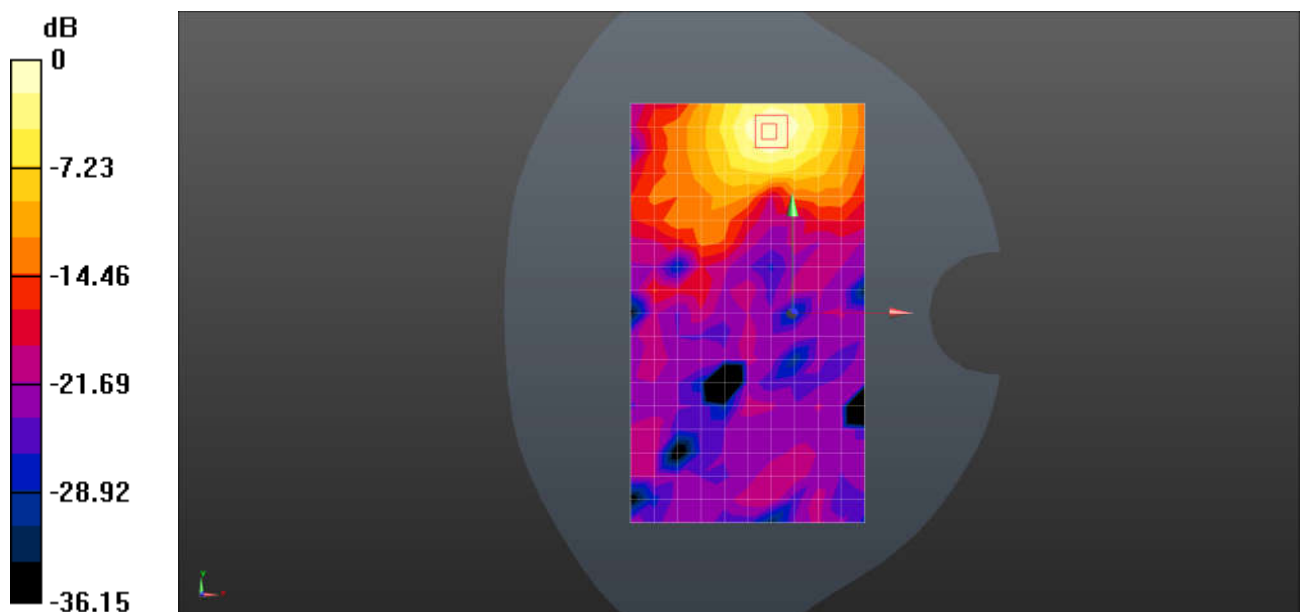

0 dB = 0.143 W/kg = -8.45 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 155CH Right tilted

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1.064

Medium: HSL5G;Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.422 \text{ S/m}$; $\epsilon_r = 35.618$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.11, 5.11, 5.11); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x19x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.344 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 1.865 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.242 W/kg ; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.371 W/kg

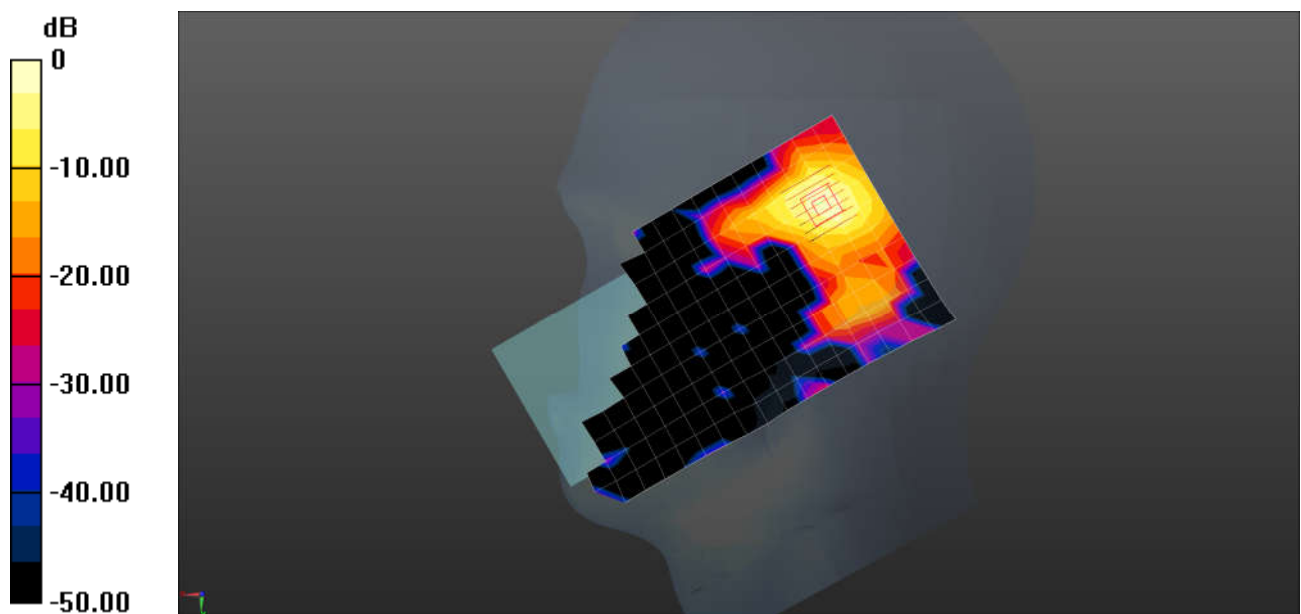

0 dB = 0.371 W/kg = -4.31 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 58CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5290 MHz; Duty Cycle: 1:1.064

Medium: HSL5G; Medium parameters used: $f = 5290$ MHz; $\sigma = 4.858$ S/m; $\epsilon_r = 36.554$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.6, 5.6, 5.6); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.203 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9450 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

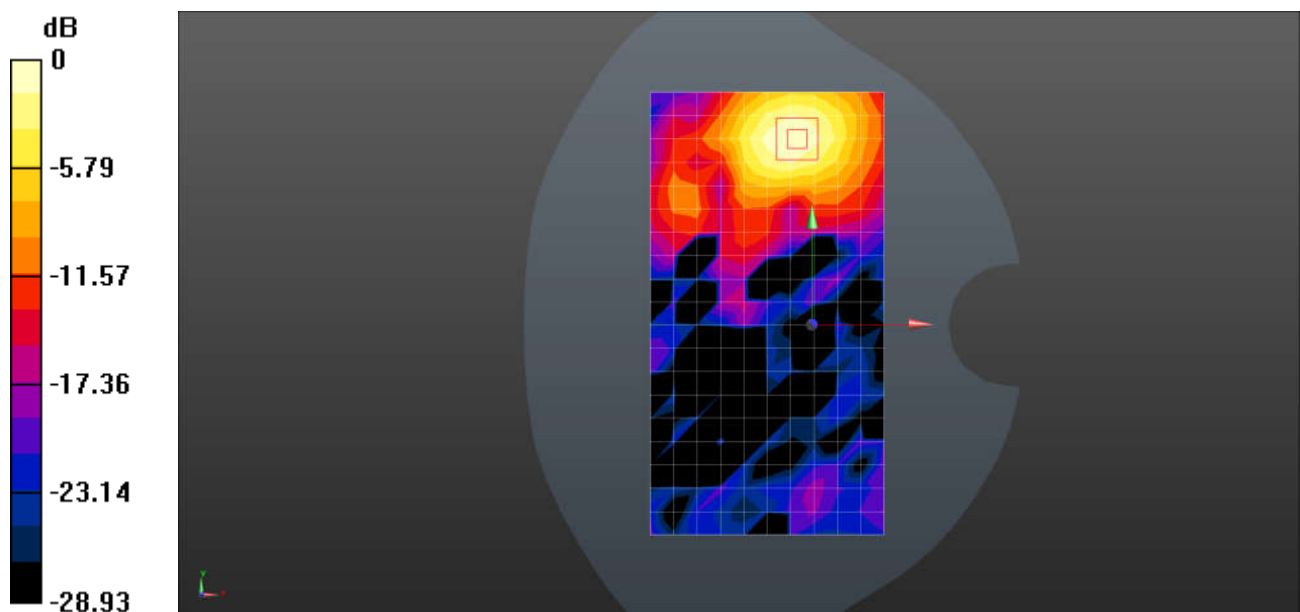

0 dB = 0.187 W/kg = -7.28 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 155CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1.064

Medium: HSL5G;Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.422 \text{ S/m}$; $\epsilon_r = 35.618$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.11, 5.11, 5.11); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 0.197 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 1.700 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.153 W/kg ; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.232 W/kg

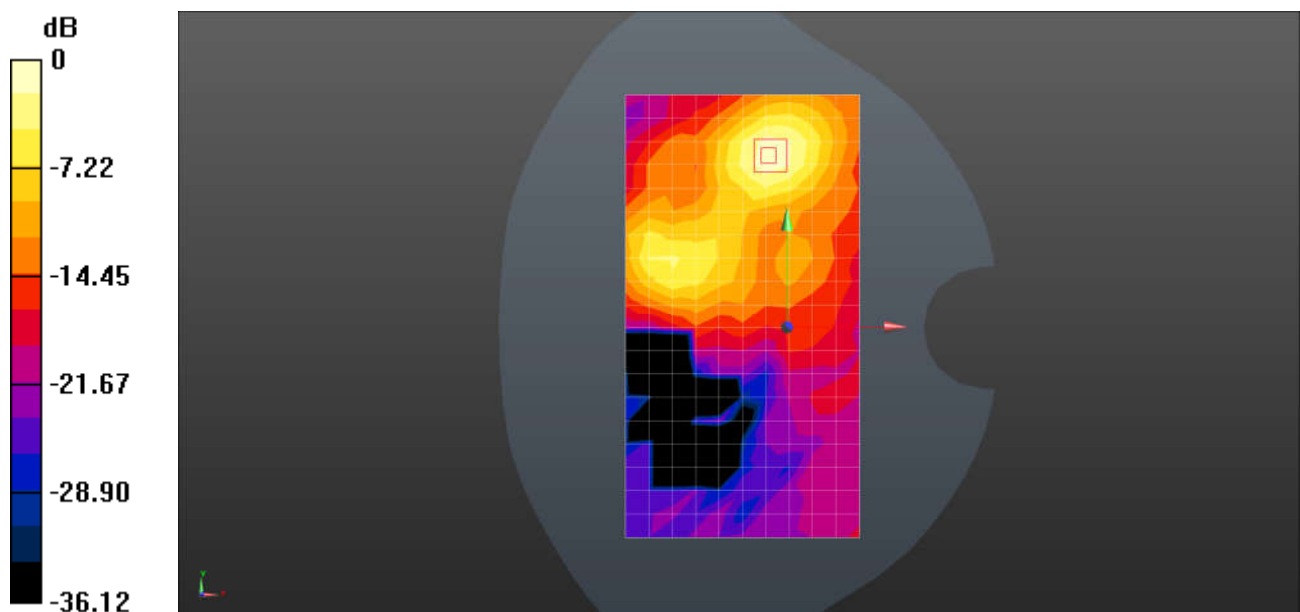

0 dB = 0.232 W/kg = -6.35 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 WIFI5G 802.11ac 80M 122CH Back side 0mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5610 MHz;Duty Cycle: 1:1.064

Medium: HSL5G;Medium parameters used: $f = 5610$ MHz; $\sigma = 5.23$ S/m; $\epsilon_r = 35.931$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.02, 5.02, 5.02); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.775 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.240 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.322 W/kg

Maximum value of SAR (measured) = 0.875 W/kg

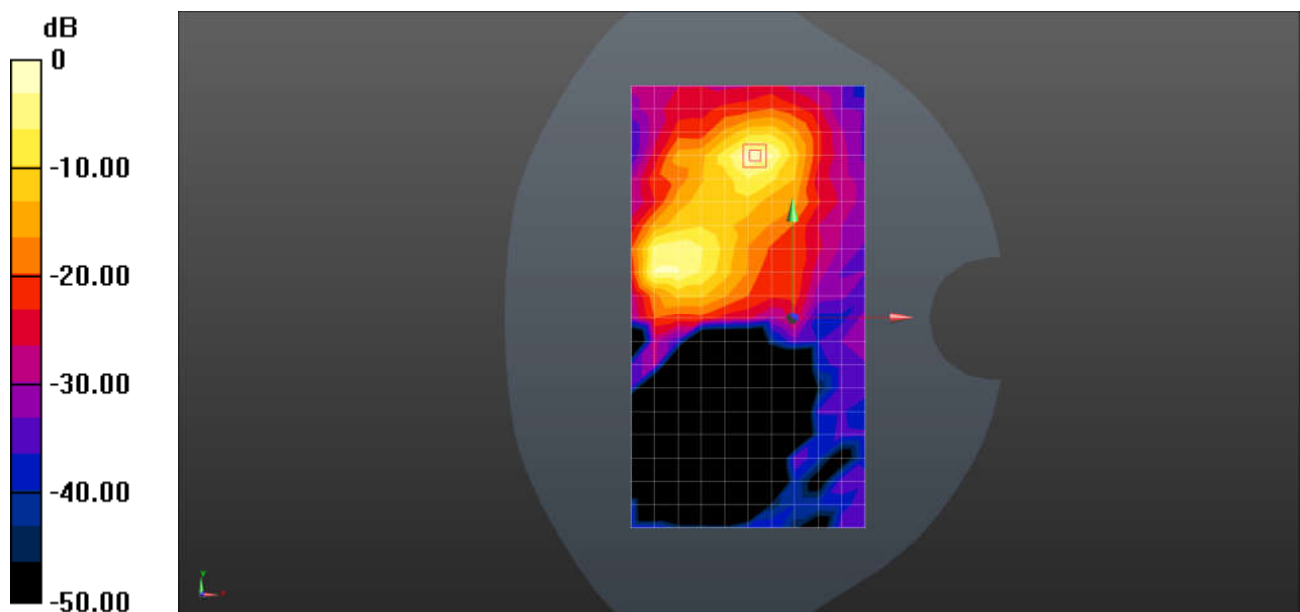

0 dB = 0.875 W/kg = -0.58 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 Bluetooth DH5 39CH Right cheek

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 40.401$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.8, 7.8, 7.8); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.215 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.418 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

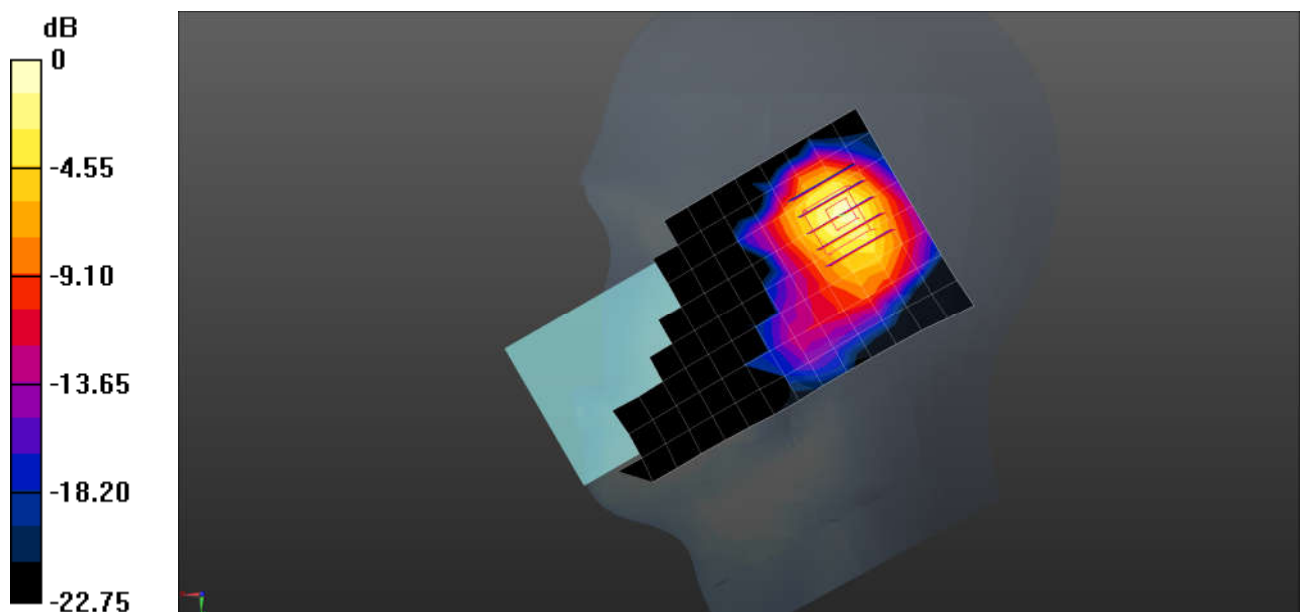

0 dB = 0.221 W/kg = -6.56 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 Bluetooth DH5 39CH Back side 10mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 40.401$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(7.8, 7.8, 7.8); Calibrated: 2023-06-29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.123 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6230 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

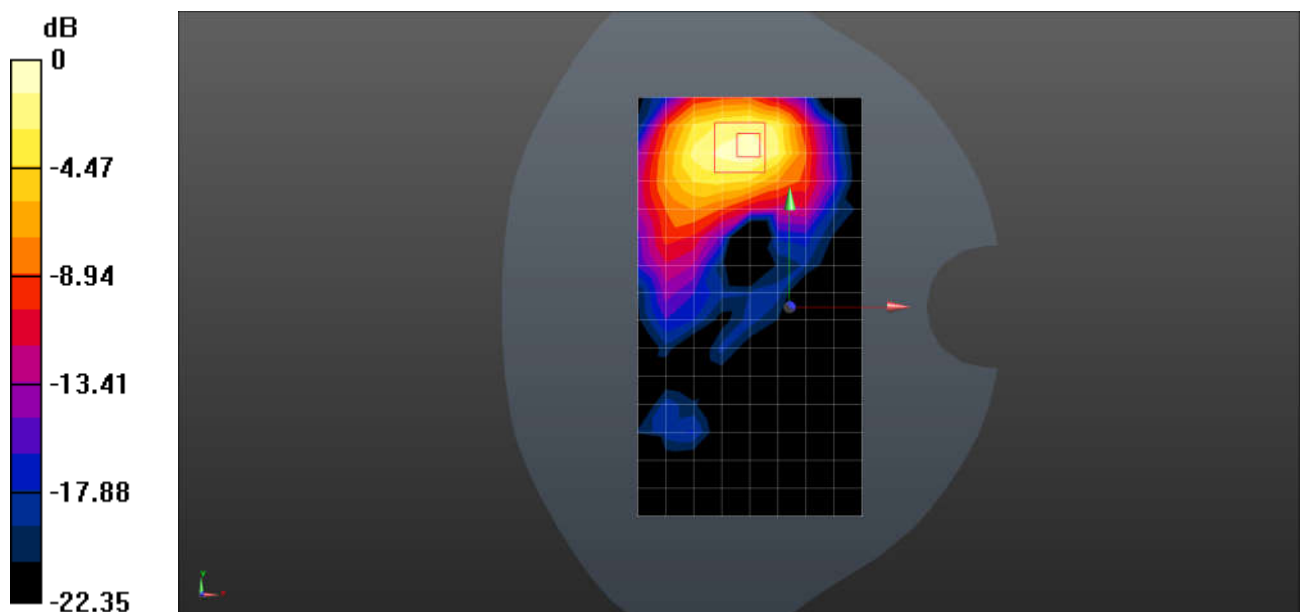

0 dB = 0.127 W/kg = -8.96 dBW/kg

Test Laboratory: SGS-SAR Lab

K4 NFC 13.56MHz Back side 0mm

DUT: K4; Type: Smart Phone; Serial: HQ63B10485

Communication System: UID 0, NFC (0); Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL13; Medium parameters used: $f = 14 \text{ MHz}$; $\sigma = 0.745 \text{ S/m}$; $\epsilon_r = 51.196$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7466; ConvF(18.47 18.47 18.47; Calibrated: 2023-01-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: ELI5; Type: ELI5; Serial: 1143
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Ch/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.233 W/kg


Configuration/Ch/Zoom Scan (6x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.573 W/kg

SAR(1 g) = 0.108 W/kg ; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

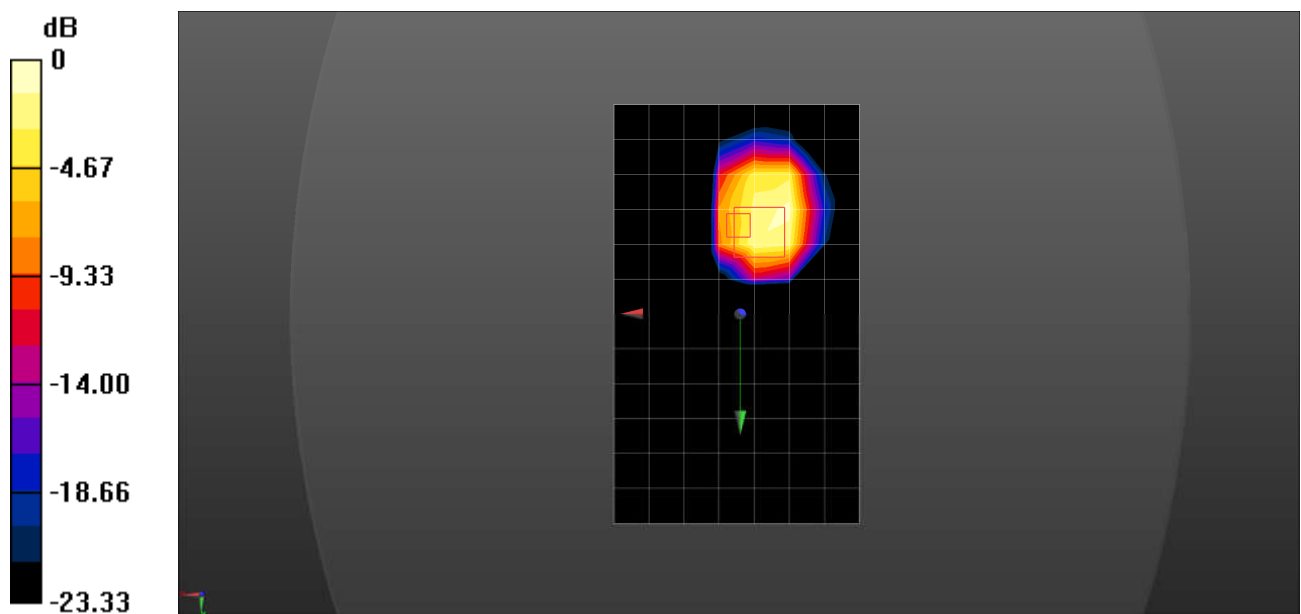

0 dB = 0.293 W/kg = -5.33 dBW/kg