


天线资料

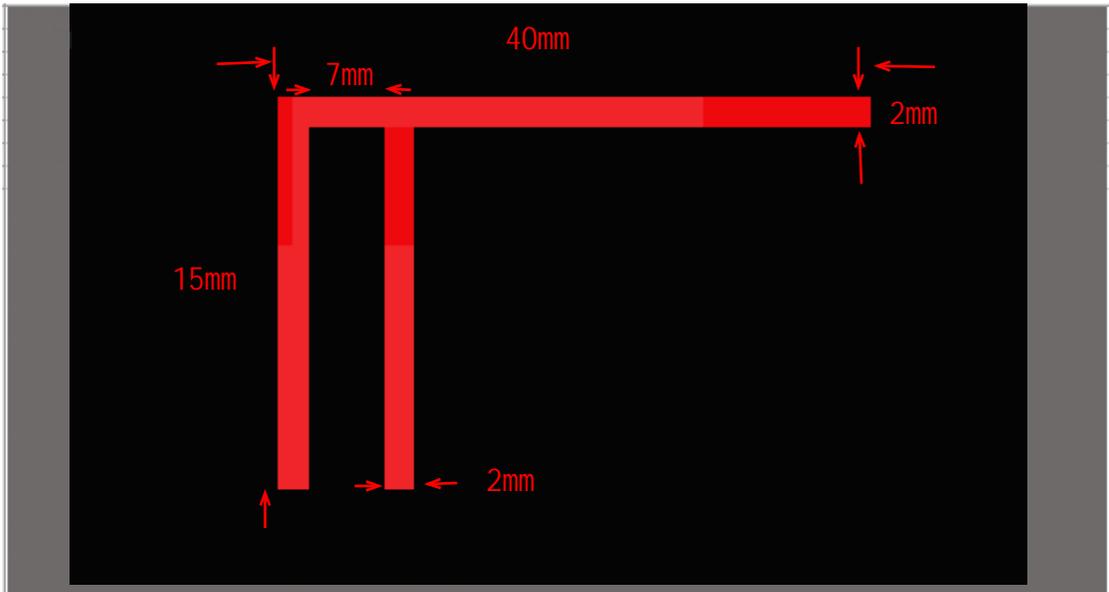


Electrical Properties

Frequency	2.402-2.480GHz
Impedance	As shown in the following figure - Impedance parameters
V.S.W.R	As shown in the following figure - Standing Wave Ratio parameter
Return Loss	As shown in the following figure - S11 parameters
Radiation	ALL
Gain (Peak)	The maximum is 1 dBi, as shown in Figure 3D for radiation surface parameters
Connector	None


Physical Properties

Antenna Material	PCB
Cable Type	None
Operating Temp.	-10 ~ +60 °C
Storage Temp.	-10 ~ +70 °C
manufacturer	Shenzhen Zhenye times Technology Co., Ltd
address	610, Block B, Jinyuan Business Building, Xixiang Street, Bao'an District, Shenzhen


Impedance:

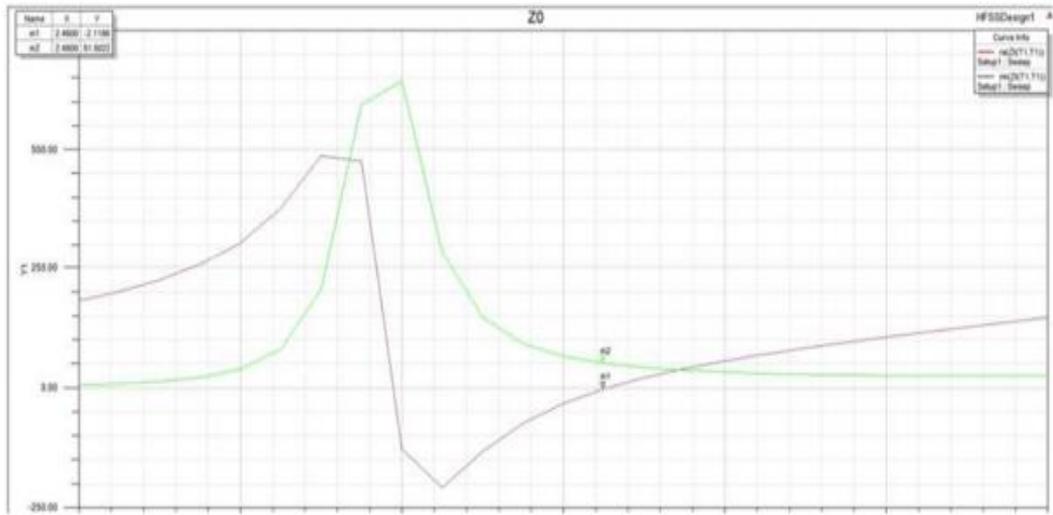


V. S. W. R.:

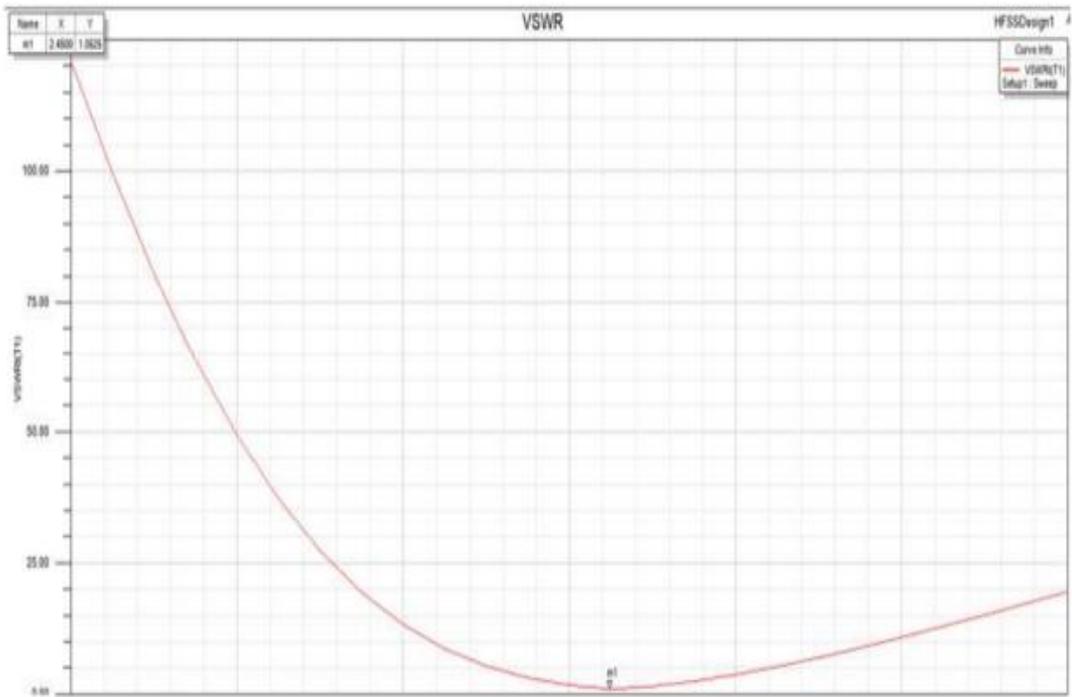

Return Loss :

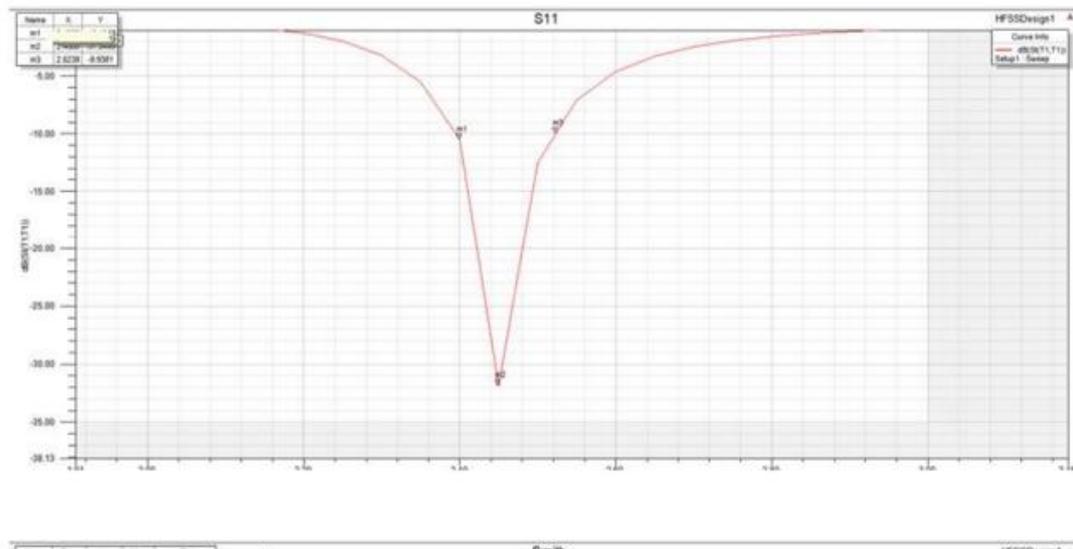

Gain (Peak)

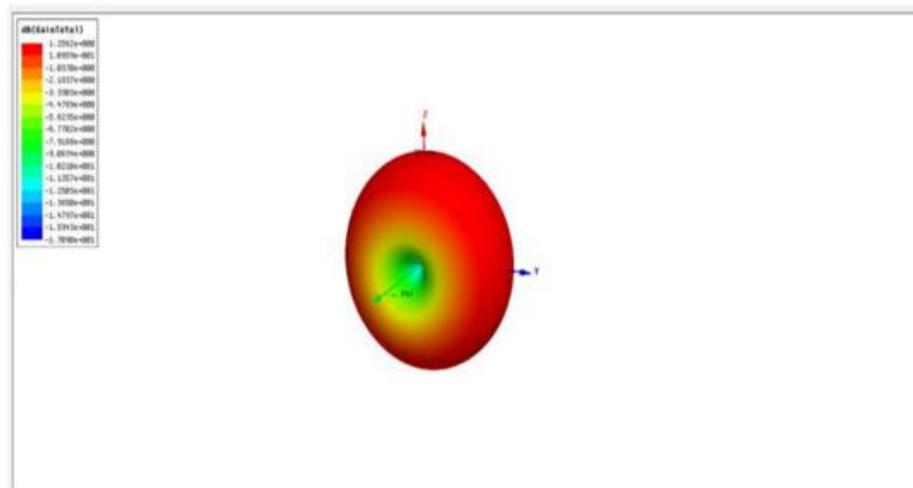

天线最大增益: 10dB