



FCC RADIO TEST REPORT

FCC ID : 2AEUPBHAFL011
Equipment : Floodlight Cam
Brand Name : Ring
Model Name : 5L4C4T
Applicant : Ring LLC
1523 26th St Santa Monica, CA 90404 USA
Manufacturer : Ring LLC
1523 26th St Santa Monica, CA 90404 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Dec. 07, 2021 and testing was started from Jan. 09, 2022 to Mar. 28, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Reviewed by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	16
3.3 Dwell Time Measurement.....	20
3.4 20dB and 99% Bandwidth Measurement	23
3.5 Output Power Measurement.....	30
3.6 Conducted Band Edges Measurement.....	31
3.7 Conducted Spurious Emission Measurement	36
3.8 Radiated Band Edges and Spurious Emission Measurement	40
3.9 AC Conducted Emission Measurement.....	44
3.10 Antenna Requirements.....	46
4 List of Measuring Equipment	47
5 Uncertainty of Evaluation.....	49
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR240816A	01	Initial issue of report	Apr. 28, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting only	-
3.5	15.247(b)(2)	Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 0.12 dB at 5415.000 MHz
3.9	15.207	AC Conducted Emission	Pass	Under limit 21.61 dB at 2.826 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

LoRa

Product Feature		
Antenna Type	PIFA Antenna	
Antenna information		
902 MHz ~ 928 MHz	Peak Gain (dBi)	-1.19

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY (TAF Code: 1190)	
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory	

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH16-HY, CO07-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786



1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

LoRa 125KHz FHSS

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902 – 928 MHz	1	902.2	28	907.6	55	913.0	82	918.4	109	923.8
	2	902.4	29	907.8	56	913.2	83	918.6	110	924.0
	3	902.6	30	908.0	57	913.4	84	918.8	111	924.2
	4	902.8	31	908.2	58	913.6	85	919.0	112	924.4
	5	903.0	32	908.4	59	913.8	86	919.2	113	924.6
	6	903.2	33	908.6	60	914.0	87	919.4	114	924.8
	7	903.4	34	908.8	61	914.2	88	919.6	115	925.0
	8	903.6	35	909.0	62	914.4	89	919.8	116	925.2
	9	903.8	36	909.2	63	914.6	90	920.0	117	925.4
	10	904.0	37	909.4	64	914.8	91	920.2	118	925.6
	11	904.2	38	909.6	65	915.0	92	920.4	119	925.8
	12	904.4	39	909.8	66	915.2	93	920.6	120	926.0
	13	904.6	40	910.0	67	915.4	94	920.8	121	926.2
	14	904.8	41	910.2	68	915.6	95	921.0	122	926.4
	15	905.0	42	910.4	69	915.8	96	921.2	123	926.6
	16	905.2	43	910.6	70	916.0	97	921.4	124	926.8
	17	905.4	44	910.8	71	916.2	98	921.6	125	927.0
	18	905.6	45	911.0	72	916.4	99	921.8	126	927.2
	19	905.8	46	911.2	73	916.6	100	922.0	127	927.4
	20	906.0	47	911.4	74	916.8	101	922.2	128	927.6
	21	906.2	48	911.6	75	917.0	102	922.4	129	927.8
	22	906.4	49	911.8	76	917.2	103	922.6	-	-
	23	906.6	50	912.0	77	917.4	104	922.8	-	-
	24	906.8	51	912.2	78	917.6	105	923.0	-	-
	25	907.0	52	912.4	79	917.8	106	923.2	-	-
	26	907.2	53	912.6	80	918.0	107	923.4	-	-
	27	907.4	54	912.8	81	918.2	108	923.6	-	-

**FSK 250 Kbps**

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902 – 928 MHz	1	902.5	28	916.0
	2	903.0	29	916.5
	3	903.5	30	917.0
	4	904.0	31	917.5
	5	904.5	32	918.0
	6	905.0	33	918.5
	7	905.5	34	919.0
	8	906.0	35	919.5
	9	906.5	36	920.0
	10	907.0	37	920.5
	11	907.5	38	921.0
	12	908.0	39	921.5
	13	908.5	40	922.0
	14	909.0	41	922.5
	15	909.5	42	923.0
	16	910.0	43	923.5
	17	910.5	44	924.0
	18	911.0	45	924.5
	19	911.5	46	925.0
	20	912.0	47	925.5
	21	912.5	48	926.0
	22	913.0	49	926.5
	23	913.5	50	927.0
	24	914.0	51	927.5
	25	914.5		
	26	915.0		
	27	915.5		


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases		
Test Item	Feature	LoRa/FSK
Conducted Test Cases	LoRa 125 KHz FHSS_SF8	Mode 1: CH01 Tx_902.20 MHz Mode 2: CH65 Tx_915.00 MHz Mode 3: CH129 Tx_927.80 MHz
	LoRa 125 KHz FHSS_SF9	Mode 4: CH01 Tx_902.20 MHz Mode 5: CH65 Tx_915.00 MHz Mode 6: CH129 Tx_927.80 MHz
	FSK 250 Kbps FHSS	Mode 7: CH01 Tx_902.50 MHz Mode 8: CH26 Tx_915.00 MHz Mode 9: CH51 Tx_927.50 MHz
Radiated Test Cases	LoRa 125 KHz FHSS_SF8	Mode 1: CH01 Tx_902.20 MHz Mode 2: CH65 Tx_915.00 MHz Mode 3: CH129 Tx_927.80 MHz
	FSK 250 Kbps FHSS	Mode 4: CH01 Tx_902.50 MHz Mode 5: CH26 Tx_915.00 MHz Mode 6: CH51 Tx_927.50 MHz
AC Conducted Emission	Mode 1: LoRa Tx + USB Cable (Charging from Adapter)	

2.3 Connection Diagram of Test System

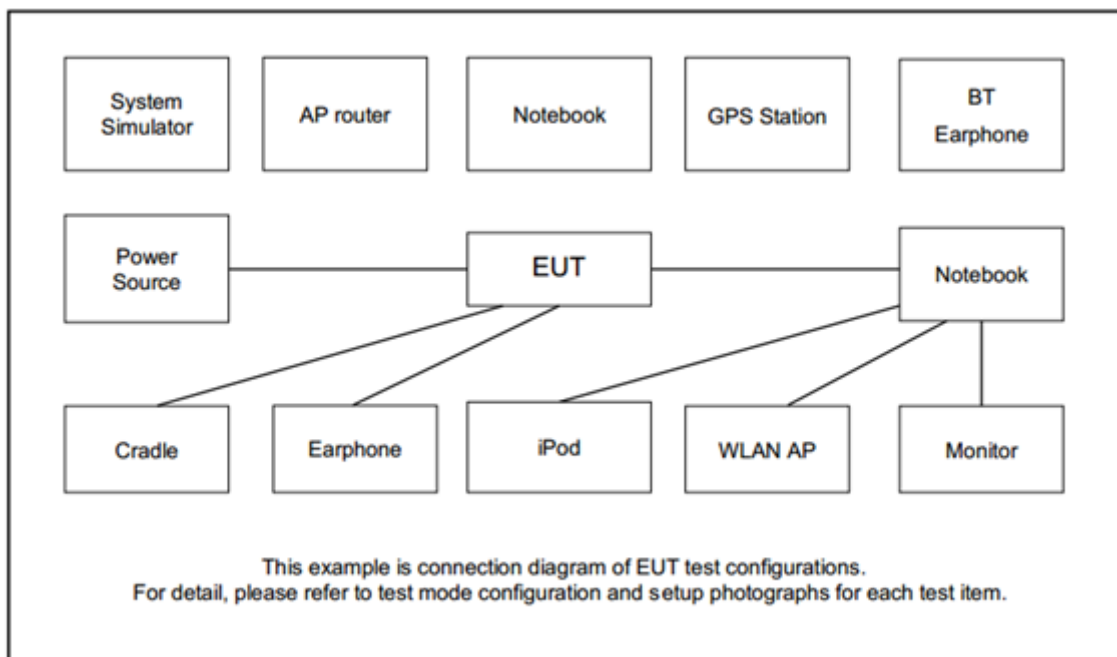

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	DVE	DSA-5PFM-05 FUS	FCC DoC	N/A	N/A
2.	USB Cable	NA	NA	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “J-Link RTT Viewer V7.54a” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 50kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for LoRa 125kHz FHSS.
RBW = 100kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for FSK 250Kbps FHSS.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

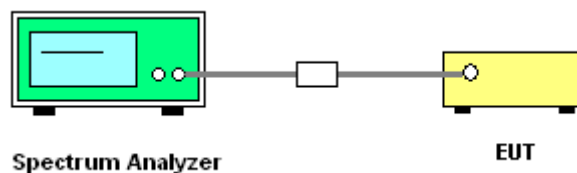




3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.


<LoRa 125kHz FHSS>

<Data Rate: SF8>

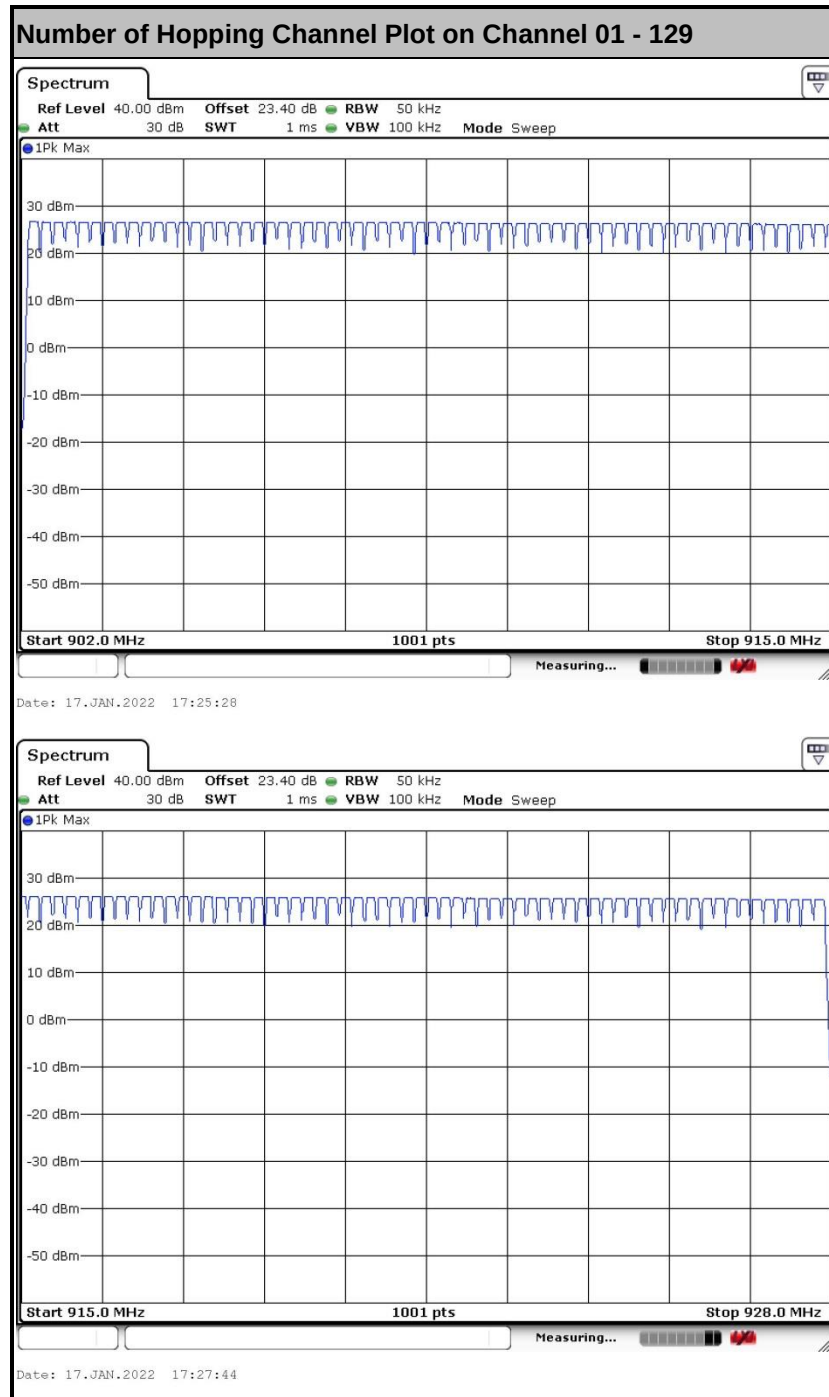




<Data Rate: SF9>

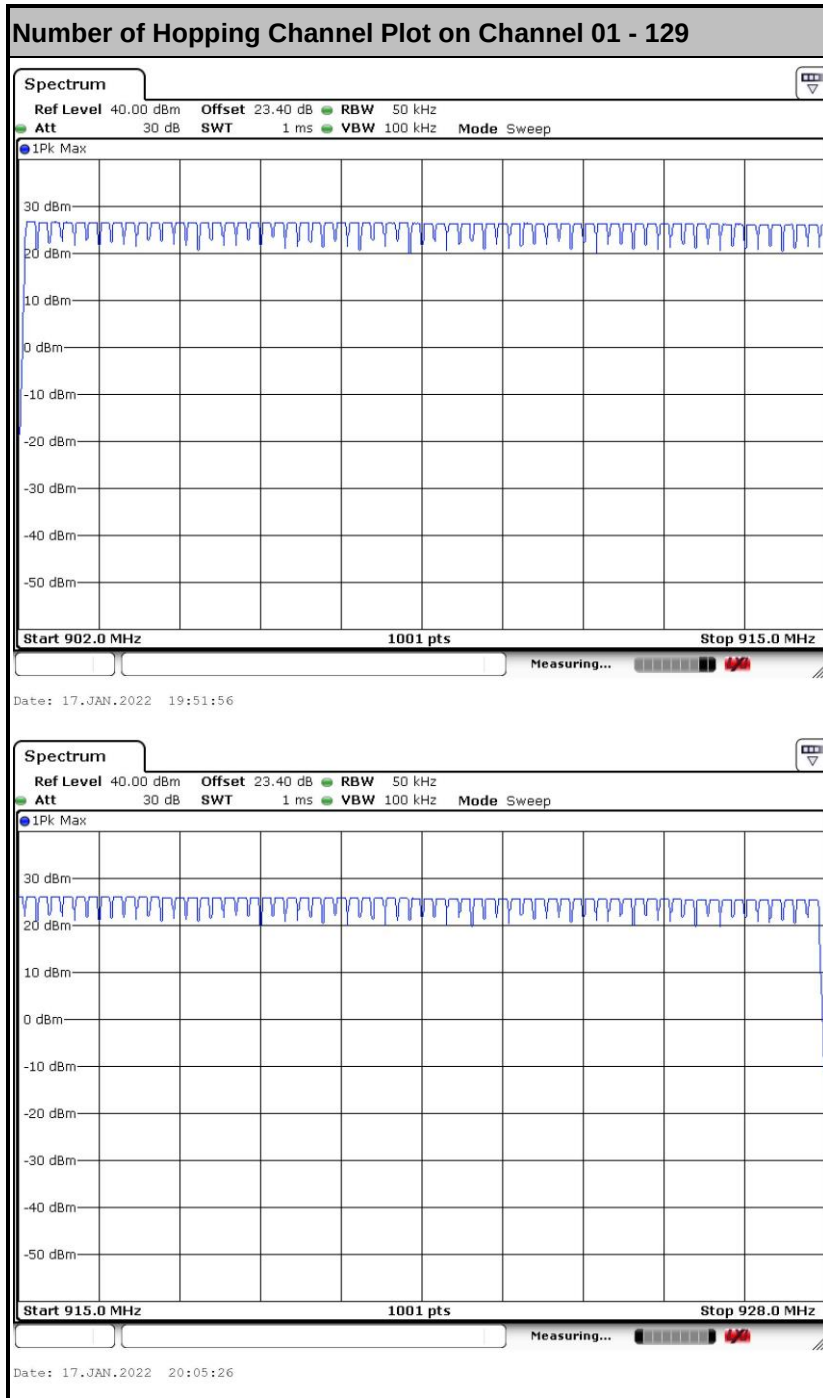



<FSK 250Kbps FHSS>

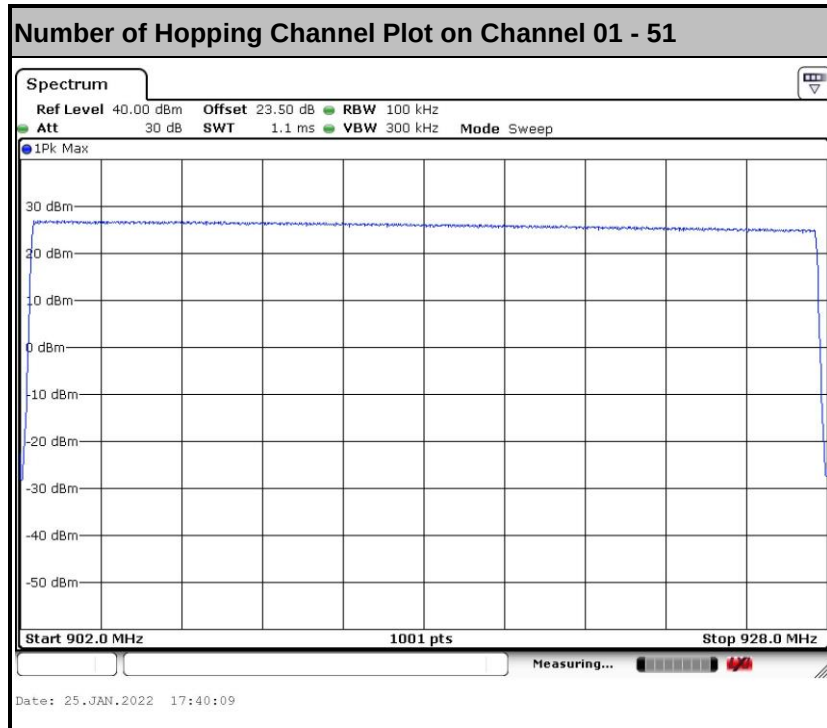

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 902 – 928 MHz band shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 50kHz for; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for LoRa 125KHz FHSS.
RBW = 200kHz for; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for FSK 250Kbps FHSS.
6. Measure and record the results in the test report.

3.2.4 Test Setup

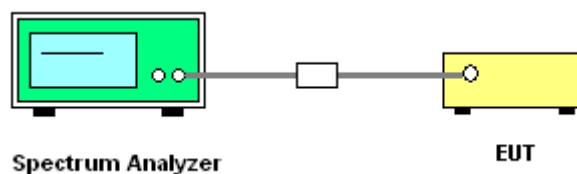

3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.



<LoRa 125KHz FHSS>

<Data Rate: SF8>

Channel Separation Plot on Channel 01 - 02



Channel Separation Plot on Channel 64 - 65



Channel Separation Plot on Channel 128 - 129




N/A



<Data Rate: SF9>


Channel Separation Plot on Channel 01 - 02

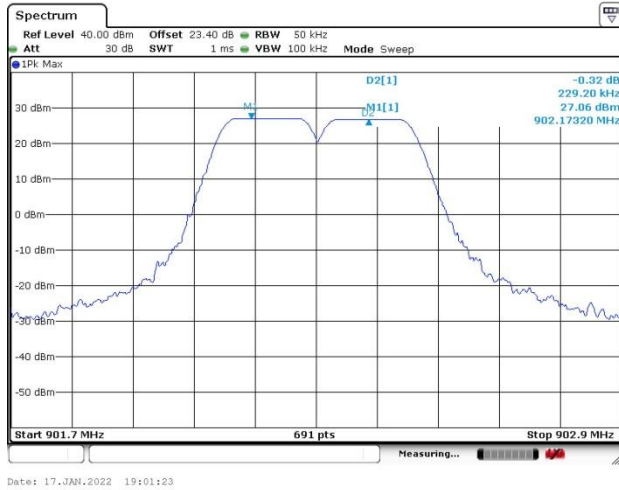

Channel Separation Plot on Channel 64 - 65



Channel Separation Plot on Channel 128 - 129

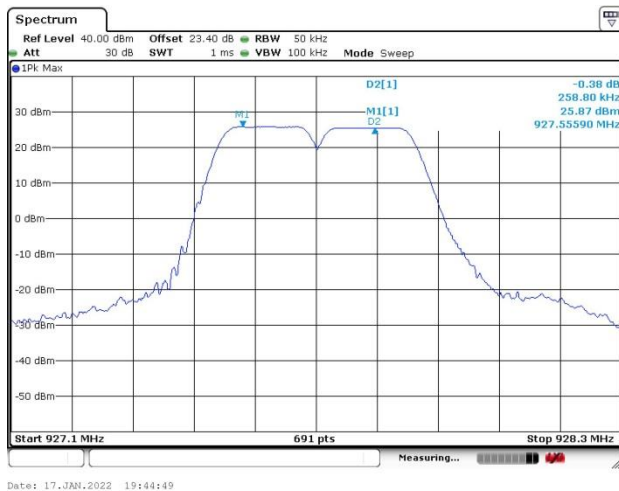


N/A




<FSK 250Kbps FHSS>


Channel Separation Plot on Channel 01 - 02

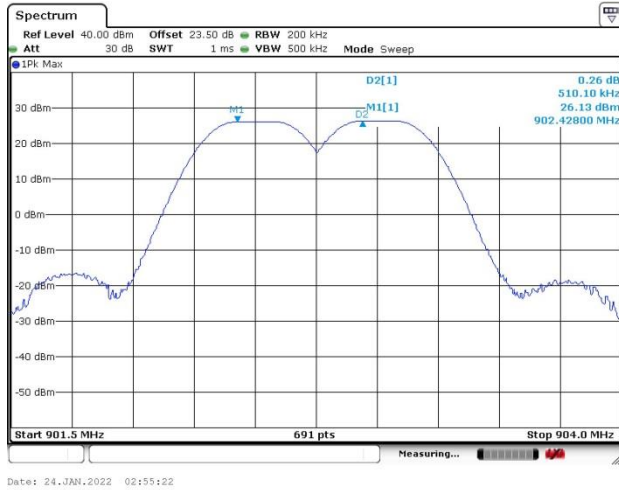

Channel Separation Plot on Channel 25 - 26

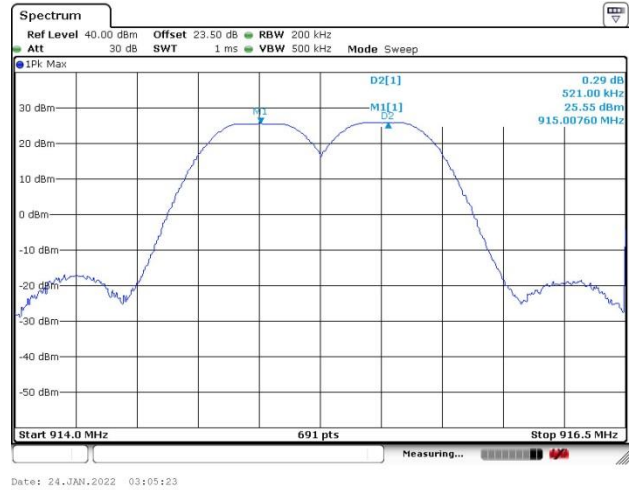

Channel Separation Plot on Channel 50 - 51

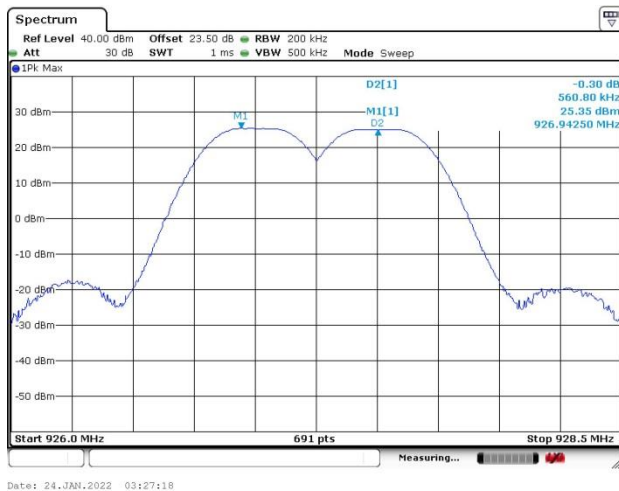

N/A

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 20 kHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

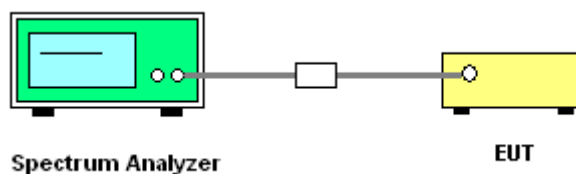


3.3.5 Test Result of Dwell Time

Please refer to Appendix A.


<LoRa 125KHz FHSS>

<Data Rate: SF8>

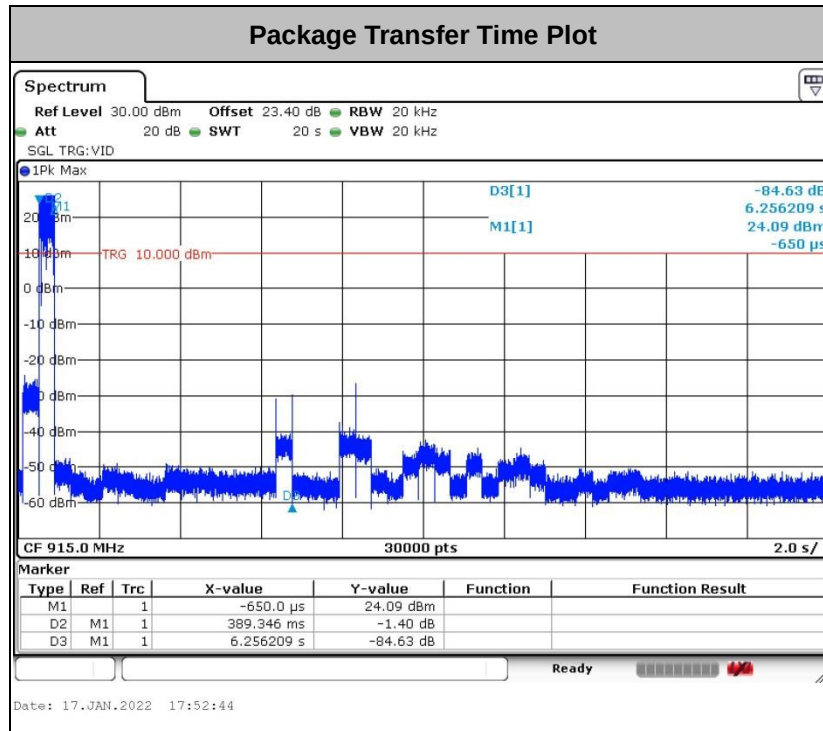

Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time


<Data Rate: SF9>

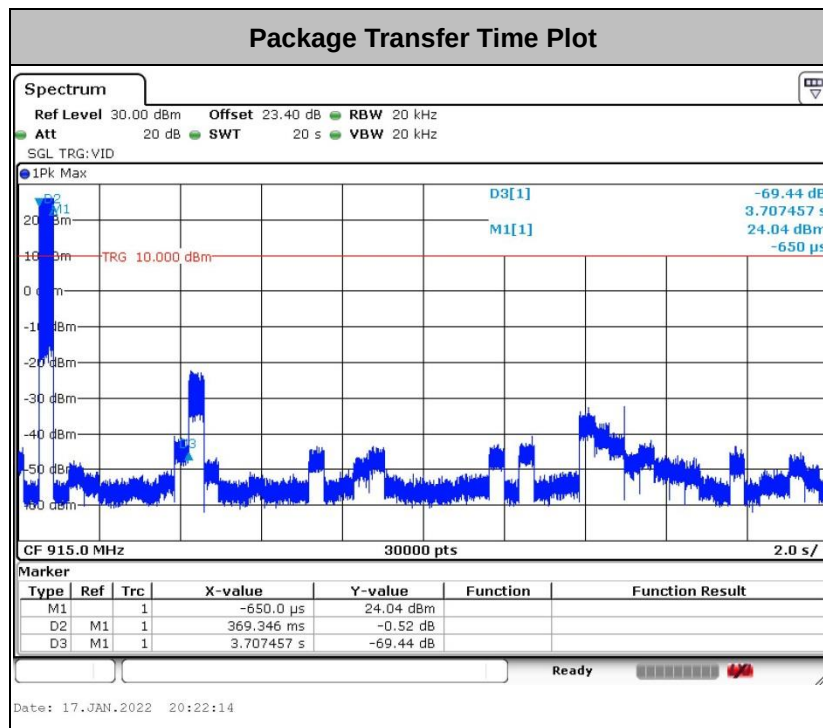

Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



<FSK 250Kbps FHSS>

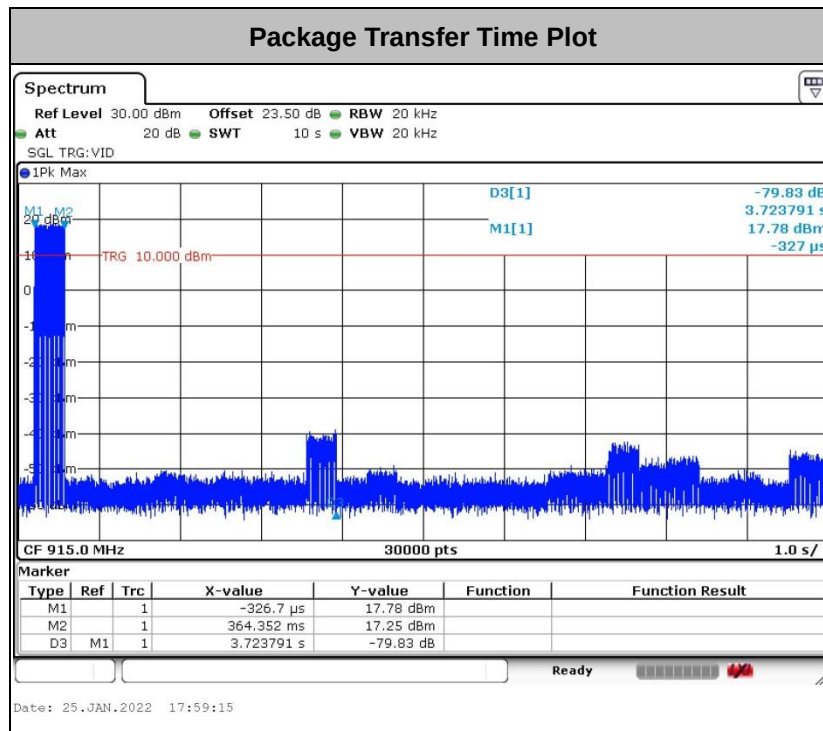

Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

99% Bandwidth is reporting only.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq$ 1-5% of the 99% bandwidth; VBW $\geq$ 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

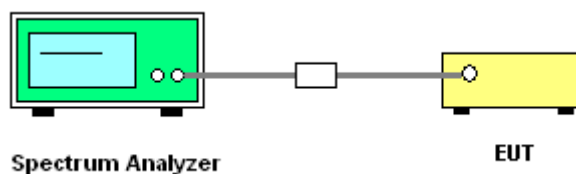

3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.




<LoRa 125KHz FHSS>

<Data Rate: SF8>

20 dB Bandwidth Plot on Channel 01



20 dB Bandwidth Plot on Channel 65

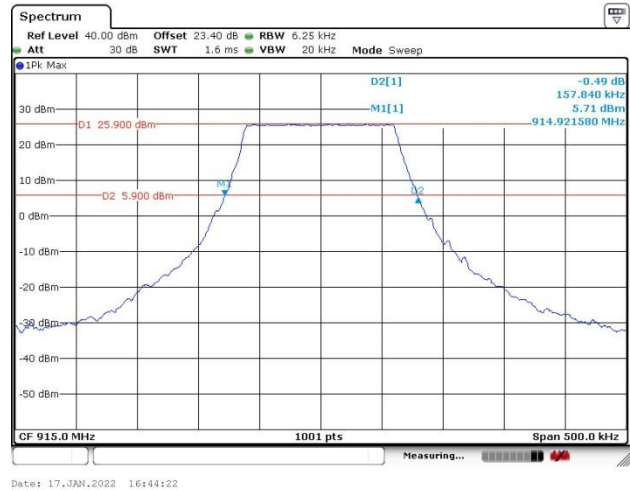

20 dB Bandwidth Plot on Channel 129




N/A




<Data Rate: SF9>


20 dB Bandwidth Plot on Channel 00

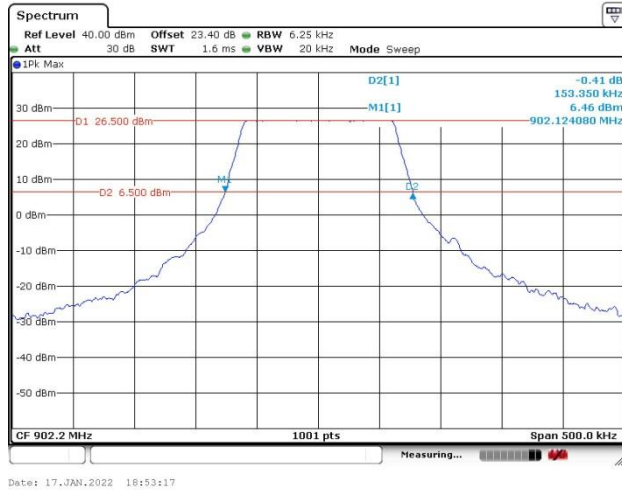

20 dB Bandwidth Plot on Channel 65

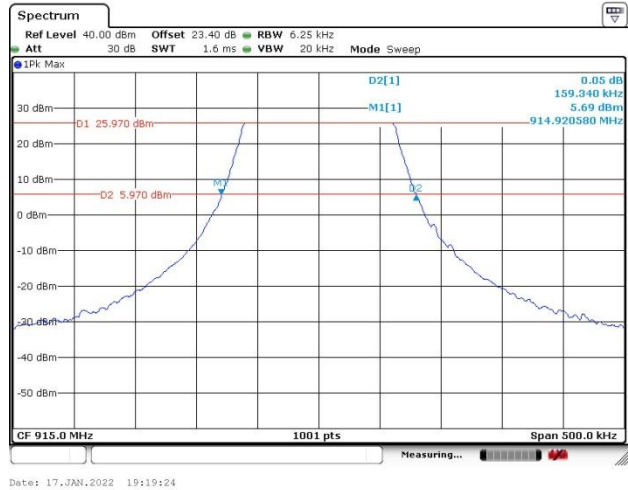

20 dB Bandwidth Plot on Channel 129

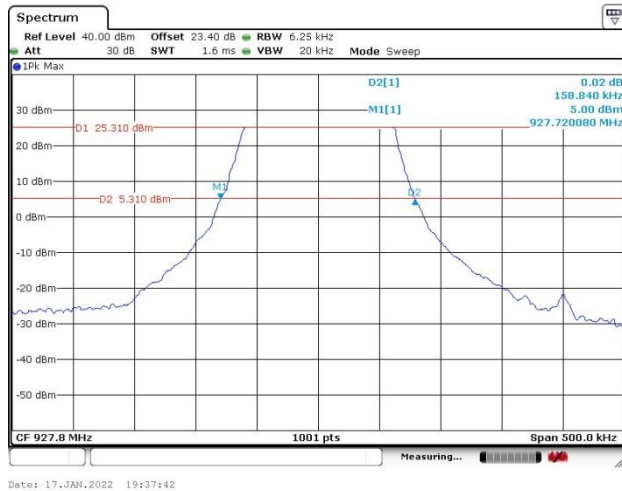


N/A




<FSK 250Kbps FHSS>


20 dB Bandwidth Plot on Channel 01

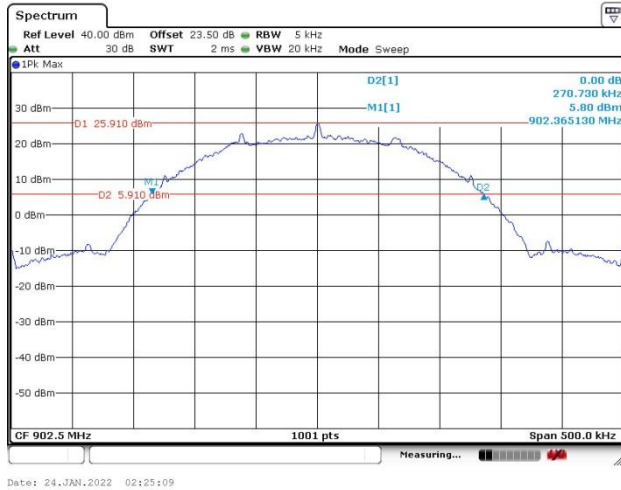

20 dB Bandwidth Plot on Channel 26

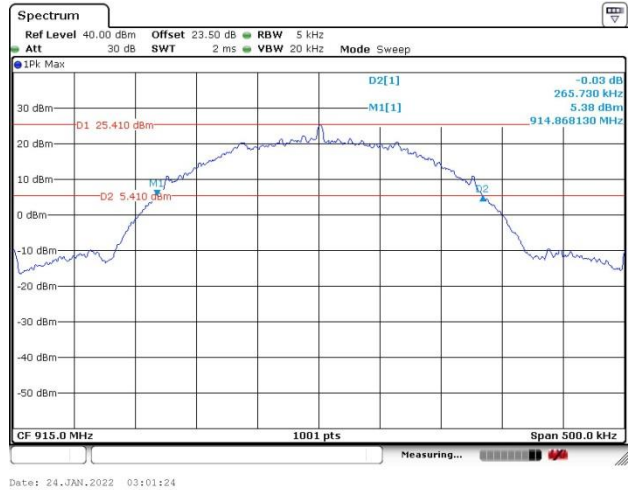

20 dB Bandwidth Plot on Channel 51

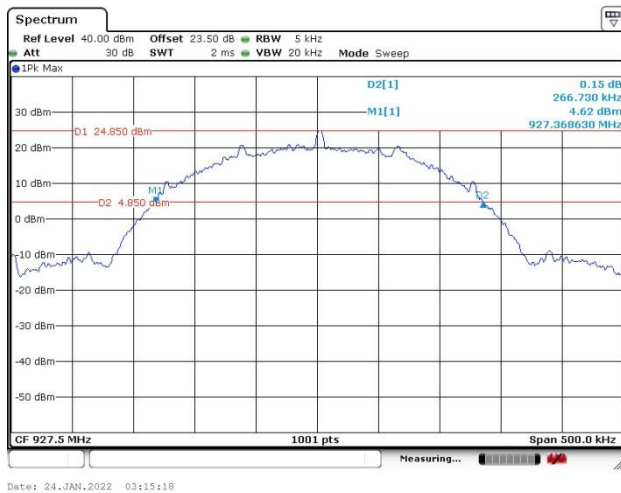

N/A




3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<LoRa 125KHz FHSS>

<Data Rate: SF8>


99% Occupied Bandwidth on Channel 01

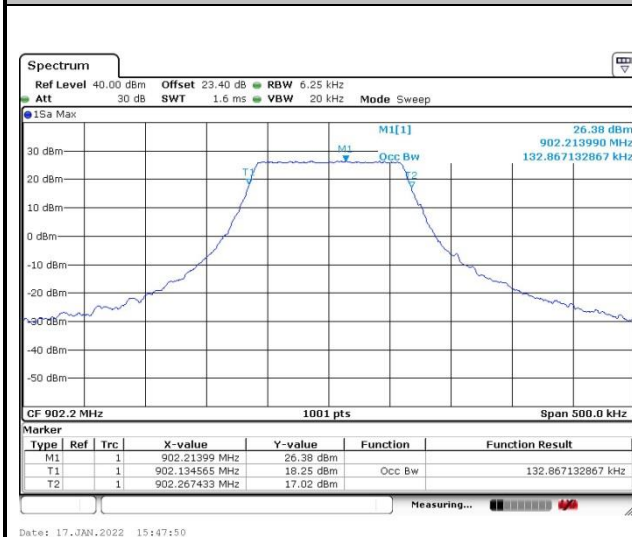

99% Occupied Bandwidth on Channel 65

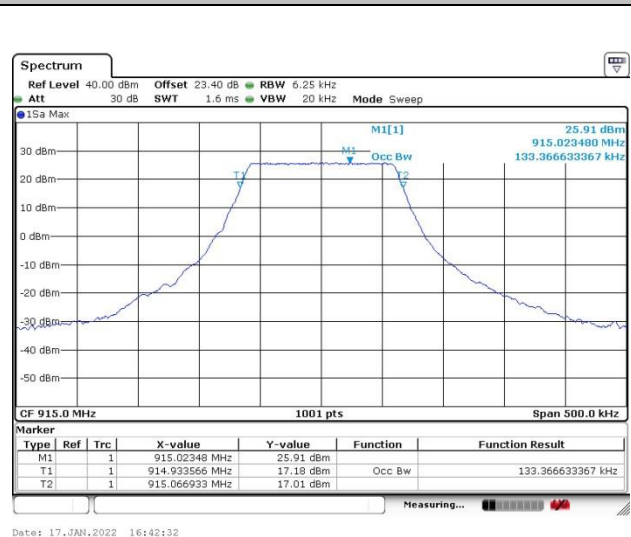

99% Occupied Bandwidth on Channel 129

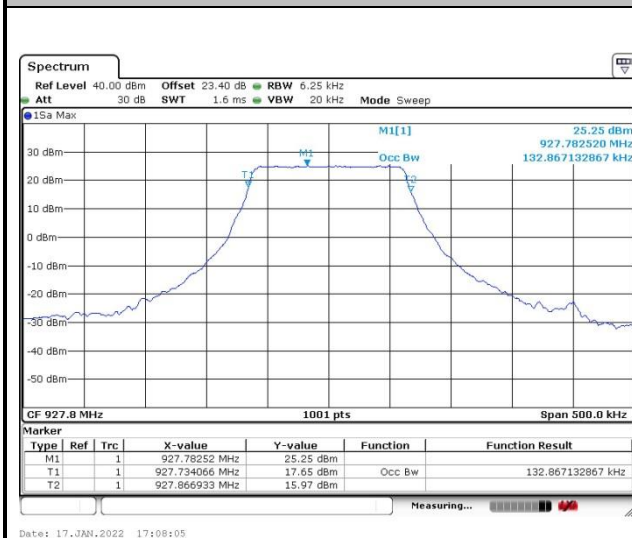


N/A

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<Data Rate: SF9>


99% Occupied Bandwidth on Channel 01

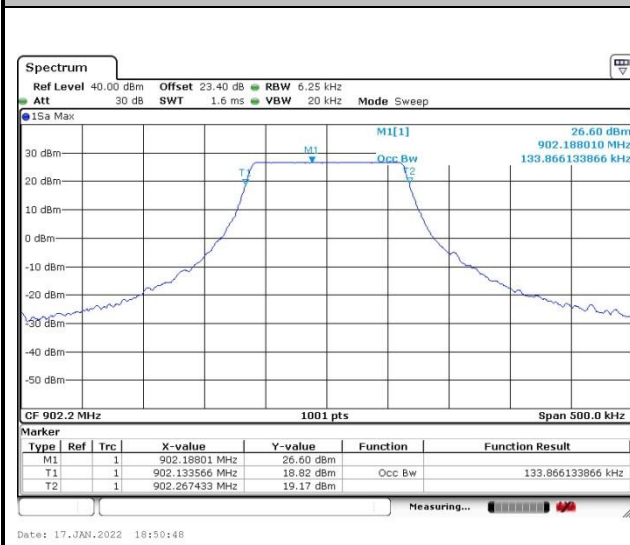

99% Occupied Bandwidth on Channel 65

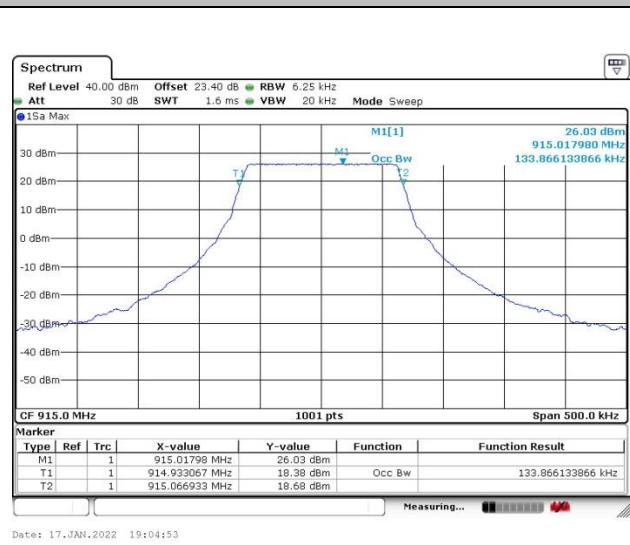

99% Occupied Bandwidth on Channel 129

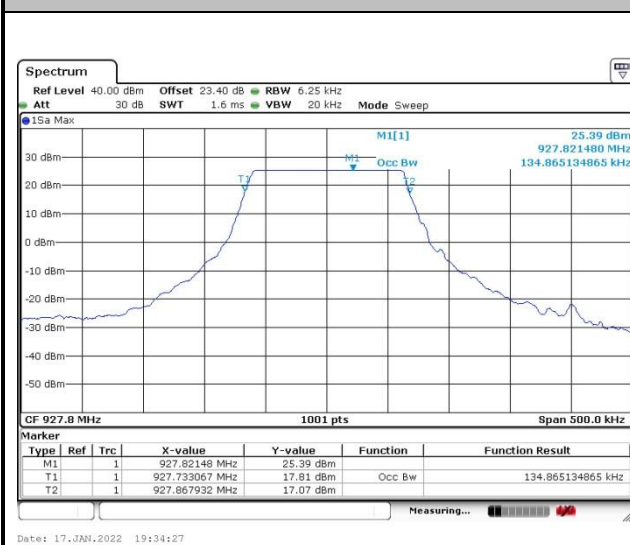


N/A

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<FSK 250Kbps FHSS>


99% Occupied Bandwidth on Channel 01

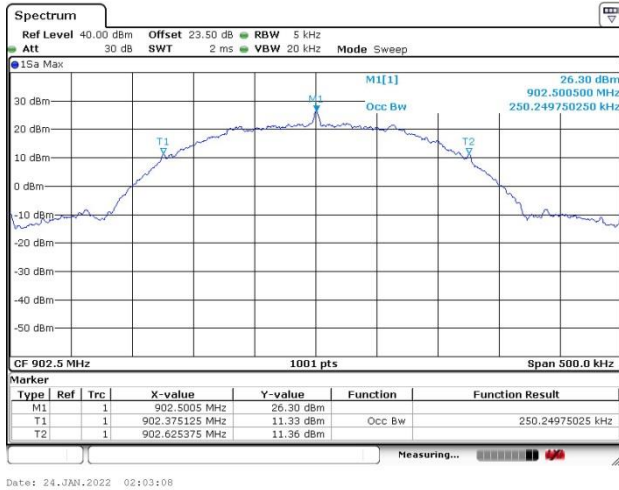

99% Occupied Bandwidth on Channel 26

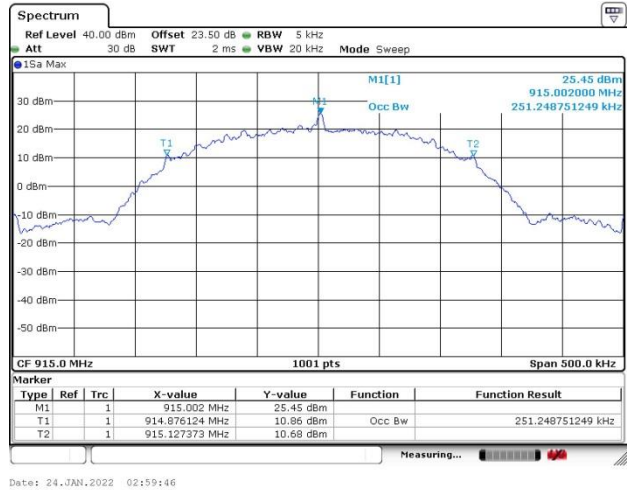

99% Occupied Bandwidth on Channel 51

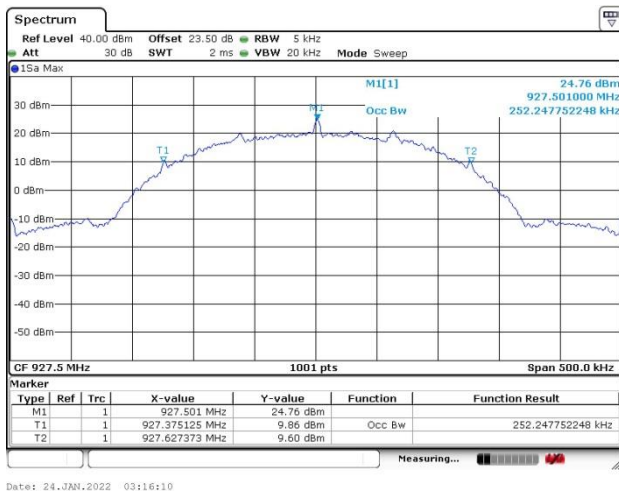

N/A

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

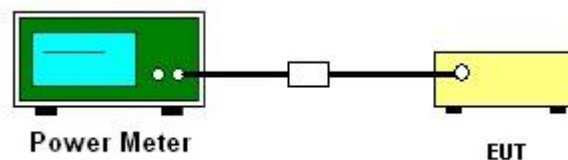

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

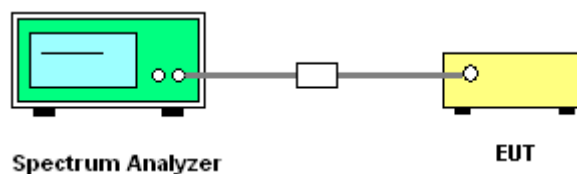





3.6.5 Test Result of Conducted Band Edges

<LoRa 125KHz FHSS>

<Data Rate: SF8>

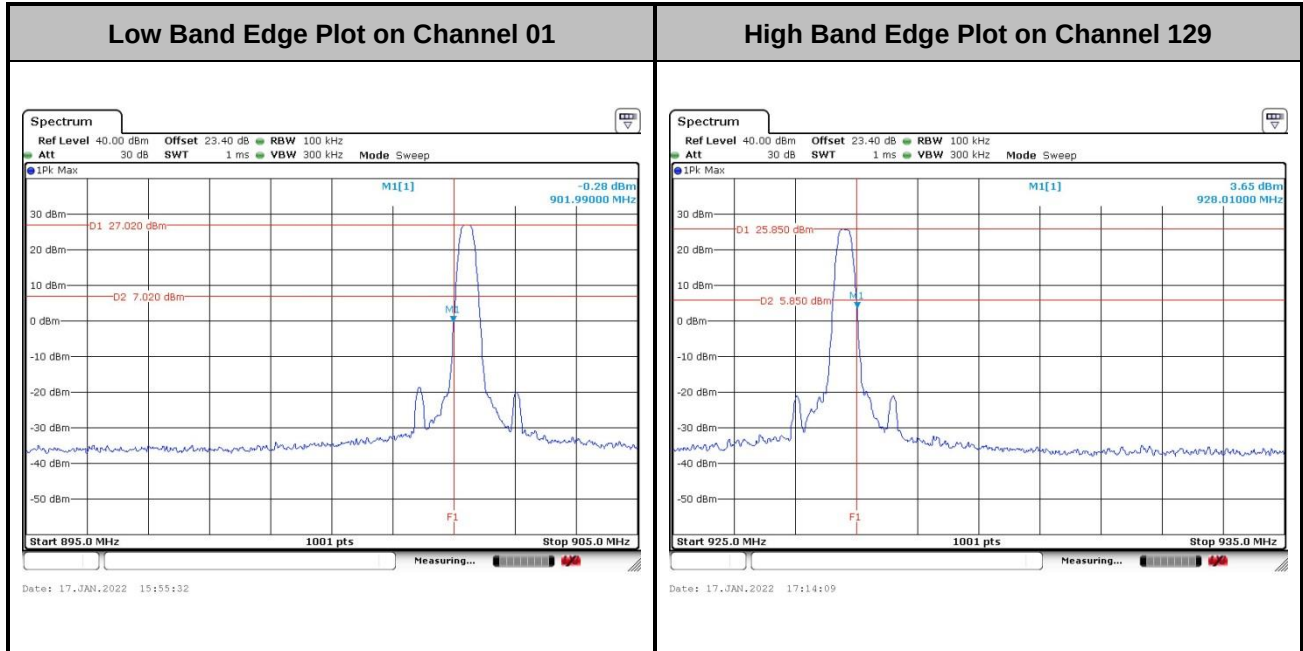


<Data Rate: SF9>

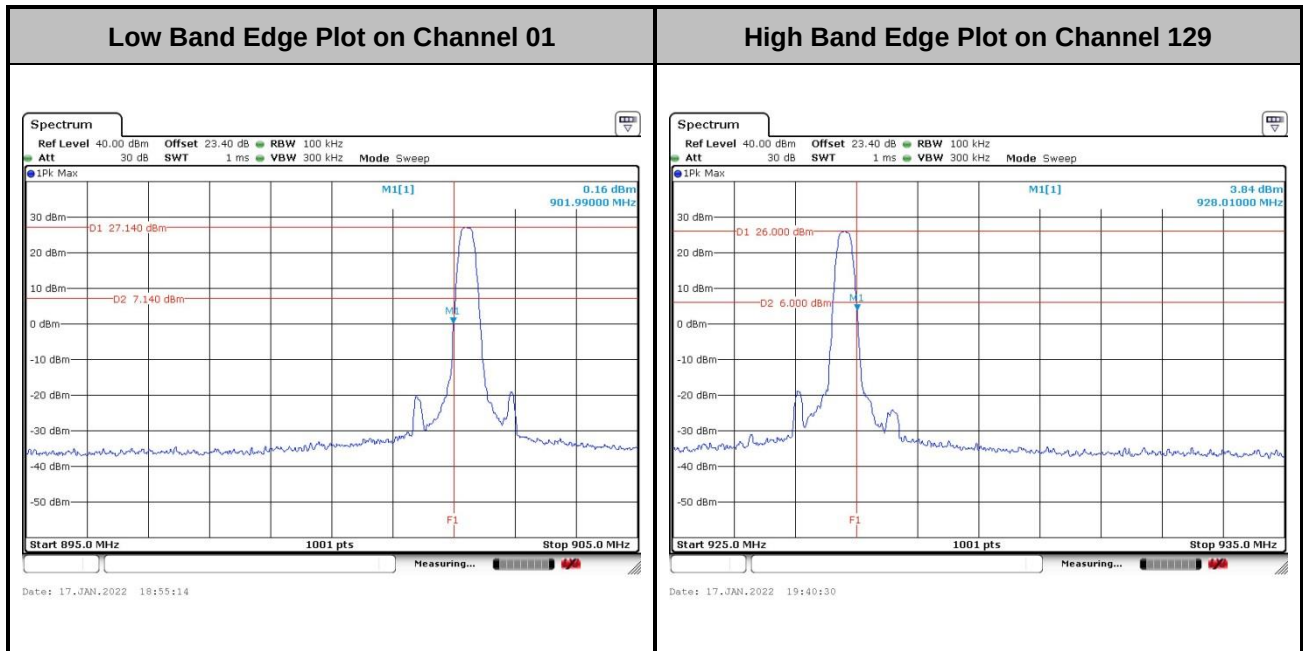




<FSK 250Kbps FHSS>

Low Band Edge Plot on Channel 01

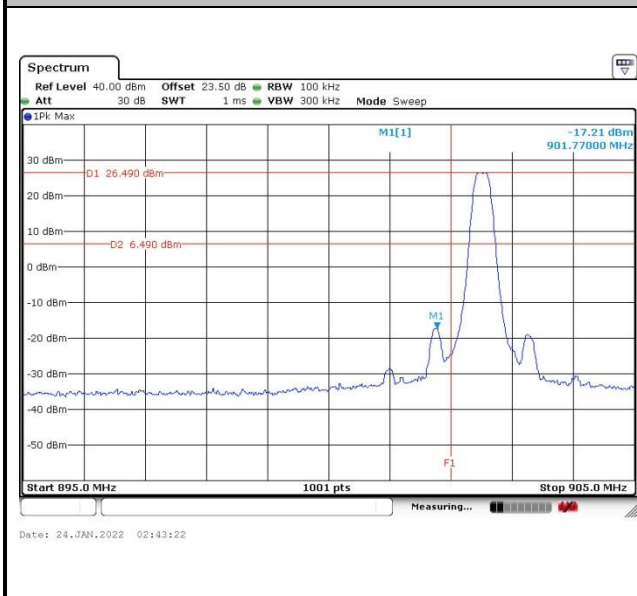


High Band Edge Plot on Channel 51

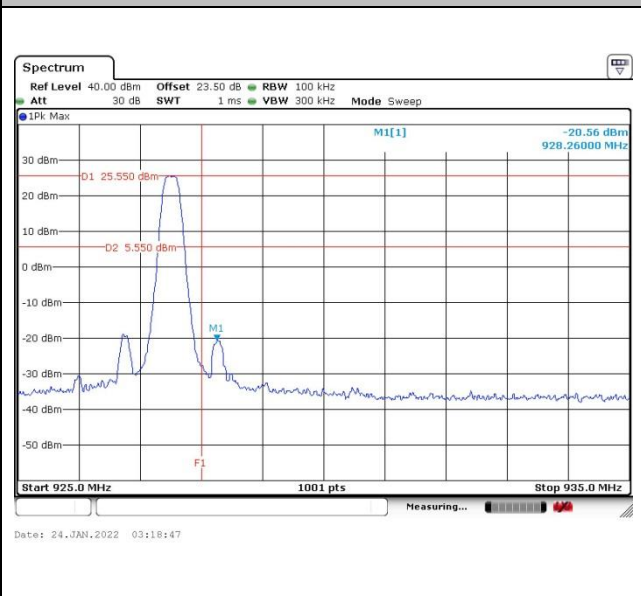





<FSK 250Kbps FHSS>

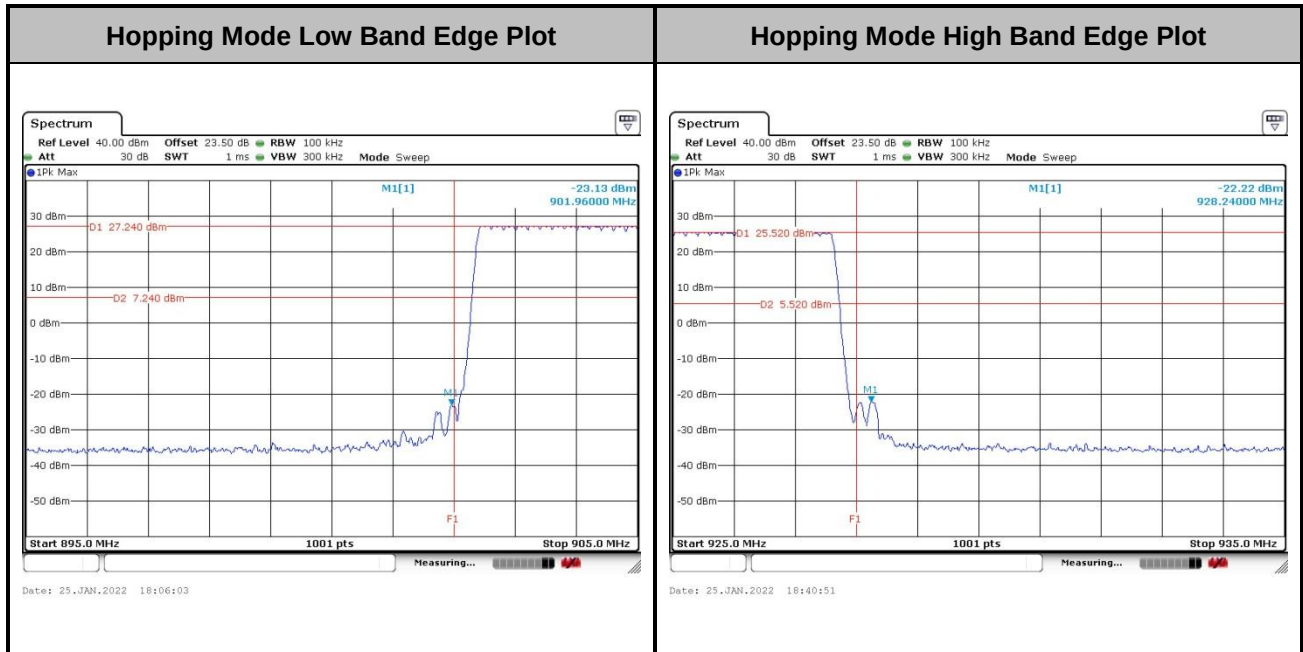

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

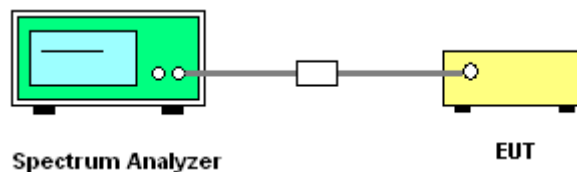




3.7.5 Test Result of Conducted Spurious Emission


<LoRa 125KHz FHSS>

<Data Rate: SF8>


CSE Plot on Ch 01 between 30MHz ~ 10 GHz

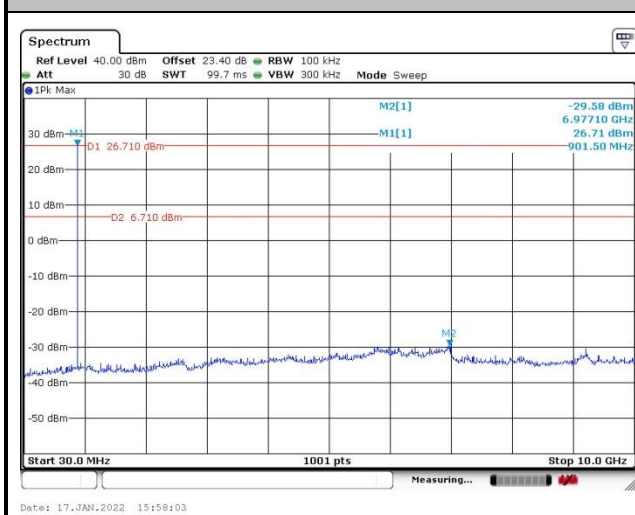

CSE Plot on Ch 65 between 30MHz ~ 10 GHz

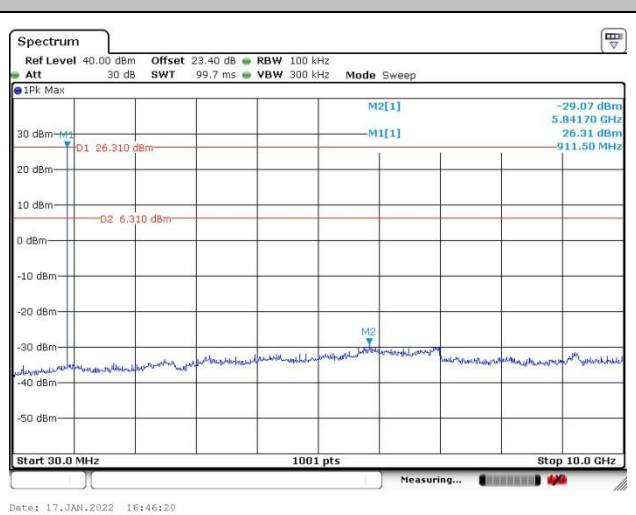

CSE Plot on Ch 129 between 30MHz ~ 10 GHz

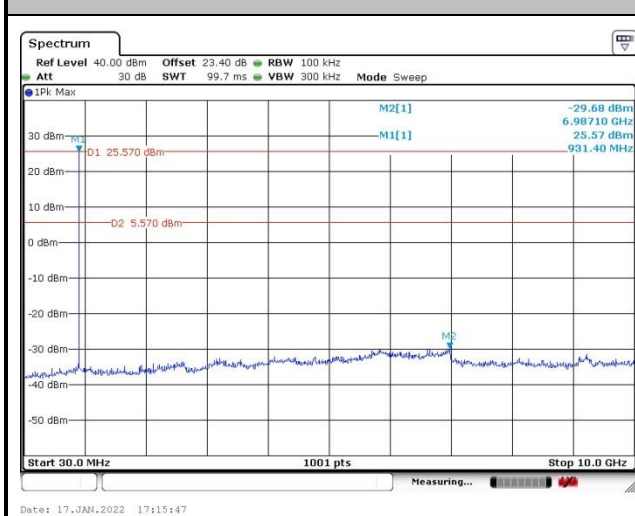


N/A




<Data Rate: SF9>


CSE Plot on Ch 01 between 30MHz ~ 10 GHz

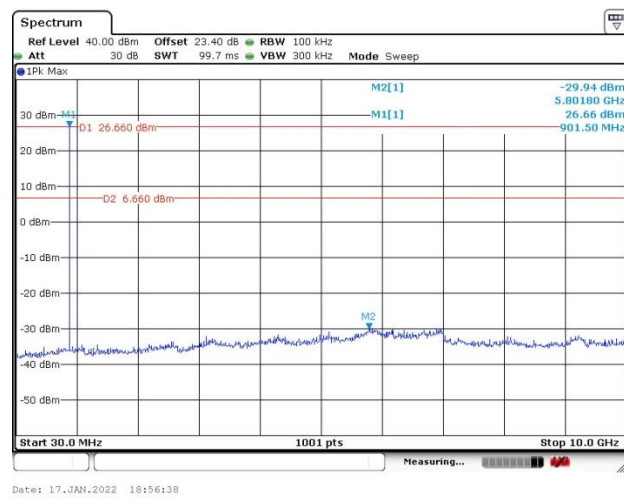

CSE Plot on Ch 65 between 30MHz ~ 10 GHz

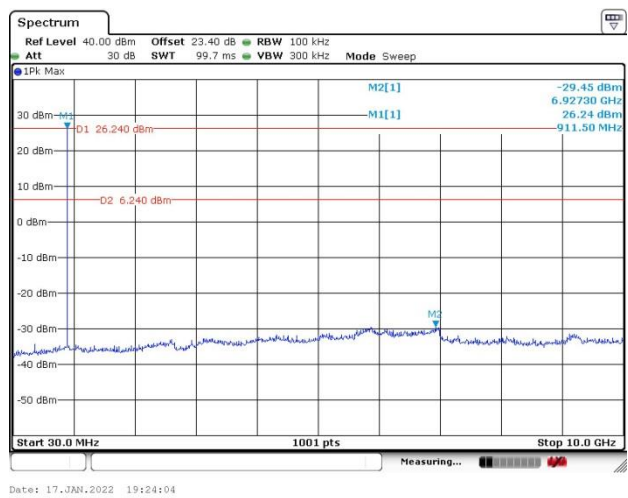

CSE Plot on Ch 129 between 30MHz ~ 10 GHz

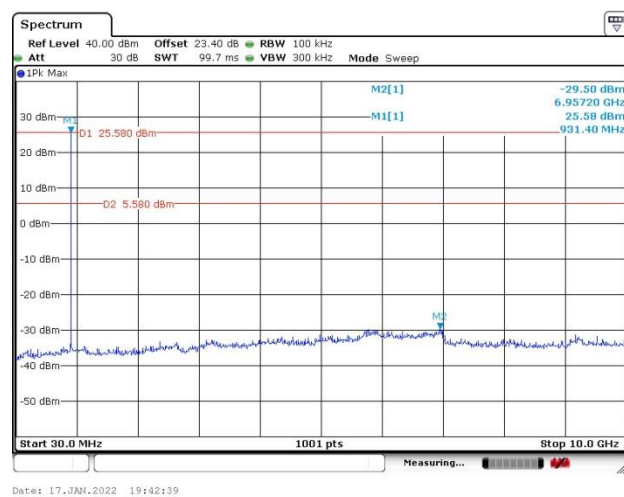


N/A




<FSK 250Kbps FHSS>


CSE Plot on Ch 01 between 30MHz ~ 10 GHz

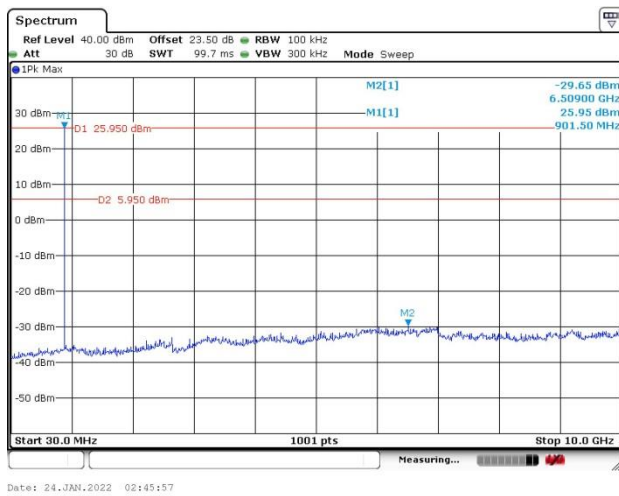

CSE Plot on Ch 26 between 30MHz ~ 10 GHz

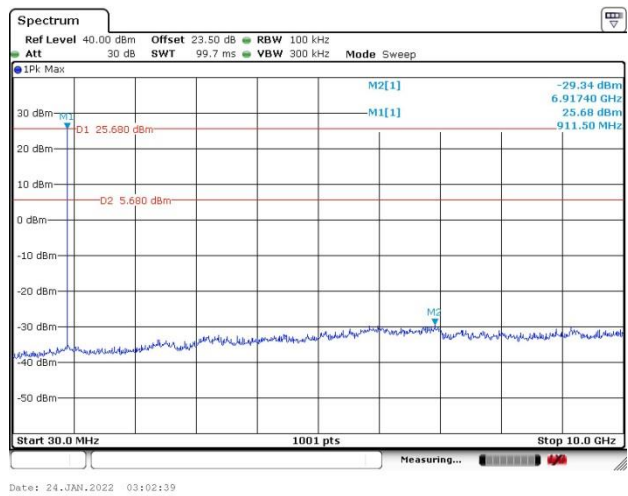

CSE Plot on Ch 51 between 30MHz ~ 10 GHz

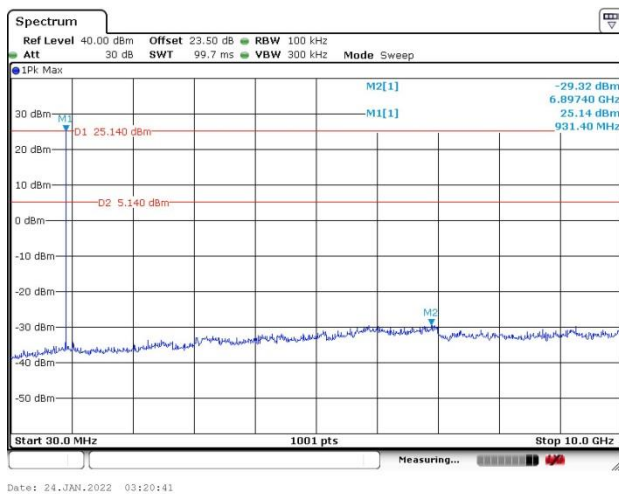

N/A

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring equipment of this test report.


3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$


Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.8.4 Test Setup


For radiated emissions below 30MHz

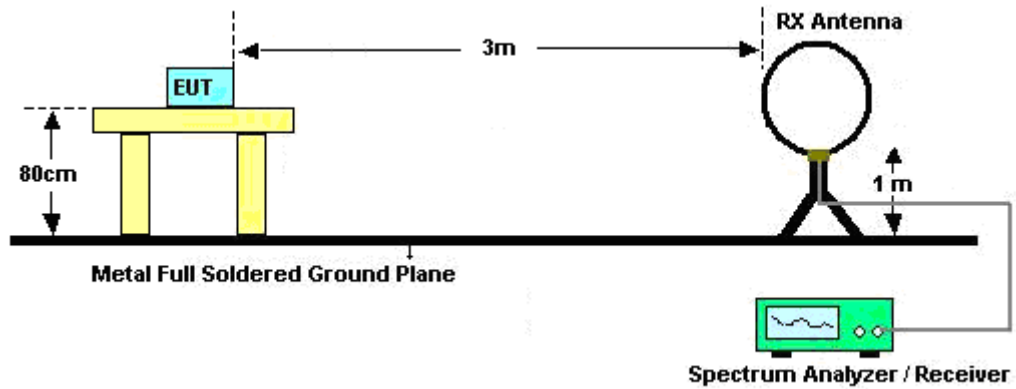

For radiated emissions from 30MHz to 1GHz

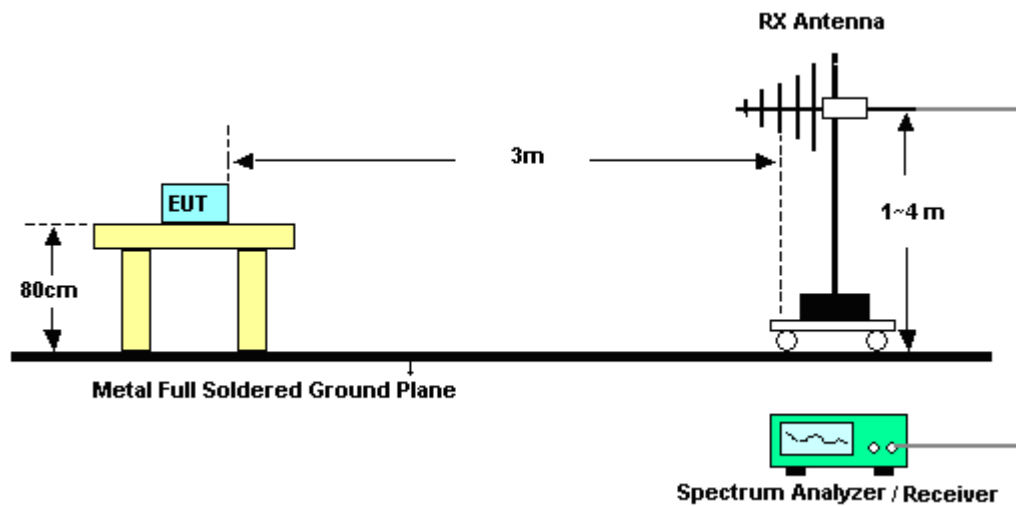

For radiated emissions above 1GHz

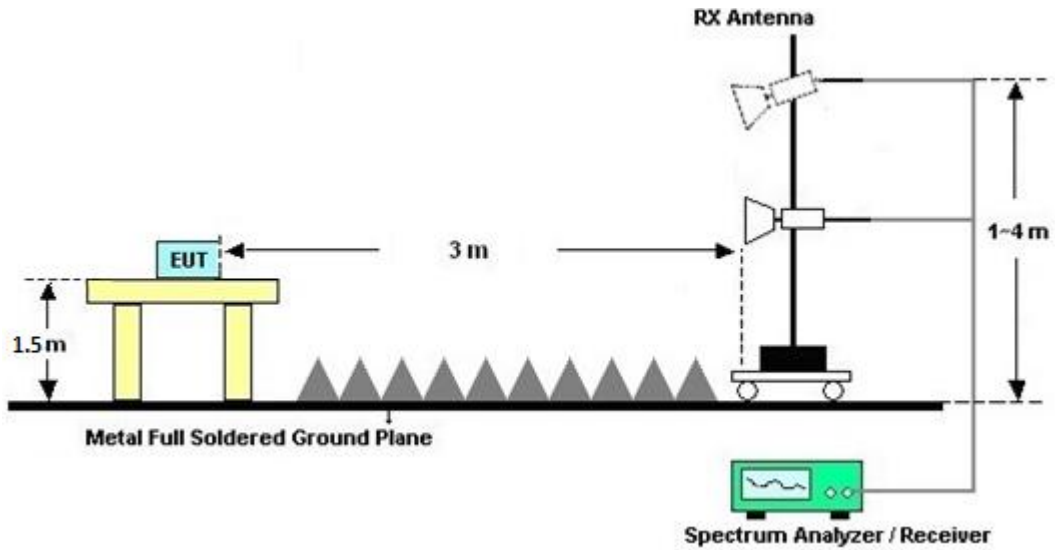

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.8.7 Duty Cycle

Please refer to Appendix E.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

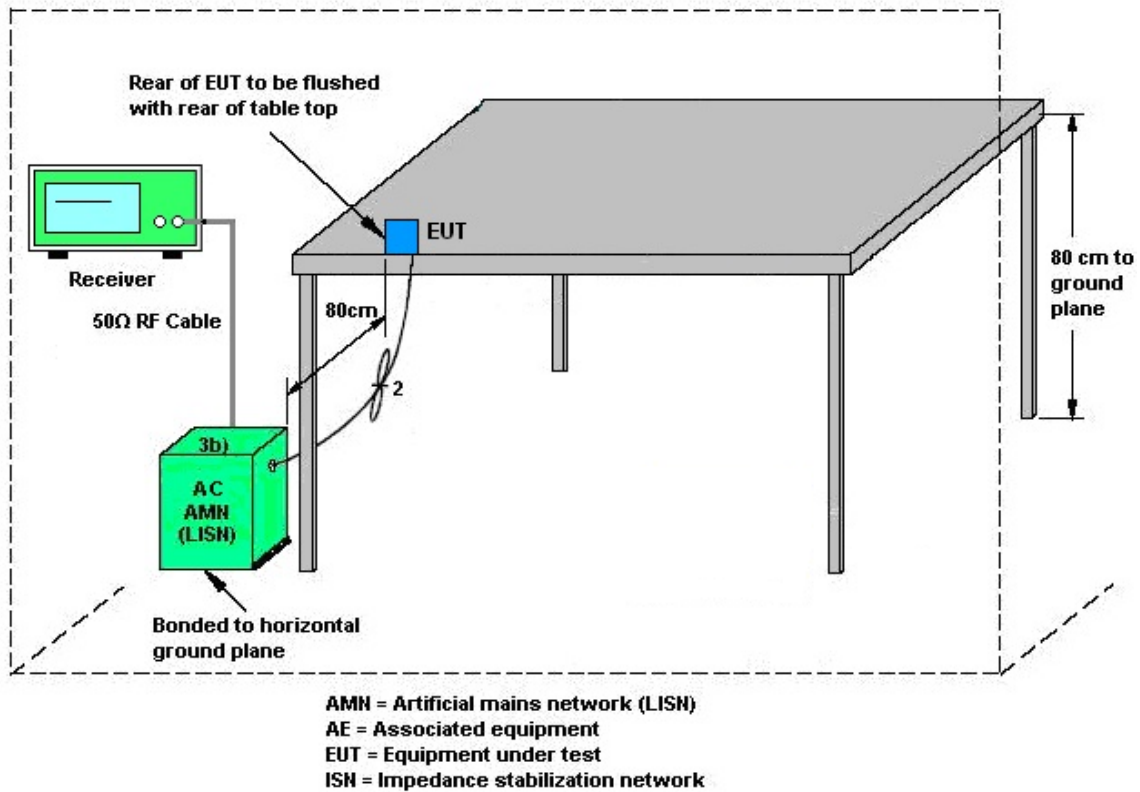

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	TR-32	HE17XB2468	N/A	Mar. 09, 2021	Jan. 15, 2022~ Mar. 07, 2022	Mar. 08, 2022	Conducted (TH02-HY)
Hygrometer	TECPEL	TECPEL	TP210073	N/A	Nov. 16, 2021	Mar. 08, 2022~ Mar. 28, 2022	Nov. 15, 2022	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Jan. 15, 2022~ Mar. 28, 2022	Aug. 29, 2022	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Aug. 01, 2021	Jan. 15, 2022~ Mar. 28, 2022	Jul. 31, 2022	Conducted (TH02-HY)
Power Meter	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 01, 2021	Jan. 15, 2022~ Mar. 28, 2022	Jul. 31, 2022	Conducted (TH02-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1208321 (Box2)	N/A	Jun. 08, 2021	Jan. 15, 2022~ Mar. 28, 2022	Jun. 07, 2022	Conducted (TH02-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 07, 2021	Jan. 09, 2022~ Feb. 23, 2022	Sep. 06, 2022	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01 N-06	47020 & 06	30MHz to 1GHz	Oct. 09, 2021	Jan. 09, 2022~ Feb. 23, 2022	Oct. 08, 2022	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1G~18GHz	Aug. 04, 2021	Jan. 09, 2022~ Feb. 23, 2022	Aug. 03, 2022	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Jul. 05, 2021	Jan. 09, 2022~ Feb. 23, 2022	Jul. 04, 2022	Radiation (03CH16-HY)
Amplifier	EMCI	EMC051845 SE	980729	1-18GHz	Jul. 09, 2021	Jan. 09, 2022~ Feb. 23, 2022	Jul. 08, 2022	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 09, 2021	Jan. 09, 2022~ Feb. 23, 2022	Dec. 08, 2022	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A	MY57290111	3Hz~26.5GHz	Dec. 15, 2021	Jan. 09, 2022~ Feb. 23, 2022	Dec. 14, 2022	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11680/4PE	NA	Aug. 28, 2021	Jan. 09, 2022~ Feb. 23, 2022	Aug. 27, 2022	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY11688/4PE	NA	Aug. 28, 2021	Jan. 09, 2022~ Feb. 23, 2022	Aug. 27, 2022	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300-57 57	NA	Aug. 28, 2021	Jan. 09, 2022~ Feb. 23, 2022	Aug. 27, 2022	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Jan. 09, 2022~ Feb. 23, 2022	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jan. 09, 2022~ Feb. 23, 2022	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 09, 2022~ Feb. 23, 2022	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 09, 2022~ Feb. 23, 2022	N/A	Radiation (03CH16-HY)
Hygrometer	TECPEL	DTM-303B	TP200881	QA-3-031	Sep. 30, 2021	Jan. 09, 2022~ Feb. 23, 2022	Sep. 29, 2022	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 08, 2022	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 08, 2022	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 29, 2021	Mar. 08, 2022	Oct. 28, 2022	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 17, 2021	Mar. 08, 2022	Mar. 16, 2022	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Feb. 16, 2022	Mar. 08, 2022	Feb. 15, 2023	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2021	Mar. 08, 2022	Oct. 20, 2022	Conduction (CO07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Tommy Lee	Temperature:	20-25	°C
Test Date:	2022/1/15~2022/3/28	Relative Humidity:	51-56	%

<Lora 125KHz>

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
LoRa 125KHz	SF8	1	1	902.2	0.154	0.133	0.201	0.1539	Pass
LoRa 125KHz	SF8	1	65	915	0.158	0.133	0.238	0.1578	Pass
LoRa 125KHz	SF8	1	129	927.8	0.157	0.133	0.201	0.1568	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
LoRa 125KHz	129	1	389.35	0.39	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
LoRa 125KHz	1	1	26.45	30.00	Pass
	65	1	26.21	30.00	Pass
	129	1	25.56	30.00	Pass

TEST RESULTS DATA**Average Power Table
(Reporting Only)**

Mod.	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
LoRa 125KHz	1	1	26.39	0.00
	65	1	26.17	0.00
	129	1	25.51	0.00

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
129	> 50	Pass

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
LoRa 125KHz	SF9	1	1	902.2	0.153	0.134	0.229	0.1534	Pass
LoRa 125KHz	SF9	1	65	915	0.159	0.134	0.234	0.1593	Pass
LoRa 125KHz	SF9	1	129	927.8	0.159	0.135	0.259	0.1588	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
LoRa 125KHz	129	1	369.35	0.37	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
LoRa 125KHz	1	1	26.35	30.00	Pass
	65	1	26.12	30.00	Pass
	129	1	25.57	30.00	Pass

TEST RESULTS DATA**Average Power Table
(Reporting Only)**

Mod.	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
LoRa 125KHz	1	1	26.20	0.00
	65	1	26.07	0.00
	129	1	25.52	0.00

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
129	> 50	Pass

<FSK 250Kbps>

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
FSK	250Kbps	1	1	902.5	0.271	0.250	0.510	0.2707	Pass
FSK	250Kbps	1	26	915	0.266	0.251	0.521	0.2657	Pass
FSK	250Kbps	1	51	927.5	0.267	0.252	0.561	0.2667	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
FSK(250Kbps)	51	1.00	364.35	0.36	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
FSK(250Kbps)	1	1	26.58	30.00	Pass
	26	1	26.21	30.00	Pass
	51	1	25.62	30.00	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
FSK(250Kbps)	1	1	26.54	0.46
	26	1	26.18	0.46
	51	1	25.58	0.46

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
51	25	Pass




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 240816
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

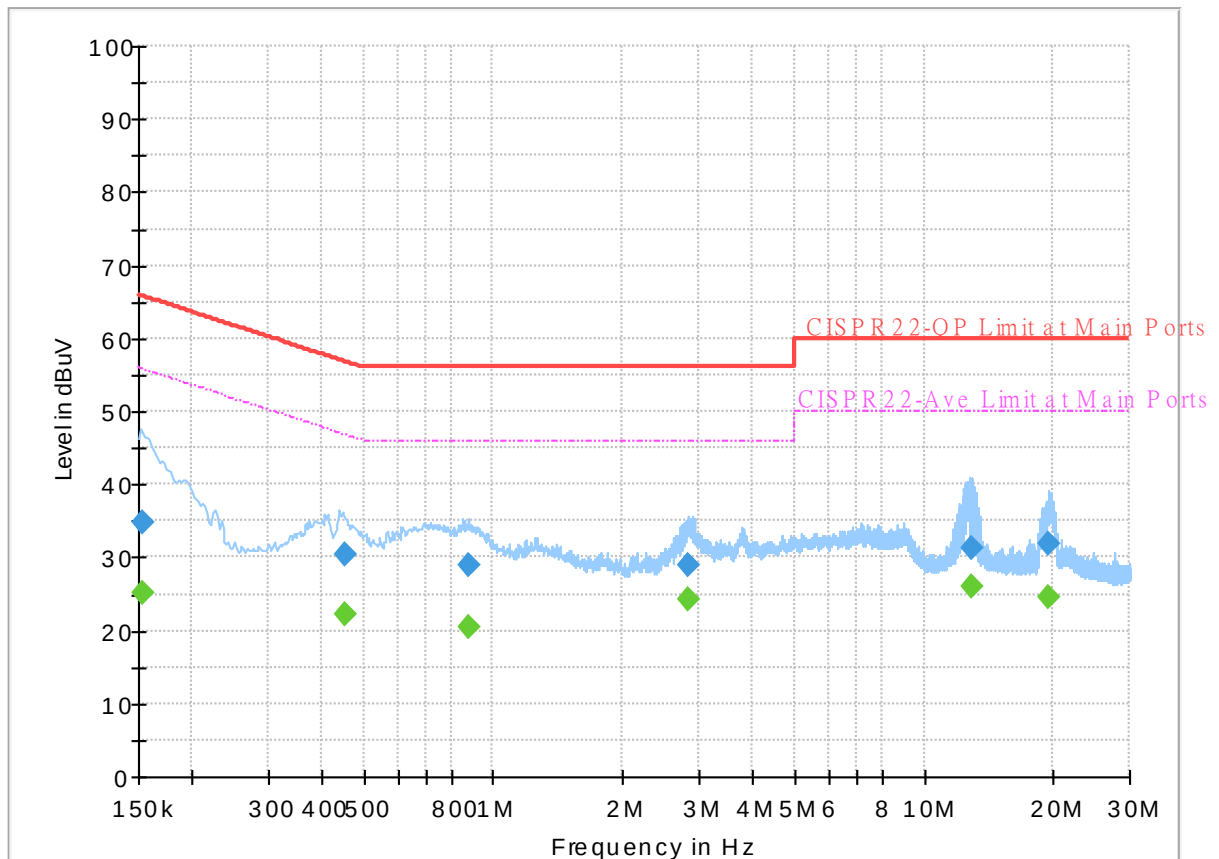


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152700	---	25.19	55.85	30.66	L1	OFF	19.7
0.152700	34.88	---	65.85	30.97	L1	OFF	19.7
0.451500	---	22.31	46.85	24.54	L1	OFF	19.7
0.451500	30.49	---	56.85	26.36	L1	OFF	19.7
0.876660	---	20.60	46.00	25.40	L1	OFF	19.7
0.876660	28.83	---	56.00	27.17	L1	OFF	19.7
2.825970	---	24.39	46.00	21.61	L1	OFF	19.7
2.825970	29.04	---	56.00	26.96	L1	OFF	19.7
12.850800	---	26.11	50.00	23.89	L1	OFF	19.9
12.850800	31.27	---	60.00	28.73	L1	OFF	19.9
19.495140	---	24.53	50.00	25.47	L1	OFF	20.0
19.495140	31.79	---	60.00	28.21	L1	OFF	20.0

EUT Information

Report NO : 240816
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

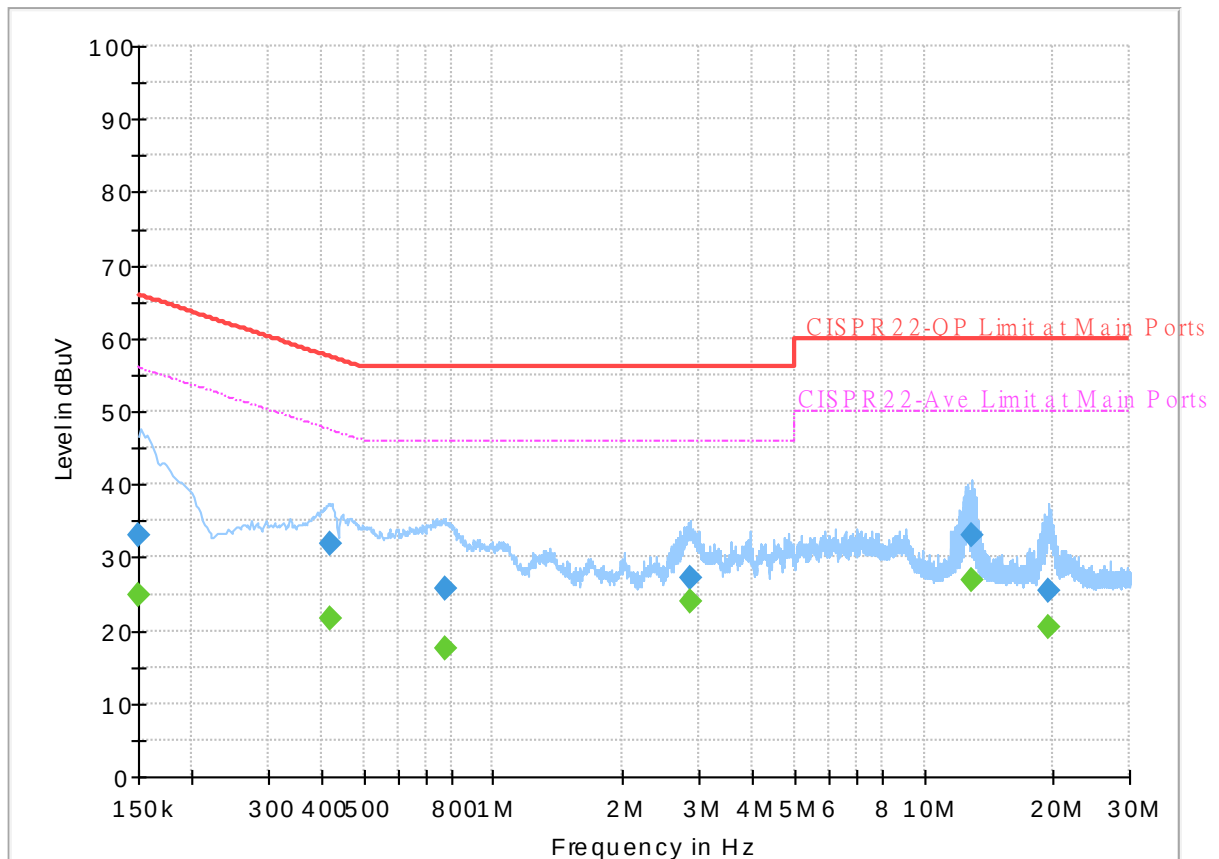

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150743	---	24.90	55.96	31.06	N	OFF	19.7
0.150743	32.96	---	65.96	33.00	N	OFF	19.7
0.417750	---	21.55	47.49	25.94	N	OFF	19.7
0.417750	31.99	---	57.49	25.50	N	OFF	19.7
0.771720	---	17.60	46.00	28.40	N	OFF	19.7
0.771720	25.79	---	56.00	30.21	N	OFF	19.7
2.868360	---	23.95	46.00	22.05	N	OFF	19.7
2.868360	27.14	---	56.00	28.86	N	OFF	19.7
12.862500	---	26.83	50.00	23.17	N	OFF	19.9
12.862500	33.07	---	60.00	26.93	N	OFF	19.9
19.498290	---	20.34	50.00	29.66	N	OFF	19.9
19.498290	25.45	---	60.00	34.55	N	OFF	19.9



Appendix C. Radiated Spurious Emission

Test Engineer :	Karl Hou and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%

902~928MHz

LoRa (125KHz)_SF8 (Harmonic @ 3m)

LoRa	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
LoRa(125KHz)_SF8 Ch01 902.2MHz		1804.4	51.57	-22.43	74	49.3	25.14	7.5	30.37	-	-	P	H
		2706.6	50.43	-23.57	74	42.92	28.3	9.23	30.02	100	204	P	H
		2706.6	38.85	-15.15	54	31.34	28.3	9.23	30.02	100	204	A	H
		3608.8	39.05	-34.95	74	53.87	29.54	10.86	55.22	-	-	P	H
		4511	47.62	-26.38	74	59.17	31.42	11.9	54.87	-	-	P	H
		5413.2	54.56	-19.44	74	63.55	32.9	13.17	55.06	100	106	P	H
		5413.2	52.55	-1.45	54	61.54	32.9	13.17	55.06	100	106	A	H
		8119.8	51.09	-22.91	74	53.64	36.9	16.42	55.87	329	230	P	H
		8119.8	44.9	-9.1	54	47.45	36.9	16.42	55.87	329	230	A	H
		1804.4	46.89	-27.11	74	44.62	25.14	7.5	30.37	-	-	P	V
		2706.6	50.65	-23.35	74	43.14	28.3	9.23	30.02	100	238	P	V
		2706.6	38.88	-15.12	54	31.37	28.3	9.23	30.02	100	238	A	V
		3608.8	42.94	-31.06	74	57.76	29.54	10.86	55.22	-	-	P	V
		4511	44.56	-29.44	74	56.11	31.42	11.9	54.87	-	-	P	V
		5413.2	55.06	-18.94	74	64.05	32.9	13.17	55.06	263	166	P	V
		5413.2	53.1	-0.9	54	62.09	32.9	13.17	55.06	263	166	A	V
		8119.8	51.17	-22.83	74	53.72	36.9	16.42	55.87	100	134	P	V
		8119.8	45.29	-8.71	54	47.84	36.9	16.42	55.87	100	134	A	V



LoRa	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
LoRa(125K Hz)_SF8 Ch65 915MHz		1830	57.98	-16.02	74	55.43	25.34	7.56	30.35	-	-	P	H
		2745	50.69	-23.31	74	43.09	28.3	9.31	30.01	100	170	P	H
		2745	38.69	-15.31	54	31.09	28.3	9.31	30.01	100	170	A	H
		3660	41.49	-32.51	74	55.96	29.7	10.98	55.15	-	-	P	H
		4575	50.38	-23.62	74	61.68	31.5	12.15	54.95	100	1116	P	H
		4575	47.65	-6.35	54	58.95	31.5	12.15	54.95	100	1116	A	H
		5490	57.74	-16.26	74	66.67	32.82	13.23	54.98	-	-	P	H
		7320	53.09	-20.91	74	56.1	36.76	15.88	55.65	400	241	P	H
		7320	47.86	-6.14	54	50.87	36.76	15.88	55.65	400	241	A	H
		8235	47.87	-26.13	74	50.57	36.94	16.27	55.91	-	-	P	H
		1830	54.86	-19.14	74	52.31	25.34	7.56	30.35	-	-	P	V
		2745	50.89	-23.11	74	43.29	28.3	9.31	30.01	100	241	P	V
		2745	39.17	-14.83	54	31.57	28.3	9.31	30.01	100	241	A	V
		3660	43.88	-30.12	74	58.35	29.7	10.98	55.15	-	-	P	V
		4575	46.06	-27.94	74	57.36	31.5	12.15	54.95	-	-	P	V
		5490	56.49	-17.51	74	65.42	32.82	13.23	54.98	-	-	P	V
		7320	53.25	-20.75	74	56.26	36.76	15.88	55.65	325	221	P	V
		7320	47.78	-6.22	54	50.79	36.76	15.88	55.65	325	221	A	V
		8235	46.1	-27.9	74	48.8	36.94	16.27	55.91	-	-	P	V



LoRa	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
LoRa(125K Hz)_SF8 Ch129 927.8MHz		1855.6	61.45	-12.55	74	58.6	25.54	7.63	30.32	-	-	P	H
		2783.4	50.98	-23.02	74	43.17	28.43	9.39	30.01	200	158	P	H
		2783.4	39.34	-14.66	54	31.53	28.43	9.39	30.01	200	158	A	H
		3711.2	42.64	-31.36	74	56.89	29.74	11.1	55.09	-	-	P	H
		4639	47.04	-26.96	74	58.22	31.58	12.28	55.04	-	-	P	H
		5566.8	58.27	-15.73	74	67.07	32.93	13.29	55.02	-	-	P	H
		7422.4	53.48	-20.52	74	56.64	36.26	16.25	55.67	320	275	P	H
		7422.4	49.45	-4.55	54	52.61	36.26	16.25	55.67	320	275	A	H
		8350.2	46.46	-27.54	74	49.02	37.1	16.3	55.96	-	-	P	H
		1855.6	60.74	-13.26	74	57.89	25.54	7.63	30.32	-	-	P	V
		2783.4	51.12	-22.88	74	43.31	28.43	9.39	30.01	100	244	P	V
		2783.4	39.59	-14.41	54	31.78	28.43	9.39	30.01	100	244	A	V
		3711.2	42.19	-31.81	74	56.44	29.74	11.1	55.09	-	-	P	V
		4639	44.16	-29.84	74	55.34	31.58	12.28	55.04	-	-	P	V
		5566.8	57.25	-16.75	74	66.05	32.93	13.29	55.02	-	-	P	V
		7422.4	53	-21	74	56.16	36.26	16.25	55.67	100	324	P	V
		7422.4	48.69	-5.31	54	51.85	36.26	16.25	55.67	100	324	A	V
		8348	47.06	-26.94	74	49.63	37.09	16.3	55.96	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

LoRa (125KHz)_SF8

LoRa	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
LoRa(125KHz)_SF8 Ch01 902.2MHz LF		30	32.17	-7.83	40	29.24	24.63	10.62	32.32	-	-	P	H
		159.01	32.58	-10.92	43.5	35.93	16.67	12.23	32.25	-	-	P	H
		256.98	34.95	-11.05	46	34.83	19.57	12.8	32.25	-	-	P	H
		430.61	35.03	-10.97	46	30.96	23.01	13.47	32.41	-	-	P	H
		609.09	36.68	-9.32	46	29.38	25.63	14.24	32.57	-	-	P	H
		902.2	126.35	-	-	113.69	29.04	15.15	31.53	161	289	P	H
		968.96	45.46	-8.54	54	30.16	30.97	15.36	31.03	-	-	P	H
													H
													H
													H
													H
													H
													V
		30	33.55	-6.45	40	30.62	24.63	10.62	32.32	-	-	P	V
		94.02	33.66	-9.84	43.5	39.39	15.03	11.55	32.31	-	-	P	V
		265.71	30.41	-15.59	46	30	19.83	12.84	32.26	-	-	P	V
		478.14	35.55	-10.45	46	30.59	23.65	13.69	32.38	-	-	P	V
		612.97	36.74	-9.26	46	29.33	25.72	14.25	32.56	-	-	P	V
		902.2	119.38	-	-	106.72	29.04	15.15	31.53	100	358	P	V
		974.78	45.75	-8.25	54	30.56	30.81	15.36	30.98	-	-	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. Non restricted band limit is radio frequency level down 20db and the result which was 20dB lower than the limit line was not reported. 4. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												

LoRa	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
LoRa(125KHz)_SF8 Ch65 915MHz LF		30	31.69	-8.31	40	28.76	24.63	10.62	32.32	-	-	P	H
		94.02	32.13	-11.37	43.5	37.86	15.03	11.55	32.31	-	-	P	H
		241.46	33.19	-12.81	46	35.2	17.51	12.72	32.24	-	-	P	H
		420.91	34.21	-11.79	46	30.29	22.9	13.43	32.41	-	-	P	H
		611.03	37.2	-8.8	46	29.86	25.67	14.24	32.57	-	-	P	H
		915	126.66	-	-	113.55	29.34	15.21	31.44	152	300	P	H
		961.2	45.68	-8.32	54	30.51	30.92	15.35	31.1	-	-	P	H
													H
													H
													H
													H
													H
													V
		30	33.53	-6.47	40	30.6	24.63	10.62	32.32	-	-	P	V
		94.02	35.09	-8.41	43.5	40.82	15.03	11.55	32.31	-	-	P	V
		324.88	31.17	-14.83	46	30.67	19.71	13.05	32.26	-	-	P	V
		479.11	35.34	-10.66	46	30.37	23.66	13.69	32.38	-	-	P	V
		608.12	36.8	-9.2	46	29.52	25.62	14.23	32.57	-	-	P	V
		915	120.86	-	-	107.75	29.34	15.21	31.44	110	254	P	V
		970.9	45.2	-8.8	54	29.91	30.94	15.37	31.02	-	-	P	V
													V
													V
												V	
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. Non restricted band limit is radio frequency level down 20db and the result which was 20dB lower than the limit line was not reported.												
	4. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												

[illegible]



902~928MHz

FSK 250Kbps (Harmonic @ 3m)

FSK	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
FSK 250Kbps CH01 902.5MHz		1805	61.65	-12.35	74	59.38	25.14	7.5	30.37	-	-	P	H
		2707.5	50.23	-23.77	74	42.72	28.3	9.23	30.02	100	140	P	H
		2707.5	38.42	-15.58	54	30.91	28.3	9.23	30.02	100	140	A	H
		3610	37.75	-36.25	74	52.57	29.54	10.86	55.22	-	-	P	H
		4512.5	46.41	-27.59	74	57.97	31.42	11.9	54.88	-	-	P	V
		5415	55.48	-18.52	74	64.47	32.9	13.17	55.06	100	114	P	V
		5415	53.88	-0.12	54	62.87	32.9	13.17	55.06	100	114	A	V
		7220	46.29	-27.71	74	49.94	36.66	15.33	55.64	-	-	P	V
		8122.5	46.51	-27.49	74	49.07	36.9	16.41	55.87	-	-	P	
		1805	58.16	-15.84	74	55.89	25.14	7.5	30.37	-	-	P	V
		2708	50.51	-23.49	74	43	28.3	9.23	30.02	300	15	P	V
		2708	38.62	-15.38	54	31.11	28.3	9.23	30.02	300	15	A	V
		3610	41.49	-32.51	74	56.31	29.54	10.86	55.22	-	-	P	V
		4512.5	44.12	-29.88	74	55.68	31.42	11.9	54.88	-	-	P	V
		5415	55.15	-18.85	74	64.14	32.9	13.17	55.06	215	157	P	V
		5415	53.52	-0.48	54	62.51	32.9	13.17	55.06	215	157	A	V
		7220	45.24	-28.76	74	48.89	36.66	15.33	55.64	-	-	P	V
		8122.5	46.25	-27.75	74	48.81	36.9	16.41	55.87	-	-	P	V



FSK	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
FSK 250Kbps CH26 915MHz		1830	60.44	-13.56	74	57.89	25.34	7.56	30.35	-	-	P	H
		2745	51.07	-22.93	74	43.47	28.3	9.31	30.01	100	141	P	H
		2745	40.35	-13.65	54	32.75	28.3	9.31	30.01	100	141	A	H
		3660	41.89	-32.11	74	56.36	29.7	10.98	55.15	-	-	P	H
		4575	50.98	-23.02	74	62.28	31.5	12.15	54.95	100	115	P	H
		4575	48.56	-5.44	54	59.86	31.5	12.15	54.95	100	115	A	H
		5490	55.53	-18.47	74	64.46	32.82	13.23	54.98	-	-	P	H
		7320	54.41	-19.59	74	57.42	36.76	15.88	55.65	225	238	P	H
		7320	50.62	-3.38	54	53.63	36.76	15.88	55.65	225	238	A	H
		8235	51.22	-22.78	74	53.92	36.94	16.27	55.91	356	243	P	H
		8235	45.8	-8.2	54	48.5	36.94	16.27	55.91	356	243	A	H
		1830	60.2	-13.8	74	57.65	25.34	7.56	30.35	-	-	P	V
		2745	50.45	-23.55	74	42.85	28.3	9.31	30.01	300	358	P	V
		2745	40.09	-13.91	54	32.49	28.3	9.31	30.01	300	358	A	V
		3660	43.97	-30.03	74	58.44	29.7	10.98	55.15	-	-	P	V
		4575	45.38	-28.62	74	56.68	31.5	12.15	54.95	-	-	P	V
		5490	56.07	-17.93	74	65	32.82	13.23	54.98	-	-	P	V
		7320	53.57	-20.43	74	56.58	36.76	15.88	55.65	337	217	P	V
		7320	48.7	-5.3	54	51.71	36.76	15.88	55.65	337	217	A	V
		8235	50.67	-23.33	74	53.37	36.94	16.27	55.91	106	349	P	V
		8235	44.24	-9.76	54	46.94	36.94	16.27	55.91	106	349	A	V



FSK	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
FSK 250Kbps CH51 927.5MHz		1855	63.78	-10.22	74	60.93	25.54	7.63	30.32	-	-	P	H
		2782.5	50.85	-23.15	74	43.04	28.43	9.39	30.01	100	157	P	H
		2782.5	39.1	-14.9	54	31.29	28.43	9.39	30.01	100	157	A	H
		3710	42.31	-31.69	74	56.56	29.74	11.1	55.09	-	-	P	H
		4637.5	45.08	-28.92	74	56.25	31.58	12.28	55.03	-	-	P	H
		5565	57.91	-16.09	74	66.72	32.92	13.28	55.01	-	-	P	H
		7420	54.52	-19.48	74	57.68	36.26	16.25	55.67	394	269	P	H
		7420	51.2	-2.8	54	54.36	36.26	16.25	55.67	394	269	A	H
		8347.5	46.07	-27.93	74	48.64	37.09	16.3	55.96	-	-	P	H
		1855	62.85	-11.15	74	60	25.54	7.63	30.32	-	-	P	V
		2782.5	51.27	-22.73	74	43.46	28.43	9.39	30.01	100	235	P	V
		2782.5	39.72	-14.28	54	31.91	28.43	9.39	30.01	100	235	A	V
		3710	41.72	-32.28	74	55.97	29.74	11.1	55.09	-	-	P	V
		4637.5	43.85	-30.15	74	55.02	31.58	12.28	55.03	-	-	P	V
		5565	56.16	-17.84	74	64.97	32.92	13.28	55.01	-	-	P	V
		7420	53.31	-20.69	74	56.47	36.26	16.25	55.67	304	346	P	V
		7420	49.6	-4.4	54	52.76	36.26	16.25	55.67	304	346	A	V
		8347.5	47.23	-26.77	74	49.8	37.09	16.3	55.96	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

FSK 250Kbps

FSK	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
FSK 250Kbps CH01 902.5MHz LF		30	31.46	-8.54	40	28.53	24.63	10.62	32.32	-	-	P	H
		93.05	31.05	-12.45	43.5	36.87	14.94	11.55	32.31	-	-	P	H
		161.92	30.29	-13.21	43.5	33.93	16.37	12.24	32.25	-	-	P	H
		455.83	35.78	-10.22	46	31.27	23.35	13.58	32.42	-	-	P	H
		609.09	36.66	-9.34	46	29.36	25.63	14.24	32.57	-	-	P	H
		902.5	127.31	-	-	114.65	29.04	15.15	31.53	100	293	P	H
		988.36	45.57	-8.43	54	30.5	30.55	15.38	30.86	-	-	P	H
													H
													H
													H
													H
													H
													V
		30	33.39	-6.61	40	30.46	24.63	10.62	32.32	-	-	P	V
		94.02	34.24	-9.26	43.5	39.97	15.03	11.55	32.31	-	-	P	V
		254.07	31.2	-14.8	46	31.52	19.14	12.78	32.24	-	-	P	V
		492.69	35.35	-10.65	46	30.04	23.91	13.76	32.36	-	-	P	V
		611.03	37.15	-8.85	46	29.81	25.67	14.24	32.57	-	-	P	V
		902.5	119.06	-	-	106.38	29.05	15.15	31.52	104	245	P	V
		967.99	44.9	-9.1	54	29.61	30.97	15.36	31.04	-	-	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. Non restricted band limit is radio frequency level down 20db and the result which was 20dB lower than the limit line was not reported. 4. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												

[illegible]

[illegible]



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

LoRa	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
LoRa CH 01 902.2MHz		910	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		910	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 910MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 910MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Karl Hou and Andy Yang	Temperature :	20~25°C
		Relative Humidity :	50~60%

902~928MHz

LoRa (125KHz)_SF8 (Harmonic @ 3m)

LoRa	902~928MHz Harmonic @ 3m	
	LoRa(125KHz)_SF8 Ch01 902.2MHz	
	Horizontal	Vertical
Peak Avg.	Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 HORIZONTAL	Site : 03CH16-HY Condition : PEAK_74 3m 9120D_02114_210804 VERTICAL





LoRa	902~928MHz Harmonic @ 3m	
	LoRa(125KHz)_SF8 Ch65 915MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2022-02-11 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL	Level (dBuV/m) Date: 2022-02-11 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL





LoRa	902~928MHz Harmonic @ 3m	
	LoRa(125KHz)_SF8 Ch129 927.8MHz	
	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2022-02-17 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL	Level (dBuV/m) Date: 2022-02-17 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL



Emission below 1GHz
LoRa (125KHz)_SF8

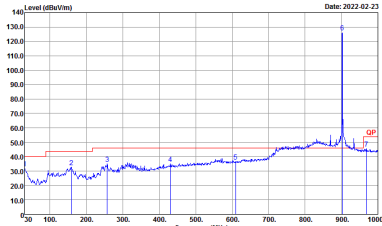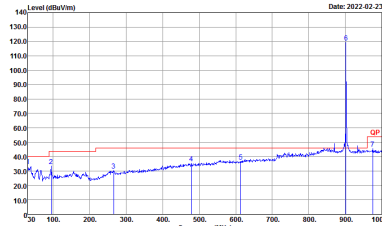LoRa	902~928MHz	
	LoRa(125KHz)_SF8 Ch01 902.2MHz LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH16-14V Condition : QP 3m 81LOG_47020_211009 HORIZONTAL	 Site : 03CH16-14V Condition : QP 3m 81LOG_47020_211009 VERTICAL

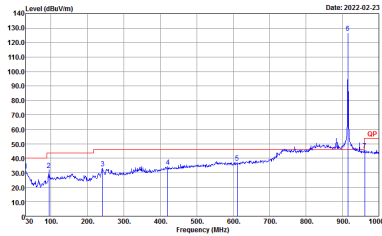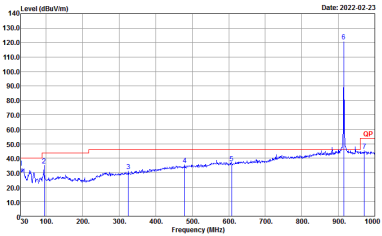

LoRa	902~928MHz	
	LoRa(125KHz)_SF8 Ch65 915MHz LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH16-HY Condition : QP 3m 81LOG_47020_211009 HORIZONTAL	 Site : 03CH16-HY Condition : QP 3m 81LOG_47020_211009 VERTICAL

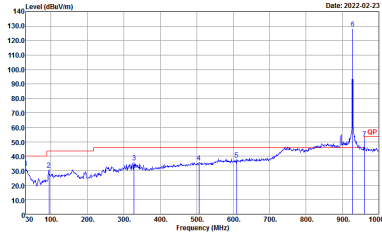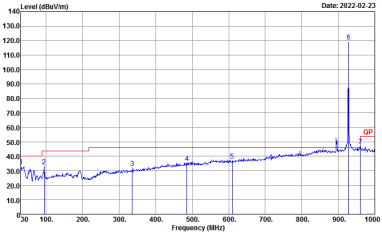

LoRa	902~928MHz	
	LoRa(125KHz)_SF8 Ch129 927.8MHz LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH16-HY Condition : QP 3m 81LOG_47020_211009 HORIZONTAL	 Site : 03CH16-HY Condition : QP 3m 81LOG_47020_211009 VERTICAL



902~928MHz

FSK 250Kbps (Harmonic @ 3m)

FSK	902~928MHz Harmonic @ 3m	
	FSK 250Kbps CH01 902.5MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2022-02-17 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL	Level (dBuV/m) Date: 2022-02-17 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL





FSK	902~928MHz Harmonic @ 3m	
	FSK 250Kbps CH26 915MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2022-02-17 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL	Level (dBuV/m) Date: 2022-02-17 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL



FSK	902~928MHz Harmonic @ 3m	
	FSK 250Kbps CH51 927.5MHz	
	Horizontal	Vertical
Peak	Level (dBu/Vrms) Date: 2022-02-23 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 HORIZONTAL	Level (dBu/Vrms) Date: 2022-02-23 Site : 03CH16-HY Condition : PEAK_74 3m 91200_02114_210804 VERTICAL

Emission below 1GHz



FSK 250Kbps

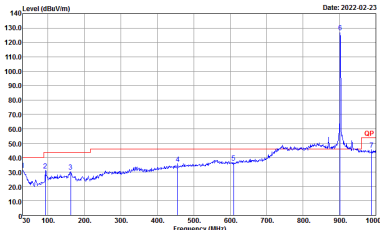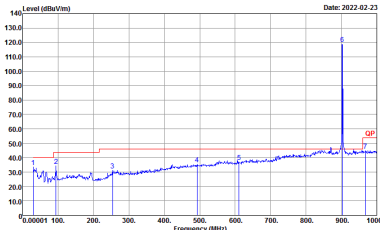FSK	902~928MHz	
	FSK 250Kbps CH01 902.5MHz LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH16-HY Condition : QP 3m B1106_47020_211009 HORIZONTAL	 Site : 03CH16-HY Condition : QP 3m B1106_47020_211009 VERTICAL



LoRa	902~928MHz	
	FSK 250Kbps CH26 915MHz LF	
	Horizontal	Vertical
QP / Peak	Level (dBu/Vrms) Date: 2022-02-23 Site : 03CH16-HY Condition : QP 3m 81LOG_47020_211009 HORIZONTAL	Level (dBu/Vrms) Date: 2022-02-23 Site : 03CH16-HY Condition : QP 3m 81LOG_47020_211009 VERTICAL

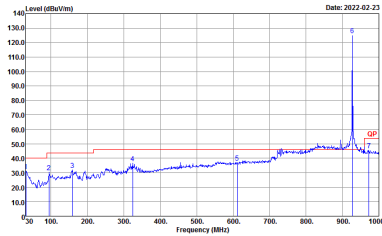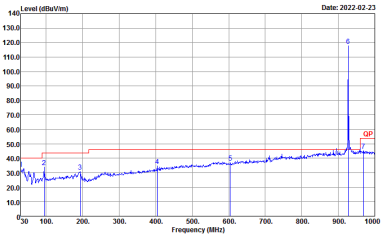

LoRa	902~928MHz	
	FSK 250Kbps CH51 927.5MHz LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH16-HY Condition : QP 3m 81LOG_47020_211009 HORIZONTAL	 Site : 03CH16-HY Condition : QP 3m 81LOG_47020_211009 VERTICAL



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
LoRa (125KHz)_SF8	100.00	-	-	10Hz
FSK 250Kbps	72.93	1980	0.51	1kHz

