

# TEST REPORT

**Application No.:** HKEM2105000492AT  
**Applicant:** Meizhou Guo Wei Electronics Co., Ltd.  
**Address of Applicant:** ADI Section, Economic Development Area, Dongsheng Industrial District, Meizhou, Guangdong, China  
**Equipment Under Test (EUT):**  
**EUT Name:** Video baby monitor  
**Model No.:** VM483BU, VM482BU, VM482ANXLBU  
**Additional Model:** Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.  
**FCC ID:** 2ARRB-VM483BU  
**IC:** 20353-VM483BU  
**HVIN:** VM483BU  
**Standard(s) :** 47 CFR Part 15 Subpart C, 2020  
RSS-247 Issue 2, February 2017  
RSS-Gen: Issue 5, Amdt 2019  
**Date of Receipt:** 2021-05-20  
**Date of Test:** 2021-05-24 to 2021-06-04  
**Date of Issue:** 2021-06-07

|                     |              |
|---------------------|--------------|
| <b>Test Result:</b> | <b>Pass*</b> |
|---------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.



**Law Man Kit**  
EMC Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request and accessible at <http://www.sgs.com/en/Terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. The document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2021-06-07 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |                                                                                     |                  |
|--------------------------|--|-------------------------------------------------------------------------------------|------------------|
| Authorized for issue by: |  |                                                                                     |                  |
|                          |  |    |                  |
|                          |  | Leo Xu /Project Engineer                                                            | Date: 2021-06-07 |
|                          |  |  |                  |
|                          |  | Law Man Kit<br>/Reviewer                                                            | Date: 2021-06-07 |

## 2 Test Summary

| Radio Spectrum Technical Requirement                                                     |                                  |        |                                                 |        |
|------------------------------------------------------------------------------------------|----------------------------------|--------|-------------------------------------------------|--------|
| Item                                                                                     | Standard                         | Method | Requirement                                     | Result |
| Antenna Requirement                                                                      | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4) | Pass   |
| Other requirements<br>Frequency Hopping<br>Spread Spectrum<br>System Hopping<br>Sequence | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)  | Pass   |

| Radio Spectrum Matter Part                            |                                  |                                        |                                           |        |
|-------------------------------------------------------|----------------------------------|----------------------------------------|-------------------------------------------|--------|
| Item                                                  | Standard                         | Method                                 | Requirement                               | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.2         | 47 CFR Part 15, Subpart C 15.207          | Pass   |
| Conducted Peak Output Power                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.5       | 47 CFR Part 15, Subpart C 15.247(b)(1)    | Pass   |
| 20dB Bandwidth                                        | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.7       | 47 CFR Part 15, Subpart C 15.247(a)(1)    | Pass   |
| Carrier Frequencies Separation                        | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.2       | 47 CFR Part 15, Subpart C 15.247a(1)      | Pass   |
| Hopping Channel Number                                | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.3       | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | Pass   |
| Dwell Time                                            | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.4       | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | Pass   |
| Conducted Band Edges Measurement                      | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.6       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Conducted Spurious Emissions                          | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.8       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Radiated Emissions which fall in the restricted bands | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.10.5      | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Spurious Emissions                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |

| Radio Spectrum Technical Requirement    |                                |        |                        |        |
|-----------------------------------------|--------------------------------|--------|------------------------|--------|
| Item                                    | Standard                       | Method | Requirement            | Result |
| Antenna Requirement                     | RSS-247 Issue 2, February 2017 | N/A    | RSS-Gen Section 6.8    | Pass   |
| Pseudorandom Frequency Hopping Sequence | RSS-247 Issue 2, February 2017 | N/A    | RSS-247 Section 5.1(a) | Pass   |

| Radio Spectrum Matter Part                            |                                |                                        |                                    |        |
|-------------------------------------------------------|--------------------------------|----------------------------------------|------------------------------------|--------|
| Item                                                  | Standard                       | Method                                 | Requirement                        | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 6.2         | RSS-Gen Section 8.8                | Pass   |
| 99% Bandwidth                                         | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 6.9.3       | RSS-Gen Section 6.7                | Pass   |
| Conducted Peak Output Power                           | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 7.8.5       | RSS-247 Section 5.4(b)             | Pass   |
| 20dB Bandwidth                                        | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 6.9.2       | RSS-247 Section 5.1(a)             | Pass   |
| Carrier Frequencies Separation                        | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 7.8.2       | RSS-247 Section 5.1(b)             | Pass   |
| Hopping Channel Number                                | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 7.8.3       | RSS-247 Section 5.1(d)             | Pass   |
| Dwell Time                                            | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 7.8.4       | RSS-247 Section 5.1(d)             | Pass   |
| Conducted Band Edges Measurement                      | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 7.8.6       | RSS-247 Section 5.5                | Pass   |
| Conducted Spurious Emissions                          | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 7.8.8       | RSS-247 Section 5.5                | Pass   |
| Radiated Emissions which fall in the restricted bands | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 6.10.5      | Section 3.3 & RSS-Gen Section 8.10 | Pass   |
| Radiated Spurious Emissions                           | RSS-247 Issue 2, February 2017 | ANSI C63.10 (2013) Section 6.4&6.5&6.6 | Section 3.3 & RSS-Gen Section 8.9  | Pass   |
| Frequency stability                                   | RSS-247 Issue 2, February 2017 | RSS-Gen Section 6.11                   | RSS-Gen Section 8.11               | Pass   |

Note: Frequency stability requested in RSS GEN Section 8.1.1 has been complied since the result of band edge can demonstrate.

#### Declaration of EUT Family Grouping:

Item no.: VM483BU, VM482BU, VM482ANXLBU

According to the confirmation from the applicant, the above models are identical in all electrical aspects in relating to the circuitry design, PCB layout, electrical components used, internal wiring and functions. The differences are the outlook.

Therefore, only the model VM483BU was tested as main model in this report.

### 3 Contents

|                                                               | Page      |
|---------------------------------------------------------------|-----------|
| <b>1 COVER PAGE .....</b>                                     | <b>1</b>  |
| <b>2 TEST SUMMARY .....</b>                                   | <b>3</b>  |
| <b>3 CONTENTS .....</b>                                       | <b>5</b>  |
| <b>4 GENERAL INFORMATION .....</b>                            | <b>7</b>  |
| 4.1 DETAILS OF E.U.T. ....                                    | 7         |
| 4.2 DESCRIPTION OF SUPPORT UNITS .....                        | 8         |
| 4.3 MEASUREMENT UNCERTAINTY .....                             | 9         |
| 4.4 TEST LOCATION .....                                       | 10        |
| 4.5 TEST FACILITY .....                                       | 10        |
| 4.6 DEVIATION FROM STANDARDS .....                            | 10        |
| 4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....              | 10        |
| <b>5 EQUIPMENT LIST .....</b>                                 | <b>11</b> |
| <b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....</b>           | <b>14</b> |
| 6.1 ANTENNA REQUIREMENT .....                                 | 14        |
| 6.1.1 Test Requirement: .....                                 | 14        |
| 6.1.2 Conclusion .....                                        | 14        |
| 6.2 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....             | 15        |
| 6.2.1 Test Requirement: .....                                 | 15        |
| 6.2.2 Test Setup Diagram .....                                | 15        |
| 6.2.3 Conclusion .....                                        | 15        |
| <b>7 RADIO SPECTRUM MATTER TEST RESULTS .....</b>             | <b>16</b> |
| 7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150KHz-30MHz) ..... | 16        |
| 7.1.1 E.U.T. Operation .....                                  | 17        |
| 7.1.2 Test Setup Diagram .....                                | 17        |
| 7.1.3 Measurement Procedure and Data .....                    | 17        |
| 7.2 99% BANDWIDTH .....                                       | 22        |
| 7.2.1 E.U.T. Operation .....                                  | 22        |
| 7.2.2 Test Setup Diagram .....                                | 22        |
| 7.2.3 Measurement Procedure and Data .....                    | 22        |
| 7.3 CONDUCTED PEAK OUTPUT POWER .....                         | 23        |
| 7.3.1 E.U.T. Operation .....                                  | 23        |
| 7.3.2 Test Setup Diagram .....                                | 23        |
| 7.3.3 Measurement Procedure and Data .....                    | 23        |
| 7.4 20dB BANDWIDTH .....                                      | 24        |
| 7.4.1 E.U.T. Operation .....                                  | 24        |
| 7.4.2 Test Setup Diagram .....                                | 24        |
| 7.4.3 Measurement Procedure and Data .....                    | 24        |
| 7.5 CARRIER FREQUENCIES SEPARATION .....                      | 25        |
| 7.5.1 E.U.T. Operation .....                                  | 25        |
| 7.5.2 Test Setup Diagram .....                                | 25        |
| 7.5.3 Measurement Procedure and Data .....                    | 25        |
| 7.6 HOPPING CHANNEL NUMBER .....                              | 26        |
| 7.6.1 E.U.T. Operation .....                                  | 26        |
| 7.6.2 Test Setup Diagram .....                                | 26        |
| 7.6.3 Measurement Procedure and Data .....                    | 26        |

|          |                                                             |           |
|----------|-------------------------------------------------------------|-----------|
| 7.7      | DWELL TIME .....                                            | 27        |
| 7.7.1    | <i>E.U.T. Operation</i> .....                               | 27        |
| 7.7.2    | <i>Test Setup Diagram</i> .....                             | 27        |
| 7.7.3    | <i>Measurement Procedure and Data</i> .....                 | 27        |
| 7.8      | CONDUCTED BAND EDGES MEASUREMENT .....                      | 28        |
| 7.8.1    | <i>E.U.T. Operation</i> .....                               | 30        |
| 7.8.2    | <i>Test Setup Diagram</i> .....                             | 30        |
| 7.8.3    | <i>Measurement Procedure and Data</i> .....                 | 30        |
| 7.9      | CONDUCTED SPURIOUS EMISSIONS.....                           | 31        |
| 7.9.1    | <i>E.U.T. Operation</i> .....                               | 31        |
| 7.9.2    | <i>Test Setup Diagram</i> .....                             | 31        |
| 7.9.3    | <i>Measurement Procedure and Data</i> .....                 | 31        |
| 7.10     | RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS ..... | 32        |
| 7.10.1   | <i>E.U.T. Operation</i> .....                               | 32        |
| 7.10.2   | <i>Test Setup Diagram</i> .....                             | 32        |
| 7.10.3   | <i>Measurement Procedure and Data</i> .....                 | 33        |
| 7.11     | RADIATED SPURIOUS EMISSIONS .....                           | 34        |
| 7.11.1   | <i>E.U.T. Operation</i> .....                               | 35        |
| 7.11.2   | <i>Test Setup Diagram</i> .....                             | 35        |
| 7.11.3   | <i>Measurement Procedure and Data</i> .....                 | 36        |
| <b>8</b> | <b>PHOTOGRAPHS .....</b>                                    | <b>40</b> |
| <b>9</b> | <b>APPENDIX.....</b>                                        | <b>41</b> |
| 9.1      | PEAK CONDUCTED OUTPUT POWER .....                           | 41        |
| 9.2      | EMISSION BANDWIDTH 20 dB .....                              | 43        |
| 9.3      | OCCUPIED CHANNEL BANDWIDTH 99%.....                         | 45        |
| 9.4      | CARRIER FREQUENCY SEPARATION .....                          | 47        |
| 9.5      | DWELL TIME .....                                            | 48        |
| 9.6      | HOPPING FREQUENCIES.....                                    | 49        |
| 9.7      | CONDUCTED BAND EDGE MEASUREMENT .....                       | 50        |
| 9.8      | CONDUCTED SPURIOUS EMISSION .....                           | 54        |

## 4 General Information

### 4.1 Details of E.U.T.

|                             |                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply:               | <p>Adaptor 1<br/>Model: BQ05A-0501000-U<br/>Input: AC 100-240V, 50/60Hz, Max 300mA<br/>Output: DC 5V, 1.0A</p> <p>or</p> <p>Adaptor 2<br/>Model: AT-538A-050100A<br/>Input: AC 100-240V, 50/60Hz, 200mA<br/>Output: DC 5V, 1.0A</p> <p>or</p> <p>Pre-scan test for RF conducted power were performed on the sample in this report, BQ05A-0501000-U is the worst case and used for fully test.</p> |
| Test voltage:               | AC 120V                                                                                                                                                                                                                                                                                                                                                                                           |
| Cable:                      | Power Cable: 180cm unshielded 2 wires DC cable                                                                                                                                                                                                                                                                                                                                                    |
| Antenna Gain:               | 2 dBi                                                                                                                                                                                                                                                                                                                                                                                             |
| Antenna Type:               | Integral antenna                                                                                                                                                                                                                                                                                                                                                                                  |
| Modulation Type:            | GFSK                                                                                                                                                                                                                                                                                                                                                                                              |
| Number of Channels:         | 32                                                                                                                                                                                                                                                                                                                                                                                                |
| Operation Frequency:        | 2405MHz to 2475MHz                                                                                                                                                                                                                                                                                                                                                                                |
| Spectrum Spread Technology: | Frequency Hopping Spread Spectrum (FHSS)                                                                                                                                                                                                                                                                                                                                                          |
| Series number:              | A1                                                                                                                                                                                                                                                                                                                                                                                                |
| Hardware Version:           | V1.0                                                                                                                                                                                                                                                                                                                                                                                              |
| Software Version:           | 0.11                                                                                                                                                                                                                                                                                                                                                                                              |
|                             | Remark: Power level setting was not adjustable and fixed default through SW Version.                                                                                                                                                                                                                                                                                                              |

#### Frequency List

| Channel Number | TX Freq (MHz) | Channel Number | TX Freq (MHz) | Channel Number | TX Freq (MHz) |
|----------------|---------------|----------------|---------------|----------------|---------------|
| <b>1</b>       | 2405          | 13             | 2430          | 25             | 2458.5        |
| 2              | 2407          | 14             | 2433          | 26             | 2460.5        |
| 3              | 2409          | 15             | 2435          | 27             | 2462.5        |
| 4              | 2411          | 16             | 2437          | 28             | 2467          |
| 5              | 2413          | <b>17</b>      | 2439          | 29             | 2469          |
| 6              | 2415          | 18             | 2441          | 30             | 2471          |
| 7              | 2418          | 19             | 2444          | 31             | 2473          |
| 8              | 2420          | 20             | 2446          | <b>32</b>      | 2475          |
| 9              | 2422          | 21             | 2450          |                |               |
| 10             | 2424          | 22             | 2452          |                |               |
| 11             | 2426          | 23             | 2454          |                |               |
| 12             | 2428          | 24             | 2456          |                |               |

Remark: 1. Operation channel is total 32.  
2. Testing Channels are highlighted in **bold**.

## 4.2 Description of Support Units

The EUT has been tested as an independent unit.

### 4.3 Measurement Uncertainty

RF

| No. | Item                                                   | Measurement Uncertainty   |
|-----|--------------------------------------------------------|---------------------------|
| 1   | Radio Frequency                                        | $\pm 7.25 \times 10^{-8}$ |
| 2   | Duty cycle                                             | $\pm 0.37\%$              |
| 3   | Occupied Bandwidth                                     | $\pm 3\%$                 |
| 4   | RF conducted power (30MHz-40GHz)                       | 1.5dB                     |
| 5   | RF power density                                       | 1.5dB                     |
| 6   | Conducted Spurious emissions                           | 1.5dB                     |
| 7   | RF Radiated power &<br>Radiated Spurious emission test | 4.9dB (30MHz-1GHz)        |
|     |                                                        | 4.6dB (1GHz-6GHz)         |
|     |                                                        | 4.7dB (6GHz-18GHz)        |
|     |                                                        | 5.6dB (18GHz-40GHz)       |
| 8   | Temperature test                                       | $\pm 1^{\circ}\text{C}$   |
| 9   | Humidity test                                          | $\pm 3\%$                 |
| 10  | Supply voltages                                        | $\pm 1.5\%$               |
| 11  | Time                                                   | $\pm 3\%$                 |

#### Remark:

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the test lab quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

#### 4.4 Test Location

All tests were performed at:

SGS Hong Kong Limited  
Unit 2 and 3, G/F, Block A, Po Lung Centre,  
11 Wang Chiu Road, Kowloon Bay, Kowloon, Hong Kong  
Tel: +852 2305 2570 Fax: +852 2756 4480

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **HOKLAS (Lab Code: 009)**

SGS Hong Kong Limited has been accepted by HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a HOKLAS Accredited Laboratory, this laboratory meets the requirements of ISO/IEC 17025:2017 and it has been accredited for performing specific test as listed in the scope of accreditation within the test category of Electrical and Electronic Products.

• **IAS Accreditation (Lab Code: TL-817)**

SGS Hong Kong Limited has met the requirements of AC89, IAS Accreditation Criteria for Testing Laboratories, and has demonstrated compliance with ISO/IEC Standard 17025:2017, General requirements for the competence of testing and calibration laboratories. This organization is accredited to provide the services specified in the scope of accreditation maintained on the IAS website ([www.iasonline.org](http://www.iasonline.org)).

The report must not be used by the client to claim product certification, approval, or endorsement by IAS, NIST, or any agency of the Federal Government.

• **FCC Recognized Accredited Test Firm (CAB Registration No.: 514599)**

SGS Hong Kong Limited has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: HK0015, Test Firm Registration Number: 514599.

• **Industry Canada (Site Registration No.: 26103; CAB Identifier No.: HK0015)**

SGS Hong Kong Limited has been recognized by Department of Innovation, Science and Economic Development (ISED) Canada as a wireless testing laboratory. The acceptance letter from the ISED is maintained in our files. CAB Identifier No: HK0015, Site Registration Number: 26103.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

---

## 5 Equipment List

### 20dB Bandwidth, Conducted Peak Output Power, Hopping Channel Number, Carrier Frequencies Separation, Dwell Time, Conducted Band Edges Measurement, Conducted Spurious Emissions

| Equipment                        | Manufacturer    | Model No        | Inventory No | Cal Date   | Cal Due Date |
|----------------------------------|-----------------|-----------------|--------------|------------|--------------|
| SMBV100A VECTOR SIGNAL GENERATOR | Rohde & Schwarz | SMBV100A        | E234         | 2020/08/31 | 2021/08/30   |
| FSV40 SIGNAL ANALYZER 40GHz      | Rohde & Schwarz | FSV40           | E235         | 2020/08/31 | 2021/08/30   |
| SMB100A SIGNAL GENERATOR         | Rohde & Schwarz | SMB100A         | E236         | 2020/08/31 | 2021/08/30   |
| Wireless Conn. Tester (CMW)      | Rohde & Schwarz | CMW270          | E240         | CAL IN USE | CAL IN USE   |
| OSP                              | Rohde & Schwarz | OSP-B157W8      | E242         | 2020/08/31 | 2021/08/30   |
| Cable                            | Rohde & Schwarz | J12J103539-00-2 | E239         | 2020/09/21 | 2021/09/20   |
| WMS32 Test software              | Rohde & Schwarz | N/A             | Version 11   | N/A        | N/A          |

### Conducted Emissions at Mains Terminals (150kHz-30MHz)

| Equipment                        | Manufacturer    | Model No             | Inventory No | Cal Date   | Cal Due Date |
|----------------------------------|-----------------|----------------------|--------------|------------|--------------|
| EMI Test Receiver 9kHz to 3.6GHz | Rohde & Schwarz | ESR3 / 102326        | E231         | 2020/08/31 | 2021/08/30   |
| Signal Generator                 | Rohde & Schwarz | SMT03                | E177         | 2021/04/12 | 2022/04/11   |
| Artificial Mains Network (LISN)  | Schwarzbeck     | NSLK 8127 / 8127312  | E005         | 2021/04/13 | 2022/04/12   |
| Impulse Limiter                  | Rohde & Schwarz | ESH-3-Z2 / 357881052 | E028         | 2020/09/12 | 2021/09/11   |
| EMC32 Test software              | Rohde & Schwarz | Version 10           | N/A          | N/A        | N/A          |

### Radiated Spurious Emissions (30MHz-1GHz)

| Equipment                                           | Manufacturer    | Model No      | Inventory No | Cal Date   | Cal Due Date |
|-----------------------------------------------------|-----------------|---------------|--------------|------------|--------------|
| 3m Semi-Anechoic Chamber                            | ChamPro         | N/A           | E229         | 2020/08/09 | 2021/08/08   |
| Coaxial Cable                                       | SGS             | N/A           | E167         | 2020/07/20 | 2021/07/19   |
| EMI Test Receiver 9kHz to 7GHz                      | Rohde & Schwarz | ESR7 / 102298 | E314         | 2021/05/18 | 2022/05/17   |
| TRILOG Super Broadb. Test Antenna, (25) 30-1000 MHz | Schwarzbeck     | 9168-1110     | E311         | 2020/02/13 | 2022/02/12   |
| EMC32 Test software                                 | Rohde & Schwarz | Version 10    | N/A          | N/A        | N/A          |
| Boresight Mast Controller                           | ChamPro         | AM-BS-4500-E  | E237         | N/A        | N/A          |
| Turntable with Controller                           | ChamPro         | EM1000        | E238         | N/A        | N/A          |

| <b>Radiated Spurious Emissions (above 1GHz)</b>            |                     |                              |                     |                 |                     |
|------------------------------------------------------------|---------------------|------------------------------|---------------------|-----------------|---------------------|
| <b>Equipment</b>                                           | <b>Manufacturer</b> | <b>Model No</b>              | <b>Inventory No</b> | <b>Cal Date</b> | <b>Cal Due Date</b> |
| 3m Semi-Anechoic Chamber                                   | ChamPro             | N/A                          | E229                | 2020/08/09      | 2021/08/08          |
| Coaxial Cable                                              | SGS                 | N/A                          | E167                | 2020/07/20      | 2021/07/19          |
| EMI Test Receiver<br>9kHz to 7GHz                          | Rohde & Schwarz     | ESR7 / 102298                | E314                | 2021/05/18      | 2022/05/17          |
| TRILOG Super Broadb.<br>Test Antenna,<br>(25) 30-1000 MHz  | Schwarzbeck         | 9168-1110                    | E311                | 2020/02/13      | 2022/02/12          |
| Signal and Spectrum<br>Analyzer<br>2Hz - 26.5GHz           | Rohde & Schwarz     | FSW26                        | E296                | 2020/08/31      | 2021/08/30          |
| Spectrum Analyzer<br>9kHz - 30GHz                          | Rohde & Schwarz     | FSP30                        | E204                | 2020/03/11      | 2022/03/10          |
| Horn Antenna 1 - 18GHz                                     | Schwarzbeck         | BBHA9120D                    | E211                | 2020/01/29      | 2022/01/28          |
| Horn Antenna<br>15 - 40GHz                                 | Schwarzbeck         | BBHA9170                     | E212                | 2020/01/29      | 2022/01/28          |
| Preamplifier 33dB,<br>1 - 18GHz                            | Schwarzbeck         | BBV9718                      | E214                | 2019/04/24      | 2022/04/23          |
| Preamplifier 33dB,<br>18 - 26.5GHz                         | Schwarzbeck         | BBV9719                      | E215                | 2020/09/21      | 2022/09/20          |
| Broadband Coaxial<br>Preamplifier typ. 30 dB,<br>18-40 GHz | Schwarzbeck         | BBV 9721                     | E266                | 2020/08/31      | 2021/08/30          |
| Highpass Filter<br>3.5-26.5GHz                             | Wainwright          | WHNX3.5/26.5<br>G-6SS        | E205                | 2019/04/24      | 2022/04/23          |
| Band Reject Filter<br>2.4-2.5GHz                           | Wainwright          | WRCJV<br>2400/2500-<br>2100  | E206                | 2019/04/24      | 2022/04/23          |
| RF cable SMA to SMA<br>10000mm                             | HUBER+SUHNER        | SF104-<br>26.5/2*11SMA<br>45 | E207-1              | 2020/09/21      | 2021/09/20          |
| Boresight Mast<br>Controller                               | ChamPro             | AM-BS-4500-E                 | E237                | N/A             | N/A                 |
| Turntable with Controller                                  | ChamPro             | EM1000                       | E238                | N/A             | N/A                 |



Report No.: HKEM210500049202

Page: 13 of 55

| General used equipment                         |                               |              |              |            |              |
|------------------------------------------------|-------------------------------|--------------|--------------|------------|--------------|
| Equipment                                      | Manufacturer                  | Model No     | Inventory No | Cal Date   | Cal Due Date |
| Digital temperature & humidity data logger     | SATO                          | SK-L200TH II | E232         | 2020/09/12 | 2021/09/11   |
| Electronic Digital Thermometer with Hygrometer | nil                           | 2074/2075    | E159         | 2020/09/12 | 2021/09/11   |
| Barometer with digital thermometer             | SATO                          | 7612-00      | E218         | 2021/03/29 | 2022/04/29   |
| Conditional Chamber                            | Zhong Zhi Testing Instruments | CZ-E-608D    | E216         | 2020/08/31 | 2021/08/30   |

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

RSS-Gen Section 6.8

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

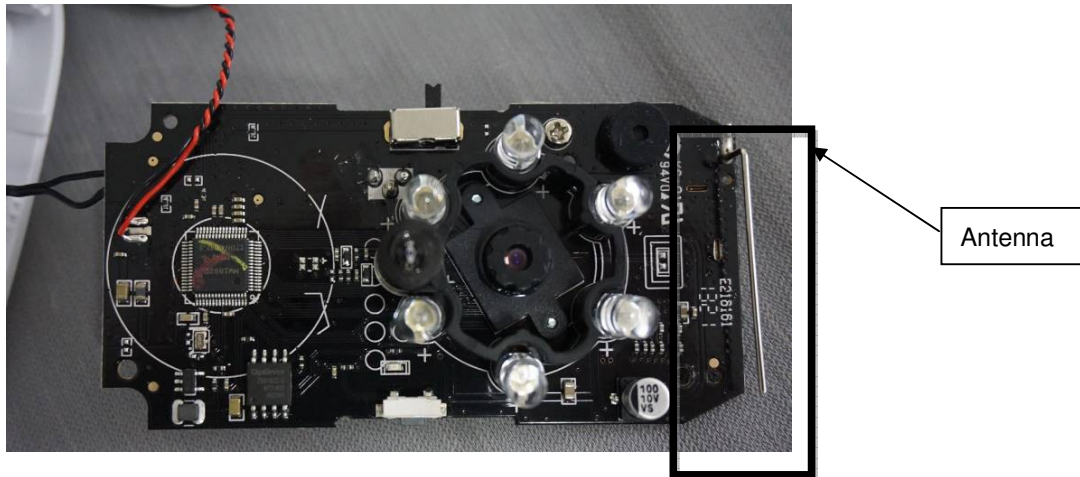


Photo of antenna refer to Appendix – Internal photo.


## 6.2 Pseudorandom Frequency Hopping Sequence

### 6.2.1 Test Requirement:

FCC Part 15 Subpart C Section 15.247(a)(1)


RSS-247 Section 5.1(a)

### 6.2.2 Test Setup Diagram

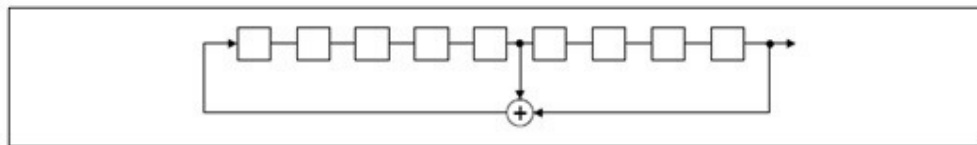

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:



### 6.2.3 Conclusion

Standard Requirement:

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207, RSS-Gen Section 8.8  
Test Method: ANSI C63.10 (2013) Section 6.2  
Limit:

| Frequency of emission(MHz)                      | Conducted limit(dBμV) |           |
|-------------------------------------------------|-----------------------|-----------|
|                                                 | Quasi-peak            | Average   |
| 0.15-0.5                                        | 66 to 56*             | 56 to 46* |
| 0.5-5                                           | 56                    | 46        |
| 5-30                                            | 60                    | 50        |
| *Decreases with the logarithm of the frequency. |                       |           |


## 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C Humidity: 51.2 % RH :

Test mode c: TX\_Keep the EUT transmitted the continuous modulation test signal at the specific channel(s).

## 7.1.2 Test Setup Diagram

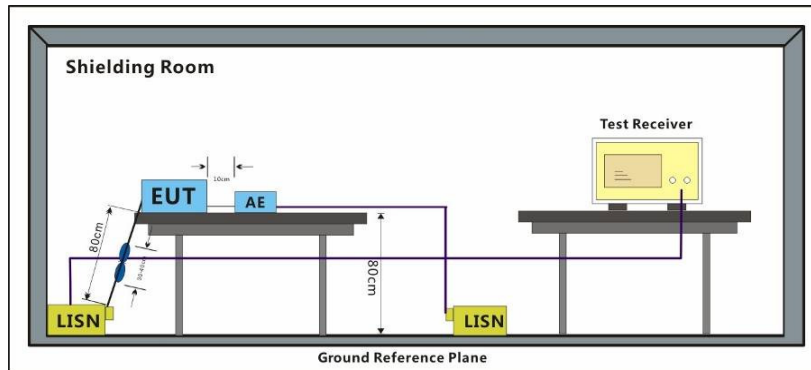


## 7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Adaptor: BQ05A-0501000-U  
Mode: c;  
Line: Live Line


Full Spectrum

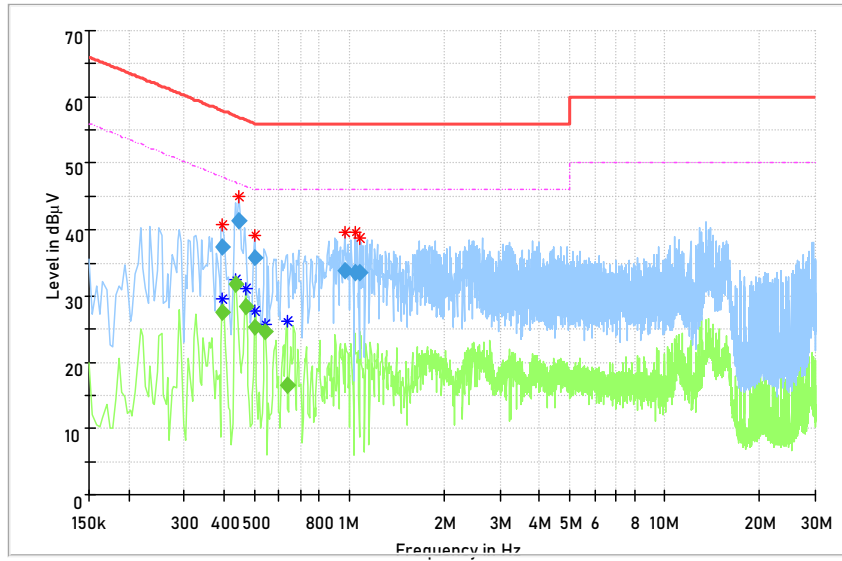

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Corr. (dB) | Result |
|-----------------|------------------|----------------|--------------|-------------|------------|--------|
| 0.398000        | ---              | 27.5           | 47.9         | 20.4        | 10.1       | Pass   |
| 0.398000        | 37.3             | ---            | 57.9         | 20.6        | 10.1       | Pass   |
| 0.438000        | ---              | 31.7           | 47.1         | 15.4        | 10.1       | Pass   |
| 0.446000        | 41.3             | ---            | 57.0         | 15.7        | 10.1       | Pass   |
| 0.470000        | ---              | 28.4           | 46.5         | 18.1        | 10.1       | Pass   |
| 0.502000        | 35.7             | ---            | 56.0         | 20.3        | 10.1       | Pass   |
| 0.502000        | ---              | 25.2           | 46.0         | 20.8        | 10.1       | Pass   |
| 0.542000        | ---              | 24.7           | 46.0         | 21.3        | 10.1       | Pass   |
| 0.634000        | ---              | 16.5           | 46.0         | 29.5        | 10.1       | Pass   |
| 0.966000        | 33.8             | ---            | 56.0         | 22.2        | 10.1       | Pass   |
| 1.042000        | 33.4             | ---            | 56.0         | 22.6        | 10.1       | Pass   |
| 1.086000        | 33.6             | ---            | 56.0         | 22.4        | 10.1       | Pass   |

Mode: c;  
Line: Neutral Line

Full Spectrum

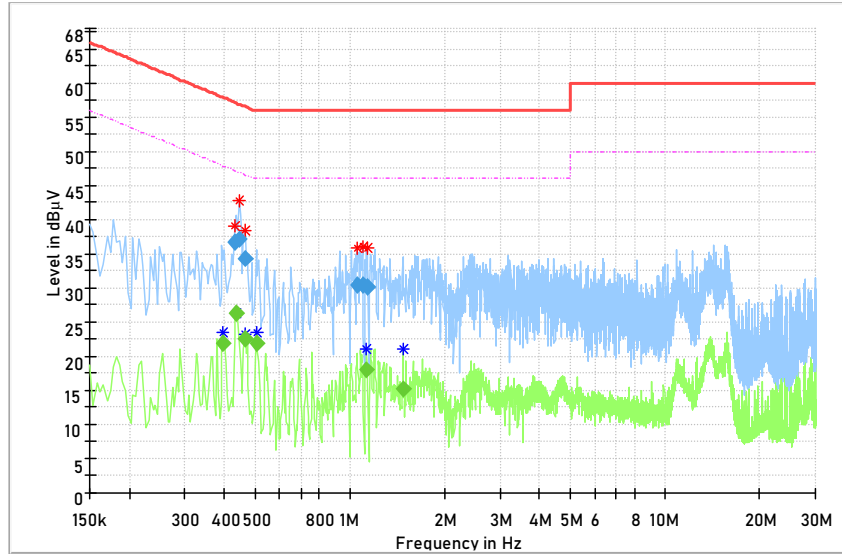


| Frequency<br>(MHz) | QuasiPeak<br>(dBμV) | Average<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Corr.<br>(dB) | Result |
|--------------------|---------------------|-------------------|-----------------|----------------|---------------|--------|
| 0.398000           | ---                 | 22.0              | 47.9            | 25.9           | 10.0          | Pass   |
| 0.430000           | 36.7                | ---               | 57.3            | 20.6           | 10.0          | Pass   |
| 0.438000           | ---                 | 26.2              | 47.1            | 20.9           | 10.0          | Pass   |
| 0.446000           | 37.2                | ---               | 57.0            | 19.8           | 10.0          | Pass   |
| 0.466000           | ---                 | 22.5              | 46.6            | 24.1           | 10.0          | Pass   |
| 0.466000           | 34.3                | ---               | 56.6            | 22.3           | 10.0          | Pass   |
| 0.506000           | ---                 | 21.9              | 46.0            | 24.1           | 10.1          | Pass   |
| 1.058000           | 30.4                | ---               | 56.0            | 25.6           | 10.3          | Pass   |
| 1.102000           | 30.4                | ---               | 56.0            | 25.6           | 10.3          | Pass   |
| 1.134000           | ---                 | 17.9              | 46.0            | 28.1           | 10.3          | Pass   |
| 1.138000           | 30.2                | ---               | 56.0            | 25.8           | 10.3          | Pass   |
| 1.474000           | ---                 | 15.3              | 46.0            | 30.7           | 10.3          | Pass   |

Adaptor: AT-538I-050100A


Mode: c;  
Line: Live Line

Full Spectrum

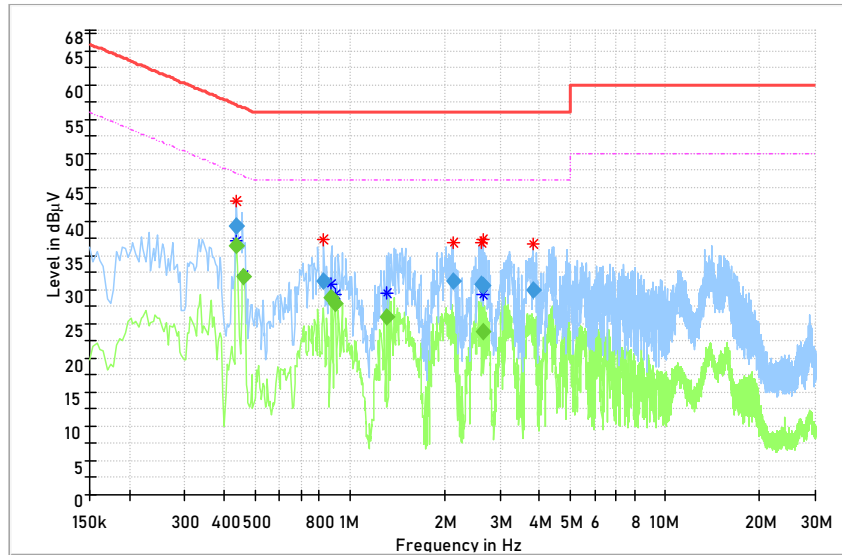

| Frequency<br>(MHz) | QuasiPeak<br>(dBµV) | Average<br>(dBµV) | Limit<br>(dBµV) | Margin<br>(dB) | Corr.<br>(dB) | Result |
|--------------------|---------------------|-------------------|-----------------|----------------|---------------|--------|
| 0.438000           | ---                 | 36.5              | 47.1            | 10.6           | 10.0          | Pass   |
| 0.438000           | 39.4                | ---               | 57.1            | 17.7           | 10.0          | Pass   |
| 0.462000           | ---                 | 31.9              | 46.7            | 14.8           | 10.0          | Pass   |
| 0.826000           | 31.3                | ---               | 56.0            | 24.7           | 10.2          | Pass   |
| 0.874000           | ---                 | 28.9              | 46.0            | 17.1           | 10.2          | Pass   |
| 0.898000           | ---                 | 28.0              | 46.0            | 18.0           | 10.2          | Pass   |
| 1.310000           | ---                 | 26.1              | 46.0            | 19.9           | 10.3          | Pass   |
| 2.134000           | 31.3                | ---               | 56.0            | 24.7           | 10.4          | Pass   |
| 2.618000           | 30.8                | ---               | 56.0            | 25.2           | 10.5          | Pass   |
| 2.654000           | 30.7                | ---               | 56.0            | 25.3           | 10.5          | Pass   |
| 2.654000           | ---                 | 23.9              | 46.0            | 22.1           | 10.5          | Pass   |
| 3.834000           | 29.9                | ---               | 56.0            | 26.1           | 10.5          | Pass   |

Mode: c;  
Line: Neutral Line

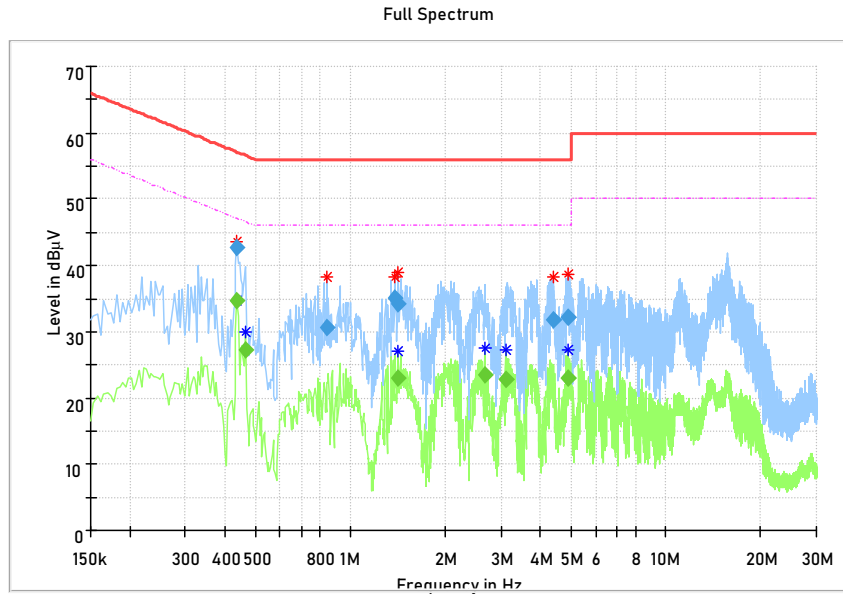

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV) | Average<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Corr.<br>(dB) | Result |
|--------------------|---------------------|-------------------|-----------------|----------------|---------------|--------|
| 0.438000           | ---                 | 34.6              | 47.1            | 12.5           | 10.1          | Pass   |
| 0.438000           | 42.6                | ---               | 57.1            | 14.5           | 10.1          | Pass   |
| 0.466000           | ---                 | 27.3              | 46.6            | 19.3           | 10.1          | Pass   |
| 0.846000           | 30.7                | ---               | 56.0            | 25.3           | 10.1          | Pass   |
| 1.390000           | 35.0                | ---               | 56.0            | 21.0           | 10.2          | Pass   |
| 1.422000           | 34.2                | ---               | 56.0            | 21.8           | 10.2          | Pass   |
| 1.422000           | ---                 | 23.1              | 46.0            | 22.9           | 10.2          | Pass   |
| 2.662000           | ---                 | 23.4              | 46.0            | 22.6           | 10.2          | Pass   |
| 3.098000           | ---                 | 22.9              | 46.0            | 23.1           | 10.2          | Pass   |
| 4.394000           | 31.7                | ---               | 56.0            | 24.3           | 10.3          | Pass   |
| 4.878000           | 32.2                | ---               | 56.0            | 23.8           | 10.3          | Pass   |
| 4.894000           | ---                 | 23.1              | 46.0            | 22.9           | 10.3          | Pass   |

## 7.2 99% Bandwidth

Test Requirement RSS-Gen Section 6.7  
Test Method: ANSI C63.10 (2013) Section 6.9.3


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C Humidity: 48.0 % RH :

Test mode b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.2.2 Test Setup Diagram

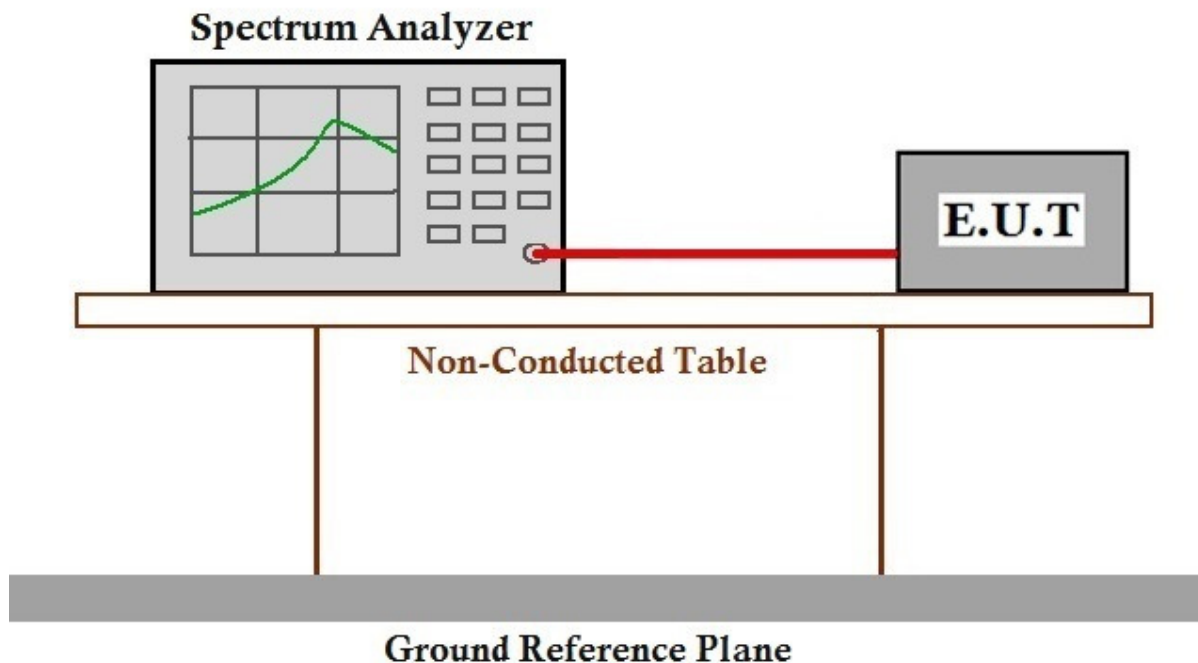

### 7.2.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

### 7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247:2019(b)(1) & 15.247(b)(3), RSS-247 Section 5.4(b)

Test Method: ANSI C63.10 (2013) Section 7.8.5


#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C Humidity: 48.0 % RH :

Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.3.2 Test Setup Diagram

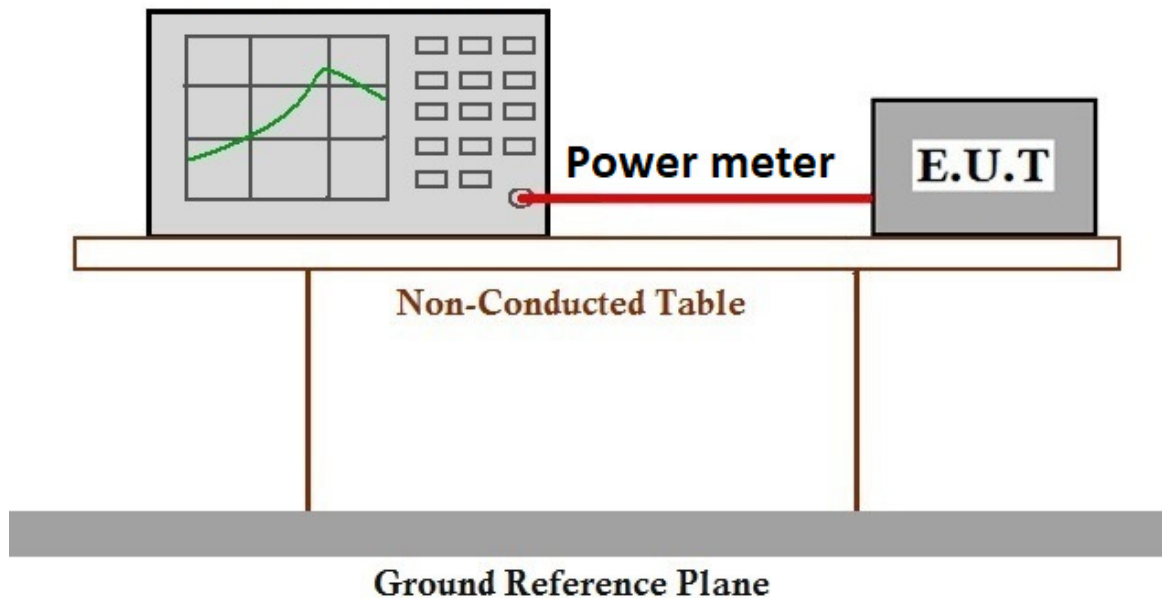

#### 7.3.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

## 7.4 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215, RSS-247 Section 5.1(a)

Test Method: ANSI C63.10 (2013) Section 6.9.2


### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C Humidity: 48.0 % RH :

Test mode b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.4.2 Test Setup Diagram

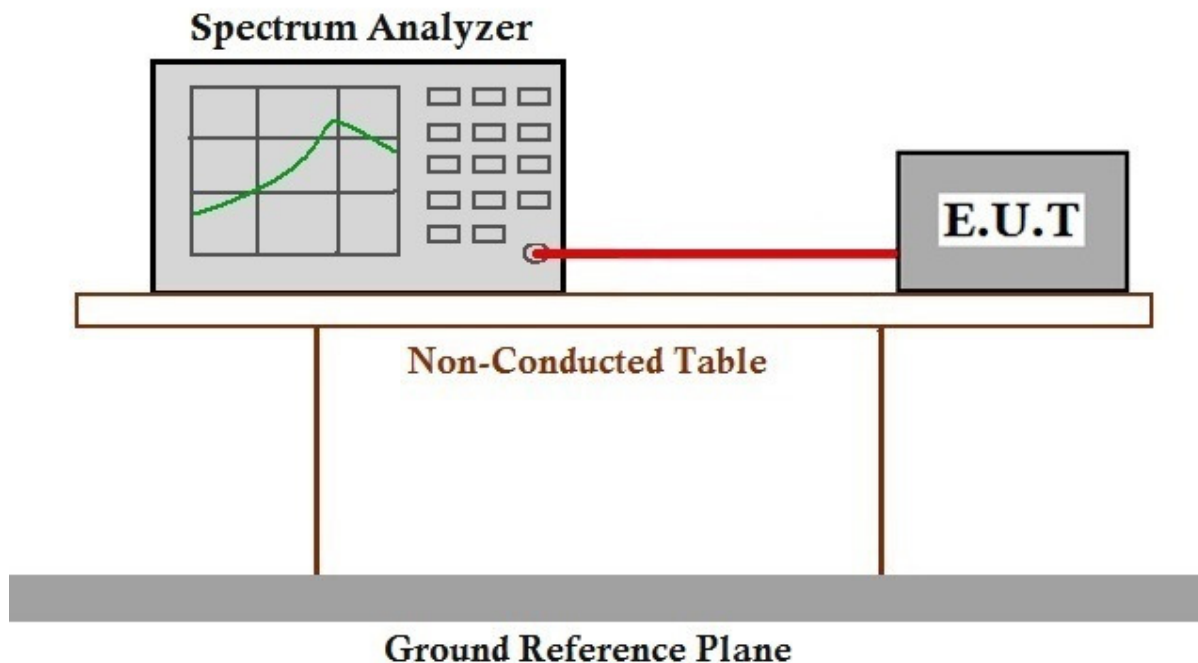

### 7.4.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix


## 7.5 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247:2019a(1), RSS-247 Section 5.1(b)  
Test Method: ANSI C63.10 (2013) Section 7.8.2  
Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

### 7.5.1 E.U.T. Operation

Operating Environment:  
Temperature: 20.0 °C Humidity: 48.0 % RH :  
Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.5.2 Test Setup Diagram

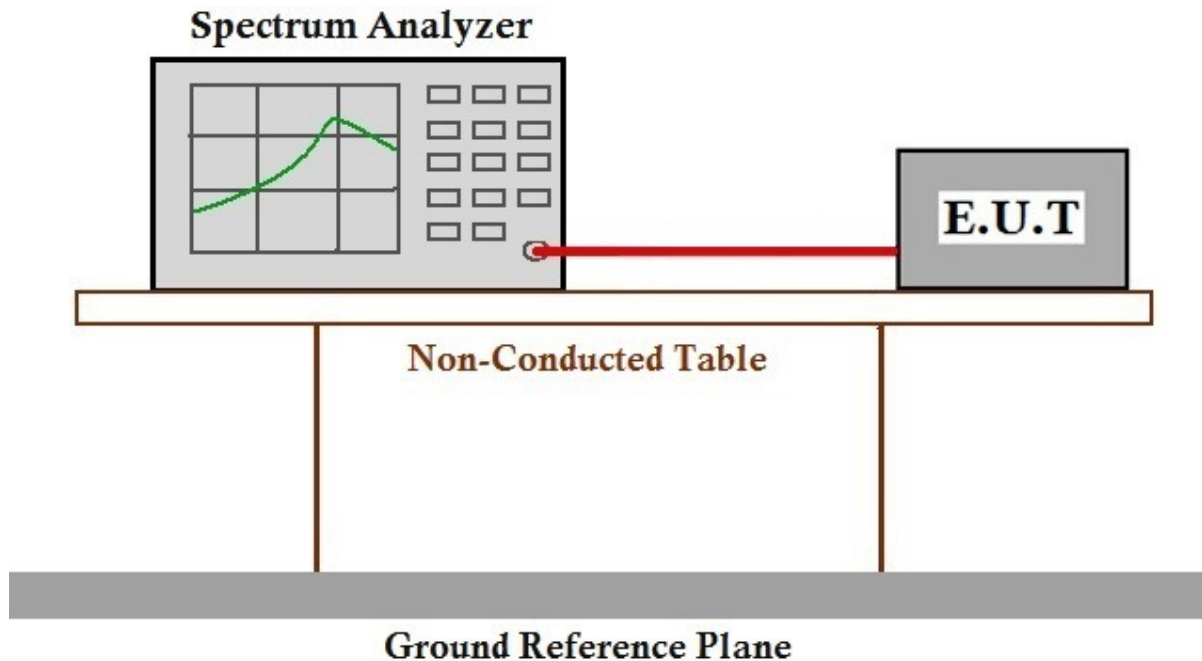

### 7.5.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

## 7.6 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247:2019a(1)(iii), RSS-247 Section 5.1(d)  
Test Method: ANSI C63.10 (2013) Section 7.8.3  
Limit:

| Frequency range(MHz) | Number of hopping channels (minimum) |
|----------------------|--------------------------------------|
| 902-928              | 50 for 20dB bandwidth <250kHz        |
|                      | 25 for 20dB bandwidth ≥250kHz        |
| 2400-2483.5          | 15                                   |
| 5725-5850            | 75                                   |


### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: °C Humidity: % RH :

Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.6.2 Test Setup Diagram

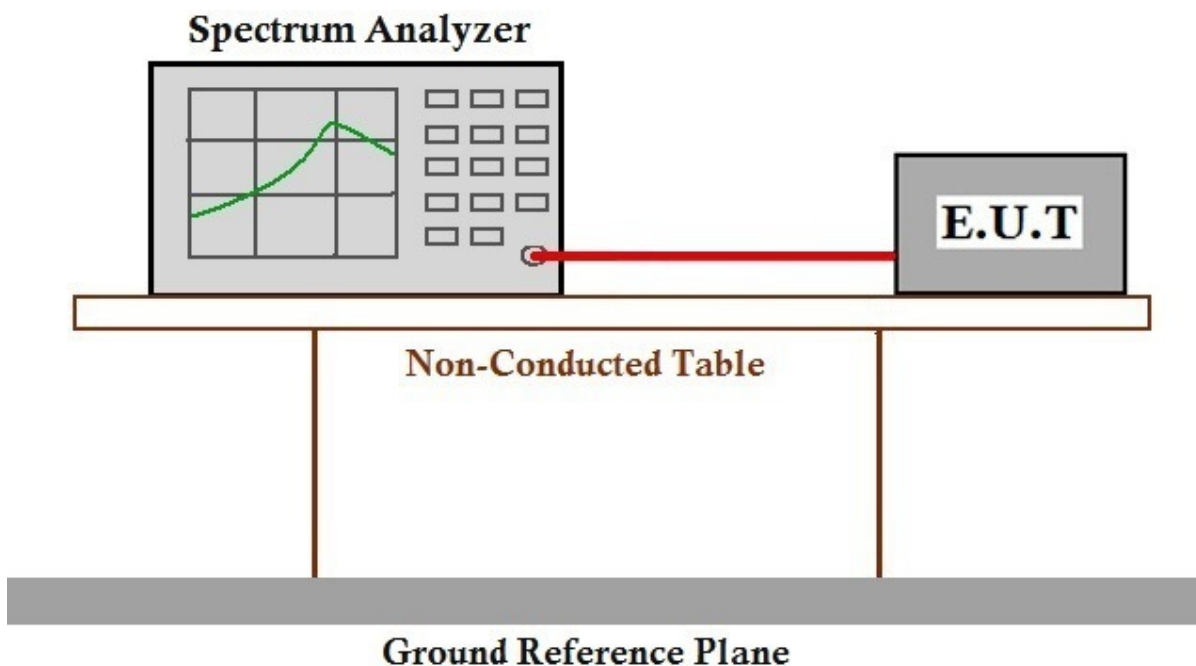

### 7.6.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

## 7.7 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247:2019a(1)(iii), RSS-247 Section 5.1(d)  
Test Method: ANSI C63.10 (2013) Section 7.8.4  
Limit:

| Frequency(MHz) | Limit                                                                     |
|----------------|---------------------------------------------------------------------------|
| 902-928        | 0.4S within a 20S period(20dB bandwidth<250kHz)                           |
|                | 0.4S within a 10S period(20dB bandwidth≥250kHz)                           |
| 2400-2483.5    | 0.4S within a period of 0.4S multiplied by the number of hopping channels |
| 5725-5850      | 0.4S within a 30S period                                                  |


### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C Humidity: 48.0 % RH :

Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.7.2 Test Setup Diagram

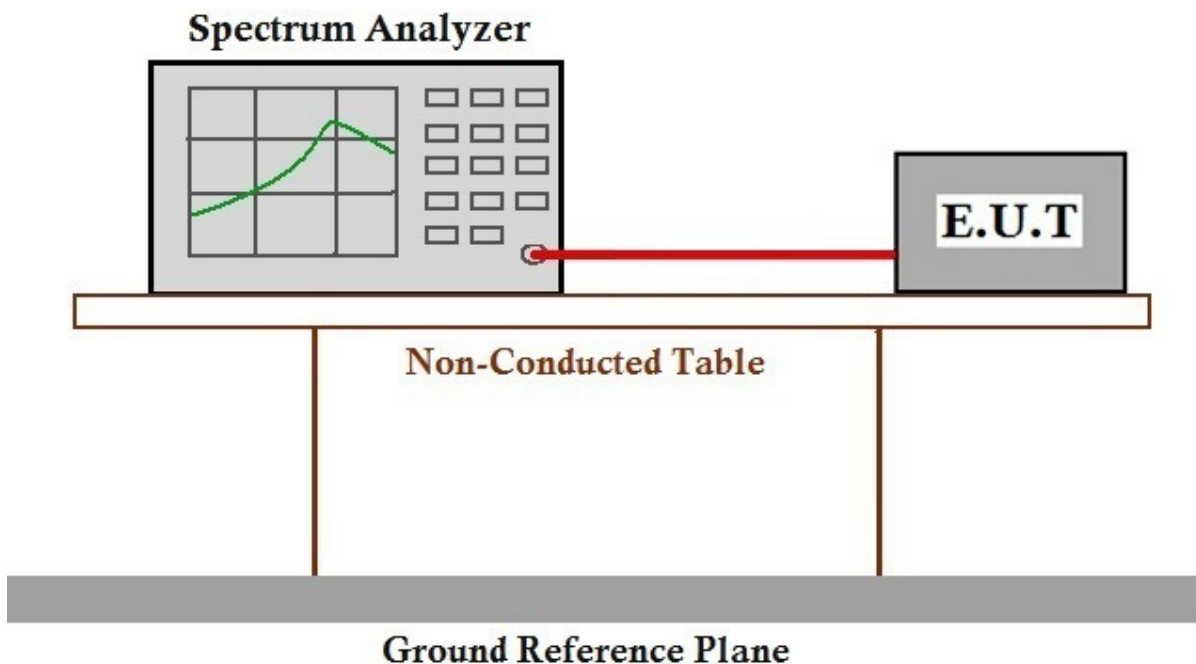

### 7.7.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix



## 7.8 Conducted Band Edges Measurement

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247:2019(d), RSS-247 Section 5.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Method:     | ANSI C63.10 (2013) Section 7.8.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Limit:           | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)) |

FCC Part 15 C Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz           |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 - 0.110       | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15    |
| 0.495 - 0.505       | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46   |
| 2.1735 - 2.1905     | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75   |
| 4.125 - 4.128       | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5   |
| 4.17725 - 4.17775   | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2     |
| 4.20725 - 4.20775   | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5     |
| 6.215 - 6.218       | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7   |
| 6.26775 - 6.26825   | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4  |
| 6.31175 - 6.31225   | 123 - 138             | 2200 - 2300     | 14.47 - 14.5  |
| 8.291 - 8.294       | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2  |
| 8.362 - 8.366       | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4   |
| 8.37625 - 8.38675   | 156.7 - 156.9         | 2655 - 2900     | 22.01 - 23.12 |
| 8.41425 - 8.41475   | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0   |
| 12.29 - 12.293      | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8   |
| 12.51975 - 12.52025 | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5  |
| 12.57675 - 12.57725 | 322 - 335.4           | 3600 - 4400     |               |
| 13.36 - 13.41       |                       |                 |               |

RSS-Gen Section 8.10 Restricted bands of operation.

Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

(a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio

apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, *Emergency Position Indicating Radio Beacons (EPIRB)*, *Emergency Locator Transmitters (ELT)*, *Personal Locator Beacons (PLB)*, and *Maritime Survivor Locator Devices (MSLD)*.

(b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.

(c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

| Table 7 – Restricted frequency bands* MHz | MHz                   | GHz                                                                                                                                                                                                                                             |
|-------------------------------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0.090 - 0.110                             | 149.9 - 150.05        | 9.0 - 9.2                                                                                                                                                                                                                                       |
| 0.495 - 0.505                             | 156.52475 - 156.52525 | 9.3 - 9.5                                                                                                                                                                                                                                       |
| 2.1735 - 2.1905                           | 156.7 - 156.9         | 10.6 - 12.7                                                                                                                                                                                                                                     |
| 3.020 - 3.026                             | 162.0125 - 167.17     | 13.25 - 13.4                                                                                                                                                                                                                                    |
| 4.125 - 4.128                             | 167.72 - 173.2        | 14.47 - 14.5                                                                                                                                                                                                                                    |
| 4.17725 - 4.17775                         | 240 - 285             | 15.35 - 16.2                                                                                                                                                                                                                                    |
| 4.20725 - 4.20775                         | 322 - 335.4           | 17.7 - 21.4                                                                                                                                                                                                                                     |
| 5.677 - 5.683                             | 399.9 - 410           | 22.01 - 23.12                                                                                                                                                                                                                                   |
| 6.215 - 6.218                             | 608 - 614             | 23.6 - 24.0                                                                                                                                                                                                                                     |
| 6.26775 - 6.26825                         | 960 - 1427            | 31.2 - 31.8                                                                                                                                                                                                                                     |
| 6.31175 - 6.31225                         | 1435 - 1626.5         | 36.43 - 36.5                                                                                                                                                                                                                                    |
| 8.291 - 8.294                             | 1645.5 - 1646.5       | Above 38.6                                                                                                                                                                                                                                      |
| 8.362 - 8.366                             | 1660 - 1710           | * Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs. |
| 8.37625 - 8.38675                         | 1718.8 - 1722.2       |                                                                                                                                                                                                                                                 |
| 8.41425 - 8.41475                         | 2200 - 2300           |                                                                                                                                                                                                                                                 |
| 12.29 - 12.293                            | 2310 - 2390           |                                                                                                                                                                                                                                                 |
| 12.51975 - 12.52025                       | 2483.5 - 2500         |                                                                                                                                                                                                                                                 |
| 12.57675 - 12.57725                       | 2655 - 2900           |                                                                                                                                                                                                                                                 |
| 13.36 - 13.41                             | 3260 - 3267           |                                                                                                                                                                                                                                                 |
| 16.42 - 16.423                            | 3332 - 3339           |                                                                                                                                                                                                                                                 |
| 16.69475 - 16.69525                       | 3345.8 - 3358         |                                                                                                                                                                                                                                                 |
| 16.80425 - 16.80475                       | 3500 - 4400           |                                                                                                                                                                                                                                                 |
| 25.5 - 25.67                              | 4500 - 5150           |                                                                                                                                                                                                                                                 |
| 37.5 - 38.25                              | 5350 - 5460           |                                                                                                                                                                                                                                                 |
| 73 - 74.6                                 | 7250 - 7750           |                                                                                                                                                                                                                                                 |
| 74.8 - 75.2                               | 8025 - 8500           |                                                                                                                                                                                                                                                 |
| 108 - 138                                 | --                    |                                                                                                                                                                                                                                                 |


### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C Humidity: 48.0 % RH :

Test mode a: TX\_Hop mode\_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.  
b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.8.2 Test Setup Diagram

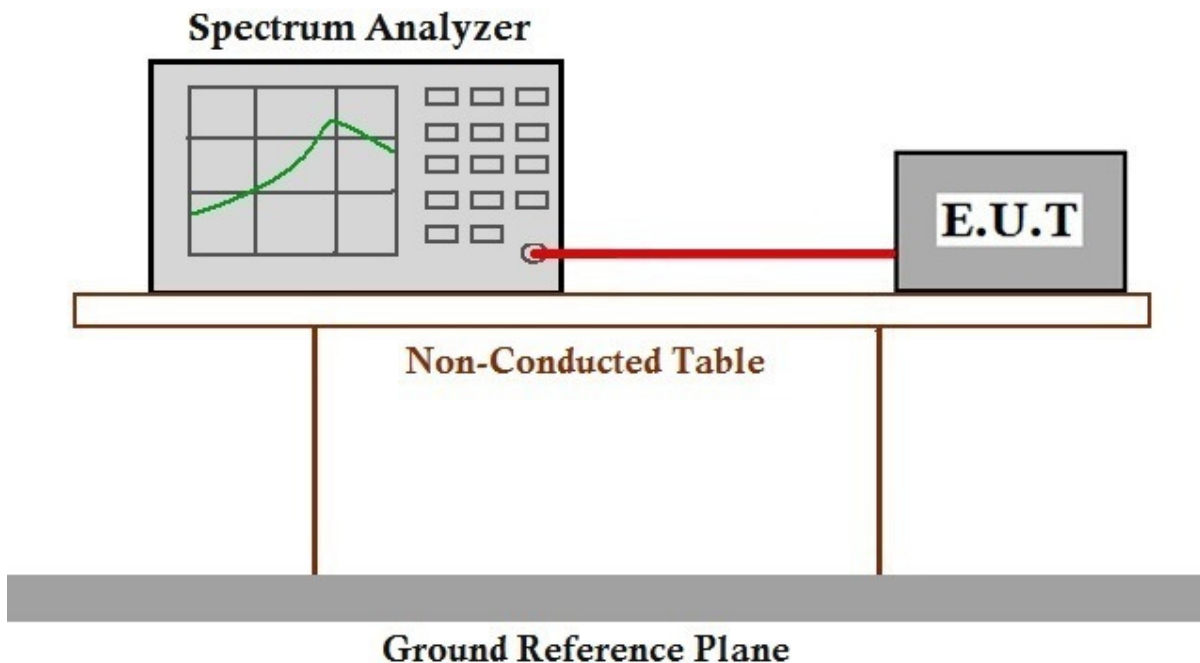

### 7.8.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix


## 7.9 Conducted Spurious Emissions

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement | 47 CFR Part 15, Subpart C 15.247:2019(d), RSS-247 Section 5.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test Method:     | ANSI C63.10 (2013) Section 7.8.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Limit:           | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required. |

### 7.9.1 E.U.T. Operation

|                        |                                                                                                                                                                                                                                                                                                                                          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Environment: |                                                                                                                                                                                                                                                                                                                                          |
| Temperature:           | 20.0 °C      Humidity: 48.0 % RH      :                                                                                                                                                                                                                                                                                                  |
| Test mode              | a: TX_Hop mode_Keep the EUT in frequency hopping mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.<br>b: TX_non-Hop mode_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report. |

### 7.9.2 Test Setup Diagram

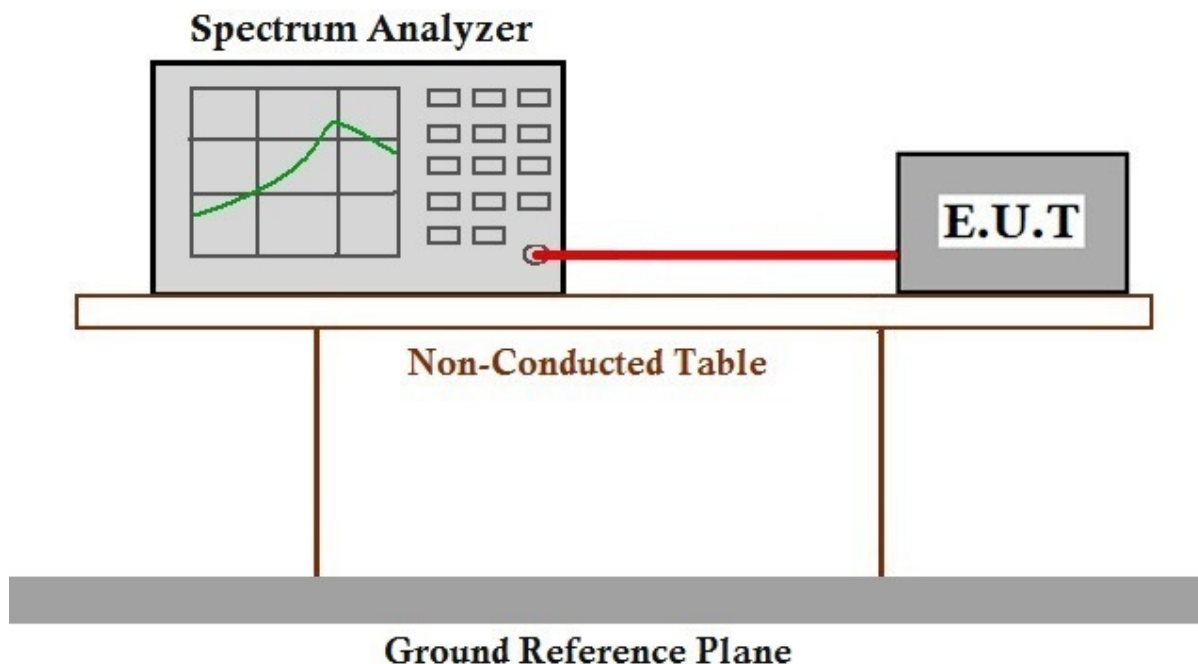

### 7.9.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix

## 7.10 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d), Section 3.3 & RSS-Gen Section 8.10  
Test Method: ANSI C63.10 (2013) Section 6.10.5  
Limit:

**Table 5 – General field strength limits at frequencies above 30 MHz**

| Frequency (MHz) | Field strength ( $\mu$ V/m at 3 m) |
|-----------------|------------------------------------|
| 30 - 88         | 100                                |
| 88 - 216        | 150                                |
| 216 - 960       | 200                                |
| Above 960       | 500                                |

**Table 6 – General field strength limits at frequencies below 30 MHz**

| Frequency      | Magnetic field strength (H-Field) ( $\mu$ A/m) | Measurement distance (m) |
|----------------|------------------------------------------------|--------------------------|
| 9 - 490 kHz 1  | 6.37/F (F in kHz)                              | 300                      |
| 490 - 1705 kHz | 63.7/F (F in kHz)                              | 30                       |
| 1.705 - 30 MHz | 0.08                                           | 30                       |

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.


### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 20.0 °C Humidity: 48.0 % RH :

Test mode b: TX\_non-Hop mode\_Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.10.2 Test Setup Diagram

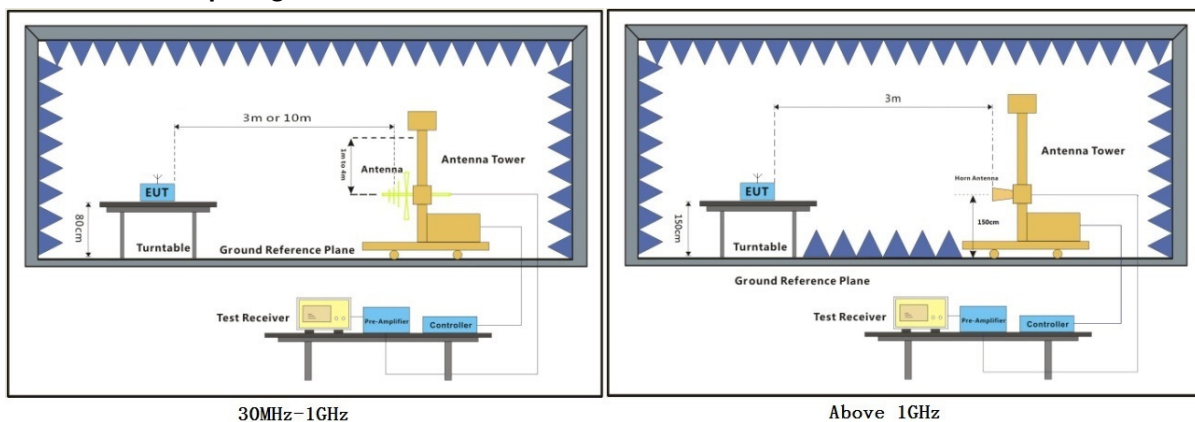

### 7.10.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

| Frequency<br>(MHz) | Antenna<br>Polarization | Emission Level (dBμV/m) |         | Limit (dBμV/m) |         | Remark |
|--------------------|-------------------------|-------------------------|---------|----------------|---------|--------|
|                    |                         | Peak                    | Average | Peak           | Average |        |
| 2390.000           | H                       | 47.4                    | 33.2    | 74.0           | 54.0    | Pass   |
| 2483.500           | H                       | 53.9                    | 38.3    | 74.0           | 54.0    | Pass   |
| 2390.000           | V                       | 48.2                    | 34.1    | 74.0           | 54.0    | Pass   |
| 2483.500           | V                       | 57.1                    | 40.4    | 74.0           | 54.0    | Pass   |

### 7.11 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209, Section 3.3 & RSS-Gen Section 8.9  
Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6  
Limit:

**Table 5 – General field strength limits at frequencies above 30 MHz**

| Frequency (MHz) | Field strength ( $\mu$ V/m at 3 m) |
|-----------------|------------------------------------|
| 30 - 88         | 100                                |
| 88 - 216        | 150                                |
| 216 - 960       | 200                                |
| Above 960       | 500                                |

**Table 6 – General field strength limits at frequencies below 30 MHz**

| Frequency      | Magnetic field strength (H-Field) ( $\mu$ A/m) | Measurement distance (m) |
|----------------|------------------------------------------------|--------------------------|
| 9 - 490 kHz 1  | 6.37/F (F in kHz)                              | 300                      |
| 490 - 1705 kHz | 63.7/F (F in kHz)                              | 30                       |
| 1.705 - 30 MHz | 0.08                                           | 30                       |

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.


### 7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 22.2 °C Humidity: 48.6 % RH :

Test mode b: TX\_non-Hop mode Keep the EUT in continuously transmitting mode with modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.11.2 Test Setup Diagram

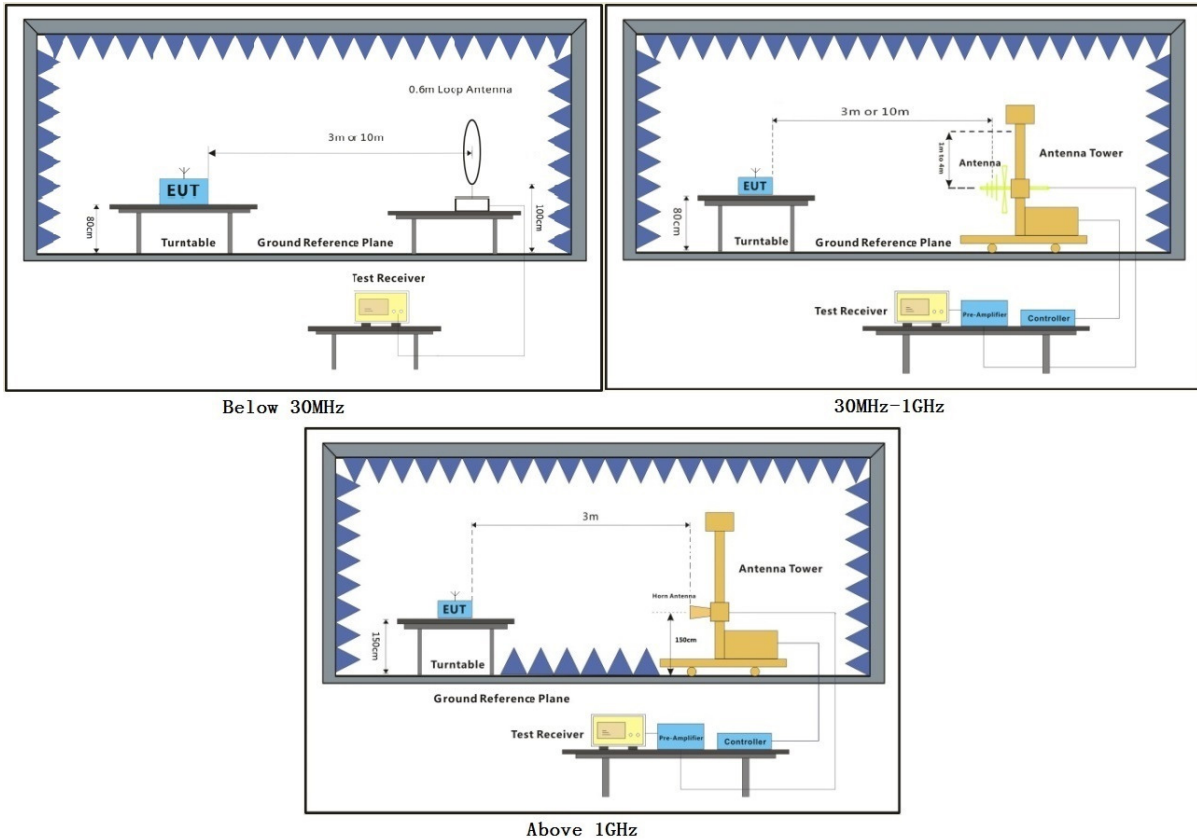

### 7.11.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

#### Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

### Radiated emission below 1GHz

Mode: b;


Polarization: Horizontal

Quasi-peak measurement:

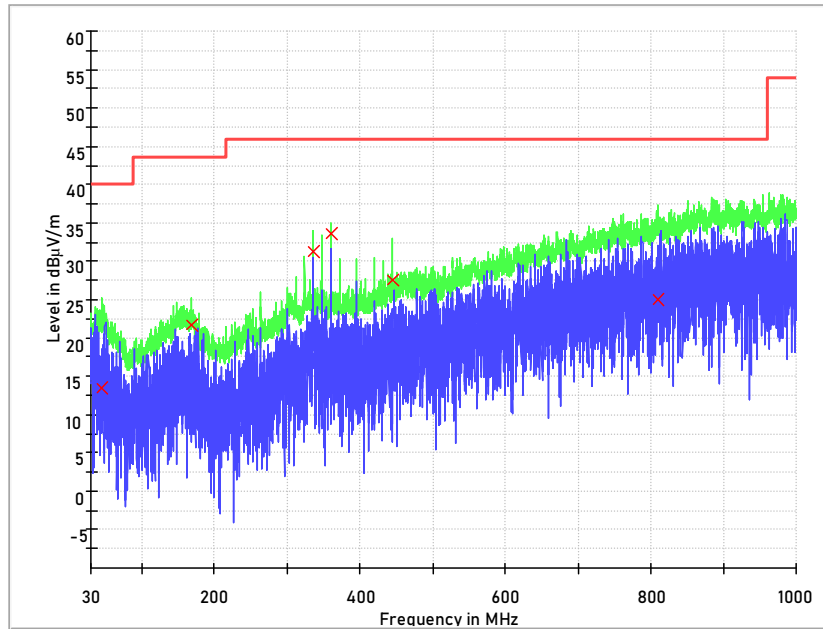

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV/m) | Pol. | Corr.<br>(dB/m) | Margin<br>(dB) | Limit<br>(dBμV/m) | Result |
|--------------------|-----------------------|------|-----------------|----------------|-------------------|--------|
| 43.677000          | 13.4                  | H    | 14.0            | 26.6           | 40.0              | Pass   |
| 168.031000         | 21.7                  | H    | 14.2            | 21.8           | 43.5              | Pass   |
| 336.035000         | 31.2                  | H    | 15.9            | 14.8           | 46.0              | Pass   |
| 359.994000         | 33.7                  | H    | 16.2            | 12.3           | 46.0              | Pass   |
| 443.996000         | 27.6                  | H    | 18.6            | 18.4           | 46.0              | Pass   |
| 809.298000         | 25.0                  | H    | 25.0            | 21.0           | 46.0              | Pass   |

Mode: b;  
Polarization: Vertical  
Quasi-peak measurement:

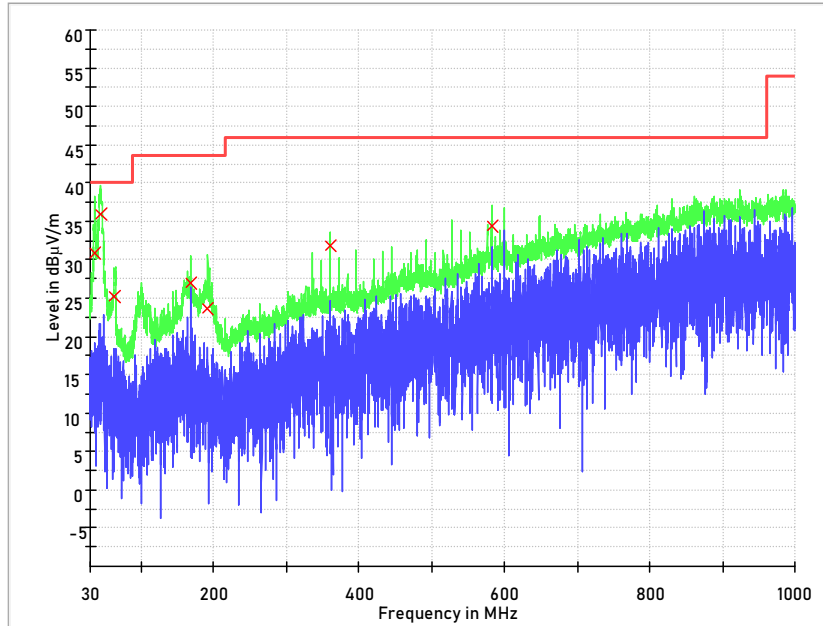

| Frequency<br>(MHz) | QuasiPeak<br>(dBµV/m) | Pol. | Corr.<br>(dB/m) | Margin<br>(dB) | Limit<br>(dBµV/m) | Result |
|--------------------|-----------------------|------|-----------------|----------------|-------------------|--------|
| 36.402000          | 30.8                  | V    | 13.0            | 9.2            | 40.0              | Pass   |
| 44.356000          | 36.0                  | V    | 14.0            | 4.0            | 40.0              | Pass   |
| 63.853000          | 25.2                  | V    | 13.2            | 14.8           | 40.0              | Pass   |
| 168.031000         | 26.9                  | V    | 14.2            | 16.6           | 43.5              | Pass   |
| 359.994000         | 31.9                  | V    | 16.2            | 14.1           | 46.0              | Pass   |
| 582.415000         | 34.4                  | V    | 21.3            | 11.6           | 46.0              | Pass   |

**Above 1GHz**

Channel: Low

| Frequency<br>(MHz) | Antenna<br>Polarization | Emission Level (dB $\mu$ V/m) |         | Limit (dB $\mu$ V/m) |         | Remark |
|--------------------|-------------------------|-------------------------------|---------|----------------------|---------|--------|
|                    |                         | Peak                          | Average | Peak                 | Average |        |
| 1805.125           | V                       | 56.0                          | 36.7    | 74                   | 54      | Pass   |
| 2053.750           | H                       | 70.0                          | 50.5    | 74                   | 54      | Pass   |
| 4811.000           | H                       | 63.4                          | 50.3    | 74                   | 54      | Pass   |
| 7215.000           | H                       | 62.9                          | 47.1    | 74                   | 54      | Pass   |
| 9620.000           | H                       | 61.6                          | 45.4    | 74                   | 54      | Pass   |
| 11421.500          | V                       | 61.4                          | 47.9    | 74                   | 54      | Pass   |

Channel: Middle

| Frequency<br>(MHz) | Antenna<br>Polarization | Emission Level (dB $\mu$ V/m) |         | Limit (dB $\mu$ V/m) |         | Remark |
|--------------------|-------------------------|-------------------------------|---------|----------------------|---------|--------|
|                    |                         | Peak                          | Average | Peak                 | Average |        |
| 1831.000           | H                       | 65.5                          | 51.0    | 74.0                 | 54.0    | Pass   |
| 2086.750           | V                       | 58.2                          | 47.5    | 74.0                 | 54.0    | Pass   |
| 4877.500           | H                       | 64.7                          | 52.7    | 74.0                 | 54.0    | Pass   |
| 7946.500           | V                       | 57.4                          | 44.0    | 74.0                 | 54.0    | Pass   |
| 9394.500           | V                       | 58.3                          | 44.6    | 74.0                 | 54.0    | Pass   |
| 10977.000          | V                       | 60.8                          | 47.8    | 74.0                 | 54.0    | Pass   |

Channel: High

| Frequency<br>(MHz) | Antenna<br>Polarization | Emission Level (dB $\mu$ V/m) |         | Limit (dB $\mu$ V/m) |         | Remark |
|--------------------|-------------------------|-------------------------------|---------|----------------------|---------|--------|
|                    |                         | Peak                          | Average | Peak                 | Average |        |
| 1859.500           | V                       | 64.8                          | 48.9    | 74                   | 54      | Pass   |
| 2123.125           | V                       | 56.2                          | 45.8    | 74                   | 54      | Pass   |
| 4949.000           | H                       | 65.0                          | 50.7    | 74                   | 54      | Pass   |
| 4949.000           | V                       | 61.3                          | 49.0    | 74                   | 54      | Pass   |
| 9902.000           | H                       | 61.2                          | 47.6    | 74                   | 54      | Pass   |
| 12132.500          | H                       | 61.0                          | 48.0    | 74                   | 54      | Pass   |



Report No.: HKEM210500049202  
Page: 40 of 55

## 8 Photographs

Remark: Photos refer to Appendix: External Photo, Internal Photo and setup Photo.


## 9 Appendix

### 9.1 Peak conducted output power


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2405.000000         | 13.1             | 21.0            | PASS   |
| 2439.000000         | 13.4             | 21.0            | PASS   |
| 2475.000000         | 13.3             | 21.0            | PASS   |

Remark: Antenna gain: 2dBi


Remark: Cable loss 0.8dB was considered and set in system configuration.

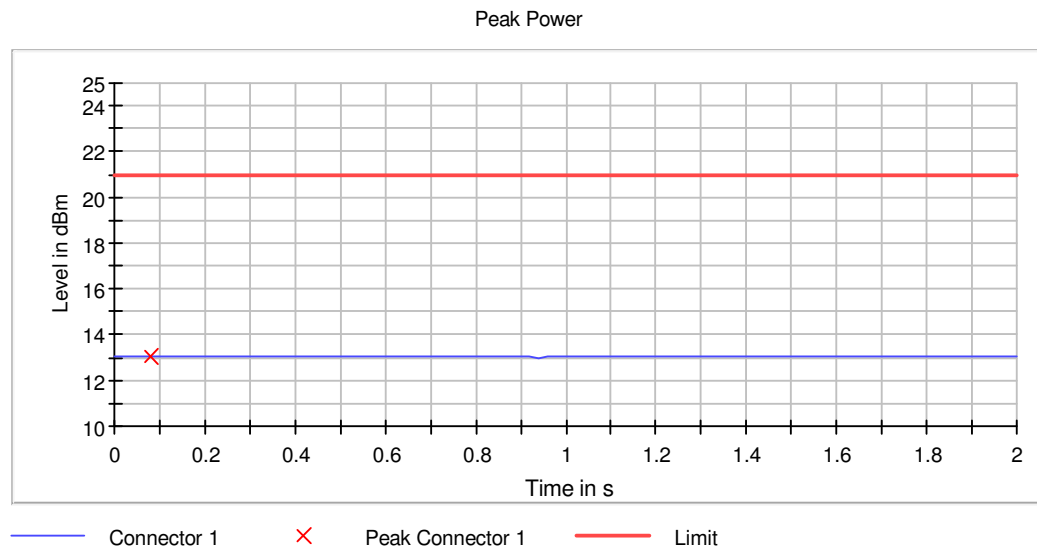

Peak Power

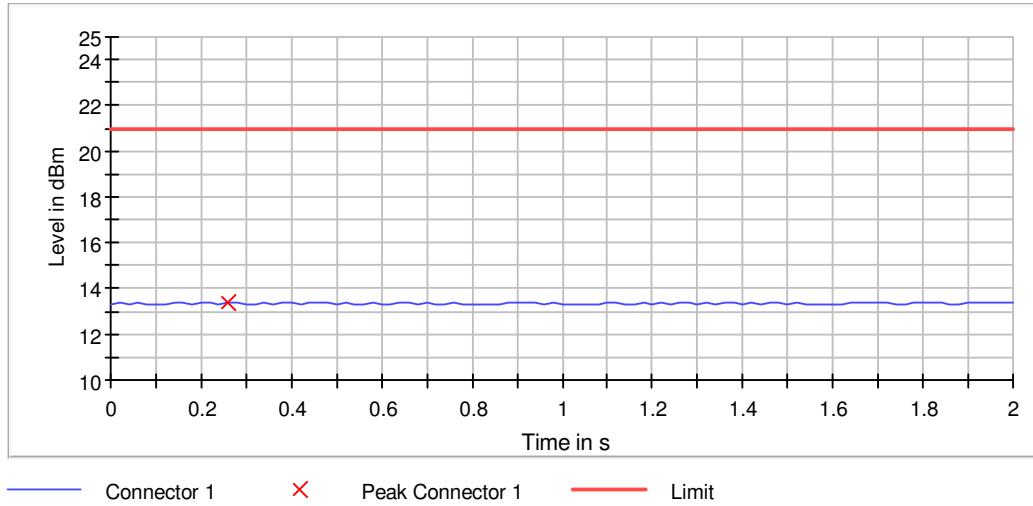


Peak Power

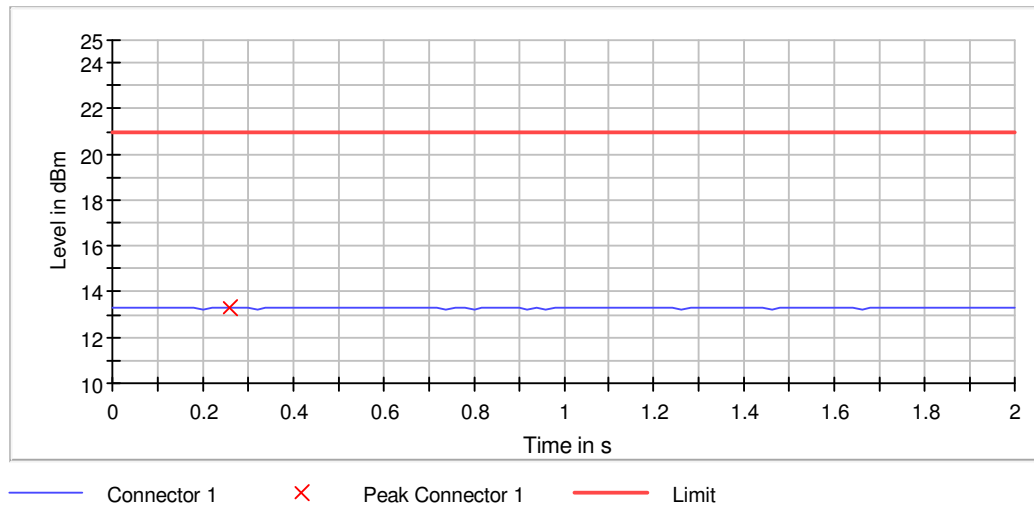


## 9.2 Emission Bandwidth 20 dB


| DUT Frequency (MHz) | Bandwidth (MHz) | Limit (MHz) | Result |
|---------------------|-----------------|-------------|--------|
| 2405.000000         | 2.40            | ---         | PASS   |
| 2439.000000         | 2.39            | ---         | PASS   |
| 2475.000000         | 2.40            | ---         | PASS   |

20 dB Bandwidth

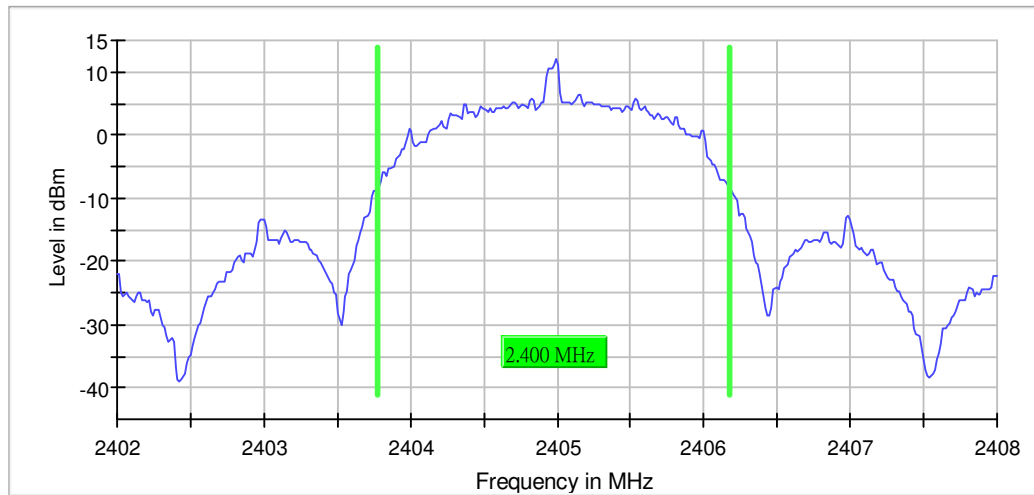

20 dB Bandwidth

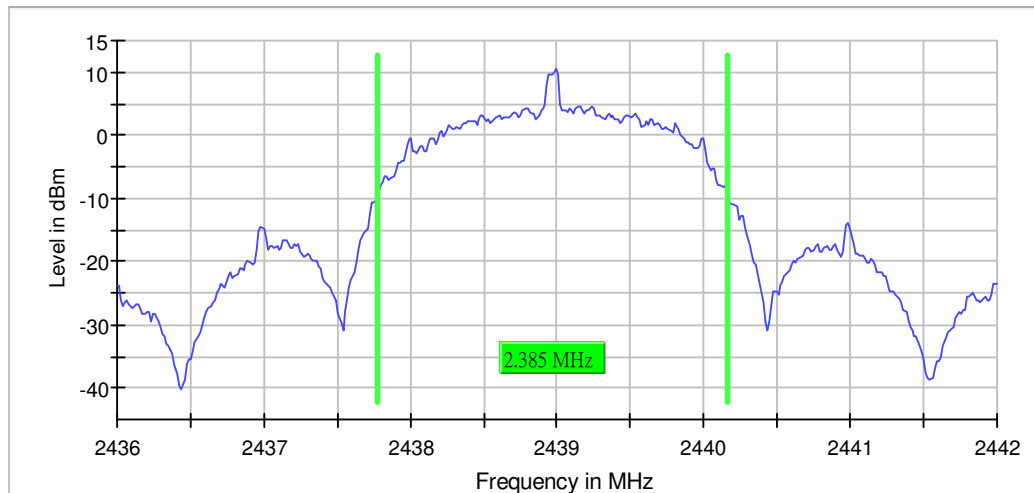

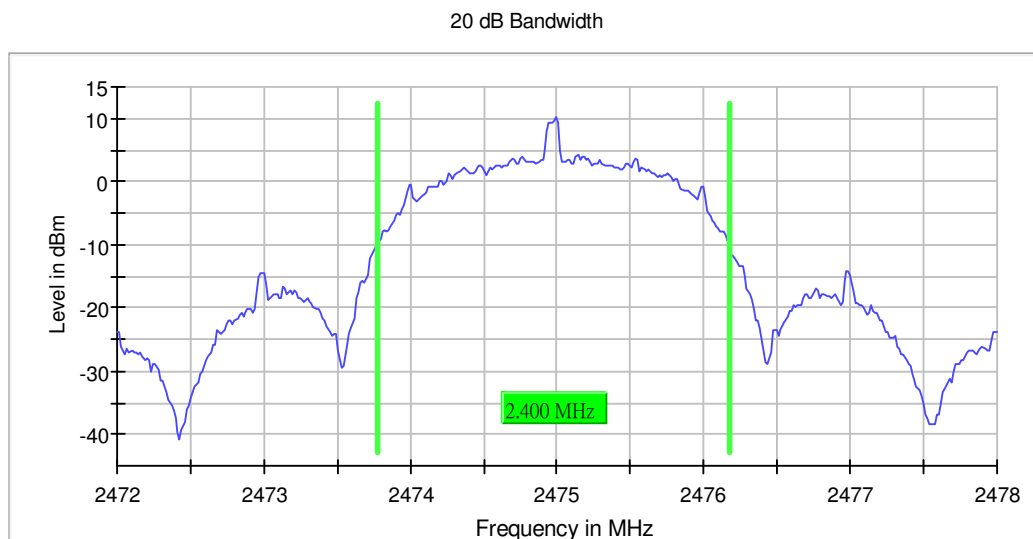

## Measurement Setting


| Setting               | Instrument Value | Target Value  |
|-----------------------|------------------|---------------|
| RBW                   | 30.000 kHz       | >= 30.000 kHz |
| VBW                   | 100.000 kHz      | >= 90.000 kHz |
| SweepPoints           | 400              | ~ 400         |
| SweepTime             | 75.781 $\mu$ s   | AUTO          |
| Reference Level       | 10.000 dBm       | 10.000 dBm    |
| Attenuation           | 30.000 dB        | AUTO          |
| Detector              | MaxPeak          | MaxPeak       |
| SweepCount            | 200              | 200           |
| Filter                | 3 dB             | 3 dB          |
| Trace Mode            | Max Hold         | Max Hold      |
| SweepType             | FFT              | AUTO          |
| Preamplifier          | off              | off           |
| Stablemode            | Trace            | Trace         |
| Stablevalue           | 0.50 dB          | 0.50 dB       |
| Run                   | 24 / max. 150    | max. 150      |
| Stable                | 5 / 5            | 5             |
| Max Stable Difference | 0.15 dB          | 0.50 dB       |

Remark: Cable loss 0.8dB was considered and set in system configuration.


### 9.3 Occupied Channel Bandwidth 99%


| DUT Frequency (MHz) | Bandwidth (MHz) | Limit (MHz) | Result |
|---------------------|-----------------|-------------|--------|
| 2405.000000         | 2.37            | ---         | PASS   |
| 2439.000000         | 2.34            | ---         | PASS   |
| 2475.000000         | 2.37            | ---         | PASS   |

99 % Bandwidth

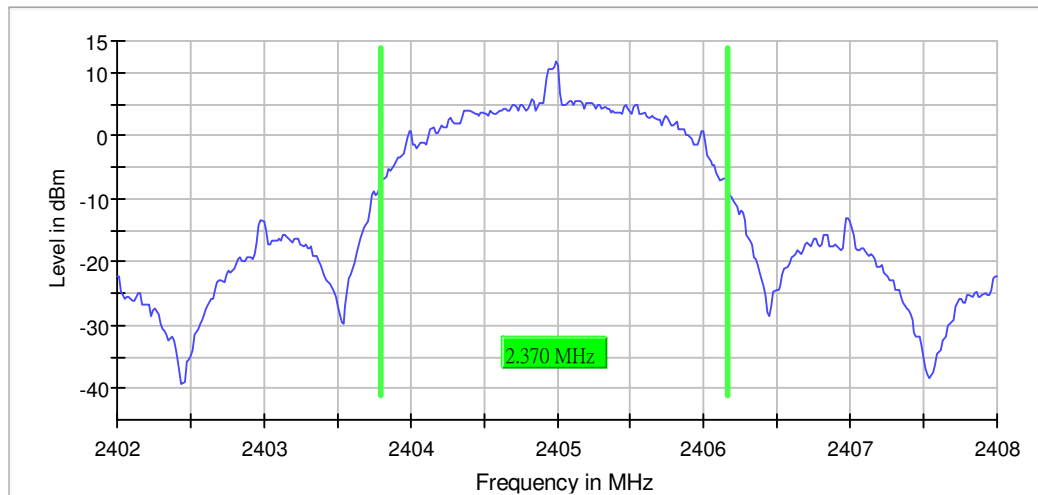

99 % Bandwidth

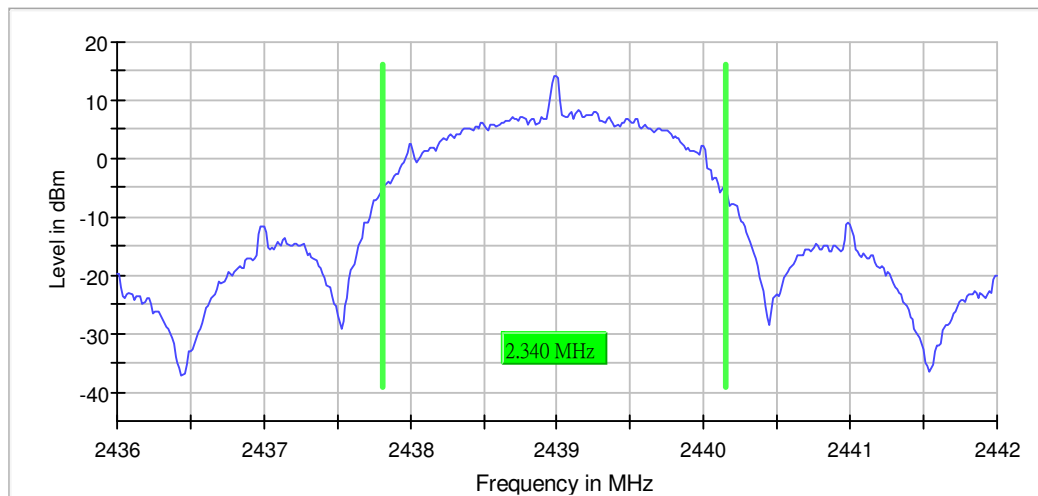

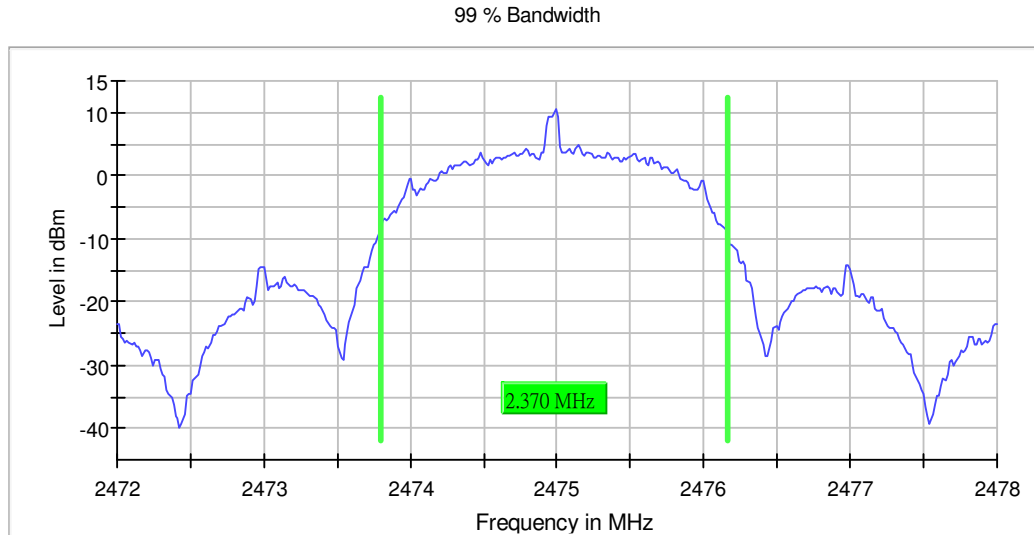

## Measurement Setting

| Setting               | Instrument Value | Target Value      |
|-----------------------|------------------|-------------------|
| RBW                   | 30.000 kHz       | $\geq 30.000$ kHz |
| VBW                   | 100.000 kHz      | $\geq 90.000$ kHz |
| SweepPoints           | 400              | ~ 400             |
| SweepTime             | 75.781 $\mu$ s   | AUTO              |
| Reference Level       | 10.000 dBm       | 10.000 dBm        |
| Attenuation           | 30.000 dB        | AUTO              |
| Detector              | MaxPeak          | MaxPeak           |
| SweepCount            | 500              | 500               |
| Filter                | 3 dB             | 3 dB              |
| Trace Mode            | Max Hold         | Max Hold          |
| SweepType             | FFT              | AUTO              |
| Preamp                | off              | off               |
| Stablemode            | Trace            | Trace             |
| Stablevalue           | 0.30 dB          | 0.30 dB           |
| Run                   | 36 / max. 150    | max. 150          |
| Stable                | 3 / 3            | 3                 |
| Max Stable Difference | 0.00 dB          | 0.30 dB           |


Remark: Cable loss 0.8dB was considered and set in system configuration.

#### 9.4 Carrier Frequency Separation

| DUT Frequency (MHz) | Frequency Separation (MHz) | Limit (MHz) | Result |
|---------------------|----------------------------|-------------|--------|
| 2.05                | 1.96                       | >1.58       | PASS   |

Remark: Limit =  $2/3 \times 20\text{dB}$  Bandwidth

The channel shown is the worst case:

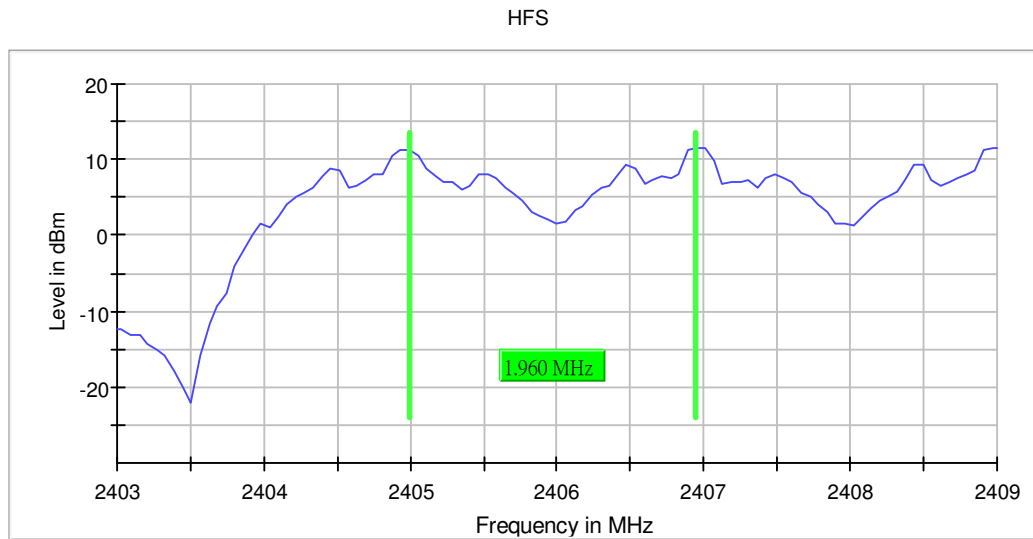


Remark: Cable loss 0.8dB was considered and set in system configuration.

## 9.5 Dwell Time

| Channel (MHz) | Width of Burst (ms) | Number of Burst(s) | Active Channels | Measurement Time (s) | Dwell Time (ms) | Limit (ms) | Result |
|---------------|---------------------|--------------------|-----------------|----------------------|-----------------|------------|--------|
| 2405          | 7.572               | 51                 | 32              | 12.8                 | 386.17          | ≤400       | Pass   |

\*Remark: the channel shown is the worst case.

Time of Channel Occupancy

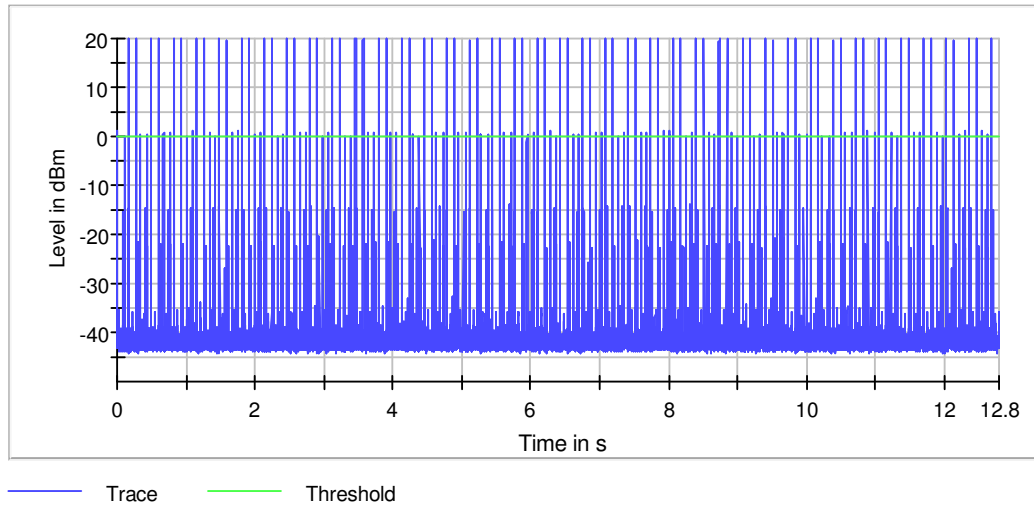


## Measurement Setting

| Setting         | Instrument Value | Target Value |
|-----------------|------------------|--------------|
| Span            | ZeroSpan         | ZeroSpan     |
| RBW             | 2.000 MHz        | ~ 2.500 MHz  |
| VBW             | 5.000 MHz        | ~ 6.000 MHz  |
| SweepPoints     | 30001            | ~ 30001      |
| Reference Level | -20.000 dBm      | -20.000 dBm  |
| Attenuation     | 0.000 dB         | 0.000 dB     |
| Detector        | MaxPeak          | MaxPeak      |
| SweepCount      | 1                | 1            |
| Filter          | Channel          | Channel      |
| Trace Mode      | Clear Write      | Clear Write  |
| SweepType       | Sweep            | AUTO         |
| Preamp          | off              | off          |
| Trigger         | External         | External     |
| Trigger Offset  | 0.000 s          | 0.000 s      |

Remark: Cable loss 0.8dB was considered and set in system configuration.

## 9.6 Hopping Frequencies

| Channels | Limit Min | Result |
|----------|-----------|--------|
| 32       | 15        | PASS   |

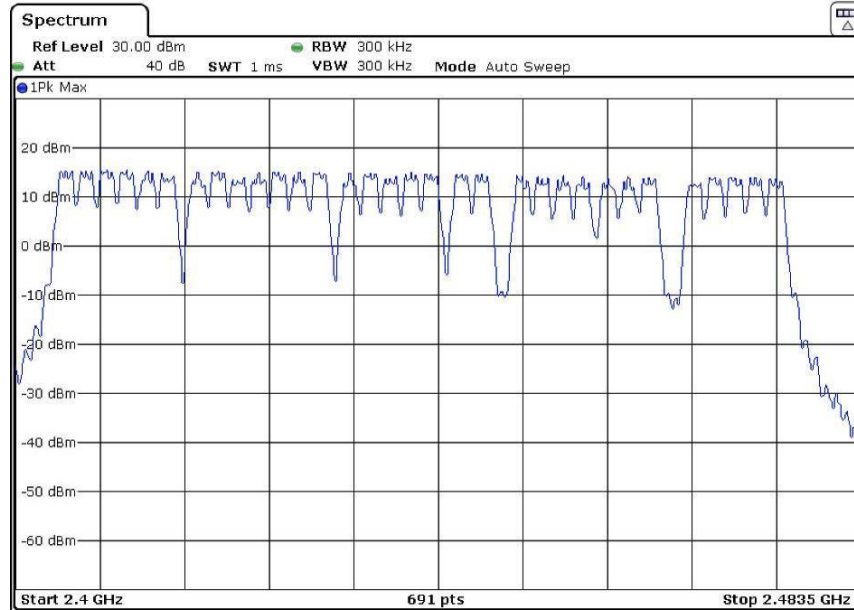

## 9.7 Conducted Band Edge Measurement

### Non-hopping mode

### Inband Peak


| Frequency (MHz) | Level (dBm) |
|-----------------|-------------|
| 2405.025000     | 12.4        |
| 2475.025000     | 11.5        |

### Measurements


| Frequency (MHz) | Level (dBm) | Margin (dB) | Limit (dBm) | Result |
|-----------------|-------------|-------------|-------------|--------|
| 2399.975000     | -27.6       | 10.0        | -17.6       | PASS   |
| 2483.975000     | -40.5       | 21.9        | -18.5       | PASS   |

Remark: Limit = Inband peak – 30dB

Band Edge

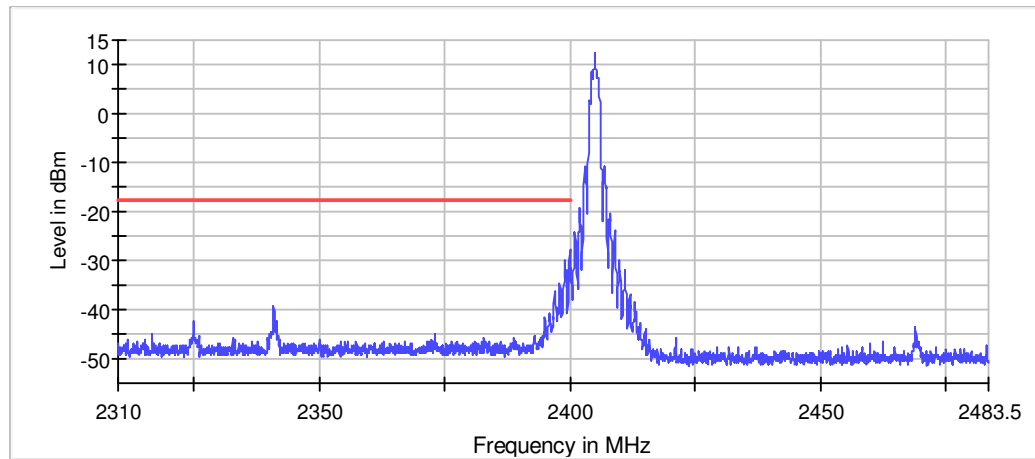

Band Edge

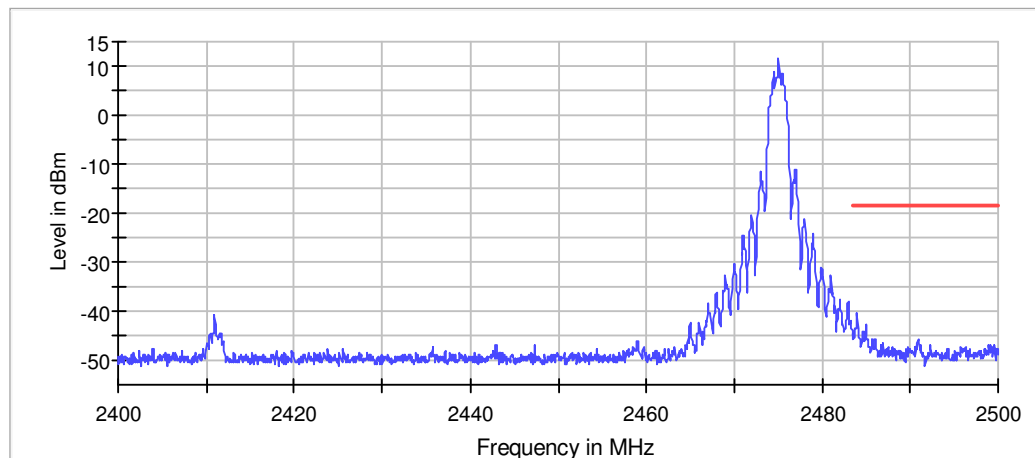

## Measurement Setting

| Setting               | Instrument Value | Target Value       |
|-----------------------|------------------|--------------------|
| RBW                   | 100.000 kHz      | $\leq 100.000$ kHz |
| VBW                   | 300.000 kHz      | $\geq 300.000$ kHz |
| SweepPoints           | 1800             | ~ 1800             |
| SweepTime             | 1.800 ms         | AUTO               |
| Reference Level       | 10.000 dBm       | 10.000 dBm         |
| Attenuation           | 30.000 dB        | AUTO               |
| Detector              | MaxPeak          | MaxPeak            |
| SweepCount            | 100              | 100                |
| Filter                | 3 dB             | 3 dB               |
| Trace Mode            | Max Hold         | Max Hold           |
| SweepType             | Sweep            | AUTO               |
| Preamplifier          | off              | off                |
| Stablemode            | Trace            | Trace              |
| Stablevalue           | 0.50 dB          | 0.50 dB            |
| Run                   | 10 / max. 150    | max. 150           |
| Stable                | 3 / 3            | 3                  |
| Max Stable Difference | 0.29 dB          | 0.50 dB            |

Remark: Cable loss 0.8dB was considered and set in system configuration.

## Hopping mode

### Inband Peak


| Frequency (MHz) | Level (dBm) |
|-----------------|-------------|
| 2406.925000     | 11.9        |
| 2405.025000     | 11.8        |

### Measurements

| Frequency (MHz) | Level (dBm) | Margin (dB) | Limit (dBm) | Result |
|-----------------|-------------|-------------|-------------|--------|
| 2399.975000     | -29.2       | 11.2        | -18.1       | PASS   |
| 2483.975000     | -43.8       | 25.6        | -18.2       | PASS   |


Remark: Limit = Inband peak – 30dB

Band Edge

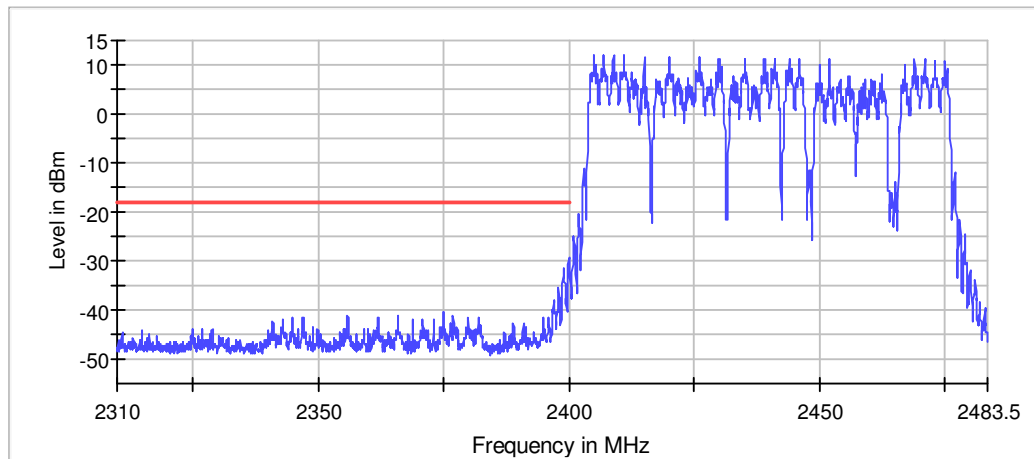

— Limit — Sum Level × Fail

Band Edge

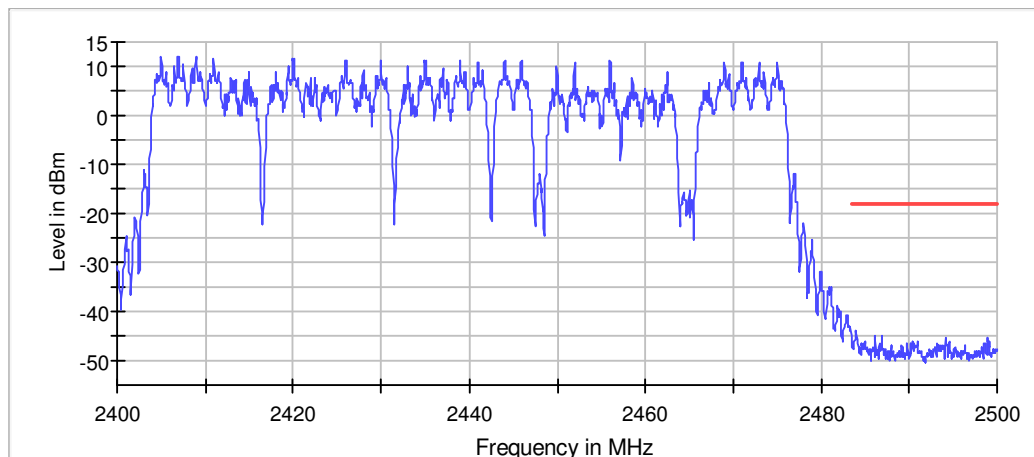

— Limit — Sum Level × Fail


## Measurement Setting

| Setting               | Instrument Value | Target Value       |
|-----------------------|------------------|--------------------|
| RBW                   | 100.000 kHz      | $\leq 100.000$ kHz |
| VBW                   | 300.000 kHz      | $\geq 300.000$ kHz |
| SweepPoints           | 1670             | ~ 1670             |
| SweepTime             | 1.670 ms         | AUTO               |
| Reference Level       | 10.000 dBm       | 10.000 dBm         |
| Attenuation           | 30.000 dB        | AUTO               |
| Detector              | MaxPeak          | MaxPeak            |
| SweepCount            | 100              | 100                |
| Filter                | 3 dB             | 3 dB               |
| Trace Mode            | Max Hold         | Max Hold           |
| SweepType             | Sweep            | AUTO               |
| Preamplifier          | off              | off                |
| StableMode            | Trace            | Trace              |
| StableValue           | 0.50 dB          | 0.50 dB            |
| Run                   | 85 / max. 150    | max. 150           |
| Stable                | 3 / 3            | 3                  |
| Max Stable Difference | 0.07 dB          | 0.50 dB            |


Remark: Cable loss 0.8dB was considered and set in system configuration.

## 9.8 Conducted spurious emission


### Lowest Channel

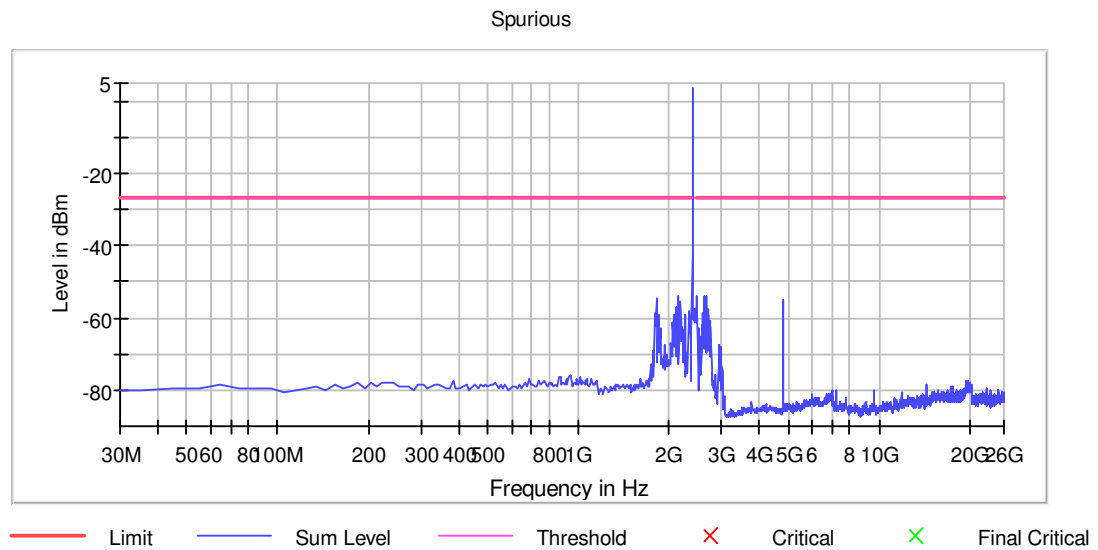

### Middle Channel

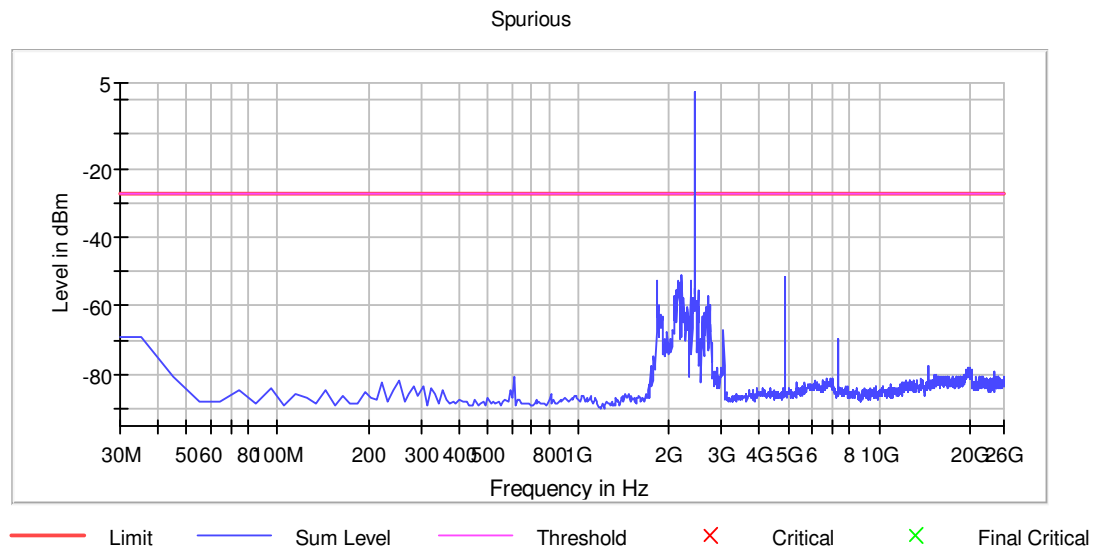

## Highest Channel

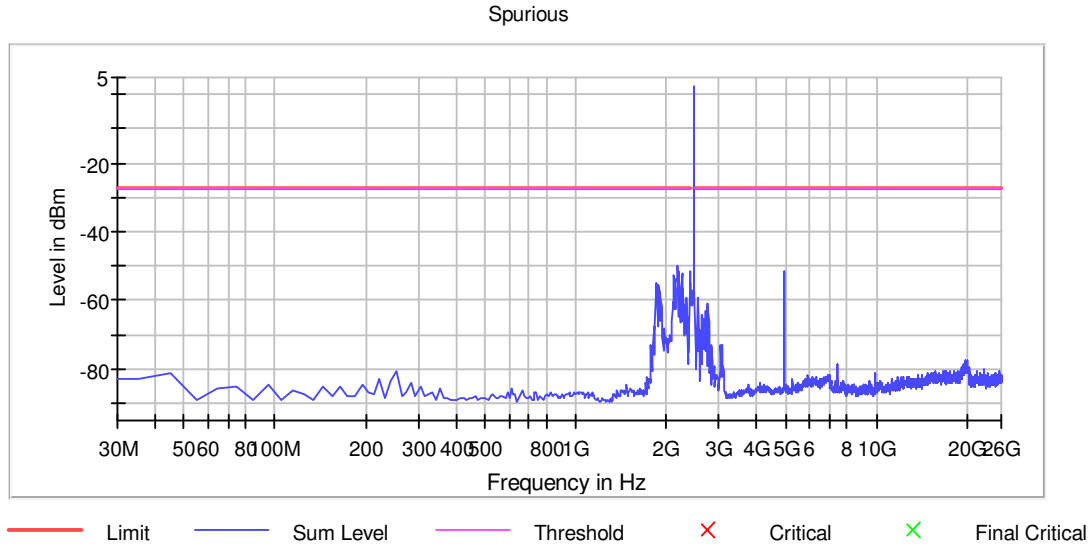

## Measurement Setting

| Setting               | Instrument Value | Target Value |
|-----------------------|------------------|--------------|
| RBW                   | 100.000 kHz      | <= 100.000   |
| VBW                   | 300.000 kHz      | >= 300.000   |
| SweepPoints           | 238              | ~ 238        |
| SweepTime             | 23.700 ms        | AUTO         |
| Reference Level       | -10.000 dBm      | -30.000 dBm  |
| Attenuation           | 20.000 dB        | AUTO         |
| Detector              | MaxPeak          | MaxPeak      |
| SweepCount            | 3                | 3            |
| Filter                | 3 dB             | 3 dB         |
| Trace Mode            | Max Hold         | Max Hold     |
| Sweeptype             | Sweep            | AUTO         |
| Preamp                | off              | off          |
| Stablemode            | Trace            | Trace        |
| Stablevalue           | 0.50 dB          | 0.50 dB      |
| Run                   | 14 / max. 40     | max. 40      |
| Stable                | 3 / 3            | 3            |
| Max Stable Difference | 0.00 dB          | 0.50 dB      |

Remark: Cable loss 0.8dB was considered and set in system configuration.

- End of the Report -