




Diagnostic Tool

MS70

Quick start guide

Motorcycle Scanner

QUICK START GUIDANCE

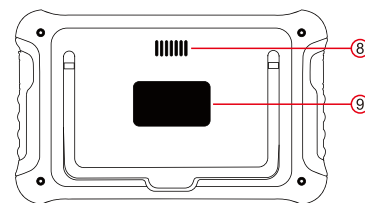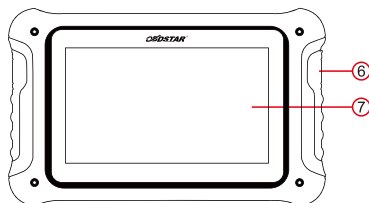


The 7-inch intelligent motorcycle diagnostic equipment is a new generation portable product customized by OBDSTAR for customers. Based on RK3128 Quad-Core processor and equipped with a 7.0-inch capacitive touch screen, brings customer professional diagnosis experience.

- (1) OFF/ON
- (2) Main Cable Port
- (3) Charging Port
- (4) Type-c Socket
- (5) USB Port


- (6) TF Card Slot
- (7) Touch/Display Screen
- (8) Speaker
- (9) Sticker

Connection Diagram

1

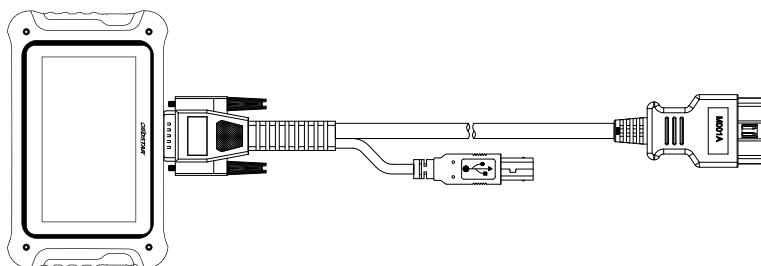

2

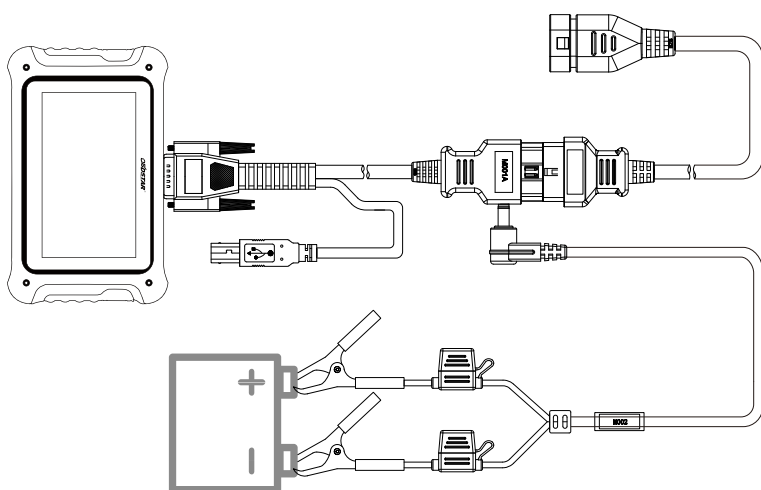

Power On- Registration- Upgrade

Power On

Long Press "ON/OFF" Button for 3 Seconds

Registration

Connect the Equipment with Power Supply and Wifi. Click "DP" - "Personal Center" - "Register" - Fill in Relevant Information and Click "Okay" - Register Successfully



Attention: Keep Your Login Info in Record. The Password Can be Found by Email Once Was Forgot

Declaration: All Product Pictures in This Quick Start Guidance are Only for Reference. Please Refer to Actual Product Configuration. OBDSTAR Reserves the Right to Amend This Quick Start Guidance Without Further Notice.A

For More Information:

Please Visit OBDSTAR Official Website: www.obdstar.com to Acquire More Product Details

Checking The Manual: Turn on Device and Connect with Network. Start From DP Main Page, Click "Support Center" - "Manual" to Know More About Your Equipment. Service Contact: +86-755-86707161



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Warning Statements:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.