



FCC Test Report

Equipment : Home Wi-Fi Solution Kit
Brand Name : AirTies
Model No. : Air 4830
FCC ID : Z3WAIR4830
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
Function : ☒ Point-to-multipoint; ☐ Point-to-point
Applicant : AirTies Wireless Networks
Mithat Uluunlu Sokak No. 23 Esentepe, Sisli Istanbul,
34394 Turkey
Manufacturer : AirTies Wireless Networks
Mithat Uluunlu Sokak No. 23 Esentepe, Sisli Istanbul,
34394 Turkey

The product sample received on May 24, 2016 and completely tested on Aug. 07, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

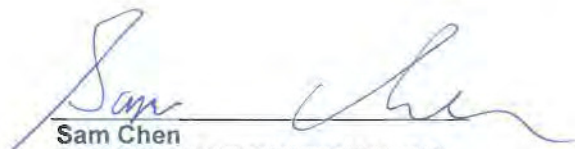

Sam Chen
SPORTON INTERNATIONAL INC.





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Testing Applied Standards	8
1.3	Testing Location Information	8
1.4	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	Test Channel Mode	9
2.2	The Worst Case Measurement Configuration.....	10
2.3	EUT Operation during Test	10
2.4	Accessories	11
2.5	Support Equipment.....	11
2.6	Test Setup Diagram	12
3	TRANSMITTER TEST RESULT	15
3.1	AC Power-line Conducted Emissions	15
3.2	DTS Bandwidth	17
3.3	Fundamental Emission Output Power.....	18
3.4	Power Spectral Density	20
3.5	Emissions in Non-restricted Frequency Bands	22
3.6	Emissions in Restricted Frequency Bands.....	23
4	TEST EQUIPMENT AND CALIBRATION DATA	27
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS		
APPENDIX B. TEST RESULTS OF DTS BANDWIDTH		
APPENDIX C. TEST RESULTS OF FUNDAMENTAL EMISSION OUTPUT POWER		
APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY		
APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS		
APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS		
APPENDIX G. TEST RESULTS OF RADIATED EMISSION CO-LOCATION		
APPENDIX H. TEST PHOTOS		

Summary of Test Result

Conformance Test Specifications				
Report Clause	Ref. Std. Clause	Description	Limit	Result
1.1.2	15.203	Antenna Requirement	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	FCC 15.207	Complied
3.2	15.247(a)	DTS Bandwidth	≥500kHz	Complied
3.3	15.247(b)	Fundamental Emission Output Power	Power [dBm]:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz]:8	Complied
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	Non-Restricted Bands: > 30 dBc	Complied
3.6	15.247(d)	Emissions in Restricted Frequency Bands	Restricted Bands: FCC 15.209	Complied

Revision History

[illegible]

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4G	11b	20	1
2.4G	11g	20	1
2.4G	HT20	20	2
2.4G	HT40	40	2

Note:

- ♦ 2.4G is the 2.4GHz Band (2.4-2.4835GHz).
- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Nss-Min is the minimum number of spatial streams.
- ♦ Nant is the number of outputs. e.g., 2(2,3) means have 2 outputs for port 2 and port 3. 2 means have 2 outputs for port 1 and port 2.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	Airties	Airties#1	Printed Antenna	N/A	3.2	4.2
2	Airties	Airties#1	Printed Antenna	N/A	-	4.2
3	Airties	Airties#1	Printed Antenna	N/A	-	4.2
4	Airties	Airties#1	Printed Antenna	N/A	3.2	4.2

Note: The EUT has four antennas.

<For 2.4GHz Band>

For IEEE 802.11b/g mode<1TX/1RX>:

Only Chain 1 can be used as transmitting antenna and receiving antenna.

For IEEE 802.11n mode<2TX/2RX>:

Chain 1 and Chain 4 will transmit/receive the same signal simultaneously.


Chain 1 and Chain 4 can be used as transmitting/receiving antennas.

<For 5GHz Band>

For IEEE 802.11a/n/ac mode <4TX/4RX>:

Chain 1, Chain 2, Chain 3 and Chain 4 will transmit/receive the same signal simultaneously.

Chain 1, Chain 2, Chain 3 and Chain 4 can be used as transmitting/receiving antennas.

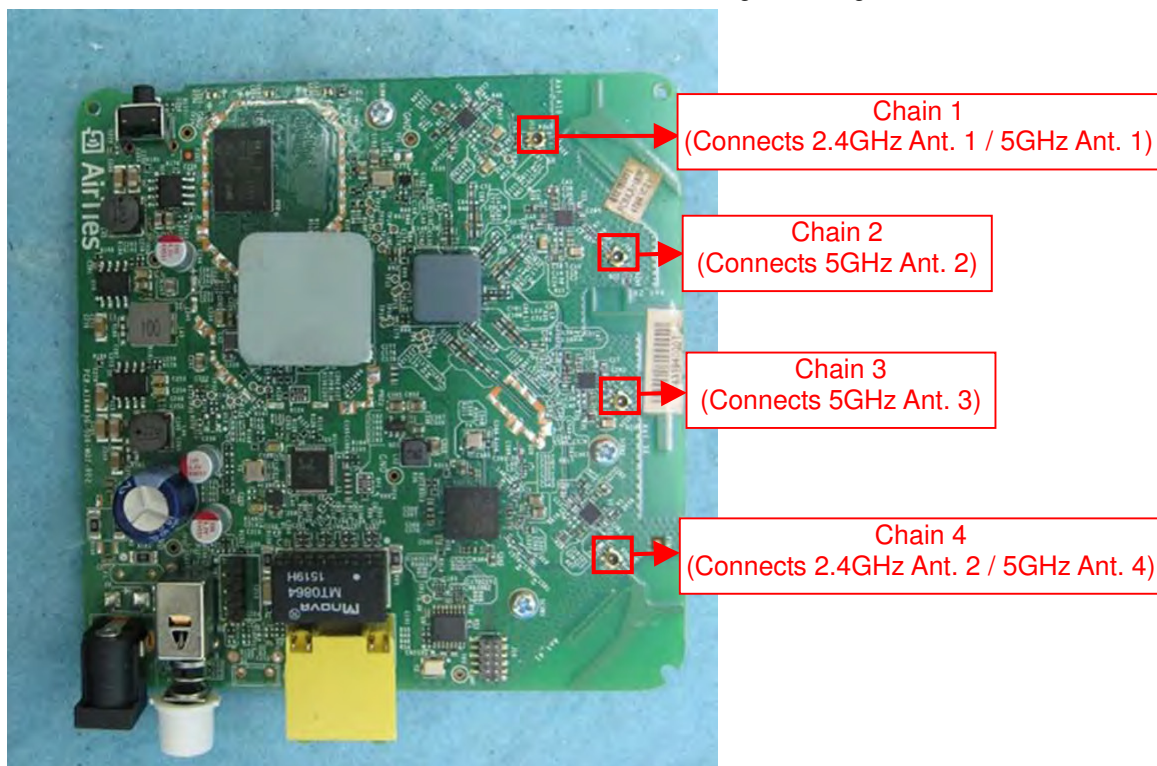

1.1.3 Mode Test Duty Cycle

Mode	DC	T(s)	VBW(Hz) $\geq 1/T$
11b	0.999	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
11g	0.987	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
HT20	0.986	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
HT40	0.972	933.125u	3k

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter		
Beamforming Function	☒	With beamforming	☐ Without beamforming

Note: The product has beamforming function for 802.11n/ac in 5GHz only.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 558074 D01 v03r05
- ◆ FCC KDB 662911 D01 v02r01

1.3 Testing Location Information

Testing Location				
☐	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-318-0055
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-CB	Kenneth Huang	24°C / 60%	Aug. 07, 2016
Radiated	03CH01-CB	Eason Chen/John Tang/ DK Chang/Brian Sun/ Peter Wu	22°C / 54%	Jun. 03, 2016~ Jun. 15, 2016
AC Conduction	CO01-CB	GN Hou	22°C / 59%	Jun. 14, 2016

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Band	Mode	BWch (MHz)	Nss-Min	Nant	Ch. (MHz)	Range	Power Setting
2.4G	11b	20	1	1	2412	L	78
2.4G	11b	20	1	1	2437	M	91
2.4G	11b	20	1	1	2462	H	71
2.4G	11g	20	1	1	2412	L	58
2.4G	11g	20	1	1	2437	M	84
2.4G	11g	20	1	1	2462	H	53
2.4G	HT20	20	1,(M0)	2	2412	L	49
2.4G	HT20	20	1,(M0)	2	2437	M	78
2.4G	HT20	20	1,(M0)	2	2462	H	44
2.4G	HT40	40	1,(M0)	2	2422	L	42
2.4G	HT40	40	1,(M0)	2	2437	M	51
2.4G	HT40	40	1,(M0)	2	2452	H	37

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Normal Link

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Fundamental Emission Output Power Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Non-restricted Frequency Bands Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
Operating Mode > 1GHz	CTX

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	2.4GHz+5GHz
Refer to Sporton Test Report No.: FA652202 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	

Note: The EUT can be used at Y-axis only.

2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

2.4 Accessories

Accessories				
No.	Equipment Name	Brand Name	Model Name	Rating
1	Adapter	MOSO	MSA-C1000IC12.0-12W-US	Input: 100-240V~50/60Hz, 0.5A max Output: 12.0V, 1A

2.5 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E6430	DoC
2	NB	DELL	E6430	DoC
3	NB	DELL	E6430	DoC

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	NB	DELL	E4300	DoC
3	NB	DELL	E4300	DoC


For Test Site No: 03CH01-CB (above 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC


For Test Site No: TH01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC


2.6 Test Setup Diagram

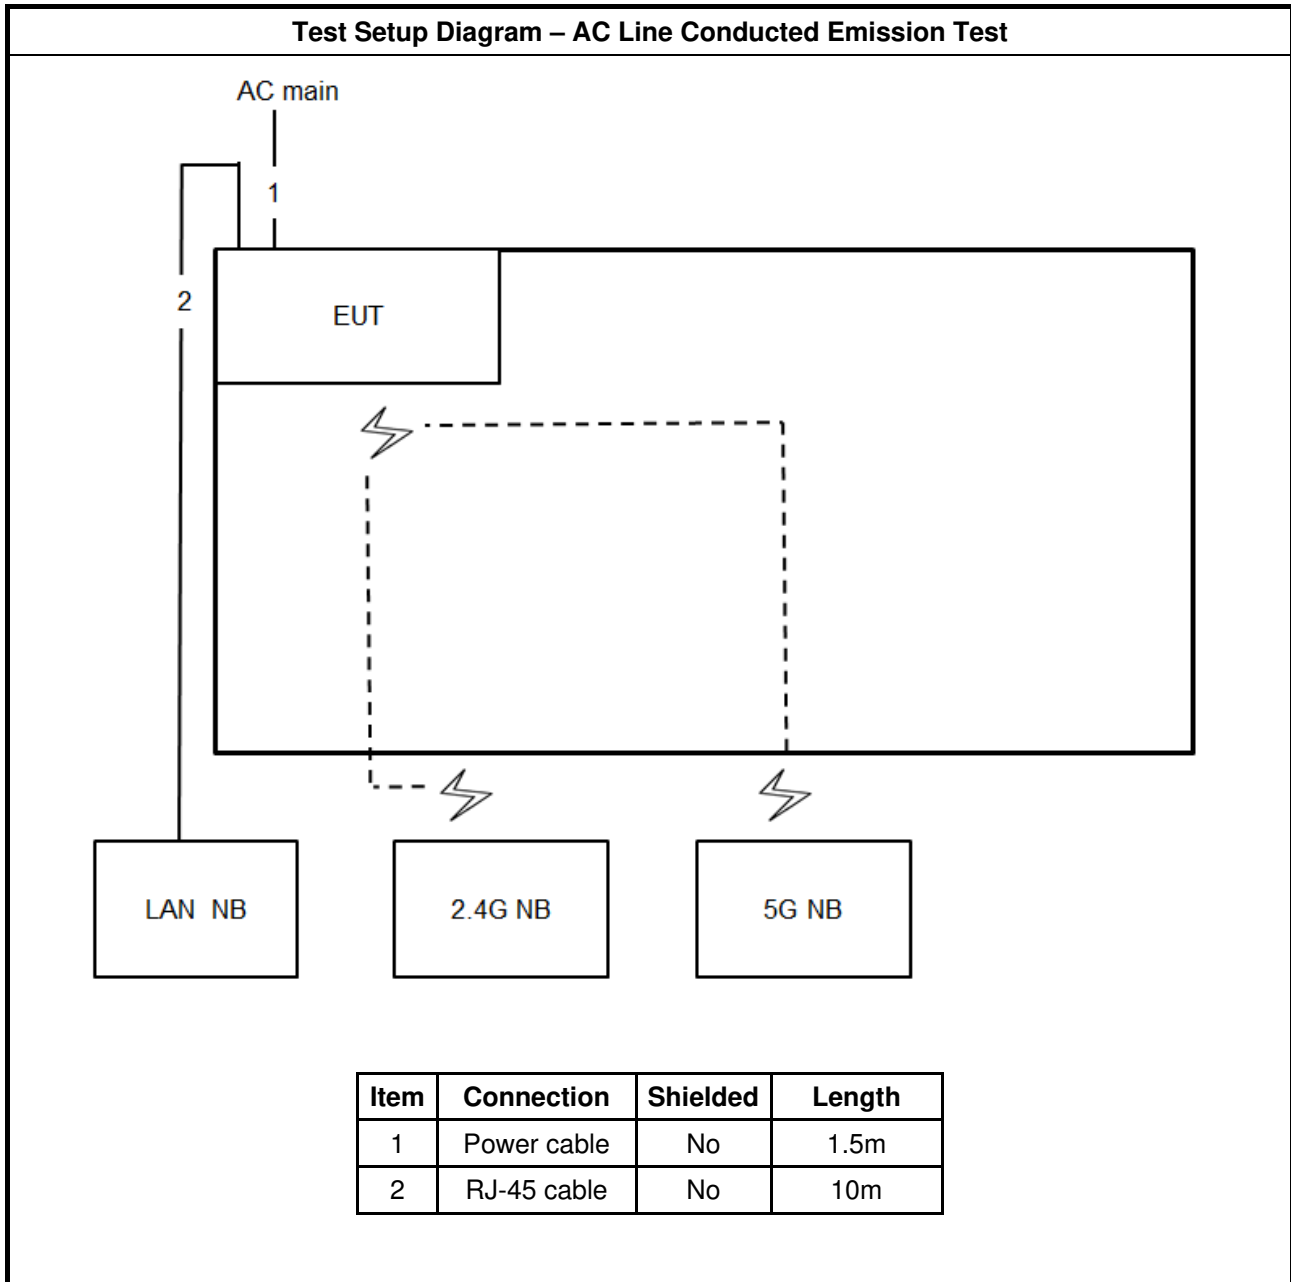

Test Setup Diagram - Radiated Test < 1GHz

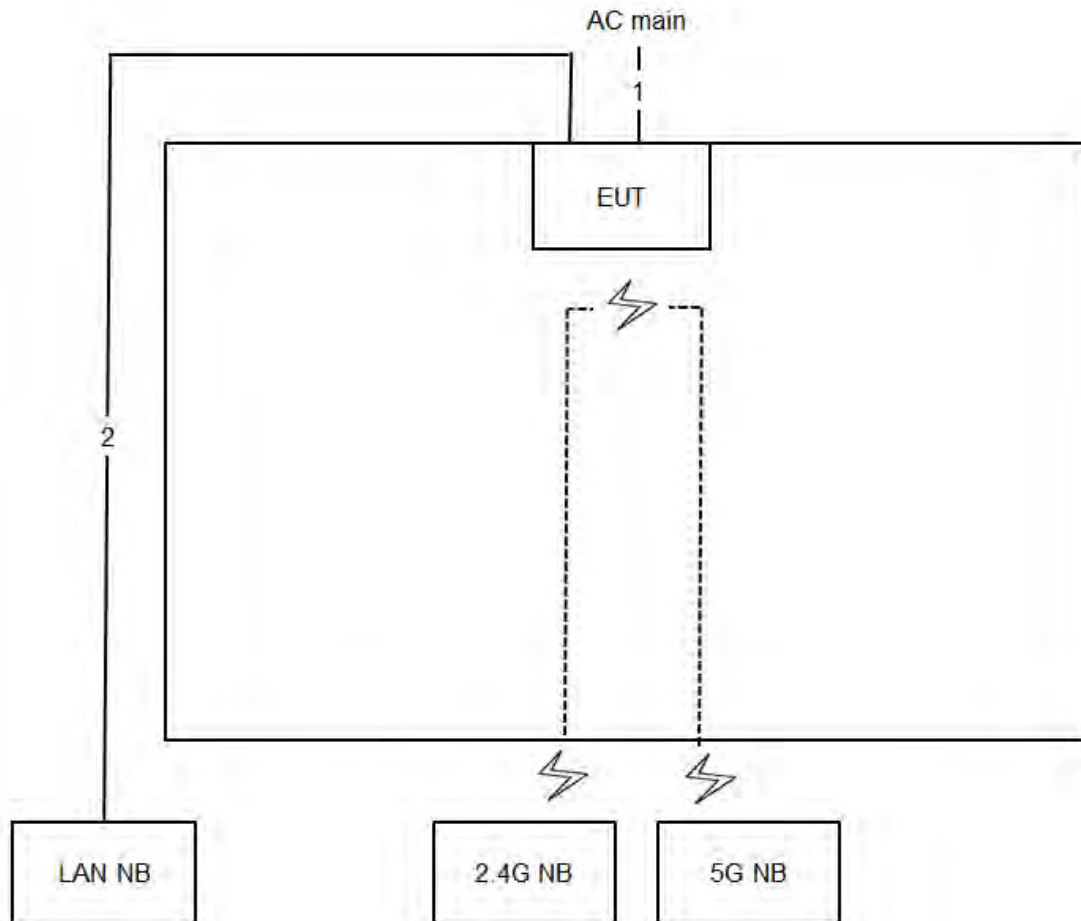

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

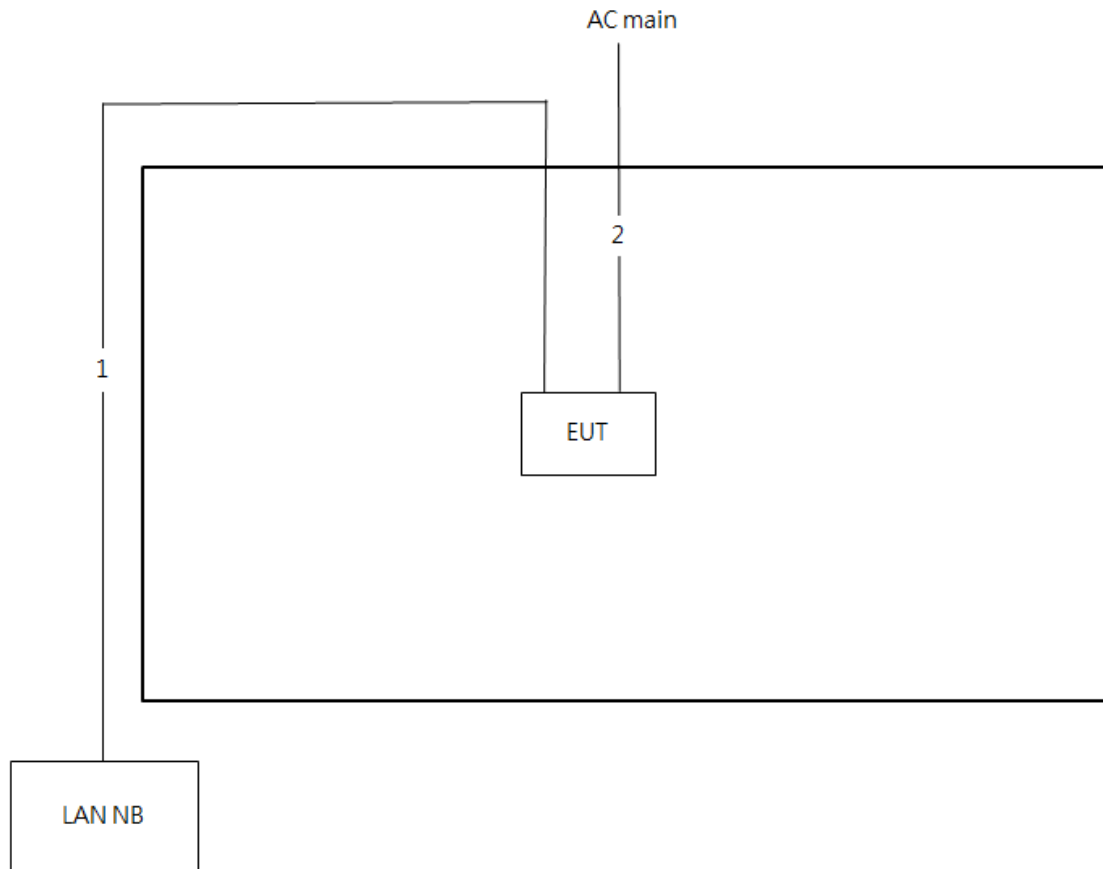Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.5m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

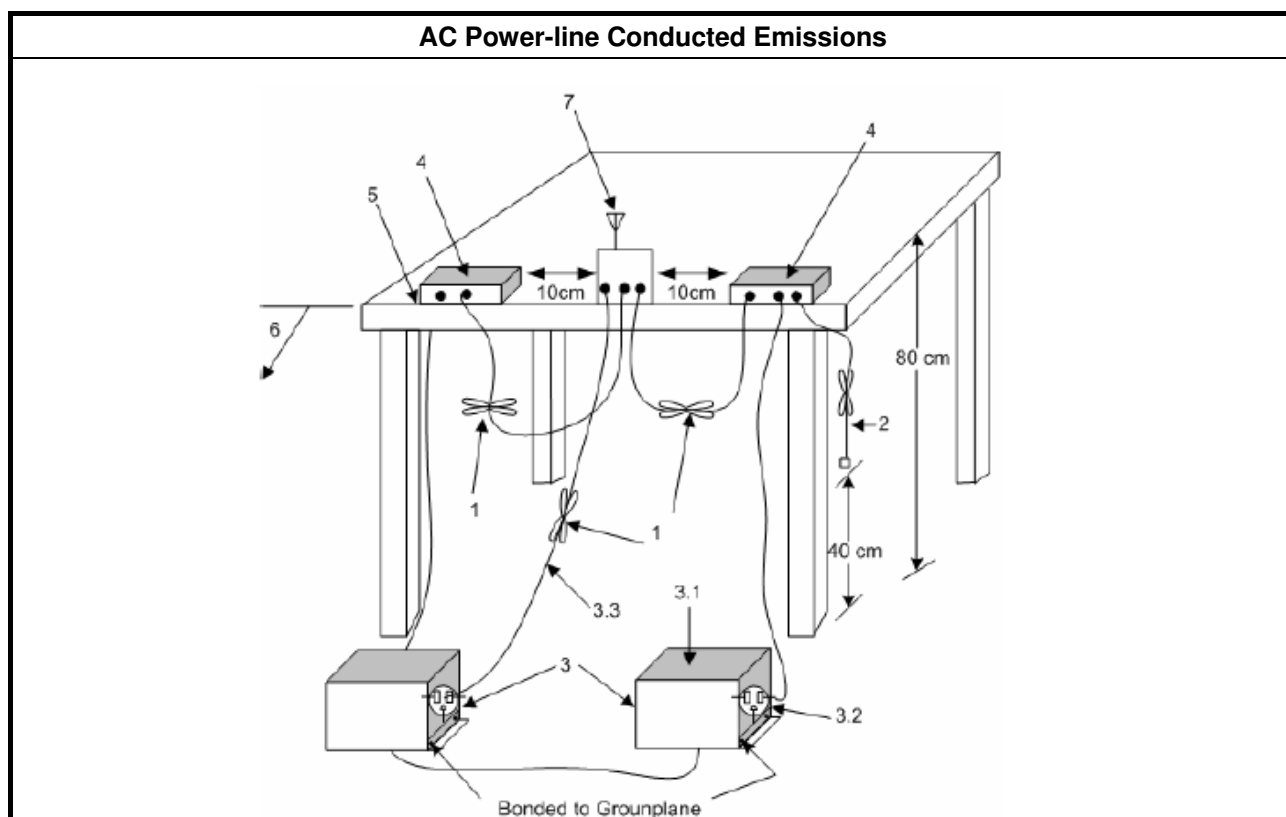



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
☐	Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

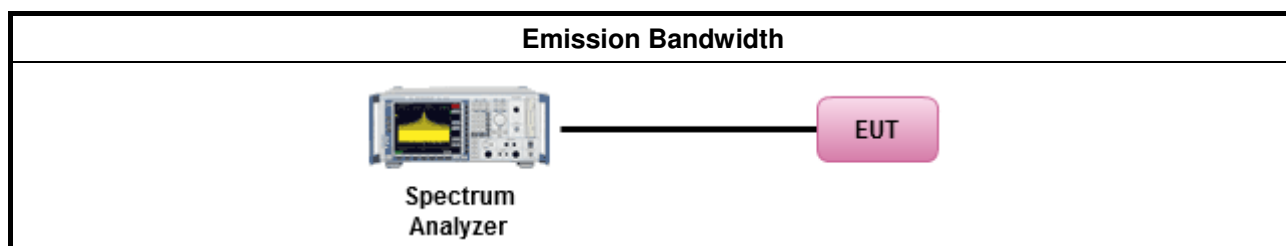

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Fundamental Emission Output Power

3.3.1 Fundamental Emission Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (peak power meter for VBW ≥ DTS BW)
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
RF power meter and average over on/off periods with duty factor or gated trigger	
☒	Refer as FCC KDB 558074, clause 9.2.3 Method AVGPM-G (using an RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

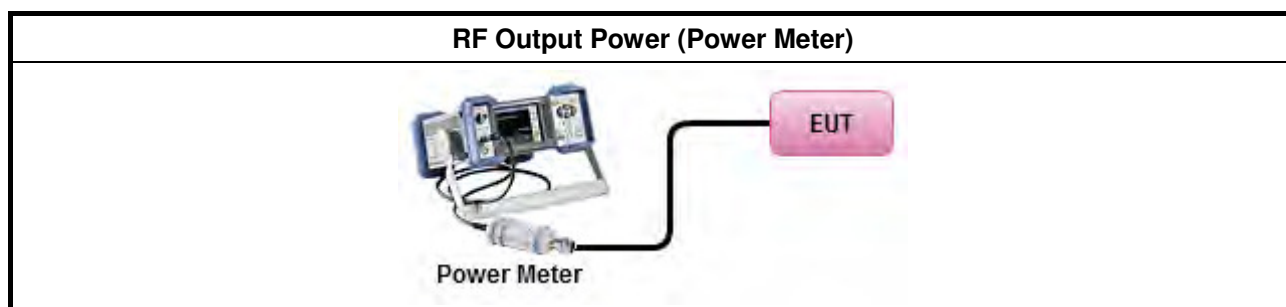

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) $\leq$ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3-100kHz; Detector=peak). [duty cycle $\geq$ 98% or external video / power trigger]
☐	Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-2 (slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
☐	Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-1 Alt (spectral trace averaging).
☐	Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.

3.4.4 Test Setup

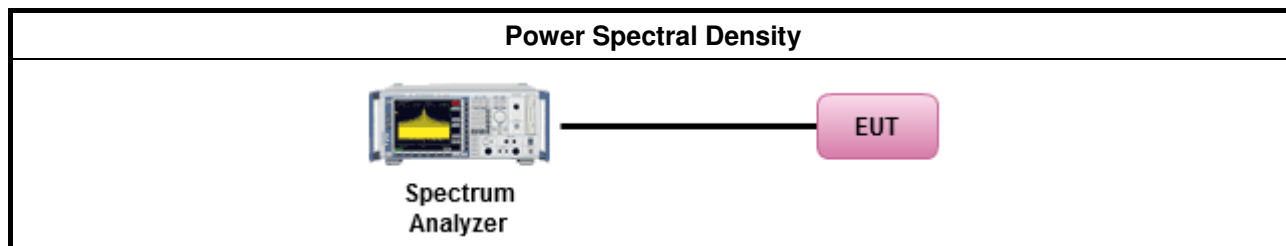

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

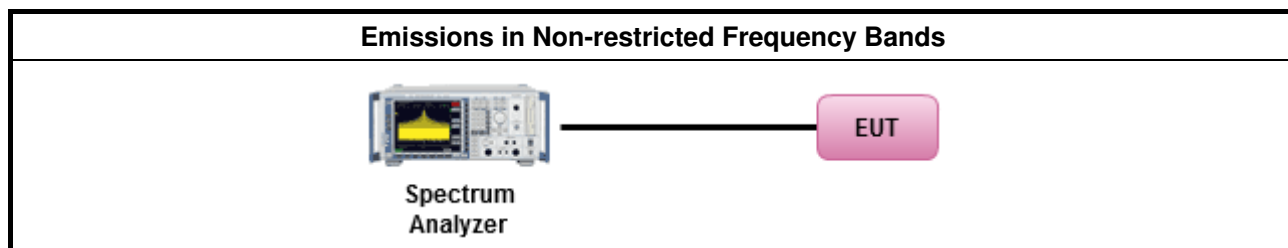

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.9.2.2 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
	☐ Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 12.2.4 measurement procedure peak limit.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as FCC KDB 558074 clause 13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as FCC KDB 558074, clause 13.2 (ANSI C63.10, clause 6.9.3) for marker-delta method for band-edge measurements.
	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.2.	
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add $10 \log(N)$ dB
	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

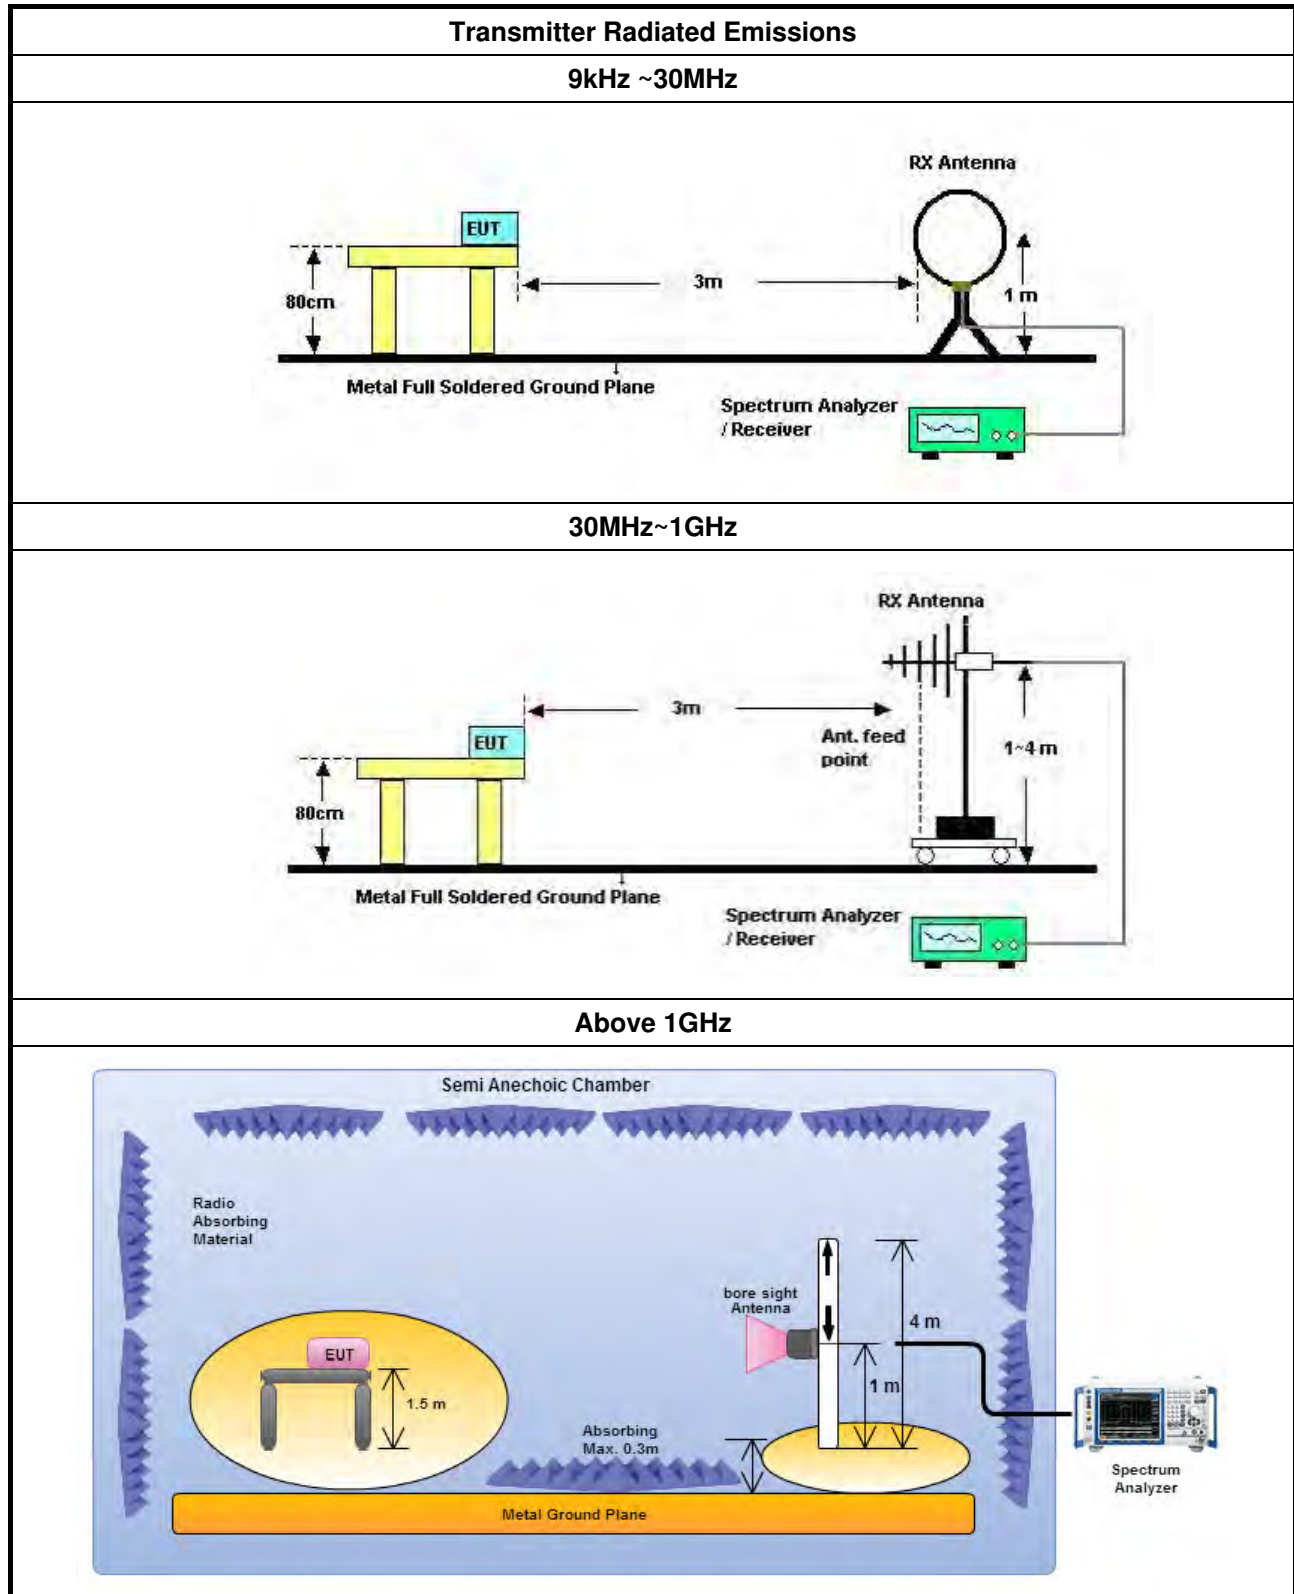



3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Test Result of Transmitter Radiated Unwanted Emissions

Refer as Appendix F

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
BILOG ANTENNA	TESEQ	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)



FCC Test Report

Report No. : FR652202AA

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.


“**” Calibration Interval of instruments listed above is two years.

N.C.R means Non-Calibration required.



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Normal Link		

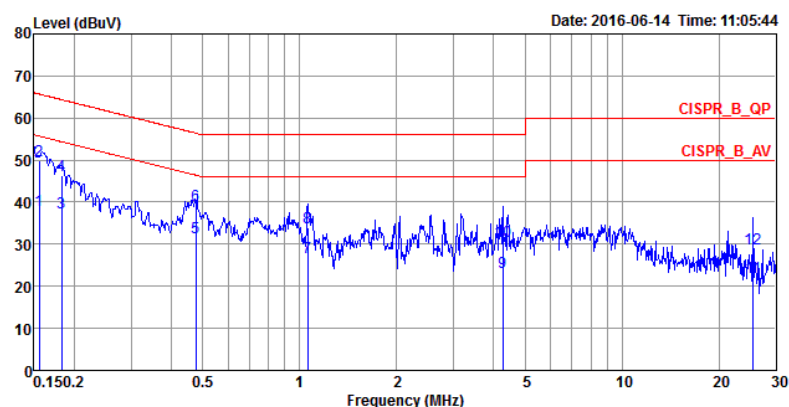


	Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.1558	38.18	-17.51	55.69	27.99	10.02	0.17	NEUTRAL	Average
2	0.1558	49.81	-15.88	65.69	39.62	10.02	0.17	NEUTRAL	QP
3	0.1825	37.36	-17.01	54.37	27.26	9.92	0.18	NEUTRAL	Average
4	0.1825	46.31	-18.06	64.37	36.21	9.92	0.18	NEUTRAL	QP
5	0.4766	31.73	-14.67	46.40	21.66	9.92	0.15	NEUTRAL	Average
6	0.4766	39.30	-17.10	56.40	29.23	9.92	0.15	NEUTRAL	QP
7	1.0597	26.86	-19.14	46.00	16.24	9.94	0.68	NEUTRAL	Average
8	1.0597	33.98	-22.02	56.00	23.36	9.94	0.68	NEUTRAL	QP
9	4.2692	23.38	-22.62	46.00	13.29	10.00	0.09	NEUTRAL	Average
10	4.2692	30.85	-25.15	56.00	20.76	10.00	0.09	NEUTRAL	QP
11	25.5912	22.15	-27.85	50.00	11.42	10.46	0.27	NEUTRAL	Average
12	25.5912	28.92	-31.08	60.00	18.19	10.46	0.27	NEUTRAL	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Normal Link		

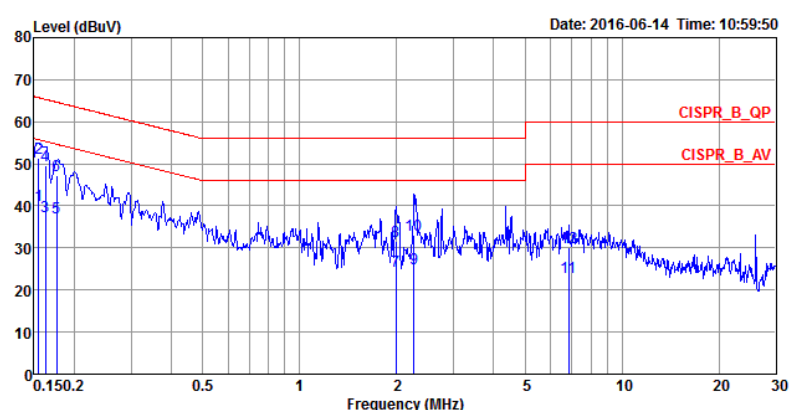

	Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.1548	40.19	-15.55	55.74	30.01	10.02	0.16	LINE	Average
2	0.1548	51.44	-14.30	65.74	41.26	10.02	0.16	LINE	QP
3	0.1624	37.42	-17.92	55.34	27.23	10.02	0.17	LINE	Average
4	0.1624	49.55	-15.79	65.34	39.36	10.02	0.17	LINE	QP
5	0.1759	37.20	-17.48	54.68	27.10	9.92	0.18	LINE	Average
6	0.1759	47.13	-17.55	64.68	37.03	9.92	0.18	LINE	QP
7	1.9906	24.41	-21.59	46.00	14.39	9.96	0.06	LINE	Average
8	1.9906	31.45	-24.55	56.00	21.43	9.96	0.06	LINE	QP
9	2.2606	25.18	-20.82	46.00	15.15	9.96	0.07	LINE	Average
10	2.2606	32.98	-23.02	56.00	22.95	9.96	0.07	LINE	QP
11	6.8412	23.10	-26.90	50.00	12.90	10.07	0.13	LINE	Average
12	6.8412	30.24	-29.76	60.00	20.04	10.07	0.13	LINE	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)





Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4G;11b;Nss1;Ntx1	8.5M	12.069M	12M1G1D	7.575M	10.095M
2.4G;11g;Nss1;Ntx1	15.525M	16.542M	16M5D1D	14.2M	16.317M
2.4G;HT20;Nss1,(M0);Ntx2	15.625M	17.566M	17M6D1D	14.675M	17.441M
2.4G;HT40;Nss1,(M0);Ntx2	35.6M	36.282M	36M3D1D	32.55M	36.082M



Result

Mode	Result	Limit	P1-N dB (Hz)	P1-OBW (Hz)	P2-N dB (Hz)	P2-OBW (Hz)
2.4G;11b;Nss1;Ntx1;2412;TN,VN	Pass	500k	8.025M	10.145M		
2.4G;11b;Nss1;Ntx1;2437;TN,VN	Pass	500k	8.5M	12.069M		
2.4G;11b;Nss1;Ntx1;2462;TN,VN	Pass	500k	7.575M	10.095M		
2.4G;11g;Nss1;Ntx1;2412;TN,VN	Pass	500k	15.525M	16.342M		
2.4G;11g;Nss1;Ntx1;2437;TN,VN	Pass	500k	14.2M	16.542M		
2.4G;11g;Nss1;Ntx1;2462;TN,VN	Pass	500k	15M	16.317M		
2.4G;HT20;Nss1,(M0);Ntx2;2412;TN,VN	Pass	500k	14.75M	17.441M	15.075M	17.466M
2.4G;HT20;Nss1,(M0);Ntx2;2437;TN,VN	Pass	500k	15.05M	17.516M	15M	17.566M
2.4G;HT20;Nss1,(M0);Ntx2;2462;TN,VN	Pass	500k	14.675M	17.441M	15.625M	17.441M
2.4G;HT40;Nss1,(M0);Ntx2;2422;TN,VN	Pass	500k	35.4M	36.132M	32.55M	36.232M
2.4G;HT40;Nss1,(M0);Ntx2;2437;TN,VN	Pass	500k	35M	36.082M	35.1M	36.082M
2.4G;HT40;Nss1,(M0);Ntx2;2452;TN,VN	Pass	500k	35M	36.182M	35.6M	36.282M

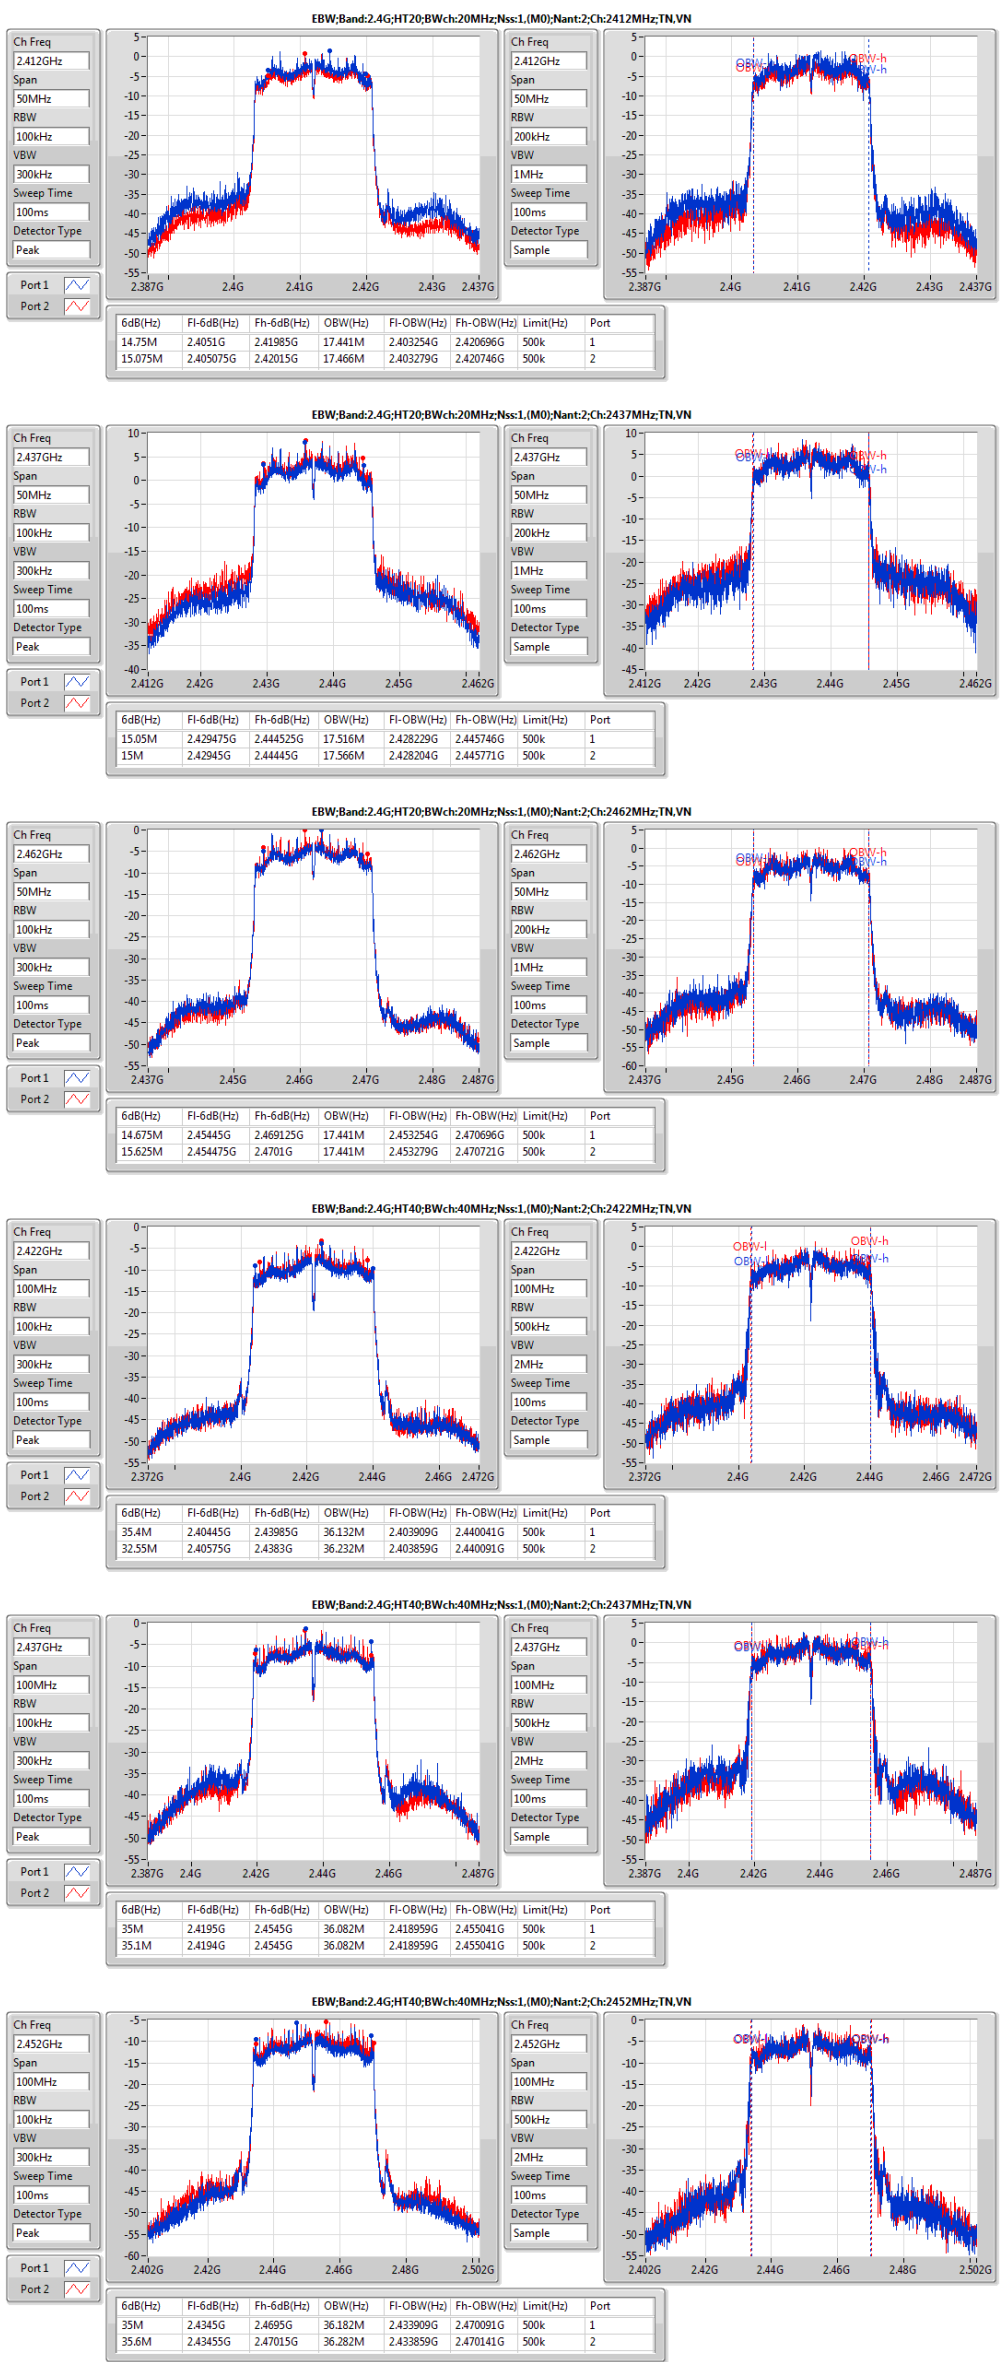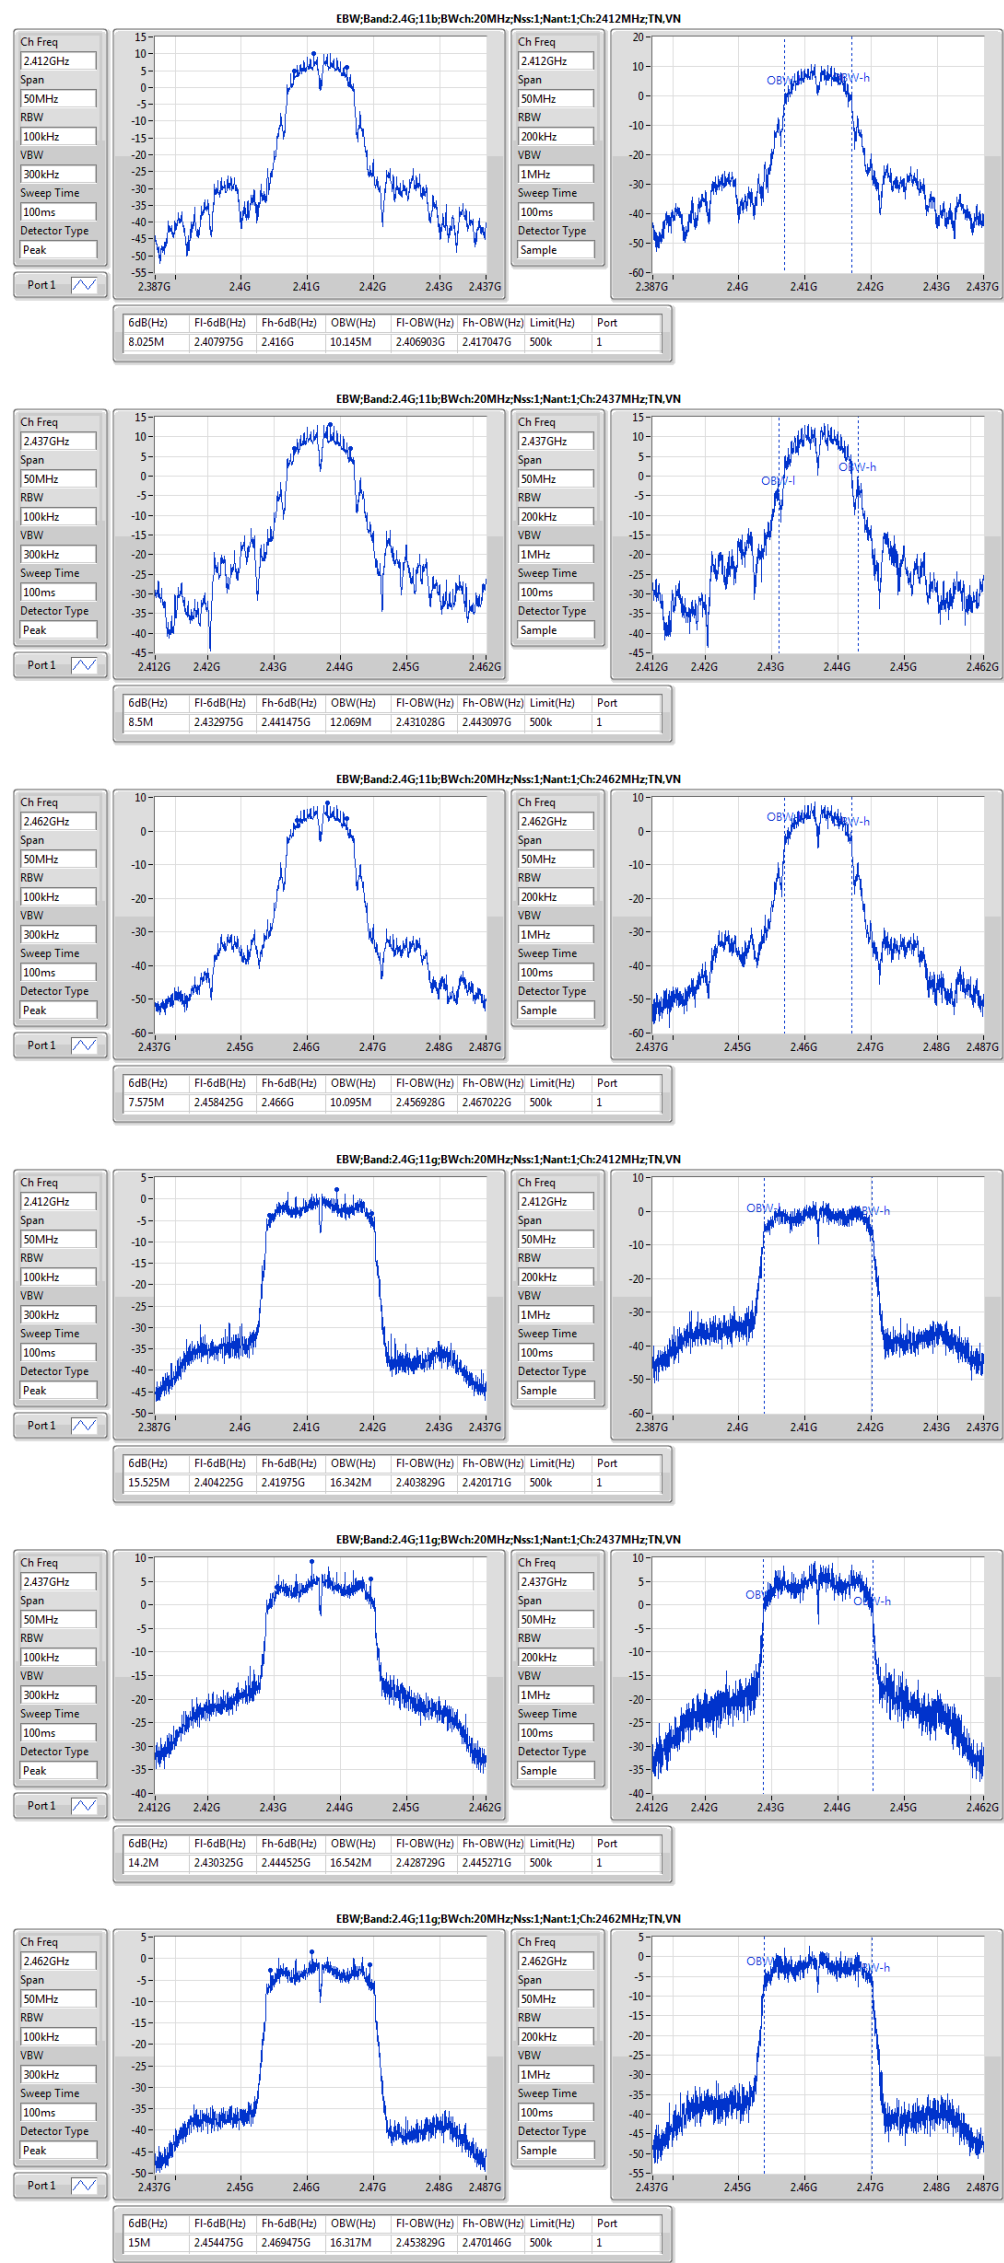



Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
2.4G;11b;Nss1;Ntx1	22.04	0.15996	25.24	0.3342
2.4G;11g;Nss1;Ntx1	19.69	0.09311	22.89	0.19454
2.4G;HT20;Nss1,(M0);Ntx2	21.8	0.15136	25.00	0.31623
2.4G;HT40;Nss1,(M0);Ntx2	15.54	0.03581	18.74	0.07482



Result

Mode	Result	DG (dBi)	EIRP (dBm)	EIRP Lim. (dBm)	Sum (dBm)	Sum Lim. (dBm)	P1 (dBm)	P2 (dBm)
2.4G;11b;Nss1;Ntx1;2412;TN,VN	Pass	3.20	21.99	36.00	18.79	30.00	18.79	
2.4G;11b;Nss1;Ntx1;2437;TN,VN	Pass	3.20	25.24	36.00	22.04	30.00	22.04	
2.4G;11b;Nss1;Ntx1;2462;TN,VN	Pass	3.20	19.91	36.00	16.71	30.00	16.71	
2.4G;11g;Nss1;Ntx1;2412;TN,VN	Pass	3.20	17.40	36.00	14.2	30.00	14.2	
2.4G;11g;Nss1;Ntx1;2437;TN,VN	Pass	3.20	22.89	36.00	19.69	30.00	19.69	
2.4G;11g;Nss1;Ntx1;2462;TN,VN	Pass	3.20	15.85	36.00	12.65	30.00	12.65	
2.4G;HT20;Nss1,(M0);Ntx2;2412;TN,VN	Pass	3.20	17.90	36.00	14.7	30.00	11.91	11.46
2.4G;HT20;Nss1,(M0);Ntx2;2437;TN,VN	Pass	3.20	25.00	36.00	21.8	30.00	18.83	18.74
2.4G;HT20;Nss1,(M0);Ntx2;2462;TN,VN	Pass	3.20	16.65	36.00	13.45	30.00	10.57	10.31
2.4G;HT40;Nss1,(M0);Ntx2;2422;TN,VN	Pass	3.20	16.19	36.00	12.99	30.00	10.13	9.83
2.4G;HT40;Nss1,(M0);Ntx2;2437;TN,VN	Pass	3.20	18.74	36.00	15.54	30.00	12.88	12.14
2.4G;HT40;Nss1,(M0);Ntx2;2452;TN,VN	Pass	3.20	14.40	36.00	11.2	30.00	8.26	8.12



Summary

Mode	PD (dBm/RBW)	EIRP.PD (dBm/RBW)
2.4G;11b;Nss1;Ntx1	-1.70	1.50
2.4G;11g;Nss1;Ntx1	-5.84	-2.64
2.4G;HT20;Nss1,(M0);Ntx2	-5.41	0.80
2.4G;HT40;Nss1,(M0);Ntx2	-14.74	-8.53















Result

Mode	Result	Meas.RBW (Hz)	Lim.RBW (Hz)	BWCF (dB)	DG (dBi)	Sum.Max (dBm/RBW)	PD (dBm/RBW)	PD.Limit (dBm/RBW)	EIRP.PD (dBm/RBW)	EIRP.PD.Li m (dBm/RBW)	P1 (dBm/RBW)	P2 (dBm/RBW)
2.4G;11b;Nss1;Ntx1;2412;TN,VN	Pass	3k	3k	0.00	3.20	-4.39	-4.39	8.00	-1.19	Inf	-4.39	
2.4G;11b;Nss1;Ntx1;2437;TN,VN	Pass	3k	3k	0.00	3.20	-1.70	-1.70	8.00	1.50	Inf	-1.70	
2.4G;11b;Nss1;Ntx1;2462;TN,VN	Pass	3k	3k	0.00	3.20	-6.43	-6.43	8.00	-3.23	Inf	-6.43	
2.4G;11g;Nss1;Ntx1;2412;TN,VN	Pass	3k	3k	0.00	3.20	-10.60	-10.60	8.00	-7.40	Inf	-10.60	
2.4G;11g;Nss1;Ntx1;2437;TN,VN	Pass	3k	3k	0.00	3.20	-5.84	-5.84	8.00	-2.64	Inf	-5.84	
2.4G;11g;Nss1;Ntx1;2462;TN,VN	Pass	3k	3k	0.00	3.20	-11.94	-11.94	8.00	-8.74	Inf	-11.94	
2.4G;HT20;Nss1,(M0);Ntx2;2412;TN,VN	Pass	3k	3k	0.00	6.21	-11.63	-11.63	7.79	-5.42	Inf	-13.40	-13.86
2.4G;HT20;Nss1,(M0);Ntx2;2437;TN,VN	Pass	3k	3k	0.00	6.21	-5.41	-5.41	7.79	0.80	Inf	-7.71	-6.55
2.4G;HT20;Nss1,(M0);Ntx2;2462;TN,VN	Pass	3k	3k	0.00	6.21	-13.39	-13.39	7.79	-7.18	Inf	-14.48	-14.52
2.4G;HT40;Nss1,(M0);Ntx2;2422;TN,VN	Pass	3k	3k	0.00	6.21	-16.26	-16.26	7.79	-10.05	Inf	-18.59	-17.77
2.4G;HT40;Nss1,(M0);Ntx2;2437;TN,VN	Pass	3k	3k	0.00	6.21	-14.74	-14.74	7.79	-8.53	Inf	-16.04	-16.31
2.4G;HT40;Nss1,(M0);Ntx2;2452;TN,VN	Pass	3k	3k	0.00	6.21	-17.41	-17.41	7.79	-11.20	Inf	-19.92	-19.77




PSD Result

Appendix D

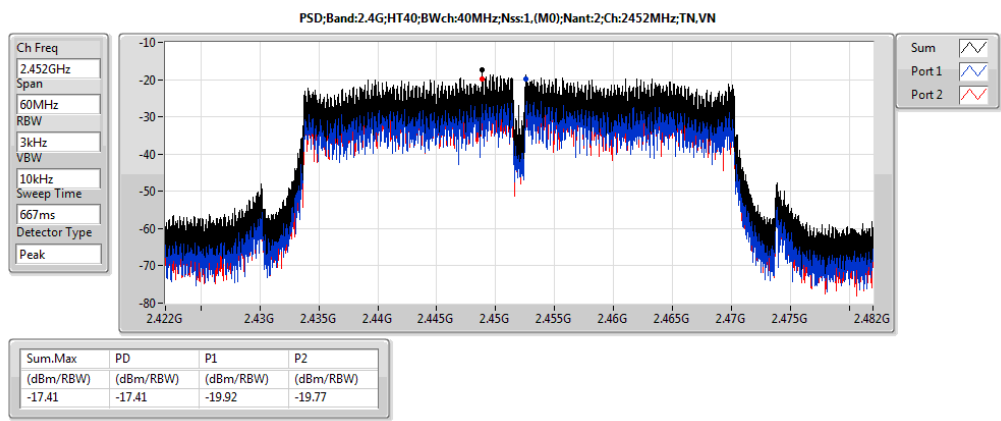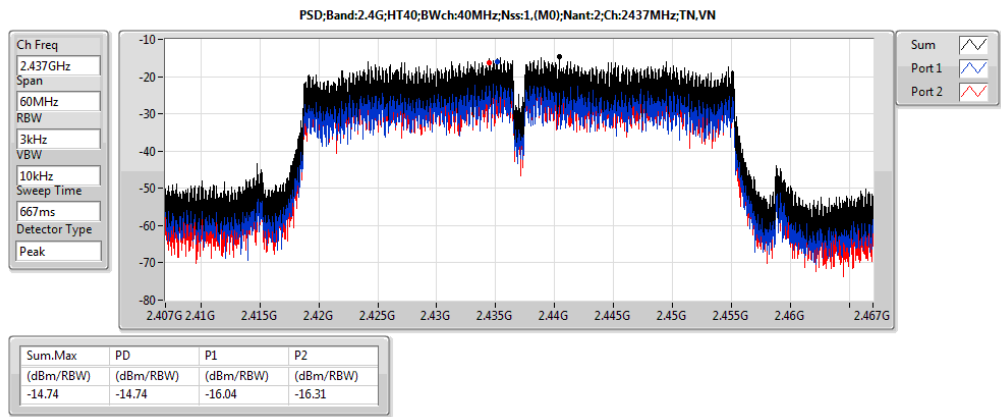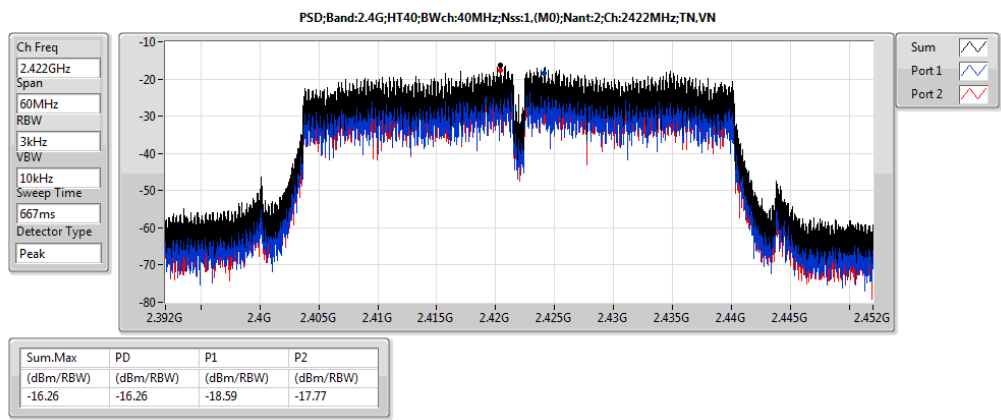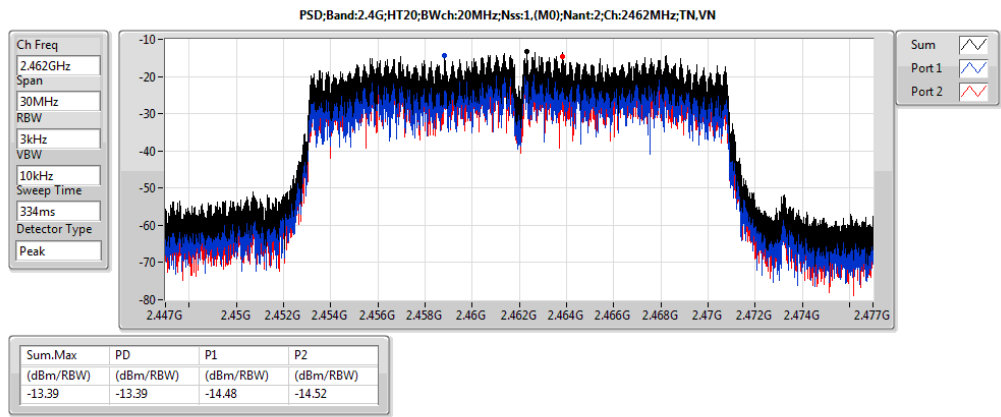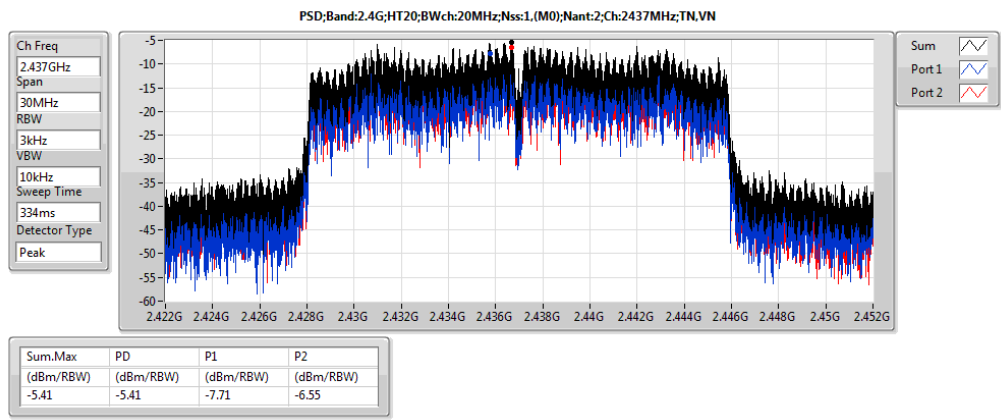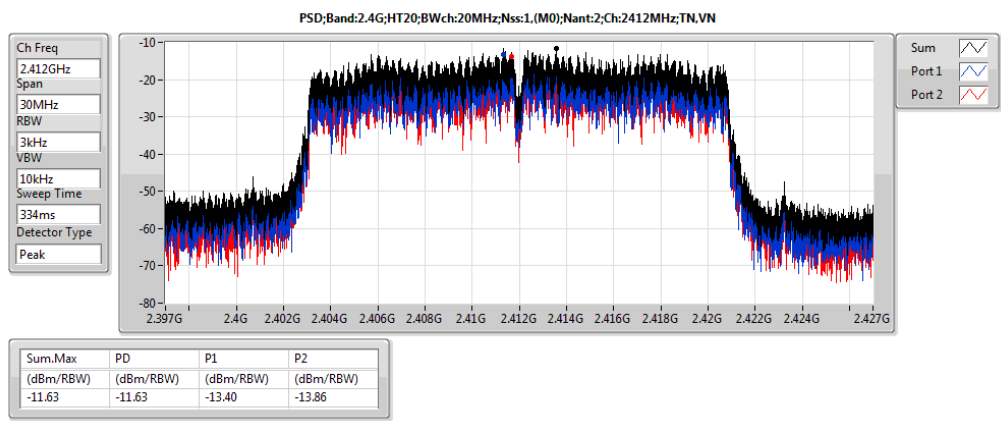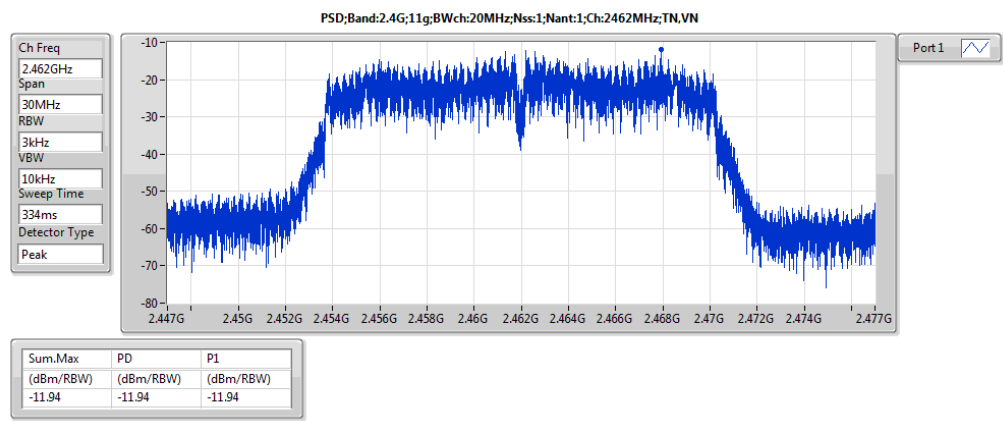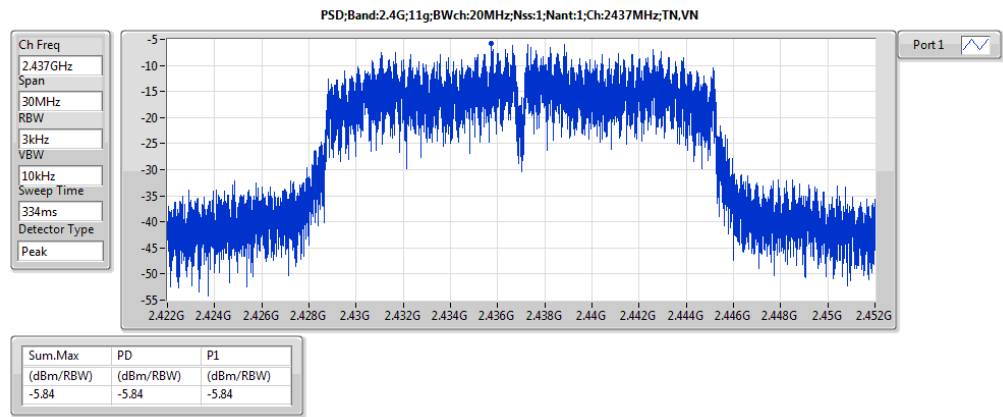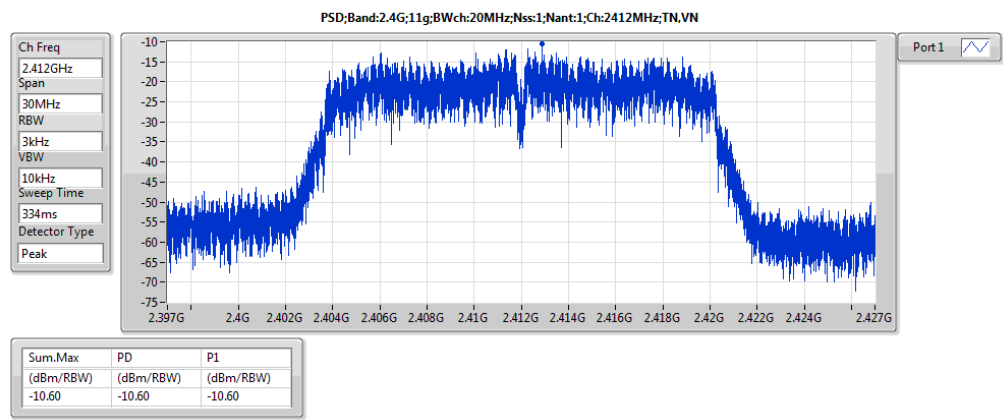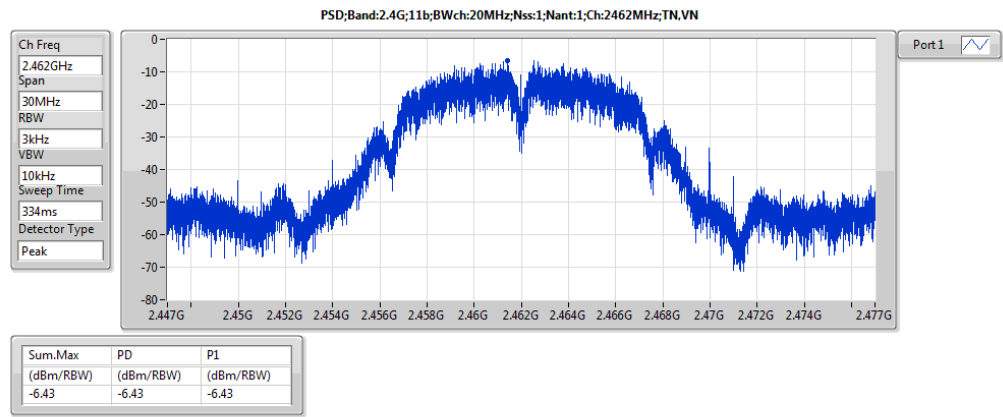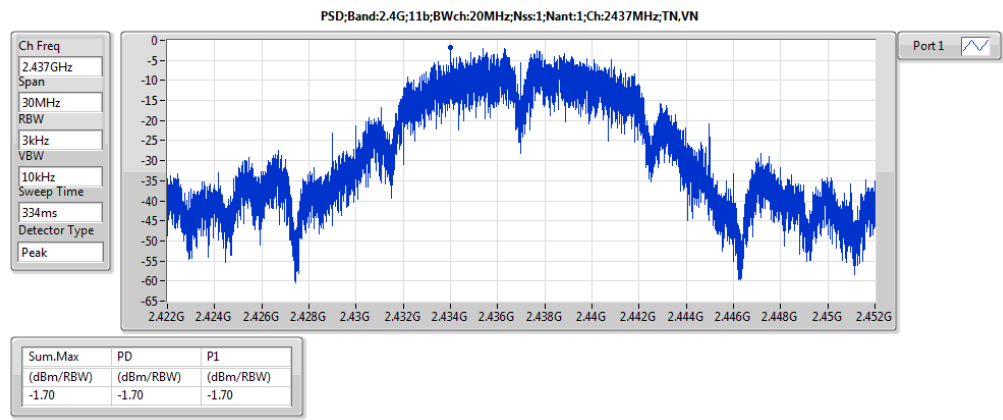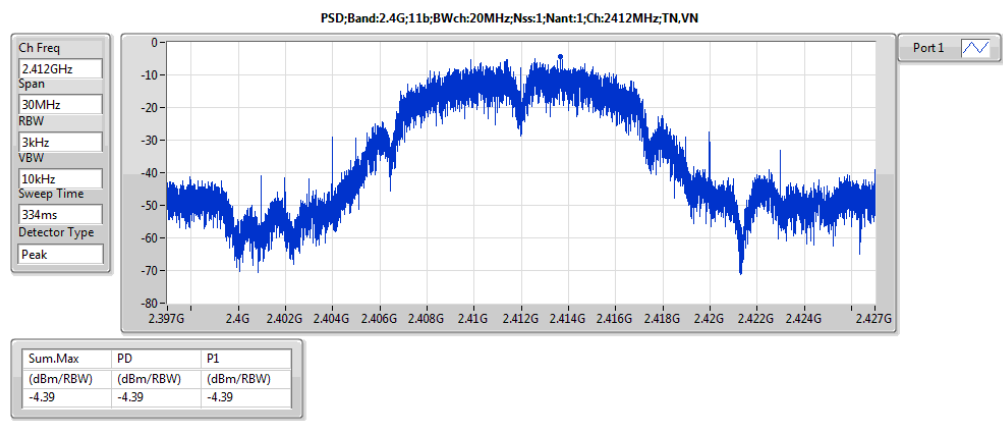


Plot on Configuration IEEE 802.11b / Reference Level

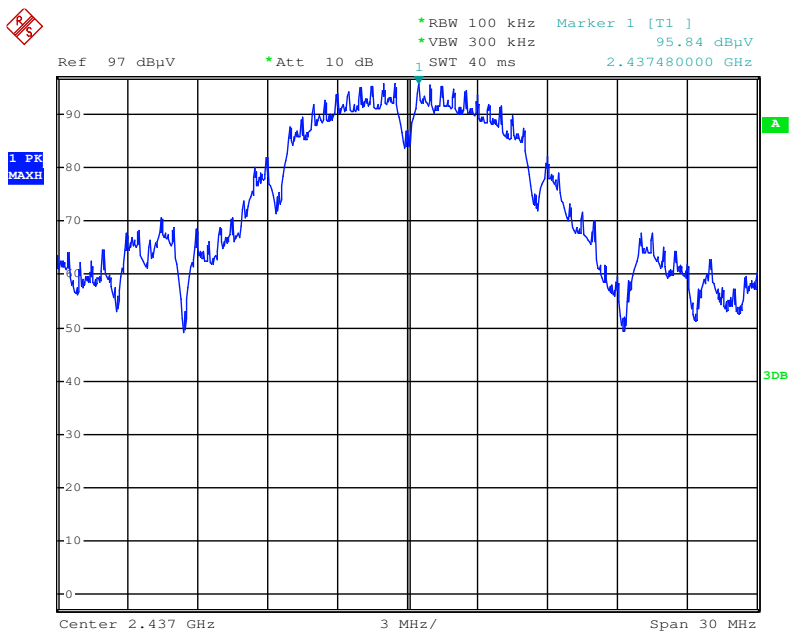


Date: 7.JUN.2016 22:25:13

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

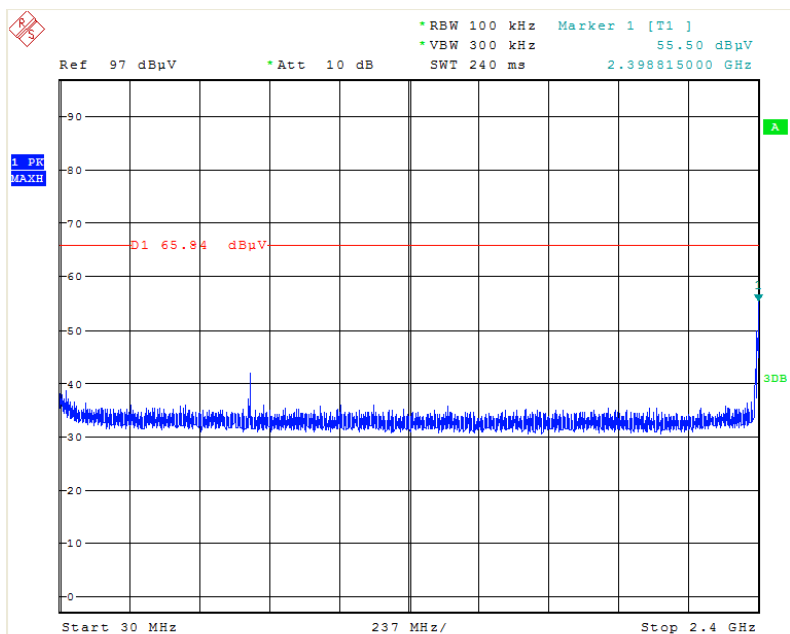


Date: 7.JUN.2016 22:28:40

Plot on Configuration IEEE 802.11b / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

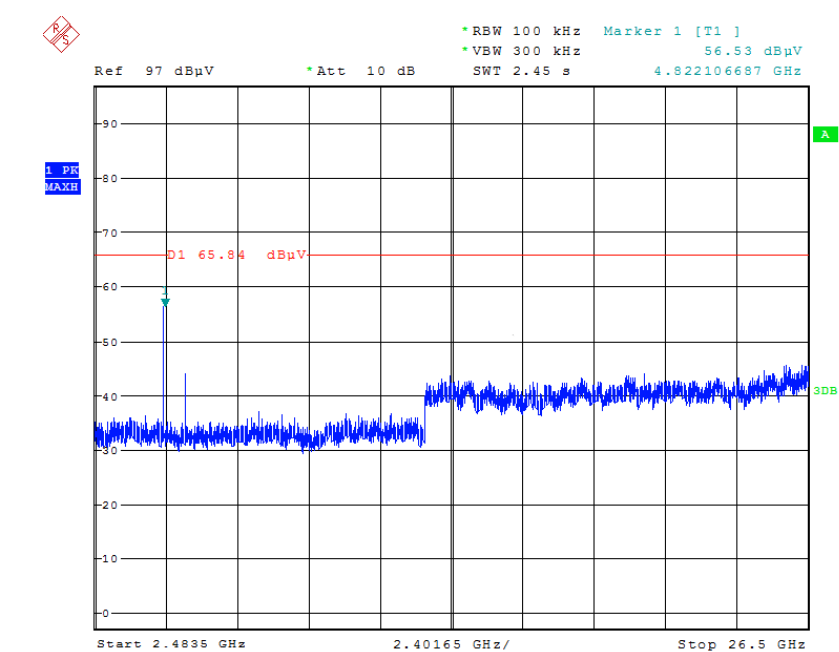


Date: 7.JUN.2016 22:29:21

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

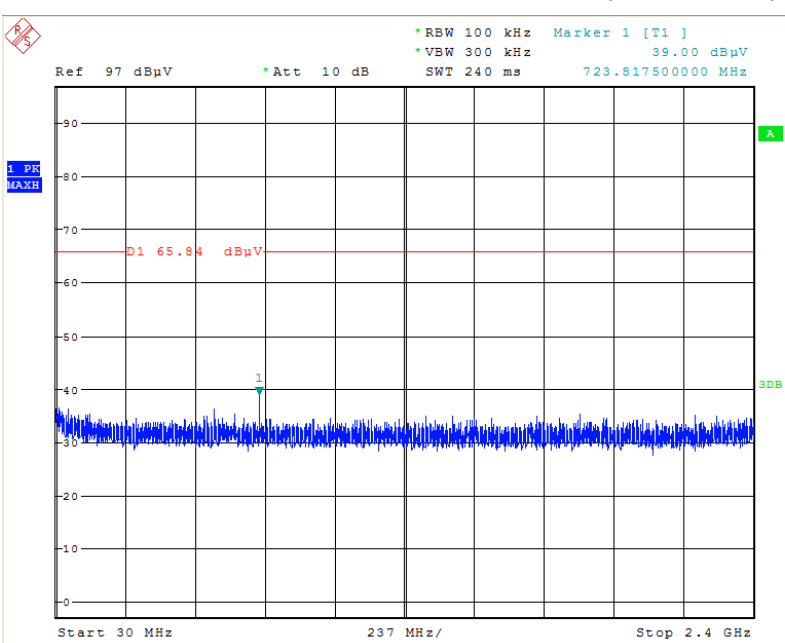


Date: 7.JUN.2016 22:30:12

Plot on Configuration IEEE 802.11b / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

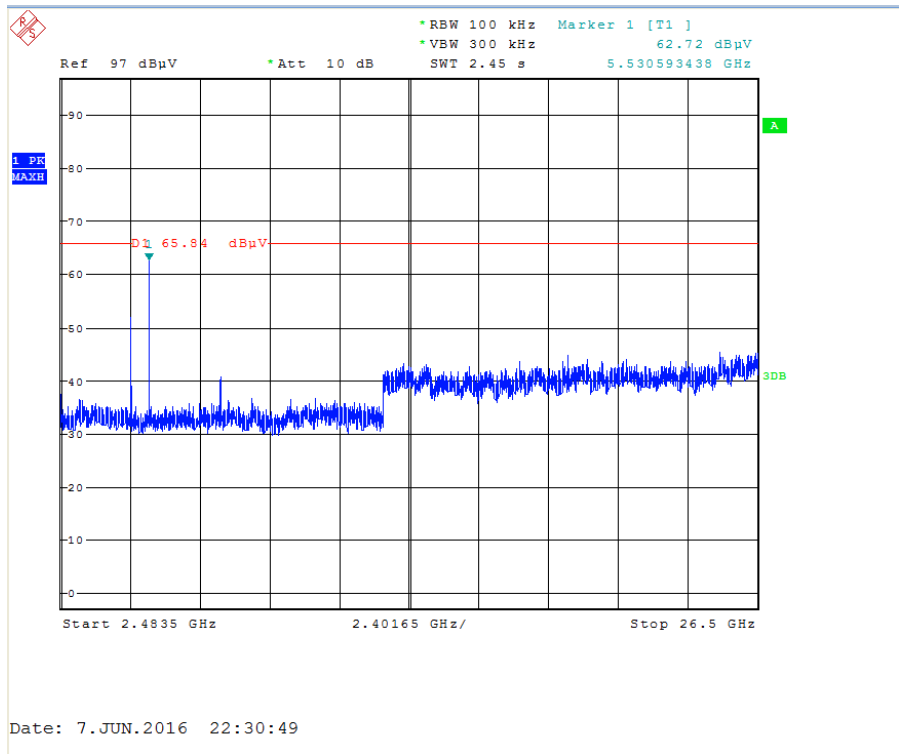


Plot on Configuration IEEE 802.11g / Reference Level

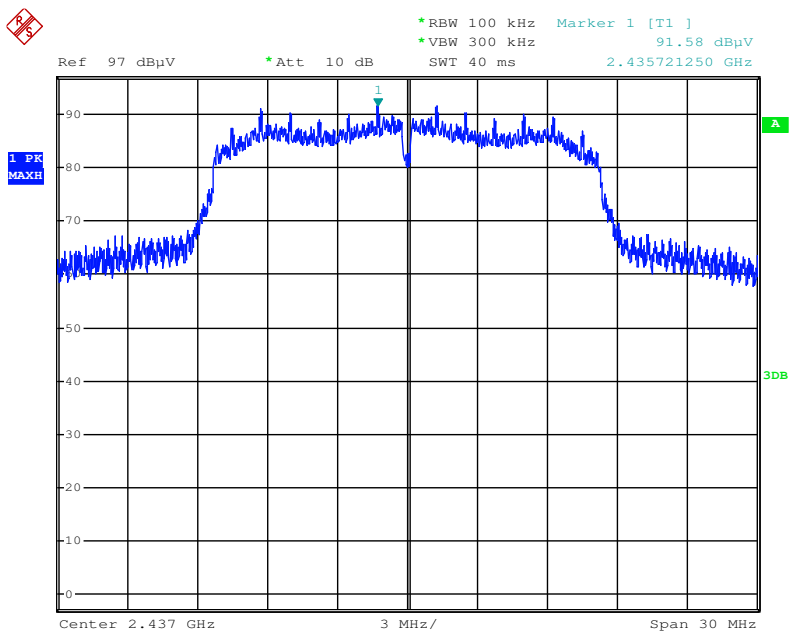


Date: 7.JUN.2016 22:32:45

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

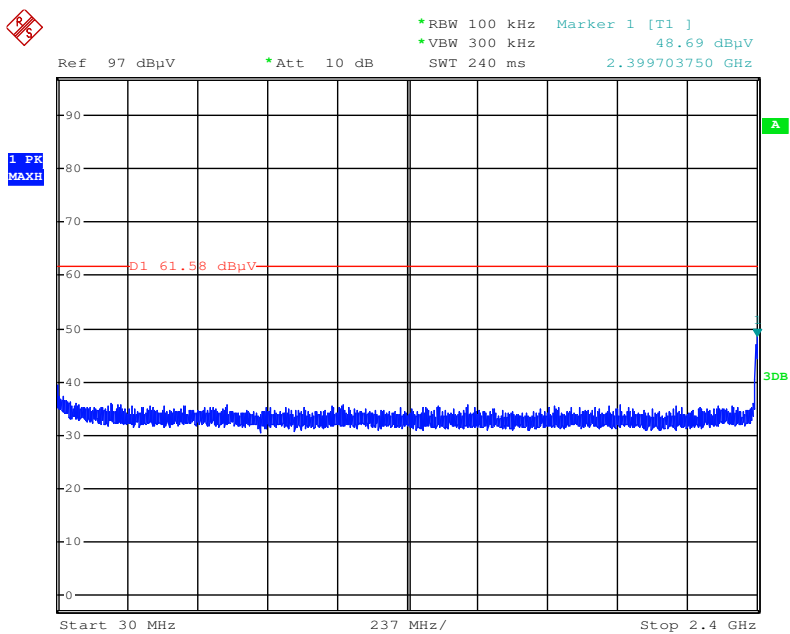


Date: 7.JUN.2016 22:39:45

Plot on Configuration IEEE 802.11g / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

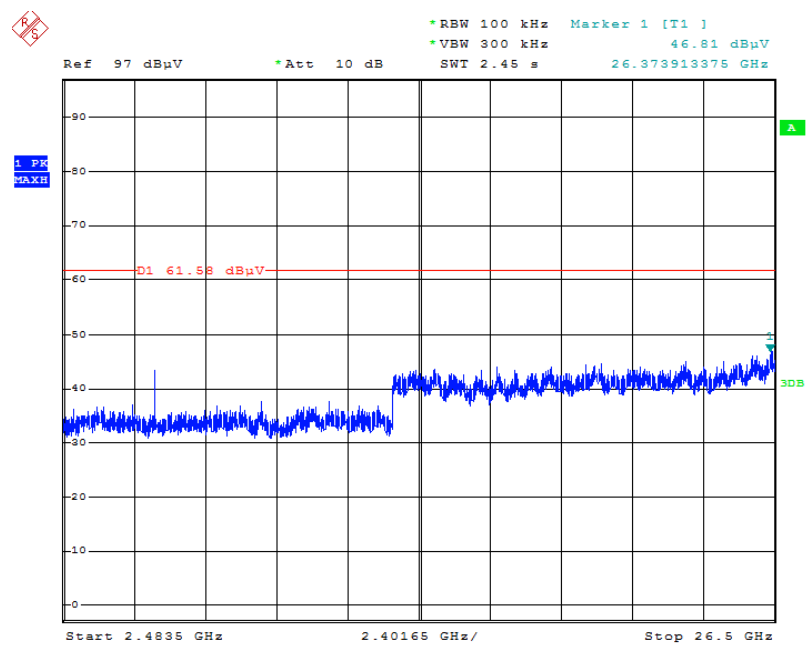


Date: 7.JUN.2016 22:43:33

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

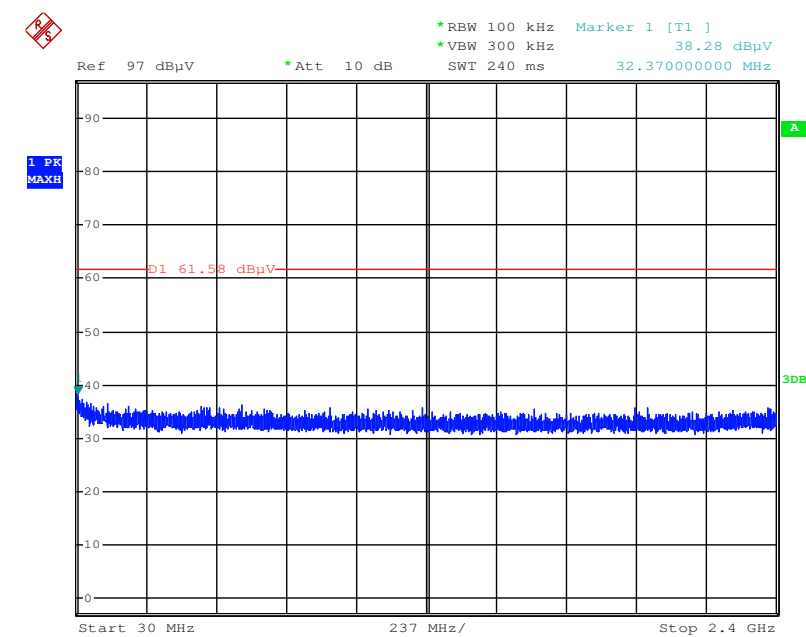


Date: 7.JUN.2016 22:47:02

Plot on Configuration IEEE 802.11g / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

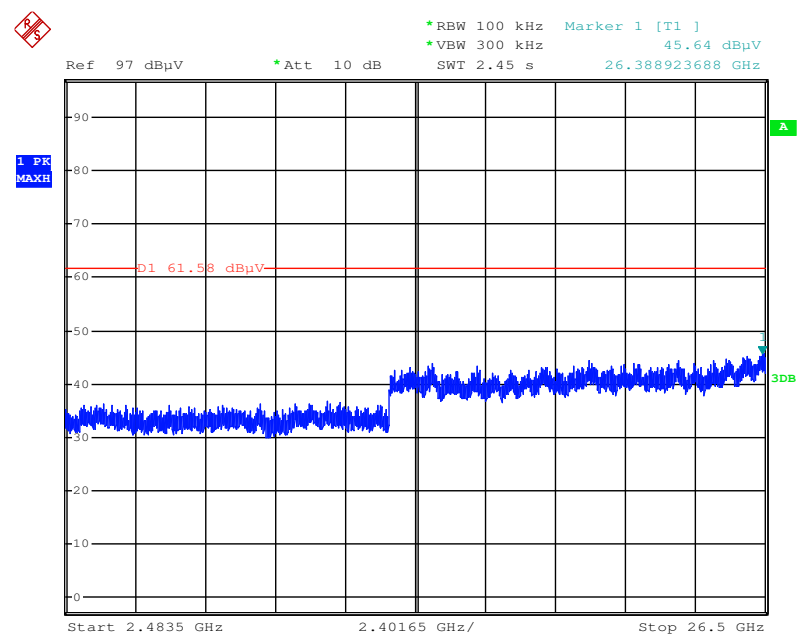


Date: 7.JUN.2016 22:47:52

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

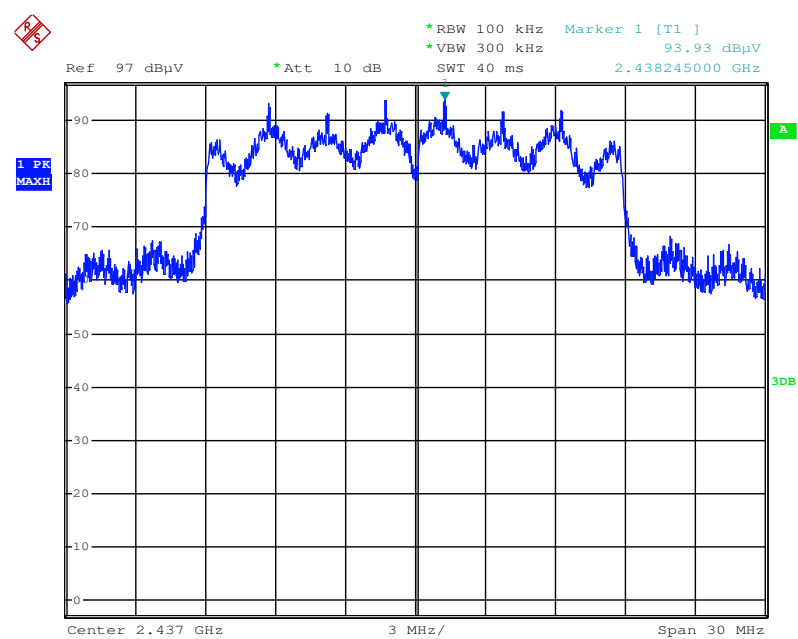


Date: 7.JUN.2016 22:52:10

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

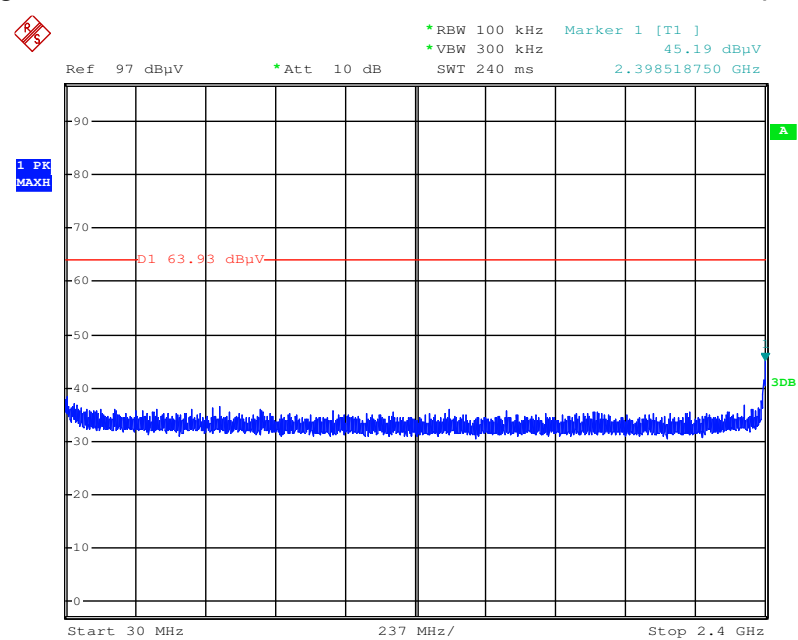


Date: 7.JUN.2016 22:54:08


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

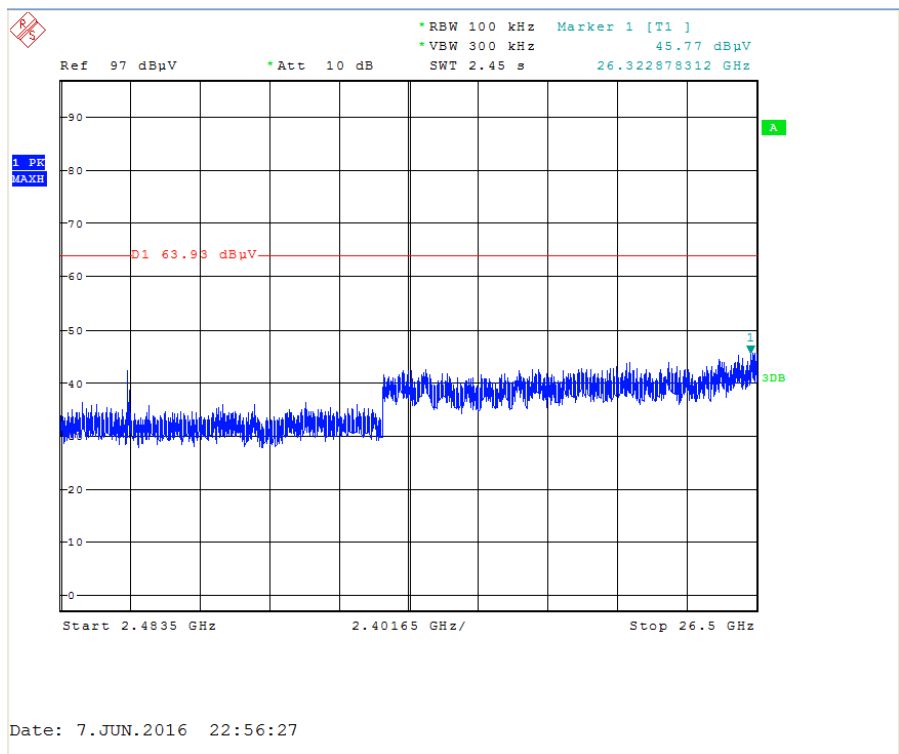

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

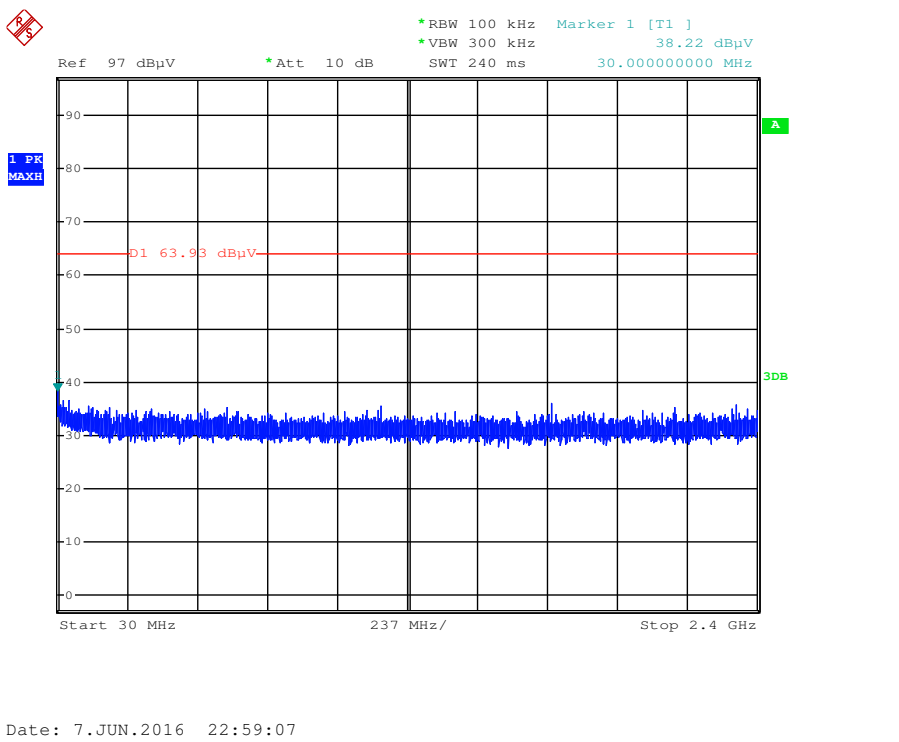


Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

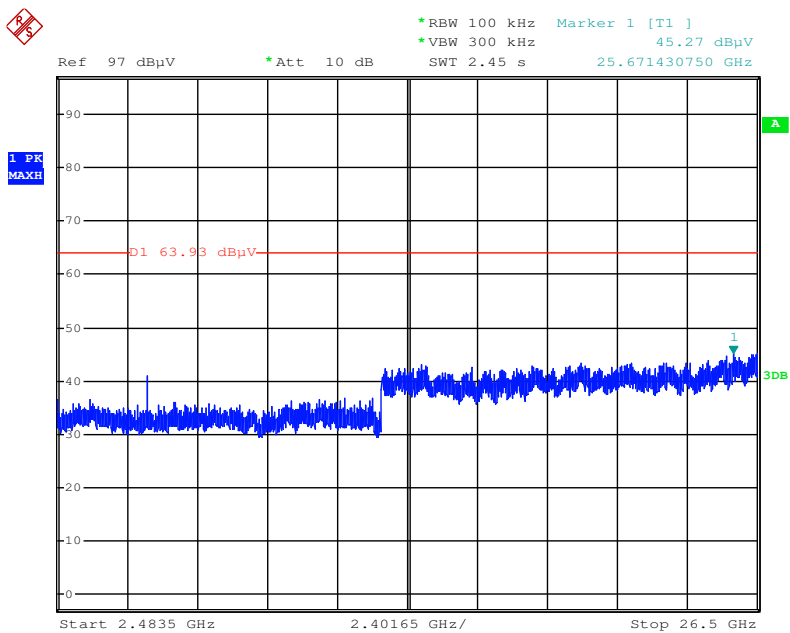


Date: 7.JUN.2016 22:59:33

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

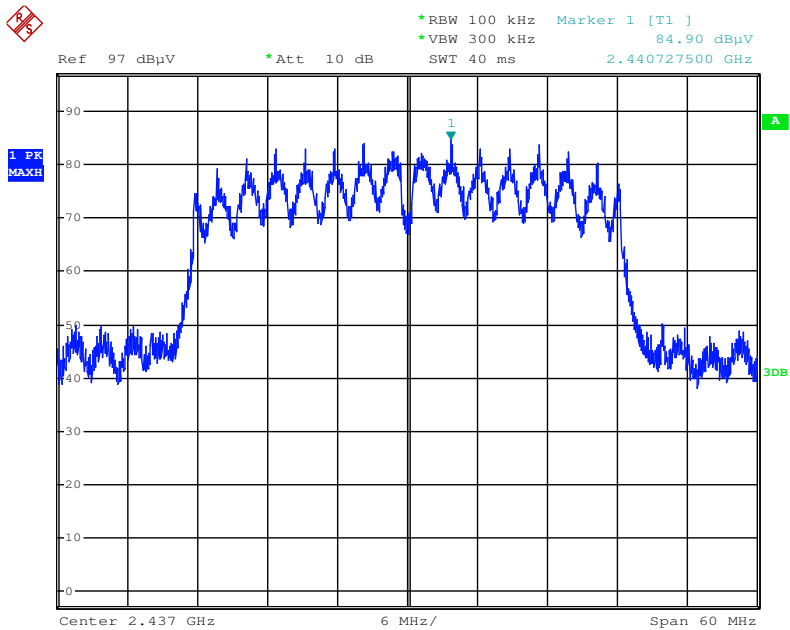


Date: 7.JUN.2016 23:02:05

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

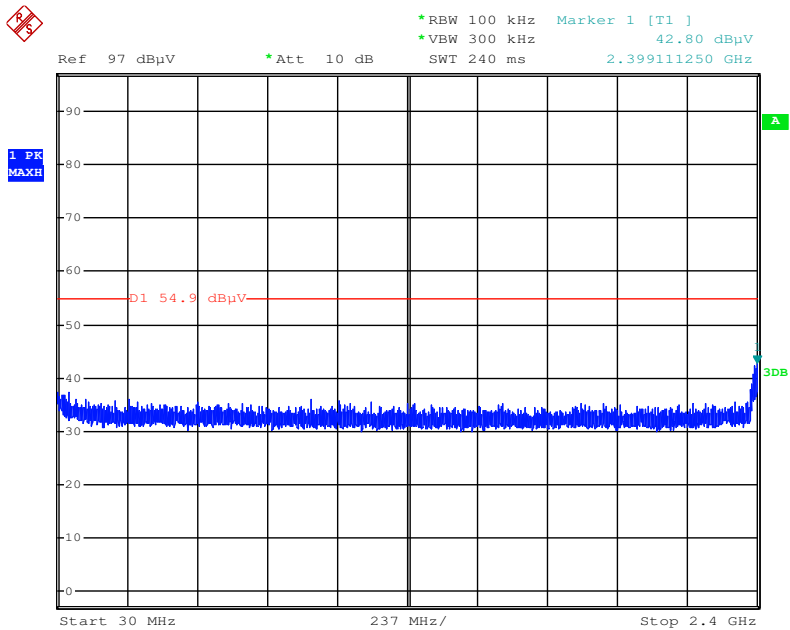


Date: 7.JUN.2016 23:03:16

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2483.5MHz~26500MHz (down 30dBc)

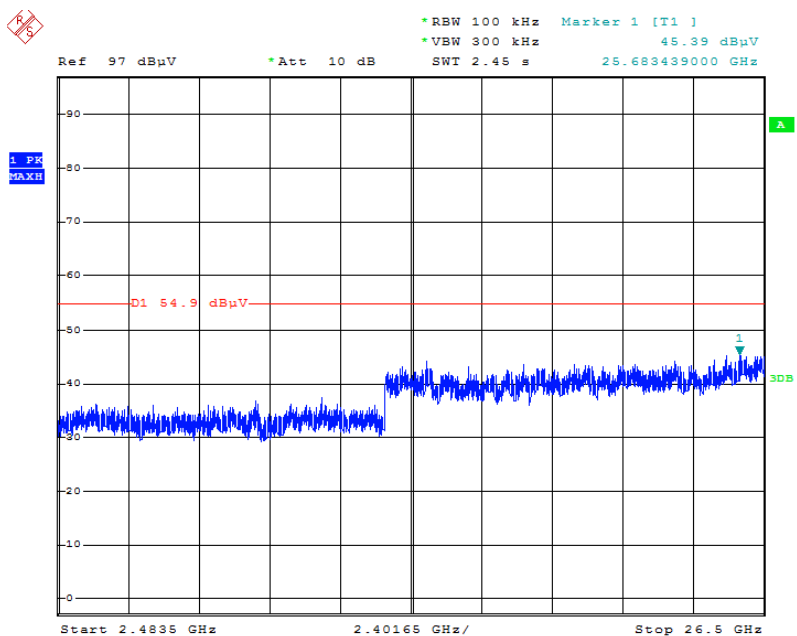


Date: 7.JUN.2016 23:04:43

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)


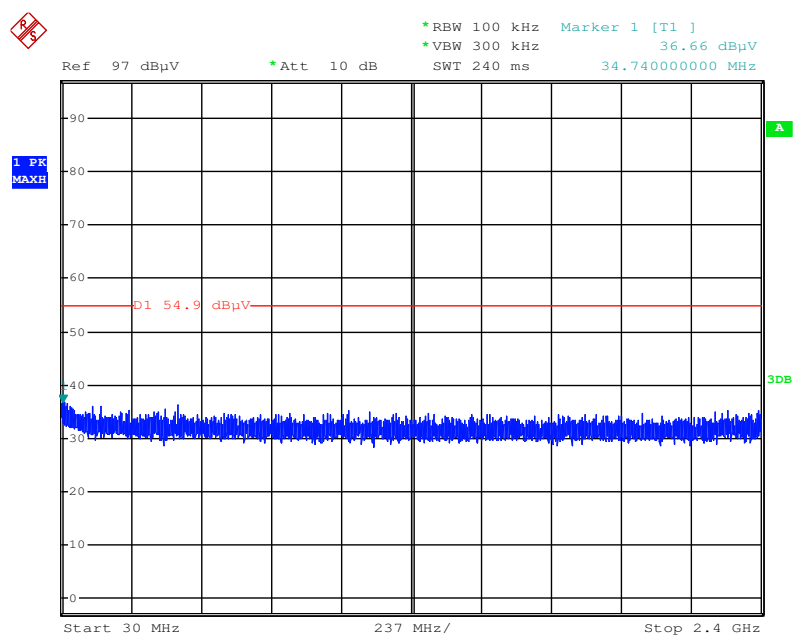


Date: 7.JUN.2016 23:05:30

Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2483.5MHz~26500MHz (down 30dBc)

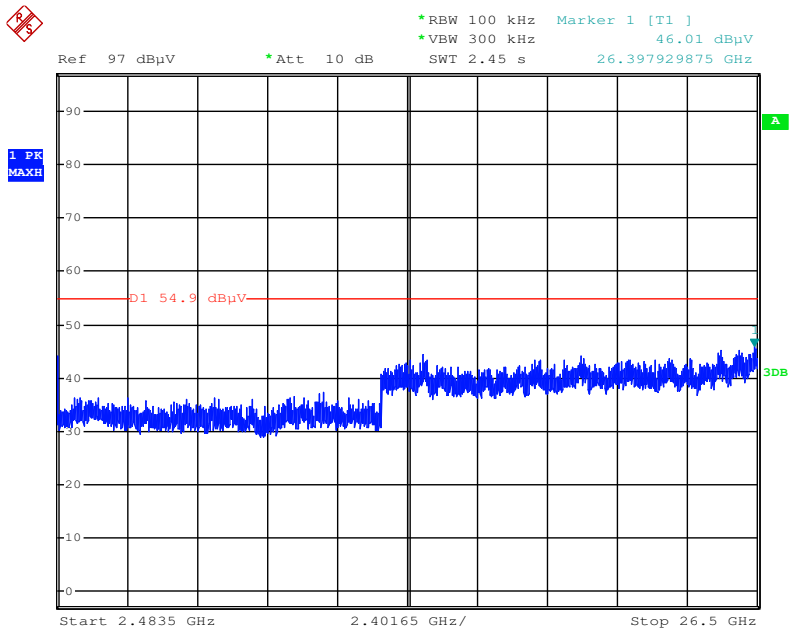

Date: 7.JUN.2016 23:06:02

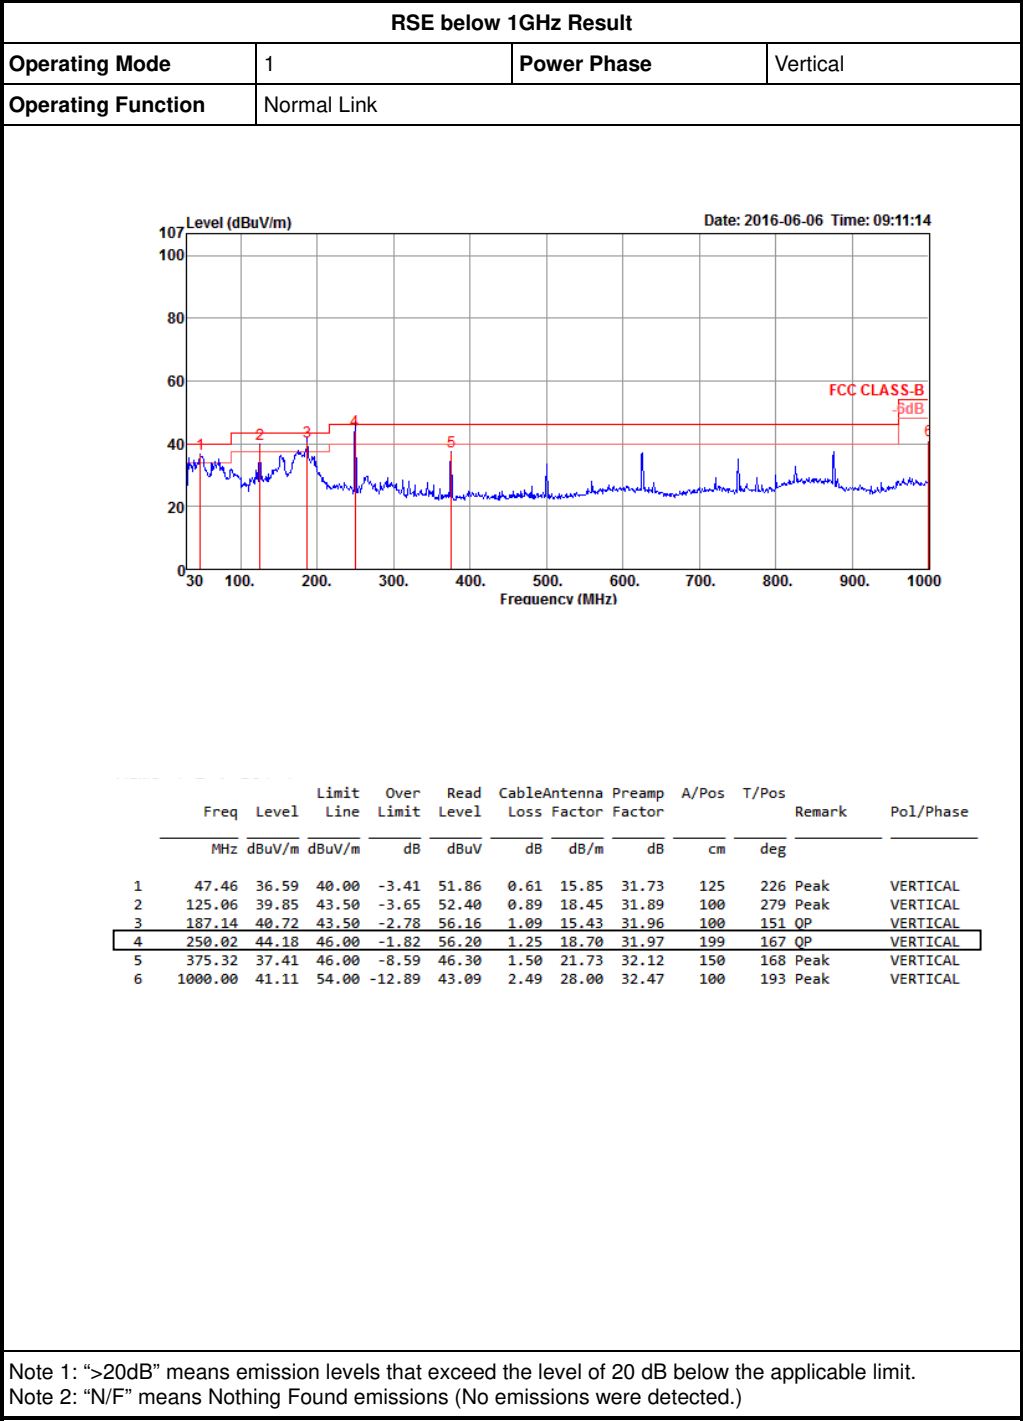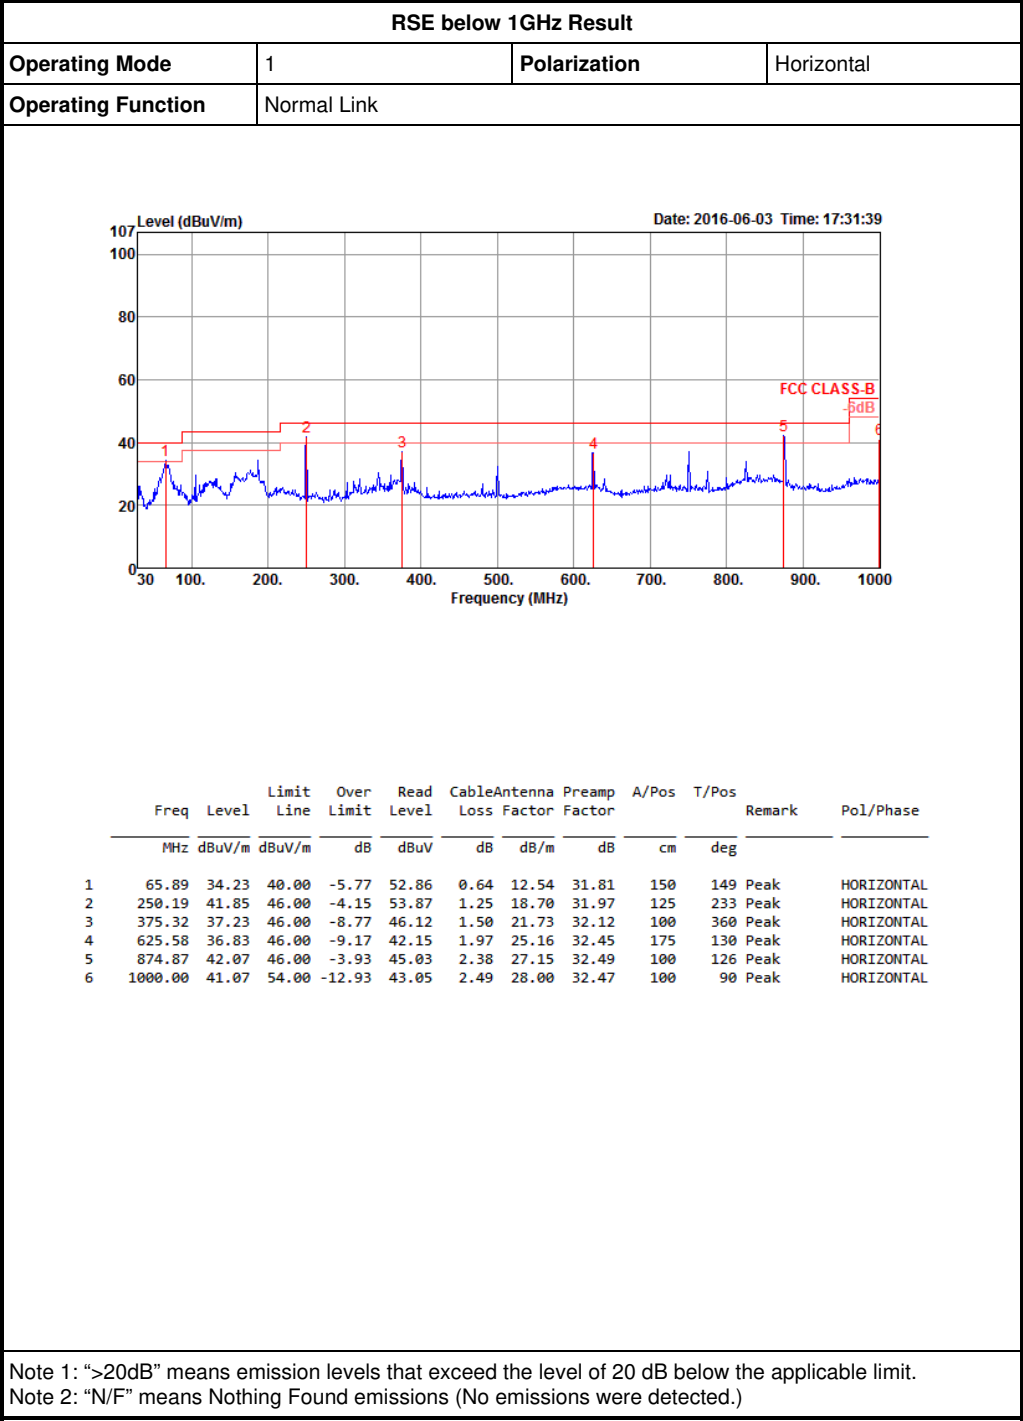

Radiated Emissions (1GHz~10th Harmonic)

Configurations	IEEE 802.11b CH 1 / Chain 1
-----------------------	-----------------------------

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.60	37.04	54.00	-16.96	31.37	7.48	32.58	34.39	135	139	Average	HORIZONTAL
2	4830.36	49.25	74.00	-24.75	43.53	7.50	32.61	34.39	135	139	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.56	49.57	74.00	-24.43	43.90	7.48	32.58	34.39	119	139	Peak	VERTICAL
2	4823.80	42.43	54.00	-11.57	36.76	7.48	32.58	34.39	119	139	Average	VERTICAL

Configurations	IEEE 802.11b CH 6 / Chain 1
-----------------------	-----------------------------

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4865.04	39.18	54.00	-14.82	33.36	7.54	32.66	34.38	172	186	Average	HORIZONTAL
2	4879.16	51.66	74.00	-22.34	45.80	7.56	32.68	34.38	172	186	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.12	51.98	74.00	-22.02	46.12	7.56	32.68	34.38	206	195	Peak	VERTICAL
2	4876.16	38.69	54.00	-15.31	32.83	7.56	32.68	34.38	206	195	Average	VERTICAL

Configurations	IEEE 802.11b CH 11 / Chain 1
-----------------------	------------------------------

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.76	50.02	74.00	-23.98	43.96	7.65	32.78	34.37	201	204	Peak	HORIZONTAL
2	4924.04	40.09	54.00	-13.91	34.03	7.65	32.78	34.37	201	204	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4924.00	41.28	54.00	-12.72	35.22	7.65	32.78	34.37	171	179	Average	VERTICAL
2	4933.00	50.45	74.00	-23.55	44.39	7.65	32.78	34.37	171	179	Peak	VERTICAL

Configurations	IEEE 802.11g CH 1 / Chain 1
-----------------------	-----------------------------

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.98	48.38	74.00	-25.62	42.71	7.48	32.58	34.39	169	181	Peak	HORIZONTAL
2	4827.42	34.75	54.00	-19.25	29.03	7.50	32.61	34.39	169	181	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4824.42	48.81	74.00	-25.19	43.14	7.48	32.58	34.39	171	153	Peak	VERTICAL
2	4826.50	37.29	54.00	-16.71	31.57	7.50	32.61	34.39	171	153	Average	VERTICAL

Configurations	IEEE 802.11g CH 6 / Chain 1
-----------------------	-----------------------------

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4869.82	35.49	54.00	-18.51	29.63	7.56	32.68	34.38	169	194	Average	HORIZONTAL
2	4872.60	48.71	74.00	-25.29	42.85	7.56	32.68	34.38	169	194	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4869.14	40.15	54.00	-13.85	34.29	7.56	32.68	34.38	158	138	Average	VERTICAL
2	4870.12	50.61	74.00	-23.39	44.75	7.56	32.68	34.38	158	138	Peak	VERTICAL

Configurations	IEEE 802.11g CH 11 / Chain 1
-----------------------	------------------------------

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4922.46	38.77	54.00	-15.23	32.76	7.63	32.75	34.37	157	141	Average	HORIZONTAL
2	4928.44	48.76	74.00	-25.24	42.70	7.65	32.78	34.37	157	141	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4920.14	36.13	54.00	-17.87	30.12	7.63	32.75	34.37	111	113	Average	VERTICAL
2	4923.50	48.34	74.00	-25.66	42.33	7.63	32.75	34.37	111	113	Peak	VERTICAL

Configurations	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 4
-----------------------	---

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.90	40.89	54.00	-13.11	35.22	7.48	32.58	34.39	131	187	Average	HORIZONTAL
2	4824.44	53.43	74.00	-20.57	47.76	7.48	32.58	34.39	131	187	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4824.16	56.42	74.00	-17.58	50.75	7.48	32.58	34.39	124	167	Peak	VERTICAL
2	4824.54	41.05	54.00	-12.95	35.38	7.48	32.58	34.39	124	167	Average	VERTICAL

Configurations	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 4
-----------------------	---

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4840.02	38.76	54.00	-15.24	33.00	7.52	32.63	34.39	166	172	Average	HORIZONTAL
2	4847.50	47.91	74.00	-26.09	42.15	7.52	32.63	34.39	166	172	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4840.48	36.36	54.00	-17.64	30.60	7.52	32.63	34.39	162	218	Average	VERTICAL
2	4846.36	48.89	74.00	-25.11	43.13	7.52	32.63	34.39	162	218	Peak	VERTICAL

Configurations	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 4
-----------------------	--

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4839.96	39.07	54.00	-14.93	33.31	7.52	32.63	34.39	198	138	Average	HORIZONTAL
2	4840.30	51.65	74.00	-22.35	45.89	7.52	32.63	34.39	198	138	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4848.76	50.40	74.00	-23.60	44.64	7.52	32.63	34.39	184	186	Peak	VERTICAL
2	4848.78	38.31	54.00	-15.69	32.55	7.52	32.63	34.39	184	186	Average	VERTICAL

Configurations	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 4
-----------------------	---

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4848.14	34.63	54.00	-19.37	28.87	7.52	32.63	34.39	157	181	Average	HORIZONTAL
2	4848.36	47.35	74.00	-26.65	41.59	7.52	32.63	34.39	157	181	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4839.88	51.68	74.00	-22.32	45.92	7.52	32.63	34.39	167	184	Peak	VERTICAL
2	4840.00	39.00	54.00	-15.00	33.24	7.52	32.63	34.39	167	184	Average	VERTICAL

Configurations	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 4
-----------------------	---

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4869.52	35.49	54.00	-18.51	29.63	7.56	32.68	34.38	171	193	Average	HORIZONTAL
2	4877.62	48.25	74.00	-25.75	42.39	7.56	32.68	34.38	171	193	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4876.68	38.03	54.00	-15.97	32.17	7.56	32.68	34.38	162	231	Average	VERTICAL
2	4877.94	50.69	74.00	-23.31	44.83	7.56	32.68	34.38	162	231	Peak	VERTICAL

Configurations	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 4
-----------------------	---

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4900.70	48.25	74.00	-25.75	42.29	7.61	32.73	34.38	142	246	Peak	HORIZONTAL
2	4901.46	36.13	54.00	-17.87	30.17	7.61	32.73	34.38	142	246	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4899.38	48.19	74.00	-25.81	42.23	7.61	32.73	34.38	147	224	Peak	VERTICAL
2	4903.28	36.89	54.00	-17.11	30.93	7.61	32.73	34.38	147	224	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Band Edge Emissions

Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1
----------------	------------------------------------


Channel 1

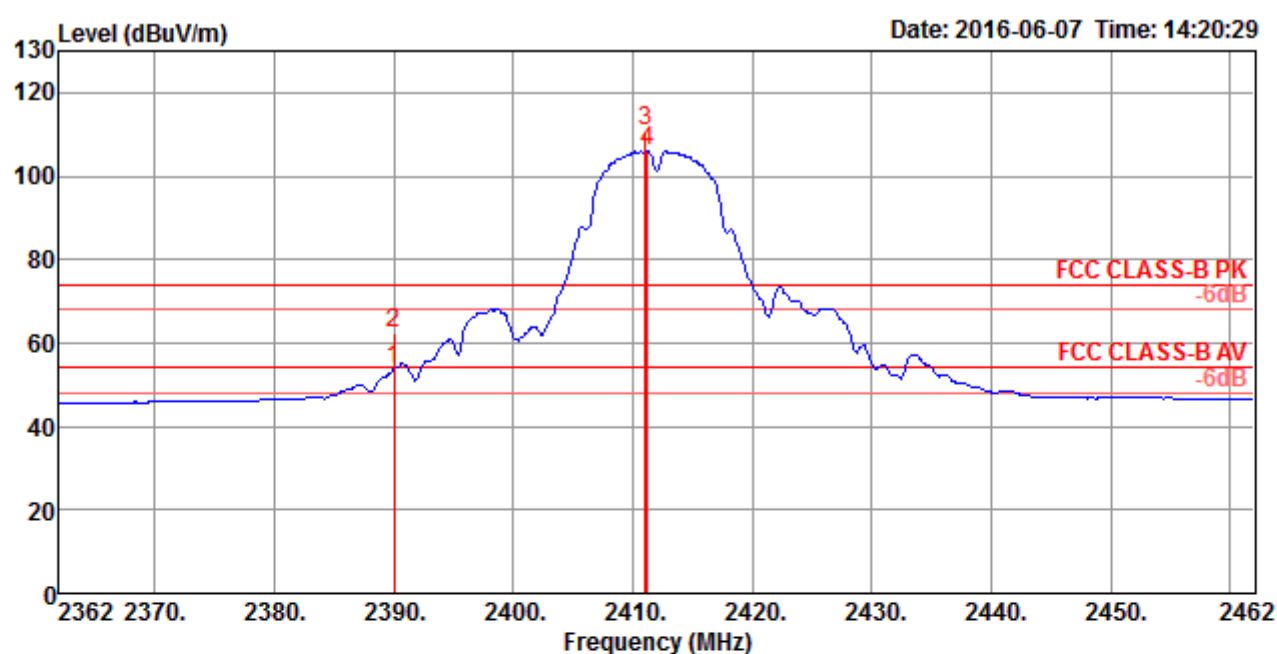

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.72	54.00	-0.28	20.62	5.20	27.90	0.00	271	133	Average
2	2390.00	62.55	74.00	-11.45	29.45	5.20	27.90	0.00	271	133	Peak
3	2411.00	110.60			77.49	5.23	27.88	0.00	271	133	Peak
4	2411.20	106.19			73.07	5.24	27.88	0.00	271	133	Average

Item 3, 4 are the fundamental frequency at 2412 MHz.


Channel 6

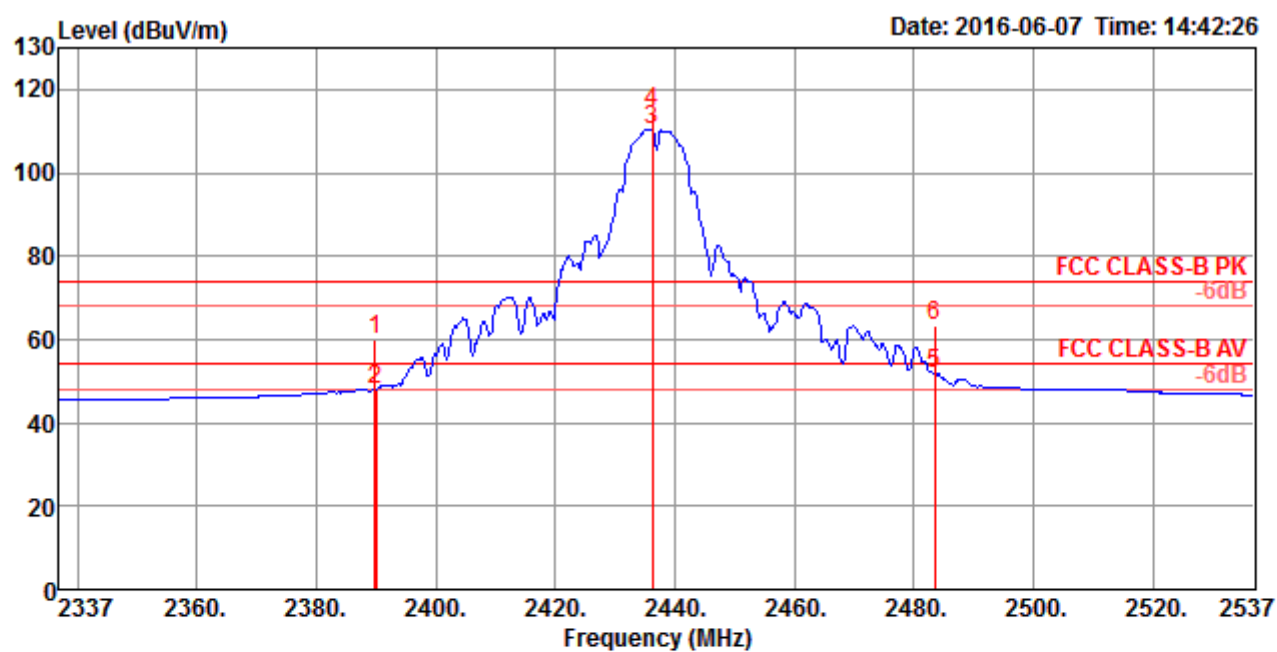

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	cm	deg	
1	2389.80	59.83	74.00	-14.17	26.73	5.20	27.90	0.00	128	211	Peak
2	2390.00	47.88	54.00	-6.12	14.78	5.20	27.90	0.00	128	211	Average
3	2436.20	110.29			77.16	5.27	27.86	0.00	128	211	Average
4	2436.20	114.51			81.38	5.27	27.86	0.00	128	211	Peak
5	2483.50	51.79	54.00	-2.21	18.64	5.34	27.81	0.00	128	211	Average
6	2483.50	63.31	74.00	-10.69	30.16	5.34	27.81	0.00	128	211	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

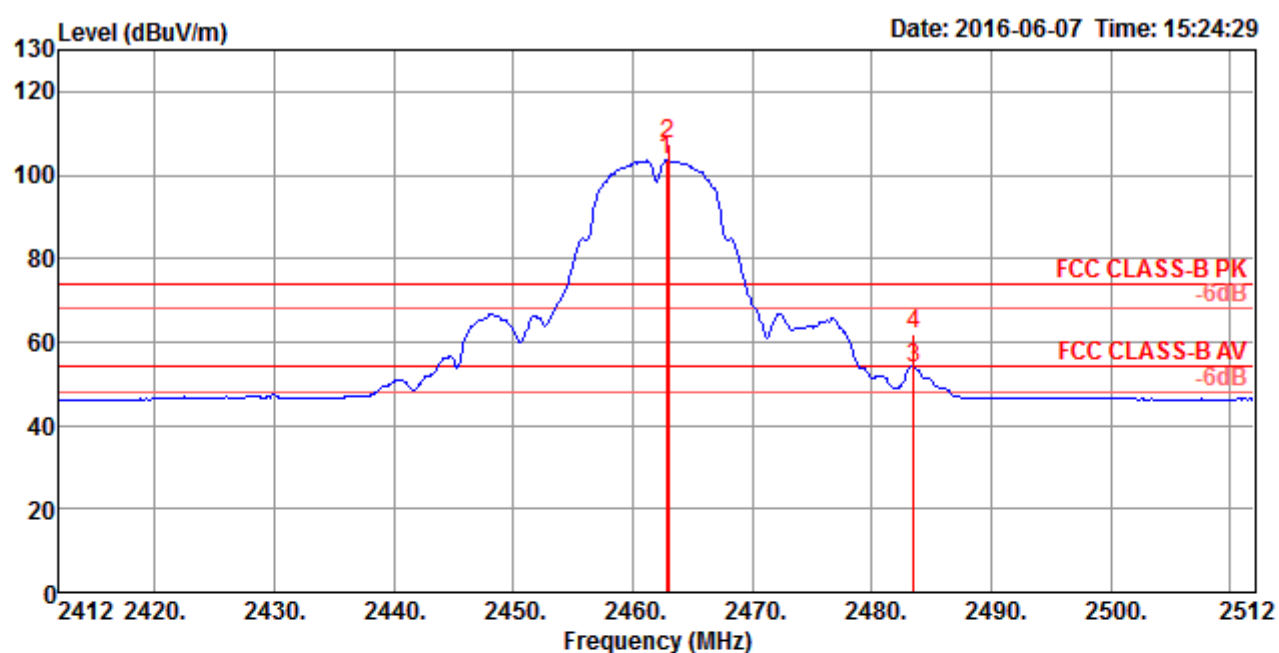


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2462.80	103.41			70.27	5.31	27.83	0.00	263	133	Average
2	2463.00	107.55			74.41	5.31	27.83	0.00	263	133	Peak
3	2483.50	53.58	54.00	-0.42	20.43	5.34	27.81	0.00	263	133	Average
4	2483.50	62.11	74.00	-11.89	28.96	5.34	27.81	0.00	263	133	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1
----------------	------------------------------------


Channel 1

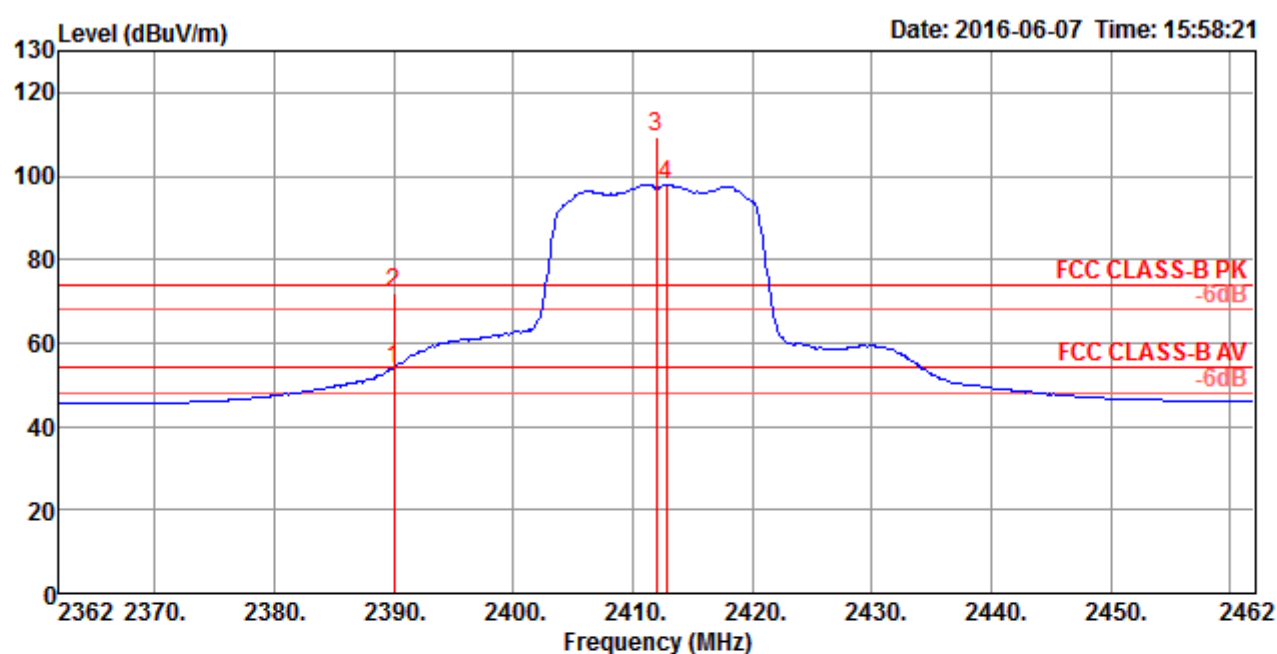

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2390.00	53.90	54.00	-0.10	20.80	5.20	27.90	0.00	100	214	Average	VERTICAL
2	2390.00	71.81	74.00	-2.19	38.71	5.20	27.90	0.00	100	214	Peak	VERTICAL
3	2412.00	109.20			76.08	5.24	27.88	0.00	100	214	Peak	VERTICAL
4	2412.80	98.01			64.89	5.24	27.88	0.00	100	214	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.


Channel 6

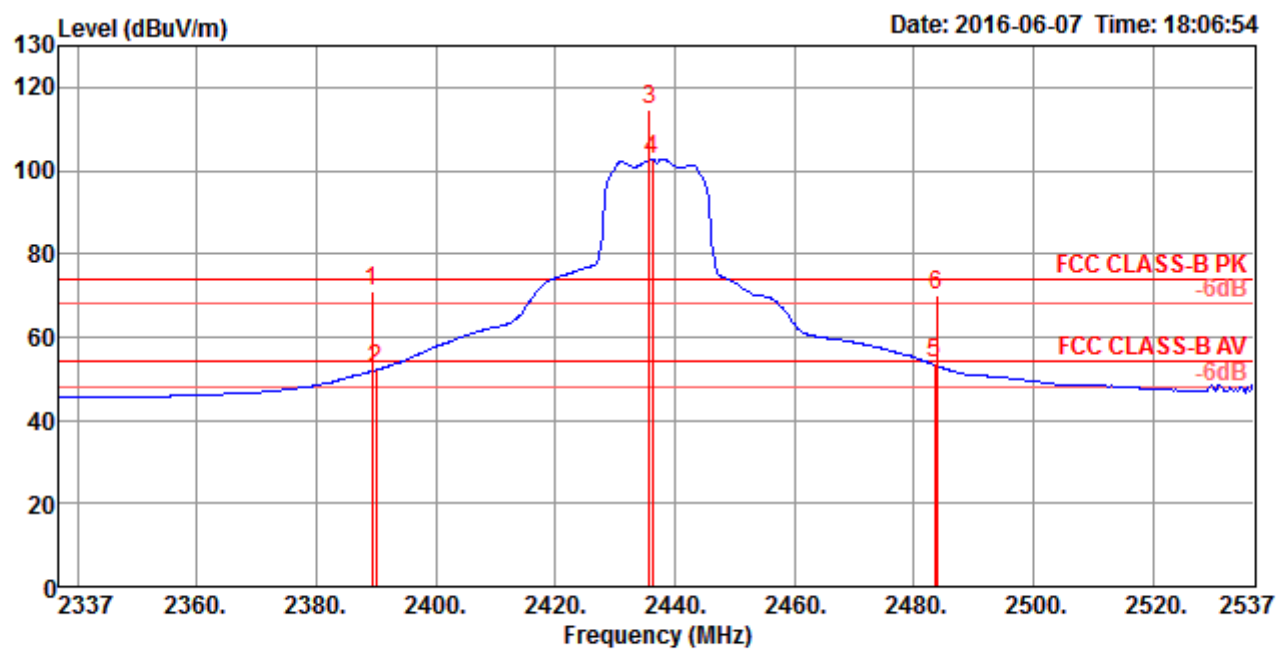

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.40	71.16	74.00	-2.84	38.06	5.20	27.90	0.00	128	215	Peak
2	2390.00	52.15	54.00	-1.85	19.05	5.20	27.90	0.00	128	215	Average
3	2435.80	114.45			81.32	5.27	27.86	0.00	128	215	Peak
4	2436.20	102.89			69.76	5.27	27.86	0.00	128	215	Average
5	2483.50	53.55	54.00	-0.45	20.40	5.34	27.81	0.00	128	215	Average
6	2483.80	69.81	74.00	-4.19	36.66	5.34	27.81	0.00	128	215	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

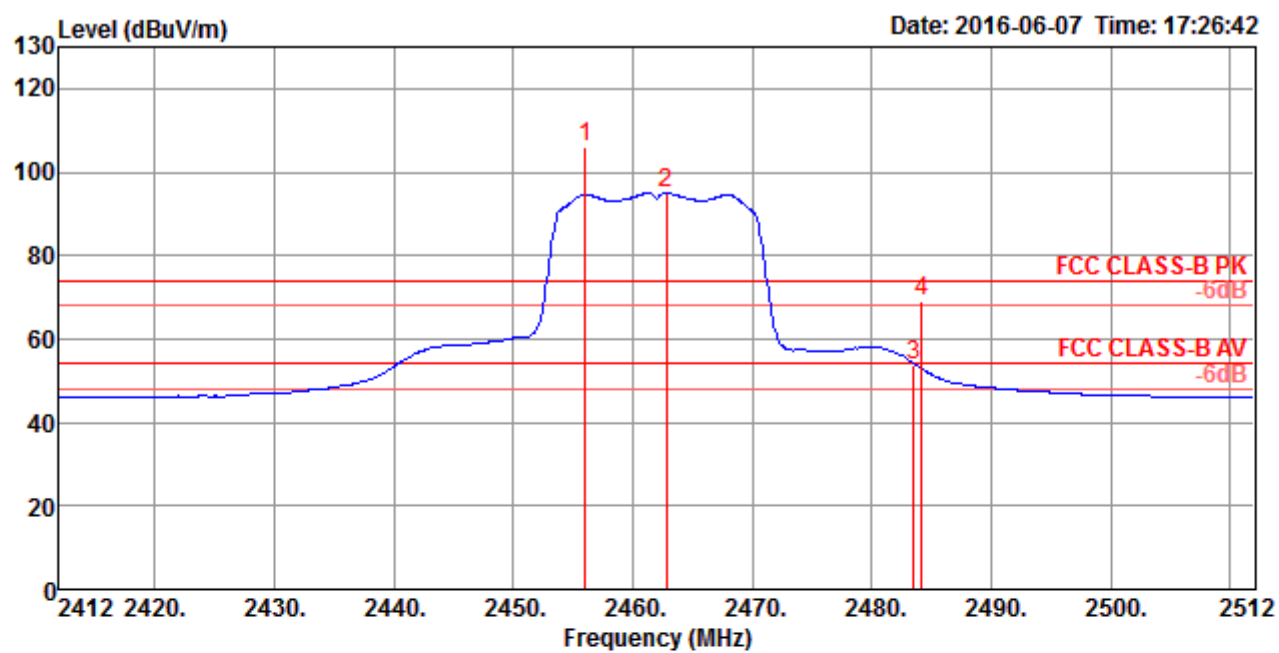


	Freq	Level	Limit	Over	Read	CableAntenna	Preampl	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2456.00	105.84			72.70	5.30	27.84	0.00	259	131	Peak
2	2462.80	94.97			61.83	5.31	27.83	0.00	259	131	Average
3	2483.50	53.88	54.00	-0.12	20.73	5.34	27.81	0.00	259	131	Average
4	2484.20	68.95	74.00	-5.05	35.80	5.34	27.81	0.00	259	131	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Configurations	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 4
----------------	--


Channel 1

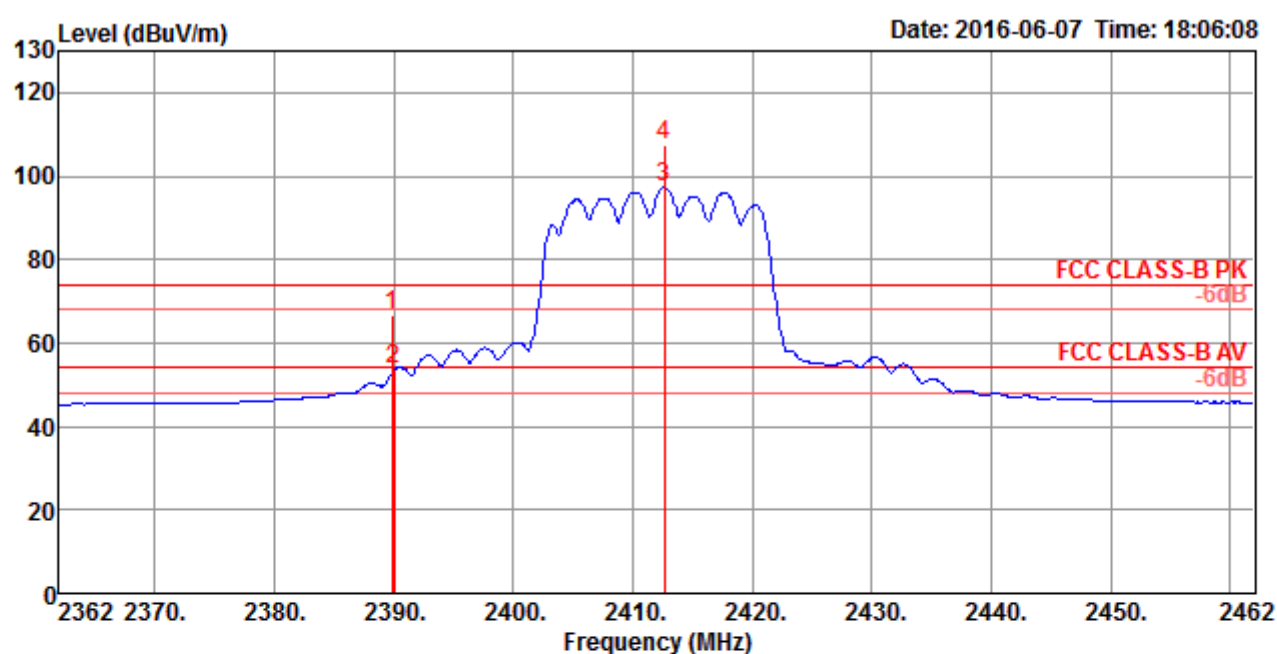

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.80	66.56	74.00	-7.44	33.46	5.20	27.90	0.00	250	250	Peak
2	2390.00	53.52	54.00	-0.48	20.42	5.20	27.90	0.00	250	250	Average
3	2412.60	97.28			64.16	5.24	27.88	0.00	250	250	Average
4	2412.60	107.59			74.47	5.24	27.88	0.00	250	250	Peak

Item 3, 4 are the fundamental frequency at 2412 MHz.


Channel 6

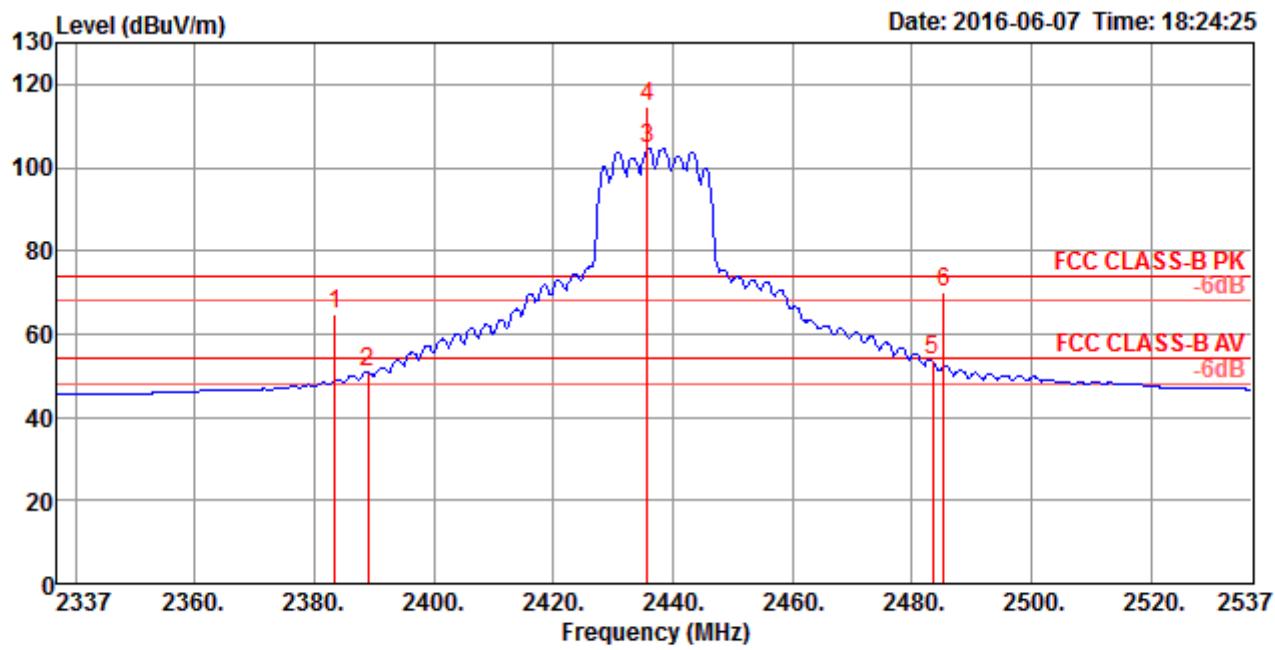

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2383.40	64.80	74.00	-9.20	31.70	5.19	27.91	0.00	118	146	Peak
2	2389.00	50.82	54.00	-3.18	17.72	5.20	27.90	0.00	118	146	Average
3	2435.80	104.47			71.34	5.27	27.86	0.00	118	146	Average
4	2435.80	114.63			81.50	5.27	27.86	0.00	118	146	Peak
5	2483.50	53.69	54.00	-0.31	20.54	5.34	27.81	0.00	118	146	Average
6	2485.40	70.07	74.00	-3.93	36.92	5.34	27.81	0.00	118	146	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

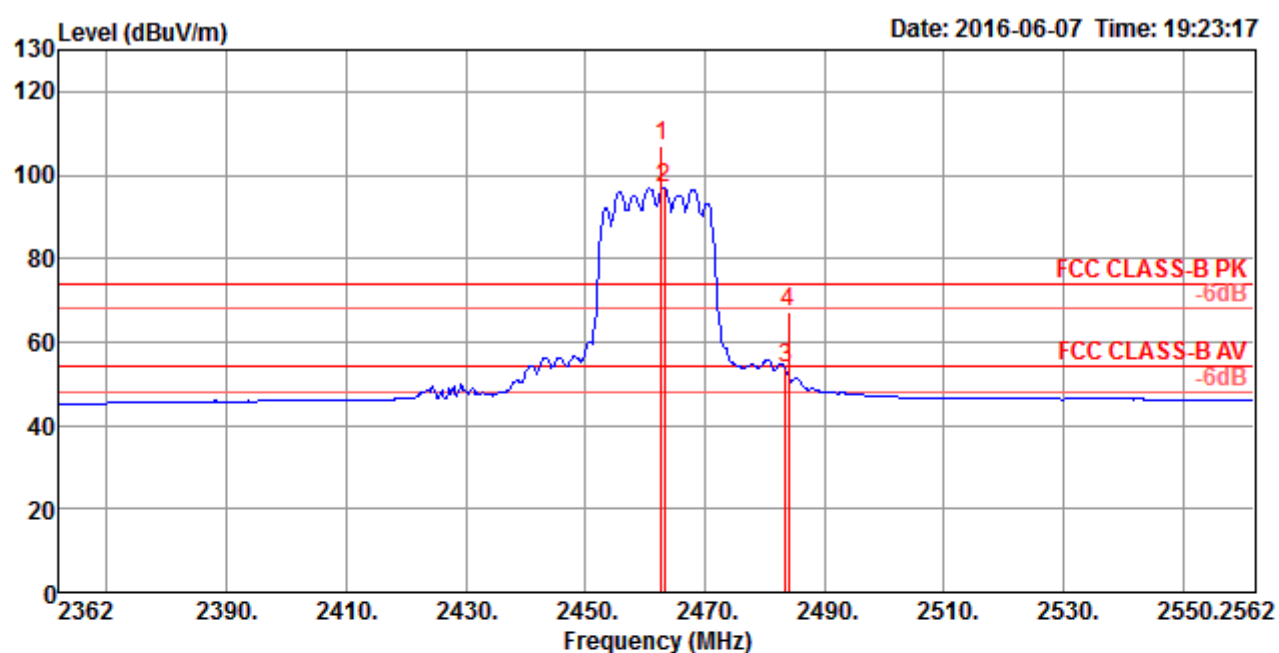


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2462.80	107.07			73.93	5.31	27.83	0.00	171	184	Peak
2	2463.20	96.98			63.84	5.31	27.83	0.00	171	184	Average
3	2483.50	53.50	54.00	-0.50	20.35	5.34	27.81	0.00	171	184	Average
4	2484.00	66.97	74.00	-7.03	33.82	5.34	27.81	0.00	171	184	Peak

Item 1, 2 are the fundamental frequency at 2462 MHz.

Configurations	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 4
----------------	---


Channel 3

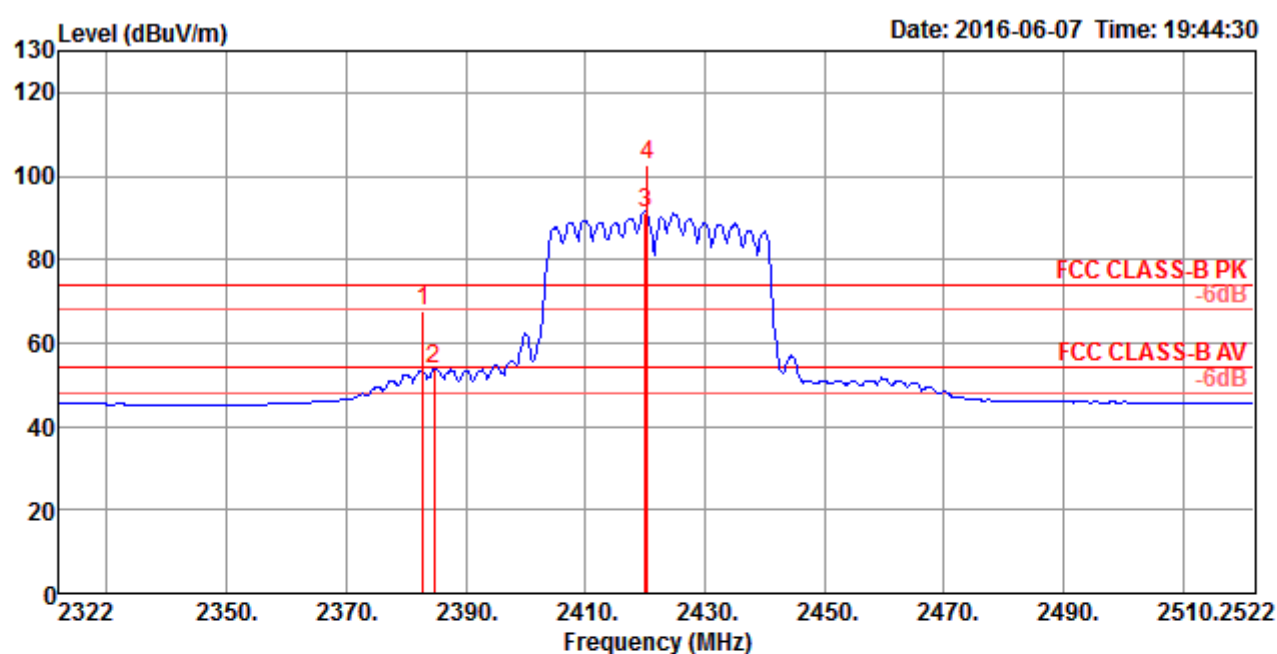

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2382.80	67.86	74.00	-6.14	34.76	5.19	27.91	0.00	100	238 Peak	HORIZONTAL
2	2384.80	53.75	54.00	-0.25	20.65	5.20	27.90	0.00	100	238 Average	HORIZONTAL
3	2420.00	91.36			58.24	5.25	27.87	0.00	100	238 Average	HORIZONTAL
4	2420.40	102.55			69.43	5.25	27.87	0.00	100	238 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.


Channel 6

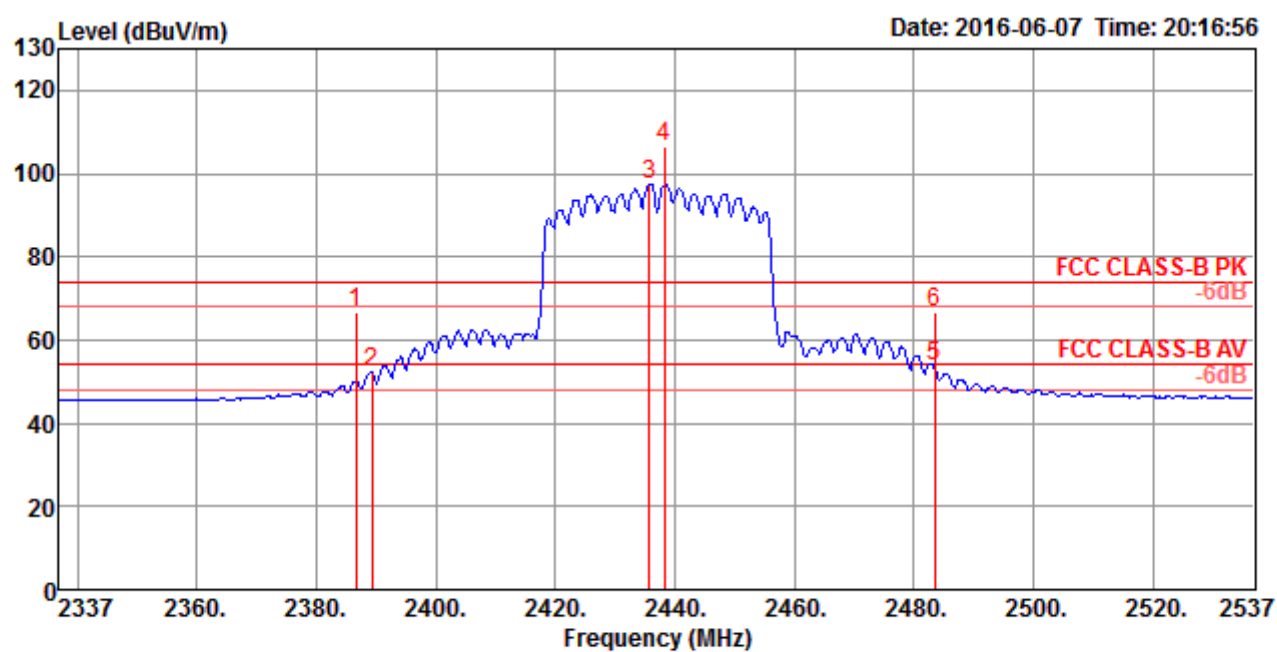

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2386.60	66.46	74.00	-7.54	33.36	5.20	27.90	0.00	147	149	Peak
2	2389.40	52.12	54.00	-1.88	19.02	5.20	27.90	0.00	147	149	Average
3	2435.80	97.33			64.20	5.27	27.86	0.00	147	149	Average
4	2438.20	106.50			73.37	5.27	27.86	0.00	147	149	Peak
5	2483.50	53.88	54.00	-0.12	20.73	5.34	27.81	0.00	147	149	Average
6	2483.50	66.56	74.00	-7.44	33.41	5.34	27.81	0.00	147	149	Peak

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 9

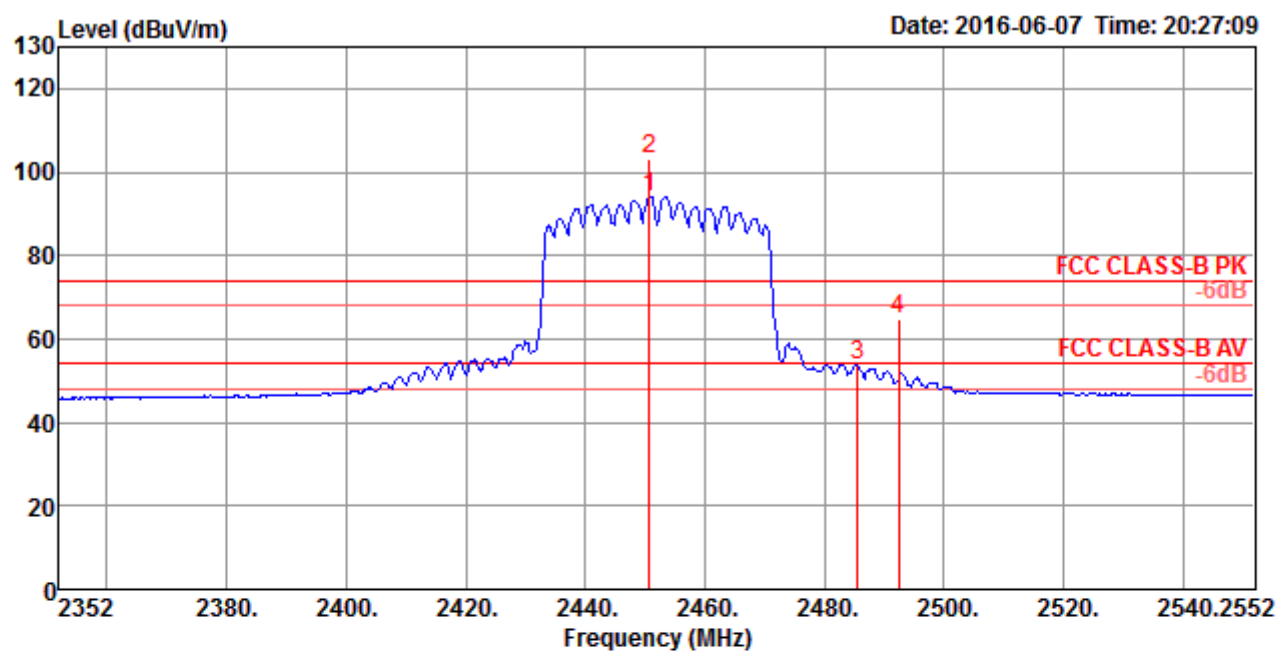

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2450.80	94.10			60.96	5.29	27.85	0.00	110	147	Average	VERTICAL
2	2450.80	103.22			70.08	5.29	27.85	0.00	110	147	Peak	VERTICAL
3	2485.60	53.80	54.00	-0.20	20.65	5.34	27.81	0.00	110	147	Average	VERTICAL
4	2492.40	64.82	74.00	-9.18	31.66	5.35	27.81	0.00	110	147	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

