



# FCC SAR TEST REPORT

FCC ID : UZ7EC300K  
Equipment : EC30 Enterprise Companion  
Brand Name : Zebra  
Model Name : EC300K  
Applicant : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Manufacturer : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Standard : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

The product was received on May 23, 2019 and testing was started from Jun. 01, 2019 and completed on Jun. 07, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## **Table of Contents**

<b>1. Statement of Compliance .....</b>	<b>4</b>
<b>2. Guidance Applied.....</b>	<b>4</b>
<b>3. Equipment Under Test (EUT) Information .....</b>	<b>5</b>
3.1 General Information .....	5
<b>4. RF Exposure Limits.....</b>	<b>6</b>
4.1 Uncontrolled Environment.....	6
4.2 Controlled Environment.....	6
<b>5. Specific Absorption Rate (SAR).....</b>	<b>7</b>
5.1 Introduction .....	7
5.2 SAR Definition.....	7
<b>6. System Description and Setup .....</b>	<b>8</b>
6.1 E-Field Probe .....	9
6.2 Data Acquisition Electronics (DAE) .....	9
6.3 Phantom.....	10
6.4 Device Holder.....	11
<b>7. Measurement Procedures .....</b>	<b>12</b>
7.1 Spatial Peak SAR Evaluation.....	12
7.2 Power Reference Measurement.....	13
7.3 Area Scan .....	13
7.4 Zoom Scan.....	14
7.5 Volume Scan Procedures.....	14
7.6 Power Drift Monitoring.....	14
<b>8. Test Equipment List .....</b>	<b>15</b>
<b>9. System Verification .....</b>	<b>16</b>
9.1 Tissue Simulating Liquids.....	16
9.2 Tissue Verification .....	17
9.3 System Performance Check Results.....	18
<b>10. Conducted RF Output Power (Unit: dBm).....</b>	<b>19</b>
<b>11. Bluetooth Exclusions Applied .....</b>	<b>29</b>
<b>12. Antenna Location .....</b>	<b>30</b>
<b>13. SAR Test Results .....</b>	<b>31</b>
13.1 Body-worn SAR.....	32
13.2 Repeated SAR Measurement .....	34
<b>14. Simultaneous Transmission Analysis .....</b>	<b>35</b>
14.1 Body-worn Exposure Conditions.....	35
<b>15. Uncertainty Assessment .....</b>	<b>36</b>
<b>16. References.....</b>	<b>36</b>
<b>Appendix A. Plots of System Performance Check</b>	
<b>Appendix B. Plots of High SAR Measurement</b>	
<b>Appendix C. DASY Calibration Certificate</b>	
<b>Appendix D. Test Setup Photos</b>	



## History of this test report

Report No.	Version	Description	Issued Date
FA930401	01	Initial issue of report	Jun. 24, 2019

## **1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for Zebra Technologies Corporation, EC30 Enterprise Companion, EC300K, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
		Body-worn	
		1g SAR (W/kg)	
DTS	2.4GHz WLAN	1.35	1.35
NII	5GHz WLAN	1.34	1.34
Date of Testing:		2019/6/1 ~ 2019/6/7	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

**Reviewed by: Jason Wang**

**Report Producer: Wan Liu**

## **2. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02

### **3. Equipment Under Test (EUT) Information**

#### **3.1 General Information**

Product Feature & Specification	
Equipment Name	EC30 Enterprise Companion
Brand Name	Zebra
Model Name	EC300K
FCC ID	UZ7EC300K
S/N	191185230E0052
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	WLAN: 802.11a/b/g/n/ac HT20 / HT40 / VHT20 / VHT40 / VHT80 Bluetooth BR/EDR/LE
HW Version	EC30 MB EV2 V12
SW Version	Zebra/EC30PR/EC30RT:8.1.0/01-17-19.00-ON-U00-PRD/365:eng/release-keys
FW Version	01-17-19.00-ON-U00-PRD
MFD	28APR19
EUT Stage	Identical Prototype
<b>Remark:</b> 1. There are five holsters, and the detail of holsters is listed below table. RF evaluation chose holster 1 as main test, and holster 2~5 were spot checked the worst case of holster 1. 2. The holster 1-1 to 1-3 is similar, for the difference please refers to the external photo. The variated position is more than 3cm away from the transmitting antenna, so RF exposure only select holster 1-1 to be tested.	

Accessories					
AC Adapter 1	AC Adapter - EU ( P/N : PWR-WUA5V12W0EU)	Brand Name	ZEBRA	Model Name	SAWA-65-2005A
AC Adapter 2	AC Adapter - US ( P/N : PWR-WUA5V12W0US)	Brand Name	ZEBRA	Model Name	SAWA-65-2005A
USB-C 1	TC2X USB-C Cable	Brand Name	ZEBRA	Model Name	CBL-TC2X-USBC01
USB-C 2	TC5X USB-C Cable	Brand Name	ZEBRA	Model Name	CBL-TC5X-USBC2A-01
Headset 1	3.5MM PTT/VOIP headset	Brand Name	ZEBRA	Model Name	HDST-35MM-PTVP-01
Headset 2	3.5MM PTT headset	Brand Name	ZEBRA	Model Name	HDST-35MM-PTT1-01
Holster 1-1	Lanyard Adapter (EC30 RETRACTOR WITH MAGNETIC RECOIL, CARABINER AND ADAPTER )	Brand Name	ZEBRA	Part Number	SG-EC30-RCB1-01
Holster 1-2	Lanyard Adapter (EC30 RETRACTABLE LANYARD WITH MAGNETIC RECOIL, ADJUSTABLE NECK STRAP AND ADAPTER (1 PACK)	Brand Name	ZEBRA	Part Number	SG-EC30-RLYD1-01
Holster 1-3	Lanyard Adapter (EC30 BASIC LANYARD WITH ADJUSTABLE NECK STRAP AND ADAPTER)	Brand Name	ZEBRA	Part Number	SG-EC30-BLYD1-01
Holster 2	Lanyard Adapter with a Vest/Garment clip with coiled tether	Brand Name	ZEBRA	Part Number	SG-EC30-CLIP1-01
Holster 3	Body Holster (EC30 Soft Holster)	Brand Name	ZEBRA	Part Number	SG-EC30-HLSTR1-01
Holster 4	Wrist Holster (EC30 Arm Mount (standard strap))	Brand Name	ZEBRA	Part Number	SG-EC30-ARM1-01
Holster 5	Body Holster (EC30 Rigid holster with snap-in design. Rotating Belt Clip with ability to insert in either direction.)	Brand Name	ZEBRA	Part Number	SG-EC30-RHLSTR1-01

## **4. RF Exposure Limits**

### **4.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### **4.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

**The DASY system used for performing compliance tests consists of the following items:**




- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.




## 6.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### <ES3DV3 Probe>

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

### <EX3DV4 Probe>

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

## 6.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


### 6.3 Phantom

#### <SAM Twin Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

#### <ELI Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.4 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

## **7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## **7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

## 7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	$3 - 4$ GHz: $\leq 3$ mm $4 - 5$ GHz: $\leq 2.5$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

## 7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

## 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 31, 2018	Aug. 30, 2019
SPEAG	2450MHz System Validation Kit	D2450V2	929	Mar. 06, 2019	Mar. 05, 2020
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 27, 2018	Sep. 26, 2019
SPEAG	Data Acquisition Electronics	DAE4	778	May. 21, 2019	May. 20, 2020
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 24, 2018	Jul. 23, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 24, 2019	May. 23, 2020
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2018	Nov. 11, 2019
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2018	Nov. 11, 2019
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 11, 2018	Dec. 10, 2019
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2018	Sep. 18, 2019
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 11, 2018	Sep. 10, 2019
Anritsu	Power Meter	ML2495A	1218006	Oct. 08, 2018	Oct. 07, 2019
Anritsu	Power Sensor	MA2411B	1207363	Oct. 08, 2018	Oct. 07, 2019
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 28, 2018	Aug. 27, 2019
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 23, 2018	Jun. 22, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	070501814	Oct. 08, 2018	Oct. 07, 2019
Mini-Circuits	Power Amplifier	ZVE-8G+	6382	Aug. 09, 2018	Aug. 08, 2019
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



## 9. System Verification

### 9.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR



## 9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

### Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
2450	22.5	1.802	38.938	1.80	39.20	0.11	-0.67	±5	2019/6/1
2450	22.4	1.799	38.685	1.80	39.20	-0.06	-1.31	±5	2019/6/6
5250	22.6	4.748	36.757	4.71	35.95	0.81	2.24	±5	2019/6/6
5600	22.4	5.087	36.161	5.07	35.50	0.34	1.86	±5	2019/6/7
5750	22.4	5.250	35.944	5.22	35.35	0.57	1.68	±5	2019/6/7

### 9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/6/1	2450	250	D2450V2-929	EX3DV4 - SN3728	DAE4 Sn853	12.00	52.10	48	-7.87
2019/6/6	2450	250	D2450V2-736	EX3DV4 - SN3925	DAE4 Sn778	14.10	52.70	56.4	7.02
2019/6/6	5250	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE4 Sn778	7.78	80.70	77.8	-3.59
2019/6/7	5600	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE4 Sn778	8.93	83.30	89.3	7.20
2019/6/7	5750	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE4 Sn778	8.39	80.40	83.9	4.35

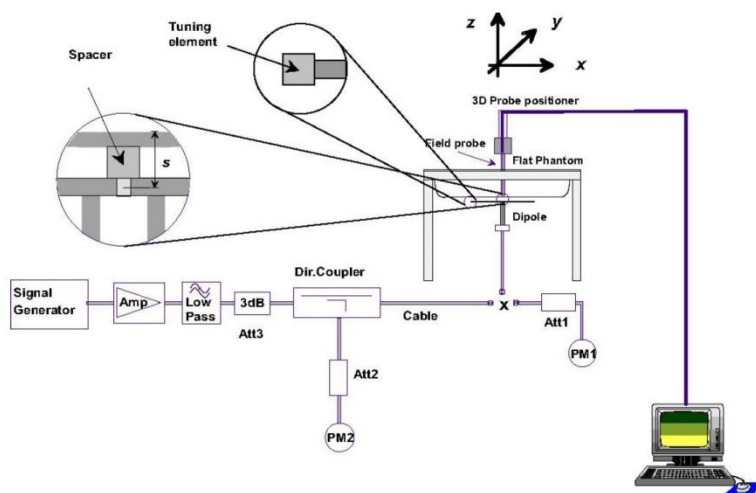

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## **10. Conducted RF Output Power (Unit: dBm)**

### **<WLAN Conducted Power>**

#### **General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

**<Non-beamforming mode>**
**<2.4GHz WLAN ANT 1>**

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	17.80	18.00	95.31
		6	2437	17.80	18.00	
		11	2462	17.70	18.00	
	802.11g 6Mbps	1	2412	16.90	17.00	95.51
		6	2437	17.90	18.00	
		11	2462	15.70	16.00	
	802.11n-HT20 MCS0	1	2412	16.10	16.50	94.24
		6	2437	17.70	18.00	
		11	2462	15.50	15.50	
	802.11n-HT40 MCS0	3	2422	14.90	15.00	90.24
		6	2437	17.70	18.00	
		9	2452	14.70	15.00	
	802.11ac-VHT20 MCS0	1	2412	16.20	16.50	95.74
		6	2437	17.80	18.00	
		11	2462	15.60	16.00	
	802.11ac-VHT40 MCS0	3	2422	15.00	15.00	91.22
		6	2437	17.80	18.00	
		9	2452	14.80	15.00	

**<2.4GHz WLAN ANT 2>**

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	17.80	18.00	95.75
		6	2437	17.70	18.00	
		11	2462	17.80	18.00	
	802.11g 6Mbps	1	2412	16.70	17.00	95.51
		6	2437	17.80	18.00	
		11	2462	15.80	16.00	
	802.11n-HT20 MCS0	1	2412	15.90	16.00	95.19
		6	2437	17.70	18.00	
		11	2462	15.60	16.00	
	802.11n-HT40 MCS0	3	2422	14.70	15.00	91.13
		6	2437	17.70	18.00	
		9	2452	14.60	15.00	
	802.11ac-VHT20 MCS0	1	2412	16.00	16.00	94.26
		6	2437	17.80	18.00	
		11	2462	15.70	16.00	
	802.11ac-VHT40 MCS0	3	2422	14.80	15.00	92.20
		6	2437	17.80	18.00	
		9	2452	14.70	15.00	

**<2.4GHz WLAN ANT 1+2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	21.91	22.00	96.00
		6	2437	21.76	22.00	
		11	2462	21.81	22.00	
	802.11g 6Mbps	1	2412	19.26	19.50	95.74
		6	2437	21.86	22.00	
		11	2462	18.79	19.00	
	802.11n-HT20 MCS0	1	2412	18.51	19.00	95.72
		6	2437	21.76	22.00	
		11	2462	18.16	18.50	
	802.11n-HT40 MCS0	3	2422	17.36	17.50	91.18
		6	2437	21.81	22.00	
		9	2452	17.71	18.00	
	802.11ac-VHT20 MCS0	1	2412	18.56	19.00	95.26
		6	2437	21.81	22.00	
		11	2462	18.21	18.50	
	802.11ac-VHT40 MCS0	3	2422	17.41	17.50	92.16
		6	2437	21.86	22.00	
		9	2452	17.76	18.00	

**<5GHz WLAN ANT1>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.70	18.00	94.84
		40	5200	17.60	18.00	
		44	5220	17.70	18.00	
		48	5240	17.70	18.00	
	802.11n-HT20 MCS0	36	5180	17.60	18.00	94.95
		40	5200	17.50	18.00	
		44	5220	17.60	18.00	
		48	5240	17.60	18.00	
	802.11n-HT40 MCS0	38	5190	16.00	16.50	91.18
		46	5230	17.80	18.00	
	802.11ac-VHT20 MCS0	36	5180	17.70	18.00	95.70
		40	5200	17.60	18.00	
		44	5220	17.70	18.00	
		48	5240	17.70	18.00	
	802.11ac-VHT40 MCS0	38	5190	16.10	16.50	90.34
		46	5230	17.90	18.00	
	802.11ac-VHT80 MCS0	42	5210	16.60	17.00	89.33

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	17.60	18.00	94.84
		56	5280	17.50	18.00	
		60	5300	17.60	18.00	
		64	5320	17.70	18.00	
	802.11n-HT20 MCS0	52	5260	17.80	18.00	94.95
		56	5280	17.70	18.00	
		60	5300	17.80	18.00	
		64	5320	17.50	18.00	
	802.11n-HT40 MCS0	54	5270	17.60	18.00	91.18
		62	5310	15.00	15.00	
	802.11ac-VHT20 MCS0	52	5260	17.90	18.00	95.70
		56	5280	17.80	18.00	
		60	5300	17.90	18.00	
		64	5320	17.60	18.00	
	802.11ac-VHT40 MCS0	54	5270	17.70	18.00	90.34
		62	5310	15.10	15.50	
	802.11ac-VHT80 MCS0	58	5290	13.40	13.50	89.33

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.30	17.50	94.84
		116	5580	17.40	17.50	
		124	5620	17.30	17.50	
		132	5660	17.30	17.50	
		144	5720	17.40	17.50	
	802.11n-HT20 MCS0	100	5500	17.10	17.50	94.95
		116	5580	17.10	17.50	
		124	5620	17.10	17.50	
		132	5660	17.10	17.50	
		144	5720	17.30	17.50	
	802.11n-HT40 MCS0	102	5510	17.30	17.50	91.18
		110	5550	17.10	17.50	
		126	5630	17.10	17.50	
		134	5670	17.30	17.50	
		142	5710	17.10	17.50	
	802.11ac-VHT20 MCS0	100	5500	17.20	17.50	95.70
		116	5580	17.20	17.50	
		124	5620	17.20	17.50	
		132	5660	17.20	17.50	
		144	5720	17.40	17.50	
	802.11ac-VHT40 MCS0	102	5510	17.40	17.50	90.34
		110	5550	17.20	17.50	
		126	5630	17.20	17.50	
		134	5670	17.40	17.50	
		142	5710	17.20	17.50	
	802.11ac-VHT80 MCS0	106	5530	17.10	17.50	89.33
		122	5610	17.40	17.50	
		138	5690	17.40	17.50	

5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	17.30	17.50	94.84
		157	5785	17.20	17.50	
		165	5825	17.20	17.50	
	802.11n-HT20 MCS0	149	5745	17.20	17.50	94.95
		157	5785	17.10	17.50	
		165	5825	17.30	17.50	
	802.11n-HT40 MCS0	151	5755	17.10	17.50	91.18
		159	5795	17.20	17.50	
	802.11ac-VHT20 MCS0	149	5745	17.30	17.50	95.70
		157	5785	17.20	17.50	
		165	5825	17.40	17.50	
	802.11ac-VHT40 MCS0	151	5755	17.20	17.50	90.34
		159	5795	17.30	17.50	
	802.11ac-VHT80 MCS0	155	5775	17.30	17.50	89.33

**<5GHz WLAN ANT2>**

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	17.80	18.00	95.51
		40	5200	17.70	18.00	
		44	5220	17.70	18.00	
		48	5240	17.70	18.00	
	802.11n-HT20 MCS0	36	5180	17.60	18.00	94.70
		40	5200	17.50	18.00	
		44	5220	17.60	18.00	
		48	5240	17.60	18.00	
	802.11n-HT40 MCS0	38	5190	16.10	16.50	91.18
		46	5230	17.60	18.00	
	802.11ac-VHT20 MCS0	36	5180	17.70	18.00	95.98
		40	5200	17.60	18.00	
		44	5220	17.70	18.00	
		48	5240	17.70	18.00	
	802.11ac-VHT40 MCS0	38	5190	16.20	16.50	91.26
		46	5230	17.70	18.00	
	802.11ac-VHT80 MCS0	42	5210	16.60	17.00	89.05

5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	17.60	18.00	95.51
		56	5280	17.60	18.00	
		60	5300	17.70	18.00	
		64	5320	17.60	18.00	
	802.11n-HT20 MCS0	52	5260	17.80	18.00	94.70
		56	5280	17.70	18.00	
		60	5300	17.80	18.00	
		64	5320	17.50	18.00	
	802.11n-HT40 MCS0	54	5270	17.60	18.00	91.18
		62	5310	14.90	15.00	
	802.11ac-VHT20 MCS0	52	5260	17.90	18.00	95.98
		56	5280	17.80	18.00	
		60	5300	17.90	18.00	
		64	5320	17.60	18.00	
	802.11ac-VHT40 MCS0	54	5270	17.70	18.00	91.26
		62	5310	15.00	15.00	
	802.11ac-VHT80 MCS0	58	5290	13.30	13.50	89.05

5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	17.20	17.50	95.51
		116	5580	17.40	17.50	
		124	5620	17.30	17.50	
		132	5660	17.20	17.50	
		144	5720	17.10	17.50	
	802.11n-HT20 MCS0	100	5500	17.10	17.50	94.70
		116	5580	17.30	17.50	
		124	5620	17.20	17.50	
		132	5660	17.20	17.50	
		144	5720	17.30	17.50	
	802.11n-HT40 MCS0	102	5510	17.20	17.50	91.18
		110	5550	17.20	17.50	
		126	5630	17.20	17.50	
		134	5670	17.30	17.50	
		142	5710	17.10	17.50	
	802.11ac-VHT20 MCS0	100	5500	17.20	17.50	95.98
		116	5580	17.40	17.50	
		124	5620	17.30	17.50	
		132	5660	17.30	17.50	
		144	5720	17.40	17.50	
	802.11ac-VHT40 MCS0	102	5510	17.30	17.50	91.26
		110	5550	17.30	17.50	
		126	5630	17.30	17.50	
		134	5670	17.40	17.50	
		142	5710	17.20	17.50	
	802.11ac-VHT80 MCS0	106	5530	17.40	17.50	89.05
		122	5610	17.40	17.50	
		138	5690	17.40	17.50	



5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	17.20	17.50	95.51
		157	5785	17.10	17.50	
		165	5825	17.10	17.50	
	802.11n-HT20 MCS0	149	5745	17.20	17.50	94.70
		157	5785	17.10	17.50	
		165	5825	17.30	17.50	
	802.11n-HT40 MCS0	151	5755	17.10	17.50	91.18
		159	5795	17.00	17.00	
	802.11ac-VHT20 MCS0	149	5745	17.30	17.50	95.98
		157	5785	17.20	17.50	
		165	5825	17.40	17.50	
	802.11ac-VHT40 MCS0	151	5755	17.20	17.50	91.26
		159	5795	17.10	17.50	
	802.11ac-VHT80 MCS0	155	5775	17.10	17.50	89.05

**<5GHz WLAN ANT1+2>**

5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	20.51	21.00	95.51
		40	5200	20.51	21.00	
		44	5220	20.46	20.50	
		48	5240	20.86	21.00	
	802.11n-HT20 MCS0	36	5180	20.71	21.00	94.71
		40	5200	20.71	21.00	
		44	5220	20.76	21.00	
		48	5240	20.71	21.00	
	802.11n-HT40 MCS0	38	5190	18.86	19.00	91.18
		46	5230	20.86	21.00	
	802.11ac-VHT20 MCS0	36	5180	20.76	21.00	94.55
		40	5200	20.76	21.00	
		44	5220	20.81	21.00	
		48	5240	20.76	21.00	
	802.11ac-VHT40 MCS0	38	5190	18.91	19.00	91.67
		46	5230	20.91	21.00	
	802.11ac-VHT80 MCS0	42	5210	15.36	15.50	89.71

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	20.36	20.50	95.51
		56	5280	20.31	21.00	
		60	5300	20.66	21.00	
		64	5320	20.71	21.00	
	802.11n-HT20 MCS0	52	5260	20.71	21.00	94.71
		56	5280	20.61	21.00	
		60	5300	20.61	21.00	
		64	5320	20.66	21.00	
	802.11n-HT40 MCS0	54	5270	20.66	21.00	91.18
		62	5310	16.21	16.50	
	802.11ac-VHT20 MCS0	52	5260	20.66	21.00	94.55
		56	5280	20.66	21.00	
		60	5300	20.66	21.00	
		64	5320	20.71	21.00	
	802.11ac-VHT40 MCS0	54	5270	20.71	21.00	91.67
		62	5310	16.26	16.50	
	802.11ac-VHT80 MCS0	58	5290	16.51	17.00	89.71

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	19.46	19.50	95.51
		116	5580	19.26	19.50	
		124	5620	19.21	19.50	
		132	5660	19.16	19.50	
		144	5720	19.16	19.50	
	802.11n-HT20 MCS0	100	5500	19.36	19.50	94.71
		116	5580	19.06	19.50	
		124	5620	19.11	19.50	
		132	5660	19.11	19.50	
		144	5720	19.16	19.50	
	802.11n-HT40 MCS0	102	5510	19.41	19.50	91.18
		110	5550	19.36	19.50	
		126	5630	19.26	19.50	
		134	5670	19.21	19.50	
		142	5710	19.21	19.50	
	802.11ac-VHT20 MCS0	100	5500	19.41	19.50	94.55
		116	5580	19.11	19.50	
		124	5620	19.16	19.50	
		132	5660	19.16	19.50	
		144	5720	19.21	19.50	
	802.11ac-VHT40 MCS0	102	5510	19.46	19.50	91.67
		110	5550	19.41	19.50	
		126	5630	19.31	19.50	
		134	5670	19.26	19.50	
		142	5710	19.26	19.50	
	802.11ac-VHT80 MCS0	106	5530	19.46	19.50	89.71
		122	5610	19.26	19.50	
		138	5690	19.31	19.50	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	19.11	19.50	95.51
		157	5785	19.11	19.50	
		165	5825	19.11	19.50	
	802.11n-HT20 MCS0	149	5745	19.16	19.50	94.71
		157	5785	19.11	19.50	
		165	5825	19.31	19.50	
	802.11n-HT40 MCS0	151	5755	19.11	19.50	91.18
		159	5795	19.06	19.50	
	802.11ac-VHT20 MCS0	149	5745	19.21	19.50	94.55
		157	5785	19.16	19.50	
		165	5825	19.41	19.50	
	802.11ac-VHT40 MCS0	151	5755	19.16	19.50	91.67
		159	5795	19.11	19.50	
	802.11ac-VHT80 MCS0	155	5775	19.31	19.50	89.71

**<Beamforming mode>**
**<2.4GHz WLAN ANT 1+2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11ac-VHT20 MCS0	1	2412	20.94	21.00	95.26
		6	2437	21.14	21.50	
		11	2462	20.16	20.50	
	802.11ac-VHT40 MCS0	3	2422	19.68	20.00	92.16
		6	2437	21.31	21.50	
		9	2452	17.08	17.50	

**<5GHz WLAN ANT1+2>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11ac-VHT20 MCS0	36	5180	19.89	20.00	94.55
		40	5200	19.91	20.00	
		44	5220	19.99	20.00	
		48	5240	19.92	20.00	
	802.11ac-VHT40 MCS0	38	5190	19.94	20.00	91.67
		46	5230	20.10	20.50	
	802.11ac-VHT80 MCS0	42	5210	20.21	20.50	89.71

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11ac-VHT20 MCS0	52	5260	19.82	20.00	94.55
		56	5280	19.84	20.00	
		60	5300	19.89	20.00	
		64	5320	19.92	20.00	
	802.11ac-VHT40 MCS0	54	5270	20.08	20.50	91.67
		62	5310	20.00	20.00	
	802.11ac-VHT80 MCS0	58	5290	19.20	19.50	89.71

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11ac-VHT20 MCS0	100	5500	18.21	18.50	94.55
		116	5580	18.42	18.50	
		124	5620	18.17	18.50	
		132	5660	18.34	18.50	
		144	5720	18.72	19.00	
	802.11ac-VHT40 MCS0	102	5510	18.39	18.50	91.67
		110	5550	18.57	19.00	
		126	5630	18.42	18.50	
		134	5670	18.57	19.00	
		142	5710	18.52	19.00	
	802.11ac-VHT80 MCS0	106	5530	18.78	19.00	89.71
		122	5610	18.68	19.00	
		138	5690	18.94	19.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11ac-VHT20 MCS0	149	5745	18.40	18.50	94.55
		157	5785	18.26	18.50	
		165	5825	18.30	18.50	
	802.11ac-VHT40 MCS0	151	5755	18.71	19.00	91.67
		159	5795	18.57	19.00	
	802.11ac-VHT80 MCS0	155	5775	18.94	19.00	89.71



## 11. Bluetooth Exclusions Applied

Mode Band	Max Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	4	4

**Note:**


- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*  $\leq 50$  mm are determined by:  
$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
4	< 5	2.48	0.79

**Note:**

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.79 which is  $\leq 3$ , SAR testing is not required.

## 12. Antenna Location

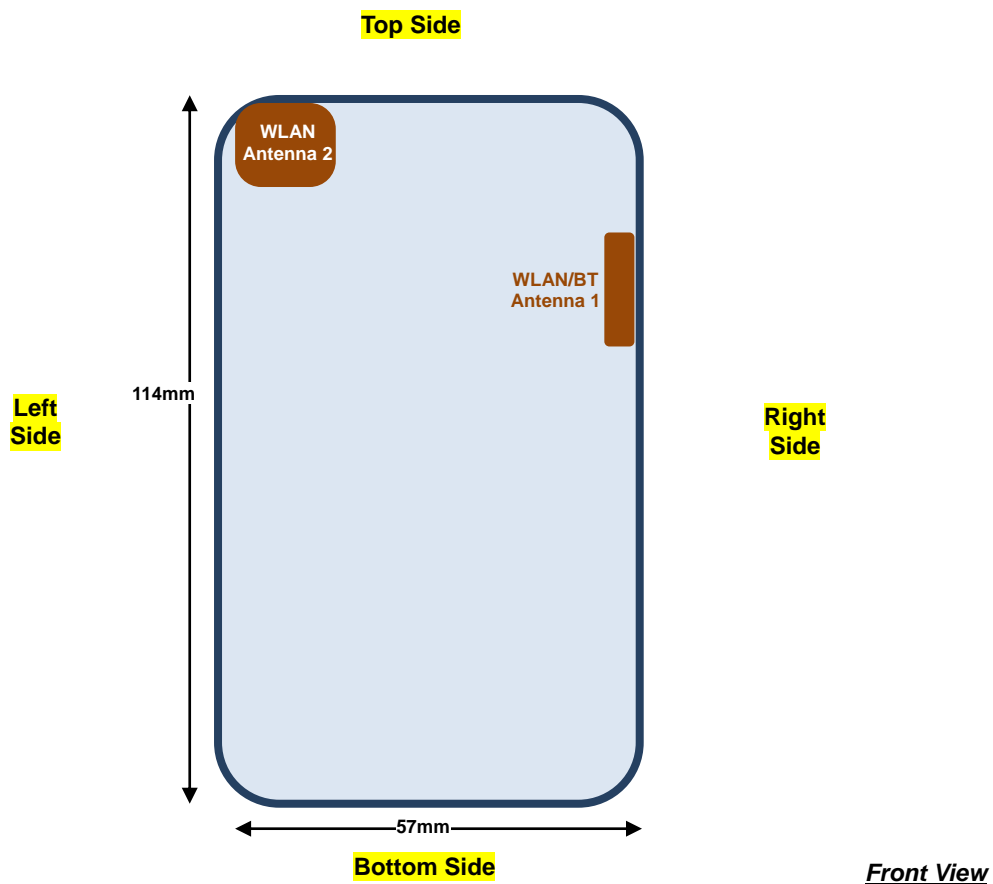



### **13. SAR Test Results**

**General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. According to 648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset, for the headset only selected headset2 to be tested.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for ant 1 and ant 2 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, for ant 1+2 2.4GHz 802.11g/n SAR testing is required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $> 1.2$  W/kg.
3. Per KDB 248227 D01v02r02, Ant 1 and Ant 2 U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
4. Per KDB 248227 D01v02r02, Ant 1+2 U-NII-1 SAR testing is required when the U-NII-2A band highest reported SAR for a test configuration is  $> 1.2$  W/kg, SAR is required for U-NII-1 band.
5. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
6. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
7. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



### 13.1 Body-worn SAR

#### <WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Holster	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1	Holster 1		1	2412	17.80	18.00	1.047	95.31	1.049	-0.07	0.555	0.610
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1	Holster 2		1	2412	17.80	18.00	1.047	95.31	1.049	-0.1	0.643	0.706
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Holster 3		1	2412	17.80	18.00	1.047	95.31	1.049	-0.14	0.074	0.081
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1	Holster 4		1	2412	17.80	18.00	1.047	95.31	1.049	-0.1	0.115	0.126
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1	Holster 5		1	2412	17.80	18.00	1.047	95.31	1.049	-0.1	0.064	0.070
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 2	Holster 1		1	2412	17.80	18.00	1.047	95.75	1.044	-0.08	0.938	1.025
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 2	Holster 1		6	2437	17.70	18.00	1.072	95.75	1.044	0.01	0.931	1.041
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 2	Holster 1		11	2462	17.80	18.00	1.047	95.75	1.044	0.12	0.913	0.998
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 2	Holster 2		6	2437	17.70	18.00	1.072	95.75	1.044	0.02	0.842	0.942
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Holster 3		6	2437	17.70	18.00	1.072	95.75	1.044	-0.12	0.182	0.204
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 2	Holster 4		6	2437	17.70	18.00	1.072	95.75	1.044	-0.03	0.195	0.218
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 2	Holster 5		6	2437	17.70	18.00	1.072	95.75	1.044	-0.12	0.118	0.132
01	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1+2	Holster 1		1	2412	21.91	22.00	1.021	96.00	1.042	-0.15	1.270	1.351
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1+2	Holster 1	headset 2	1	2412	21.91	22.00	1.021	96.00	1.042	0.02	1.150	1.223
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1+2	Holster 1		6	2437	21.76	22.00	1.057	96.00	1.042	-0.1	1.180	1.299
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1+2	Holster 1		11	2462	21.81	22.00	1.045	96.00	1.042	-0.18	1.150	1.252
	WLAN2.4GHz	802.11g 6Mbps	Front	0.5mm	Ant 1+2	Holster 1		6	2437	21.86	22.00	1.033	95.74	1.044	0.01	1.010	1.089
	WLAN2.4GHz	802.11g 6Mbps	Front	0.5mm	Ant 1+2	Holster 1		1	2412	19.26	19.50	1.057	95.74	1.044	0.03	0.668	0.737
	WLAN2.4GHz	802.11g 6Mbps	Front	0.5mm	Ant 1+2	Holster 1		11	2462	18.79	19.00	1.050	95.74	1.044	-0.02	0.483	0.529
	WLAN2.4GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1		6	2437	21.81	22.00	1.045	91.18	1.097	-0.06	1.130	1.295
	WLAN2.4GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1		3	2422	17.36	17.50	1.033	91.18	1.097	0.04	0.411	0.466
	WLAN2.4GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1		9	2452	17.71	18.00	1.069	91.18	1.097	0.17	0.396	0.464
	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1+2	Holster 2		1	2412	21.91	22.00	1.021	96.00	1.042	-0.1	1.230	1.308
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1+2	Holster 3		1	2412	21.91	22.00	1.021	96.00	1.042	-0.02	0.177	0.188
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 1+2	Holster 4		1	2412	21.91	22.00	1.021	96.00	1.042	0.04	0.164	0.174
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	Ant 1+2	Holster 5		1	2412	21.91	22.00	1.021	96.00	1.042	-0.02	0.180	0.191





# FCC SAR TEST REPORT

Report No. : FA930401

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Holster	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
02	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1		46	5230	20.86	21.00	1.033	91.18	1.097	-0.13	1.020	1.156
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1		38	5190	18.86	19.00	1.033	91.18	1.097	0.03	0.649	0.735
	WLAN5GHz	802.11a 6Mbps	Front	0.5mm	Ant 1+2	Holster 1		48	5240	20.86	21.00	1.033	95.51	1.047	0.04	1.010	1.092
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 2		46	5230	20.86	21.00	1.033	91.18	1.097	-0.06	0.946	1.072
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1+2	Holster 3		46	5230	20.86	21.00	1.033	91.18	1.097	-0.18	0.238	0.270
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 1+2	Holster 4		46	5230	20.86	21.00	1.033	91.18	1.097	0.12	0.391	0.443
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1+2	Holster 5		46	5230	20.86	21.00	1.033	91.18	1.097	-0.18	0.314	0.356
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1	Holster 1		54	5270	17.60	18.00	1.096	91.18	1.097	-0.12	0.789	0.949
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1	Holster 1		62	5310	15.00	15.00	1.000	91.18	1.097	-0.13	0.231	0.253
	WLAN5GHz	802.11a 6Mbps	Front	0.5mm	Ant 1	Holster 1		64	5320	17.70	18.00	1.072	94.84	1.054	0.05	0.772	0.872
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1	Holster 2		54	5270	17.60	18.00	1.096	91.18	1.097	0.16	0.711	0.855
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1	Holster 3		54	5270	17.60	18.00	1.096	91.18	1.097	-0.1	0.118	0.142
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 1	Holster 4		54	5270	17.60	18.00	1.096	91.18	1.097	-0.15	0.308	0.370
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1	Holster 5		54	5270	17.60	18.00	1.096	91.18	1.097	-0.1	0.172	0.207
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 2	Holster 1		54	5270	17.60	18.00	1.096	91.18	1.097	0.15	0.927	1.115
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 2	Holster 1		62	5310	14.90	15.00	1.023	91.18	1.097	0.08	0.354	0.397
	WLAN5GHz	802.11a 6Mbps	Front	0.5mm	Ant 2	Holster 1		60	5300	17.70	18.00	1.072	95.51	1.047	0.05	0.912	1.023
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 2	Holster 2		54	5270	17.60	18.00	1.096	91.18	1.097	0.06	0.851	1.024
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 2	Holster 3		54	5270	17.60	18.00	1.096	91.18	1.097	-0.05	0.202	0.243
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 2	Holster 4		54	5270	17.60	18.00	1.096	91.18	1.097	0.02	0.382	0.459
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 2	Holster 5		54	5270	17.60	18.00	1.096	91.18	1.097	-0.05	0.219	0.263
03	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1		54	5270	20.66	21.00	1.081	91.18	1.097	-0.18	1.130	1.341
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1	headset 2	54	5270	20.66	21.00	1.081	91.18	1.097	-0.11	1.070	1.269
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1		62	5310	16.21	16.50	1.069	91.18	1.097	-0.02	0.396	0.464
	WLAN5GHz	802.11a 6Mbps	Front	0.5mm	Ant 1+2	Holster 1		64	5320	20.71	21.00	1.069	95.51	1.047	0.06	1.060	1.186
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 2		54	5270	20.66	21.00	1.081	91.18	1.097	0.02	1.050	1.246
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1+2	Holster 3		54	5270	20.66	21.00	1.081	91.18	1.097	-0.06	0.305	0.362
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 1+2	Holster 4		54	5270	20.66	21.00	1.081	91.18	1.097	-0.07	0.477	0.566
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 1+2	Holster 5		54	5270	20.66	21.00	1.081	91.18	1.097	-0.06	0.301	0.357
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1	Holster 1		138	5690	17.40	17.50	1.023	89.33	1.119	-0.15	0.739	0.846
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1	Holster 1		106	5530	17.10	17.50	1.096	89.33	1.119	-0.18	0.565	0.693
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1	Holster 1		122	5610	17.40	17.50	1.023	89.33	1.119	-0.17	0.654	0.748
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1	Holster 2		138	5690	17.40	17.50	1.023	89.33	1.119	0.09	0.726	0.831
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Holster 3		138	5690	17.40	17.50	1.023	89.33	1.119	0.03	0.089	0.101
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Holster 4		138	5690	17.40	17.50	1.023	89.33	1.119	0.14	0.229	0.262
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Holster 5		138	5690	17.40	17.50	1.023	89.33	1.119	0.03	0.212	0.243
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 1		138	5690	17.40	17.50	1.023	89.05	1.123	0.05	0.896	1.030
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 1		106	5530	17.40	17.50	1.023	89.05	1.123	-0.14	0.808	0.929
04	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 1		122	5610	17.40	17.50	1.023	89.05	1.123	-0.14	1.050	1.207
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 1	headset 2	122	5610	17.40	17.50	1.023	89.05	1.123	0.08	0.979	1.125
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 2		122	5610	17.40	17.50	1.023	89.05	1.123	0.01	0.974	1.119
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Holster 3		122	5610	17.40	17.50	1.023	89.05	1.123	-0.15	0.224	0.257
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Holster 4		122	5610	17.40	17.50	1.023	89.05	1.123	-0.09	0.404	0.464
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Holster 5		122	5610	17.40	17.50	1.023	89.05	1.123	-0.15	0.246	0.283
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 1		106	5530	19.46	19.50	1.009	89.71	1.115	-0.14	0.912	1.026
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 1		122	5610	19.26	19.50	1.057	89.71	1.115	-0.13	0.933	1.099
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 1		138	5690	19.31	19.50	1.045	89.71	1.115	-0.17	0.968	1.128
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 2		138	5690	19.31	19.50	1.045	89.71	1.115	-0.12	0.952	1.109
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1+2	Holster 3		138	5690	19.31	19.50	1.045	89.71	1.115	0.11	0.167	0.195
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1+2	Holster 4		138	5690	19.31	19.50	1.045	89.71	1.115	0.08	0.397	0.463
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1+2	Holster 5		138	5690	19.31	19.50	1.045	89.71	1.115	0.11	0.250	0.291

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Holster	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1	Holster 1		155	5775	17.30	17.50	1.047	89.33	1.119	-0.15	0.654	0.766
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1	Holster 2		155	5775	17.30	17.50	1.047	89.33	1.119	-0.15	0.628	0.736
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Holster 3		155	5775	17.30	17.50	1.047	89.33	1.119	0.12	0.056	0.065
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1	Holster 4		155	5775	17.30	17.50	1.047	89.33	1.119	0.11	0.181	0.212
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1	Holster 5		155	5775	17.30	17.50	1.047	89.33	1.119	0.12	0.167	0.196
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 1		155	5775	17.10	17.50	1.096	89.05	1.123	0.16	0.873	1.075
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 2	Holster 1		151	5755	17.10	17.50	1.096	91.18	1.097	-0.09	0.835	1.004
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 2		155	5775	17.10	17.50	1.096	89.05	1.123	-0.13	0.817	1.005
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Holster 3		155	5775	17.10	17.50	1.096	89.05	1.123	0.14	0.131	0.161
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 2	Holster 4		155	5775	17.10	17.50	1.096	89.05	1.123	0.12	0.443	0.545
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 2	Holster 5		155	5775	17.10	17.50	1.096	89.05	1.123	0.14	0.232	0.286
05	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 1		155	5775	19.31	19.50	1.045	89.71	1.115	-0.15	1.140	1.328
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 1	headset 2	155	5775	19.31	19.50	1.045	89.71	1.115	-0.04	0.984	1.146
	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1		151	5755	19.11	19.50	1.094	91.18	1.097	0.03	0.872	1.047
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 2		155	5775	19.31	19.50	1.045	89.71	1.115	0.13	0.845	0.985
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1+2	Holster 3		155	5775	19.31	19.50	1.045	89.71	1.115	0.05	0.228	0.266
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 1+2	Holster 4		155	5775	19.31	19.50	1.045	89.71	1.115	0.07	0.354	0.413
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 1+2	Holster 5		155	5775	19.31	19.50	1.045	89.71	1.115	0.05	0.286	0.333

### 13.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Holster	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1+2	Holster 1	1	2412	21.91	22.00	1.021	96.00	1.042	-0.15	1.270	-	1.351
2nd	WLAN2.4GHz	802.11b 1Mbps	Front	0.5mm	Ant 1+2	Holster 1	1	2412	21.91	22.00	1.021	96.00	1.042	-0.13	1.220	1.04	1.298
1st	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1	46	5230	20.86	21.00	1.033	91.18	1.097	-0.13	1.020	-	1.156
2nd	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1	46	5230	20.86	21.00	1.033	91.18	1.097	0.07	0.986	1.03	1.117
1st	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1	54	5270	20.66	21.00	1.081	91.18	1.097	-0.18	1.130	-	1.341
2nd	WLAN5GHz	802.11n-HT40 MCS0	Front	0.5mm	Ant 1+2	Holster 1	54	5270	20.66	21.00	1.081	91.18	1.097	-0.09	1.060	1.07	1.258
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 1	122	5610	17.40	17.50	1.023	89.05	1.123	-0.14	1.050	-	1.207
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 2	Holster 1	122	5610	17.40	17.50	1.023	89.05	1.123	-0.18	1.030	1.02	1.184
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 1	155	5775	19.31	19.50	1.045	89.71	1.115	-0.15	1.140	-	1.328
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0.5mm	Ant 1+2	Holster 1	155	5775	19.31	19.50	1.045	89.71	1.115	-0.04	1.090	1.05	1.270

#### General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

## 14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	Bluetooth ANT 1 + WLAN ANT 2	Yes

**General Note:**

- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - Scalar SAR summation < 1.6W/kg.
  - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	All Positions
4dBm	Estimated SAR (W/kg)	0.105 W/kg

### 14.1 Body-worn Exposure Conditions

Exposure Position	2	4	7	2+7 Summed 1g SAR (W/kg)	4+7 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 2 1g SAR (W/kg)	5GHz WLAN Ant 2 1g SAR (W/kg)	Bluetooth Ant 1 Estimated 1g SAR (W/kg)		
Front at 0.5mm	1.041	1.207	0.105	<b>1.146</b>	<b>1.312</b>
Back at 0mm	0.218	0.545	0.105	<b>0.323</b>	<b>0.650</b>
Front at 0mm	0.204	0.286	0.105	<b>0.309</b>	<b>0.391</b>

**Test Engineer :** Randy Lin and Willy Yu

## **15. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

## **16. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.