



# **EMI TEST REPORT**

**Test Report No. : 12541477H-B-R1**

**Applicant** : Panasonic Corporation of North America  
**Type of Equipment** : WAM MID  
**Model No.** : IM2035BB  
**FCC ID** : ACJ932IM2035BB  
**Test regulation** : FCC Part 15 Subpart B: 2018  
**Test Result** : Complied (Refer to SECTION 3.2)


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report covers EMC technical requirements. It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
8. The information provided from the customer for this report is identified in SECTION 1.
9. This report is a revised version of 12541477H-B. 12541477H-B is replaced with this report.


**Date of test:** January 24, 2019

**Representative test engineer:**

  
Toshifumi Yoneshige  
Engineer  
Consumer Technology Division

**Approved by:**

  
Shinichi Miyazono  
Engineer  
Consumer Technology Division

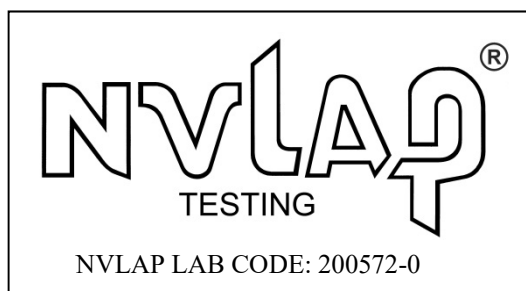

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
[http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
☒ There is no testing item of "Non-accreditation".

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

## REVISION HISTORY

**Original Test Report No.: 12541477H-B**

[illegible]

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information .....</b>	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.).....</b>	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results .....</b>	<b>5</b>
<b>SECTION 4: Operation of E.U.T. during testing.....</b>	<b>7</b>
<b>SECTION 5: Radiated Emission.....</b>	<b>8</b>
<b>APPENDIX 1: Test data .....</b>	<b>9</b>
Radiated emission .....	9
<b>APPENDIX 2: Test instruments .....</b>	<b>11</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>12</b>
Radiated Emission .....	12
Worst Case Position (Horizontal: X-axis / Vertical: X-axis).....	14

## **SECTION 1: Customer information**

Company Name	:	Panasonic Corporation of North America <sup>*1)</sup>
Address	:	Two Riverfront Plaza, 9th Floor Newark, NJ 07102-5490
Telephone Number	:	+1-201-348-7760
Facsimile Number	:	+1-201-348-7760
Contact Person	:	Ben Botros

\*1) Panasonic Corporation of North America designates Panasonic Automotive Systems Asia Pacific Co.,Ltd as manufacturer of the product (WAM MID).

The information provided from the customer is as follows;

- Applicant, Type of Equipment, Model No. on the cover and other relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (E.U.T.)
- SECTION 4: Operation of E.U.T. during testing

\* The laboratory is exempted from liability of any test results affected from the information in SECTION 2 and 4.

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment	:	WAM MID
Model No.	:	IM2035BB
Serial No.	:	Refer to Section 4, Clause 4.2
Rating	:	DC 12.0 V
Receipt Date of Sample (Information from test lab.)	:	December 27, 2018
Country of Mass-production	:	Thailand
Condition of EUT	:	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

### **2.2 Product Description**

Model: IM2035BB (referred to as the EUT in this report) is a WAM MID.

### **Radio Specification**

#### **[Transmitter]**

Radio Type	:	Transmitter
Frequency of Operation	:	125 kHz
Modulation	:	ASK
Antenna type	:	Air core coil inductive antenna
Clock frequency (Maximum)	:	4 MHz

#### **[Receiver]**

Radio Type	:	Receiver
Frequency of Operation	:	433.92 MHz

### **FCC15.111(b)**

The receiving antenna (of this EUT) is installed inside the EUT and cannot be removed (permanently attached). Therefore, Radiated emission test was performed.

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## SECTION 3: Test specification, procedures & results

### 3.1 Test Specification

Test Specification : FCC Part 15 Subpart B  
FCC Part 15 final revised on March 12, 2018 and effective April 11, 2018

Title : FCC 47CFR Part15 Radio Frequency Device  
Subpart B Unintentional Radiators

### 3.2 Procedures and results

Item	Test Procedure	Limits	Deviation	Worst margin	Result	Remarks
Conducted emission	FCC: ANSI C63.4: 2014 7. AC power - line conducted emission measurements	FCC:Part 15 Subpart B 15.107(a)	N/A	N/A	N/A	*1)
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8				
Radiated emission	FCC: ANSI C63.4: 2014 8. Radiated emission measurements	FCC: Part 15 Subpart B 15.109(a)	N/A	23.1 dB 49.146 MHz Vertical, QP	Complied a)	-
	IC: RSS-Gen 7	IC: RSS-Gen 7.1.2				
*Note: UL Japan, Inc’s EMI Work Procedure 13-EM-W0420.						
*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.						
a) Refer to APPENDIX 1 (data of Radiated emission)						
Symbols:						
Complied		The data of this test item has enough margin, more than the measurement uncertainty.				
Complied#		The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.				

### 3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the following results are derived depending on whether or not laboratory uncertainty is applied.

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .

Polarity	Radiated emission (Below 1 GHz)			
	(3 m*)(+/-)		(10 m*)(+/-)	
	30 MHz to 200 MHz	200 MHz to 1000 MHz	30 MHz to 200 MHz	200 MHz to 1000 MHz
Horizontal	4.8 dB	5.2 dB	4.8 dB	5.0 dB
Vertical	5.0 dB	6.3 dB	4.9 dB	5.0 dB

Radiated emission (Above 1 GHz)				
(3 m*)(+/-)		(1 m*)(+/-)		(10 m*)(+/-)
1 GHz to 6 GHz	6 GHz to 18 GHz	10 GHz to 26.5 GHz	26.5 GHz to 40 GHz	1 GHz to 18 GHz
5.0 dB	5.3 dB	5.8 dB	5.8 dB	5.2 dB

\* Measurement distance

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124  
NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## SECTION 4: Operation of E.U.T. during testing


### 4.1 Operating Mode(s)

Mode	Remarks
1) Normal Keyless Operation Mode	-

\*The test signal level was confirmed to be sufficient to stabilize the local oscillator of the EUT.

\* It was confirmed by using checker that the EUT receives the signal from the transmitter (pair of EUT).

### 4.2 Configuration and peripherals

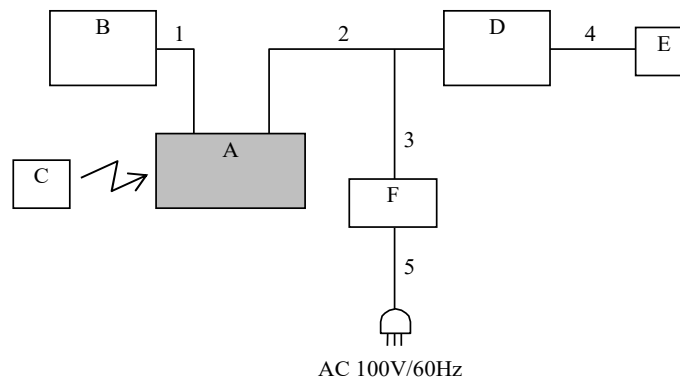

\* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

\*Item No. A includes Receiver Antenna.

#### Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	WAM MID	IM2035BB	500017-0 180918	Panasonic Automotive Systems Asia Pacific Co.,Ltd	EUT
B	Immobilizer	898394787Y	002	TOKAI RIKI CO., LTD	-
C	RKE TXE	IK3600F	37	Panasonic Automotive Systems Asia Pacific Co.,Ltd	-
D	Jig	-	-	-	-
E	SW/LED Box	-	-	-	-
F	DC Power Supply	PAK35-10A	LF002313	KIKUSUI	-

#### List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Signal Cable1	2.0	Unshielded	Unshielded	-
2	Signal Cable2	1.0	Unshielded	Unshielded	-
3	DC power Cable	1.0	Unshielded	Unshielded	-
4	Signal Cable	0.8	Unshielded	Unshielded	-
5	AC power Cable	1.8	Unshielded	Unshielded	-

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated Emission**

### **5.1 Operating environment**

Test place : No.4 semi anechoic chamber  
Temperature : See data  
Humidity : See data

### **5.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The EUT was set on the edge of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in Appendix 3.

### **5.3 Test conditions**

Frequency range : 30 MHz - 200 MHz (Biconical antenna) / 200 MHz - 1000 MHz (Logperiodic antenna)  
1000 MHz - 2000 MHz (Horn antenna)  
Test distance : 3 m  
EUT position : Table top  
EUT operation mode : See Clause 4.1

### **5.4 Test procedure**

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The radiated emission measurements were made with the following detector function of the Test Receiver and the Spectrum Analyzer.

Frequency	Below 1GHz	Above 1GHz *1)
Instrument used	Test Receiver	Test Receiver
IF Bandwidth	QP: BW 120 kHz	PK: BW 1 MHz, CISPR AV: BW 1 MHz

\*1) The measurement data was adjusted to a 3 m distance using the following Distance Factor.

Distance Factor:  $20 \times \log(3.6 \text{ m} / 3 \text{ m}) = 1.59 \text{ dB}$

- The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

### **5.5 Test result**

Summary of the test results: Pass

The limit is rounded down to one decimal place.

The test result is rounded off to one or two decimal places, so some differences might be observed.

Date: January 24, 2019

Test engineer: Toshifumi Yoneshige

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

## APPENDIX 1: Test data

### Radiated emission

Report No. 12541477H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.4  
Date January 24, 2019  
Temperature / Humidity 24 deg. C / 41 % RH  
Engineer Toshifumi Yoneshige  
(Below 1 GHz)  
Mode Mode 1

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
All other spurious emissions were less than 20dB for the limit.

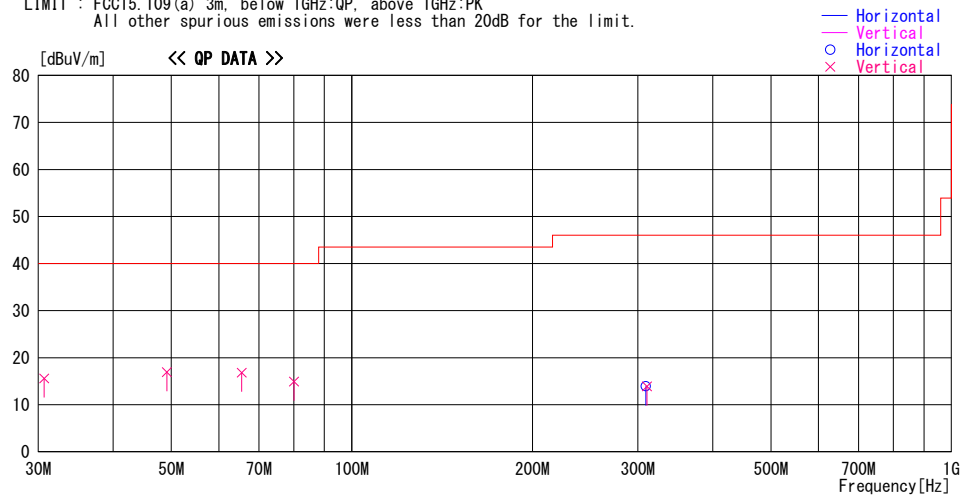

Frequency	Reading	DET	Antenna Factor	Loss & Gain	Level	Angle	Height	Polar.	Limit	Margin	Comment
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
30.681	22.4	QP	18.1	-24.9	15.6	359	100	Vert.	40.0	24.4	
49.146	30.1	QP	11.4	-24.6	16.9	35	100	Vert.	40.0	23.1	
65.520	34.1	QP	7.0	-24.3	16.8	41	100	Vert.	40.0	23.2	
80.080	32.6	QP	6.4	-24.1	14.9	271	100	Vert.	40.0	25.1	
310.624	21.9	QP	14.0	-22.0	13.9	359	100	Vert.	46.0	32.1	
309.273	22.0	QP	13.9	-22.0	13.9	359	150	Hori.	46.0	32.1	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATT - GAIN(AMP))

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated emission

Report No. 12541477H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.4  
Date January 24, 2019  
Temperature / Humidity 24 deg. C / 41 % RH  
Engineer Toshifumi Yoneshige  
(Above 1 GHz)  
Mode Mode 1

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

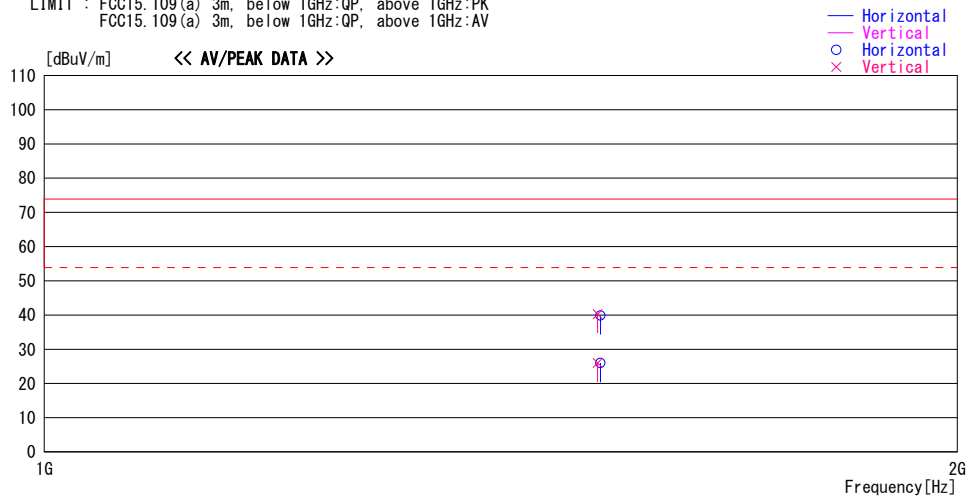

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]					[dBuV/m]	[dB]	
1522.041	43.8	PK	25.3	-28.8	40.3	359	100	Vert.	73.9	33.6	
1522.041	29.5	AV	25.3	-28.8	26.0	359	100	Vert.	53.9	27.9	
1525.154	29.5	AV	25.3	-28.8	26.0	0	100	Hori.	53.9	27.9	
1525.154	43.4	PK	25.3	-28.8	39.9	0	100	Hori.	73.9	34.1	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN(AMP) + D-factor)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## APPENDIX 2: Test instruments

### Test Instruments

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Due Date	Cal Int
RE	148898	Attenuator	KEYSIGHT	8491A	MY52462282	10/03/2018	10/31/2019	12
RE	142227	Measure	KOMELON	KMC-36	-	-	-	-
RE	141152	EMI measurement program	TSJ	TEPTO-DV	-	-	-	-
RE	141899	Spectrum Analyzer	AGILENT	E4448A	MY46180655	08/10/2018	08/31/2019	12
RE	141562	Thermo-Hygrometer	CUSTOM	CTH-201	0010	01/11/2019	01/31/2020	12
RE	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	06/28/2018	06/30/2020	24
RE	141412	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1405S146(5m)	06/14/2018	06/30/2019	12
RE	141581	MicroWave System Amplifier	AGILENT	83017A	650	10/04/2018	10/31/2019	12
RE	141506	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	06/08/2018	06/30/2019	12
RE	141508	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	06/08/2018	06/30/2019	12
RE	142017	AC4 Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/07/2018	04/30/2019	12
RE	141425	Biconical Antenna	Schwarzbeck	BBA9106	1302	06/01/2018	06/30/2019	12
RE	141397	Coaxial Cable	UL Japan	-	-	06/13/2018	06/30/2019	12
RE	141267	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-192	06/01/2018	06/30/2019	12
RE	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	01/30/2018	01/31/2019	12
RE	141583	Pre Amplifier	SONOMA INSTRUMENT	310	260833	02/27/2018	02/28/2019	12

\*Hyphens for Last Calibration Date, Calibration Due Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item:

RE: Radiated emission

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124