

品名：RFPCA430745IMAB901

History List

[illegible]

品名：RFPCA430745IMAB901

1. Explanation of part number：

RF	PCA	4307	45	I	M	A	B	9	01
Type Code	Product Code	PCB Dimension (Unit: mm)	Cable Length (unit: cm)	Connector Brand	Type of Connector	Application	Project status	Wire Diameter	Project
RF Device	PCB Antenna	Per 2 digits of length, width e.g.: 3205 Length 32mm, Width 5mm	2 digits for cable length e.g.: 08 Length 8cm	A: N C:MCX D:IPEX III E: IPEX IV F: IPEX A13 H: Hirose I: IPEX M: MMCX S: SMA T: TNC U:MURATA N: None	A: Reverse Female B: Reverse Male F: Female M: Male N: None	0: 0GHz 3: 3GHz 5: 5GHz 6: 6GHz A: 2.4GHz ISM band B: GSM 900/1800 dual band G: GPS band L: 2.4/5.2/5.8 GHz tri-band R:902~928 MHz N: NFC T: LTE band W: WCDMA band	B: MP T:During Test X: Pile Run	0:None 1:∅ 0.81 2:∅ 1.32 3:∅ 1.13 4:Low Loss ∅ 1.13 5:∅ 0.5 6:RG316 7: ∅ 1.37 8:RG178 9:Low Loss ∅ 1.37	01~99 series number

2. Electrical Specification：

Item	Specification
Working Frequency Range	2.4~2.5 GHz
Return Loss	-10 dB(Max)
VSWR	2 max.
Gain	2.71 dBi
Impedance	50 Ohm Nominal
Radiation	Omni-directional
Polarization	Linear Vertical
Operation Temperature	-20° C~+65° C

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE：N/A

UNIT：mm

DRAWN BY：李欣樺

CHECKED BY：詹惠雯

DESIGNED BY：黃瑞郎


APPROVED BY：陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE：RFPCA430745IMAB901

DOCUMENT
NO.SPEC REV.
P0


3. Antenna Drawing :

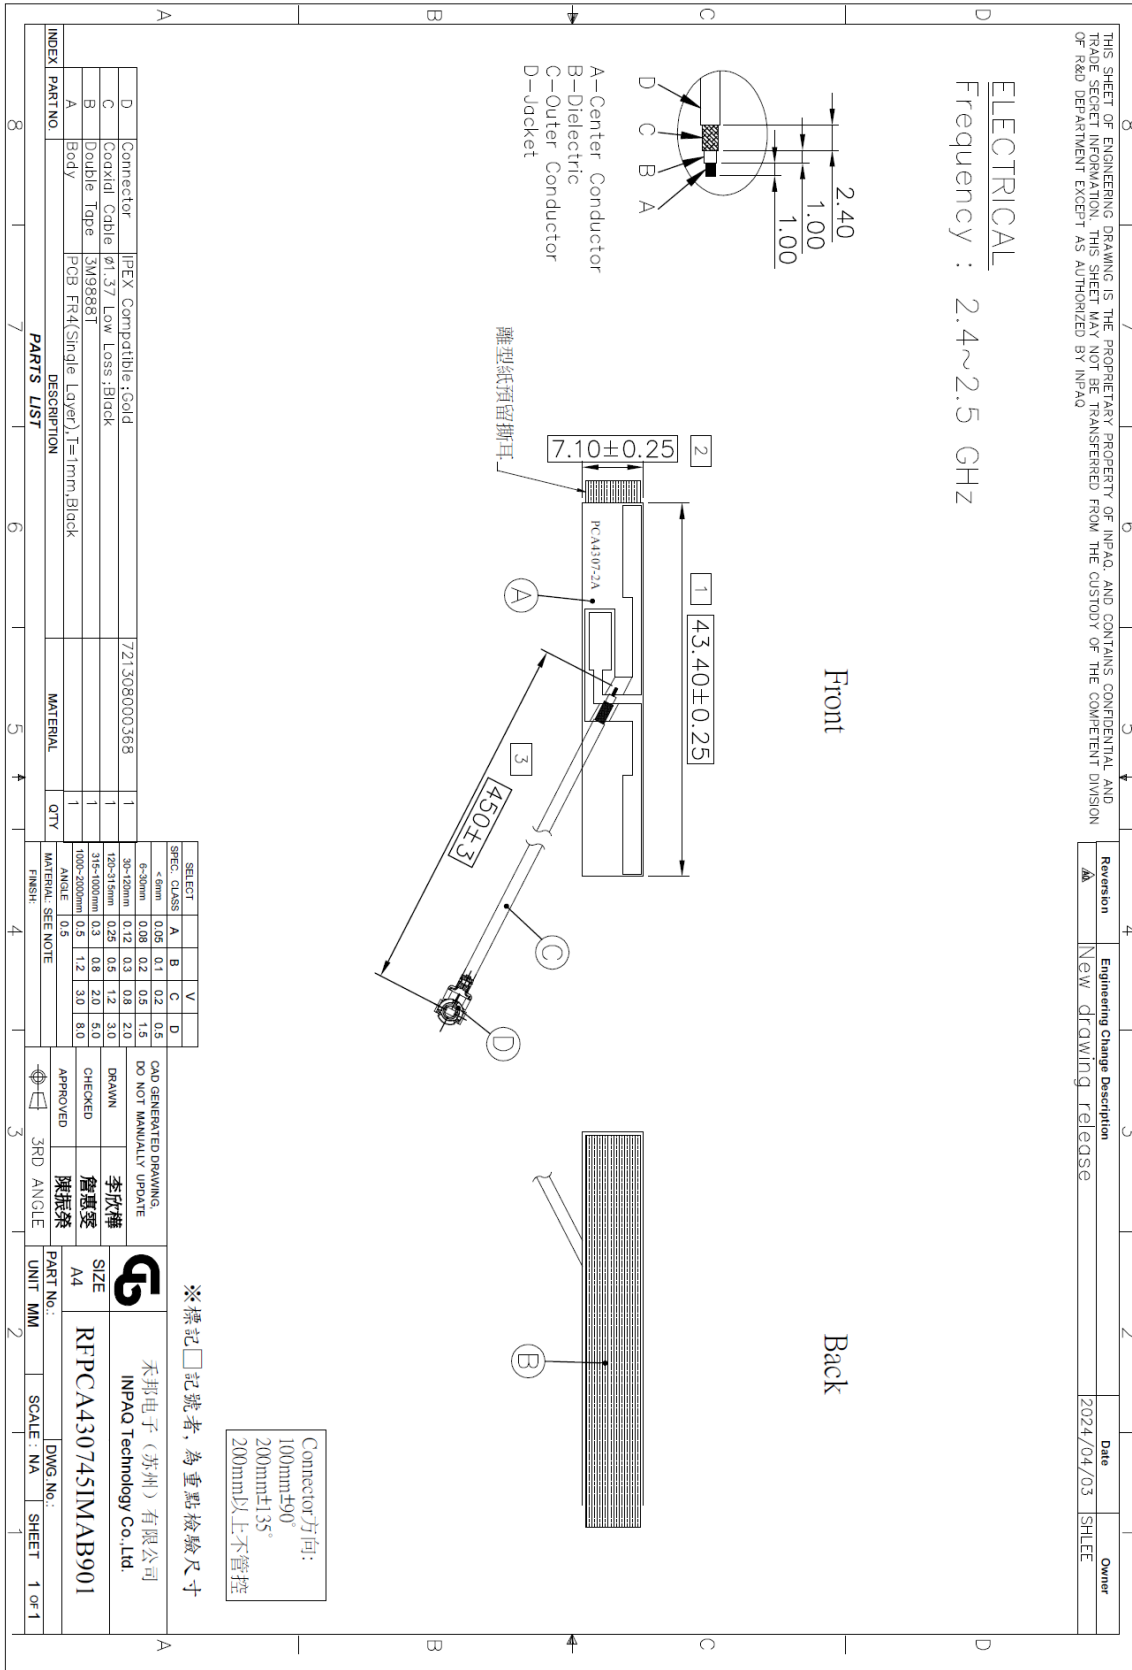

4. Performance Report :

Test Report

■ ELECTRICAL CHARACTERISTICS

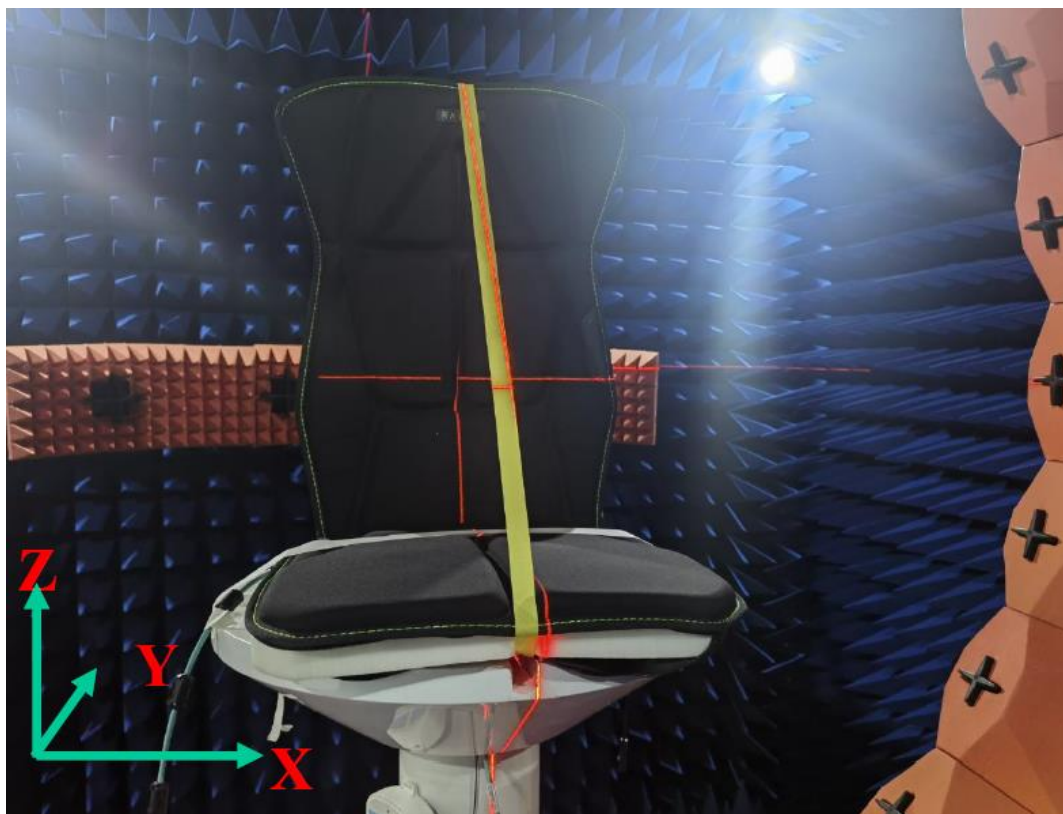

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 李欣樺

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : RFPCA430745IMAB901

DOCUMENT
NO.

SPEC REV.
P0

■ Antenna Solution Detail

放颈部附近

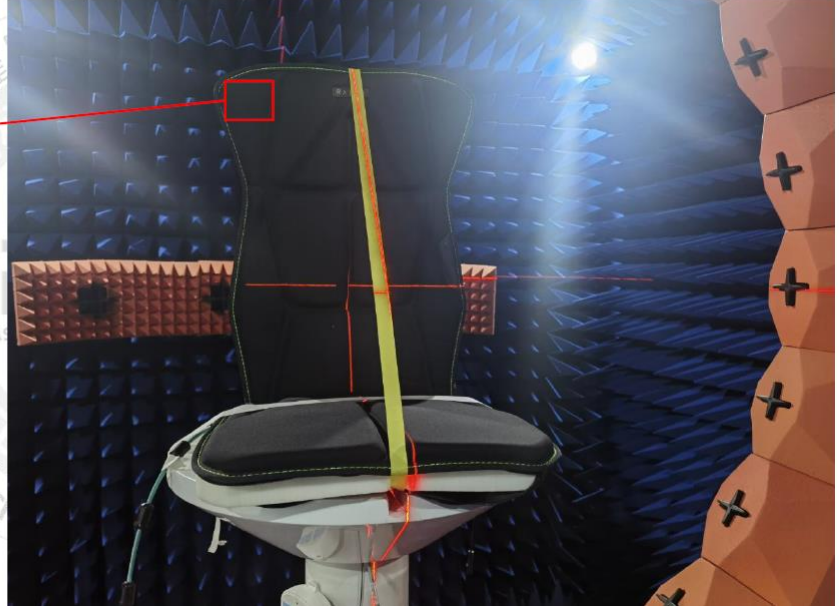

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 李欣樺

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎


APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFPCA430745IMAB901

DOCUMENT
NO.

SPEC REV.
P0

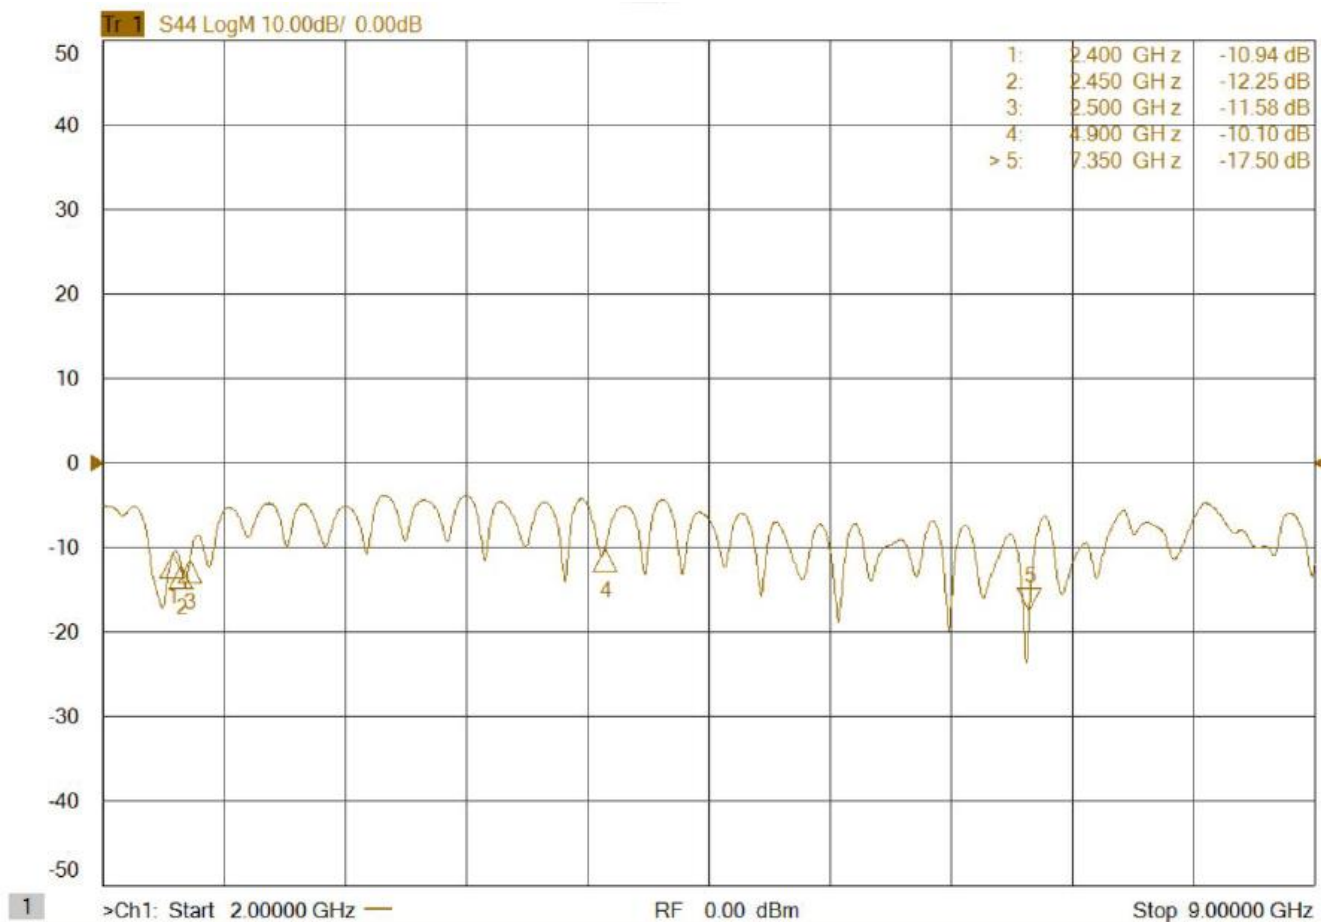ELECTRICAL CHARACTERISTICS**S-Parameter****放颈部附近**

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A

**INPAQ TECHNOLOGY CO., LTD.**

SCALE : N/A

UNIT : mm

DRAWN BY : 李欣樺

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : RFPCA430745IMAB901

DOCUMENT
NO.

SPEC REV.
P0

Efficiency & Peak Gain

放颈部附近

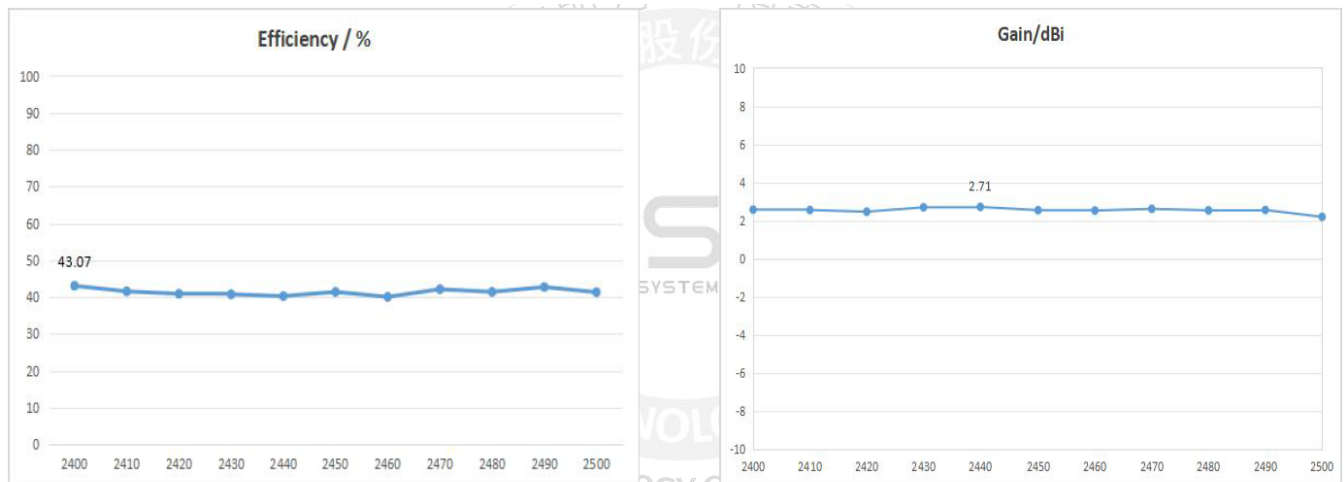

Maximum Efficiency at 2400 MHz : 43.07 %

Maximum Peak Gain at 2440MHz : 2.71dBi

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 李欣樺

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFPCA430745IMAB901

DOCUMENT
NO.

SPEC REV.
P0


Radiation Patterns

放颈部附近

X-Z Plane

Phi=0.00deg

Gain . dB

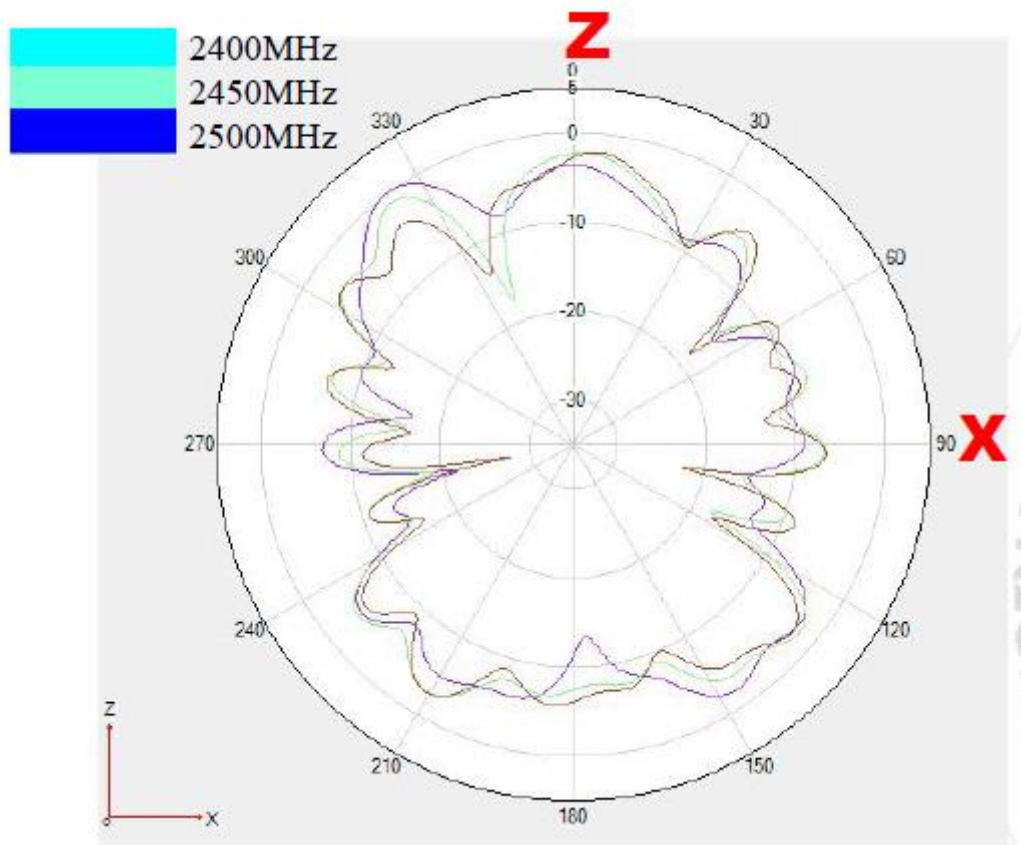

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 李欣樺

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFPCA430745IMAB901


DOCUMENT
NO.

SPEC REV.
P0

Y-Z Plane

Phi=90.00deg

Gain . dB

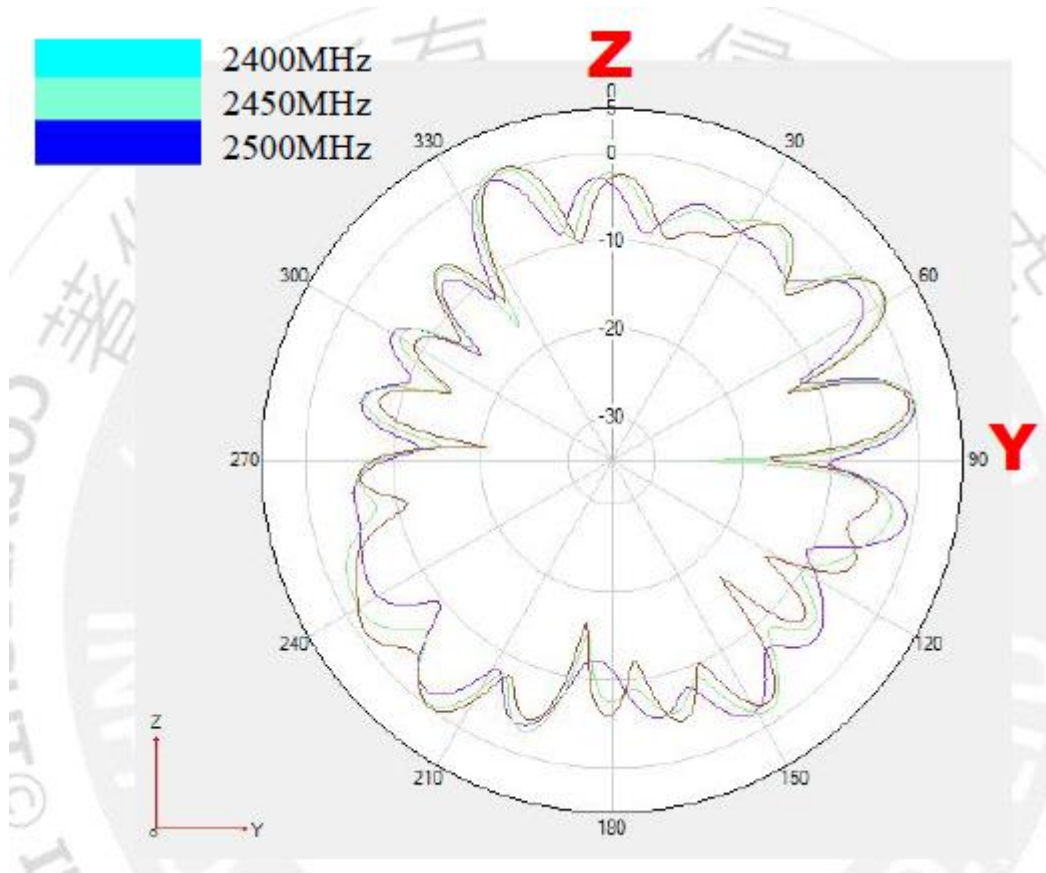

UNLESS OTHER SPECIFIED TOLERANCES ON :
X = N/A X.X = N/A X.XX = N/A
ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 李欣樺

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFPCA430745IMAB901


DOCUMENT
NO.

SPEC REV.
P0

X-Y Plane

Theta=90.00deg

Gain . dB

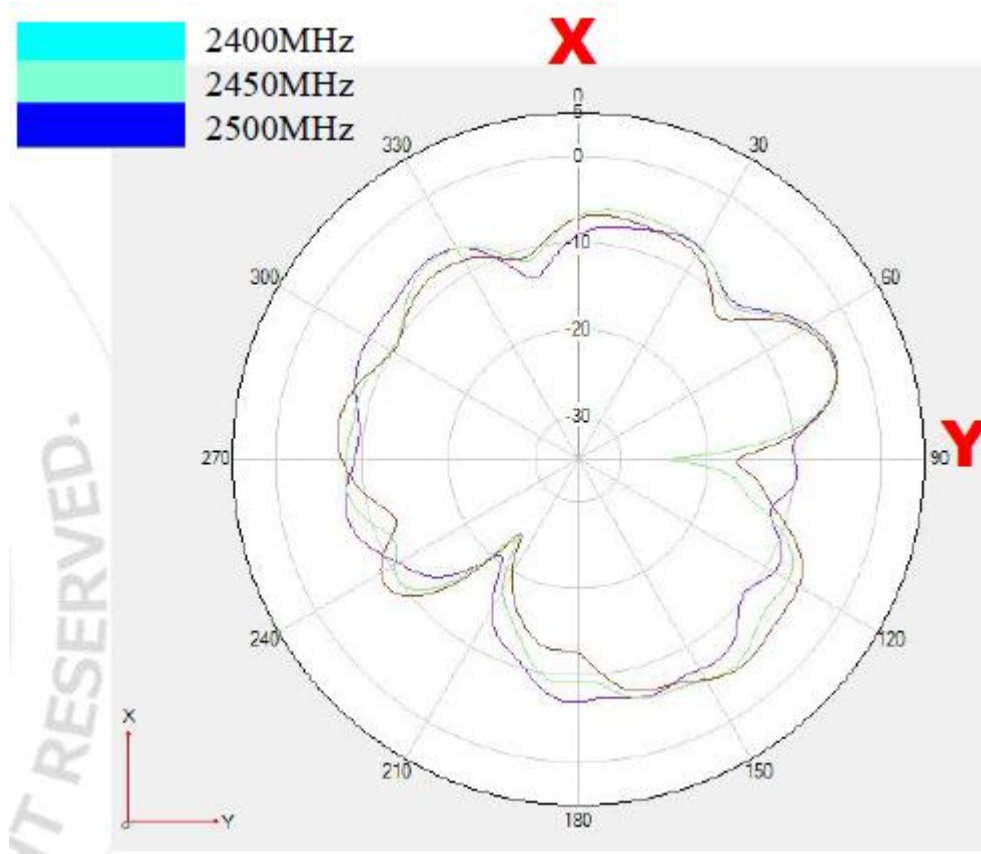

Frequency [MHz]	ZX plane		ZY plane		XY plane	
	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]	Max Value [dBi]	Average [dBi]
2400	0.16	-7.02	0.07	-5.33	-3.08	-8.46
2450	-1.04	-6.81	1.23	-5	-3.26	-8.59
2500	-2.08	-7.31	1.35	-5.46	-3.4	-8.76

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X = N/A X.X = N/A X.XX = N/A
 ANGLES = N/A HOLEDIA = N/A



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY : 李欣樺

CHECKED BY : 詹惠雯

DESIGNED BY : 黃瑞郎

APPROVED BY : 陳振榮

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : RFPCA430745IMAB901

DOCUMENT NO.

SPEC REV.
P0