



TESTREPORT

Applicant Name : Grandstream Networks, Inc.
Address : 126 Brookline Ave, 3rd Floor Boston, MA 02215, USA
Manufacturer Name : Grandstream Networks, Inc.
Address : 126 Brookline Ave, 3rd Floor Boston, MA 02215, USA
Report Number : SZNS220407-12824E-RF-00B
FCC ID: YZZGXV3480

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: High-End Smart Video Phone for Android™
Model No.: GXV3480
Trade Mark: GRANDSTREAM
Date Received: 2022/04/07
Report Date: 2022/07/31

Test Result:

Pass*

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:

Andy Yu
EMC Engineer

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	11
EQUIPMENT MODIFICATIONS	11
SUPPORT EQUIPMENT LIST AND DETAILS	12
EXTERNAL I/O CABLE.....	12
BLOCK DIAGRAM OF TEST SETUP	13
SUMMARY OF TEST RESULTS	16
TEST EQUIPMENT LIST	17
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	19
APPLICABLE STANDARD	19
RESULT	20
FCC §15.203 – ANTENNA REQUIREMENT	21
APPLICABLE STANDARD	21
ANTENNA CONNECTOR CONSTRUCTION	21
FCC §15.407 (B) (6) §15.207 (A) – CONDUCTED EMISSIONS	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER SETUP	22
TEST PROCEDURE	22
CORRECTED FACTOR & MARGIN CALCULATION	23
TEST DATA	23
§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION	32
APPLICABLE STANDARD	32
EUT SETUP	32
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	33
TEST PROCEDURE	33
CORRECTED FACTOR & MARGIN CALCULATION	34
TEST DATA	34
FCC §15.407(A),(E) – 26 DB & 6DB EMISSION BANDWIDTH.....	101
APPLICABLE STANDARD	101
TEST PROCEDURE	101
TEST DATA	102
FCC §15.407(A) – CONDUCTED TRANSMITTER OUTPUT POWER.....	103
APPLICABLE STANDARD	103

TEST PROCEDURE	103
TEST DATA	104
FCC §15.407(A) - POWER SPECTRAL DENSITY	105
TEST PROCEDURE	105
TEST DATA	106
APPENDIX	107
APPENDIX A1: EMISSION BANDWIDTH	107
APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH	131
APPENDIX A3: MIN EMISSION BANDWIDTH.....	162
APPENDIX B1: MAXIMUM CONDUCTED OUTPUT POWER	170
APPENDIX C1: MAXIMUM POWER SPECTRAL DENSITY	185
APPENDIX D1: DUTY CYCLE1	364

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	5G Wi-Fi: 5150-5250MHz; 5250-5350MHz; 5470-5725MHz; 5725-5850MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80/ ax20/ax40/ax80
Maximum Conducted Average Output Power	5150-5250 MHz: 17.56dBm 5250-5350MHz: 16.75dBm 5470-5725MHz: 17.82dBm 5725-5850 MHz: 17.68dBm
Modulation Technique	OFDM,OFDMA
Antenna Specification*	Antenna 0 : 5dBi Antenna 1: 3.0dBi
Voltage Range	DC 12V from adapter or DC 44-57V from POE
Sample serial number	SZNS220407-12824E-RF-S1 for Conducted and Radiated Emissions SZNS220407-12824E-RF-S2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter 1 information	Model: F18W8-120150SPAUY Input: AC 100-240V, 50/60Hz, 0.6A Output: DC12.0V,1.5A
Adapter 2 information	Model: DSA-18PFR-09 FUS 120150 Input: AC 100-240V, 50/60Hz, 0.6A Output: DC12.V,1.5A,18.0W
Adapter 3 information	Model: H18US1200150A Input: AC 100-240V, 50/60Hz, 0.8A max L.P.S Output: DC12.V,1.5A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz- 18GHz	4.98dB
	18GHz- 26.5GHz	5.06dB
	26.5GHz- 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n20/ac20/ax20 mode: channel 36, 40, 48 were tested; For 802.11n40/ac40/ax40 mode: channel 38, 46 were tested. For 802.11ac80/ax80 mode, channel 42 was tested.

For 5250-5350MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For 802.11a, 802.11n20/ac20/ax20 mode: channel 52, 56, 64 were tested; For 802.11n40/ac40/ax40 mode: channel 54, 62 were tested. For 802.11ac80/ax80 mode, channel 58 was tested.

For 5470-5725MHz Band, 18 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	120	5600
102	5510	122	5610
104	5520	124	5620
106	5530	126	5630
108	5540	128	5640
110	5550	132	5660
112	5560	134	5670
116	5580	136	5680
118	5590	140	5700

For 802.11a, 802.11n20/ac20/ax20 mode: channel 100, 116, 140 were tested; For 802.11n40/ac40/ax40 mode: channel 102, 110, 134 were tested. For 802.11ac80/ax80 mode, channel 106, 122 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n20/ac20/ax20 mode: channel 149, 157, 165 were tested; For 802.11n40/ac40/ax40 mode: channel 151, 159 were tested. For 802.11ac80/ax80 mode, channel 155 was tested.

EUT Exercise Software

“SecureCRT”* exercise software was used. The software and power level was provided by the manufacturer.

The worst case was performed under:

U-NII	Mode	Frequency (MHz)	Data Rate	Power Level*
5150 – 5250MHz	802.11 a	5180	6Mbps	default
		5200	6Mbps	default
		5240	6Mbps	default
	802.11 n20	5180	MCS0	default
		5200	MCS0	default
		5240	MCS0	default
	802.11 n40	5190	MCS0	default
		5230	MCS0	default
	802.11 ac20	5180	MCS0	default
		5200	MCS0	default
		5240	MCS0	default
	802.11 ac40	5190	MCS0	default
		5230	MCS0	default
	802.11 ac80	5210	MCS0	12

U-NII	Mode	RU Size	RU Index*	Power Level*		
				Low channel	Middle channel	High channel
5150 – 5250MHz	802.11 ax20	26	0/8	10	10	10
		52	37/40	13	13	13
		106	53/54	default	default	default
		242	61	default	default	default
	802.11 ax40	26	0/17	10	/	10
		52	37/44	13	/	13
		106	53/60	default	/	default
		242	61/62	default	/	default
		484	65	default	/	default
	802.11 ax80	26	0/37	/	10	/
		52	37/52	/	10	/
		106	53/60	/	10	/
		242	61/64	/	10	/
		484	65/66	/	10	/
		996	67	/	10	/

Note*: for low and middle channel, the minimum RU index was tested, for maximum RU index was tested.

U-NII	Mode	Frequency (MHz)	Data Rate	Power Level*
5250 – 5350MHz	802.11 a	5260	6Mbps	default
		5280	6Mbps	default
		5320	6Mbps	default
	802.11 n20	5260	MCS0	default
		5280	MCS0	default
		5320	MCS0	default
	802.11 n40	5270	MCS0	default
		5310	MCS0	default
	802.11 ac20	5260	MCS0	default
		5280	MCS0	default
		5320	MCS0	default
	802.11 ac40	5270	MCS0	default
		5310	MCS0	default
	802.11 ac80	5290	MCS0	12

U-NII	Mode	RU Size	RU Index*	Power Level*		
				Low channel	Middle channel	High channel
5250 – 5350MHz	802.11 ax20	26	0/8	10	10	10
		52	37/40	13	13	13
		106	53/54	default	default	default
		242	61	default	default	default
	802.11 ax40	26	0/17	10	/	10
		52	37/44	13	/	13
		106	53/60	default	/	default
		242	61/62	default	/	default
		484	65	default	/	default
	802.11 ax80	26	0/37	/	10	/
		52	37/52	/	12	/
		106	53/60	/	12	/
		242	61/64	/	12	/
		484	65/66	/	12	/
		996	67	/	12	/

Note*: for low and middle channel, the minimum RU index was tested, for maximum RU index was tested.

U-NII	Mode	Frequency (MHz)	Data Rate set	Power Level*
5470 – 5725MHz	802.11 a	5500	6Mbps	default
		5580	6Mbps	default
		5700	6Mbps	default
	802.11 n20	5500	MCS0	default
		5580	MCS0	default
		5700	MCS0	default
	802.11 n40	5510	MCS0	9
		5550	MCS0	9
		5670	MCS0	9
	802.11 ac20	5500	MCS0	default
		5580	MCS0	default
		5700	MCS0	default
	802.11 ac40	5510	MCS0	9
		5550	MCS0	9
		5670	MCS0	9
	802.11 ac80	5530	MCS0	8
		5610	MCS0	8

U-NII	Mode	RU Size	RU Index*	Power Level*		
				Low channel	Middle channel	High channel
5470 – 5725MHz	802.11 ax20	26	0/8	8	8	8
		52	37/40	11	11	11
		106	53/54	default	default	default
		242	61	default	default	default
	802.11 ax40	26	0/17	8	8	8
		52	37/44	11	11	11
		106	53/60	default	default	default
		242	61/62	default	default	default
		484	65	default	default	default
	802.11 ax80	26	0/37	8	/	8
		52	37/52	8	/	8
		106	53/60	8	/	8
		242	61/64	8	/	8
		484	65/66	8	/	8
		996	67	8	/	8

Note*: for low and middle channel, the minimum RU index was tested, for maximum RU index was tested.

U-NII	Mode	Frequency (MHz)	Data Rate	Power Level*
5725 – 5850MHz	802.11 a	5745	6Mbps	default
		5785	6Mbps	default
		5825	6Mbps	default
	802.11 n20	5745	MCS0	default
		5785	MCS0	default
		5825	MCS0	default
	802.11 n40	5755	MCS0	default
		5795	MCS0	default
	802.11 ac20	5745	MCS0	default
		5785	MCS0	default
		5825	MCS0	default
	802.11 ac40	5755	MCS0	default
		5795	MCS0	default
	802.11 ac80	5775	MCS0	default

U-NII	Mode	RU Size	RU Index*	Power Level*		
				Low channel	Middle channel	High channel
5725 – 5850MHz	802.11 ax20	26	0/8	default	default	default
		52	37/40	default	default	default
		106	53/54	default	default	default
		242	61	default	default	default
	802.11 ax40	26	0/17	default	/	default
		52	37/44	default	/	default
		106	53/60	default	/	default
		242	61/62	default	/	default
		484	65	default	/	default
	802.11 ax80	26	0/37	/	default	/
		52	37/52	/	default	/
		106	53/60	/	default	/
		242	61/64	/	default	/
		484	65/66	/	default	/
		996	67	/	default	/

Note*: for low and middle channel, the minimum RU index was tested, for maximum RU index was tested.

The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

EUT have two antennas, the 802.11a mode only support SISO transmit, the 802.11n/ac/ax mode support SISO/MIMO transmit.

The two antennas has same power setting.

Duty cycle

Test Result: Pass. Please refer to the Appendix.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Note Book1	Latitude E4710	PC201911252059
DELL	Note Book	XXJL-2	XXJL-2
HUAWEI	Router	WS5100	A4933FEF1D01
Unknown	Earphone	Unknown	E1
YEALINK	Headphone	Unknown	H1
Unknown	U disk	Unknown	U1
DELL	Monitor	RVE A00	506250042400R
GOSPELL	POE	G0720-480	G0720-480
Huawei	Phone	Nova 7	Nova 7


External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded detachable AC cable	1.5	POE/Receptacle	LISN
Un-shielded detachable RJ45 cable	1.5	POE	EUT
Un-shielded detachable RJ45 cable	8.0	EUT	Router
Un-shielded detachable RJ45 cable	8.0	EUT	NoteBook1
Un-shielded detachable HDMI cable	1.5	EUT	NoteBook
Un-shielded detachable HDMI cable	1.5	EUT	Monitor
Unshielded detachable USB cable	1.0	Phone	EUT
Unshielded Un-detachable DC cable	2.5	Adapter	EUT


Block Diagram of Test Setup

For conducted emission

Powered by POE:

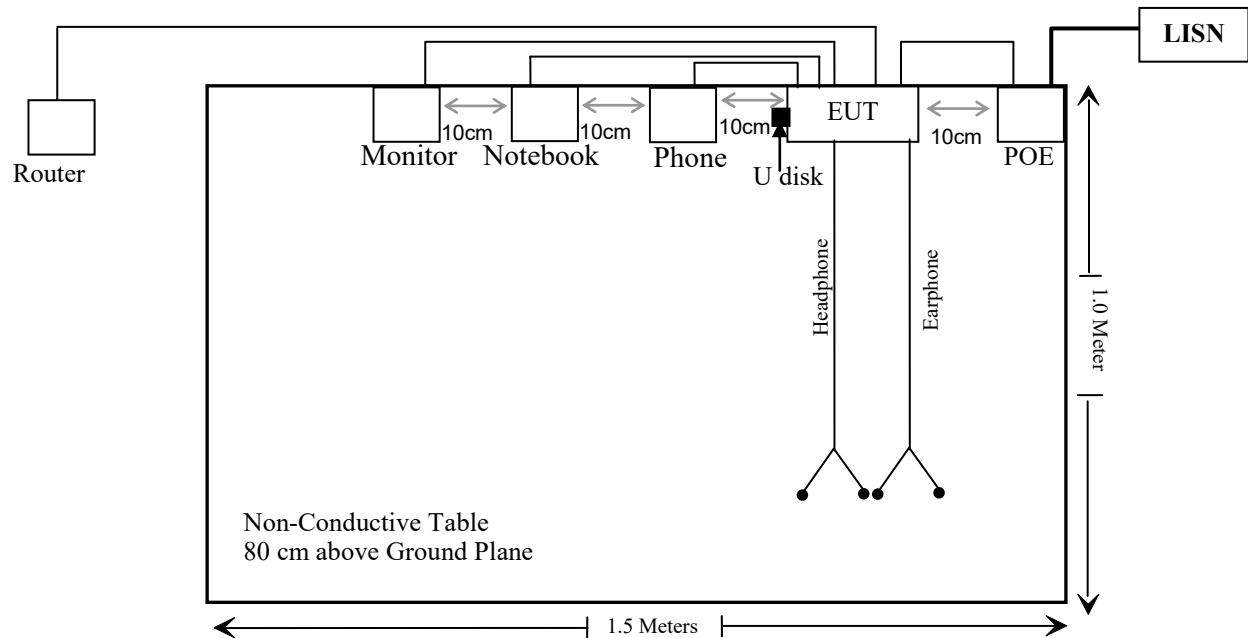


Powered by adapter:

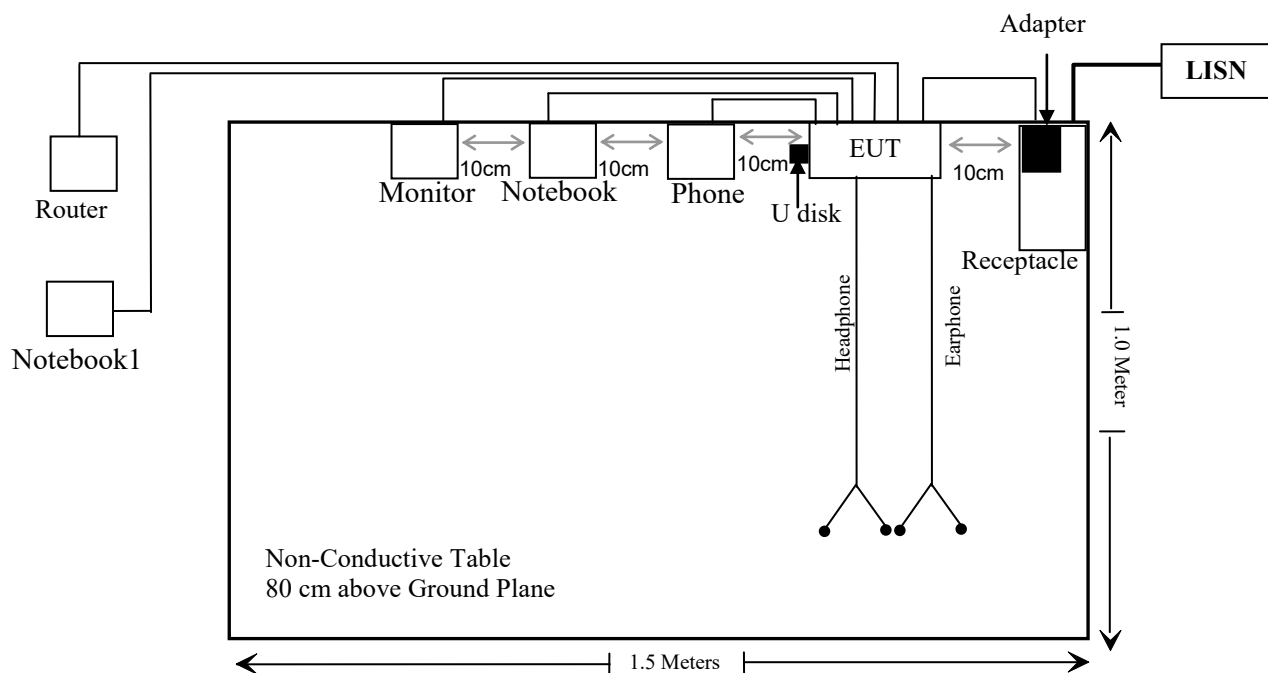


For radiated emission (below 1GHz):


Powered by POE:

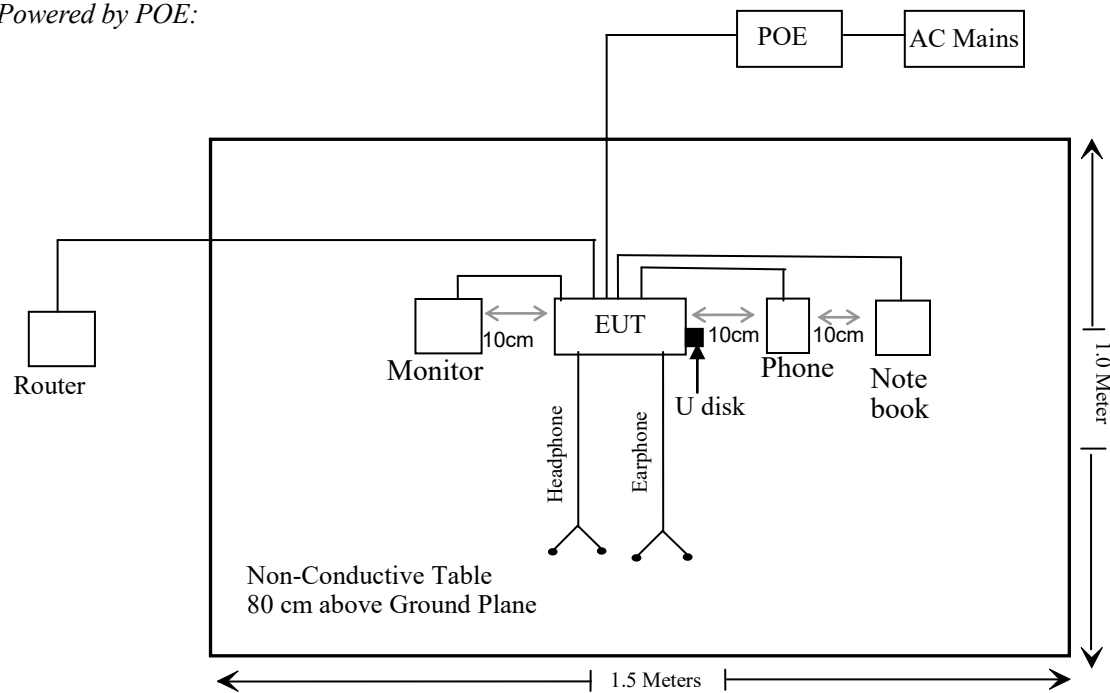

Powered by Adapter:

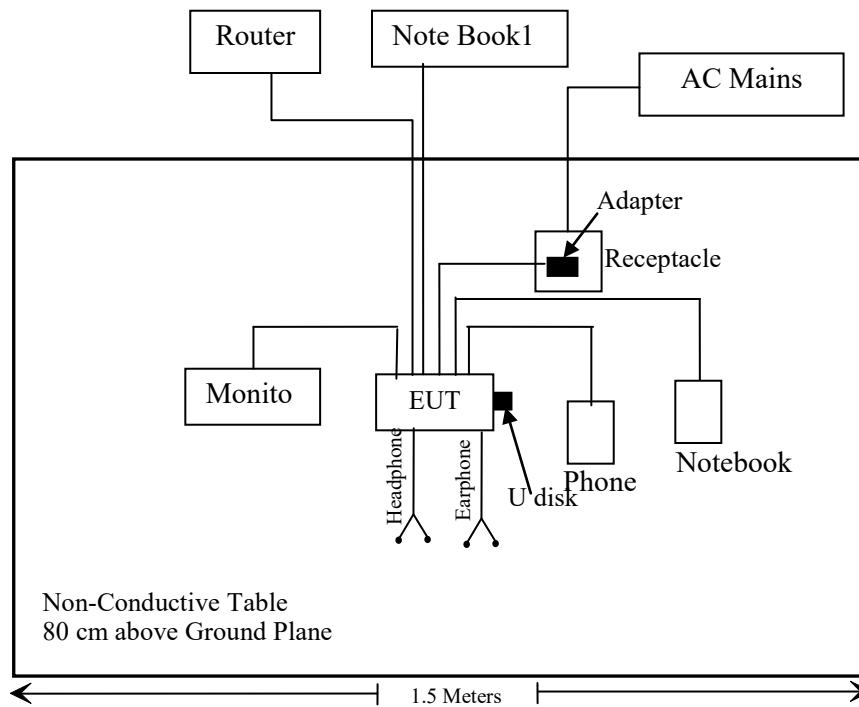

For radiated emission (above 1GHz):

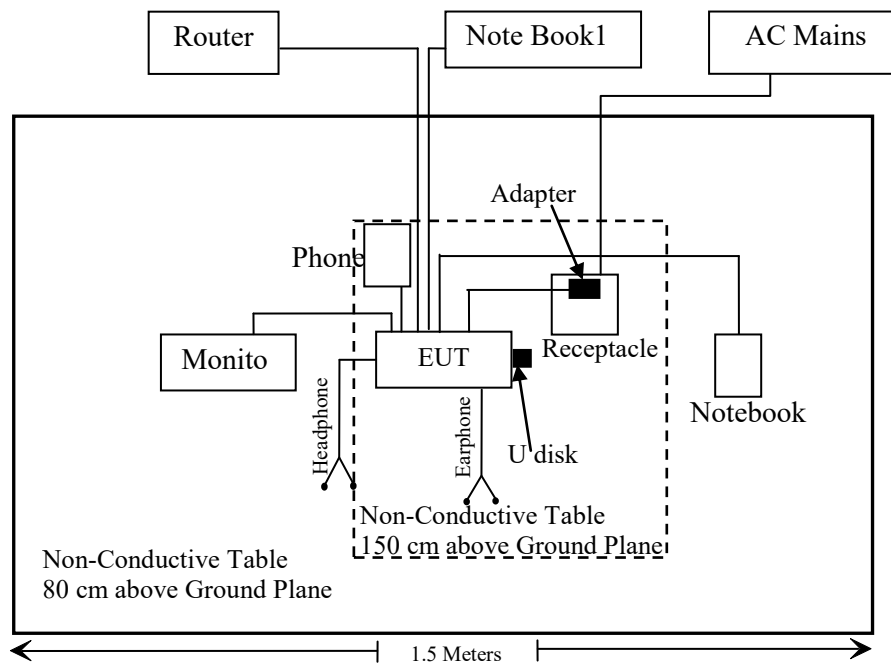

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.407(b)(9)& §15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*

Not Applicable: the EUT has no TPC function which was declared by the applicant.

Compliant*: Please refer to the DFS report: SZNS220407-12824E-RFC.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.15/5.35g-45	075	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.47/5.725G-45	055	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.725/5.875G-45	065	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101948	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/01/19	2023/01/18
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/10/26	2022/10/25
SPECTRUM ANALYZER	Rohde & Schwarz	FSU26	200982	2021/07/06	2022/07/05
WEINSCHL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	/
Unknown	RF Cable	Unknown	1	Each time	/

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$
1.34-30	$3,450 R^2/f^2$
30-300	$3.83 R^2$
300-1,500	$0.0128 R^2 f$
1,500-100,000	$19.2 R^2$

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (W)
	(dBm)	(dBi)	(dBd)	(dBm)	(W)		
2402-2480	9.0	4.0	1.85	10.85	0.012	0.2	0.768
2412-2462	26.0	4.0	1.85	27.85	0.610	0.2	0.768
5150-5250	18.0	5.0	2.85	20.85	0.122	0.2	0.768
5250-5350	17.0	5.0	2.85	19.85	0.097	0.2	0.768
5470-5725	18.0	5.0	2.85	20.85	0.122	0.2	0.768
5725-5850	18.0	5.0	2.85	20.85	0.122	0.2	0.768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.

2. The Bluetooth can transmit at same time with Wi-Fi, the 2.4G Wi-Fi cannot transmit at the same time with the 5G Wi-Fi.

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{BT}/limit + ERP_{Wi-Fi}/limit = 0.012/0.768 + 0.610/0.768 = 0.810 < 1.0$, so simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two internal antennas arrangement for 5G Wi-Fi, which were permanently attached to the EUT. Please refer to the EUT photos.

Type	Antenna Gain	Impedance	Frequency Range
Dipole	ANT 0: 5dBi ANT 1: 3dBi	50Ω	5150-5850MHz


Result: Compliant.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

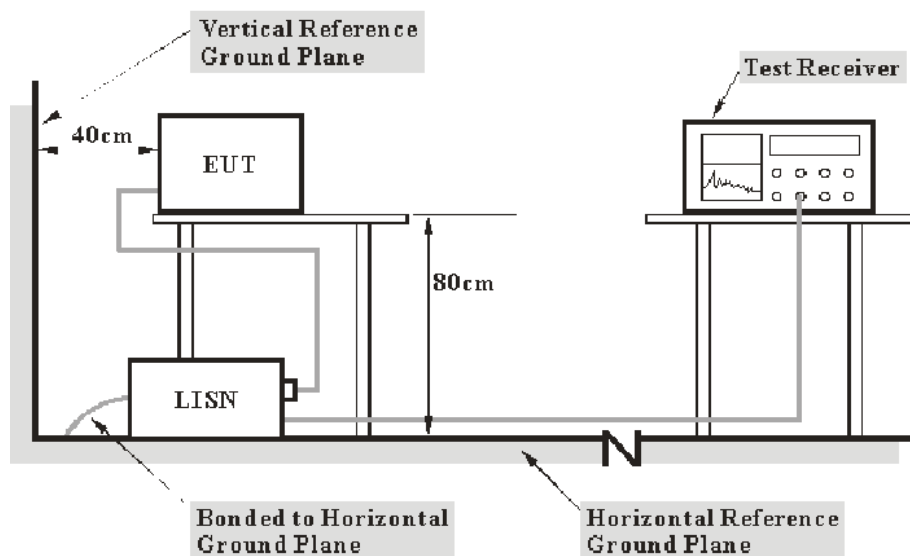

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Reading level} + \text{Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23°C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Jason on 2022-05-13.

EUT operation mode: Transmitting (worst case for 802.11 ac20 5745MHz)


For Adapter 1 (F18W8-120150SPAUY)

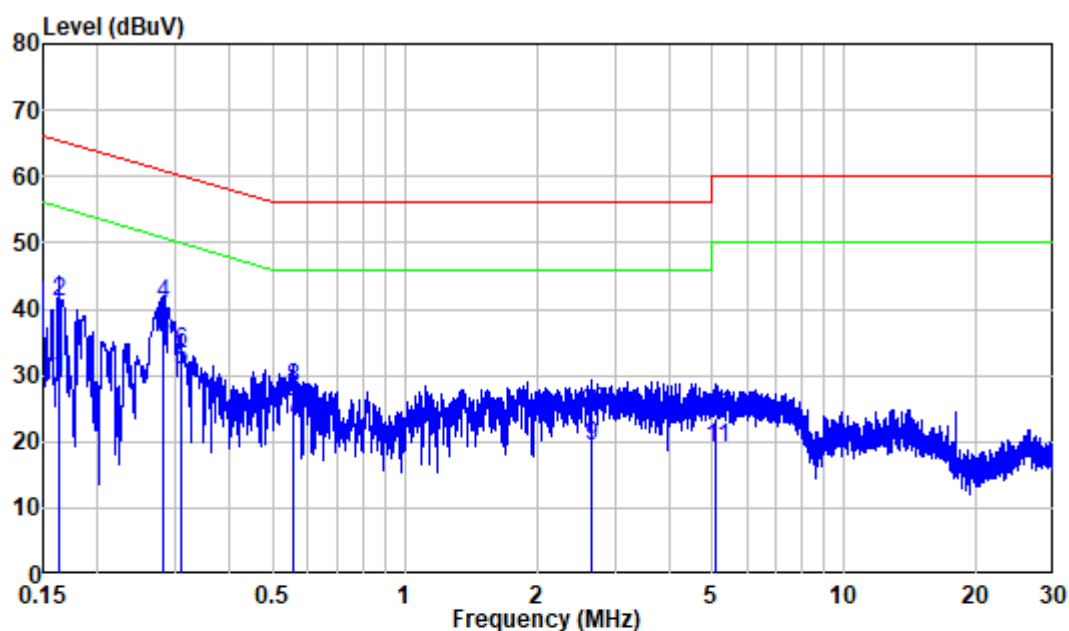AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220407-12824E-RF
 Mode : 5G WIFI
 Power : AC 120V 60Hz
 Adapter : F18W8-120150SPAUY

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.163	9.80	19.68	29.48	55.29	-25.81	Average
2	0.163	9.80	31.15	40.95	65.29	-24.34	QP
3	0.283	9.80	25.82	35.62	50.73	-15.11	Average
4	0.283	9.80	30.84	40.64	60.73	-20.09	QP
5	0.310	9.80	21.08	30.88	49.98	-19.10	Average
6	0.310	9.80	23.81	33.61	59.98	-26.37	QP
7	0.556	9.81	13.74	23.55	46.00	-22.45	Average
8	0.556	9.81	18.19	28.00	56.00	-28.00	QP
9	2.664	9.83	9.52	19.35	46.00	-26.65	Average
10	2.664	9.83	14.54	24.37	56.00	-31.63	QP
11	5.119	9.85	9.21	19.06	50.00	-30.94	Average
12	5.119	9.85	13.83	23.68	60.00	-36.32	QP

AC 120V/60 Hz, Neutral

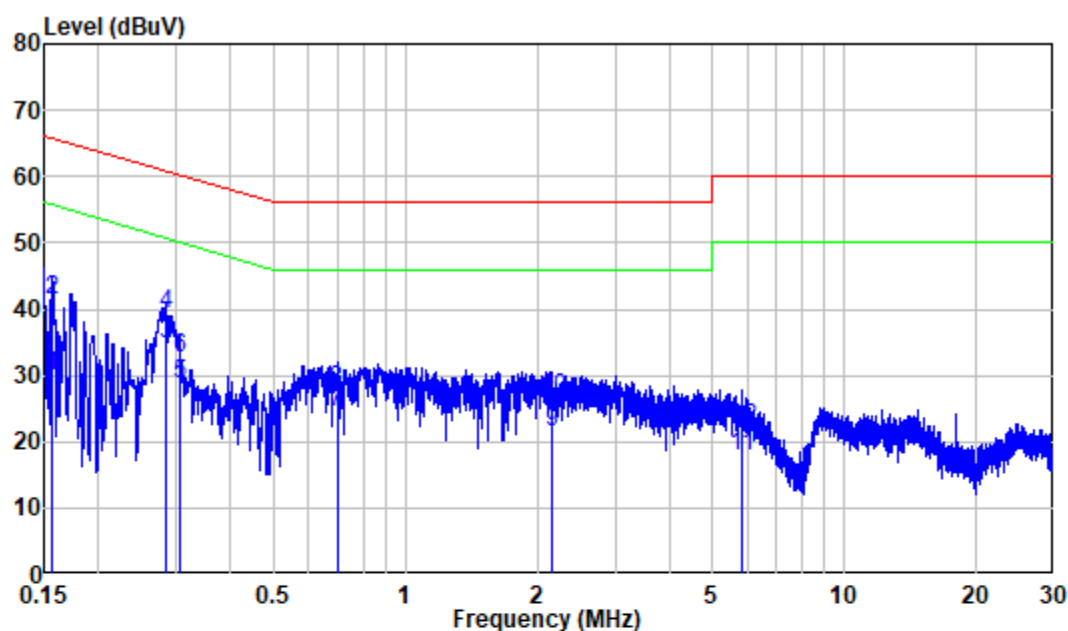


Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220407-12824E-RF
 Mode : 5G WIFI
 Power : AC 120V 60Hz
 Adapter : F18W8-1201505PAUY

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.157	9.80	19.95	29.75	55.63	-25.88	Average
2	0.157	9.80	31.44	41.24	65.63	-24.39	QP
3	0.284	9.80	24.99	34.79	50.70	-15.91	Average
4	0.284	9.80	29.44	39.24	60.70	-21.46	QP
5	0.305	9.80	18.75	28.55	50.10	-21.55	Average
6	0.305	9.80	22.69	32.49	60.10	-27.61	QP
7	0.698	9.81	14.74	24.55	46.00	-21.45	Average
8	0.698	9.81	17.88	27.69	56.00	-28.31	QP
9	2.155	9.82	11.70	21.52	46.00	-24.48	Average
10	2.155	9.82	16.80	26.62	56.00	-29.38	QP
11	5.820	9.93	7.82	17.75	50.00	-32.25	Average
12	5.820	9.93	11.96	21.89	60.00	-38.11	QP


For Adapter 2 (DSA-18PFR-09 FUS 120150)

AC 120V/60 Hz, Line

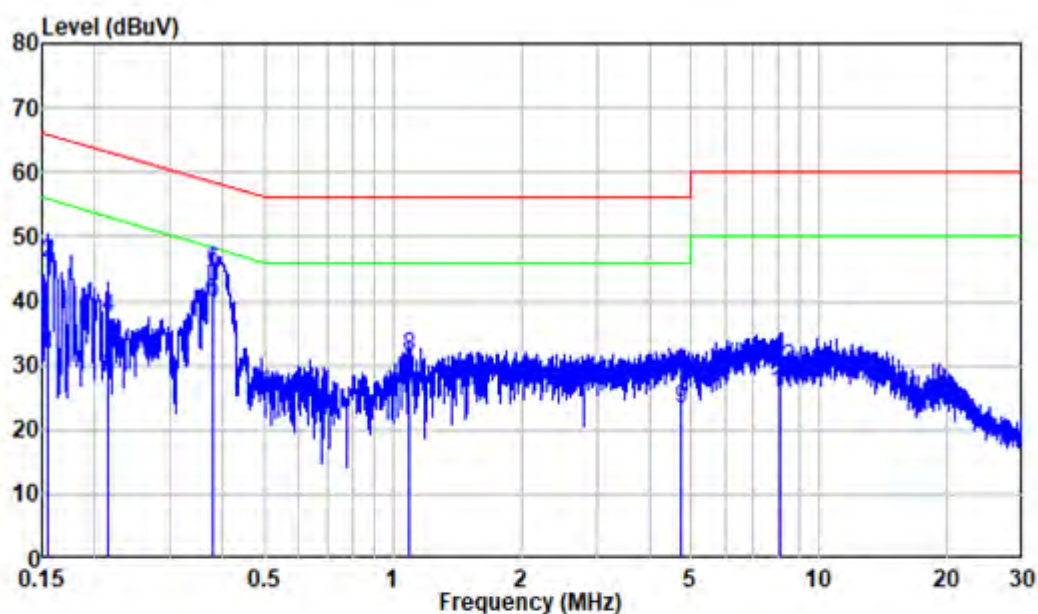

Site : Shielding Room
Condition: Line
Job No. : SZNS220407-12824E-RF
Mode : 5G WIFI
Power : AC 120V 60Hz
Adapter : DSA-18PFR-09 FUS 120150


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.155	9.80	22.05	31.85	55.75	-23.90	Average
2	0.155	9.80	36.06	45.86	65.75	-19.89	QP
3	0.214	9.80	18.29	28.09	53.05	-24.96	Average
4	0.214	9.80	27.55	37.35	63.05	-25.70	QP
5	0.378	9.80	30.19	39.99	48.33	-8.34	Average
6	0.378	9.80	34.96	44.76	58.33	-13.57	QP
7	1.093	9.81	15.33	25.14	46.00	-20.86	Average
8	1.093	9.81	21.53	31.34	56.00	-24.66	QP
9	4.712	9.85	13.35	23.20	46.00	-22.80	Average
10	4.712	9.85	18.06	27.91	56.00	-28.09	QP
11	8.121	9.88	15.81	25.69	50.00	-24.31	Average
12	8.121	9.88	19.57	29.45	60.00	-30.55	QP

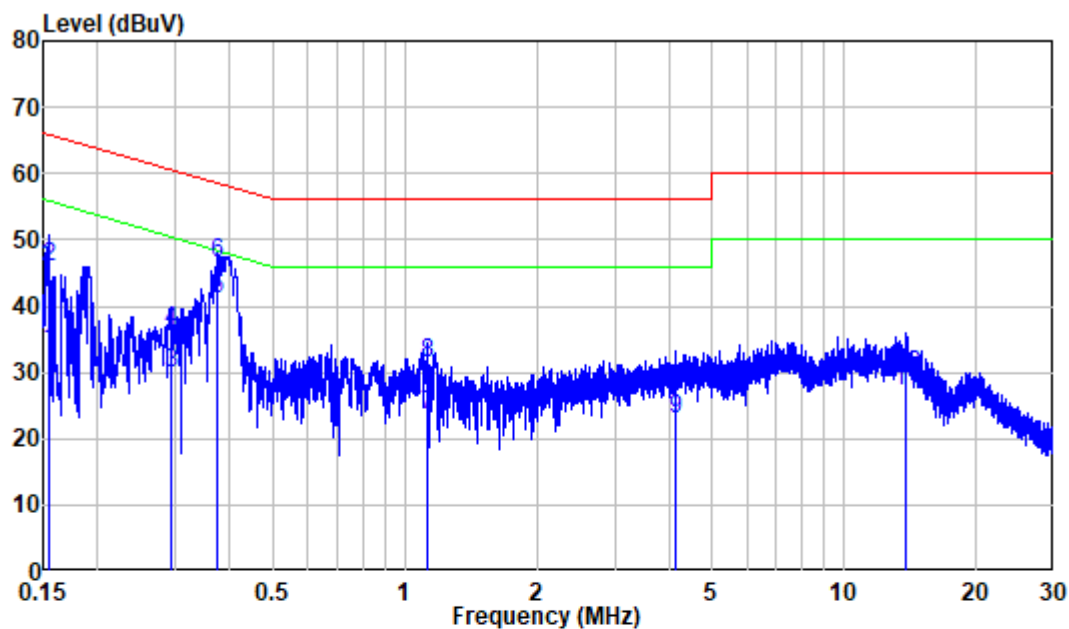AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220407-12824E-RF
 Mode : 5G WIFI
 Power : AC 120V 60Hz
 Adapter : DSA-18PFR-09 FUS 120150

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.155	9.80	23.54	33.34	55.73	-22.39	Average
2	0.155	9.80	36.07	45.87	65.73	-19.86	QP
3	0.293	9.80	20.07	29.87	50.43	-20.56	Average
4	0.293	9.80	26.40	36.20	60.43	-24.23	QP
5	0.376	9.80	31.31	41.11	48.38	-7.27	Average
6	0.376	9.80	36.67	46.47	58.38	-11.91	QP
7	1.126	9.81	13.84	23.65	46.00	-22.35	Average
8	1.126	9.81	21.58	31.39	56.00	-24.61	QP
9	4.133	9.85	13.18	23.03	46.00	-22.97	Average
10	4.133	9.85	17.60	27.45	56.00	-28.55	QP
11	13.768	10.04	17.25	27.29	50.00	-22.71	Average
12	13.768	10.04	19.47	29.51	60.00	-30.49	QP


For Adapter 3 (H18US1200150A)

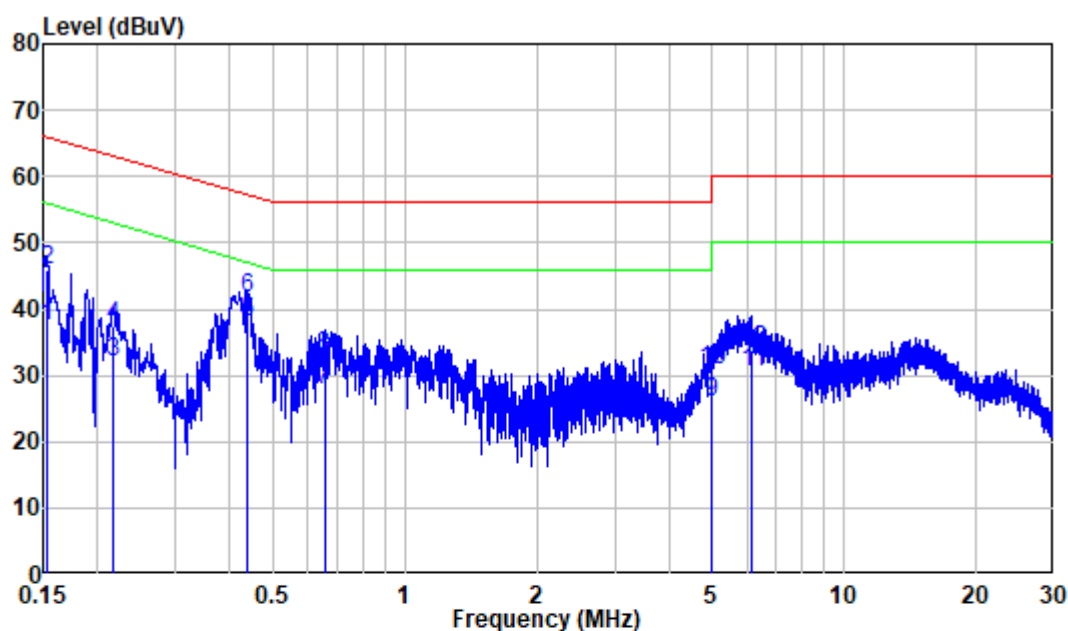AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220407-12824E-RF
 Mode : 5G WIFI
 Power : AC 120V 60Hz
 Adapter : H18US1200150A

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.153	9.80	27.68	37.48	55.82	-18.34	Average
2	0.153	9.80	36.07	45.87	65.82	-19.95	QP
3	0.216	9.80	22.09	31.89	52.97	-21.08	Average
4	0.216	9.80	27.57	37.37	62.97	-25.60	QP
5	0.437	9.80	28.16	37.96	47.12	-9.16	Average
6	0.437	9.80	31.96	41.76	57.12	-15.36	QP
7	0.655	9.81	17.82	27.63	46.00	-18.37	Average
8	0.655	9.81	23.18	32.99	56.00	-23.01	QP
9	4.981	9.85	16.02	25.87	46.00	-20.13	Average
10	4.981	9.85	21.00	30.85	56.00	-25.15	QP
11	6.170	9.86	20.49	30.35	50.00	-19.65	Average
12	6.170	9.86	24.05	33.91	60.00	-26.09	QP

AC 120V/60 Hz, Neutral

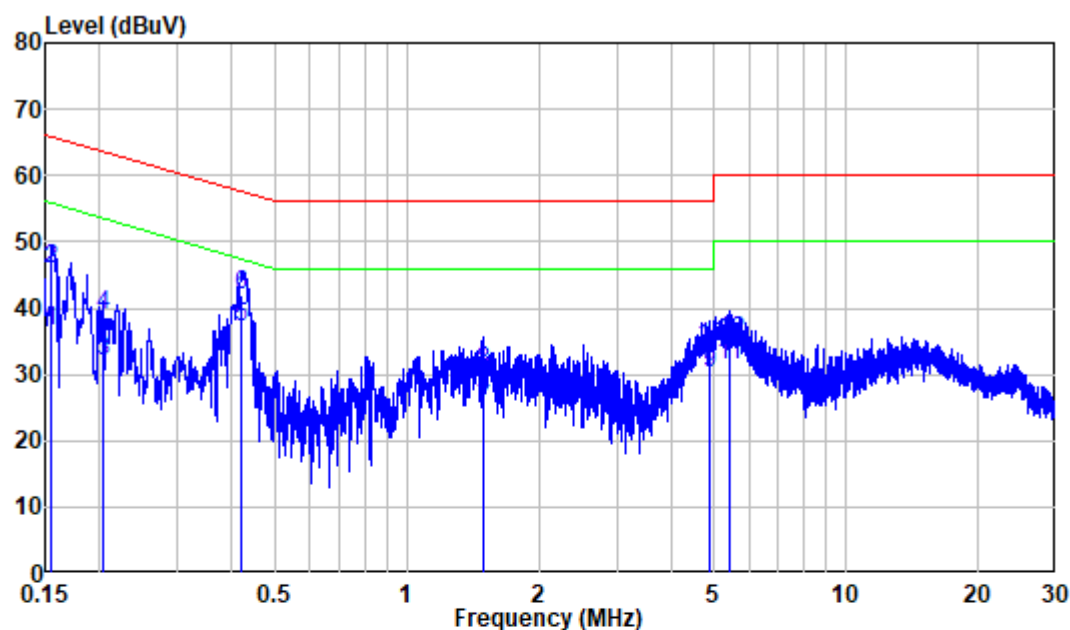


Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220407-12824E-RF
 Mode : 5G WIFI
 Power : AC 120V 60Hz
 Adapter : H18US1200150A

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.155	9.80	26.77	36.57	55.71	-19.14	Average
2	0.155	9.80	36.17	45.97	65.71	-19.74	QP
3	0.203	9.80	22.35	32.15	53.50	-21.35	Average
4	0.203	9.80	29.05	38.85	63.50	-24.65	QP
5	0.421	9.80	27.30	37.10	47.43	-10.33	Average
6	0.421	9.80	32.30	42.10	57.43	-15.33	QP
7	1.497	9.81	14.98	24.79	46.00	-21.21	Average
8	1.497	9.81	20.63	30.44	56.00	-25.56	QP
9	4.909	9.89	20.27	30.16	46.00	-15.84	Average
10	4.909	9.89	24.31	34.20	56.00	-21.80	QP
11	5.429	9.90	21.39	31.29	50.00	-18.71	Average
12	5.429	9.90	25.17	35.07	60.00	-24.93	QP


For POE:

AC 120V/60 Hz, Line

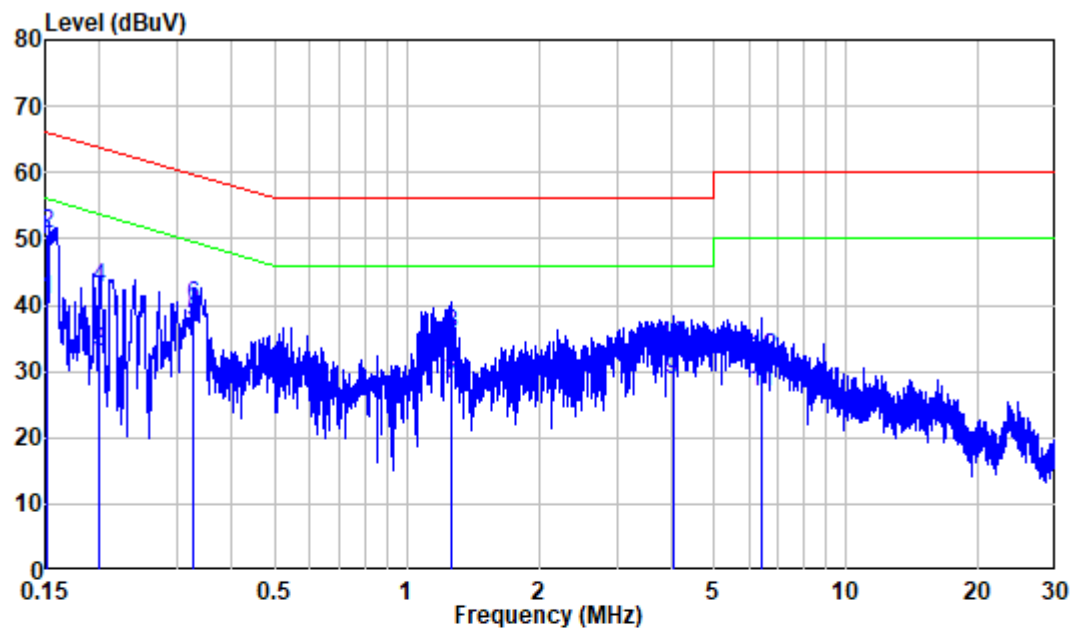

Site : Shielding Room
 Condition: Line
 Job No. : SZNS220407-12824E-RF
 Mode : 5G WIFI
 Power : AC 120V 60Hz POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.152	9.80	31.09	40.89	55.90	-15.01	Average
2	0.152	9.80	40.95	50.75	65.90	-15.15	QP
3	0.200	9.80	23.01	32.81	53.61	-20.80	Average
4	0.200	9.80	32.72	42.52	63.61	-21.09	QP
5	0.328	9.80	27.61	37.41	49.51	-12.10	Average
6	0.328	9.80	30.12	39.92	59.51	-19.59	QP
7	1.260	9.81	18.13	27.94	46.00	-18.06	Average
8	1.260	9.81	25.74	35.55	56.00	-20.45	QP
9	4.025	9.84	18.71	28.55	46.00	-17.45	Average
10	4.025	9.84	23.85	33.69	56.00	-22.31	QP
11	6.420	9.86	16.98	26.84	50.00	-23.16	Average
12	6.420	9.86	22.14	32.00	60.00	-28.00	QP

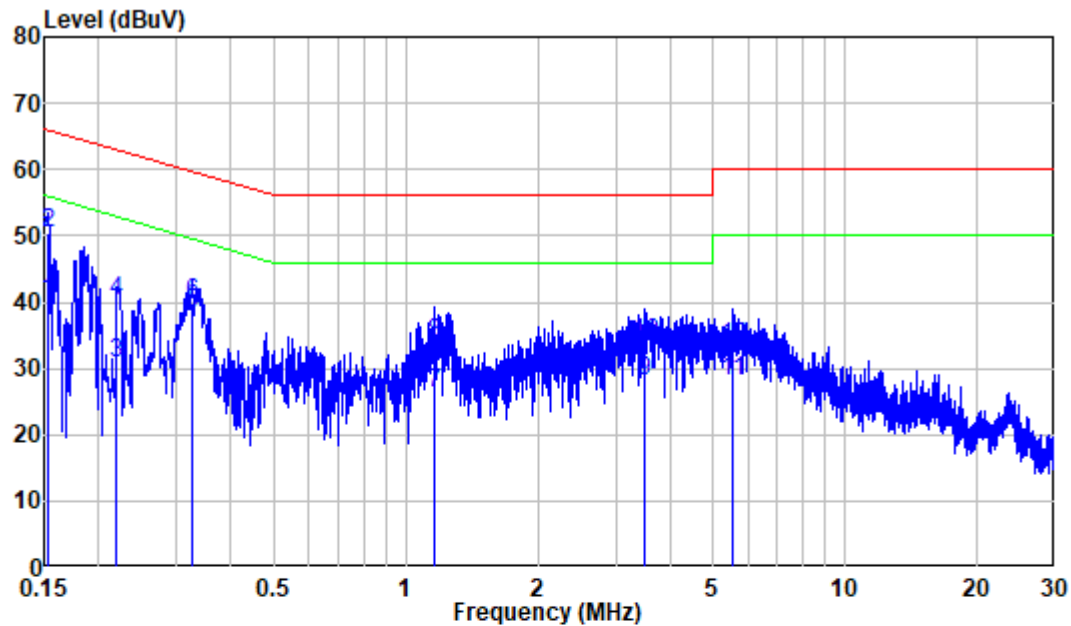AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : SZNS220407-12824E-RF
 Mode : 5G WIFI
 Power : AC 120V 60Hz POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.153	9.80	30.47	40.27	55.84	-15.57	Average
2	0.153	9.80	40.70	50.50	65.84	-15.34	QP
3	0.220	9.80	20.94	30.74	52.84	-22.10	Average
4	0.220	9.80	30.27	40.07	62.84	-22.77	QP
5	0.327	9.80	28.40	38.20	49.53	-11.33	Average
6	0.327	9.80	30.20	40.00	59.53	-19.53	QP
7	1.161	9.81	16.60	26.41	46.00	-19.59	Average
8	1.161	9.81	24.13	33.94	56.00	-22.06	QP
9	3.505	9.83	18.26	28.09	46.00	-17.91	Average
10	3.505	9.83	24.06	33.89	56.00	-22.11	QP
11	5.535	9.92	18.21	28.13	50.00	-21.87	Average
12	5.535	9.92	23.22	33.14	60.00	-26.86	QP

§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

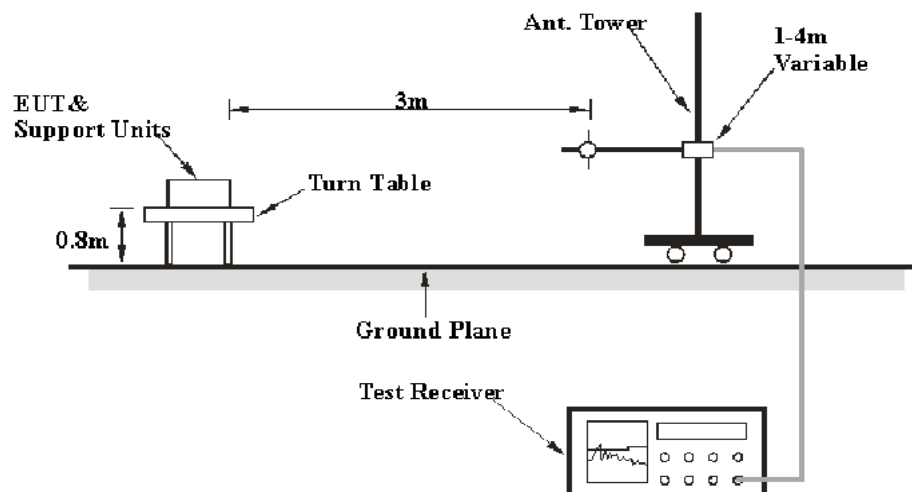

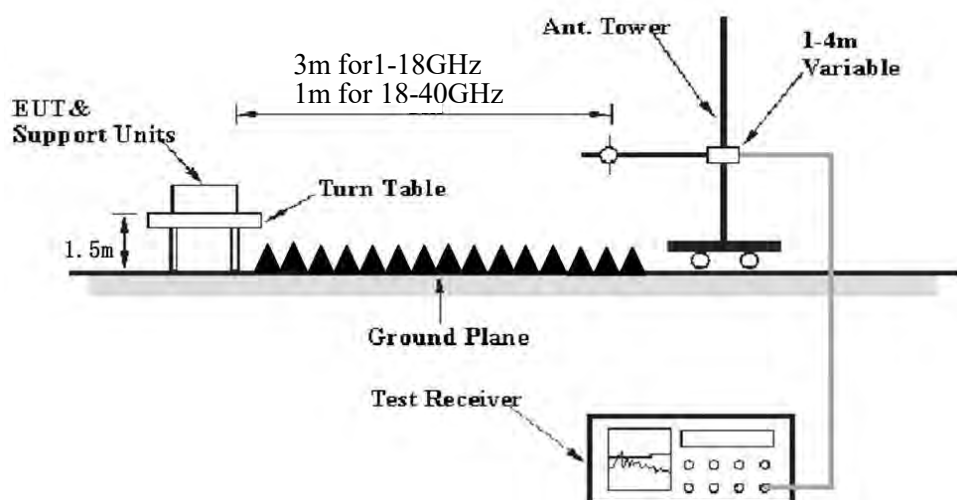Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in dBμV/m
 E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m
 d_{Meas} is the measurement distance, in m
 $d_{\text{SpecLimit}}$ is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Corrected Factor & Margin Calculation

The Corrected Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin/Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin/over limit of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over limit} &= \text{Corrected Amplitude/Level} - \text{Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	26~28℃
Relative Humidity:	56~65%
ATM Pressure:	101.0 kPa

The testing was performed by Leo on 2022-05-17 for below 1GHz, Jeff Jiang from 2022-05-20 to 2022-07-08 for above 1GHz.


EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

30MHz-1GHz: (worst case for 802.11 ac20 5745MHz)

Note: When the test result of Peak was less than the limit of QP, just the peak value was recorded.

For Adapter 1 (F18W8-120150SPAUY)


Horizontal

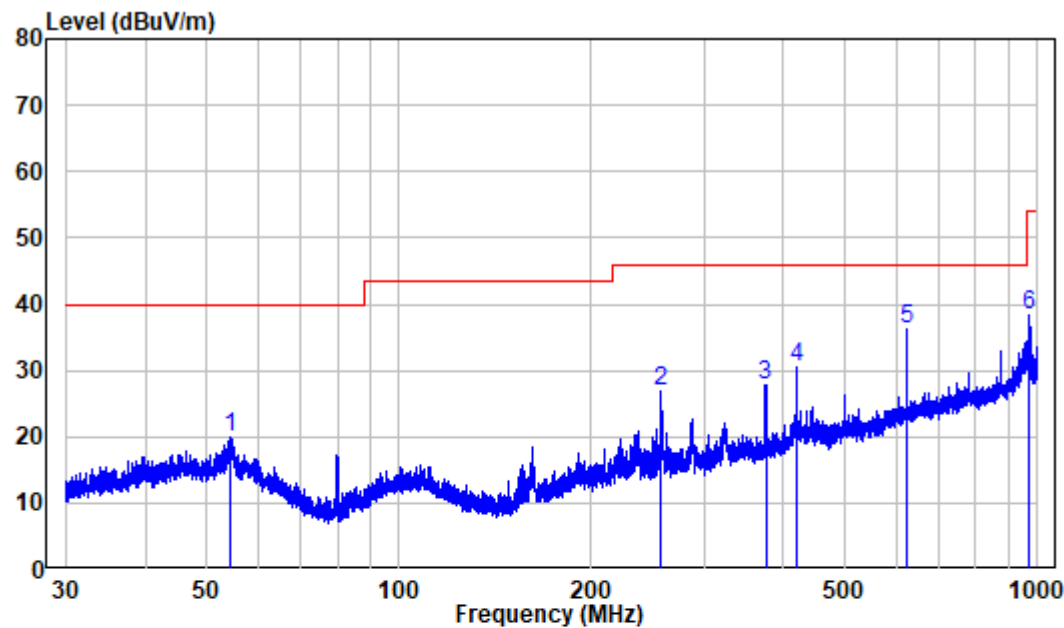

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS220407-12824E-RF
Test Mode: 5G WIFI

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.428	-10.32	30.28	19.96	40.00	-20.04	Peak
2	256.184	-10.60	37.49	26.89	46.00	-19.11	Peak
3	375.116	-7.28	34.99	27.71	46.00	-18.29	Peak
4	420.028	-6.13	36.77	30.64	46.00	-15.36	Peak
5	625.078	-2.35	38.57	36.22	46.00	-9.78	Peak
6	970.209	2.48	35.90	38.38	54.00	-15.62	Peak

Vertical

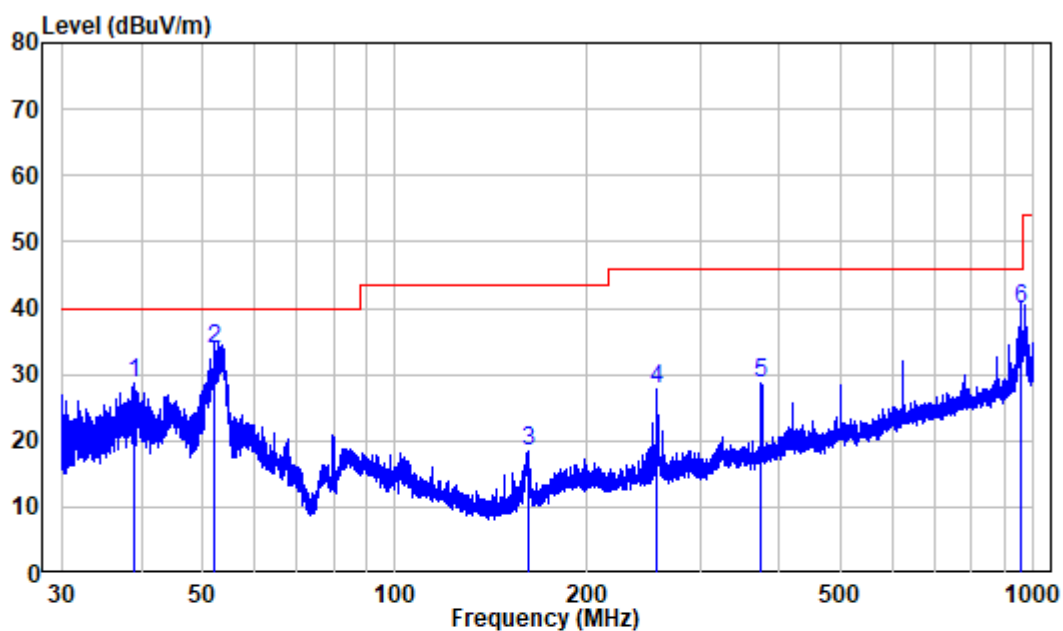

Site : chamber

Condition: 3m VERTICAL


Job No. : SZNS220407-12824E-RF

Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	38.956	-10.60	39.36	28.76	40.00	-11.24	Peak
2	52.231	-10.02	43.89	33.87	40.00	-6.13	Peak
3	161.828	-14.28	32.57	18.29	43.50	-25.21	Peak
4	256.409	-10.60	38.22	27.62	46.00	-18.38	Peak
5	374.951	-7.27	35.84	28.57	46.00	-17.43	Peak
6	955.857	2.14	37.78	39.92	46.00	-6.08	Peak

For Adapter 2 (DSA-18PFR-09 FUS 120150)

Horizontal

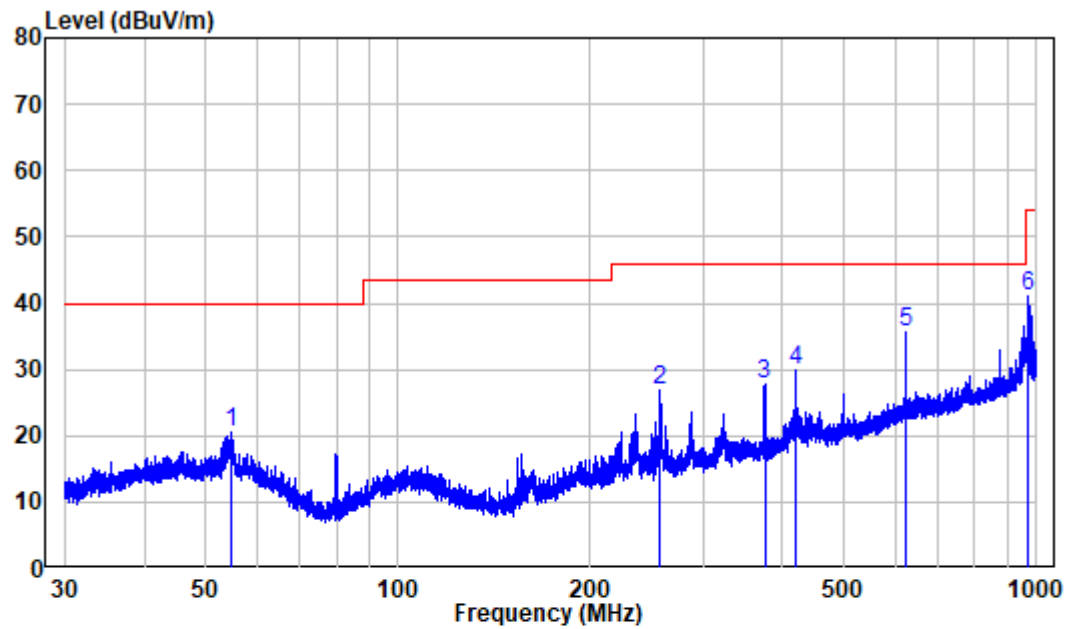

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS220407-12824E-RF

Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.739	-10.29	30.79	20.50	40.00	-19.50	Peak
2	256.296	-10.60	37.43	26.83	46.00	-19.17	Peak
3	375.116	-7.28	35.08	27.80	46.00	-18.20	Peak
4	420.028	-6.13	35.99	29.86	46.00	-16.14	Peak
5	625.078	-2.35	37.97	35.62	46.00	-10.38	Peak
6	972.764	2.41	38.70	41.11	54.00	-12.89	Peak

Vertical

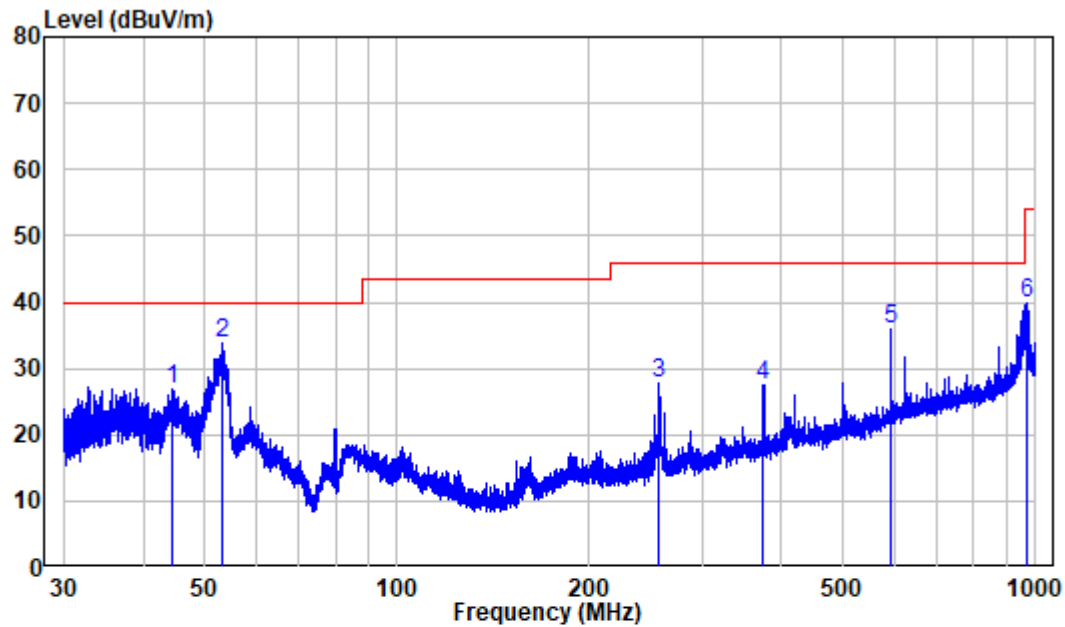


Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS220407-12824E-RF
 Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	44.353	-9.92	36.74	26.82	40.00	-13.18	Peak
2	53.015	-10.17	43.97	33.80	40.00	-6.20	Peak
3	256.184	-10.60	38.43	27.83	46.00	-18.17	Peak
4	374.951	-7.27	34.65	27.38	46.00	-18.62	Peak
5	594.090	-2.70	38.62	35.92	46.00	-10.08	Peak
6	972.764	2.41	37.38	39.79	54.00	-14.21	Peak

For Adapter 3 (H18US1200150A)

Horizontal

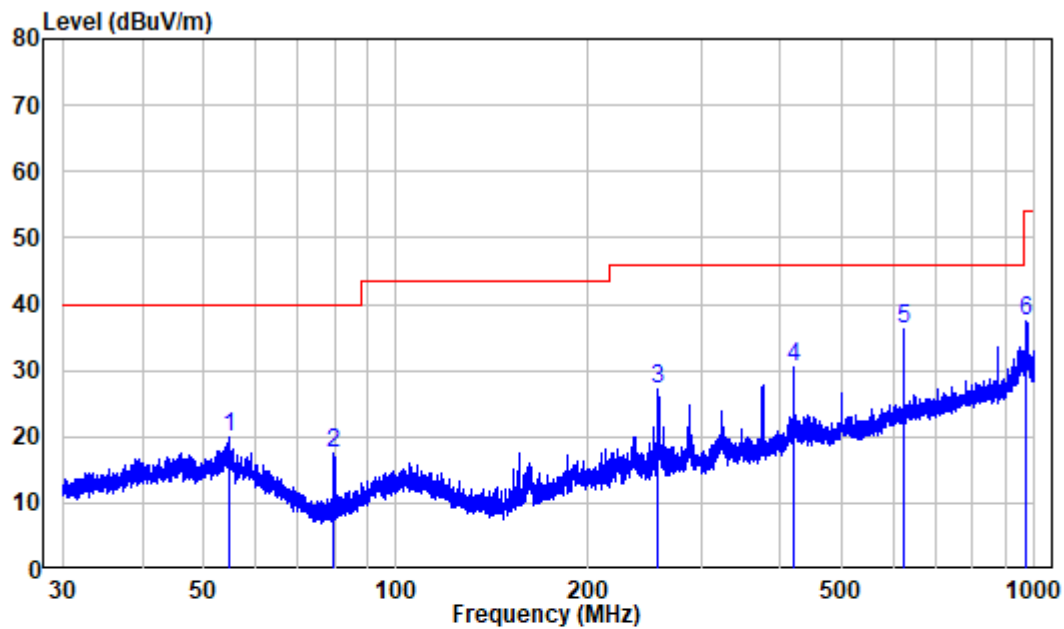

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZNS220407-12824E-RF

Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.595	-10.31	30.09	19.78	40.00	-20.22	Peak
2	79.975	-16.79	34.31	17.52	40.00	-22.48	Peak
3	256.409	-10.60	37.79	27.19	46.00	-18.81	Peak
4	420.028	-6.13	36.59	30.46	46.00	-15.54	Peak
5	625.078	-2.35	38.44	36.09	46.00	-9.91	Peak
6	970.209	2.48	35.06	37.54	54.00	-16.46	Peak

Vertical

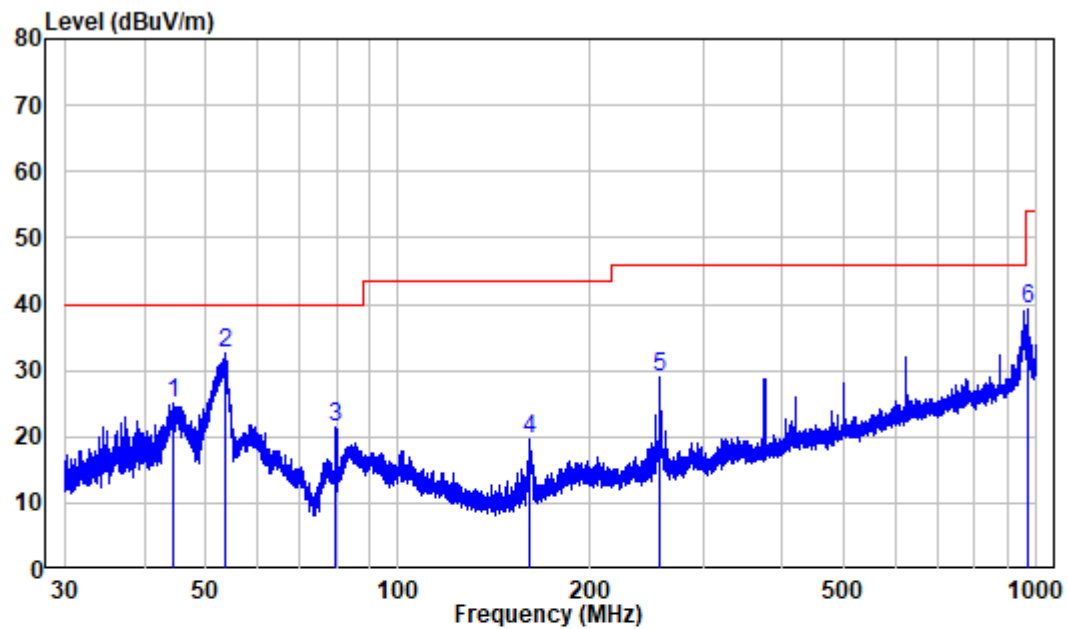


Site : chamber
Condition: 3m VERTICAL
Job No. : SZNS220407-12824E-RF
Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	44.275	-9.91	34.96	25.05	40.00	-14.95	Peak
2	53.435	-10.25	42.83	32.58	40.00	-7.42	Peak
3	79.975	-16.79	38.13	21.34	40.00	-18.66	Peak
4	160.909	-14.24	33.91	19.67	43.50	-23.83	Peak
5	256.184	-10.60	39.58	28.98	46.00	-17.02	Peak
6	971.060	2.45	36.66	39.11	54.00	-14.89	Peak

For POE

Horizontal

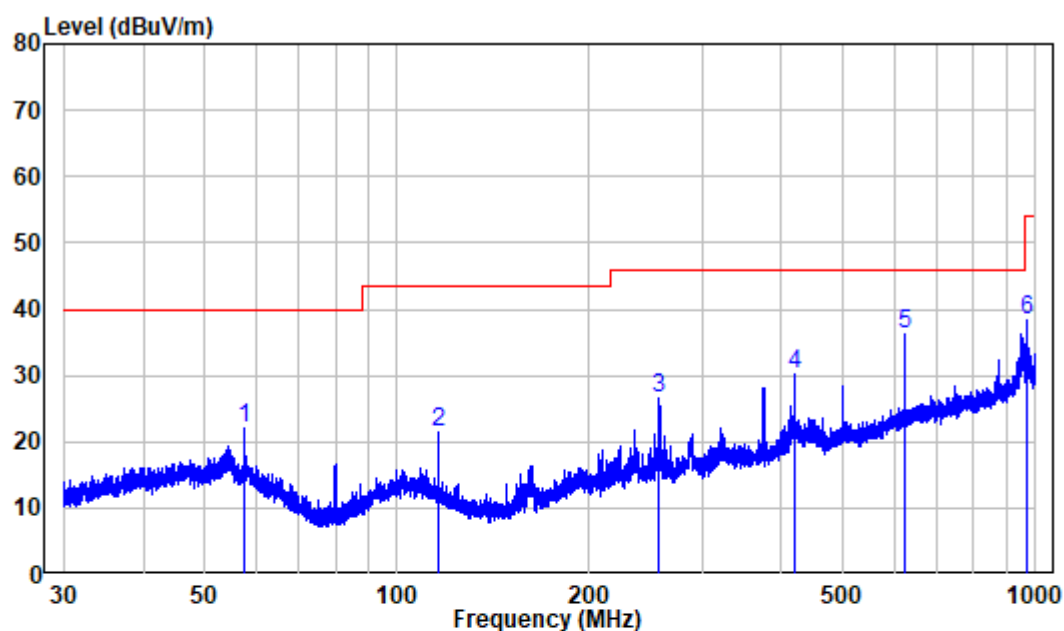

Site : chamber

Condition: 3m HORIZONTAL


Job No. : SZNS220407-12824E-RF

Test Mode: 5G WIFI

Note : POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	57.493	-9.98	31.98	22.00	40.00	-18.00	Peak
2	115.726	-12.76	34.17	21.41	43.50	-22.09	Peak
3	256.409	-10.60	37.09	26.49	46.00	-19.51	Peak
4	420.028	-6.13	36.26	30.13	46.00	-15.87	Peak
5	625.078	-2.35	38.46	36.11	46.00	-9.89	Peak
6	971.911	2.43	35.85	38.28	54.00	-15.72	Peak

Vertical

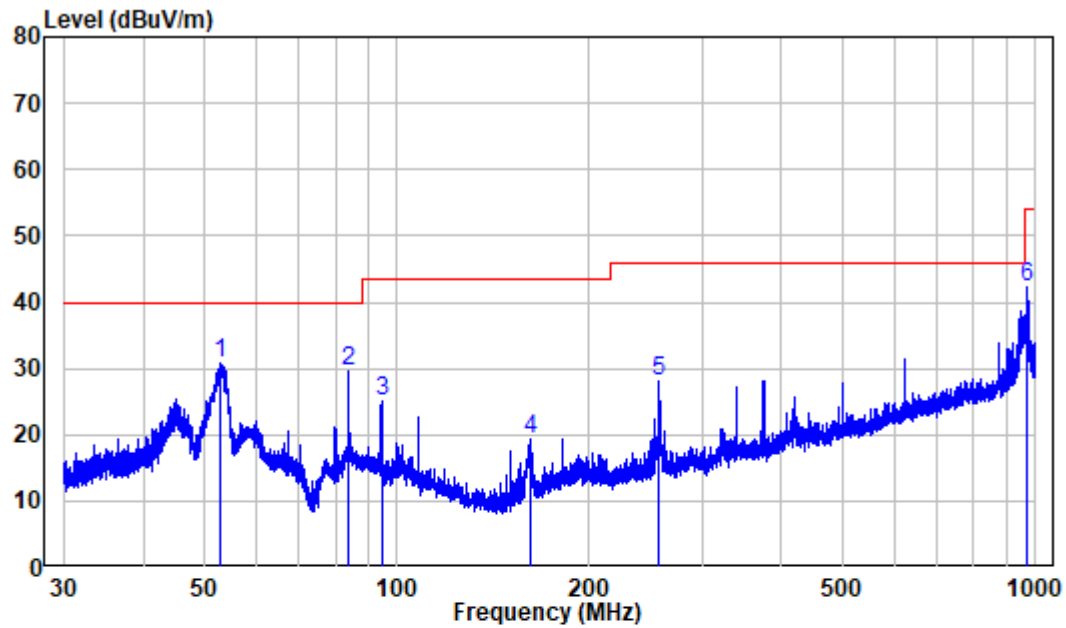

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS220407-12824E-RF
 Test Mode: 5G WIFI
 Note : POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	52.992	-10.17	40.97	30.80	40.00	-9.20	Peak
2	83.889	-16.08	45.65	29.57	40.00	-10.43	Peak
3	94.470	-12.60	37.65	25.05	43.50	-18.45	Peak
4	161.262	-14.24	33.54	19.30	43.50	-24.20	Peak
5	256.184	-10.60	38.68	28.08	46.00	-17.92	Peak
6	972.337	2.42	39.81	42.23	54.00	-11.77	Peak

Above 1GHz: (worst case adapter 1)**5150-5250 MHz:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11a(worst case antenna 0)									
5180 MHZ									
4500	63.04	PK	190	2.3	H	-4.72	58.32	74	-15.68
4500	50.3	AV	190	2.3	H	-4.72	45.58	54	-8.42
4500	62.95	PK	286	2.2	V	-4.72	58.23	74	-15.77
4500	50.21	AV	286	2.2	V	-4.72	45.49	54	-8.51
5150	63.17	PK	13	1.1	H	-2.73	60.44	74	-13.56
5150	50.46	AV	13	1.1	H	-2.73	47.73	54	-6.27
5150	63.09	PK	19	1.2	V	-2.73	60.36	74	-13.64
5150	50.35	AV	19	1.2	V	-2.73	47.62	54	-6.38
10360	41.82	PK	180	1.5	H	8.12	49.94	68.2	-18.26
10360	41.47	PK	196	2.2	V	8.12	49.59	68.2	-18.61
5200 MHZ									
10400	41.69	PK	132	1.6	H	8.24	49.93	68.2	-18.27
10400	42.15	PK	238	1.2	V	8.24	50.39	68.2	-17.81
5240 MHZ									
5350	65.19	PK	27	2.2	H	-2.33	62.86	74	-11.14
5350	51.13	AV	27	2.2	H	-2.33	48.8	54	-5.2
5350	64.9	PK	283	1.3	V	-2.33	62.57	74	-11.43
5350	51.04	AV	283	1.3	V	-2.33	48.71	54	-5.29
5460	62.91	PK	229	1.4	H	-2.26	60.65	74	-13.35
5460	51.05	AV	229	1.4	H	-2.26	48.79	54	-5.21
5460	62.78	PK	202	1.7	V	-2.26	60.52	74	-13.48
5460	50.97	AV	202	1.7	V	-2.26	48.71	54	-5.29
10480	41.51	PK	20	1.8	H	8.56	50.07	68.2	-18.13
10480	42.32	PK	21	1.7	V	8.56	50.88	68.2	-17.32

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20(worst case MIMO)									
5180 MHz									
4500	63.1	PK	43	1.1	H	-4.72	58.38	74	-15.62
4500	50.35	AV	43	1.1	H	-4.72	45.63	54	-8.37
4500	63.01	PK	257	1.2	V	-4.72	58.29	74	-15.71
4500	50.24	AV	257	1.2	V	-4.72	45.52	54	-8.48
5150	63.4	PK	175	2.3	H	-2.73	60.67	74	-13.33
5150	50.57	AV	175	2.3	H	-2.73	47.84	54	-6.16
5150	63.26	PK	120	2.2	V	-2.73	60.53	74	-13.47
5150	50.45	AV	120	2.2	V	-2.73	47.72	54	-6.28
10360	41.75	PK	257	1.3	H	8.12	49.87	68.2	-18.33
10360	42.84	PK	34	2.3	V	8.12	50.96	68.2	-17.24
5200 MHz									
10400	42.09	PK	200	2.1	H	8.24	50.33	68.2	-17.87
10400	41.9	PK	249	1.2	V	8.24	50.14	68.2	-18.06
5240 MHz									
5350	64.88	PK	211	2.2	H	-2.33	62.55	74	-11.45
5350	51.07	AV	211	2.2	H	-2.33	48.74	54	-5.26
5350	62.7	PK	209	2	V	-2.33	60.37	74	-13.63
5350	50.96	AV	209	2	V	-2.33	48.63	54	-5.37
5460	62.82	PK	51	1.4	H	-2.26	60.56	74	-13.44
5460	50.98	AV	51	1.4	H	-2.26	48.72	54	-5.28
5460	62.71	PK	329	1.1	V	-2.26	60.45	74	-13.55
5460	50.89	AV	329	1.1	V	-2.26	48.63	54	-5.37
10480	41.64	PK	163	1.6	H	8.56	50.2	68.2	-18
10480	41.83	PK	26	1.1	V	8.56	50.39	68.2	-17.81

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N40(worst case MIMO)									
5190 MHz									
4500	63.41	PK	330	1.6	H	-4.72	58.69	74	-15.31
4500	50.47	AV	330	1.6	H	-4.72	45.75	54	-8.25
4500	63.29	PK	88	1.9	V	-4.72	58.57	74	-15.43
4500	50.38	AV	88	1.9	V	-4.72	45.66	54	-8.34
5150	66.87	PK	16	2.4	H	-2.73	64.14	74	-9.86
5150	53.2	AV	16	2.4	H	-2.73	50.47	54	-3.53
5150	66.61	PK	290	2.1	V	-2.73	63.88	74	-10.12
5150	52.92	AV	290	2.1	V	-2.73	50.19	54	-3.81
10380	41.77	PK	329	1.7	H	8.18	49.95	68.2	-18.25
10380	41.5	PK	9	2.2	V	8.18	49.68	68.2	-18.52
5230 MHz									
5350	65.28	PK	41	2.4	H	-2.33	62.95	74	-11.05
5350	51.4	AV	41	2.4	H	-2.33	49.07	54	-4.93
5350	65.04	PK	49	1.5	V	-2.33	62.71	74	-11.29
5350	51.29	AV	49	1.5	V	-2.33	48.96	54	-5.04
5460	63.68	PK	146	1.3	H	-2.26	61.42	74	-12.58
5460	51.37	AV	146	1.3	H	-2.26	49.11	54	-4.89
5460	63.52	PK	10	2.2	V	-2.26	61.26	74	-12.74
5460	51.29	AV	10	2.2	V	-2.26	49.03	54	-4.97
10460	41.72	PK	325	2.4	H	8.47	50.19	68.2	-18.01
10460	41.5	PK	353	1.9	V	8.47	49.97	68.2	-18.23

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AC20(worst case MIMO)									
5180 MHz									
4500	63.43	PK	184	2.2	H	-4.72	58.71	74	-15.29
4500	49.58	AV	184	2.2	H	-4.72	44.86	54	-9.14
4500	63.31	PK	159	2.3	V	-4.72	58.59	74	-15.41
4500	49.5	AV	159	2.3	V	-4.72	44.78	54	-9.22
5150	64.56	PK	195	2.5	H	-2.73	61.83	74	-12.17
5150	49.74	AV	195	2.5	H	-2.73	47.01	54	-6.99
5150	64.42	PK	148	2	V	-2.73	61.69	74	-12.31
5150	49.61	AV	148	2	V	-2.73	46.88	54	-7.12
10360	41.85	PK	59	2.2	H	8.12	49.97	68.2	-18.23
10360	42.07	PK	27	2.5	V	8.12	50.19	68.2	-18.01
5200 MHz									
10400	42.14	PK	126	1.5	H	8.24	50.38	68.2	-17.82
10400	42.46	PK	41	1.1	V	8.24	50.7	68.2	-17.5
5240 MHz									
5350	64.81	PK	209	1.7	H	-2.33	62.48	74	-11.52
5350	50.19	AV	209	1.7	H	-2.33	47.86	54	-6.14
5350	64.6	PK	86	2.2	V	-2.33	62.27	74	-11.73
5350	50.07	AV	86	2.2	V	-2.33	47.74	54	-6.26
5460	63.25	PK	352	2.2	H	-2.26	60.99	74	-13.01
5460	50.19	AV	352	2.2	H	-2.26	47.93	54	-6.07
5460	63.16	PK	217	2.5	V	-2.26	60.9	74	-13.1
5460	50.08	AV	217	2.5	V	-2.26	47.82	54	-6.18
10480	41.83	PK	98	1.4	H	8.56	50.39	68.2	-17.81
10480	42.27	PK	209	1.3	V	8.56	50.83	68.2	-17.37

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AC40(worst case MIMO)									
5190 MHz									
4500	63.5	PK	125	2.3	H	-4.72	58.78	74	-15.22
4500	49.54	AV	125	2.3	H	-4.72	44.82	54	-9.18
4500	63.38	PK	204	2.2	V	-4.72	58.66	74	-15.34
4500	49.43	AV	204	2.2	V	-4.72	44.71	54	-9.29
5150	65.95	PK	237	2.4	H	-2.73	63.22	74	-10.78
5150	51.78	AV	237	2.4	H	-2.73	49.05	54	-4.95
5150	65.76	PK	97	1.8	V	-2.73	63.03	74	-10.97
5150	51.67	AV	97	1.8	V	-2.73	48.94	54	-5.06
10380	41.7	PK	99	1.9	H	8.18	49.88	68.2	-18.32
10380	42.48	PK	89	2.4	V	8.18	50.66	68.2	-17.54
5230 MHz									
5350	65.44	PK	245	1.1	H	-2.33	63.11	74	-10.89
5350	50.16	AV	245	1.1	H	-2.33	47.83	54	-6.17
5350	65.21	PK	324	1.1	V	-2.33	62.88	74	-11.12
5350	50.07	AV	324	1.1	V	-2.33	47.74	54	-6.26
5460	63.59	PK	40	1.3	H	-2.26	61.33	74	-12.67
5460	50.21	AV	40	1.3	H	-2.26	47.95	54	-6.05
5460	63.46	PK	251	2.4	V	-2.26	61.2	74	-12.8
5460	50.1	AV	251	2.4	V	-2.26	47.84	54	-6.16
10460	41.72	PK	31	2	H	8.47	50.19	68.2	-18.01
10460	42.45	PK	49	2.1	V	8.47	50.92	68.2	-17.28

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac80(worst case MIMO)									
5210 MHz									
4500	63.92	PK	322	1.4	H	-4.72	59.2	74	-14.8
4500	49.28	AV	322	1.4	H	-4.72	44.56	54	-9.44
4500	64.2	PK	22	1.1	V	-4.72	59.48	74	-14.52
4500	49.43	AV	22	1.1	V	-4.72	44.71	54	-9.29
5150	69.12	PK	161	1.5	H	-2.73	66.39	74	-7.61
5150	52.41	AV	161	1.5	H	-2.73	49.68	54	-4.32
5150	71.18	PK	211	2	V	-2.73	68.45	74	-5.55
5150	53.83	AV	211	2	V	-2.73	51.1	54	-2.9
5350	64.83	PK	3	1.7	H	-2.33	62.5	74	-11.5
5350	50.06	AV	3	1.7	H	-2.33	47.73	54	-6.27
5350	65.39	PK	270	2	V	-2.33	63.06	74	-10.94
5350	50.21	AV	270	2	V	-2.33	47.88	54	-6.12
5460	63.35	PK	71	2.2	H	-2.26	61.09	74	-12.91
5460	50.49	AV	71	2.2	H	-2.26	48.23	54	-5.77
5460	63.61	PK	282	1.7	V	-2.26	61.35	74	-12.65
5460	50.68	AV	282	1.7	V	-2.26	48.42	54	-5.58
10420	41.82	PK	305	2.3	H	8.32	50.14	68.2	-18.06
10420	41.25	PK	121	2.1	V	8.32	49.57	68.2	-18.63

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX20 (worst case MIMO)									
5180 MHz									
RU26#0									
4500	62.93	PK	277	1.6	H	-4.72	58.21	74	-15.79
4500	50.44	AV	277	1.6	H	-4.72	45.72	54	-8.28
4500	63.19	PK	232	2	V	-4.72	58.47	74	-15.53
4500	50.19	AV	232	2	V	-4.72	45.47	54	-8.53
5150	69.37	PK	75	2.1	H	-2.73	66.64	74	-7.36
5150	51.41	AV	75	2.1	H	-2.73	48.68	54	-5.32
5150	66.26	PK	344	1.2	V	-2.73	63.53	74	-10.47
5150	51.01	AV	344	1.2	V	-2.73	48.28	54	-5.72
RU52#37									
4500	63.27	PK	210	2.4	H	-4.72	58.55	74	-15.45
4500	50.17	AV	210	2.4	H	-4.72	45.45	54	-8.55
4500	63.32	PK	254	1.3	V	-4.72	58.6	74	-15.4
4500	50.17	AV	254	1.3	V	-4.72	45.45	54	-8.55
5150	64.79	PK	292	1.1	H	-2.73	62.06	74	-11.94
5150	51.47	AV	292	1.1	H	-2.73	48.74	54	-5.26
5150	63.91	PK	42	2.5	V	-2.73	61.18	74	-12.82
5150	50.72	AV	42	2.5	V	-2.73	47.99	54	-6.01
RU106#53									
4500	62.81	PK	293	1	H	-4.72	58.09	74	-15.91
4500	50.43	AV	293	1	H	-4.72	45.71	54	-8.29
4500	63.01	PK	253	1.4	V	-4.72	58.29	74	-15.71
4500	50.32	AV	253	1.4	V	-4.72	45.6	54	-8.4
5150	68.23	PK	121	2.5	H	-2.73	65.5	74	-8.5
5150	51.58	AV	121	2.5	H	-2.73	48.85	54	-5.15
5150	64.67	PK	208	1.4	V	-2.73	61.94	74	-12.06
5150	50.83	AV	208	1.4	V	-2.73	48.1	54	-5.9
RU242#61									
4500	62.79	PK	188	1.1	H	-4.72	58.07	74	-15.93
4500	50.28	AV	188	1.1	H	-4.72	45.56	54	-8.44
4500	63.47	PK	221	2.5	V	-4.72	58.75	74	-15.25
4500	50.35	AV	221	2.5	V	-4.72	45.63	54	-8.37
5150	64.85	PK	31	1.1	H	-2.73	62.12	74	-11.88
5150	51.56	AV	31	1.1	H	-2.73	48.83	54	-5.17
5150	63.82	PK	226	2	V	-2.73	61.09	74	-12.91
5150	50.94	AV	226	2	V	-2.73	48.21	54	-5.79

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5180 MHz									
RU26#0									
10360	54.9	PK	102	1.9	H	8.12	63.02	68.2	-5.18
10360	55.83	PK	278	2.2	V	8.12	63.95	68.2	-4.25
5200 MHz									
RU26#0									
10400	54.98	PK	87	2.4	H	8.24	63.22	68.2	-4.98
10400	57	PK	191	1.3	V	8.24	65.24	68.2	-2.96
5240 MHz									
RU26#8									
5350	64.17	PK	103	2.4	H	-2.33	61.84	74	-12.16
5350	50.37	AV	103	2.4	H	-2.33	48.04	54	-5.96
5350	63.97	PK	251	2.5	V	-2.33	61.64	74	-12.36
5350	50.14	AV	251	2.5	V	-2.33	47.81	54	-6.19
5460	64.2	PK	154	2.3	H	-2.26	61.94	74	-12.06
5460	50.16	AV	154	2.3	H	-2.26	47.9	54	-6.1
5460	63.68	PK	192	2.2	V	-2.26	61.42	74	-12.58
5460	50.32	AV	192	2.2	V	-2.26	48.06	54	-5.94
RU52#40									
5350	64.1	PK	191	1.6	H	-2.33	61.77	74	-12.23
5350	50.38	AV	191	1.6	H	-2.33	48.05	54	-5.95
5350	64.2	PK	157	1.2	V	-2.33	61.87	74	-12.13
5350	50.4	AV	157	1.2	V	-2.33	48.07	54	-5.93
5460	64.27	PK	262	2.5	H	-2.26	62.01	74	-11.99
5460	50.33	AV	262	2.5	H	-2.26	48.07	54	-5.93
5460	63.67	PK	86	1.6	V	-2.26	61.41	74	-12.59
5460	50.26	AV	86	1.6	V	-2.26	48	54	-6
RU106#54									
5350	64.18	PK	12	2.1	H	-2.33	61.85	74	-12.15
5350	50.31	AV	12	2.1	H	-2.33	47.98	54	-6.02
5350	64.05	PK	245	1.1	V	-2.33	61.72	74	-12.28
5350	50.28	AV	245	1.1	V	-2.33	47.95	54	-6.05
5460	64.43	PK	306	1.8	H	-2.26	62.17	74	-11.83
5460	50.19	AV	306	1.8	H	-2.26	47.93	54	-6.07
5460	64.06	PK	336	2.3	V	-2.26	61.8	74	-12.2
5460	50.15	AV	336	2.3	V	-2.26	47.89	54	-6.11

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5240 MHz									
RU242#61									
5350	63.95	PK	162	1.1	H	-2.33	61.62	74	-12.38
5350	50.37	AV	162	1.1	H	-2.33	48.04	54	-5.96
5350	63.94	PK	238	2	V	-2.33	61.61	74	-12.39
5350	50.28	AV	238	2	V	-2.33	47.95	54	-6.05
5460	64.51	PK	207	1.5	H	-2.26	62.25	74	-11.75
5460	50.31	AV	207	1.5	H	-2.26	48.05	54	-5.95
5460	64.11	PK	71	1.4	V	-2.26	61.85	74	-12.15
5460	50.24	AV	71	1.4	V	-2.26	47.98	54	-6.02
RU26#0									
10480	54.47	PK	257	1.1	H	8.56	63.03	68.2	-5.17
10480	58.25	PK	283	1.5	V	8.56	66.81	68.2	-1.39

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX40(worst case MIMO)									
5190 MHz									
RU26#0									
4500	62.92	PK	295	1.5	H	-4.72	58.2	74	-15.8
4500	50.65	AV	295	1.5	H	-4.72	45.93	54	-8.07
4500	63.06	PK	143	1.7	V	-4.72	58.34	74	-15.66
4500	50.78	AV	143	1.7	V	-4.72	46.06	54	-7.94
5150	71.47	PK	209	2.4	H	-2.73	68.74	74	-5.26
5150	52.24	AV	209	2.4	H	-2.73	49.51	54	-4.49
5150	65.78	PK	316	2.2	V	-2.73	63.05	74	-10.95
5150	51.53	AV	316	2.2	V	-2.73	48.8	54	-5.2
RU52#37									
4500	63.08	PK	225	1.6	H	-4.72	58.36	74	-15.64
4500	50.74	AV	225	1.6	H	-4.72	46.02	54	-7.98
4500	63.2	PK	133	1.2	V	-4.72	58.48	74	-15.52
4500	50.57	AV	133	1.2	V	-4.72	45.85	54	-8.15
5150	71.23	PK	122	2.4	H	-2.73	68.5	74	-5.5
5150	52.45	AV	122	2.4	H	-2.73	49.72	54	-4.28
5150	66.03	PK	294	1.7	V	-2.73	63.3	74	-10.7
5150	51.56	AV	294	1.7	V	-2.73	48.83	54	-5.17
RU106#53									
4500	63.21	PK	135	1.1	H	-4.72	58.49	74	-15.51
4500	50.57	AV	135	1.1	H	-4.72	45.85	54	-8.15
4500	62.94	PK	94	2.4	V	-4.72	58.22	74	-15.78
4500	50.85	AV	94	2.4	V	-4.72	46.13	54	-7.87
5150	66.75	PK	92	1.2	H	-2.73	64.02	74	-9.98
5150	51.96	AV	92	1.2	H	-2.73	49.23	54	-4.77
5150	64.86	PK	47	1.7	V	-2.73	62.13	74	-11.87
5150	51.48	AV	47	1.7	V	-2.73	48.75	54	-5.25
RU242#61									
4500	62.65	PK	276	1	H	-4.72	57.93	74	-16.07
4500	50.66	AV	276	1	H	-4.72	45.94	54	-8.06
4500	63.07	PK	354	2.4	V	-4.72	58.35	74	-15.65
4500	50.69	AV	354	2.4	V	-4.72	45.97	54	-8.03
5150	70.08	PK	32	1.6	H	-2.73	67.35	74	-6.65
5150	52.14	AV	32	1.6	H	-2.73	49.41	54	-4.59
5150	65.1	PK	253	2.2	V	-2.73	62.37	74	-11.63
5150	51.42	AV	253	2.2	V	-2.73	48.69	54	-5.31

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5190 MHz									
RU484#65									
4500	62.73	PK	10	1.3	H	-4.72	58.01	74	-15.99
4500	50.83	AV	10	1.3	H	-4.72	46.11	54	-7.89
4500	62.87	PK	68	1.9	V	-4.72	58.15	74	-15.85
4500	50.82	AV	68	1.9	V	-4.72	46.1	54	-7.9
5150	66.78	PK	139	2.1	H	-2.73	64.05	74	-9.95
5150	55.27	AV	139	2.1	H	-2.73	52.54	54	-1.46
5150	64.79	PK	225	1.6	V	-2.73	62.06	74	-11.94
5150	53.76	AV	225	1.6	V	-2.73	51.03	54	-2.97
RU26#0									
10380	53.77	PK	336	2	H	8.18	61.95	68.2	-6.25
10380	55.92	PK	147	1.9	V	8.18	64.1	68.2	-4.1
5230 MHz									
RU26#17									
5350	64.32	PK	275	1.9	H	-2.33	61.99	74	-12.01
5350	51.18	AV	275	1.9	H	-2.33	48.85	54	-5.15
5350	64.07	PK	221	1.1	V	-2.33	61.74	74	-12.26
5350	51.36	AV	221	1.1	V	-2.33	49.03	54	-4.97
5460	64.34	PK	285	1.4	H	-2.26	62.08	74	-11.92
5460	51.45	AV	285	1.4	H	-2.26	49.19	54	-4.81
5460	63.95	PK	86	1	V	-2.26	61.69	74	-12.31
5460	51.53	AV	86	1	V	-2.26	49.27	54	-4.73
RU52#44									
5350	60.79	PK	159	2.4	H	-2.33	58.46	74	-15.54
5350	48.39	AV	159	2.4	H	-2.33	46.06	54	-7.94
5350	60.29	PK	259	1.5	V	-2.33	57.96	74	-16.04
5350	48.37	AV	259	1.5	V	-2.33	46.04	54	-7.96
5460	70.91	PK	243	1.6	H	-2.26	68.65	74	-5.35
5460	52.09	AV	243	1.6	H	-2.26	49.83	54	-4.17
5460	65.3	PK	304	1.7	V	-2.26	63.04	74	-10.96
5460	51.14	AV	304	1.7	V	-2.26	48.88	54	-5.12

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5230 MHz									
RU106#56									
5350	64.34	PK	67	1.8	H	-2.33	62.01	74	-11.99
5350	51.15	AV	67	1.8	H	-2.33	48.82	54	-5.18
5350	64.22	PK	210	2	V	-2.33	61.89	74	-12.11
5350	51.14	AV	210	2	V	-2.33	48.81	54	-5.19
5460	64.58	PK	238	1.7	H	-2.26	62.32	74	-11.68
5460	51.47	AV	238	1.7	H	-2.26	49.21	54	-4.79
5460	63.72	PK	82	1.2	V	-2.26	61.46	74	-12.54
5460	51.49	AV	82	1.2	V	-2.26	49.23	54	-4.77
RU242#62									
5350	64.94	PK	63	2.4	H	-2.33	62.61	74	-11.39
5350	51.24	AV	63	2.4	H	-2.33	48.91	54	-5.09
5350	65.35	PK	66	1.4	V	-2.33	63.02	74	-10.98
5350	51.13	AV	66	1.4	V	-2.33	48.8	54	-5.2
5460	64.18	PK	123	1.8	H	-2.26	61.92	74	-12.08
5460	51.44	AV	123	1.8	H	-2.26	49.18	54	-4.82
5460	63.94	PK	315	1.8	V	-2.26	61.68	74	-12.32
5460	51.54	AV	315	1.8	V	-2.26	49.28	54	-4.72
RU484#65									
5350	64.98	PK	184	2.2	H	-2.33	62.65	74	-11.35
5350	51.26	AV	184	2.2	H	-2.33	48.93	54	-5.07
5350	65.1	PK	108	1.7	V	-2.33	62.77	74	-11.23
5350	51.33	AV	108	1.7	V	-2.33	49	54	-5
5460	64.3	PK	73	1.4	H	-2.26	62.04	74	-11.96
5460	51.34	AV	73	1.4	H	-2.26	49.08	54	-4.92
5460	63.99	PK	114	2	V	-2.26	61.73	74	-12.27
5460	51.53	AV	114	2	V	-2.26	49.27	54	-4.73
RU26#0									
10460	53.45	PK	66	1.8	H	8.47	61.92	68.2	-6.28
10460	55.21	PK	46	1.8	V	8.47	63.68	68.2	-4.52

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX80(worst case MIMO)									
5210 MHz									
RU26#0									
4500	63.16	PK	236	1.4	H	-4.72	58.44	74	-15.56
4500	51.8	AV	236	1.4	H	-4.72	47.08	54	-6.92
4500	63.42	PK	223	1.6	V	-4.72	58.7	74	-15.3
4500	51.78	AV	223	1.6	V	-4.72	47.06	54	-6.94
5150	70.03	PK	3	2.3	H	-2.73	67.3	74	-6.7
5150	54.47	AV	3	2.3	H	-2.73	51.74	54	-2.26
5150	65.88	PK	42	1.7	V	-2.73	63.15	74	-10.85
5150	53.02	AV	42	1.7	V	-2.73	50.29	54	-3.71
RU26#36									
5350	65.38	PK	153	2.5	H	-2.33	63.05	74	-10.95
5350	52.03	AV	153	2.5	H	-2.33	49.7	54	-4.3
5350	65.01	PK	297	2.2	V	-2.33	62.68	74	-11.32
5350	51.98	AV	297	2.2	V	-2.33	49.65	54	-4.35
5460	64.57	PK	137	1.6	H	-2.26	62.31	74	-11.69
5460	52.34	AV	137	1.6	H	-2.26	50.08	54	-3.92
5460	64.04	PK	294	2.3	V	-2.26	61.78	74	-12.22
5460	52.16	AV	294	2.3	V	-2.26	49.9	54	-4.1
RU52#37									
4500	62.96	PK	233	1.4	H	-4.72	58.24	74	-15.76
4500	51.72	AV	233	1.4	H	-4.72	47	54	-7
4500	62.62	PK	204	1.6	V	-4.72	57.9	74	-16.1
4500	51.74	AV	204	1.6	V	-4.72	47.02	54	-6.98
5150	66.88	PK	241	2.4	H	-2.73	64.15	74	-9.85
5150	54.53	AV	241	2.4	H	-2.73	51.8	54	-2.2
5150	64.83	PK	139	2.3	V	-2.73	62.1	74	-11.9
5150	52.8	AV	139	2.3	V	-2.73	50.07	54	-3.93
RU52#52									
5350	64.98	PK	61	2.1	H	-2.33	62.65	74	-11.35
5350	52.08	AV	61	2.1	H	-2.33	49.75	54	-4.25
5350	65.33	PK	328	1.9	V	-2.33	63	74	-11
5350	52.07	AV	328	1.9	V	-2.33	49.74	54	-4.26
5460	64.53	PK	109	2.1	H	-2.26	62.27	74	-11.73
5460	52.42	AV	109	2.1	H	-2.26	50.16	54	-3.84
5460	64	PK	262	1.4	V	-2.26	61.74	74	-12.26
5460	52.17	AV	262	1.4	V	-2.26	49.91	54	-4.09

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5210 MHz									
RU106#53									
4500	62.56	PK	330	1.3	H	-4.72	57.84	74	-16.16
4500	51.84	AV	330	1.3	H	-4.72	47.12	54	-6.88
4500	62.96	PK	60	1.8	V	-4.72	58.24	74	-15.76
4500	51.77	AV	60	1.8	V	-4.72	47.05	54	-6.95
5150	65.97	PK	116	1.9	H	-2.73	63.24	74	-10.76
5150	53.36	AV	116	1.9	H	-2.73	50.63	54	-3.37
5150	65.01	PK	73	1.8	V	-2.73	62.28	74	-11.72
5150	53.12	AV	73	1.8	V	-2.73	50.39	54	-3.61
RU106#60									
5350	65.3	PK	170	1.7	H	-2.33	62.97	74	-11.03
5350	52.13	AV	170	1.7	H	-2.33	49.8	54	-4.2
5350	65.11	PK	52	1.2	V	-2.33	62.78	74	-11.22
5350	51.96	AV	52	1.2	V	-2.33	49.63	54	-4.37
5460	64.47	PK	134	2	H	-2.26	62.21	74	-11.79
5460	52.35	AV	134	2	H	-2.26	50.09	54	-3.91
5460	63.67	PK	322	1.4	V	-2.26	61.41	74	-12.59
5460	52.42	AV	322	1.4	V	-2.26	50.16	54	-3.84
RU242#61									
4500	63.1	PK	61	2.4	H	-4.72	58.38	74	-15.62
4500	51.68	AV	61	2.4	H	-4.72	46.96	54	-7.04
4500	63.46	PK	72	1.8	V	-4.72	58.74	74	-15.26
4500	51.59	AV	72	1.8	V	-4.72	46.87	54	-7.13
5150	64.94	PK	267	2.4	H	-2.73	62.21	74	-11.79
5150	51.67	AV	267	2.4	H	-2.73	48.94	54	-5.06
5150	64	PK	322	2.5	V	-2.73	61.27	74	-12.73
5150	51.66	AV	322	2.5	V	-2.73	48.93	54	-5.07
RU242#64									
5350	64.41	PK	282	2.5	H	-2.33	62.08	74	-11.92
5350	49.87	AV	282	2.5	H	-2.33	47.54	54	-6.46
5350	64.67	PK	335	2	V	-2.33	62.34	74	-11.66
5350	50.02	AV	335	2	V	-2.33	47.69	54	-6.31
5460	65.17	PK	20	2.2	H	-2.26	62.91	74	-11.09
5460	50.7	AV	20	2.2	H	-2.26	48.44	54	-5.56
5460	64.83	PK	144	1.2	V	-2.26	62.57	74	-11.43
5460	50.89	AV	144	1.2	V	-2.26	48.63	54	-5.37

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5210 MHz									
RU484#65									
4500	62.95	PK	190	1.2	H	-4.72	58.23	74	-15.77
4500	51.81	AV	190	1.2	H	-4.72	47.09	54	-6.91
4500	62.82	PK	163	2.3	V	-4.72	58.1	74	-15.9
4500	51.65	AV	163	2.3	V	-4.72	46.93	54	-7.07
5150	64.94	PK	57	2.1	H	-2.73	62.21	74	-11.79
5150	53.07	AV	57	2.1	H	-2.73	50.34	54	-3.66
5150	64.11	PK	110	1.7	V	-2.73	61.38	74	-12.62
5150	52.83	AV	110	1.7	V	-2.73	50.1	54	-3.9
RU484#66									
5350	65.09	PK	272	1.9	H	-2.33	62.76	74	-11.24
5350	52.08	AV	272	1.9	H	-2.33	49.75	54	-4.25
5350	65.11	PK	137	2.1	V	-2.33	62.78	74	-11.22
5350	52.16	AV	137	2.1	V	-2.33	49.83	54	-4.17
5460	64.44	PK	135	1.5	H	-2.26	62.18	74	-11.82
5460	52.37	AV	135	1.5	H	-2.26	50.11	54	-3.89
5460	63.91	PK	284	1.8	V	-2.26	61.65	74	-12.35
5460	52.28	AV	284	1.8	V	-2.26	50.02	54	-3.98
RU996#67									
4500	63.1	PK	84	1.3	H	-4.72	58.38	74	-15.62
4500	51.92	AV	84	1.3	H	-4.72	47.2	54	-6.8
4500	62.99	PK	242	1.3	V	-4.72	58.27	74	-15.73
4500	51.81	AV	242	1.3	V	-4.72	47.09	54	-6.91
5150	65.15	PK	323	1.1	H	-2.73	62.42	74	-11.58
5150	53.2	AV	323	1.1	H	-2.73	50.47	54	-3.53
5150	65.02	PK	177	2.2	V	-2.73	62.29	74	-11.71
5150	53.01	AV	177	2.2	V	-2.73	50.28	54	-3.72
5350	65.21	PK	229	1.9	H	-2.33	62.88	74	-11.12
5350	51.98	AV	229	1.9	H	-2.33	49.65	54	-4.35
5350	65.02	PK	1	2.4	V	-2.33	62.69	74	-11.31
5350	52.21	AV	1	2.4	V	-2.33	49.88	54	-4.12
5460	64.36	PK	303	2.5	H	-2.26	62.1	74	-11.9
5460	52.27	AV	303	2.5	H	-2.26	50.01	54	-3.99
5460	64.01	PK	244	2.5	V	-2.26	61.75	74	-12.25
5460	52.37	AV	244	2.5	V	-2.26	50.11	54	-3.89
RU26#0									
10420	51.98	PK	187	2.4	H	8.32	60.3	68.2	-7.9
10420	55.18	PK	134	1.5	V	8.32	63.5	68.2	-4.7

5250-5350 MHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11a(worst case antenna 0)									
5260MHz									
4500	63.34	PK	244	1.4	H	-4.72	58.62	74	-15.38
4500	50.25	AV	244	1.4	H	-4.72	45.53	54	-8.47
4500	63.22	PK	245	1.2	V	-4.72	58.5	74	-15.5
4500	50.14	AV	245	1.2	V	-4.72	45.42	54	-8.58
5150	64.17	PK	301	2	H	-2.73	61.44	74	-12.56
5150	50.49	AV	301	2	H	-2.73	47.76	54	-6.24
5150	64.06	PK	210	2	V	-2.73	61.33	74	-12.67
5150	50.38	AV	210	2	V	-2.73	47.65	54	-6.35
10520	41.13	PK	36	1.4	H	8.65	49.78	68.2	-18.42
10520	40.62	PK	255	2.3	V	8.65	49.27	68.2	-18.93
5280 MHz									
10560	42.07	PK	44	2.4	H	8.69	50.76	68.2	-17.44
10560	41.5	PK	239	1.2	V	8.69	50.19	68.2	-18.01
5320 MHz									
5350	64.64	PK	254	1.8	H	-2.33	62.31	74	-11.69
5350	51.07	AV	254	1.8	H	-2.33	48.74	54	-5.26
5350	64.53	PK	275	1.9	V	-2.33	62.2	74	-11.8
5350	50.98	AV	275	1.9	V	-2.33	48.65	54	-5.35
5460	63.4	PK	1	2.4	H	-2.26	61.14	74	-12.86
5460	50.97	AV	1	2.4	H	-2.26	48.71	54	-5.29
5460	63.31	PK	96	2.1	V	-2.26	61.05	74	-12.95
5460	50.88	AV	96	2.1	V	-2.26	48.62	54	-5.38
10640	42.6	PK	92	1.1	H	8.92	51.52	74	-22.48
10640	42.02	PK	269	1.7	V	8.92	50.94	74	-23.06

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20(worst case MIMO)									
5260MHz									
4500	63.25	PK	181	1	H	-4.72	58.53	74	-15.47
4500	50.14	AV	181	1	H	-4.72	45.42	54	-8.58
4500	63.13	PK	348	2	V	-4.72	58.41	74	-15.59
4500	50.05	AV	348	2	V	-4.72	45.33	54	-8.67
5150	64.05	PK	282	1.6	H	-2.73	61.32	74	-12.68
5150	50.49	AV	282	1.6	H	-2.73	47.76	54	-6.24
5150	63.96	PK	231	2.2	V	-2.73	61.23	74	-12.77
5150	50.37	AV	231	2.2	V	-2.73	47.64	54	-6.36
10520	41.37	PK	355	1.3	H	8.65	50.02	68.2	-18.18
10520	41.06	PK	357	1.3	V	8.65	49.71	68.2	-18.49
5280 MHz									
10560	42.2	PK	132	1.2	H	8.69	50.89	68.2	-17.31
10560	41.93	PK	254	2.4	V	8.69	50.62	68.2	-17.58
5320 MHz									
5350	64.56	PK	88	2.4	H	-2.33	62.23	74	-11.77
5350	50.95	AV	88	2.4	H	-2.33	48.62	54	-5.38
5350	64.47	PK	268	1.5	V	-2.33	62.14	74	-11.86
5350	50.86	AV	268	1.5	V	-2.33	48.53	54	-5.47
5460	63.32	PK	294	2.1	H	-2.26	61.06	74	-12.94
5460	50.85	AV	294	2.1	H	-2.26	48.59	54	-5.41
5460	63.21	PK	98	2.4	V	-2.26	60.95	74	-13.05
5460	50.76	AV	98	2.4	V	-2.26	48.5	54	-5.5
10640	42.83	PK	201	1.1	H	8.92	51.75	74	-22.25
10640	42.48	PK	275	1.6	V	8.92	51.4	74	-22.6

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N40(worst case MIMO)									
5270 MHZ									
4500	63.4	PK	32	1	H	-4.72	58.68	74	-15.32
4500	50.63	AV	32	1	H	-4.72	45.91	54	-8.09
4500	63.31	PK	12	1.5	V	-4.72	58.59	74	-15.41
4500	50.52	AV	12	1.5	V	-4.72	45.8	54	-8.2
5150	64.08	PK	38	2.1	H	-2.73	61.35	74	-12.65
5150	50.92	AV	38	2.1	H	-2.73	48.19	54	-5.81
5150	63.95	PK	158	2.4	V	-2.73	61.22	74	-12.78
5150	50.81	AV	158	2.4	V	-2.73	48.08	54	-5.92
10540	41.95	PK	113	2	H	8.65	50.6	68.2	-17.6
10540	41.79	PK	248	2.5	V	8.65	50.44	68.2	-17.76
5310 MHZ									
5350	66.8	PK	81	1.3	H	-2.33	64.47	74	-9.53
5350	51.86	AV	81	1.3	H	-2.33	49.53	54	-4.47
5350	70.61	PK	254	2.5	V	-2.33	68.28	74	-5.72
5350	52.37	AV	254	2.5	V	-2.33	50.04	54	-3.96
5460	63.29	PK	16	2.1	H	-2.26	61.03	74	-12.97
5460	51.41	AV	16	2.1	H	-2.26	49.15	54	-4.85
5460	63.65	PK	217	1.9	V	-2.26	61.39	74	-12.61
5460	51.54	AV	217	1.9	V	-2.26	49.28	54	-4.72
10620	42.55	PK	37	1.9	H	8.89	51.44	74	-22.56
10620	42.4	PK	180	2.1	V	8.89	51.29	74	-22.71

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AC20(worst case MIMO)									
5260 MHz									
4500	63.24	PK	255	1.2	H	-4.72	58.52	74	-15.48
4500	49.51	AV	255	1.2	H	-4.72	44.79	54	-9.21
4500	63.13	PK	34	2.2	V	-4.72	58.41	74	-15.59
4500	49.42	AV	34	2.2	V	-4.72	44.7	54	-9.3
5150	63.87	PK	325	2.4	H	-2.73	61.14	74	-12.86
5150	49.49	AV	325	2.4	H	-2.73	46.76	54	-7.24
5150	63.78	PK	16	1.3	V	-2.73	61.05	74	-12.95
5150	49.37	AV	16	1.3	V	-2.73	46.64	54	-7.36
10520	41.04	PK	196	2.4	H	8.65	49.69	68.2	-18.51
10520	41.58	PK	290	1.1	V	8.65	50.23	68.2	-17.97
5280 MHz									
10560	41.95	PK	318	1	H	8.69	50.64	68.2	-17.56
10560	42.47	PK	15	1.4	V	8.69	51.16	68.2	-17.04
5320 MHz									
5350	64.66	PK	137	1.1	H	-2.33	62.33	74	-11.67
5350	50.1	AV	137	1.1	H	-2.33	47.77	54	-6.23
5350	64.55	PK	243	2.1	V	-2.33	62.22	74	-11.78
5350	50.01	AV	243	2.1	V	-2.33	47.68	54	-6.32
5460	63.48	PK	89	2	H	-2.26	61.22	74	-12.78
5460	50.09	AV	89	2	H	-2.26	47.83	54	-6.17
5460	63.37	PK	196	2.4	V	-2.26	61.11	74	-12.89
5460	50	AV	196	2.4	V	-2.26	47.74	54	-6.26
10640	42.54	PK	18	2.1	H	8.92	51.46	74	-22.54
10640	42.83	PK	269	2.3	V	8.92	51.75	74	-22.25
802.11AC40(worst case MIMO)									
5270 MHz									
4500	63.31	PK	240	2.3	H	-4.72	58.59	74	-15.41
4500	48.43	AV	240	2.3	H	-4.72	43.71	54	-10.29
4500	63.2	PK	257	2	V	-4.72	58.48	74	-15.52
4500	48.32	AV	257	2	V	-4.72	43.6	54	-10.4
5150	64.01	PK	247	2.3	H	-2.73	61.28	74	-12.72
5150	49.59	AV	247	2.3	H	-2.73	46.86	54	-7.14
5150	63.9	PK	23	2.4	V	-2.73	61.17	74	-12.83
5150	49.48	AV	23	2.4	V	-2.73	46.75	54	-7.25
10540	41.75	PK	75	2.5	H	8.65	50.4	68.2	-17.8
10540	42.04	PK	342	2.1	V	8.65	50.69	68.2	-17.51
5310 MHz									
5350	67.76	PK	143	2.4	H	-2.33	65.43	74	-8.57
5350	50.55	AV	143	2.4	H	-2.33	48.22	54	-5.78
5350	71.77	PK	157	2.2	V	-2.33	69.44	74	-4.56
5350	51.41	AV	157	2.2	V	-2.33	49.08	54	-4.92
5460	63.45	PK	203	1.3	H	-2.26	61.19	74	-12.81
5460	50.31	AV	203	1.3	H	-2.26	48.05	54	-5.95
5460	63.67	PK	334	1	V	-2.26	61.41	74	-12.59
5460	50.44	AV	334	1	V	-2.26	48.18	54	-5.82
10620	42.74	PK	326	1.2	H	8.89	51.63	74	-22.37
10620	42.43	PK	360	1.8	V	8.89	51.32	74	-22.68

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AC80(worst case MIMO)									
5290 MHz									
4500	63.1	PK	49	2	H	-4.72	58.38	74	-15.62
4500	49.54	AV	49	2	H	-4.72	44.82	54	-9.18
4500	62.99	PK	122	1.6	V	-4.72	58.27	74	-15.73
4500	49.43	AV	122	1.6	V	-4.72	44.71	54	-9.29
5150	63.88	PK	161	2.4	H	-2.73	61.15	74	-12.85
5150	49.92	AV	161	2.4	H	-2.73	47.19	54	-6.81
5150	63.76	PK	330	1.2	V	-2.73	61.03	74	-12.97
5150	49.81	AV	330	1.2	V	-2.73	47.08	54	-6.92
5350	67.19	PK	94	1.1	H	-2.33	64.86	74	-9.14
5350	51	AV	94	1.1	H	-2.33	48.67	54	-5.33
5350	71.75	PK	344	1.9	V	-2.33	69.42	74	-4.58
5350	53.83	AV	344	1.9	V	-2.33	51.5	54	-2.5
5460	63.49	PK	216	1.6	H	-2.26	61.23	74	-12.77
5460	50.4	AV	216	1.6	H	-2.26	48.14	54	-5.86
5460	63.77	PK	119	2.1	V	-2.26	61.51	74	-12.49
5460	50.58	AV	119	2.1	V	-2.26	48.32	54	-5.68
10580	42.41	PK	118	1.3	H	8.77	51.18	68.2	-17.02
10580	42.18	PK	268	2.2	V	8.77	50.95	68.2	-17.25

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX20(worst case MIMO)									
5260 MHz									
RU26#0									
4500	63.02	PK	191	1.6	H	-4.72	58.3	74	-15.7
4500	50.32	AV	191	1.6	H	-4.72	45.6	54	-8.4
4500	63.42	PK	306	1.9	V	-4.72	58.7	74	-15.3
4500	50.11	AV	306	1.9	V	-4.72	45.39	54	-8.61
5150	63.35	PK	264	2	H	-2.73	60.62	74	-13.38
5150	50.53	AV	264	2	H	-2.73	47.8	54	-6.2
5150	63.36	PK	65	2.1	V	-2.73	60.63	74	-13.37
5150	50.61	AV	65	2.1	V	-2.73	47.88	54	-6.12
RU52#37									
4500	71.07	PK	20	2.1	H	-4.72	66.35	74	-7.65
4500	54.7	AV	20	2.1	H	-4.72	49.98	54	-4.02
4500	69.34	PK	219	2.5	V	-4.72	64.62	74	-9.38
4500	54.46	AV	219	2.5	V	-4.72	49.74	54	-4.26
5150	64.86	PK	203	2.2	H	-2.73	62.13	74	-11.87
5150	51.14	AV	203	2.2	H	-2.73	48.41	54	-5.59
5150	64.55	PK	13	1.6	V	-2.73	61.82	74	-12.18
5150	51.38	AV	13	1.6	V	-2.73	48.65	54	-5.35
RU106#53									
4500	62.57	PK	26	1.9	H	-4.72	57.85	74	-16.15
4500	50.11	AV	26	1.9	H	-4.72	45.39	54	-8.61
4500	63.06	PK	98	1.5	V	-4.72	58.34	74	-15.66
4500	50.29	AV	98	1.5	V	-4.72	45.57	54	-8.43
5150	63.3	PK	315	2.1	H	-2.73	60.57	74	-13.43
5150	50.39	AV	315	2.1	H	-2.73	47.66	54	-6.34
5150	63.37	PK	4	2.2	V	-2.73	60.64	74	-13.36
5150	50.21	AV	4	2.2	V	-2.73	47.48	54	-6.52
RU242#61									
4500	63.49	PK	302	1.8	H	-4.72	58.77	74	-15.23
4500	50.19	AV	302	1.8	H	-4.72	45.47	54	-8.53
4500	62.66	PK	197	2.2	V	-4.72	57.94	74	-16.06
4500	50.1	AV	197	2.2	V	-4.72	45.38	54	-8.62
5150	63.16	PK	243	1.6	H	-2.73	60.43	74	-13.57
5150	50.45	AV	243	1.6	H	-2.73	47.72	54	-6.28
5150	63.4	PK	14	1.6	V	-2.73	60.67	74	-13.33
5150	50.59	AV	14	1.6	V	-2.73	47.86	54	-6.14

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5260 MHz									
RU26#0									
10520	53.2	PK	131	1.3	H	8.65	61.85	68.2	-6.35
10520	57.96	PK	151	2.1	V	8.65	66.61	68.2	-1.59
5280 MHz									
RU26#0									
10560	53.93	PK	12	1.9	H	8.69	62.62	68.2	-5.58
10560	58.47	PK	241	1.2	V	8.69	67.16	68.2	-1.04
5320 MHz									
RU26#8									
5350	68.56	PK	356	2.3	H	-2.33	66.23	74	-7.77
5350	52.12	AV	356	2.3	H	-2.33	49.79	54	-4.21
5350	67.34	PK	307	2.3	V	-2.33	65.01	74	-8.99
5350	52.22	AV	307	2.3	V	-2.33	49.89	54	-4.11
5460	64.16	PK	266	1.2	H	-2.26	61.9	74	-12.1
5460	50.68	AV	266	1.2	H	-2.26	48.42	54	-5.58
5460	63.75	PK	224	1.2	V	-2.26	61.49	74	-12.51
5460	50.86	AV	224	1.2	V	-2.26	48.6	54	-5.4
RU52#40									
5350	68.79	PK	323	1.2	H	-2.33	66.46	74	-7.54
5350	52.03	AV	323	1.2	H	-2.33	49.7	54	-4.3
5350	67.08	PK	209	1.1	V	-2.33	64.75	74	-9.25
5350	52.36	AV	209	1.1	V	-2.33	50.03	54	-3.97
5460	64.29	PK	297	1.7	H	-2.26	62.03	74	-11.97
5460	50.65	AV	297	1.7	H	-2.26	48.39	54	-5.61
5460	63.68	PK	328	1.7	V	-2.26	61.42	74	-12.58
5460	50.93	AV	328	1.7	V	-2.26	48.67	54	-5.33
RU106#54									
5350	71.19	PK	223	1.5	H	-2.33	68.86	74	-5.14
5350	52.13	AV	223	1.5	H	-2.33	49.8	54	-4.2
5350	67.21	PK	302	2.3	V	-2.33	64.88	74	-9.12
5350	51.95	AV	302	2.3	V	-2.33	49.62	54	-4.38
5460	64.59	PK	316	1.1	H	-2.26	62.33	74	-11.67
5460	50.64	AV	316	1.1	H	-2.26	48.38	54	-5.62
5460	63.86	PK	237	2.3	V	-2.26	61.6	74	-12.4
5460	50.66	AV	237	2.3	V	-2.26	48.4	54	-5.6

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5320 MHz									
RU242#61									
5350	64.98	PK	36	2.4	H	-2.33	62.65	74	-11.35
5350	51.75	AV	36	2.4	H	-2.33	49.42	54	-4.58
5350	64.03	PK	154	1.9	V	-2.33	61.7	74	-12.3
5350	51.89	AV	154	1.9	V	-2.33	49.56	54	-4.44
5460	64.24	PK	277	2.2	H	-2.26	61.98	74	-12.02
5460	50.83	AV	277	2.2	H	-2.26	48.57	54	-5.43
5460	64.12	PK	166	2	V	-2.26	61.86	74	-12.14
5460	50.65	AV	166	2	V	-2.26	48.39	54	-5.61
RU26#0									
10640	53.76	PK	292	1.3	H	8.92	62.68	74	-11.32
10640	39.45	AV	292	1.3	H	8.92	48.37	54	-5.63
10640	59.37	PK	279	2.4	V	8.92	68.29	74	-5.71
10640	43.81	AV	279	2.4	V	8.92	52.73	54	-1.27

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX40(worst case MIMO)									
5270 MHz									
RU26#0									
4500	63.15	PK	357	2	H	-4.72	58.43	74	-15.57
4500	50.08	AV	357	2	H	-4.72	45.36	54	-8.64
4500	63.49	PK	223	1.1	V	-4.72	58.77	74	-15.23
4500	50.36	AV	223	1.1	V	-4.72	45.64	54	-8.36
5150	63.26	PK	206	1.4	H	-2.73	60.53	74	-13.47
5150	50.3	AV	206	1.4	H	-2.73	47.57	54	-6.43
5150	63.21	PK	11	1.6	V	-2.73	60.48	74	-13.52
5150	50.37	AV	11	1.6	V	-2.73	47.64	54	-6.36
RU52#37									
4500	63.24	PK	66	1.5	H	-4.72	58.52	74	-15.48
4500	50.47	AV	66	1.5	H	-4.72	45.75	54	-8.25
4500	63.13	PK	153	2.2	V	-4.72	58.41	74	-15.59
4500	50.39	AV	153	2.2	V	-4.72	45.67	54	-8.33
5150	63.59	PK	104	2.2	H	-2.73	60.86	74	-13.14
5150	51.07	AV	104	2.2	H	-2.73	48.34	54	-5.66
5150	63.5	PK	217	1.1	V	-2.73	60.77	74	-13.23
5150	50.95	AV	217	1.1	V	-2.73	48.22	54	-5.78
RU106#53									
4500	63.1	PK	307	1.5	H	-4.72	58.38	74	-15.62
4500	50.48	AV	307	1.5	H	-4.72	45.76	54	-8.24
4500	63.01	PK	141	1	V	-4.72	58.29	74	-15.71
4500	50.39	AV	141	1	V	-4.72	45.67	54	-8.33
5150	63.39	PK	223	1.5	H	-2.73	60.66	74	-13.34
5150	50.94	AV	223	1.5	H	-2.73	48.21	54	-5.79
5150	63.2	PK	338	1.6	V	-2.73	60.47	74	-13.53
5150	50.78	AV	338	1.6	V	-2.73	48.05	54	-5.95
RU242#61									
4500	63.34	PK	58	1.6	H	-4.72	58.62	74	-15.38
4500	50.77	AV	58	1.6	H	-4.72	46.05	54	-7.95
4500	63.23	PK	178	1.7	V	-4.72	58.51	74	-15.49
4500	50.71	AV	178	1.7	V	-4.72	45.99	54	-8.01
5150	63.32	PK	263	1.5	H	-2.73	60.59	74	-13.41
5150	50.95	AV	263	1.5	H	-2.73	48.22	54	-5.78
5150	63.19	PK	216	1.5	V	-2.73	60.46	74	-13.54
5150	50.85	AV	216	1.5	V	-2.73	48.12	54	-5.88

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5270 MHz									
RU484#65									
4500	63.43	PK	61	2.2	H	-4.72	58.71	74	-15.29
4500	50.61	AV	61	2.2	H	-4.72	45.89	54	-8.11
4500	63.34	PK	326	1.4	V	-4.72	58.62	74	-15.38
4500	50.52	AV	326	1.4	V	-4.72	45.8	54	-8.2
5150	63.54	PK	82	1.5	H	-2.73	60.81	74	-13.19
5150	50.87	AV	82	1.5	H	-2.73	48.14	54	-5.86
5150	63.42	PK	24	2.4	V	-2.73	60.69	74	-13.31
5150	50.75	AV	24	2.4	V	-2.73	48.02	54	-5.98
RU26#0									
10540	53.36	PK	54	1.2	H	8.65	62.01	68.2	-6.19
10540	57.64	PK	113	1.2	V	8.65	66.29	68.2	-1.91
5310 MHz									
RU26#17									
5350	73.92	PK	220	2	H	-2.33	71.59	74	-2.41
5350	53	AV	220	2	H	-2.33	50.67	54	-3.33
5350	70.15	PK	97	2.3	V	-2.33	67.82	74	-6.18
5350	52.54	AV	97	2.3	V	-2.33	50.21	54	-3.79
5460	64.62	PK	121	1.5	H	-2.26	62.36	74	-11.64
5460	51.33	AV	121	1.5	H	-2.26	49.07	54	-4.93
5460	64.62	PK	42	1.2	V	-2.26	62.36	74	-11.64
5460	51.33	AV	42	1.2	V	-2.26	49.07	54	-4.93
RU52#44									
5350	74.47	PK	7	2.4	H	-2.33	72.14	74	-1.86
5350	52.64	AV	7	2.4	H	-2.33	50.31	54	-3.69
5350	71.06	PK	334	1.8	V	-2.33	68.73	74	-5.27
5350	51.7	AV	334	1.8	V	-2.33	49.37	54	-4.63
5460	63.96	PK	213	1.6	H	-2.26	61.7	74	-12.3
5460	51.5	AV	213	1.6	H	-2.26	49.24	54	-4.76
5460	63.82	PK	300	1.3	V	-2.26	61.56	74	-12.44
5460	51.39	AV	300	1.3	V	-2.26	49.13	54	-4.87

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5310 MHz									
RU106#56									
5350	71.87	PK	2	2.2	H	-2.33	69.54	74	-4.46
5350	52.18	AV	2	2.2	H	-2.33	49.85	54	-4.15
5350	68.6	PK	240	1	V	-2.33	66.27	74	-7.73
5350	51.69	AV	240	1	V	-2.33	49.36	54	-4.64
5460	63.77	PK	65	1.7	H	-2.26	61.51	74	-12.49
5460	51.64	AV	65	1.7	H	-2.26	49.38	54	-4.62
5460	63.62	PK	158	2	V	-2.26	61.36	74	-12.64
5460	51.45	AV	158	2	V	-2.26	49.19	54	-4.81
RU242#62									
5350	71.75	PK	152	1	H	-2.33	69.42	74	-4.58
5350	53	AV	152	1	H	-2.33	50.67	54	-3.33
5350	67.88	PK	6	1.9	V	-2.33	65.55	74	-8.45
5350	52.09	AV	6	1.9	V	-2.33	49.76	54	-4.24
5460	63.84	PK	72	2	H	-2.26	61.58	74	-12.42
5460	51.65	AV	72	2	H	-2.26	49.39	54	-4.61
5460	63.72	PK	265	1.6	V	-2.26	61.46	74	-12.54
5460	51.48	AV	265	1.6	V	-2.26	49.22	54	-4.78
RU484#65									
5350	75.11	PK	194	2.5	H	-2.33	72.78	74	-1.22
5350	55.33	AV	194	2.5	H	-2.33	53	54	-1
5350	70.46	PK	144	2.1	V	-2.33	68.13	74	-5.87
5350	53.91	AV	144	2.1	V	-2.33	51.58	54	-2.42
5460	63.91	PK	134	1.3	H	-2.26	61.65	74	-12.35
5460	51.5	AV	134	1.3	H	-2.26	49.24	54	-4.76
5460	63.79	PK	234	2.1	V	-2.26	61.53	74	-12.47
5460	51.38	AV	234	2.1	V	-2.26	49.12	54	-4.88
RU26#0									
10620	54.01	PK	188	1.8	H	8.89	62.9	74	-11.1
10620	39.55	AV	188	1.8	H	8.89	48.44	54	-5.56
10620	59.35	PK	323	1.3	V	8.89	68.24	74	-5.76
10620	43.67	AV	323	1.3	V	8.89	52.56	54	-1.44

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX80(worst case MIMO)									
5290 MHz									
RU26#0									
4500	63.28	PK	178	1.2	H	-4.72	58.56	74	-15.44
4500	51.21	AV	178	1.2	H	-4.72	46.49	54	-7.51
4500	63.17	PK	83	1.6	V	-4.72	58.45	74	-15.55
4500	51.12	AV	83	1.6	V	-4.72	46.4	54	-7.6
5150	64.57	PK	245	2	H	-2.73	61.84	74	-12.16
5150	52.36	AV	245	2	H	-2.73	49.63	54	-4.37
5150	64.31	PK	311	2	V	-2.73	61.58	74	-12.42
5150	51.99	AV	311	2	V	-2.73	49.26	54	-4.74
RU26#36									
5350	73.33	PK	317	1.7	H	-2.33	71	74	-3
5350	54.58	AV	317	1.7	H	-2.33	52.25	54	-1.75
5350	70.1	PK	154	2.2	V	-2.33	67.77	74	-6.23
5350	54.09	AV	154	2.2	V	-2.33	51.76	54	-2.24
5460	63.82	PK	258	1	H	-2.26	61.56	74	-12.44
5460	51.71	AV	258	1	H	-2.26	49.45	54	-4.55
5460	63.67	PK	191	1.6	V	-2.26	61.41	74	-12.59
5460	51.58	AV	191	1.6	V	-2.26	49.32	54	-4.68
RU52#37									
4500	63.24	PK	18	1.4	H	-4.72	58.52	74	-15.48
4500	50.91	AV	18	1.4	H	-4.72	46.19	54	-7.81
4500	63.12	PK	286	2.1	V	-4.72	58.4	74	-15.6
4500	50.8	AV	286	2.1	V	-4.72	46.08	54	-7.92
5150	64.15	PK	357	1.7	H	-2.73	61.42	74	-12.58
5150	51.86	AV	357	1.7	H	-2.73	49.13	54	-4.87
5150	64	PK	110	1	V	-2.73	61.27	74	-12.73
5150	51.59	AV	110	1	V	-2.73	48.86	54	-5.14
RU52#52									
5350	71.37	PK	206	2	H	-2.33	69.04	74	-4.96
5350	53.48	AV	206	2	H	-2.33	51.15	54	-2.85
5350	67.81	PK	101	1.1	V	-2.33	65.48	74	-8.52
5350	52.93	AV	101	1.1	V	-2.33	50.6	54	-3.4
5460	63.76	PK	279	1.4	H	-2.26	61.5	74	-12.5
5460	51.87	AV	279	1.4	H	-2.26	49.61	54	-4.39
5460	63.61	PK	1	2	V	-2.26	61.35	74	-12.65
5460	51.65	AV	1	2	V	-2.26	49.39	54	-4.61

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5290 MHz									
RU106#53									
4500	63.2	PK	183	2.2	H	-4.72	58.48	74	-15.52
4500	50.83	AV	183	2.2	H	-4.72	46.11	54	-7.89
4500	63.08	PK	79	2	V	-4.72	58.36	74	-15.64
4500	50.74	AV	79	2	V	-4.72	46.02	54	-7.98
5150	64.06	PK	258	1.4	H	-2.73	61.33	74	-12.67
5150	51.82	AV	258	1.4	H	-2.73	49.09	54	-4.91
5150	63.89	PK	184	1.3	V	-2.73	61.16	74	-12.84
5150	51.54	AV	184	1.3	V	-2.73	48.81	54	-5.19
RU106#60									
5350	69.64	PK	293	2.4	H	-2.33	67.31	74	-6.69
5350	52.86	AV	293	2.4	H	-2.33	50.53	54	-3.47
5350	66.08	PK	228	2.5	V	-2.33	63.75	74	-10.25
5350	52.15	AV	228	2.5	V	-2.33	49.82	54	-4.18
5460	63.49	PK	155	1.3	H	-2.26	61.23	74	-12.77
5460	51.84	AV	155	1.3	H	-2.26	49.58	54	-4.42
5460	63.38	PK	117	1.5	V	-2.26	61.12	74	-12.88
5460	51.62	AV	117	1.5	V	-2.26	49.36	54	-4.64
RU242#61									
4500	63.14	PK	128	2.1	H	-4.72	58.42	74	-15.58
4500	50.75	AV	128	2.1	H	-4.72	46.03	54	-7.97
4500	63.01	PK	87	2.2	V	-4.72	58.29	74	-15.71
4500	50.68	AV	87	2.2	V	-4.72	45.96	54	-8.04
5150	64.02	PK	36	1.6	H	-2.73	61.29	74	-12.71
5150	52.11	AV	36	1.6	H	-2.73	49.38	54	-4.62
5150	63.89	PK	221	1.7	V	-2.73	61.16	74	-12.84
5150	51.7	AV	221	1.7	V	-2.73	48.97	54	-5.03
RU242#64									
5350	67.84	PK	127	1.6	H	-2.33	65.51	74	-8.49
5350	52.47	AV	127	1.6	H	-2.33	50.14	54	-3.86
5350	65.78	PK	190	1.8	V	-2.33	63.45	74	-10.55
5350	52.11	AV	190	1.8	V	-2.33	49.78	54	-4.22
5460	63.37	PK	202	1.1	H	-2.26	61.11	74	-12.89
5460	51.91	AV	202	1.1	H	-2.26	49.65	54	-4.35
5460	63.28	PK	321	1.8	V	-2.26	61.02	74	-12.98
5460	51.76	AV	321	1.8	V	-2.26	49.5	54	-4.5

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5290 MHz									
RU484#65									
4500	63.1	PK	145	1.1	H	-4.72	58.38	74	-15.62
4500	51.23	AV	145	1.1	H	-4.72	46.51	54	-7.49
4500	62.98	PK	124	1.2	V	-4.72	58.26	74	-15.74
4500	51.11	AV	124	1.2	V	-4.72	46.39	54	-7.61
5150	63.99	PK	136	1.3	H	-2.73	61.26	74	-12.74
5150	51.96	AV	136	1.3	H	-2.73	49.23	54	-4.77
5150	63.8	PK	161	2.2	V	-2.73	61.07	74	-12.93
5150	51.52	AV	161	2.2	V	-2.73	48.79	54	-5.21
RU484#66									
5350	68.04	PK	230	1.8	H	-2.33	65.71	74	-8.29
5350	53.39	AV	230	1.8	H	-2.33	51.06	54	-2.94
5350	66.18	PK	296	1.6	V	-2.33	63.85	74	-10.15
5350	52.03	AV	296	1.6	V	-2.33	49.7	54	-4.3
5460	63.66	PK	93	1.9	H	-2.26	61.4	74	-12.6
5460	51.77	AV	93	1.9	H	-2.26	49.51	54	-4.49
5460	63.52	PK	81	2.4	V	-2.26	61.26	74	-12.74
5460	51.68	AV	81	2.4	V	-2.26	49.42	54	-4.58
RU996#67									
4500	63.01	PK	301	2.3	H	-4.72	58.29	74	-15.71
4500	51.1	AV	301	2.3	H	-4.72	46.38	54	-7.62
4500	62.92	PK	304	1.8	V	-4.72	58.2	74	-15.8
4500	51.95	AV	304	1.8	V	-4.72	47.23	54	-6.77
5150	63.9	PK	14	2.4	H	-2.73	61.17	74	-12.83
5150	51.62	AV	14	2.4	H	-2.73	48.89	54	-5.11
5150	63.76	PK	327	1.7	V	-2.73	61.03	74	-12.97
5150	51.41	AV	327	1.7	V	-2.73	48.68	54	-5.32
5350	68.41	PK	66	1.1	H	-2.33	66.08	74	-7.92
5350	53.6	AV	66	1.1	H	-2.33	51.27	54	-2.73
5350	66.43	PK	316	1.6	V	-2.33	64.1	74	-9.9
5350	52.07	AV	316	1.6	V	-2.33	49.74	54	-4.26
5460	63.57	PK	195	2.2	H	-2.26	61.31	74	-12.69
5460	51.8	AV	195	2.2	H	-2.26	49.54	54	-4.46
5460	63.45	PK	241	1.5	V	-2.26	61.19	74	-12.81
5460	51.66	AV	241	1.5	V	-2.26	49.4	54	-4.6
RU26#0									
10580	54.41	PK	190	1	H	8.77	63.18	68.2	-5.02
10580	57.79	PK	245	1.1	V	8.77	66.56	68.2	-1.64

5470-5725MHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11a(worst case antenna 0)									
5500 MHz									
5460	63.37	PK	131	2	H	-2.26	61.11	74	-12.89
5460	50.76	AV	131	2	H	-2.26	48.5	54	-5.5
5460	63.58	PK	323	1.7	V	-2.26	61.32	74	-12.68
5460	50.9	AV	323	1.7	V	-2.26	48.64	54	-5.36
5470	65.07	PK	28	1.4	H	-2.22	62.85	68.2	-5.35
5470	66.81	PK	176	1.2	V	-2.22	64.59	68.2	-3.61
11000	41.75	PK	73	1.4	H	9.67	51.42	74	-22.58
11000	40.97	PK	276	2	V	9.67	50.64	74	-23.36
5580 MHz									
11160	43.36	PK	138	1.5	H	8.68	52.04	74	-21.96
11160	42.38	PK	16	1.7	V	8.68	51.06	74	-22.94
5700 MHz									
5725	65.86	PK	197	2.3	H	-1.96	63.9	68.2	-4.3
5725	66.2	PK	316	1.8	V	-1.96	64.24	68.2	-3.96
5745	63.92	PK	315	2.4	H	-1.91	62.01	68.2	-6.19
5745	64.08	PK	234	1.3	V	-1.91	62.17	68.2	-6.03
11400	45.84	PK	188	1.8	H	7.26	53.1	74	-20.9
11400	48.21	PK	220	2.2	V	7.26	55.47	74	-18.53
11400	34.05	AV	220	2.2	V	7.26	41.31	54	-12.69
802.11n20(worst case MIMO)									
5500 MHz									
5460	63.65	PK	296	1.3	H	-2.26	61.39	74	-12.61
5460	50.82	AV	296	1.3	H	-2.26	48.56	54	-5.44
5460	63.77	PK	309	1.1	V	-2.26	61.51	74	-12.49
5460	50.91	AV	309	1.1	V	-2.26	48.65	54	-5.35
5470	65.88	PK	313	1.6	H	-2.22	63.66	68.2	-4.54
5470	68.54	PK	51	1.3	V	-2.22	66.32	68.2	-1.88
11000	44.58	PK	231	2.3	H	9.67	54.25	74	-19.75
11000	30.03	AV	231	2.3	H	9.67	39.7	54	-14.3
11000	50.16	PK	190	2.3	V	9.67	59.83	74	-14.17
11000	35.01	AV	190	2.3	V	9.67	44.68	54	-9.32
5580 MHz									
11160	45.15	PK	302	1.4	H	8.68	53.83	74	-20.17
11160	49.56	PK	181	2.4	V	8.68	58.24	74	-15.76
11160	34.69	AV	181	2.4	V	8.68	43.37	54	-10.63
5700 MHz									
5725	66.34	PK	250	2.5	H	-1.96	64.38	68.2	-3.82
5725	66.73	PK	304	2.3	V	-1.96	64.77	68.2	-3.43
5745	64.26	PK	2	1.7	H	-1.91	62.35	68.2	-5.85
5745	64.47	PK	147	2	V	-1.91	62.56	68.2	-5.64
11400	46.99	PK	203	1.3	H	7.26	54.25	74	-19.75
11400	32.37	AV	203	1.3	H	7.26	39.63	54	-14.37
11400	47.78	PK	21	1.4	V	7.26	55.04	74	-18.96
11400	33.6	AV	21	1.4	V	7.26	40.86	54	-13.14

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N40(worst case MIMO)									
5510 MHZ									
5460	64.01	PK	306	1.7	H	-2.26	61.75	74	-12.25
5460	51.22	AV	306	1.7	H	-2.26	48.96	54	-5.04
5460	64.37	PK	61	1.7	V	-2.26	62.11	74	-11.89
5460	51.4	AV	61	1.7	V	-2.26	49.14	54	-4.86
5470	67.11	PK	196	2	H	-2.22	64.89	68.2	-3.31
5470	69.07	PK	292	1.1	V	-2.22	66.85	68.2	-1.35
11020	41.23	PK	318	1.1	H	9.57	50.8	74	-23.2
11020	45.76	PK	174	1.6	V	9.57	55.33	74	-18.67
11020	30.5	AV	174	1.6	V	9.57	40.07	54	-13.93
5550 MHZ									
11100	41.18	PK	296	2.5	H	9.12	50.3	74	-23.7
11100	44.54	PK	129	1.7	V	9.12	53.66	74	-20.34
5670 MHZ									
5725	66.14	PK	133	1.4	H	-1.96	64.18	68.2	-4.02
5725	66.32	PK	239	1.5	V	-1.96	64.36	68.2	-3.84
5745	63.98	PK	200	2.3	H	-1.91	62.07	68.2	-6.13
5745	64.15	PK	88	1.7	V	-1.91	62.24	68.2	-5.96
11340	45	PK	214	1.1	H	7.67	52.67	74	-21.33
11340	45.72	PK	193	2.2	V	7.67	53.39	74	-20.61

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AC 20(worst case MIMO)									
5500 MHz									
5460	63.82	PK	241	1.1	H	-2.26	61.56	74	-12.44
5460	50.15	AV	241	1.1	H	-2.26	47.89	54	-6.11
5460	64	PK	200	2.1	V	-2.26	61.74	74	-12.26
5460	50.29	AV	200	2.1	V	-2.26	48.03	54	-5.97
5470	65.87	PK	273	1.1	H	-2.22	63.65	68.2	-4.55
5470	69.04	PK	53	2.3	V	-2.22	66.82	68.2	-1.38
11000	45.47	PK	156	2.4	H	9.67	55.14	74	-18.86
11000	29	AV	156	2.4	H	9.67	38.67	54	-15.33
11000	49.73	PK	205	1.5	V	9.67	59.4	74	-14.6
11000	33.58	AV	205	1.5	V	9.67	43.25	54	-10.75
5580 MHz									
11160	45.53	PK	43	1.1	H	8.68	54.21	74	-19.79
11160	29.46	AV	43	1.1	H	8.68	38.14	54	-15.86
11160	49.85	PK	256	2.4	V	8.68	58.53	74	-15.47
11160	33.34	AV	256	2.4	V	8.68	42.02	54	-11.98
5700 MHz									
5725	66.6	PK	185	1.8	H	-1.96	64.64	68.2	-3.56
5725	67.07	PK	279	1.1	V	-1.96	65.11	68.2	-3.09
5745	64.43	PK	6	2.5	H	-1.91	62.52	68.2	-5.68
5745	64.68	PK	234	2	V	-1.91	62.77	68.2	-5.43
11400	47.65	PK	181	1.7	H	7.26	54.91	74	-19.09
11400	31.51	AV	181	1.7	H	7.26	38.77	54	-15.23
11400	48.13	PK	144	1.3	V	7.26	55.39	74	-18.61
11400	32.22	AV	144	1.3	V	7.26	39.48	54	-14.52

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AC 40(worst case MIMO)									
5510 MHz									
5460	64.31	PK	360	2.4	H	-2.26	62.05	74	-11.95
5460	50.16	AV	360	2.4	H	-2.26	47.9	54	-6.1
5460	64.58	PK	158	1.5	V	-2.26	62.32	74	-11.68
5460	50.37	AV	158	1.5	V	-2.26	48.11	54	-5.89
5470	67.35	PK	232	1.9	H	-2.22	65.13	68.2	-3.07
5470	69.21	PK	306	2.2	V	-2.22	66.99	68.2	-1.21
11020	41.13	PK	35	1.4	H	9.57	50.7	74	-23.3
11020	44.91	PK	130	1.9	V	9.57	54.48	74	-19.52
11020	28.77	AV	130	1.9	V	9.57	38.34	54	-15.66
5550 MHz									
11100	41.25	PK	205	2.1	H	9.12	50.37	74	-23.63
11100	44.18	PK	28	2.2	V	9.12	53.3	74	-20.7
5670 MHz									
5725	66.63	PK	101	1.8	H	-1.96	64.67	68.2	-3.53
5725	67.07	PK	45	2.4	V	-1.96	65.11	68.2	-3.09
5745	64.17	PK	172	1.4	H	-1.91	62.26	68.2	-5.94
5745	64.44	PK	212	1.4	V	-1.91	62.53	68.2	-5.67
11340	44.83	PK	281	2	H	7.67	52.5	74	-21.5
11340	45.95	PK	19	1.3	V	7.67	53.62	74	-20.38
802.11AC 80(worst case MIMO)									
5530 MHz									
5460	63.91	PK	268	1.5	H	-2.26	61.65	74	-12.35
5460	50.15	AV	268	1.5	H	-2.26	47.89	54	-6.11
5460	64.07	PK	242	1.1	V	-2.26	61.81	74	-12.19
5460	50.26	AV	242	1.1	V	-2.26	48	54	-6
5470	66.96	PK	356	1.9	H	-2.22	64.74	68.2	-3.46
5470	68.95	PK	35	1.9	V	-2.22	66.73	68.2	-1.47
11060	40.41	PK	127	1.1	H	9.37	49.78	74	-24.22
11060	42.93	PK	211	2.5	V	9.37	52.3	74	-21.7
5610 MHz									
5725	66.29	PK	304	1.3	H	-1.96	64.33	68.2	-3.87
5725	66.71	PK	90	2.1	V	-1.96	64.75	68.2	-3.45
5745	64.27	PK	166	1.7	H	-1.91	62.36	68.2	-5.84
5745	64.53	PK	1	1.7	V	-1.91	62.62	68.2	-5.58
11220	42.34	PK	311	1.1	H	8.33	50.67	74	-23.33
11220	42.95	PK	38	2	V	8.33	51.28	74	-22.72

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX20(worst case MIMO)									
5500 MHz									
RU26#0									
5460	64.69	PK	276	2	H	-2.26	62.43	74	-11.57
5460	51.02	AV	276	2	H	-2.26	48.76	54	-5.24
5460	64.48	PK	149	1	V	-2.26	62.22	74	-11.78
5460	50.91	AV	149	1	V	-2.26	48.65	54	-5.35
5470	67.63	PK	320	1.7	H	-2.22	65.41	68.2	-2.79
5470	65.72	PK	348	1.7	V	-2.22	63.5	68.2	-4.7
RU52#37									
5460	64.57	PK	4	1.6	H	-2.26	62.31	74	-11.69
5460	50.96	AV	4	1.6	H	-2.26	48.7	54	-5.3
5460	64.4	PK	86	2.5	V	-2.26	62.14	74	-11.86
5460	50.88	AV	86	2.5	V	-2.26	48.62	54	-5.38
5470	67.38	PK	66	1.3	H	-2.22	65.16	68.2	-3.04
5470	65.97	PK	86	2.3	V	-2.22	63.75	68.2	-4.45
RU106#53									
5460	64.49	PK	150	1.1	H	-2.26	62.23	74	-11.77
5460	50.85	AV	150	1.1	H	-2.26	48.59	54	-5.41
5460	64.38	PK	237	1.8	V	-2.26	62.12	74	-11.88
5460	50.76	AV	237	1.8	V	-2.26	48.5	54	-5.5
5470	66.98	PK	205	2	H	-2.22	64.76	68.2	-3.44
5470	65.87	PK	161	1.8	V	-2.22	63.65	68.2	-4.55
RU242#61									
5460	64.77	PK	338	1.1	H	-2.26	62.51	74	-11.49
5460	51.06	AV	338	1.1	H	-2.26	48.8	54	-5.2
5460	64.58	PK	116	1.8	V	-2.26	62.32	74	-11.68
5460	50.95	AV	116	1.8	V	-2.26	48.69	54	-5.31
5470	67.25	PK	162	2.2	H	-2.22	65.03	68.2	-3.17
5470	66.14	PK	180	1.3	V	-2.22	63.92	68.2	-4.28
RU26#0									
11000	53.32	PK	305	2.4	H	9.67	62.99	74	-11.01
11000	39.45	AV	305	2.4	H	9.67	49.12	54	-4.88
11000	57.24	PK	189	1.7	V	9.67	66.91	74	-7.09
11000	42.81	AV	189	1.7	V	9.67	52.48	54	-1.52

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5580 MHz									
RU26#0									
11160	53.57	PK	35	2	H	8.68	62.25	74	-11.75
11160	39.94	AV	35	2	H	8.68	48.62	54	-5.38
11160	56.03	PK	56	1.5	V	8.68	64.71	74	-9.29
11160	42.66	AV	56	1.5	V	8.68	51.34	54	-2.66
5700 MHz									
RU26#8									
5725	68.73	PK	293	1.8	H	-1.96	66.77	68.2	-1.43
5725	67.7	PK	82	2	V	-1.96	65.74	68.2	-2.46
5745	64.59	PK	119	1.7	H	-1.91	62.68	68.2	-5.52
5745	64.47	PK	150	2.5	V	-1.91	62.56	68.2	-5.64
RU52#40									
5725	68.49	PK	260	1.1	H	-1.96	66.53	68.2	-1.67
5725	67.56	PK	94	2.2	V	-1.96	65.6	68.2	-2.6
5745	64.53	PK	162	1.5	H	-1.91	62.62	68.2	-5.58
5745	64.42	PK	81	1.5	V	-1.91	62.51	68.2	-5.69
RU106#54									
5725	67.3	PK	230	1.6	H	-1.96	65.34	68.2	-2.86
5725	66.27	PK	219	1.3	V	-1.96	64.31	68.2	-3.89
5745	64.14	PK	164	2.3	H	-1.91	62.23	68.2	-5.97
5745	64.03	PK	111	1.4	V	-1.91	62.12	68.2	-6.08
RU242#61									
5725	68.07	PK	6	2	H	-1.96	66.11	68.2	-2.09
5725	67.16	PK	158	1.5	V	-1.96	65.2	68.2	-3
5745	64.38	PK	209	2.1	H	-1.91	62.47	68.2	-5.73
5745	64.24	PK	5	2.5	V	-1.91	62.33	68.2	-5.87
RU26#0									
11400	51.4	PK	67	1.8	H	7.26	58.66	74	-15.34
11400	39.13	AV	67	1.8	H	7.26	46.39	54	-7.61
11400	54.51	PK	69	2	V	7.26	61.77	74	-12.23
11400	42.39	AV	69	2	V	7.26	49.65	54	-4.35

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX40(worst case MIMO)									
5510 MHz									
RU26#0									
5460	64.77	PK	285	2	H	-2.26	62.51	74	-11.49
5460	51.09	AV	285	2	H	-2.26	48.83	54	-5.17
5460	64.66	PK	232	1.5	V	-2.26	62.4	74	-11.6
5460	50.98	AV	232	1.5	V	-2.26	48.72	54	-5.28
5470	68.81	PK	29	1.4	H	-2.22	66.59	68.2	-1.61
5470	66.96	PK	15	1.9	V	-2.22	64.74	68.2	-3.46
RU52#37									
5460	64.81	PK	96	1.8	H	-2.26	62.55	74	-11.45
5460	51.28	AV	96	1.8	H	-2.26	49.02	54	-4.98
5460	64.72	PK	152	2.3	V	-2.26	62.46	74	-11.54
5460	51.19	AV	152	2.3	V	-2.26	48.93	54	-5.07
5470	68.96	PK	102	2.4	H	-2.22	66.74	68.2	-1.46
5470	66.74	PK	346	1.3	V	-2.22	64.52	68.2	-3.68
RU106#53									
5460	64.86	PK	313	2.2	H	-2.26	62.6	74	-11.4
5460	51.27	AV	313	2.2	H	-2.26	49.01	54	-4.99
5460	64.72	PK	236	1.8	V	-2.26	62.46	74	-11.54
5460	51.15	AV	236	1.8	V	-2.26	48.89	54	-5.11
5470	67.95	PK	105	1.7	H	-2.22	65.73	68.2	-2.47
5470	66.63	PK	177	1	V	-2.22	64.41	68.2	-3.79
RU242#61									
5460	64.82	PK	272	2.3	H	-2.26	62.56	74	-11.44
5460	51.15	AV	272	2.3	H	-2.26	48.89	54	-5.11
5460	64.71	PK	27	1.6	V	-2.26	62.45	74	-11.55
5460	51.06	AV	27	1.6	V	-2.26	48.8	54	-5.2
5470	68.63	PK	219	1.8	H	-2.22	66.41	68.2	-1.79
5470	67.21	PK	122	1.9	V	-2.22	64.99	68.2	-3.21
RU484#65									
5460	64.67	PK	112	2	H	-2.26	62.41	74	-11.59
5460	51.02	AV	112	2	H	-2.26	48.76	54	-5.24
5460	64.56	PK	36	1.4	V	-2.26	62.3	74	-11.7
5460	50.91	AV	36	1.4	V	-2.26	48.65	54	-5.35
5470	68.41	PK	331	2.3	H	-2.22	66.19	68.2	-2.01
5470	66.74	PK	334	1.8	V	-2.22	64.52	68.2	-3.68

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5510 MHz									
RU26#0									
11020	52	PK	342	1.8	H	9.57	61.57	74	-12.43
11020	39.07	AV	342	1.8	H	9.57	48.64	54	-5.36
11020	55.36	PK	263	1.9	V	9.57	64.93	74	-9.07
11020	42.23	AV	263	1.9	V	9.57	51.8	54	-2.2
5550MHz									
RU26#0									
11100	52.83	PK	327	1.5	H	9.12	61.95	74	-12.05
11100	38.67	AV	327	1.5	H	9.12	47.79	54	-6.21
11100	55.54	PK	260	1.8	V	9.12	64.66	74	-9.34
11100	41.42	AV	260	1.8	V	9.12	50.54	54	-3.46
5670 MHz									
RU26#17									
5725	68.79	PK	41	2.4	H	-1.96	66.83	68.2	-1.37
5725	67.86	PK	344	1.3	V	-1.96	65.9	68.2	-2.3
5745	64.65	PK	247	2	H	-1.91	62.74	68.2	-5.46
5745	64.53	PK	162	1.9	V	-1.91	62.62	68.2	-5.58
RU52#44									
5725	68.64	PK	186	2.3	H	-1.96	66.68	68.2	-1.52
5725	67.12	PK	344	1.6	V	-1.96	65.16	68.2	-3.04
5745	64.58	PK	193	1.8	H	-1.91	62.67	68.2	-5.53
5745	64.46	PK	234	2.2	V	-1.91	62.55	68.2	-5.65
RU106#56									
5725	67.87	PK	188	2.3	H	-1.96	65.91	68.2	-2.29
5725	66.79	PK	53	1.6	V	-1.96	64.83	68.2	-3.37
5745	64.41	PK	109	1.1	H	-1.91	62.5	68.2	-5.7
5745	64.29	PK	347	1.8	V	-1.91	62.38	68.2	-5.82
RU242#62									
5725	67.2	PK	7	1.2	H	-1.96	65.24	68.2	-2.96
5725	66.64	PK	101	1.5	V	-1.96	64.68	68.2	-3.52
5745	64.35	PK	244	1.6	H	-1.91	62.44	68.2	-5.76
5745	64.22	PK	275	1.5	V	-1.91	62.31	68.2	-5.89
RU484#65									
5725	67.31	PK	148	1.1	H	-1.96	65.35	68.2	-2.85
5725	66.89	PK	294	2.1	V	-1.96	64.93	68.2	-3.27
5745	64.43	PK	147	1.3	H	-1.91	62.52	68.2	-5.68
5745	64.31	PK	38	1.9	V	-1.91	62.4	68.2	-5.8

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5670 MHz									
RU26#0									
11340	50.95	PK	62	1.1	H	7.67	58.62	74	-15.38
11340	36.8	AV	62	1.1	H	7.67	44.47	54	-9.53
11340	53.72	PK	65	1.4	V	7.67	61.39	74	-12.61
11340	40.11	AV	65	1.4	V	7.67	47.78	54	-6.22

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX80(worst case MIMO)									
5530 MHz									
RU26#0									
5460	64.3	PK	120	1.8	H	-2.26	62.04	74	-11.96
5460	51.34	AV	120	1.8	H	-2.26	49.08	54	-4.92
5460	64.19	PK	26	1	V	-2.26	61.93	74	-12.07
5460	51.29	AV	26	1	V	-2.26	49.03	54	-4.97
5470	68.68	PK	339	1.6	H	-2.22	66.46	68.2	-1.74
5470	66.14	PK	253	1.2	V	-2.22	63.92	68.2	-4.28
RU52#37									
5460	64.4	PK	252	2.2	H	-2.26	62.14	74	-11.86
5460	51.13	AV	252	2.2	H	-2.26	48.87	54	-5.13
5460	64.19	PK	300	1.9	V	-2.26	61.93	74	-12.07
5460	51.18	AV	300	1.9	V	-2.26	48.92	54	-5.08
5470	68.77	PK	208	1.7	H	-2.22	66.55	68.2	-1.65
5470	66.22	PK	213	1.9	V	-2.22	64	68.2	-4.2
RU106#53									
5460	64.3	PK	116	1.6	H	-2.26	62.04	74	-11.96
5460	51.34	AV	116	1.6	H	-2.26	49.08	54	-4.92
5460	64.49	PK	344	1.3	V	-2.26	62.23	74	-11.77
5460	51.16	AV	344	1.3	V	-2.26	48.9	54	-5.1
5470	69.03	PK	139	2.1	H	-2.22	66.81	68.2	-1.39
5470	66.88	PK	308	2	V	-2.22	64.66	68.2	-3.54
RU242#61									
5460	64.4	PK	306	1.9	H	-2.26	62.14	74	-11.86
5460	51.41	AV	306	1.9	H	-2.26	49.15	54	-4.85
5460	64.27	PK	198	2	V	-2.26	62.01	74	-11.99
5460	51.23	AV	198	2	V	-2.26	48.97	54	-5.03
5470	68.67	PK	297	1.4	H	-2.22	66.45	68.2	-1.75
5470	66.53	PK	214	2.4	V	-2.22	64.31	68.2	-3.89
RU484#65									
5460	64.34	PK	155	1.3	H	-2.26	62.08	74	-11.92
5460	51.43	AV	155	1.3	H	-2.26	49.17	54	-4.83
5460	64.63	PK	144	1.2	V	-2.26	62.37	74	-11.63
5460	51.34	AV	144	1.2	V	-2.26	49.08	54	-4.92
5470	68.07	PK	192	1.5	H	-2.22	65.85	68.2	-2.35
5470	65.56	PK	79	1.7	V	-2.22	63.34	68.2	-4.86

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5530 MHz									
RU996#67									
5460	64.23	PK	180	2.4	H	-2.26	61.97	74	-12.03
5460	51.36	AV	180	2.4	H	-2.26	49.1	54	-4.9
5460	64.59	PK	145	1.8	V	-2.26	62.33	74	-11.67
5460	51.24	AV	145	1.8	V	-2.26	48.98	54	-5.02
5470	66.97	PK	2	1	H	-2.22	64.75	68.2	-3.45
5470	65.01	PK	2	1.5	V	-2.22	62.79	68.2	-5.41
RU26#0									
11060	50.81	PK	226	1.6	H	9.37	60.18	74	-13.82
11060	38.48	AV	226	1.6	H	9.37	47.85	54	-6.15
11060	54.39	PK	76	2.1	V	9.37	63.76	74	-10.24
11060	42.1	AV	76	2.1	V	9.37	51.47	54	-2.53
5610 MHz									
RU26#36									
5725	65.74	PK	293	2.3	H	-1.96	63.78	68.2	-4.42
5725	65.8	PK	200	1.6	V	-1.96	63.84	68.2	-4.36
5745	65.13	PK	64	1.9	H	-1.91	63.22	68.2	-4.98
5745	64.95	PK	178	1.8	V	-1.91	63.04	68.2	-5.16
RU52#52									
5725	65.85	PK	64	1.7	H	-1.96	63.89	68.2	-4.31
5725	65.7	PK	149	1.8	V	-1.96	63.74	68.2	-4.46
5745	65.1	PK	241	1.9	H	-1.91	63.19	68.2	-5.01
5745	65.09	PK	171	1.3	V	-1.91	63.18	68.2	-5.02
RU106#60									
5725	65.94	PK	227	2	H	-1.96	63.98	68.2	-4.22
5725	65.58	PK	211	1.8	V	-1.96	63.62	68.2	-4.58
5745	65.21	PK	207	1.2	H	-1.91	63.3	68.2	-4.9
5745	65.32	PK	308	2.5	V	-1.91	63.41	68.2	-4.79
RU242#64									
5725	65.68	PK	248	2.4	H	-1.96	63.72	68.2	-4.48
5725	65.5	PK	7	1.2	V	-1.96	63.54	68.2	-4.66
5745	65.27	PK	6	1	H	-1.91	63.36	68.2	-4.84
5745	65.05	PK	1	1.4	V	-1.91	63.14	68.2	-5.06

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5610 MHz									
RU484#66									
5725	65.65	PK	215	2	H	-1.96	63.69	68.2	-4.51
5725	65.69	PK	82	2.2	V	-1.96	63.73	68.2	-4.47
5745	64.91	PK	320	1.4	H	-1.91	63	68.2	-5.2
5745	65.04	PK	229	1.8	V	-1.91	63.13	68.2	-5.07
RU996#67									
5725	65.47	PK	64	1.7	H	-1.96	63.51	68.2	-4.69
5725	65.56	PK	102	2.1	V	-1.96	63.6	68.2	-4.6
5745	65.22	PK	176	1.9	H	-1.91	63.31	68.2	-4.89
5745	65.14	PK	3	2	V	-1.91	63.23	68.2	-4.97
RU26#0									
11220	52.1	PK	101	1.5	H	8.33	60.43	74	-13.57
11220	39.83	AV	101	1.5	H	8.33	48.16	54	-5.84
11220	54.87	PK	66	1.5	V	8.33	63.2	74	-10.8
11220	42.99	AV	66	1.5	V	8.33	51.32	54	-2.68

5725-5850 MHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11a(worst case antenna 0)									
5745 MHZ									
5650	65.72	PK	70	2.1	H	-1.95	63.77	68.2	-4.43
5700	66.42	PK	94	1.9	H	-2.02	64.4	105.2	-40.8
5720	66.59	PK	192	1.6	H	-1.97	64.62	110.8	-46.18
5725	70.69	PK	111	1.2	H	-1.96	68.73	122.2	-53.47
5650	65.58	PK	45	2.4	V	-1.95	63.63	68.2	-4.57
5700	66.2	PK	44	1.4	V	-2.02	64.18	105.2	-41.02
5720	66.32	PK	40	1.9	V	-1.97	64.35	110.8	-46.45
5725	68.5	PK	256	2.3	V	-1.96	66.54	122.2	-55.66
11490	43.71	PK	48	1.3	H	6.63	50.34	74	-23.66
11490	44.55	PK	224	1.7	V	6.63	51.18	74	-22.82
5785 MHZ									
11570	45.06	PK	293	1.8	H	6.59	51.65	74	-22.35
11570	46.08	PK	260	1.5	V	6.59	52.67	74	-21.33
5825 MHZ									
5850	67.82	PK	78	1.8	H	-1.81	66.01	122.2	-56.19
5855	67.14	PK	289	2.4	H	-1.82	65.32	110.8	-45.48
5875	66.99	PK	206	1.3	H	-1.84	65.15	105.2	-40.05
5925	66.81	PK	282	2	H	-1.82	64.99	68.2	-3.21
5850	67.54	PK	153	1.4	V	-1.81	65.73	122.2	-56.47
5855	67.03	PK	114	1	V	-1.82	65.21	110.8	-45.59
5875	66.9	PK	168	1.7	V	-1.84	65.06	105.2	-40.14
5925	66.74	PK	62	1.9	V	-1.82	64.92	68.2	-3.28
11650	42.8	PK	189	2	H	6.77	49.57	74	-24.43
11650	43.85	PK	118	1.6	V	6.77	50.62	74	-23.38

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20(worst case MIMO)									
5745 MHz									
5650	65.81	PK	207	2.1	H	-1.95	63.86	68.2	-4.34
5700	66.76	PK	325	2.2	H	-2.02	64.74	105.2	-40.46
5720	67.52	PK	262	2	H	-1.97	65.55	110.8	-45.25
5725	75.07	PK	162	2.2	H	-1.96	73.11	122.2	-49.09
5650	65.66	PK	108	1.6	V	-1.95	63.71	68.2	-4.49
5700	66.62	PK	18	1.6	V	-2.02	64.6	105.2	-40.6
5720	66.89	PK	11	2.1	V	-1.97	64.92	110.8	-45.88
5725	69.89	PK	153	1	V	-1.96	67.93	122.2	-54.27
11490	43.87	PK	332	1.5	H	6.63	50.5	74	-23.5
11490	44.82	PK	222	1.2	V	6.63	51.45	74	-22.55
5785 MHz									
11570	45.25	PK	275	1.8	H	6.59	51.84	74	-22.16
11570	46.77	PK	226	1.8	V	6.59	53.36	74	-20.64
5825 MHz									
5850	67.87	PK	12	1.7	H	-1.81	66.06	122.2	-56.14
5855	67.46	PK	223	1.3	H	-1.82	65.64	110.8	-45.16
5875	67.1	PK	292	1.1	H	-1.84	65.26	105.2	-39.94
5925	66.71	PK	84	1.1	H	-1.82	64.89	68.2	-3.31
5850	67.62	PK	59	1.4	V	-1.81	65.81	122.2	-56.39
5855	67.11	PK	209	1.2	V	-1.82	65.29	110.8	-45.51
5875	66.94	PK	25	1.2	V	-1.84	65.1	105.2	-40.1
5925	66.65	PK	299	2	V	-1.82	64.83	68.2	-3.37
11650	43.23	PK	115	1.8	H	6.77	50	74	-24
11650	44.47	PK	42	2	V	6.77	51.24	74	-22.76

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N40(worst case MIMO)									
5755 MHz									
5650	65.95	PK	4	2.3	H	-1.95	64	68.2	-4.2
5700	66.99	PK	163	2.1	H	-2.02	64.97	105.2	-40.23
5720	77.4	PK	263	1.8	H	-1.97	75.43	110.8	-35.37
5725	79.47	PK	315	1.2	H	-1.96	77.51	122.2	-44.69
5650	65.81	PK	357	2	V	-1.95	63.86	68.2	-4.34
5700	66.79	PK	216	2.3	V	-2.02	64.77	105.2	-40.43
5720	76.47	PK	236	1.1	V	-1.97	74.5	110.8	-36.3
5725	78.9	PK	206	2.1	V	-1.96	76.94	122.2	-45.26
11510	43.83	PK	246	2.2	H	6.59	50.42	74	-23.58
11510	44.04	PK	201	1.2	V	6.59	50.63	74	-23.37
5795 MHz									
5850	68.87	PK	59	1.2	H	-1.81	67.06	122.2	-55.14
5855	67.65	PK	335	2.4	H	-1.82	65.83	110.8	-44.97
5875	67.48	PK	129	2.3	H	-1.84	65.64	105.2	-39.56
5925	66.83	PK	7	1.4	H	-1.82	65.01	68.2	-3.19
5850	68.07	PK	341	2.3	V	-1.81	66.26	122.2	-55.94
5855	67.43	PK	181	2.2	V	-1.82	65.61	110.8	-45.19
5875	67.14	PK	199	2.4	V	-1.84	65.3	105.2	-39.9
5925	66.74	PK	42	2.3	V	-1.82	64.92	68.2	-3.28
11590	44.33	PK	89	1.3	H	6.57	50.9	74	-23.1
11590	44.61	PK	38	1.7	V	6.57	51.18	74	-22.82

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AC20(worst case MIMO)									
5745 MHz									
5650	65.68	PK	116	1.3	H	-1.95	63.73	68.2	-4.47
5700	66.64	PK	213	2.3	H	-2.02	64.62	105.2	-40.58
5720	68.23	PK	123	2.5	H	-1.97	66.26	110.8	-44.54
5725	75.26	PK	41	1.4	H	-1.96	73.3	122.2	-48.9
5650	65.56	PK	358	1.6	V	-1.95	63.61	68.2	-4.59
5700	66.54	PK	331	1.1	V	-2.02	64.52	105.2	-40.68
5720	67.82	PK	147	1.7	V	-1.97	65.85	110.8	-44.95
5725	70.9	PK	309	2.5	V	-1.96	68.94	122.2	-53.26
11490	43.61	PK	307	2.1	H	6.63	50.24	74	-23.76
11490	44.65	PK	29	1.9	V	6.63	51.28	74	-22.72
5785 MHz									
11570	45.07	PK	120	1.1	H	6.59	51.66	74	-22.34
11570	46.38	PK	297	2.3	V	6.59	52.97	74	-21.03
5825 MHz									
5850	68.06	PK	184	1.8	H	-1.81	66.25	122.2	-55.95
5855	67.55	PK	113	2.4	H	-1.82	65.73	110.8	-45.07
5875	67.12	PK	87	1.2	H	-1.84	65.28	105.2	-39.92
5925	66.81	PK	359	2.2	H	-1.82	64.99	68.2	-3.21
5850	67.77	PK	354	2.5	V	-1.81	65.96	122.2	-56.24
5855	67.43	PK	46	1.7	V	-1.82	65.61	110.8	-45.19
5875	67.04	PK	232	2.4	V	-1.84	65.2	105.2	-40
5925	66.71	PK	24	1.1	V	-1.82	64.89	68.2	-3.31
11650	43.36	PK	132	1.1	H	6.77	50.13	74	-23.87
11650	44.3	PK	11	2.2	V	6.77	51.07	74	-22.93

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AC40(worst case MIMO)									
5755 MHz									
5650	65.92	PK	307	2.3	H	-1.95	63.97	68.2	-4.23
5700	67.25	PK	312	1.4	H	-2.02	65.23	105.2	-39.97
5720	77.83	PK	326	1.4	H	-1.97	75.86	110.8	-34.94
5725	80.27	PK	75	1.9	H	-1.96	78.31	122.2	-43.89
5650	65.8	PK	149	1.8	V	-1.95	63.85	68.2	-4.35
5700	66.98	PK	247	1.7	V	-2.02	64.96	105.2	-40.24
5720	76.65	PK	246	1.5	V	-1.97	74.68	110.8	-36.12
5725	79.08	PK	311	1.4	V	-1.96	77.12	122.2	-45.08
11510	43.7	PK	228	1.8	H	6.59	50.29	74	-23.71
11510	43.96	PK	113	1.5	V	6.59	50.55	74	-23.45
5795 MHz									
5850	68.12	PK	48	1.2	H	-1.81	66.31	122.2	-55.89
5855	67.82	PK	28	1.1	H	-1.82	66	110.8	-44.8
5875	67.36	PK	239	1.7	H	-1.84	65.52	105.2	-39.68
5925	66.77	PK	323	1.9	H	-1.82	64.95	68.2	-3.25
5850	67.9	PK	284	1	V	-1.81	66.09	122.2	-56.11
5855	67.62	PK	53	1.4	V	-1.82	65.8	110.8	-45
5875	67.16	PK	1	1.8	V	-1.84	65.32	105.2	-39.88
5925	66.68	PK	174	1.4	V	-1.82	64.86	68.2	-3.34
11590	44.55	PK	199	1	H	6.57	51.12	74	-22.88
11590	44.8	PK	341	1.2	V	6.57	51.37	74	-22.63
802.11AC80(worst case MIMO)									
5775MHz									
5650	66.66	PK	112	1.9	H	-1.95	64.71	68.2	-3.49
5700	77.53	PK	359	1.9	H	-2.02	75.51	105.2	-29.69
5720	79.27	PK	161	2.2	H	-1.97	77.3	110.8	-33.5
5725	81.22	PK	23	1.5	H	-1.96	79.26	122.2	-42.94
5650	66.39	PK	250	2.2	V	-1.95	64.44	68.2	-3.76
5700	76.37	PK	356	2.2	V	-2.02	74.35	105.2	-30.85
5720	77.6	PK	136	1.2	V	-1.97	75.63	110.8	-35.17
5725	79.93	PK	337	2.2	V	-1.96	77.97	122.2	-44.23
5850	81.16	PK	286	2.4	H	-1.81	79.35	122.2	-42.85
5855	78.52	PK	100	1.9	H	-1.82	76.7	110.8	-34.1
5875	71.93	PK	125	1.1	H	-1.84	70.09	105.2	-35.11
5925	66.94	PK	58	2.2	H	-1.82	65.12	68.2	-3.08
5850	79.72	PK	258	2.1	V	-1.81	77.91	122.2	-44.29
5855	77.4	PK	43	1.7	V	-1.82	75.58	110.8	-35.22
5875	70.66	PK	162	2.2	V	-1.84	68.82	105.2	-36.38
5925	66.82	PK	110	1.4	V	-1.82	65	68.2	-3.2
11550	45.06	PK	140	1.1	H	6.61	51.67	74	-22.33
11550	45.63	PK	98	2.2	V	6.61	52.24	74	-21.76

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX20(worst case MIMO)									
5745MHz									
RU26#0									
5650	65.28	PK	10	1.5	H	-1.95	63.33	68.2	-4.87
5700	67.5	PK	357	2.1	H	-2.02	65.48	105.2	-39.72
5720	78.24	PK	309	2.3	H	-1.97	76.27	110.8	-34.53
5725	81.2	PK	215	1.4	H	-1.96	79.24	122.2	-42.96
5650	65.16	PK	162	1.6	V	-1.95	63.21	68.2	-4.99
5700	65.11	PK	342	2.1	V	-2.02	63.09	105.2	-42.11
5720	72.21	PK	253	2.4	V	-1.97	70.24	110.8	-40.56
5725	75.03	PK	115	1	V	-1.96	73.07	122.2	-49.13
RU52#37									
5650	65.92	PK	97	1.8	H	-1.95	63.97	68.2	-4.23
5700	66.55	PK	240	1.3	H	-2.02	64.53	105.2	-40.67
5720	77.85	PK	183	1.7	H	-1.97	75.88	110.8	-34.92
5725	79.26	PK	304	1.4	H	-1.96	77.3	122.2	-44.9
5650	65.81	PK	311	1.9	V	-1.95	63.86	68.2	-4.34
5700	66.39	PK	152	1	V	-2.02	64.37	105.2	-40.83
5720	73.95	PK	235	2.2	V	-1.97	71.98	110.8	-38.82
5725	75.5	PK	75	1	V	-1.96	73.54	122.2	-48.66
RU106#53									
5650	65.79	PK	118	1.4	H	-1.95	63.84	68.2	-4.36
5700	66.28	PK	345	1.9	H	-2.02	64.26	105.2	-40.94
5720	73.82	PK	63	1.8	H	-1.97	71.85	110.8	-38.95
5725	78.27	PK	116	2.2	H	-1.96	76.31	122.2	-45.89
5650	65.67	PK	243	2.1	V	-1.95	63.72	68.2	-4.48
5700	66.16	PK	328	1.1	V	-2.02	64.14	105.2	-41.06
5720	71.67	PK	10	1.6	V	-1.97	69.7	110.8	-41.1
5725	73.82	PK	124	1.5	V	-1.96	71.86	122.2	-50.34
RU242#61									
5650	65.7	PK	279	1.3	H	-1.95	63.75	68.2	-4.45
5700	66.4	PK	355	1.5	H	-2.02	64.38	105.2	-40.82
5720	72.13	PK	256	1.5	H	-1.97	70.16	110.8	-40.64
5725	81.43	PK	80	1.4	H	-1.96	79.47	122.2	-42.73
5650	65.59	PK	31	1.4	V	-1.95	63.64	68.2	-4.56
5700	66.25	PK	334	1.8	V	-2.02	64.23	105.2	-40.97
5720	71.17	PK	140	1.4	V	-1.97	69.2	110.8	-41.6
5725	76.38	PK	237	1.2	V	-1.96	74.42	122.2	-47.78

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5745 MHz									
RU26#0									
11490	49.82	PK	323	1.2	H	6.63	56.45	74	-17.55
11490	38.49	AV	323	1.2	H	6.63	45.12	54	-8.88
11490	52.45	PK	126	1.6	V	6.63	59.08	74	-14.92
11490	45.35	AV	126	1.6	V	6.63	51.98	54	-2.02
5785 MHz									
RU26#0									
11570	49.87	PK	1	2.2	H	6.59	56.46	74	-17.54
11570	36.79	AV	1	2.2	H	6.59	43.38	54	-10.62
11570	51.63	PK	56	2	V	6.59	58.22	74	-15.78
11570	44.04	AV	56	2	V	6.59	50.63	54	-3.37
5825 MHz									
RU26#8									
5850	77.2	PK	359	1	H	-1.81	75.39	122.2	-46.81
5855	73.24	PK	192	1.5	H	-1.82	71.42	110.8	-39.38
5875	67.16	PK	139	1.6	H	-1.84	65.32	105.2	-39.88
5925	66.8	PK	297	1	H	-1.82	64.98	68.2	-3.22
5850	72.21	PK	321	1.5	V	-1.81	70.4	122.2	-51.8
5855	71.43	PK	140	1.7	V	-1.82	69.61	110.8	-41.19
5875	67.04	PK	22	2.2	V	-1.84	65.2	105.2	-40
5925	66.98	PK	4	1.3	V	-1.82	65.16	68.2	-3.04
RU52#40									
5850	79.03	PK	88	2.3	H	-1.81	77.22	122.2	-44.98
5855	71.61	PK	163	1.7	H	-1.82	69.79	110.8	-41.01
5875	67.14	PK	58	1.9	H	-1.84	65.3	105.2	-39.9
5925	66.78	PK	154	2.1	H	-1.82	64.96	68.2	-3.24
5850	74.19	PK	16	1.3	V	-1.81	72.38	122.2	-49.82
5855	68.68	PK	261	2.5	V	-1.82	66.86	110.8	-43.94
5875	66.99	PK	5	1.3	V	-1.84	65.15	105.2	-40.05
5925	66.66	PK	271	1.7	V	-1.82	64.84	68.2	-3.36
RU106#54									
5850	77.43	PK	33	1.3	H	-1.81	75.62	122.2	-46.58
5855	70.32	PK	169	1.8	H	-1.82	68.5	110.8	-42.3
5875	66.85	PK	173	1.3	H	-1.84	65.01	105.2	-40.19
5925	66.71	PK	183	1.9	H	-1.82	64.89	68.2	-3.31
5850	72.37	PK	134	1	V	-1.81	70.56	122.2	-51.64
5855	68.32	PK	4	1.9	V	-1.82	66.5	110.8	-44.3
5875	66.69	PK	347	1.7	V	-1.84	64.85	105.2	-40.35
5925	66.61	PK	25	1.1	V	-1.82	64.79	68.2	-3.41

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5825 MHz									
RU242#61									
5850	77.86	PK	93	1.2	H	-1.81	76.05	122.2	-46.15
5855	69.06	PK	221	2.4	H	-1.82	67.24	110.8	-43.56
5875	66.8	PK	309	2.2	H	-1.84	64.96	105.2	-40.24
5925	66.74	PK	34	1.2	H	-1.82	64.92	68.2	-3.28
5850	75.22	PK	51	1.7	V	-1.81	73.41	122.2	-48.79
5855	67.81	PK	327	2.3	V	-1.82	65.99	110.8	-44.81
5875	66.64	PK	105	2.2	V	-1.84	64.8	105.2	-40.4
5925	66.65	PK	124	2	V	-1.82	64.83	68.2	-3.37
RU26#0									
11650	48.19	PK	11	2.2	H	6.77	54.96	74	-19.04
11650	36.39	AV	11	2.2	H	6.77	43.16	54	-10.84
11650	50.18	PK	124	1.4	V	6.77	56.95	74	-17.05
11650	42.41	AV	124	1.4	V	6.77	49.18	54	-4.82

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX40(worst case MIMO)									
5755 MHz									
RU26#0									
5650	66.06	PK	22	2.5	H	-1.95	64.11	68.2	-4.09
5700	68.54	PK	308	2.3	H	-2.02	66.52	105.2	-38.68
5720	80.97	PK	285	2	H	-1.97	79	110.8	-31.8
5725	84.83	PK	89	1.2	H	-1.96	82.87	122.2	-39.33
5650	65.88	PK	27	1.6	V	-1.95	63.93	68.2	-4.27
5700	67.39	PK	220	1.9	V	-2.02	65.37	105.2	-39.83
5720	77.61	PK	173	1.2	V	-1.97	75.64	110.8	-35.16
5725	81.97	PK	19	1.1	V	-1.96	80.01	122.2	-42.19
RU52#37									
5650	66.18	PK	119	2.1	H	-1.95	64.23	68.2	-3.97
5700	68.4	PK	2	1.8	H	-2.02	66.38	105.2	-38.82
5720	80.09	PK	11	1.5	H	-1.97	78.12	110.8	-32.68
5725	85.03	PK	65	1.5	H	-1.96	83.07	122.2	-39.13
5650	65.99	PK	39	2.3	V	-1.95	64.04	68.2	-4.16
5700	67.49	PK	165	1.2	V	-2.02	65.47	105.2	-39.73
5720	74.87	PK	180	1.4	V	-1.97	72.9	110.8	-37.9
5725	82.39	PK	156	1.9	V	-1.96	80.43	122.2	-41.77
RU106#53									
5650	65.87	PK	142	2	H	-1.95	63.92	68.2	-4.28
5700	66.55	PK	53	2.3	H	-2.02	64.53	105.2	-40.67
5720	77.65	PK	207	1.7	H	-1.97	75.68	110.8	-35.12
5725	84.76	PK	35	2.2	H	-1.96	82.8	122.2	-39.4
5650	65.78	PK	20	2.2	V	-1.95	63.83	68.2	-4.37
5700	66.4	PK	257	1.8	V	-2.02	64.38	105.2	-40.82
5720	74.21	PK	255	1.7	V	-1.97	72.24	110.8	-38.56
5725	81.08	PK	16	1.8	V	-1.96	79.12	122.2	-43.08
RU242#61									
5650	65.91	PK	320	1.4	H	-1.95	63.96	68.2	-4.24
5700	66.89	PK	251	1.2	H	-2.02	64.87	105.2	-40.33
5720	81.31	PK	333	1.1	H	-1.97	79.34	110.8	-31.46
5725	88.06	PK	273	1.7	H	-1.96	86.1	122.2	-36.1
5650	65.78	PK	176	2.3	V	-1.95	63.83	68.2	-4.37
5700	66.69	PK	148	2.4	V	-2.02	64.67	105.2	-40.53
5720	76.05	PK	69	1.4	V	-1.97	74.08	110.8	-36.72
5725	83.38	PK	185	2.3	V	-1.96	81.42	122.2	-40.78

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5755 MHz									
RU484#65									
5650	65.86	PK	97	1.4	H	-1.95	63.91	68.2	-4.29
5700	66.85	PK	162	1.8	H	-2.02	64.83	105.2	-40.37
5720	80.71	PK	74	2.2	H	-1.97	78.74	110.8	-32.06
5725	81.61	PK	122	1.6	H	-1.96	79.65	122.2	-42.55
5650	65.77	PK	286	2.3	V	-1.95	63.82	68.2	-4.38
5700	66.73	PK	69	1.8	V	-2.02	64.71	105.2	-40.49
5720	76.72	PK	283	1.1	V	-1.97	74.75	110.8	-36.05
5725	77.6	PK	297	2.3	V	-1.96	75.64	122.2	-46.56
RU26#0									
11510	51.79	PK	305	1.7	H	6.59	58.38	74	-15.62
11510	38.11	AV	305	1.7	H	6.59	44.7	54	-9.3
11510	54.77	PK	333	2.1	V	6.59	61.36	74	-12.64
11510	41.86	AV	333	2.1	V	6.59	48.45	54	-5.55
5795 MHz									
RU26#17									
5850	71.56	PK	14	2.5	H	-1.81	69.75	122.2	-52.45
5855	67.6	PK	288	2.1	H	-1.82	65.78	110.8	-45.02
5875	67.05	PK	55	1.8	H	-1.84	65.21	105.2	-39.99
5925	66.81	PK	316	1.7	H	-1.82	64.99	68.2	-3.21
5850	68.75	PK	159	1.2	V	-1.81	66.94	122.2	-55.26
5855	67.31	PK	262	1.3	V	-1.82	65.49	110.8	-45.31
5875	66.86	PK	78	1.1	V	-1.84	65.02	105.2	-40.18
5925	66.68	PK	224	2.4	V	-1.82	64.86	68.2	-3.34
RU52#44									
5850	74.01	PK	85	2.5	H	-1.81	72.2	122.2	-50
5855	68.56	PK	42	1.2	H	-1.82	66.74	110.8	-44.06
5875	67.15	PK	210	1.1	H	-1.84	65.31	105.2	-39.89
5925	66.77	PK	333	1.9	H	-1.82	64.95	68.2	-3.25
5850	70.09	PK	13	1.1	V	-1.81	68.28	122.2	-53.92
5855	68.05	PK	137	2.5	V	-1.82	66.23	110.8	-44.57
5875	66.99	PK	189	1.9	V	-1.84	65.15	105.2	-40.05
5925	66.68	PK	262	1.6	V	-1.82	64.86	68.2	-3.34

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5795 MHz									
RU106#56									
5850	69.03	PK	159	1.9	H	-1.81	67.22	122.2	-54.98
5855	67.91	PK	108	2	H	-1.82	66.09	110.8	-44.71
5875	66.9	PK	23	2.3	H	-1.84	65.06	105.2	-40.14
5925	66.73	PK	278	1	H	-1.82	64.91	68.2	-3.29
5850	68.39	PK	307	2.4	V	-1.81	66.58	122.2	-55.62
5855	67.55	PK	48	1.8	V	-1.82	65.73	110.8	-45.07
5875	66.76	PK	218	2.1	V	-1.84	64.92	105.2	-40.28
5925	66.61	PK	106	2	V	-1.82	64.79	68.2	-3.41
RU242#62									
5850	68.39	PK	157	1.8	H	-1.81	66.58	122.2	-55.62
5855	67.31	PK	158	2.3	H	-1.82	65.49	110.8	-45.31
5875	66.85	PK	122	1.1	H	-1.84	65.01	105.2	-40.19
5925	66.72	PK	293	1	H	-1.82	64.9	68.2	-3.3
5850	68.14	PK	151	2.4	V	-1.81	66.33	122.2	-55.87
5855	67.06	PK	139	2.4	V	-1.82	65.24	110.8	-45.56
5875	66.73	PK	332	1.5	V	-1.84	64.89	105.2	-40.31
5925	66.62	PK	273	1.4	V	-1.82	64.8	68.2	-3.4
RU484#65									
5850	69.32	PK	72	1.7	H	-1.81	67.51	122.2	-54.69
5855	67.57	PK	292	1.3	H	-1.82	65.75	110.8	-45.05
5875	67.17	PK	251	1.7	H	-1.84	65.33	105.2	-39.87
5925	66.74	PK	345	1	H	-1.82	64.92	68.2	-3.28
5850	68.5	PK	300	1.2	V	-1.81	66.69	122.2	-55.51
5855	67.3	PK	244	1.8	V	-1.82	65.48	110.8	-45.32
5875	67.06	PK	312	1.1	V	-1.84	65.22	105.2	-39.98
5925	66.65	PK	243	1.3	V	-1.82	64.83	68.2	-3.37
RU26#0									
11590	50.08	PK	132	2.5	H	6.57	56.65	74	-17.35
11590	37.61	AV	132	2.5	H	6.57	44.18	54	-9.82
11590	54.35	PK	301	1.1	V	6.57	60.92	74	-13.08
11590	41.42	AV	301	1.1	V	6.57	47.99	54	-6.01

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11AX80(worst case MIMO)									
5775MHz									
RU26#0									
5650	66.21	PK	118	2.3	H	-1.95	64.26	68.2	-3.94
5700	79.49	PK	56	1.5	H	-2.02	77.47	105.2	-27.73
5720	80.91	PK	78	1.4	H	-1.97	78.94	110.8	-31.86
5725	85.01	PK	178	2.3	H	-1.96	83.05	122.2	-39.15
5650	66.03	PK	280	2.1	V	-1.95	64.08	68.2	-4.12
5700	77.47	PK	86	1.9	V	-2.02	75.45	105.2	-29.75
5720	78.23	PK	155	1.8	V	-1.97	76.26	110.8	-34.54
5725	82.63	PK	48	1.4	V	-1.96	80.67	122.2	-41.53
RU26#36									
5850	80.7	PK	351	1.5	H	-1.81	78.89	122.2	-43.31
5855	72.04	PK	52	1.9	H	-1.82	70.22	110.8	-40.58
5875	67.77	PK	94	1.3	H	-1.84	65.93	105.2	-39.27
5925	66.83	PK	199	1.9	H	-1.82	65.01	68.2	-3.19
5850	77.82	PK	260	2	V	-1.81	76.01	122.2	-46.19
5855	70.24	PK	170	1.9	V	-1.82	68.42	110.8	-42.38
5875	67.34	PK	351	2.5	V	-1.84	65.5	105.2	-39.7
5925	66.71	PK	199	1.5	V	-1.82	64.89	68.2	-3.31
RU52#37									
5650	66.1	PK	261	1.2	H	-1.95	64.15	68.2	-4.05
5700	74.82	PK	273	2.5	H	-2.02	72.8	105.2	-32.4
5720	78.79	PK	171	1.1	H	-1.97	76.82	110.8	-33.98
5725	85.57	PK	88	1.7	H	-1.96	83.61	122.2	-38.59
5650	65.97	PK	299	1.4	V	-1.95	64.02	68.2	-4.18
5700	73.79	PK	185	1	V	-2.02	71.77	105.2	-33.43
5720	75.88	PK	71	1.4	V	-1.97	73.91	110.8	-36.89
5725	82.8	PK	154	2	V	-1.96	80.84	122.2	-41.36
RU52#52									
5850	77.19	PK	167	2	H	-1.81	75.38	122.2	-46.82
5855	70.56	PK	151	1.4	H	-1.82	68.74	110.8	-42.06
5875	67.89	PK	58	1.1	H	-1.84	66.05	105.2	-39.15
5925	66.78	PK	101	2.1	H	-1.82	64.96	68.2	-3.24
5850	76.75	PK	208	1.5	V	-1.81	74.94	122.2	-47.26
5855	69.88	PK	102	1.1	V	-1.82	68.06	110.8	-42.74
5875	67.53	PK	143	1.4	V	-1.84	65.69	105.2	-39.51
5925	66.67	PK	274	1	V	-1.82	64.85	68.2	-3.35

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5775 MHz									
RU106#53									
5650	66.23	PK	113	1	H	-1.95	64.28	68.2	-3.92
5700	71.25	PK	142	1.5	H	-2.02	69.23	105.2	-35.97
5720	77.67	PK	97	1.7	H	-1.97	75.7	110.8	-35.1
5725	84.82	PK	186	1.1	H	-1.96	82.86	122.2	-39.34
5650	66.06	PK	5	1.3	V	-1.95	64.11	68.2	-4.09
5700	69.95	PK	224	2.2	V	-2.02	67.93	105.2	-37.27
5720	74.79	PK	343	1.5	V	-1.97	72.82	110.8	-37.98
5725	81.7	PK	9	1.6	V	-1.96	79.74	122.2	-42.46
RU106#60									
5850	74.5	PK	91	2.1	H	-1.81	72.69	122.2	-49.51
5855	70.73	PK	240	1.8	H	-1.82	68.91	110.8	-41.89
5875	67.68	PK	163	1.7	H	-1.84	65.84	105.2	-39.36
5925	66.8	PK	288	1.7	H	-1.82	64.98	68.2	-3.22
5850	70.9	PK	295	1.9	V	-1.81	69.09	122.2	-53.11
5855	68.74	PK	81	1.8	V	-1.82	66.92	110.8	-43.88
5875	67.39	PK	217	1.5	V	-1.84	65.55	105.2	-39.65
5925	66.68	PK	290	2.3	V	-1.82	64.86	68.2	-3.34
RU242#61									
5650	66.11	PK	49	2	H	-1.95	64.16	68.2	-4.04
5700	69.65	PK	187	1.2	H	-2.02	67.63	105.2	-37.57
5720	78.12	PK	302	1.6	H	-1.97	76.15	110.8	-34.65
5725	86.88	PK	285	2.2	H	-1.96	84.92	122.2	-37.28
5650	65.92	PK	181	2.4	V	-1.95	63.97	68.2	-4.23
5700	68.33	PK	351	2.3	V	-2.02	66.31	105.2	-38.89
5720	76.32	PK	45	2	V	-1.97	74.35	110.8	-36.45
5725	82.5	PK	351	1.8	V	-1.96	80.54	122.2	-41.66
RU242#64									
5850	71.17	PK	32	1.9	H	-1.81	69.36	122.2	-52.84
5855	69.91	PK	105	1.2	H	-1.82	68.09	110.8	-42.71
5875	67.54	PK	271	2.4	H	-1.84	65.7	105.2	-39.5
5925	66.77	PK	7	1.7	H	-1.82	64.95	68.2	-3.25
5850	69.43	PK	325	2.4	V	-1.81	67.62	122.2	-54.58
5855	68.28	PK	74	1.9	V	-1.82	66.46	110.8	-44.34
5875	67.33	PK	14	2.2	V	-1.84	65.49	105.2	-39.71
5925	66.65	PK	289	2.2	V	-1.82	64.83	68.2	-3.37

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5775MHz									
RU484#65									
5650	66.21	PK	44	2.2	H	-1.95	64.26	68.2	-3.94
5700	70.13	PK	234	1.1	H	-2.02	68.11	105.2	-37.09
5720	84.8	PK	127	1.5	H	-1.97	82.83	110.8	-27.97
5725	85.13	PK	291	1.1	H	-1.96	83.17	122.2	-39.03
5650	66.05	PK	305	1.7	V	-1.95	64.1	68.2	-4.1
5700	68.86	PK	258	1.1	V	-2.02	66.84	105.2	-38.36
5720	82.74	PK	97	2.3	V	-1.97	80.77	110.8	-30.03
5725	83.44	PK	152	1.2	V	-1.96	81.48	122.2	-40.72
RU484#66									
5850	72.33	PK	26	2.5	H	-1.81	70.52	122.2	-51.68
5855	69.83	PK	116	1.8	H	-1.82	68.01	110.8	-42.79
5875	67.48	PK	277	2.4	H	-1.84	65.64	105.2	-39.56
5925	66.77	PK	173	1.2	H	-1.82	64.95	68.2	-3.25
5850	70.95	PK	11	1.2	V	-1.81	69.14	122.2	-53.06
5855	69.03	PK	83	1.4	V	-1.82	67.21	110.8	-43.59
5875	67.29	PK	330	1.1	V	-1.84	65.45	105.2	-39.75
5925	66.64	PK	116	1	V	-1.82	64.82	68.2	-3.38
RU996#67									
5650	66.26	PK	202	1.3	H	-1.95	64.31	68.2	-3.89
5700	76.78	PK	110	2.3	H	-2.02	74.76	105.2	-30.44
5720	81.77	PK	277	1.2	H	-1.97	79.8	110.8	-31
5725	82.4	PK	101	1.7	H	-1.96	80.44	122.2	-41.76
5650	66.1	PK	194	2.4	V	-1.95	64.15	68.2	-4.05
5700	73.58	PK	315	1.4	V	-2.02	71.56	105.2	-33.64
5720	78.44	PK	266	2.5	V	-1.97	76.47	110.8	-34.33
5725	79.28	PK	224	2	V	-1.96	77.32	122.2	-44.88
5850	77.72	PK	183	1.3	H	-1.81	75.91	122.2	-46.29
5855	75.68	PK	302	2.1	H	-1.82	73.86	110.8	-36.94
5875	70.17	PK	79	1.7	H	-1.84	68.33	105.2	-36.87
5925	66.86	PK	99	1	H	-1.82	65.04	68.2	-3.16
5850	74.66	PK	262	2	V	-1.81	72.85	122.2	-49.35
5855	73.02	PK	259	1.5	V	-1.82	71.2	110.8	-39.6
5875	68.15	PK	273	1.7	V	-1.84	66.31	105.2	-38.89
5925	66.74	PK	53	1.5	V	-1.82	64.92	68.2	-3.28

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
5775MHz									
RU26#0									
11550	50.48	PK	176	1.9	H	6.61	57.09	74	-16.91
11550	40.36	AV	176	1.9	H	6.61	46.97	54	-7.03
11550	53.75	PK	153	2.2	V	6.61	60.36	74	-13.64
11550	44.09	AV	153	2.2	V	6.61	50.7	54	-3.3

Note:



Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude)= Factor + Reading

Margin = Absolute Level (Corrected Amplitude) - Limit

The other spurious emission which is 20dB below to the limit or in the noise floor was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

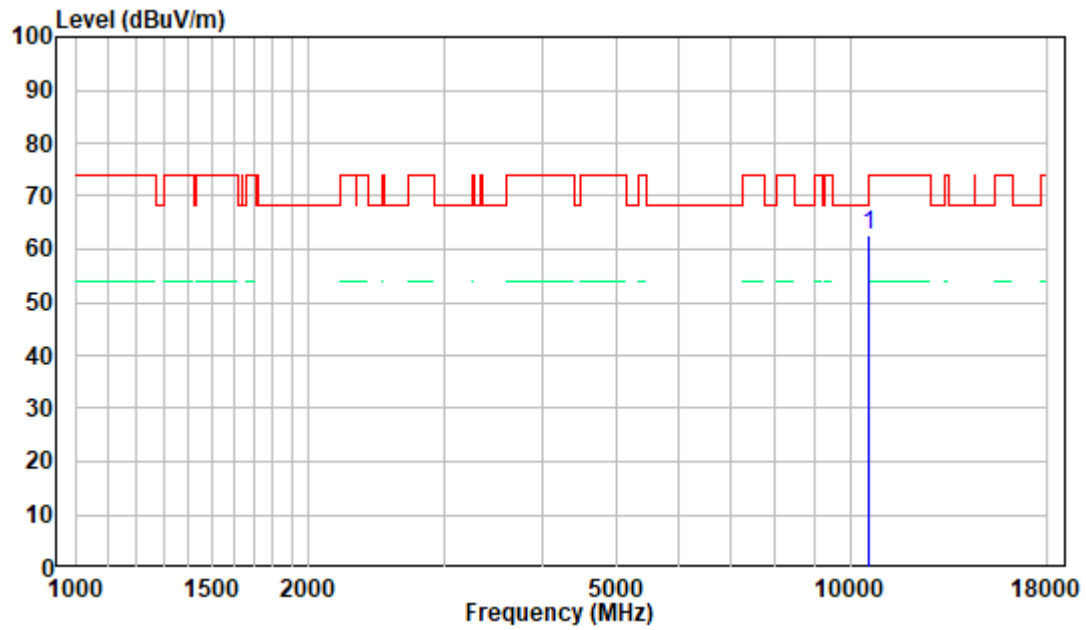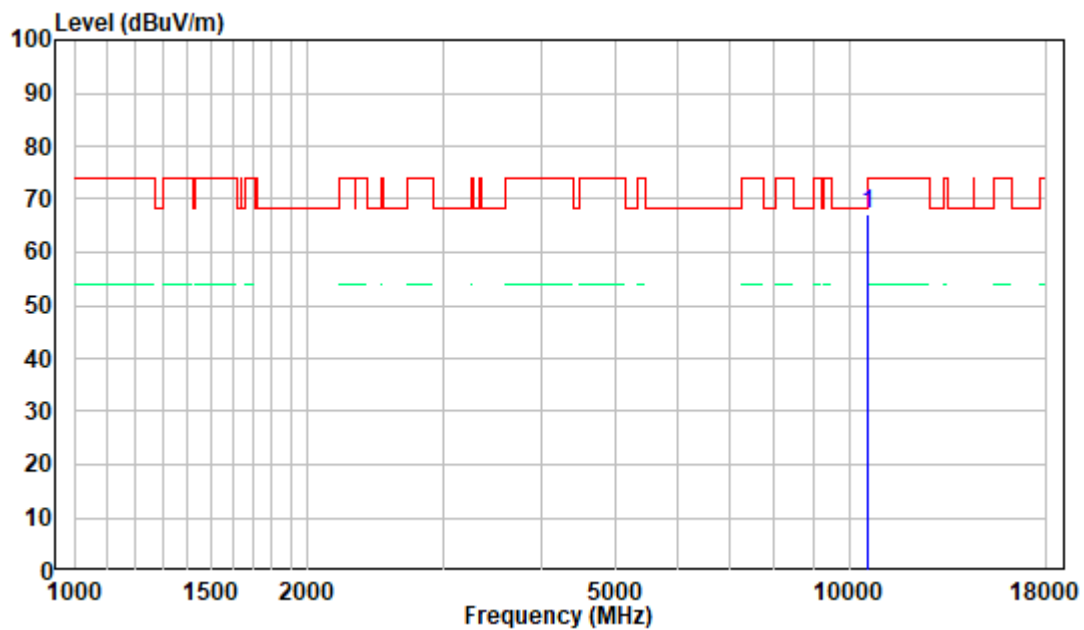1-18 GHz:**Pre-scan Plots:****802.11 ax20 5280MHz
Horizontal****Vertical**


18 -40GHz:

Pre-scan Plots:

802.11 ax20 5280MHz
Horizontal

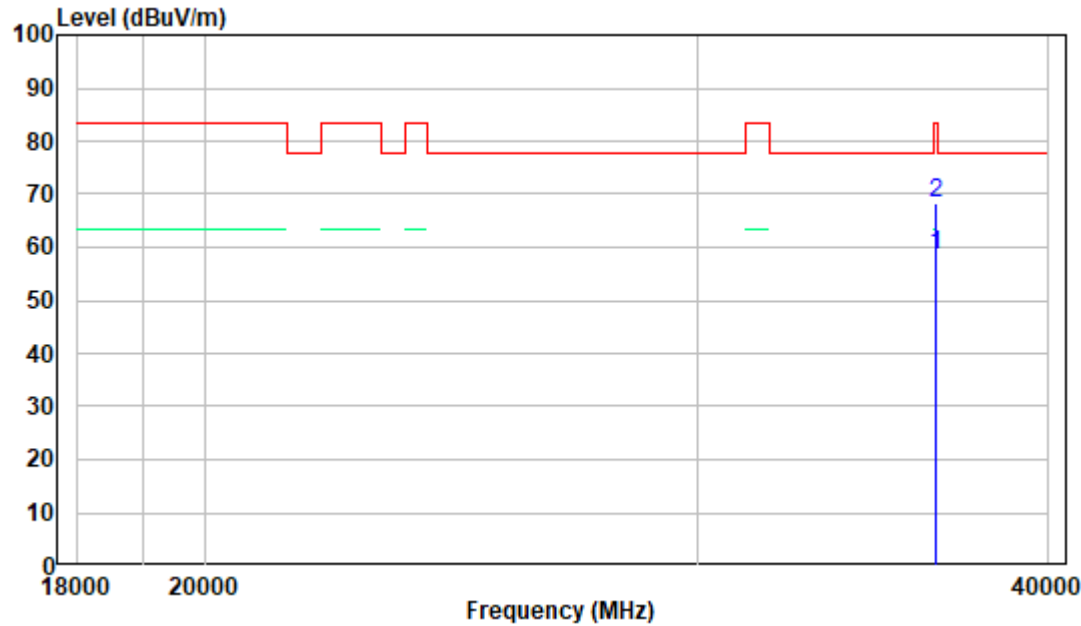

Vertical

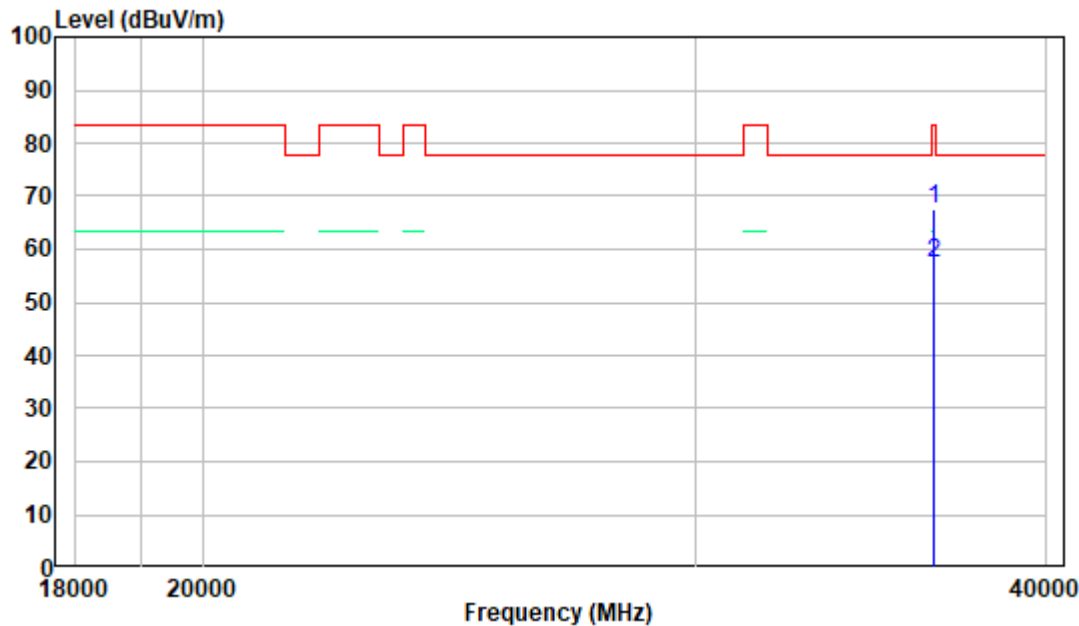

FCC §15.407(a),(e) – 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	26.8~27.5℃
Relative Humidity:	51~62 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling from 2022-05-15 to 2022-07-10.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard


For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

- c. Place the EUT on a bench and set it in transmitting mode.
- d. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- e. Add a correction factor to the display.



Note: the RF control unit has built-in power sensor.

Test Data**Environmental Conditions**

Temperature:	26.8~28.6℃
Relative Humidity:	51~62 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling from 2022-05-15 to 2022-07-31.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) - POWER SPECTRAL DENSITY

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).
- Set $\text{VBW} \geq 3 \text{ RBW}$.
- If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.



Test Data**Environmental Conditions**

Temperature:	26.8~28.6℃
Relative Humidity:	51~62 %
ATM Pressure:	101.0 kPa

The testing was performed by Roger Ling from 2022-05-15 to 2022-07-31.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.


APPENDIX

Appendix A1: Emission Bandwidth Test Result


Test Mode	Antenna	Channel	26db EBW [MHz]	Limit[MHz]	Verdict
11A	Ant0	5180	21.04	---	---
	Ant0	5200	21.36	---	---
	Ant0	5240	21.24	---	---
	Ant0	5260	21.52	---	---
	Ant0	5280	21.48	---	---
	Ant0	5320	21.52	---	---
	Ant0	5500	21.44	---	---
	Ant0	5580	21.32	---	---
11N20MIMO	Ant0	5700	21.12	---	---
	Ant0	5180	21.44	---	---
	Ant0	5200	21.48	---	---
	Ant0	5240	21.32	---	---
	Ant0	5260	21.36	---	---
	Ant0	5280	21.40	---	---
	Ant0	5320	21.48	---	---
	Ant0	5500	21.56	---	---
11N40MIMO	Ant0	5580	21.52	---	---
	Ant0	5700	21.56	---	---
	Ant0	5190	40.56	---	---
	Ant0	5230	39.92	---	---
	Ant0	5270	40.40	---	---
	Ant0	5310	40.56	---	---
11AC20MIMO	Ant0	5510	40.24	---	---
	Ant0	5550	40.48	---	---
	Ant0	5670	40.16	---	---
	Ant0	5180	21.52	---	---
	Ant0	5200	21.72	---	---
	Ant0	5240	21.56	---	---
	Ant0	5260	21.76	---	---
	Ant0	5280	21.52	---	---
11AC40MIMO	Ant0	5320	21.72	---	---
	Ant0	5500	21.68	---	---
	Ant0	5580	21.44	---	---
	Ant0	5700	21.68	---	---
	Ant0	5190	42.16	---	---
	Ant0	5230	47.44	---	---
	Ant0	5270	40.40	---	---
11AC80MIMO	Ant0	5310	40.72	---	---
	Ant0	5510	40.56	---	---
	Ant0	5550	40.72	---	---
	Ant0	5670	40.64	---	---
	Ant0	5210	83.04	---	---
	Ant0	5290	82.72	---	---
11AX20MIMO_242Tone_RU61	Ant0	5530	84.16	---	---
	Ant0	5610	84.32	---	---
	Ant0	5180	21.40	---	---
	Ant0	5200	21.48	---	---
	Ant0	5240	21.20	---	---

	Ant0	5260	21.60	---	---
	Ant0	5280	21.36	---	---
	Ant0	5320	21.24	---	---
	Ant0	5500	21.20	---	---
	Ant0	5580	21.40	---	---
	Ant0	5700	21.28	---	---
11AX40MIMO_484Tone_RU65	Ant0	5190	40.56	---	---
	Ant0	5230	40.88	---	---
	Ant0	5270	40.64	---	---
	Ant0	5310	40.64	---	---
	Ant0	5510	40.40	---	---
	Ant0	5550	40.64	---	---
11AX80MIMO_996Tone_RU67	Ant0	5670	40.40	---	---
	Ant0	5210	82.72	---	---
	Ant0	5290	82.40	---	---
	Ant0	5530	82.56	---	---
	Ant0	5610	82.72	---	---

Test Graphs

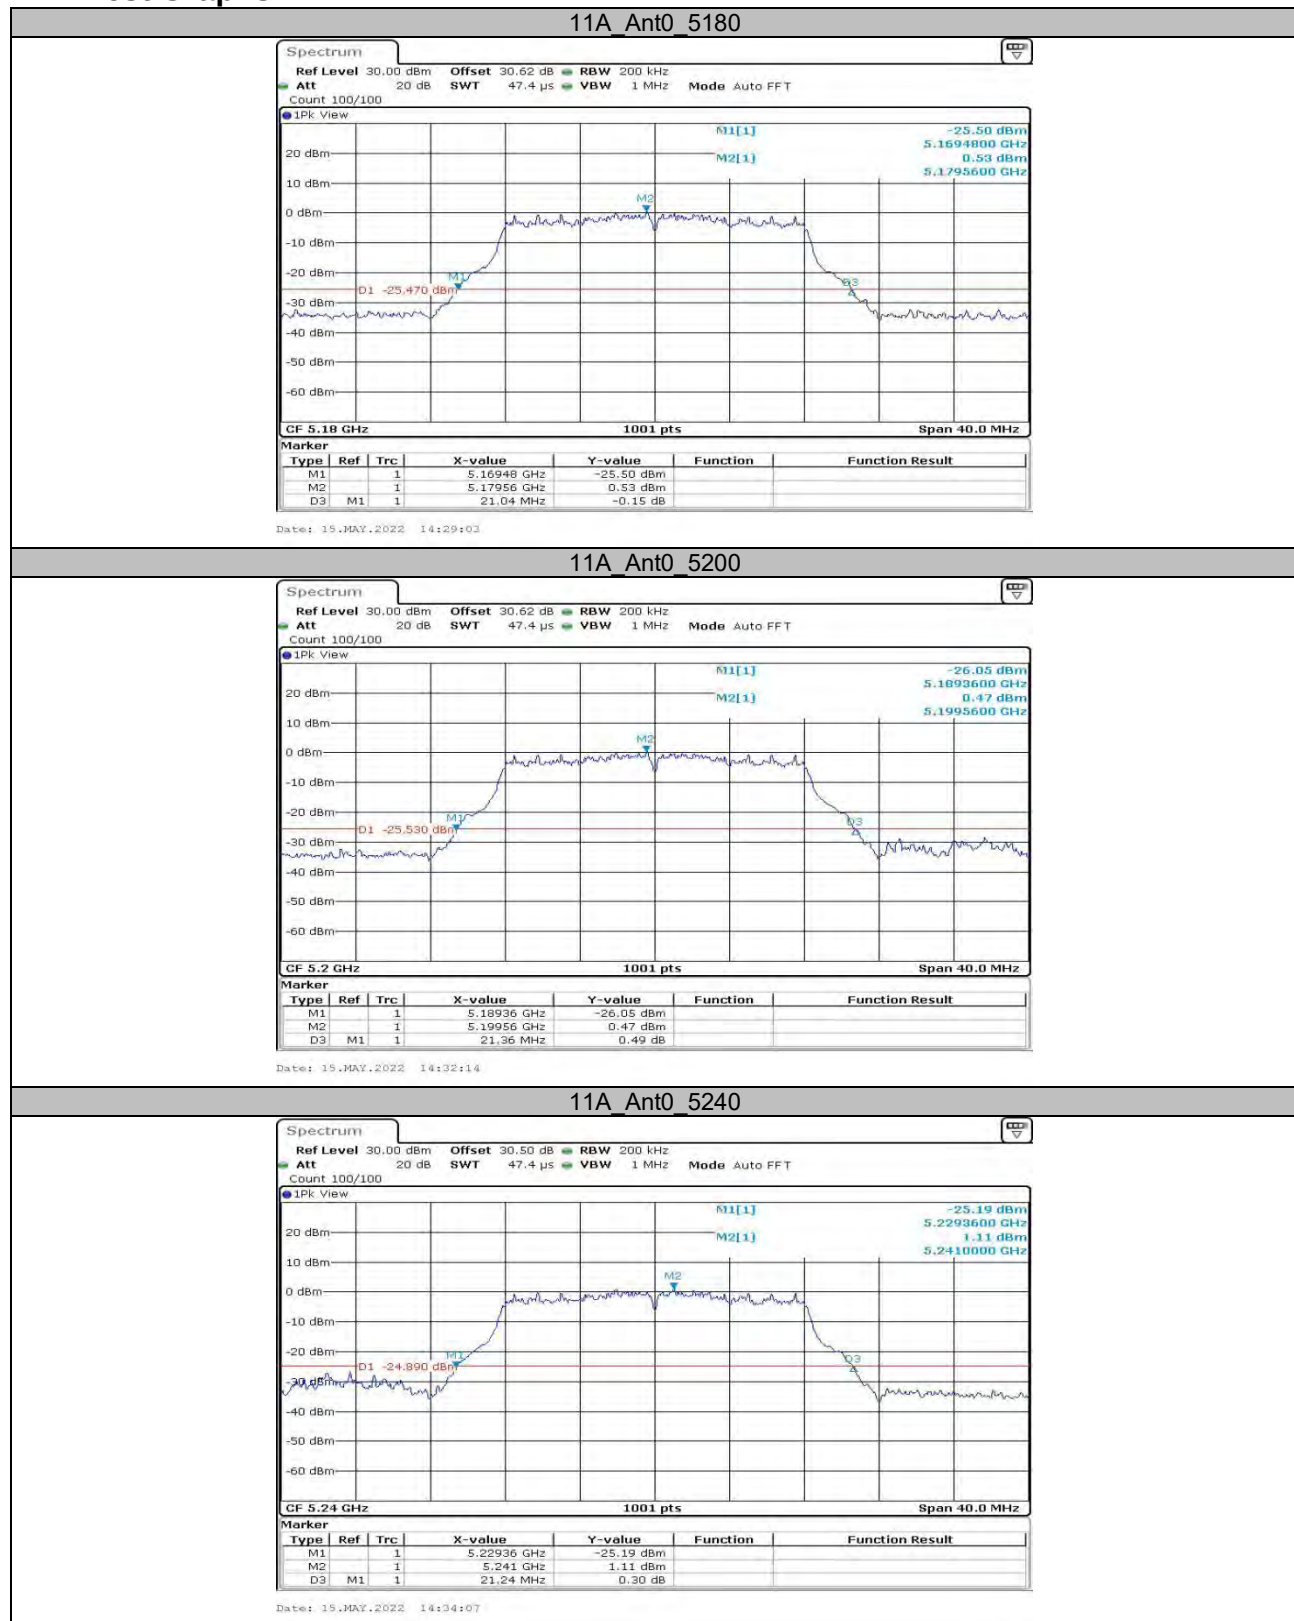


11A_Ant0_5260

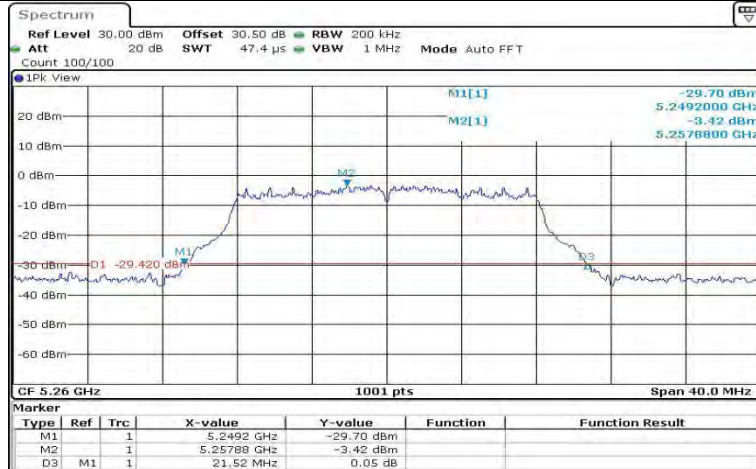


Date: 15.MAY.2022 14:35:58

11A_Ant0_5280

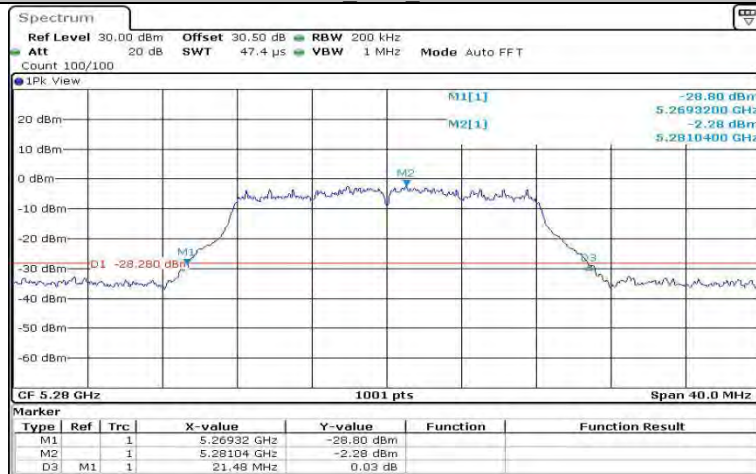

Date: 15.MAY.2022 14:37:54

11A_Ant0_5320

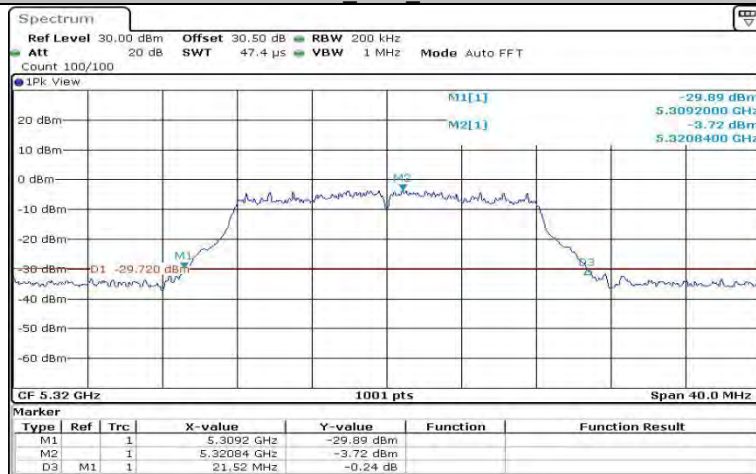


Date: 15.MAY.2022 14:39:48

11A_Ant0_5500




Date: 15.MAY.2022 14:42:43

11A_Ant0_5580

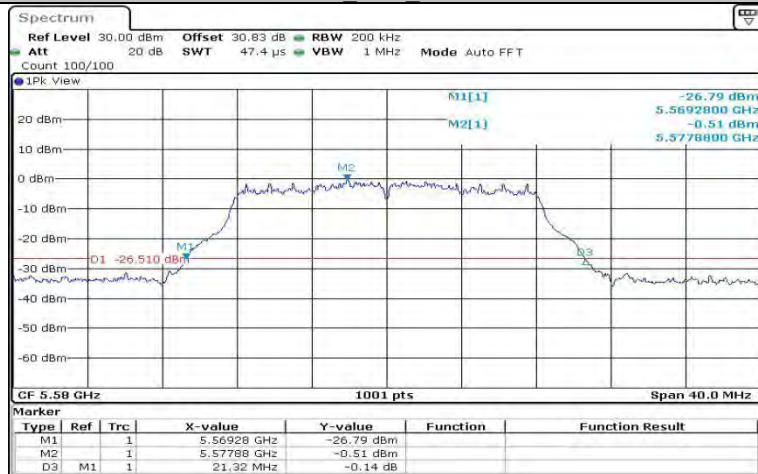

Date: 15.MAY.2022 14:44:30

11A_Ant0_5700

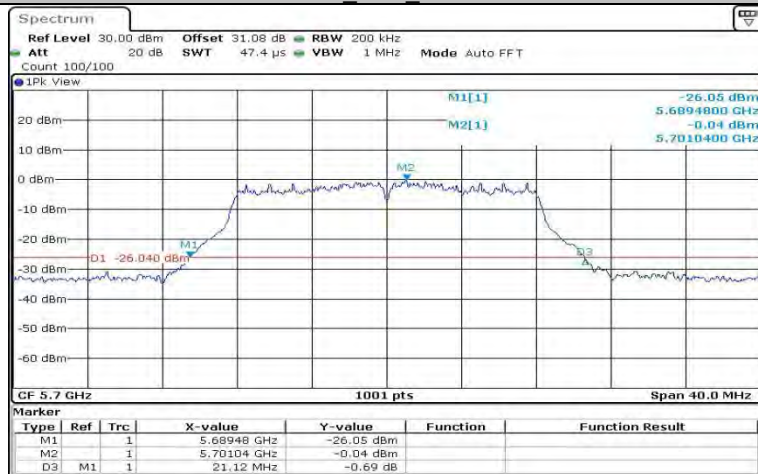

Date: 15.MAY.2022 14:46:50

11N20MIMO_Ant0_5180




Date: 15.MAY.2022 18:50:41

11N20MIMO_Ant0_5200




Date: 15.MAY.2022 18:53:59

11N20MIMO_Ant0_5240

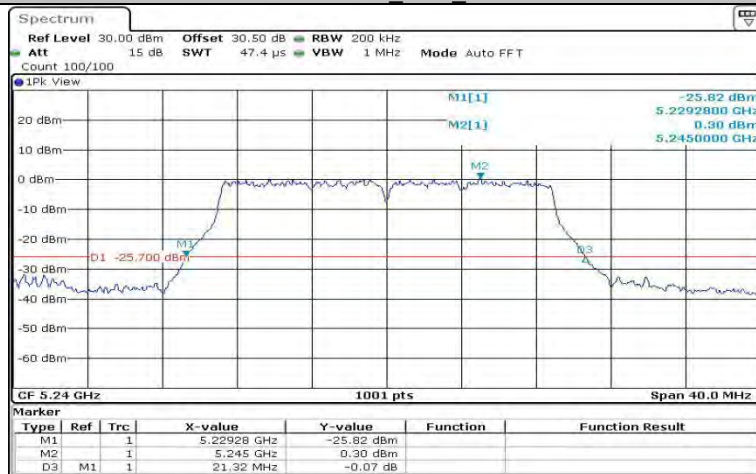


Date: 15.MAY.2022 18:57:15

11N20MIMO_Ant0_5260

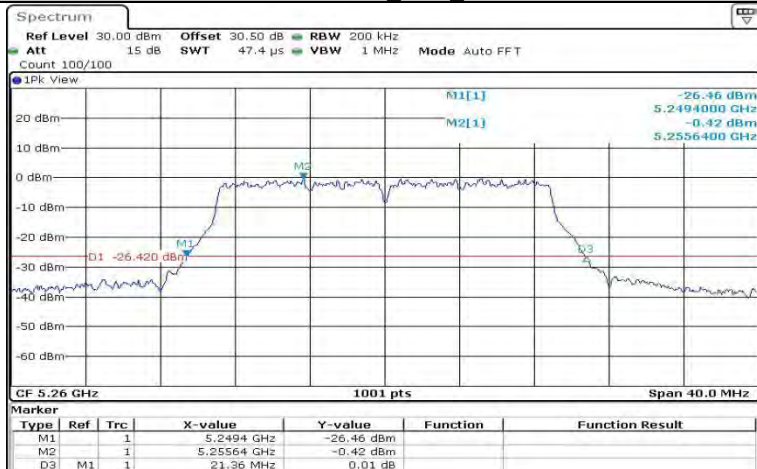


Date: 15.MAY.2022 19:48:49

11N20MIMO_Ant0_5280

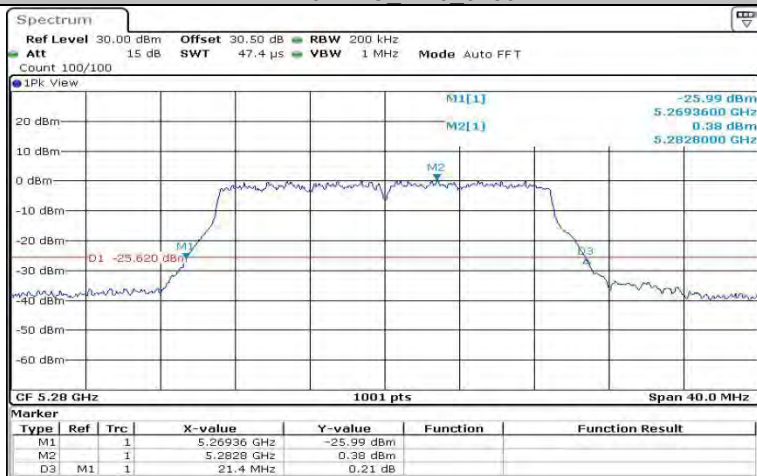


Date: 15.MAY.2022 19:51:33

11N20MIMO_Ant0_5320

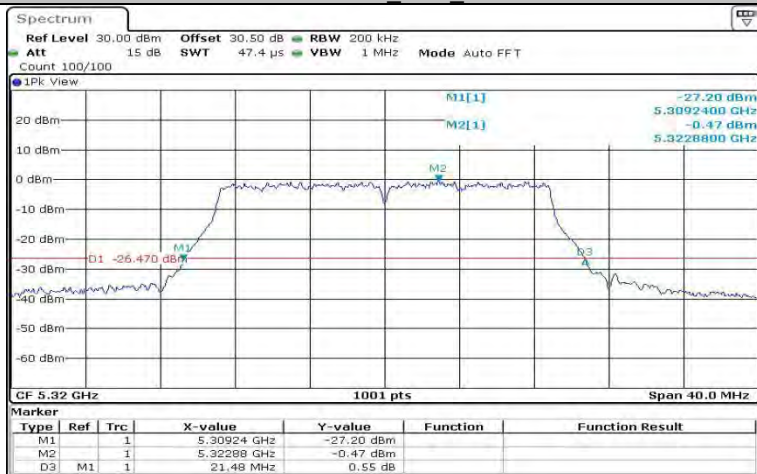


Date: 15.MAY.2022 19:54:38

11N20MIMO_Ant0_5500

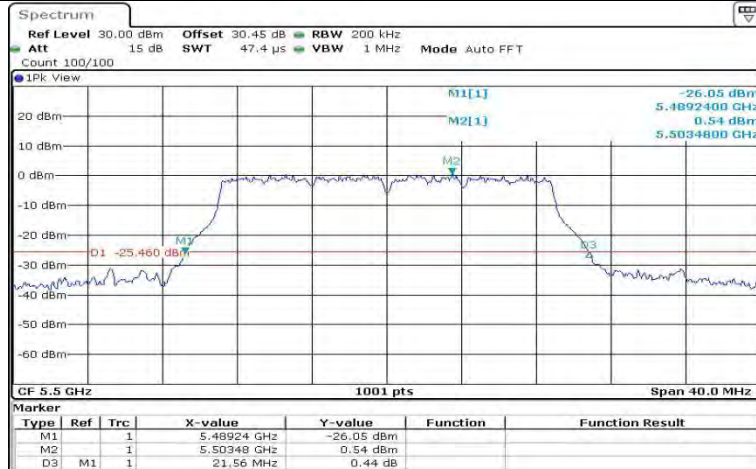


Date: 15.MAY.2022 19:57:25

11N20MIMO_Ant0_5580

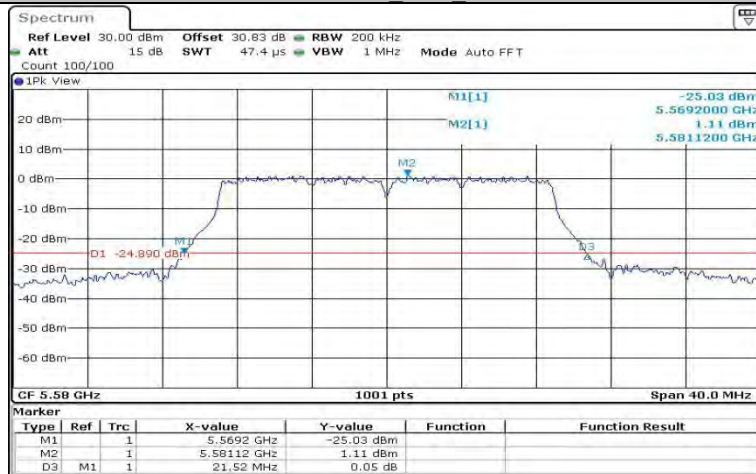


Date: 15.MAY.2022 20:00:11

11N20MIMO_Ant0_5700

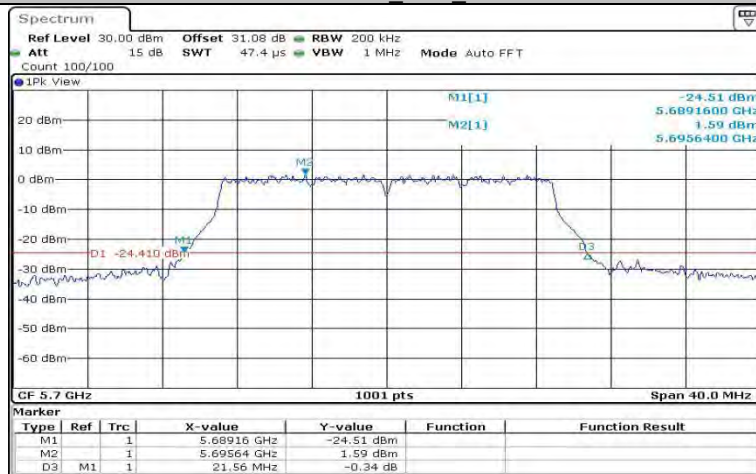


Date: 15.MAY.2022 20:03:23

11N40MIMO_Ant0_5190

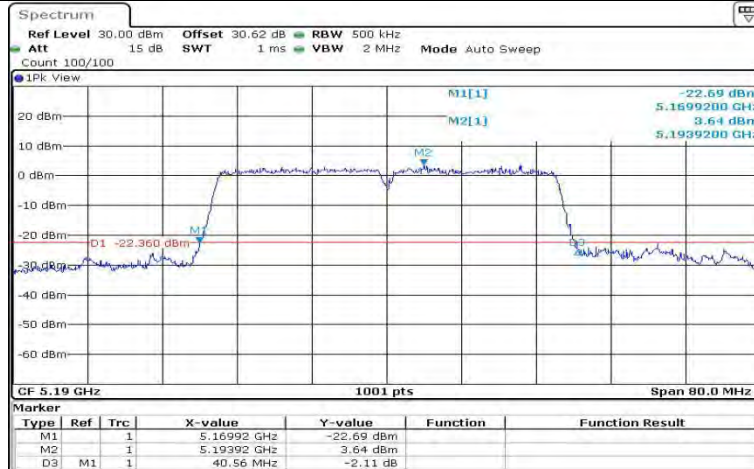


Date: 15.MAY.2022 20:15:06

11N40MIMO_Ant0_5230

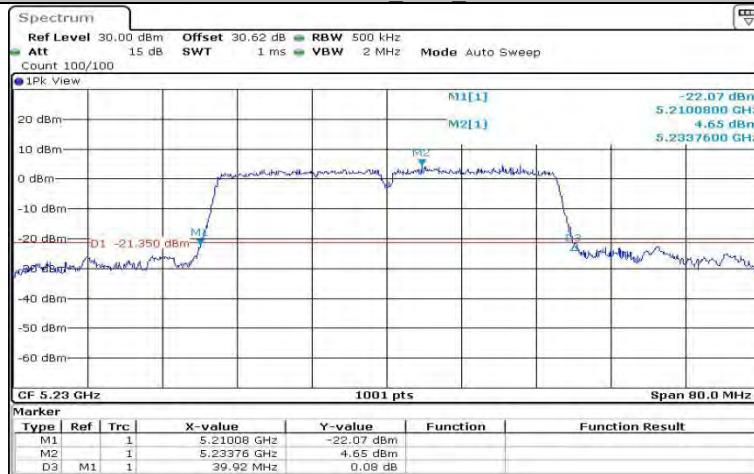


Date: 15.MAY.2022 20:17:55

11N40MIMO_Ant0_5270

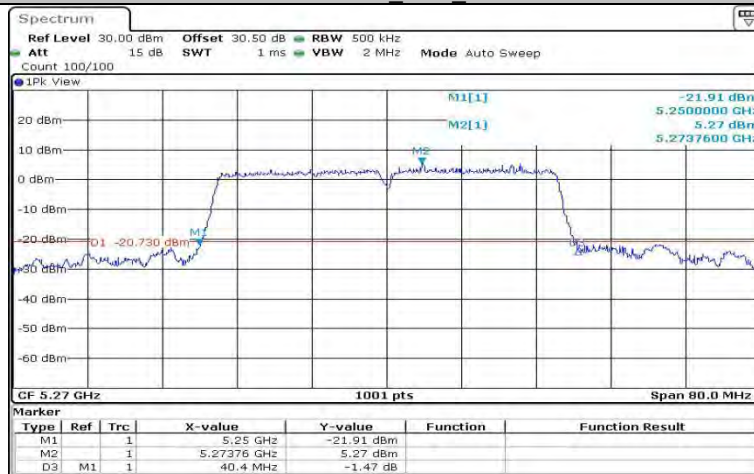


Date: 15.MAY.2022 20:21:41

11N40MIMO_Ant0_5310

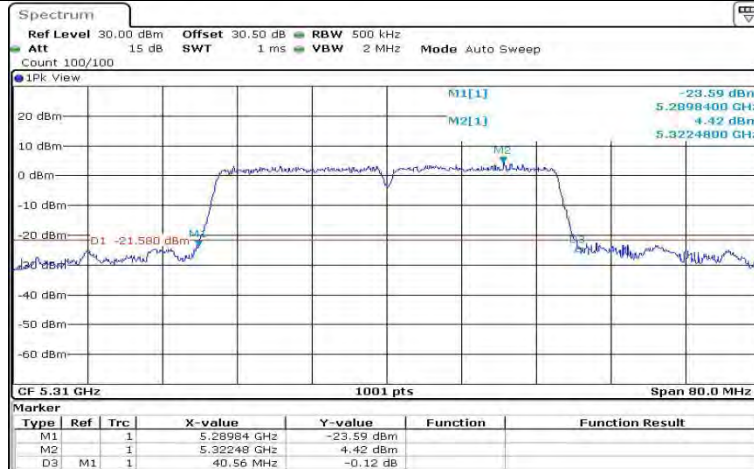


Date: 15.MAY.2022 20:24:23

11N40MIMO_Ant0_5510

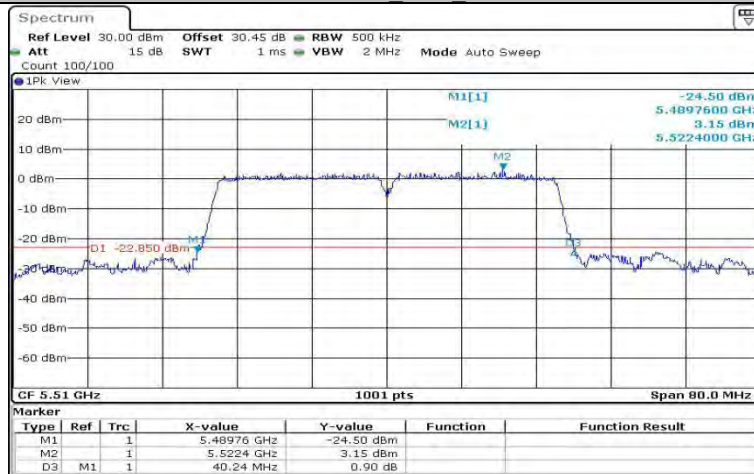

Date: 15.MAY.2022 20:27:07

11N40MIMO_Ant0_5550

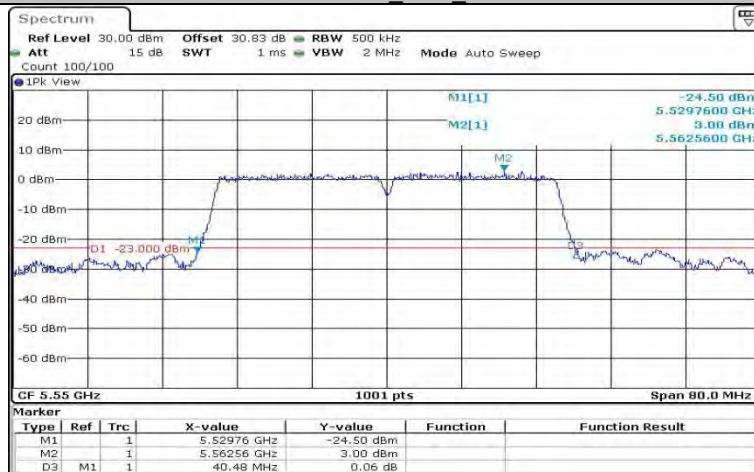

Date: 15.MAY.2022 20:29:52

11N40MIMO_Ant0_5670



Date: 15.MAY.2022 20:42:49

11AC20MIMO_Ant0_5180




Date: 15.MAY.2022 20:47:47

11AC20MIMO_Ant0_5200




Date: 15.MAY.2022 20:51:36

11AC20MIMO_Ant0_5240

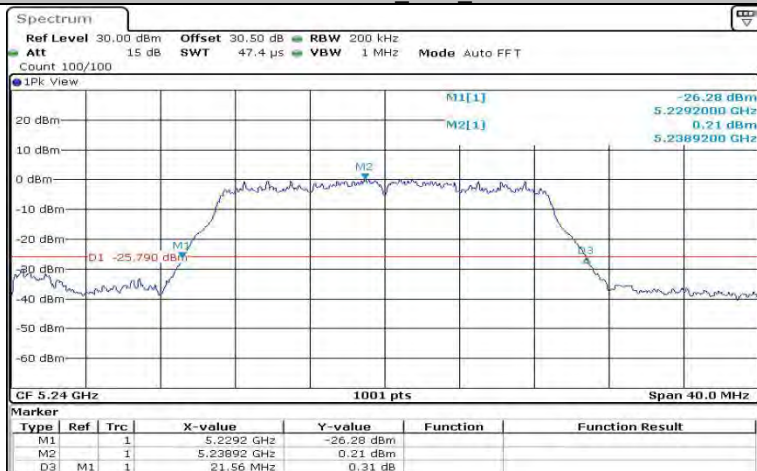

11AC20MIMO_Ant0_5260

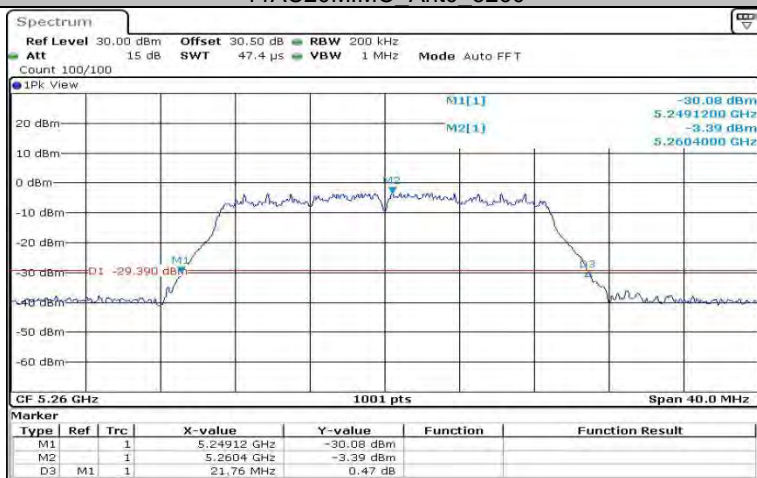

11AC20MIMO_Ant0_5280




11AC20MIMO_Ant0_5320



Date: 15.MAY.2022 21:08:03

11AC20MIMO_Ant0_5500

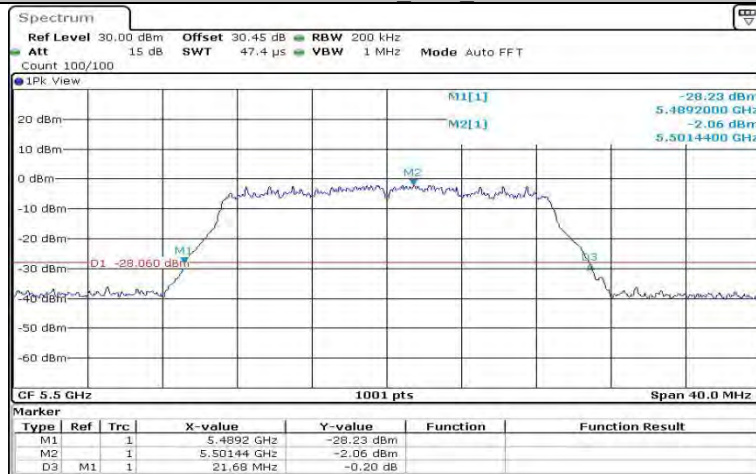


Date: 15.MAY.2022 21:11:02

11AC20MIMO_Ant0_5580




Date: 15.MAY.2022 21:14:20

11AC20MIMO Ant0 5700

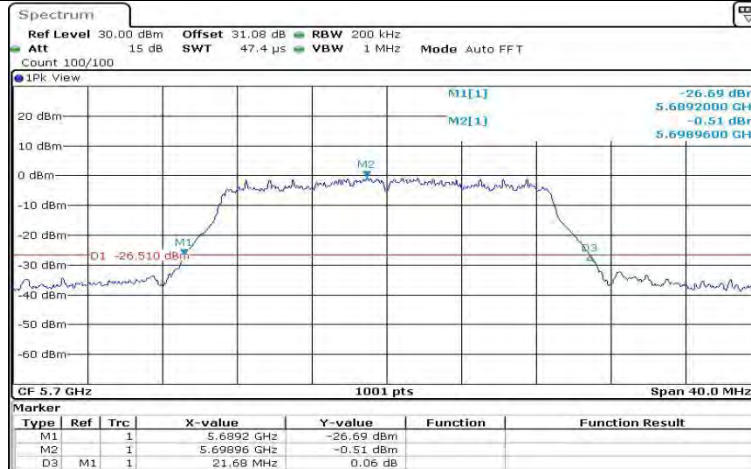


Date: 15.MAY.2022 21:17:12

11AC40MIMO Ant0 5190

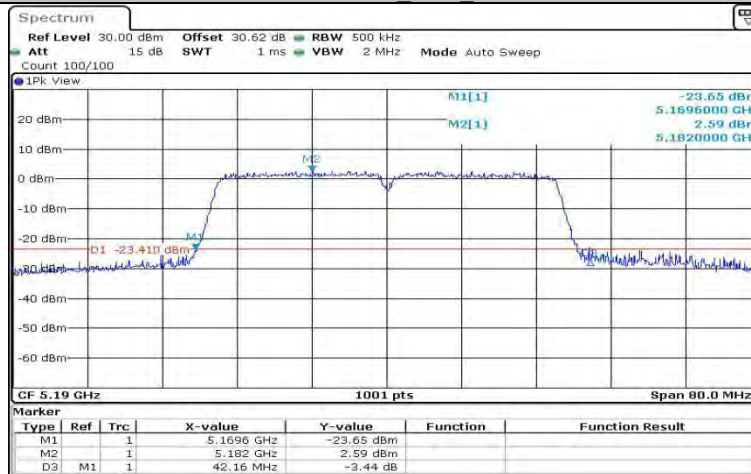


Date: 15.MAY.2022 21:31:31

11AC40MIMO Ant0 5230

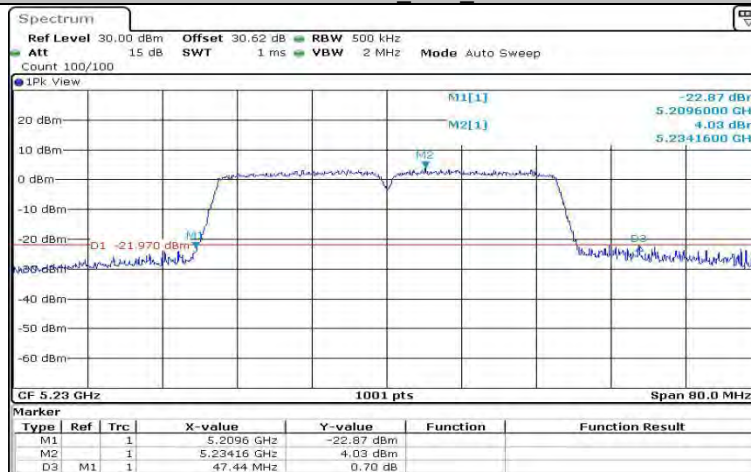


Date: 15.MAY.2022 21:34:27

11AC40MIMO_Ant0_5270

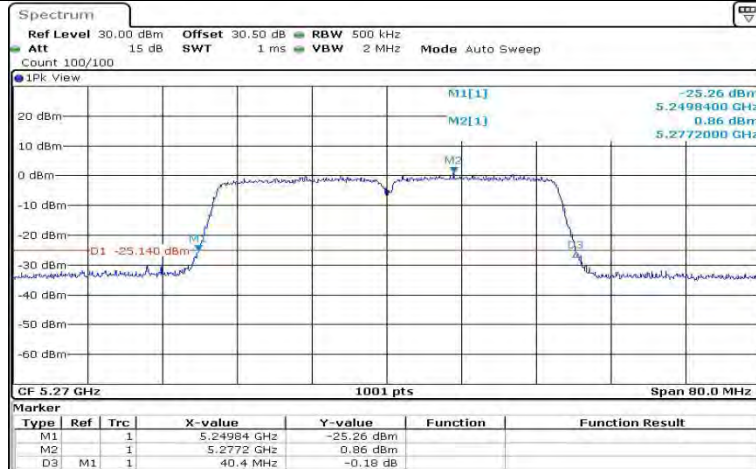

Date: 15.MAY.2022 21:37:26

11AC40MIMO_Ant0_5310

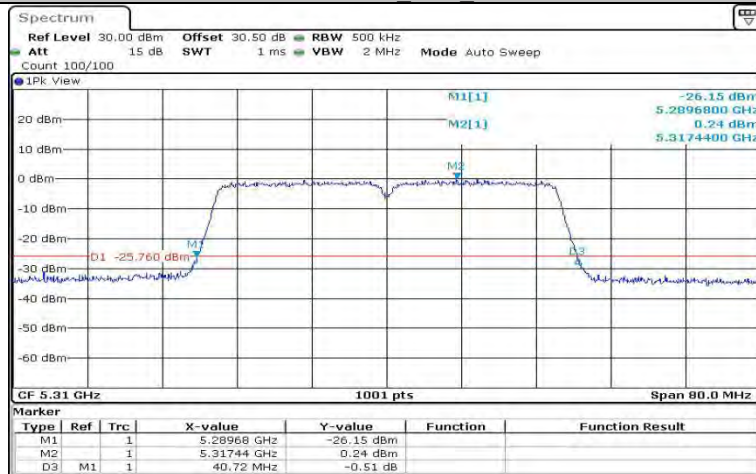


Date: 15.MAY.2022 21:40:52

11AC40MIMO_Ant0_5510




Date: 15.MAY.2022 21:43:58

11AC40MIMO Ant0 5550

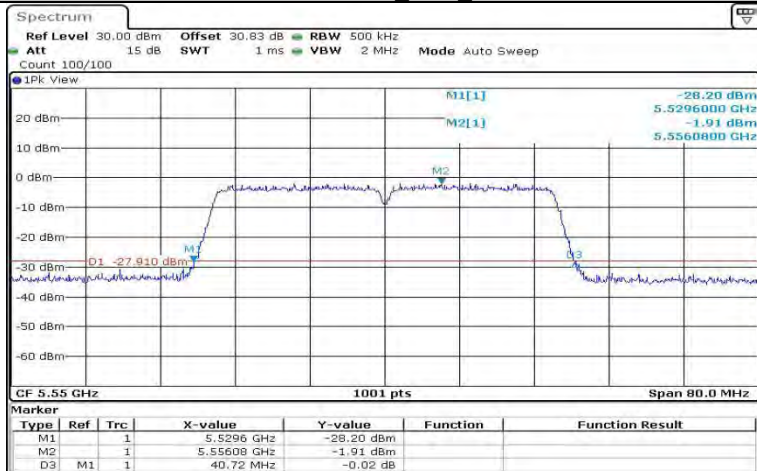

Date: 15.MAY.2022 21:46:52

11AC40MIMO Ant0 5670

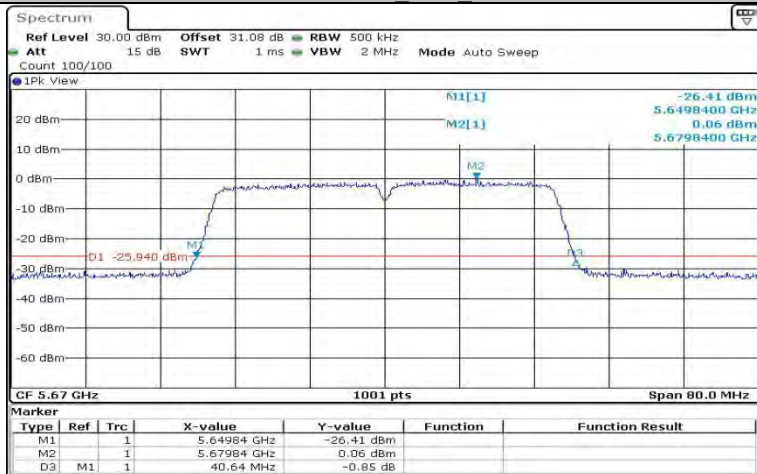


Date: 15.MAY.2022 21:50:26

11AC80MIMO Ant0 5210



Date: 15.MAY.2022 22:00:07

11AC80MIMO Ant0 5290

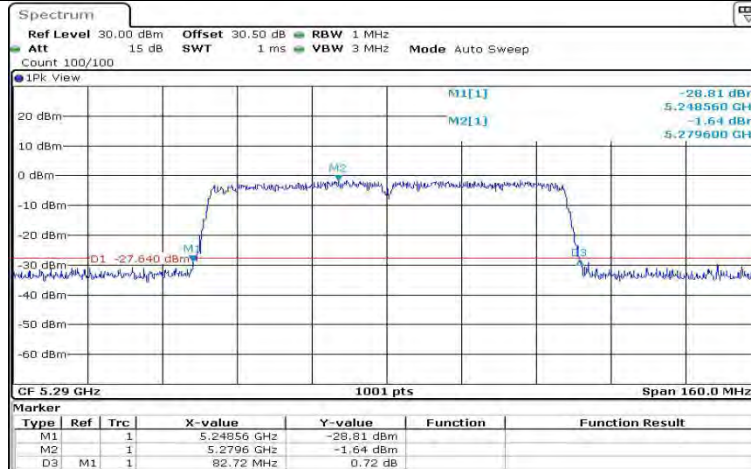


Date: 15.MAY.2022 22:06:13

11AC80MIMO Ant0 5530




Date: 15.MAY.2022 22:10:46

11AC80MIMO Ant0 5610

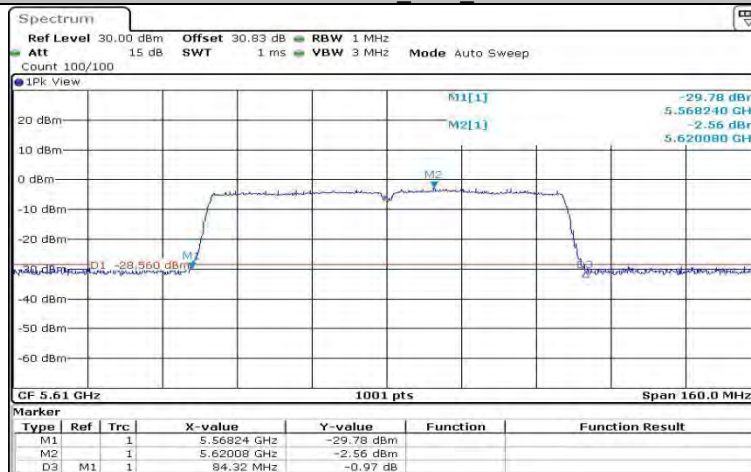


Date: 15.MAY.2022 22:13:42

11AX20MIMO Ant0 242Tone RU61 242Tone RU61 5180

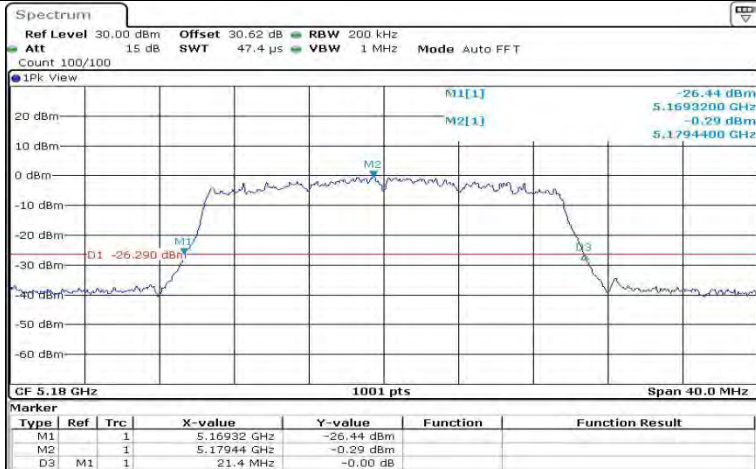


Date: 15.MAY.2022 22:32:20

11AX20MIMO Ant0 242Tone RU61 242Tone RU61 5200

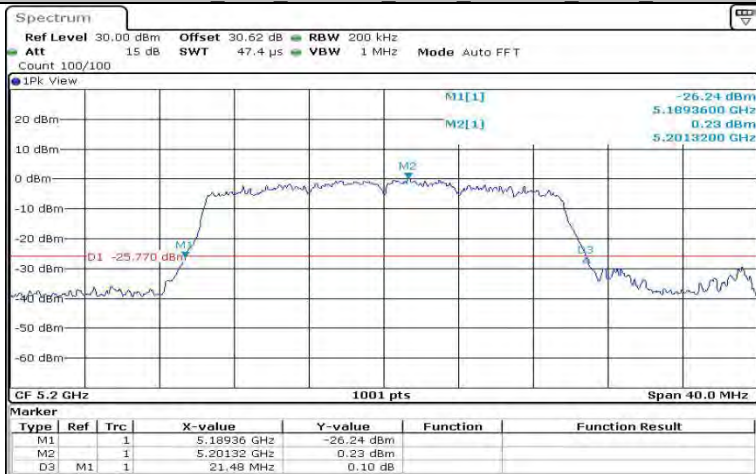


Date: 15.MAY.2022 22:37:26

11AX20MIMO Ant0 242Tone RU61 242Tone RU61 5240

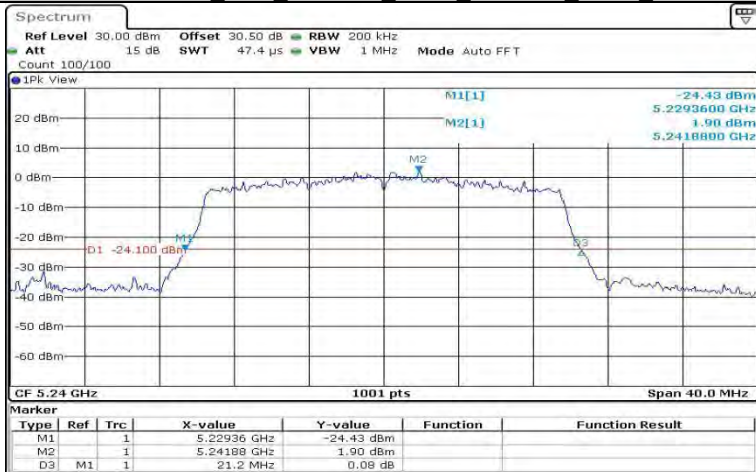


Date: 15.MAY.2022 22:39:54

11AX20MIMO Ant0 242Tone RU61 242Tone RU61 5260

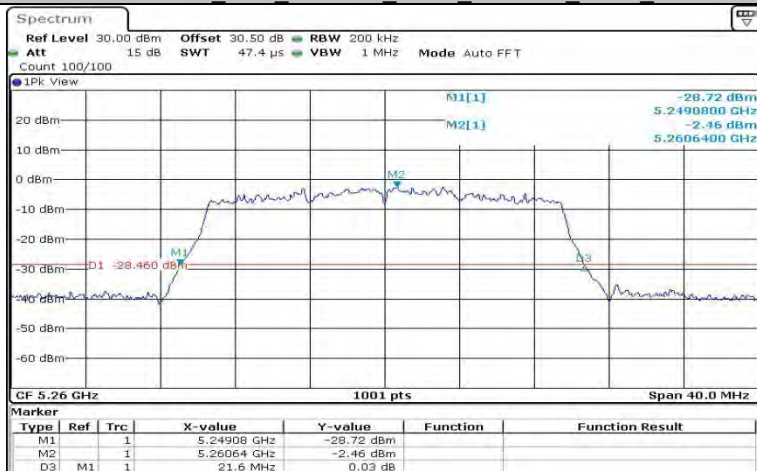


Date: 15.MAY.2022 22:43:10

11AX20MIMO Ant0 242Tone RU61 242Tone RU61 5280

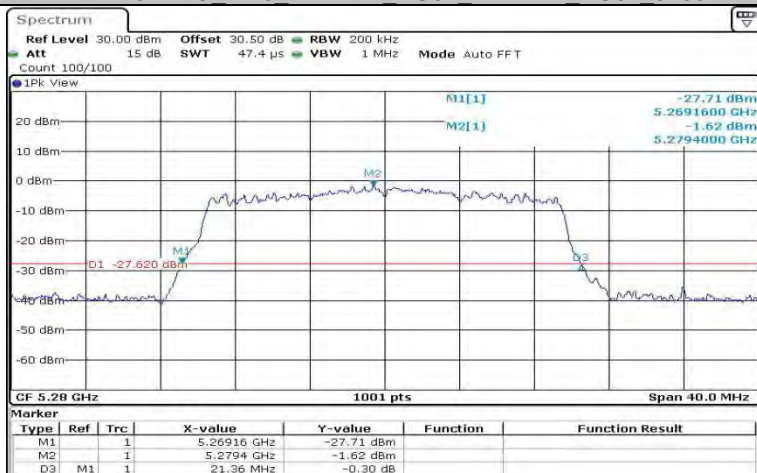

Date: 15.MAY.2022 22:45:39

11AX20MIMO Ant0 242Tone RU61 242Tone RU61 5320

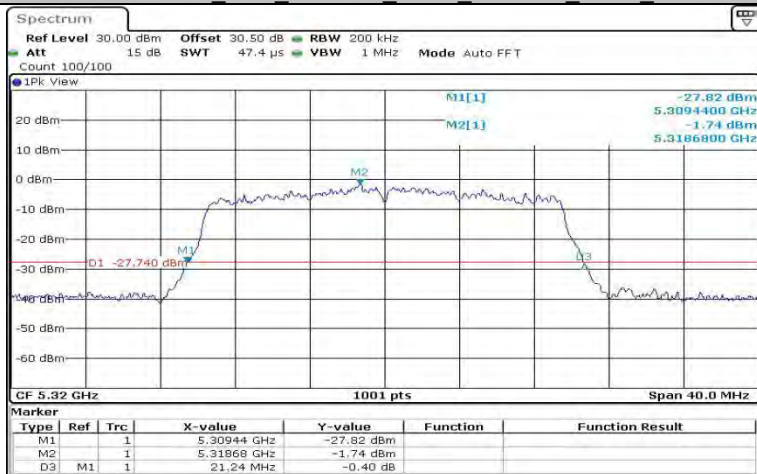


Date: 15.MAY.2022 22:48:24

11AX20MIMO_Ant0_242Tone_RU61_5500



Date: 15.MAY.2022 22:50:56

11AX20MIMO_Ant0_242Tone_RU61_5580

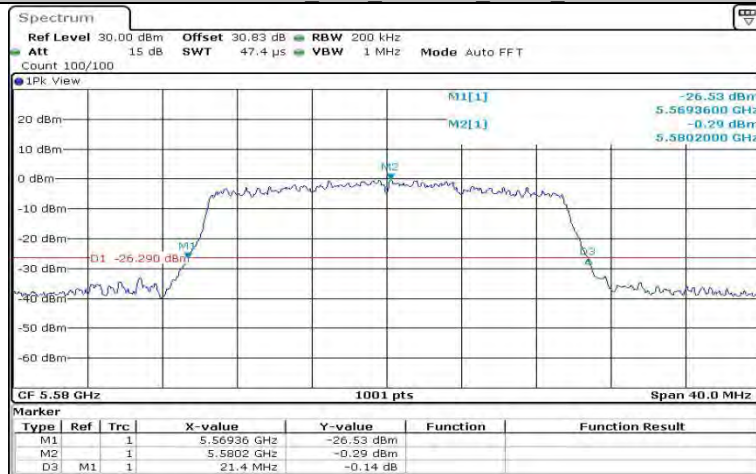


Date: 15.MAY.2022 22:53:42

11AX20MIMO_Ant0_242Tone_RU61_5700




Date: 15.MAY.2022 22:56:07

11AX40MIMO Ant0 484Tone RU65 5190

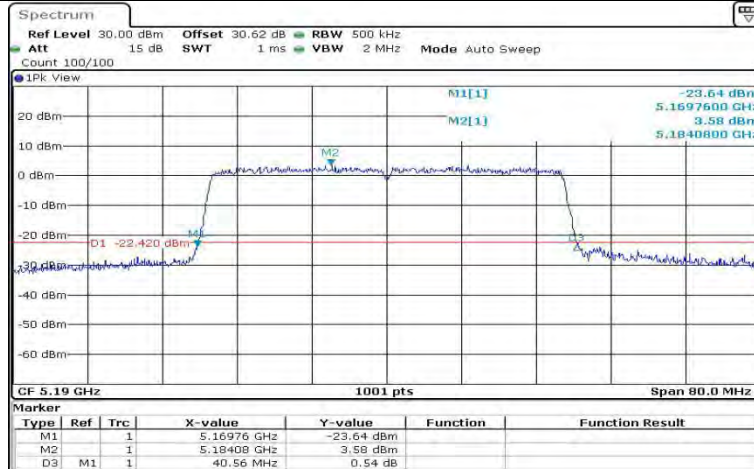

Date: 15.MAY.2022 23:07:17

11AX40MIMO Ant0 484Tone RU65 5230

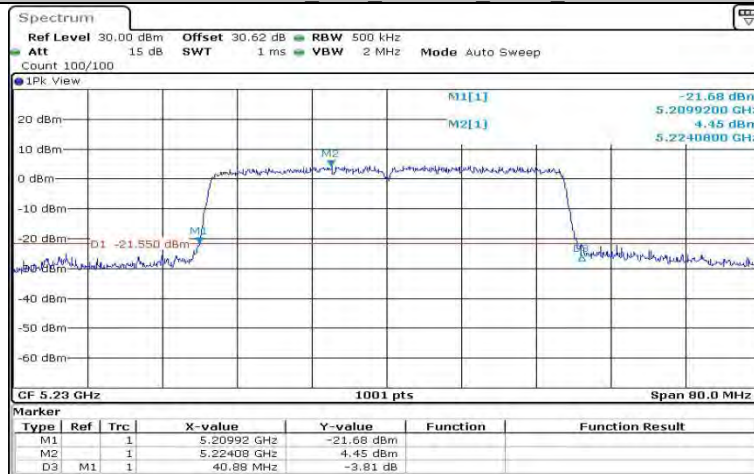


Date: 15.MAY.2022 23:09:48

11AX40MIMO Ant0 484Tone RU65 5270




Date: 15.MAY.2022 23:12:21

11AX40MIMO Ant0 484Tone RU65 5310

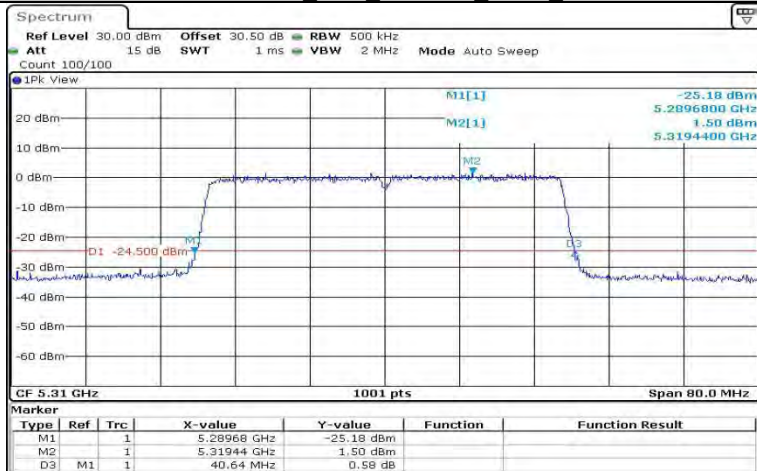


Date: 15.MAY.2022 23:14:50

11AX40MIMO Ant0 484Tone RU65 5510

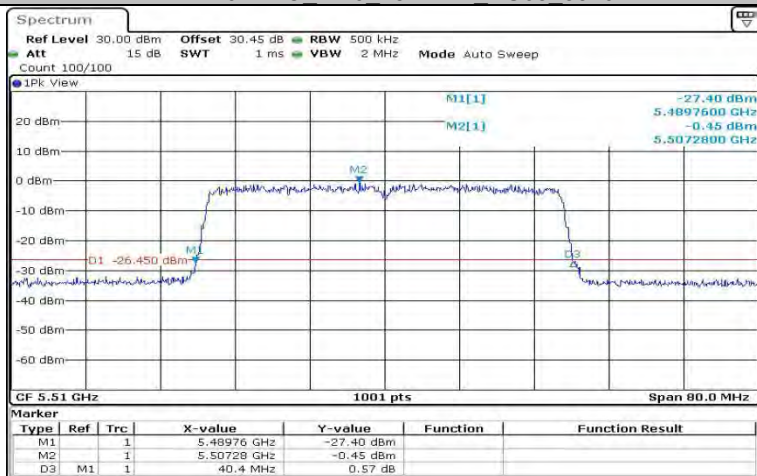


Date: 15.MAY.2022 23:17:17

11AX40MIMO Ant0 484Tone RU65 5550

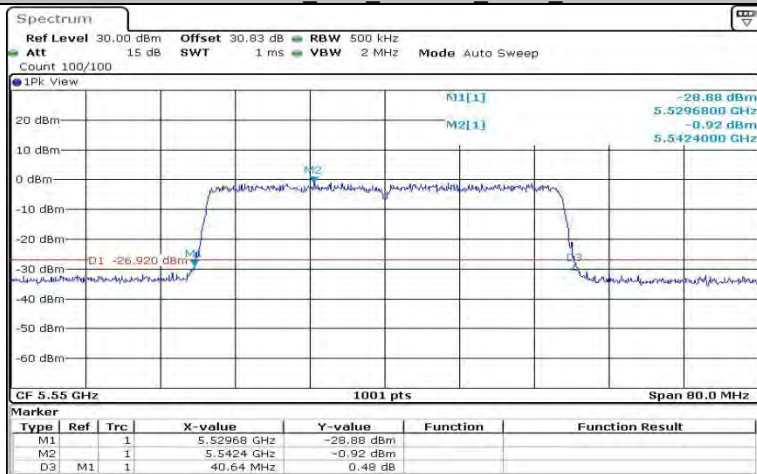


Date: 15.MAY.2022 23:29:48

11AX40MIMO Ant0 484Tone RU65 5670

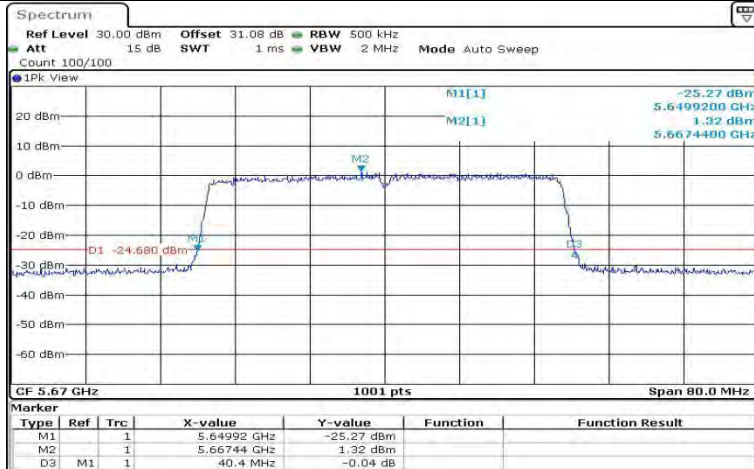

Date: 15.MAY.2022 23:32:25

11AX80MIMO Ant0 996Tone RU67 5210

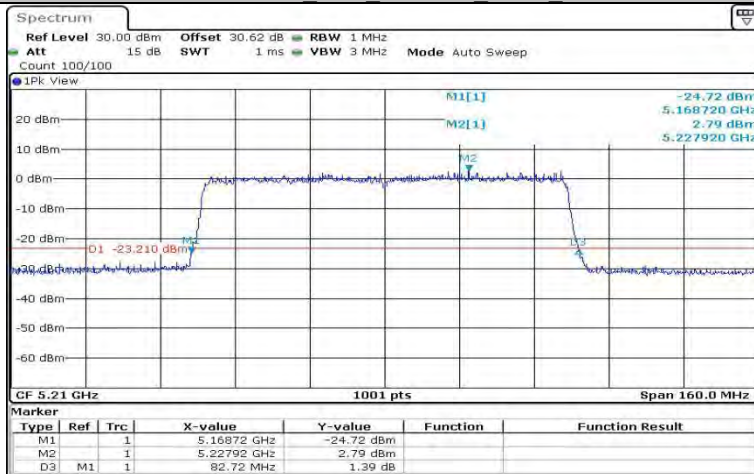


Date: 15.MAY.2022 23:41:09

11AX80MIMO Ant0 996Tone RU67 5290




Date: 15.MAY.2022 23:43:46

11AX80MIMO Ant0 996Tone RU67 5530

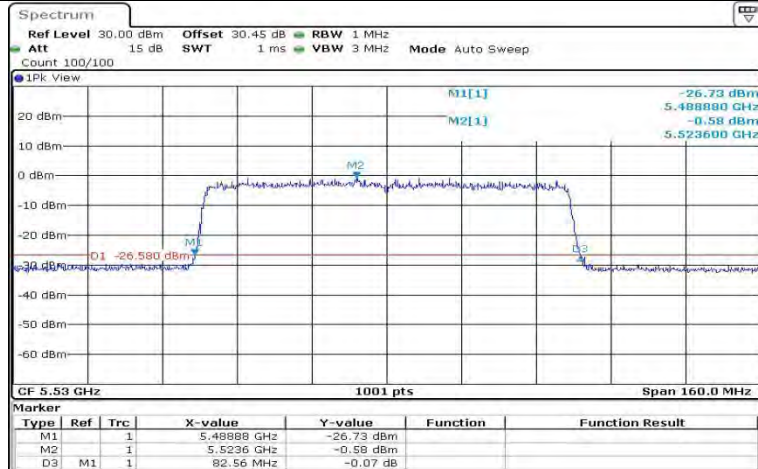

Date: 15.MAY.2022 23:47:29

11AX80MIMO Ant0 996Tone RU67 5610

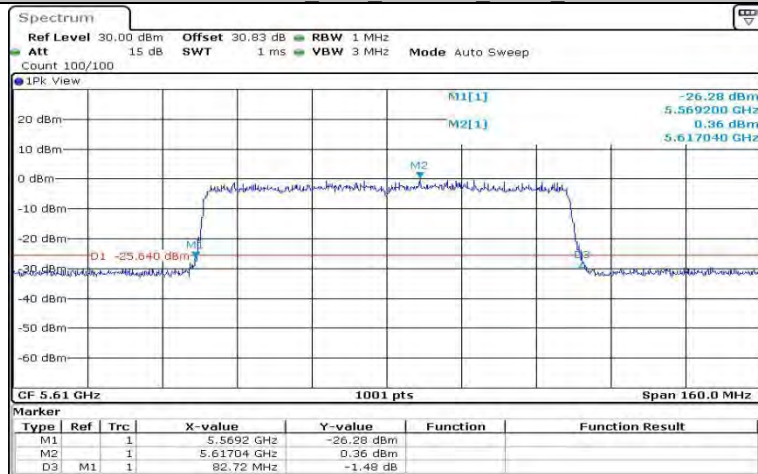


Date: 15.MAY.2022 23:50:34

Appendix A2: Occupied channel bandwidth Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11A	Ant0	5180	17.862	---	---
	Ant0	5200	17.942	---	---
	Ant0	5240	17.902	---	---
	Ant0	5260	18.022	---	---
	Ant0	5280	17.942	---	---
	Ant0	5320	17.982	---	---
	Ant0	5500	17.942	---	---
	Ant0	5580	17.982	---	---
	Ant0	5700	17.942	---	---
	Ant0	5745	18.182	---	---
	Ant0	5785	18.142	---	---
11N20MIMO	Ant0	5825	18.182	---	---
	Ant0	5180	18.501	---	---
	Ant0	5200	18.541	---	---
	Ant0	5240	18.501	---	---
	Ant0	5260	18.541	---	---
	Ant0	5280	18.462	---	---
	Ant0	5320	18.462	---	---
	Ant0	5500	18.541	---	---
	Ant0	5580	18.581	---	---
	Ant0	5700	18.621	---	---
	Ant0	5745	18.621	---	---
11N40MIMO	Ant0	5785	18.581	---	---
	Ant0	5825	18.581	---	---
	Ant0	5190	37.003	---	---
	Ant0	5230	37.003	---	---
	Ant0	5270	37.003	---	---
	Ant0	5310	37.003	---	---
	Ant0	5510	36.923	---	---
	Ant0	5550	36.923	---	---
11AC20MIMO	Ant0	5670	37.243	---	---
	Ant0	5755	37.083	---	---
	Ant0	5795	36.843	---	---
	Ant0	5180	18.781	---	---
	Ant0	5200	18.781	---	---
	Ant0	5240	18.741	---	---
	Ant0	5260	18.821	---	---
	Ant0	5280	18.741	---	---
	Ant0	5320	18.821	---	---
	Ant0	5500	18.781	---	---
	Ant0	5580	18.821	---	---
11AC40MIMO	Ant0	5700	18.821	---	---
	Ant0	5745	18.941	---	---
	Ant0	5785	18.941	---	---
	Ant0	5825	19.021	---	---
	Ant0	5190	37.083	---	---
	Ant0	5230	37.083	---	---
	Ant0	5270	37.083	---	---
	Ant0	5310	37.163	---	---
	Ant0	5510	37.163	---	---
	Ant0	5510	37.163	---	---

	Ant0	5550	37.243	---	---
	Ant0	5670	37.243	---	---
	Ant0	5755	37.642	---	---
	Ant0	5795	37.562	---	---
11AC80MIMO	Ant0	5210	76.563	---	---
	Ant0	5290	76.883	---	---
	Ant0	5530	77.522	---	---
	Ant0	5610	77.522	---	---
	Ant0	5775	77.842	---	---
11AX20MIMO_242Tone_RU61	Ant0	5180	19.101	---	---
	Ant0	5200	19.141	---	---
	Ant0	5240	19.141	---	---
	Ant0	5260	19.181	---	---
	Ant0	5280	19.181	---	---
	Ant0	5320	19.141	---	---
	Ant0	5500	19.181	---	---
	Ant0	5580	19.181	---	---
	Ant0	5700	19.181	---	---
	Ant0	5745	19.221	---	---
	Ant0	5785	19.181	---	---
	Ant0	5825	19.221	---	---
11AX40MIMO_484Tone_RU65	Ant0	5190	37.882	---	---
	Ant0	5230	37.962	---	---
	Ant0	5270	37.882	---	---
	Ant0	5310	37.962	---	---
	Ant0	5510	38.042	---	---
	Ant0	5550	38.042	---	---
	Ant0	5670	38.042	---	---
	Ant0	5755	38.042	---	---
11AX80MIMO_Ant0_996Tone_RU67	Ant0	5795	37.962	---	---
	Ant0	5210	78.002	---	---
	Ant0	5290	78.002	---	---
	Ant0	5530	78.482	---	---
	Ant0	5610	78.162	---	---
	Ant0	5775	78.801	---	---

Test Graphs

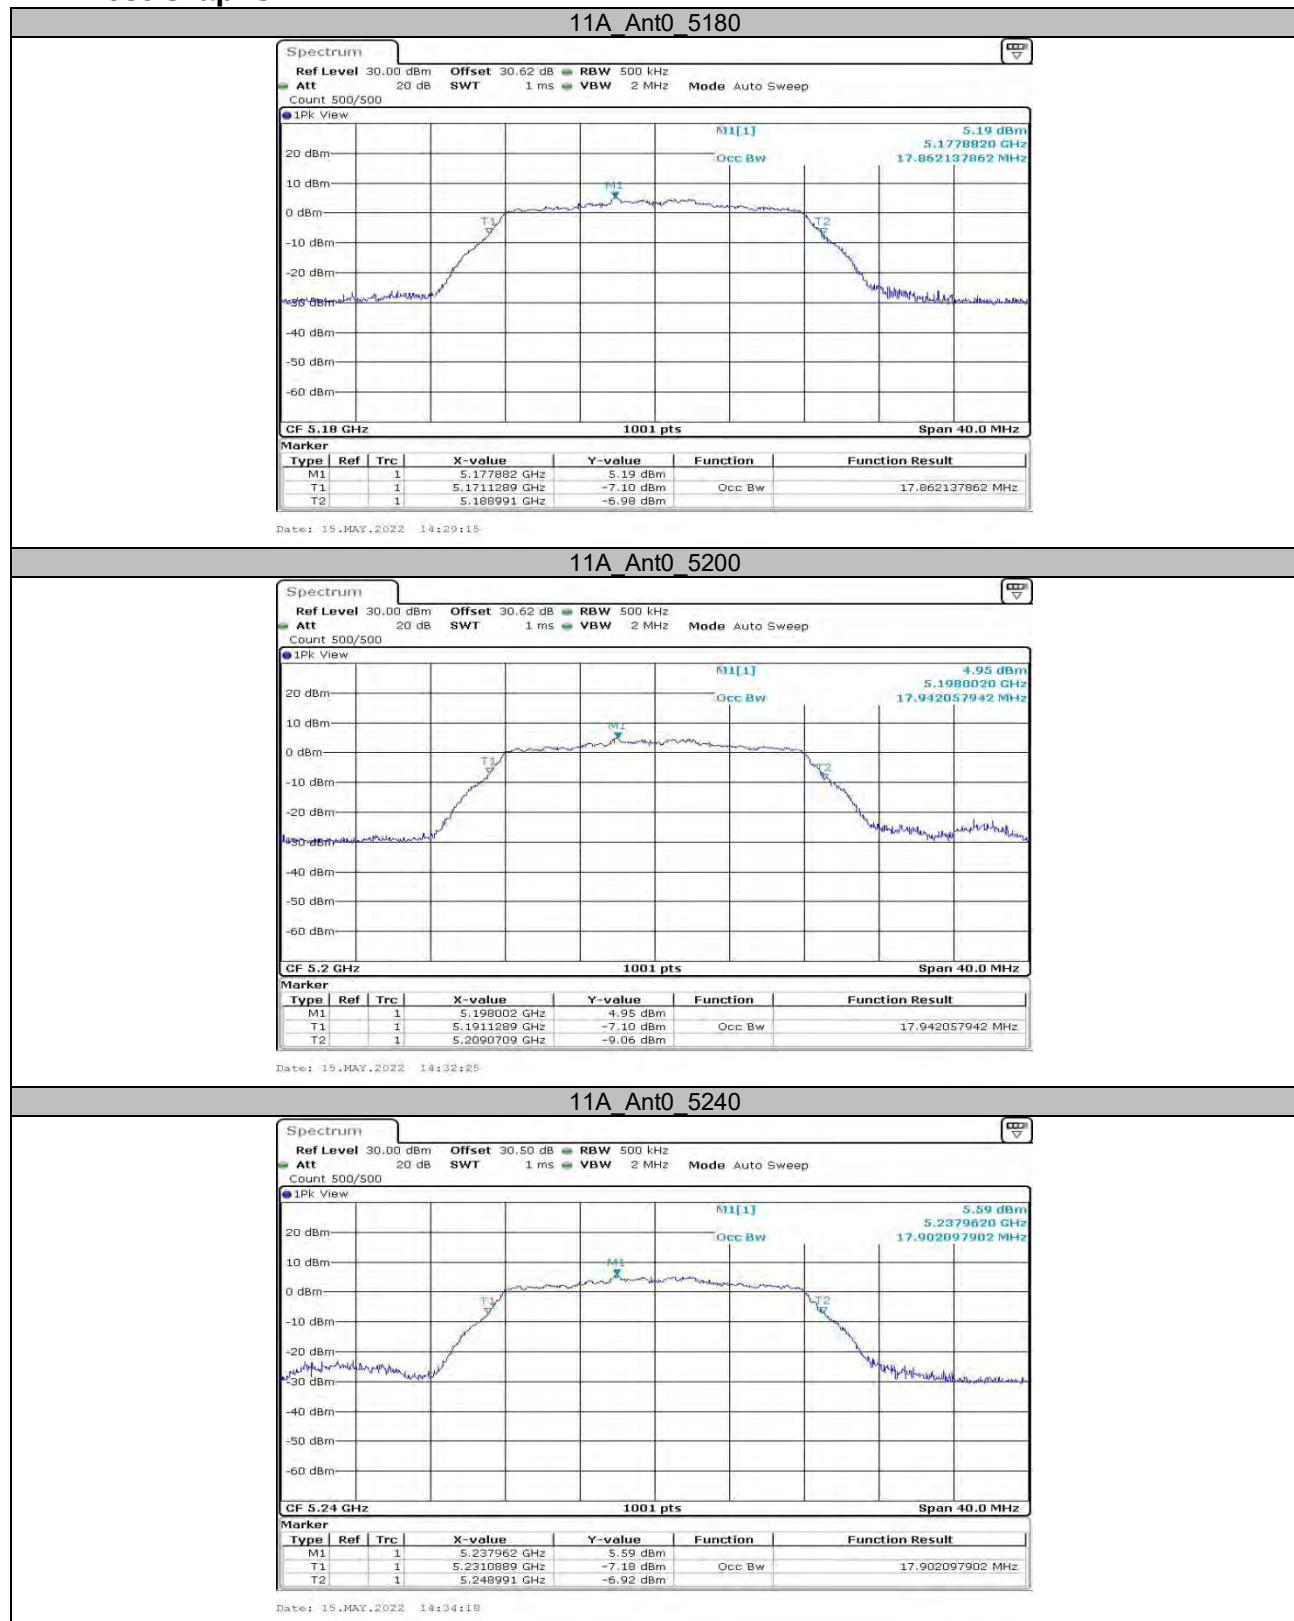

11A_Ant0_5260



Date: 15.MAY.2022 14:36:09

11A_Ant0_5280



Date: 15.MAY.2022 14:36:06

11A_Ant0_5320



Date: 15.MAY.2022 14:40:00

11A_Ant0_5500



Date: 15.MAY.2022 14:42:55

11A_Ant0_5580



Date: 15.MAY.2022 14:44:42

11A_Ant0_5700



Date: 15.MAY.2022 14:47:01

11A_Ant0_5745



Date: 15.MAY.2022 14:49:36

11A_Ant0_5785




Date: 15.MAY.2022 14:51:24

11A_Ant0_5825




Date: 15.MAY.2022 14:53:14

11N20MIMO_Ant0_5180

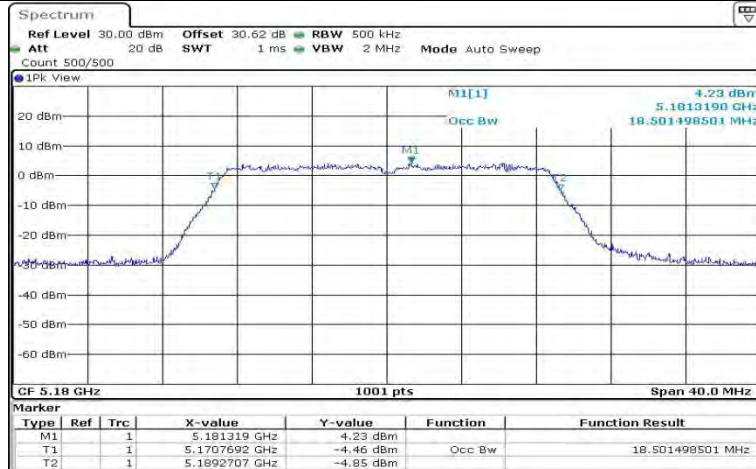

Date: 15.MAY.2022 18:50:53

11N20MIMO_Ant0_5200

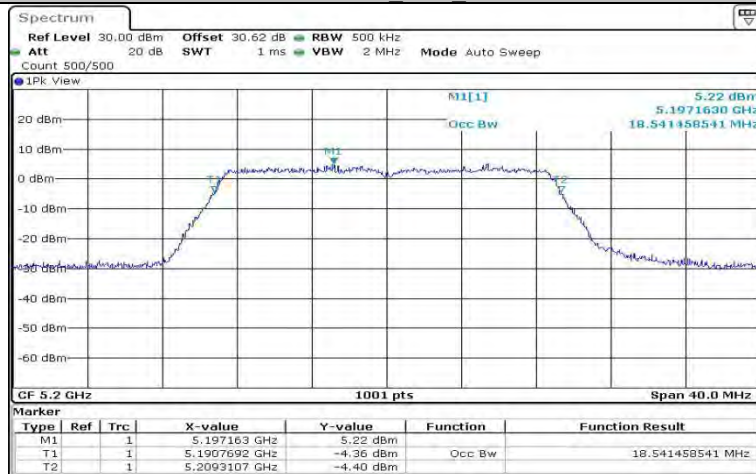


Date: 15.MAY.2022 18:54:10

11N20MIMO_Ant0_5240



Date: 15.MAY.2022 18:57:27

11N20MIMO_Ant0_5260

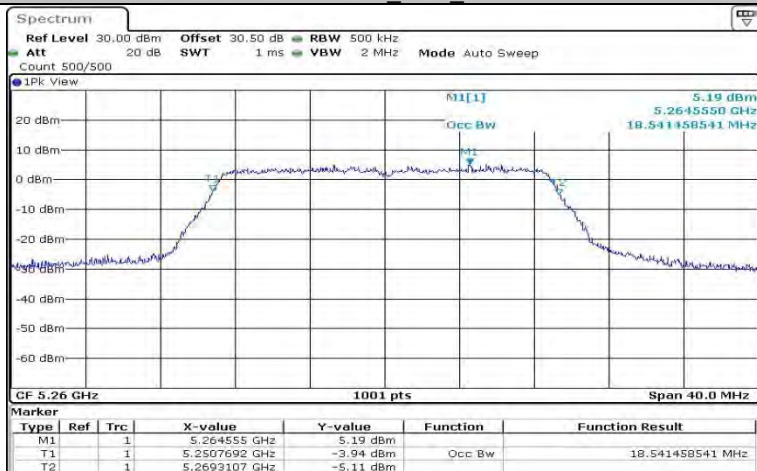


Date: 15.MAY.2022 19:49:00

11N20MIMO_Ant0_5280




Date: 15.MAY.2022 19:51:45

11N20MIMO_Ant0_5320

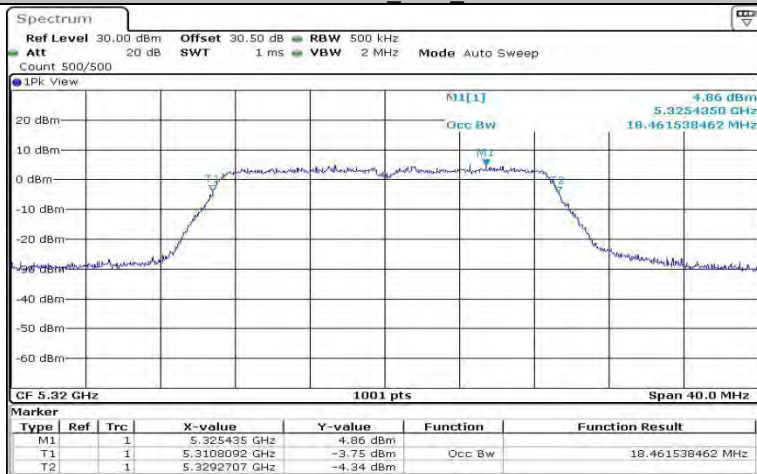


Date: 15.MAY.2022 19:54:50

11N20MIMO_Ant0_5500

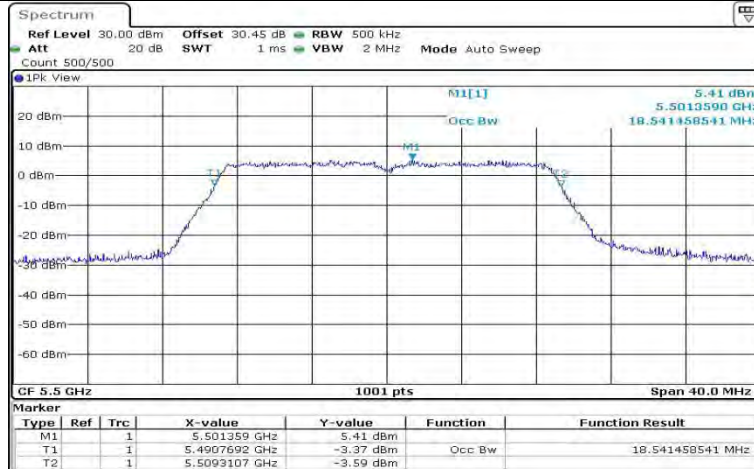


Date: 15.MAY.2022 19:57:36

11N20MIMO_Ant0_5580

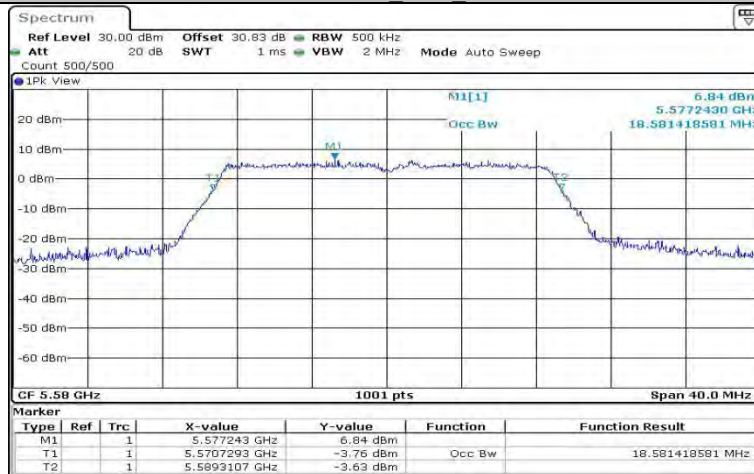


Date: 15.MAY.2022 20:00:23

11N20MIMO_Ant0_5700

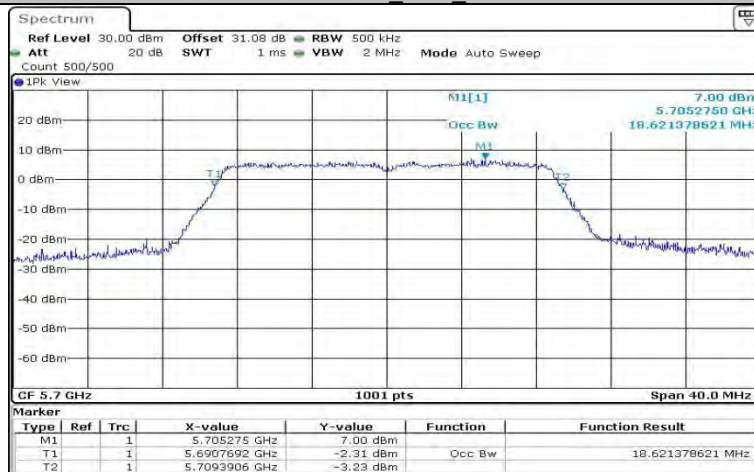


Date: 15.MAY.2022 20:03:35

11N20MIMO_Ant0_5745

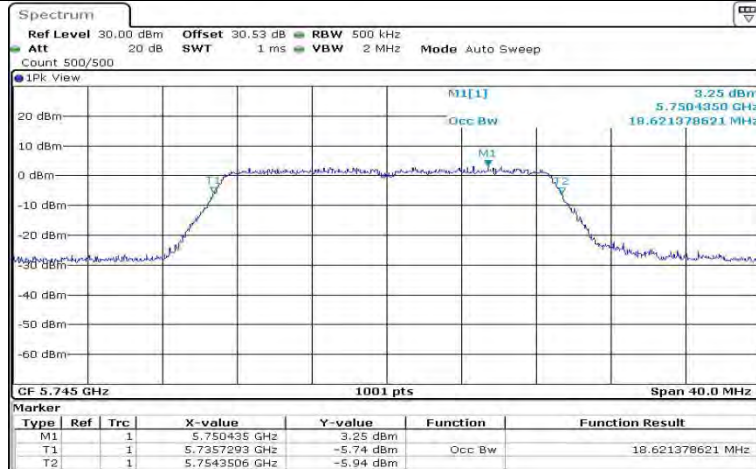


Date: 15.MAY.2022 20:06:26

11N20MIMO_Ant0_5785

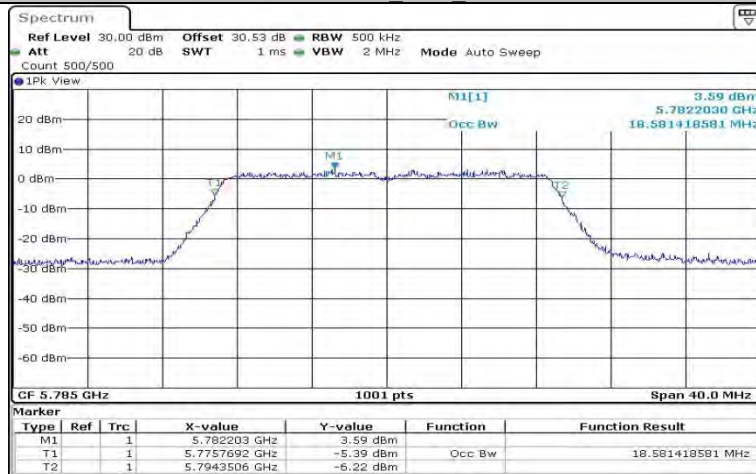


Date: 15.MAY.2022 20:09:32

11N20MIMO_Ant0_5825

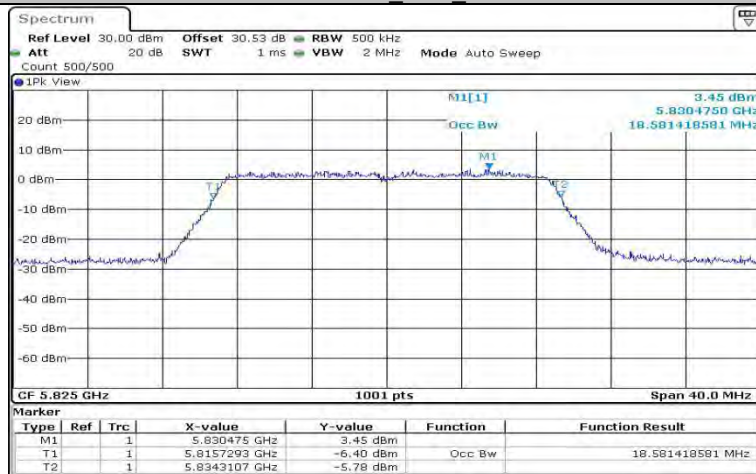


Date: 15.MAY.2022 20:12:32

11N40MIMO_Ant0_5190

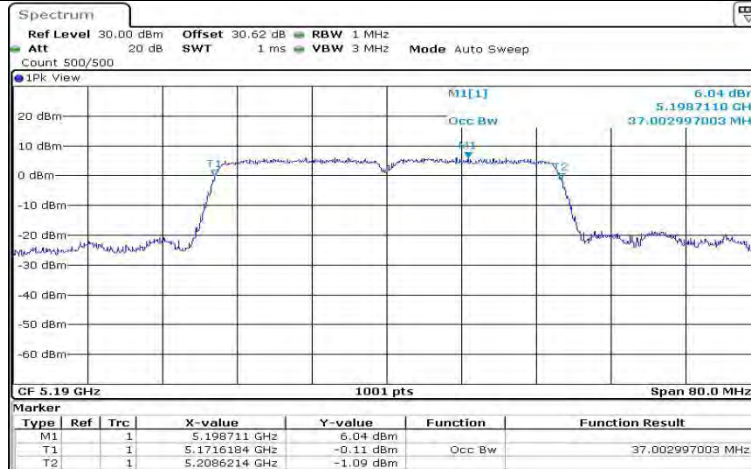


Date: 15.MAY.2022 20:15:18

11N40MIMO_Ant0_5230

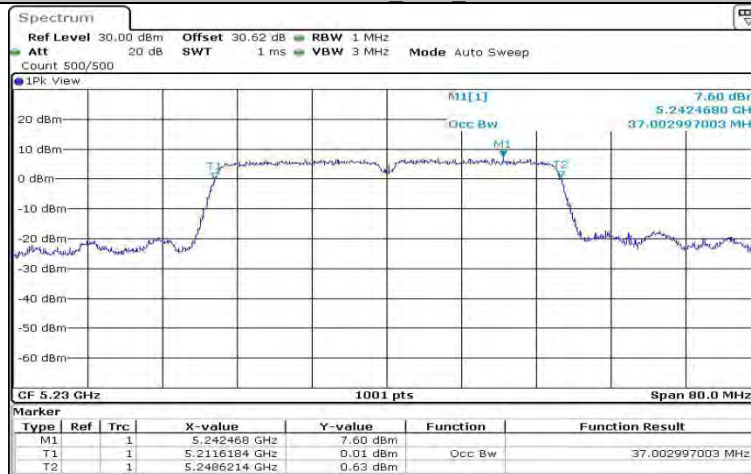


Date: 15.MAY.2022 20:18:07

11N40MIMO_Ant0_5270

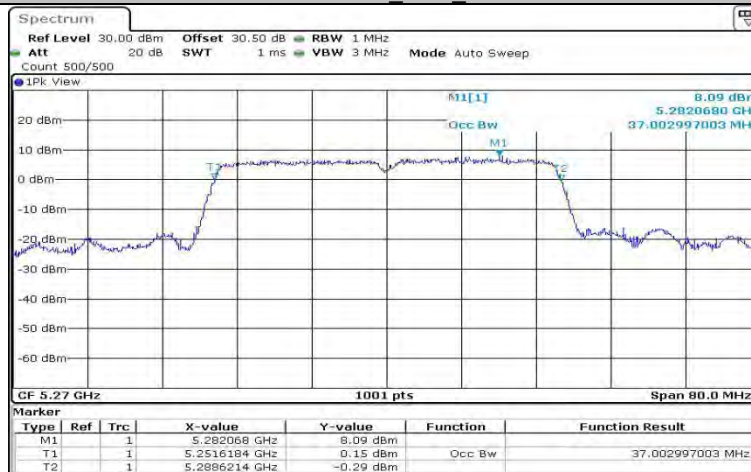


Date: 15.MAY.2022 20:21:52

11N40MIMO_Ant0_5310

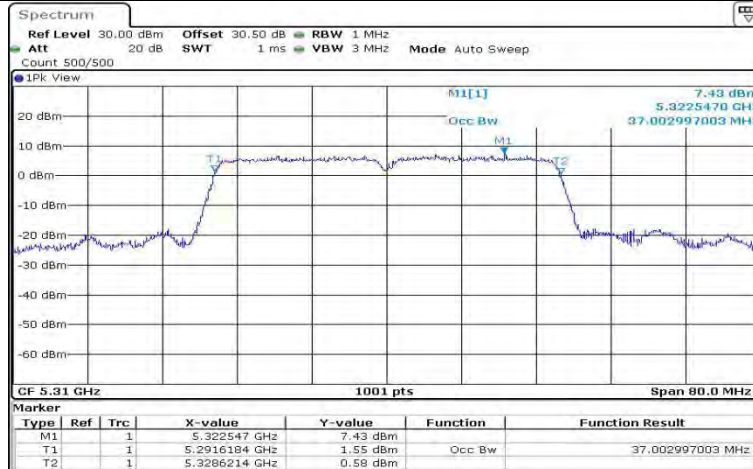


Date: 15.MAY.2022 20:24:34

11N40MIMO_Ant0_5510

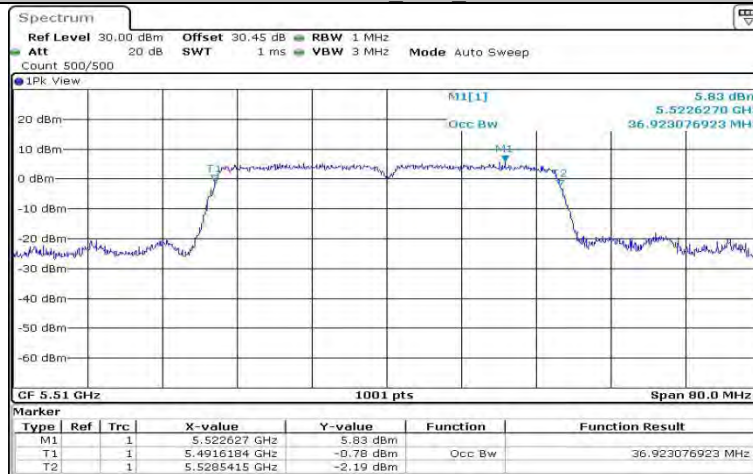


Date: 15.MAY.2022 20:27:19

11N40MIMO_Ant0_5550

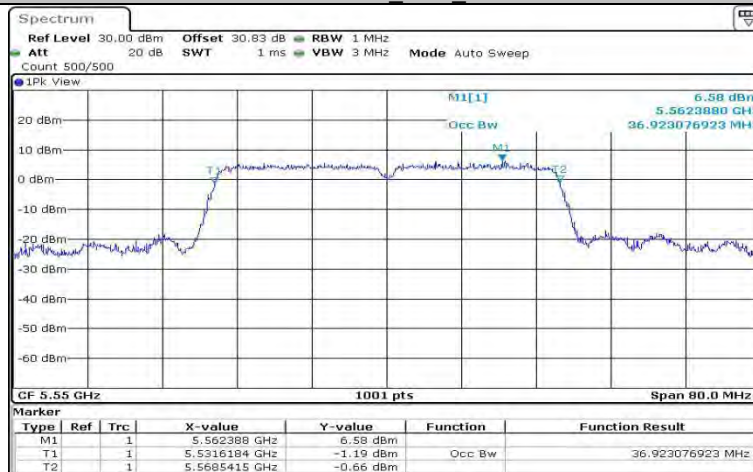


Date: 15.MAY.2022 20:30:03

11N40MIMO_Ant0_5670

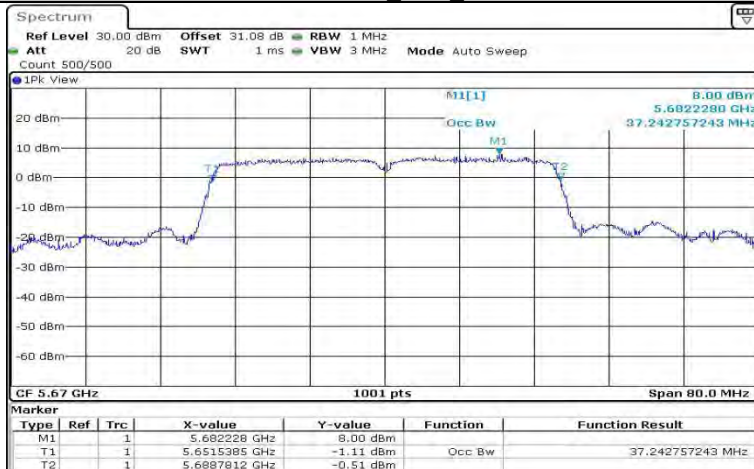

Date: 15.MAY.2022 20:34:09

11N40MIMO_Ant0_5755

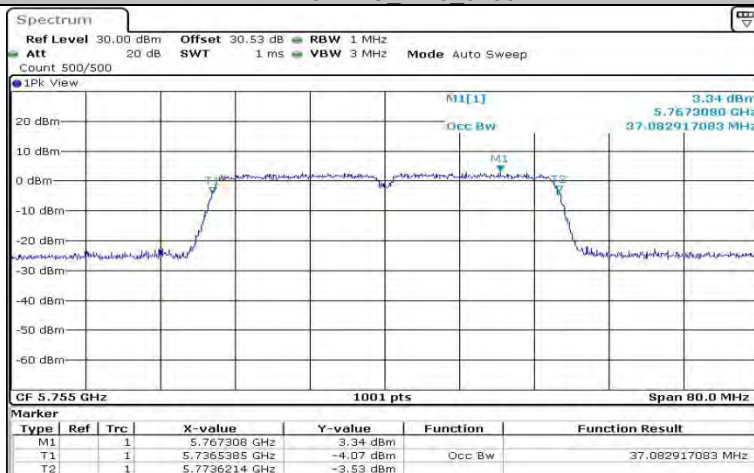


Date: 15.MAY.2022 20:37:24

11N40MIMO_Ant0_5795



Date: 15.MAY.2022 20:40:17

11AC20MIMO Ant0 5180

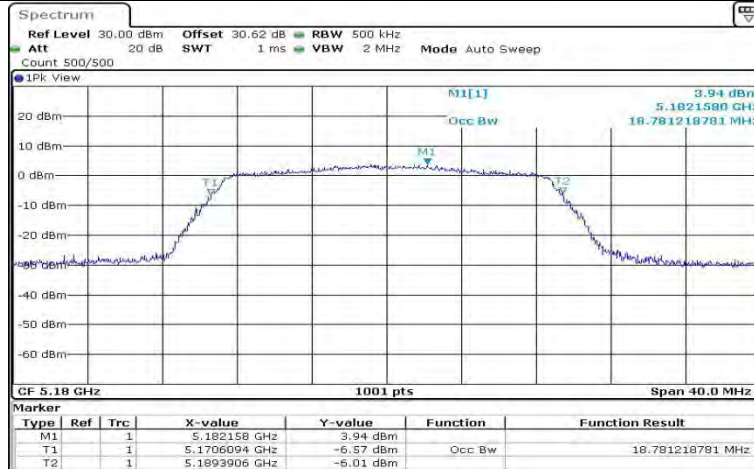

Date: 15.MAY.2022 20:47:58

11AC20MIMO Ant0 5200



Date: 15.MAY.2022 20:51:48

11AC20MIMO Ant0 5240



Date: 15.MAY.2022 20:54:55

11AC20MIMO Ant0 5260




11AC20MIMO Ant0 5280



11AC20MIMO Ant0 5320



11AC20MIMO Ant0 5500

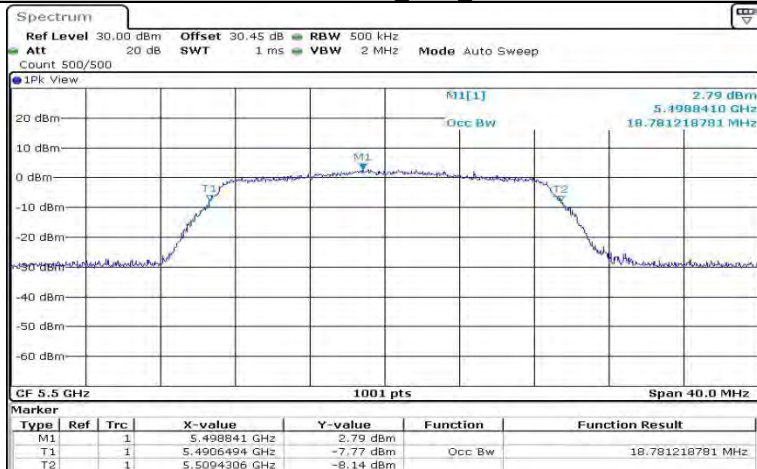


Date: 15.MAY.2022 21:11:13

11AC20MIMO Ant0 5580



Date: 15.MAY.2022 21:14:32

11AC20MIMO Ant0 5700

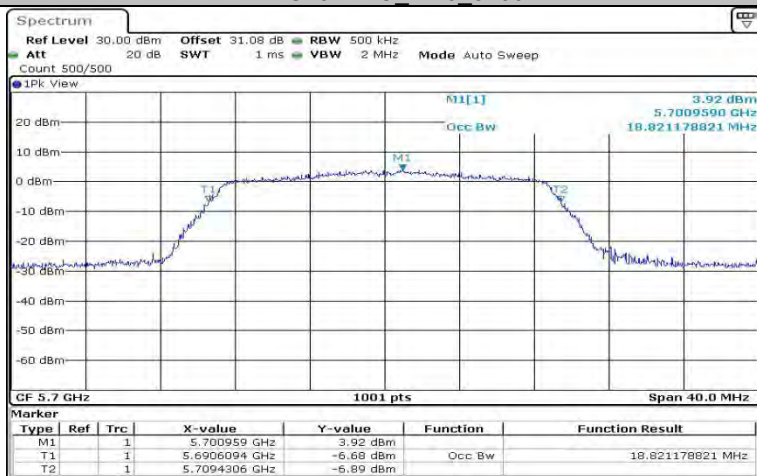

Date: 15.MAY.2022 21:17:23

11AC20MIMO_Ant0_5745



Date: 15.MAY.2022 21:20:23

11AC20MIMO_Ant0_5785




Date: 15.MAY.2022 21:23:40

11AC20MIMO_Ant0_5825




Date: 15.MAY.2022 21:27:08

11AC40MIMO_Ant0_5190

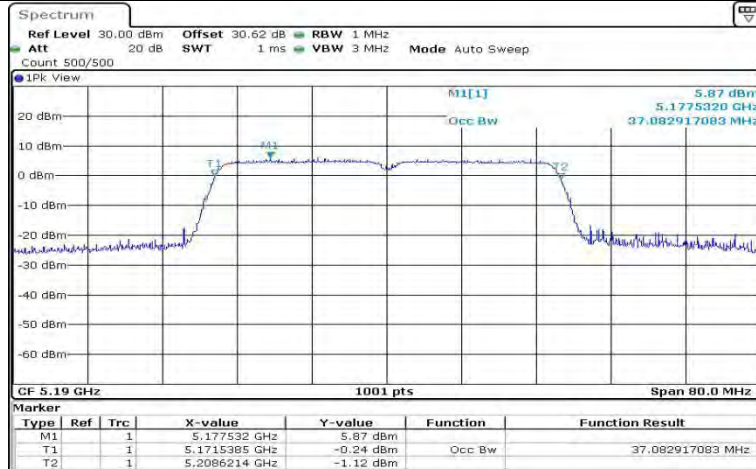

Date: 15.MAY.2022 21:31:42

11AC40MIMO_Ant0_5230

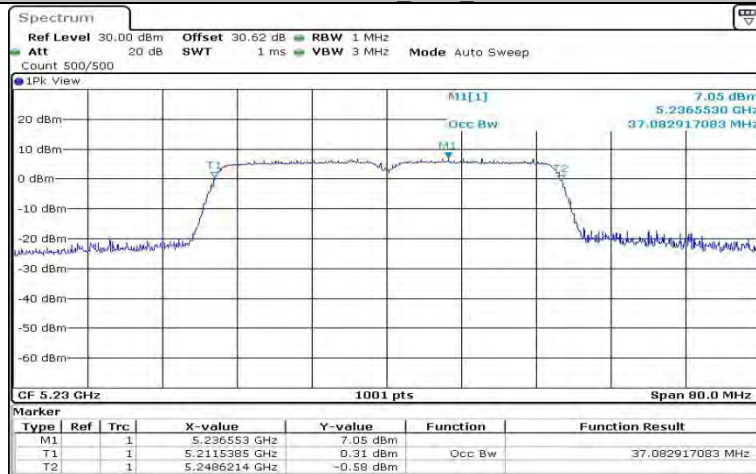

Date: 15.MAY.2022 21:34:38

11AC40MIMO_Ant0_5270



Date: 15.MAY.2022 21:37:38

11AC40MIMO_Ant0_5310



Date: 15.MAY.2022 21:41:03

11AC40MIMO_Ant0_5510



Date: 15.MAY.2022 21:44:10

11AC40MIMO_Ant0_5550



Date: 15.MAY.2022 21:47:03

11AC40MIMO_Ant0_5670



Date: 15.MAY.2022 21:50:38

11AC40MIMO_Ant0_5755



Date: 15.MAY.2022 21:54:09

11AC40MIMO_Ant0_5795



Date: 15.MAY.2022 21:57:20