

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 151 von 207

Page 151 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5720	5720 (Pk)	Vertical	103.02	-	-
	5720 (Av)		87.67	-	-
	5460 (Pk)		42.40	74*	-31.60
	5460 (Av)		30.03	54*	-23.97
	11440 (Pk)		53.21	68.23	-15.02
	11440 (Av)		41.48	54	-12.52
	17160 (Pk)		56.08	68.23	-12.15
	17160 (Av)		44.46	54	-9.54
	5720 (Pk)	Horizontal	104.21	-	-
	5720 (Av)		89.08	-	-
	5460 (Pk)		42.50	74*	-31.50
	5460 (Av)		30.06	54*	-23.94
	11440 (Pk)		53.06	68.23	-15.17
	11440 (Av)		41.48	54	-12.52
	17160 (Pk)		56.10	68.23	-12.13
	17160 (Av)		44.43	54	-9.57
5745	5715(Pk)	Vertical	69.50	78.20*	-8.70
	5725(Pk)		73.00	78.20*	-5.20
	5745 (Pk)		103.77	-	-
	5745 (Av)		88.17	-	-
	11490 (Pk)		53.03	68.23	-15.20
	11490 (Av)		42.36	54	-11.64
	17235 (Pk)		56.37	68.23	-11.86
	17235 (Av)		45.30	54	-8.70
	5715(Pk)	Horizontal	70.07	78.20*	-8.13
	5725(Pk)		73.57	78.20*	-4.63
	5745 (Pk)		104.15	-	-
	5745 (Av)		88.59	-	-
	11490 (Pk)		54.32	68.23	-13.91
	11490 (Av)		42.46	54	-11.54
	17235 (Pk)		56.83	68.23	-11.40
	17235 (Av)		45.26	54	-8.74
5825	5825 (Pk)	Vertical	104.84	-	-
	5825 (Av)		89.18	-	-
	5850 (Pk)		67.75	78.20*	-10.45
	5860 (Pk)		58.47	78.20*	-19.73
	11650 (Pk)		54.52	68.23	-13.71
	11650 (Av)		41.78	54	-12.22
	17475 (Pk)		60.03	68.23	-8.20
	17475 (Av)		47.21	54	-6.79
	5825 (Pk)	Horizontal	104.23	-	-
	5825 (Av)		89.18	-	-
	5850 (Pk)		67.71	78.20*	-10.49
	5860 (Pk)		57.86	78.20*	-20.34
	11650 (Pk)		53.46	68.23	-14.77
	11650 (Av)		41.78	54	-12.22
	17475 (Pk)		58.52	68.23	-9.71
	17475 (Av)		47.21	54	-6.79

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 152 von 207

Page 152 of 207

Modulation: 802.11ac _ VHT 20MHz

Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5180	5180 (Pk)	Vertical	97.67	-	-
	5180 (Av)		87.67	-	-
	5150 (Pk)		62.51	74*	-11.49
	5150 (Av)		37.98	54*	-16.02
	10360 (Pk)		52.59	68.23	-15.64
	10360 (Av)		39.37	54	-14.63
	15540 (Pk)		53.64	68.23	-14.59
	15540 (Av)		41.31	54	-12.69
	5180 (Pk)	Horizontal	99.25	-	-
	5180 (Av)		89.39	-	-
	5150 (Pk)		63.92	74*	-10.08
	5150 (Av)		38.56	54*	-15.44
	10360 (Pk)		50.86	68.23	-17.37
	10360 (Av)		39.29	54	-14.71
	15540 (Pk)		52.79	68.23	-15.44
	15540 (Av)		41.33	54	-12.67
5240	5240 (Pk)	Vertical	108.13	-	-
	5240 (Av)		94.20	-	-
	5350 (Pk)		64.50	74*	-9.50
	5350 (Av)		43.56	54*	-10.44
	10480 (Pk)		51.47	68.23	-16.76
	10480 (Av)		39.80	54	-14.20
	15720 (Pk)		53.57	68.23	-14.66
	15720 (Av)		41.16	54	-12.84
	5240 (Pk)	Horizontal	110.78	-	-
	5240 (Av)		98.30	-	-
	5350 (Pk)		68.01	74*	-5.99
	5350 (Av)		46.07	54*	-7.93
	10480 (Pk)		51.24	68.23	-16.99
	10480 (Av)		39.93	54	-14.07
	15720 (Pk)		53.76	68.23	-14.47
	15720 (Av)		41.19	54	-12.81
5260	5260 (Pk)	Vertical	107.83	-	-
	5260 (Av)		93.78	-	-
	5350 (Pk)		69.02	74*	-4.98
	5350 (Av)		45.65	54*	-8.35
	10520 (Pk)		53.16	68.23	-15.07
	10520 (Av)		39.88	54	-14.12
	15780 (Pk)		52.54	68.23	-15.69
	15780 (Av)		40.92	54	-13.08
	5260 (Pk)	Horizontal	110.05	-	-
	5260 (Av)		97.61	-	-
	5350 (Pk)		70.24	74*	-3.76
	5350 (Av)		48.87	54*	-5.13
	10520 (Pk)		51.96	68.23	-16.27
	10520 (Av)		39.94	54	-14.06
	15780 (Pk)		52.90	68.23	-15.33
	15780 (Av)		40.98	54	-13.02

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 153 von 207

Page 153 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5320	5320 (Pk)	Vertical	97.85	-	-
	5320 (Av)		88.22	-	-
	5350 (Pk)		59.78	74*	-14.22
	5350 (Av)		33.19	54*	-20.81
	10640 (Pk)		51.70	68.23	-16.53
	10640 (Av)		40.02	54	-13.98
	15960 (Pk)		53.14	68.23	-15.09
	15960 (Av)		41.65	54	-12.35
	5320 (Pk)	Horizontal	101.89	-	-
	5320 (Av)		92.11	-	-
	5350 (Pk)		62.73	74*	-11.27
	5350 (Av)		35.98	54*	-18.02
	10640 (Pk)		52.50	68.23	-15.73
	10640 (Av)		40.09	54	-13.91
	15960 (Pk)		53.37	68.23	-14.86
	15960 (Av)		41.66	54	-12.34
5500	5500 (Pk)	Vertical	98.12	-	-
	5500 (Av)		88.44	-	-
	5460 (Pk)		52.12	74*	-21.88
	5460 (Av)		32.80	54*	-21.20
	11000 (Pk)		52.17	68.23	-16.06
	11000 (Av)		40.63	54	-13.37
	16500 (Pk)		55.14	68.23	-13.09
	16500 (Av)		43.38	54	-10.62
	5500 (Pk)	Horizontal	101.07	-	-
	5500 (Av)		90.77	-	-
	5460 (Pk)		54.50	74*	-19.50
	5460 (Av)		35.31	54*	-18.69
	11000 (Pk)		53.18	68.23	-15.05
	11000 (Av)		40.67	54	-13.33
	16500 (Pk)		55.47	68.23	-12.76
	16500 (Av)		43.28	54	-10.72
5700	5700 (Pk)	Vertical	98.01	-	-
	5700 (Av)		88.13	-	-
	5460 (Pk)		43.01	74*	-30.99
	5460 (Av)		29.99	54*	-24.01
	11400 (Pk)		54.45	68.23	-13.78
	11400 (Av)		41.56	54	-12.44
	17100 (Pk)		55.83	68.23	-12.40
	17100 (Av)		44.30	54	-9.70
	5700 (Pk)	Horizontal	99.82	-	-
	5700 (Av)		89.71	-	-
	5460 (Pk)		42.77	74*	-31.23
	5460 (Av)		30.10	54*	-23.90
	11400 (Pk)		52.52	68.23	-15.71
	11400 (Av)		41.53	54	-12.47
	17100 (Pk)		56.18	68.23	-12.05
	17100 (Av)		44.36	54	-9.64

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av : Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 154 von 207

Page 154 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5720	5720 (Pk)	Vertical	105.83	-	-
	5720 (Av)		95.75	-	-
	5460 (Pk)		43.89	74*	-30.11
	5460 (Av)		30.07	54*	-23.93
	11440 (Pk)		52.96	68.23	-15.27
	11440 (Av)		41.60	54	-12.40
	17160 (Pk)		56.01	68.23	-12.22
	17160 (Av)		44.45	54	-9.55
	5720 (Pk)	Horizontal	106.95	-	-
	5720 (Av)		97.02	-	-
	5460 (Pk)		43.12	74*	-30.88
	5460 (Av)		30.29	54*	-23.71
	11440 (Pk)		53.72	68.23	-14.51
	11440 (Av)		41.61	54	-12.39
	17160 (Pk)		56.53	68.23	-11.70
	17160 (Av)		44.56	54	-9.44
5745	5715(Pk)	Vertical	102.28	78.20*	24.08
	5725(Pk)		92.53	78.20*	14.33
	5745 (Pk)		72.26	-	-
	5745 (Av)		66.90	-	-
	11490 (Pk)		54.62	68.23	-13.61
	11490 (Av)		42.42	54	-11.58
	17235 (Pk)		56.35	68.23	-11.88
	17235 (Av)		45.34	54	-8.66
	5715(Pk)	Horizontal	103.40	78.20*	25.20
	5725(Pk)		92.99	78.20*	14.79
	5745 (Pk)		74.24	-	-
	5745 (Av)		68.59	-	-
	11490 (Pk)		54.09	68.23	-14.14
	11490 (Av)		42.40	54	-11.60
	17235 (Pk)		56.87	68.23	-11.36
	17235 (Av)		45.36	54	-8.64
5825	5825 (Pk)	Vertical	106.81	-	-
	5825 (Av)		96.45	-	-
	5850 (Pk)		76.02	78.20*	-2.18
	5860 (Pk)		70.11	78.20*	-8.09
	11650 (Pk)		56.02	68.23	-12.21
	11650 (Av)		42.68	54	-11.32
	17475 (Pk)		59.38	68.23	-8.85
	17475 (Av)		47.20	54	-6.80
	5825 (Pk)	Horizontal	107.08	-	-
	5825 (Av)		96.86	-	-
	5850 (Pk)		75.90	78.20*	-2.30
	5860 (Pk)		69.04	78.20*	-9.16
	11650 (Pk)		55.23	68.23	-13.00
	11650 (Av)		42.35	54	-11.65
	17475 (Pk)		58.67	68.23	-9.56
	17475 (Av)		47.15	54	-6.85

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 155 von 207

Page 155 of 207

Modulation: 802.11ac _ VHT 20MHz

Data rate: MCS9

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5180	5180 (Pk)	Vertical	97.58	-	-
	5180 (Av)		82.36	-	-
	5150 (Pk)		56.88	74*	-17.12
	5150 (Av)		34.93	54*	-19.07
	10360 (Pk)		50.96	68.23	-17.27
	10360 (Av)		39.31	54	-14.69
	15540 (Pk)		54.01	68.23	-14.22
	15540 (Av)		41.34	54	-12.66
	5180 (Pk)	Horizontal	100.83	-	-
	5180 (Av)		85.37	-	-
	5150 (Pk)		60.93	74*	-13.07
	5150 (Av)		36.40	54*	-17.60
	10360 (Pk)		52.25	68.23	-15.98
	10360 (Av)		39.35	54	-14.65
	15540 (Pk)		54.01	68.23	-14.22
	15540 (Av)		41.33	54	-12.67
5240	5240 (Pk)	Vertical	100.15	-	-
	5240 (Av)		84.80	-	-
	5350 (Pk)		44.64	74*	-29.36
	5350 (Av)		30.92	54*	-23.08
	10480 (Pk)		51.79	68.23	-16.44
	10480 (Av)		39.90	54	-14.10
	15720 (Pk)		52.81	68.23	-15.42
	15720 (Av)		41.17	54	-12.83
	5240 (Pk)	Horizontal	104.14	-	-
	5240 (Av)		88.50	-	-
	5350 (Pk)		46.60	74*	-27.40
	5350 (Av)		32.57	54*	-21.43
	10480 (Pk)		51.76	68.23	-16.47
	10480 (Av)		39.93	54	-14.07
	15720 (Pk)		53.95	68.23	-14.28
	15720 (Av)		41.18	54	-12.82
5260	5260 (Pk)	Vertical	99.66	-	-
	5260 (Av)		84.31	-	-
	5350 (Pk)		44.75	74*	-29.25
	5350 (Av)		30.87	54*	-23.13
	10520 (Pk)		52.28	68.23	-15.95
	10520 (Av)		39.94	54	-14.06
	15780 (Pk)		52.91	68.23	-15.32
	15780 (Av)		41.03	54	-12.97
	5260 (Pk)	Horizontal	102.79	-	-
	5260 (Av)		87.34	-	-
	5350 (Pk)		47.30	74*	-26.70
	5350 (Av)		31.52	54*	-22.48
	10520 (Pk)		52.08	68.23	-16.15
	10520 (Av)		39.95	54	-14.05
	15780 (Pk)		52.96	68.23	-15.27
	15780 (Av)		41.01	54	-12.99

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 156 von 207

Page 156 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5320	5320 (Pk)	Vertical	98.03	-	-
	5320 (Av)		82.73	-	-
	5350 (Pk)		59.63	74*	-14.37
	5350 (Av)		32.53	54*	-21.47
	10640 (Pk)		52.26	68.23	-15.97
	10640 (Av)		39.98	54	-14.02
	15960 (Pk)		53.65	68.23	-14.58
	15960 (Av)		41.63	54	-12.37
	5320 (Pk)	Horizontal	102.90	-	-
	5320 (Av)		86.50	-	-
	5350 (Pk)		62.21	74*	-11.79
	5350 (Av)		34.31	54*	-19.69
	10640 (Pk)		52.12	68.23	-16.11
	10640 (Av)		40.08	54	-13.92
	15960 (Pk)		52.75	68.23	-15.48
	15960 (Av)		41.70	54	-12.30
5500	5500 (Pk)	Vertical	98.47	-	-
	5500 (Av)		83.49	-	-
	5460 (Pk)		52.47	74*	-21.53
	5460 (Av)		32.47	54*	-21.53
	11000 (Pk)		52.50	68.23	-15.73
	11000 (Av)		40.73	54	-13.27
	16500 (Pk)		54.92	68.23	-13.31
	16500 (Av)		43.42	54	-10.58
	5500 (Pk)	Horizontal	101.64	-	-
	5500 (Av)		86.29	-	-
	5460 (Pk)		53.63	74*	-20.37
	5460 (Av)		35.05	54*	-18.95
	11000 (Pk)		52.07	68.23	-16.16
	11000 (Av)		40.72	54	-13.28
	16500 (Pk)		55.72	68.23	-12.51
	16500 (Av)		43.45	54	-10.55
5700	5700 (Pk)	Vertical	98.22	-	-
	5700 (Av)		83.18	-	-
	5460 (Pk)		42.89	74*	-31.11
	5460 (Av)		29.95	54*	-24.05
	11400 (Pk)		52.55	68.23	-15.68
	11400 (Av)		41.52	54	-12.48
	17100 (Pk)		55.55	68.23	-12.68
	17100 (Av)		44.28	54	-9.72
	5700 (Pk)	Horizontal	99.87	-	-
	5700 (Av)		83.93	-	-
	5460 (Pk)		42.25	74*	-31.75
	5460 (Av)		30.16	54*	-23.84
	11400 (Pk)		53.07	68.23	-15.16
	11400 (Av)		41.56	54	-12.44
	17100 (Pk)		56.83	68.23	-11.40
	17100 (Av)		44.29	54	-9.71

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 157 von 207

Page 157 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5720	5720 (Pk)	Vertical	101.19	-	-
	5720 (Av)		85.09	-	-
	5460 (Pk)		43.30	74*	-30.70
	5460 (Av)		30.14	54*	-23.86
	11440 (Pk)		53.02	68.23	-15.21
	11440 (Av)		41.48	54	-12.52
	17160 (Pk)		57.01	68.23	-11.22
	17160 (Av)		44.42	54	-9.58
	5720 (Pk)	Horizontal	102.62	-	-
	5720 (Av)		86.38	-	-
	5460 (Pk)		42.65	74*	-31.35
	5460 (Av)		30.17	54*	-23.83
	11440 (Pk)		53.16	68.23	-15.07
	11440 (Av)		41.47	54	-12.53
	17160 (Pk)		56.01	68.23	-12.22
	17160 (Av)		44.42	54	-9.58
5745	5715(Pk)	Vertical	55.95	78.20*	-22.25
	5725(Pk)		64.54	78.20*	-13.66
	5745 (Pk)		101.65	-	-
	5745 (Av)		85.62	-	-
	11490 (Pk)		53.50	68.23	-14.73
	11490 (Av)		42.41	54	-11.59
	17235 (Pk)		57.39	68.23	-10.84
	17235 (Av)		45.29	54	-8.71
	5715(Pk)	Horizontal	57.83	78.20*	-20.37
	5725(Pk)		64.30	78.20*	-13.90
	5745 (Pk)		101.70	-	-
	5745 (Av)		85.48	-	-
	11490 (Pk)		53.52	68.23	-14.71
	11490 (Av)		42.40	54	-11.60
	17235 (Pk)		56.16	68.23	-12.07
	17235 (Av)		45.27	54	-8.73
5825	5825 (Pk)	Vertical	103.79	-	-
	5825 (Av)		87.64	-	-
	5850 (Pk)		60.46	78.20*	-17.74
	5860 (Pk)		59.60	78.20*	-18.60
	11650 (Pk)		53.91	68.23	-14.32
	11650 (Av)		41.68	54	-12.32
	17475 (Pk)		58.30	68.23	-9.93
	17475 (Av)		47.16	54	-6.84
	5825 (Pk)	Horizontal	101.61	-	-
	5825 (Av)		85.88	-	-
	5850 (Pk)		57.92	78.20*	-20.28
	5860 (Pk)		57.73	78.20*	-20.47
	11650 (Pk)		53.39	68.23	-14.84
	11650 (Av)		41.62	54	-12.38
	17475 (Pk)		58.97	68.23	-9.26
	17475 (Av)		47.19	54	-6.81

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 158 von 207

Page 158 of 207

Modulation: 802.11ax_ HE 20MHz

Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5180	5180 (Pk)	Vertical	102.45	-	-
	5180 (Av)		89.39	-	-
	5150 (Pk)		59.86	74*	-14.14
	5150 (Av)		37.32	54*	-16.68
	10360 (Pk)		51.68	68.23	-16.55
	10360 (Av)		39.36	54	-14.64
	15540 (Pk)		53.59	68.23	-14.64
	15540 (Av)		41.38	54	-12.62
	5180 (Pk)	Horizontal	105.12	-	-
	5180 (Av)		92.12	-	-
	5150 (Pk)		61.33	74*	-12.67
	5150 (Av)		39.73	54*	-14.27
	10360 (Pk)		51.23	68.23	-17.00
	10360 (Av)		39.33	54	-14.67
	15540 (Pk)		54.00	68.23	-14.23
	15540 (Av)		41.31	54	-12.69
5240	5240 (Pk)	Vertical	109.50	-	-
	5240 (Av)		95.33	-	-
	5350 (Pk)		63.85	74*	-10.15
	5350 (Av)		41.65	54*	-12.35
	10480 (Pk)		51.29	68.23	-16.94
	10480 (Av)		39.82	54	-14.18
	15720 (Pk)		53.01	68.23	-15.22
	15720 (Av)		41.13	54	-12.87
	5240 (Pk)	Horizontal	110.85	-	-
	5240 (Av)		96.41	-	-
	5350 (Pk)		66.17	74*	-7.83
	5350 (Av)		44.07	54*	-9.93
	10480 (Pk)		51.65	68.23	-16.58
	10480 (Av)		39.91	54	-14.09
	15720 (Pk)		52.29	68.23	-15.94
	15720 (Av)		41.20	54	-12.80
5260	5260 (Pk)	Vertical	109.28	-	-
	5260 (Av)		95.45	-	-
	5350 (Pk)		67.86	74*	-6.14
	5350 (Av)		44.89	54*	-9.11
	10520 (Pk)		51.91	68.23	-16.32
	10520 (Av)		39.89	54	-14.11
	15780 (Pk)		52.58	68.23	-15.65
	15780 (Av)		40.97	54	-13.03
	5260 (Pk)	Horizontal	112.40	-	-
	5260 (Av)		97.63	-	-
	5350 (Pk)		71.25	74*	-2.75
	5350 (Av)		48.32	54*	-5.68
	10520 (Pk)		51.59	68.23	-16.64
	10520 (Av)		39.99	54	-14.01
	15780 (Pk)		52.39	68.23	-15.84
	15780 (Av)		40.99	54	-13.01

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 159 von 207

Page 159 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5320	5320 (Pk)	Vertical	101.73	-	-
	5320 (Av)		88.70	-	-
	5350 (Pk)		56.78	74*	-17.22
	5350 (Av)		33.79	54*	-20.21
	10640 (Pk)		51.91	68.23	-16.32
	10640 (Av)		40.03	54	-13.97
	15960 (Pk)		53.51	68.23	-14.72
	15960 (Av)		41.69	54	-12.31
	5320 (Pk)	Horizontal	104.99	-	-
	5320 (Av)		91.26	-	-
	5350 (Pk)		59.53	74*	-14.47
	5350 (Av)		35.00	54*	-19.00
	10640 (Pk)		51.77	68.23	-16.46
	10640 (Av)		40.01	54	-13.99
	15960 (Pk)		54.84	68.23	-13.39
	15960 (Av)		41.65	54	-12.35
5500	5500 (Pk)	Vertical	99.82	-	-
	5500 (Av)		87.84	-	-
	5460 (Pk)		52.41	74*	-21.59
	5460 (Av)		32.92	54*	-21.08
	11000 (Pk)		53.10	68.23	-15.13
	11000 (Av)		40.66	54	-13.34
	16500 (Pk)		54.57	68.23	-13.66
	16500 (Av)		43.32	54	-10.68
	5500 (Pk)	Horizontal	104.19	-	-
	5500 (Av)		91.02	-	-
	5460 (Pk)		54.71	74*	-19.29
	5460 (Av)		34.02	54*	-19.98
	11000 (Pk)		52.04	68.23	-16.19
	11000 (Av)		40.61	54	-13.39
	16500 (Pk)		55.23	68.23	-13.00
	16500 (Av)		43.25	54	-10.75
5700	5700 (Pk)	Vertical	101.46	-	-
	5700 (Av)		88.45	-	-
	5460 (Pk)		42.96	74*	-31.04
	5460 (Av)		30.27	54*	-23.73
	11400 (Pk)		53.07	68.23	-15.16
	11400 (Av)		41.50	54	-12.50
	17100 (Pk)		55.62	68.23	-12.61
	17100 (Av)		44.29	54	-9.71
	5700 (Pk)	Horizontal	103.32	-	-
	5700 (Av)		89.98	-	-
	5460 (Pk)		43.33	74*	-30.67
	5460 (Av)		30.30	54*	-23.70
	11400 (Pk)		54.04	68.23	-14.19
	11400 (Av)		41.48	54	-12.52
	17100 (Pk)		55.63	68.23	-12.60
	17100 (Av)		44.35	54	-9.65

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av : Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 160 von 207

Page 160 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5720	5720 (Pk)	Vertical	108.25	-	-
	5720 (Av)		95.08	-	-
	5460 (Pk)		43.04	74*	-30.96
	5460 (Av)		30.32	54*	-23.68
	11440 (Pk)		52.68	68.23	-15.55
	11440 (Av)		41.55	54	-12.45
	17160 (Pk)		56.71	68.23	-11.52
	17160 (Av)		44.40	54	-9.60
	5720 (Pk)	Horizontal	109.53	-	-
	5720 (Av)		96.31	-	-
	5460 (Pk)		43.01	74*	-30.99
	5460 (Av)		30.38	54*	-23.62
	11440 (Pk)		53.37	68.23	-14.86
	11440 (Av)		41.56	54	-12.44
	17160 (Pk)		56.66	68.23	-11.57
	17160 (Av)		44.52	54	-9.48
5745	5715(Pk)	Vertical	68.99	78.20*	-9.21
	5725(Pk)		76.52	78.20*	-1.68
	5745 (Pk)		107.59	-	-
	5745 (Av)		93.61	-	-
	11490 (Pk)		53.99	68.23	-14.24
	11490 (Av)		42.48	54	-11.52
	17235 (Pk)		57.26	68.23	-10.97
	17235 (Av)		45.34	54	-8.66
	5715(Pk)	Horizontal	69.00	78.20*	-9.20
	5725(Pk)		74.02	78.20*	-4.18
	5745 (Pk)		107.05	-	-
	5745 (Av)		93.92	-	-
	11490 (Pk)		53.93	68.23	-14.30
	11490 (Av)		42.47	54	-11.53
	17235 (Pk)		56.62	68.23	-11.61
	17235 (Av)		45.34	54	-8.66
5825	5825 (Pk)	Vertical	110.09	-	-
	5825 (Av)		96.51	-	-
	5850 (Pk)		74.92	78.20*	-3.28
	5860 (Pk)		67.45	78.20*	-10.75
	11650 (Pk)		56.61	68.23	-11.62
	11650 (Av)		43.51	54	-10.49
	17475 (Pk)		58.34	68.23	-9.89
	17475 (Av)		47.13	54	-6.87
	5825 (Pk)	Horizontal	108.87	-	-
	5825 (Av)		95.33	-	-
	5850 (Pk)		73.15	78.20*	-5.05
	5860 (Pk)		66.91	78.20*	-11.29
	11650 (Pk)		54.18	68.23	-14.05
	11650 (Av)		42.18	54	-11.82
	17475 (Pk)		58.00	68.23	-10.23
	17475 (Av)		47.26	54	-6.74

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 161 von 207

Page 161 of 207

Modulation: 802.11ax _ HE 20MHz

Data rate: MCS11

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5180	5180 (Pk)	Vertical	100.55	-	-
	5180 (Av)		81.89	-	-
	5150 (Pk)		57.73	74*	-16.27
	5150 (Av)		34.45	54*	-19.55
	10360 (Pk)		50.86	68.23	-17.37
	10360 (Av)		39.32	54	-14.68
	15540 (Pk)		53.27	68.23	-14.96
	15540 (Av)		41.33	54	-12.67
	5180 (Pk)	Horizontal	101.87	-	-
	5180 (Av)		83.80	-	-
	5150 (Pk)		58.27	74*	-15.73
	5150 (Av)		35.38	54*	-18.62
	10360 (Pk)		51.75	68.23	-16.48
	10360 (Av)		39.27	54	-14.73
	15540 (Pk)		53.52	68.23	-14.71
	15540 (Av)		41.29	54	-12.71
5240	5240 (Pk)	Vertical	100.52	-	-
	5240 (Av)		82.24	-	-
	5350 (Pk)		43.40	74*	-30.60
	5350 (Av)		30.40	54*	-23.60
	10480 (Pk)		52.54	68.23	-15.69
	10480 (Av)		39.93	54	-14.07
	15720 (Pk)		53.14	68.23	-15.09
	15720 (Av)		41.22	54	-12.78
	5240 (Pk)	Horizontal	102.07	-	-
	5240 (Av)		84.10	-	-
	5350 (Pk)		46.70	74*	-27.30
	5350 (Av)		31.26	54*	-22.74
	10480 (Pk)		51.39	68.23	-16.84
	10480 (Av)		39.85	54	-14.15
	15720 (Pk)		53.13	68.23	-15.10
	15720 (Av)		41.19	54	-12.81
5260	5260 (Pk)	Vertical	100.42	-	-
	5260 (Av)		81.47	-	-
	5350 (Pk)		43.16	74*	-30.84
	5350 (Av)		30.39	54*	-23.61
	10520 (Pk)		51.86	68.23	-16.37
	10520 (Av)		39.96	54	-14.04
	15780 (Pk)		54.02	68.23	-14.21
	15780 (Av)		41.06	54	-12.94
	5260 (Pk)	Horizontal	101.70	-	-
	5260 (Av)		83.28	-	-
	5350 (Pk)		44.97	74*	-29.03
	5350 (Av)		31.22	54*	-22.78
	10520 (Pk)		51.11	68.23	-17.12
	10520 (Av)		39.94	54	-14.06
	15780 (Pk)		52.71	68.23	-15.52
	15780 (Av)		40.99	54	-13.01

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 162 von 207

Page 162 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5320	5320 (Pk)	Vertical	98.58	-	-
	5320 (Av)		79.77	-	-
	5350 (Pk)		47.99	74*	-26.01
	5350 (Av)		31.17	54*	-22.83
	10640 (Pk)		52.06	68.23	-16.17
	10640 (Av)		40.11	54	-13.89
	15960 (Pk)		53.23	68.23	-15.00
	15960 (Av)		41.71	54	-12.29
	5320 (Pk)	Horizontal	99.96	-	-
	5320 (Av)		81.62	-	-
	5350 (Pk)		50.31	74*	-23.69
	5350 (Av)		31.79	54*	-22.21
	10640 (Pk)		50.90	68.23	-17.33
	10640 (Av)		39.98	54	-14.02
	15960 (Pk)		52.90	68.23	-15.33
	15960 (Av)		41.69	54	-12.31
5500	5500 (Pk)	Vertical	97.79	-	-
	5500 (Av)		80.44	-	-
	5460 (Pk)		46.40	74*	-27.60
	5460 (Av)		32.35	54*	-21.65
	11000 (Pk)		54.99	68.23	-13.24
	11000 (Av)		41.56	54	-12.44
	16500 (Pk)		57.37	68.23	-10.86
	16500 (Av)		44.25	54	-9.75
	5500 (Pk)	Horizontal	101.12	-	-
	5500 (Av)		82.14	-	-
	5460 (Pk)		47.75	74*	-26.25
	5460 (Av)		32.83	54*	-21.17
	11000 (Pk)		53.00	68.23	-15.23
	11000 (Av)		40.71	54	-13.29
	16500 (Pk)		55.06	68.23	-13.17
	16500 (Av)		43.30	54	-10.70
5700	5700 (Pk)	Vertical	99.99	-	-
	5700 (Av)		81.53	-	-
	5460 (Pk)		43.46	74*	-30.54
	5460 (Av)		30.17	54*	-23.83
	11400 (Pk)		53.89	68.23	-14.34
	11400 (Av)		41.59	54	-12.41
	17100 (Pk)		55.99	68.23	-12.24
	17100 (Av)		44.23	54	-9.77
	5700 (Pk)	Horizontal	100.92	-	-
	5700 (Av)		82.67	-	-
	5460 (Pk)		42.85	74*	-31.15
	5460 (Av)		30.20	54*	-23.80
	11400 (Pk)		53.11	68.23	-15.12
	11400 (Av)		41.56	54	-12.44
	17100 (Pk)		56.25	68.23	-11.98
	17100 (Av)		44.33	54	-9.67

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 163 von 207

Page 163 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5720	5720 (Pk)	Vertical	100.01	-	-
	5720 (Av)		81.06	-	-
	5460 (Pk)		43.14	74*	-30.86
	5460 (Av)		30.16	54*	-23.84
	11440 (Pk)		53.16	68.23	-15.07
	11440 (Av)		41.46	54	-12.54
	17160 (Pk)		56.39	68.23	-11.84
	17160 (Av)		44.45	54	-9.55
	5720 (Pk)	Horizontal	100.68	-	-
	5720 (Av)		82.11	-	-
	5460 (Pk)		43.27	74*	-30.73
	5460 (Av)		30.19	54*	-23.81
	11440 (Pk)		53.87	68.23	-14.36
	11440 (Av)		41.46	54	-12.54
	17160 (Pk)		55.57	68.23	-12.66
	17160 (Av)		44.41	54	-9.59
5745	5715(Pk)	Vertical	49.28	78.20*	-28.92
	5725(Pk)		58.35	78.20*	-19.85
	5745 (Pk)		99.92	-	-
	5745 (Av)		81.39	-	-
	11490 (Pk)		54.54	68.23	-13.69
	11490 (Av)		42.45	54	-11.55
	17235 (Pk)		57.23	68.23	-11.00
	17235 (Av)		45.34	54	-8.66
	5715(Pk)	Horizontal	50.55	78.20*	-27.65
	5725(Pk)		59.51	78.20*	-18.69
	5745 (Pk)		100.60	-	-
	5745 (Av)		81.35	-	-
	11490 (Pk)		54.00	68.23	-14.23
	11490 (Av)		42.36	54	-11.64
	17235 (Pk)		57.31	68.23	-10.92
	17235 (Av)		45.31	54	-8.69
5825	5825 (Pk)	Vertical	100.80	-	-
	5825 (Av)		81.90	-	-
	5850 (Pk)		55.92	78.20*	-22.28
	5860 (Pk)		47.87	78.20*	-30.33
	11650 (Pk)		54.34	68.23	-13.89
	11650 (Av)		41.53	54	-12.47
	17475 (Pk)		59.85	68.23	-8.38
	17475 (Av)		47.23	54	-6.77
	5825 (Pk)	Horizontal	100.67	-	-
	5825 (Av)		81.17	-	-
	5850 (Pk)		53.72	78.20*	-24.48
	5860 (Pk)		46.63	78.20*	-31.57
	11650 (Pk)		53.71	68.23	-14.52
	11650 (Av)		41.57	54	-12.43
	17475 (Pk)		59.11	68.23	-9.12
	17475 (Av)		47.26	54	-6.74

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 164 von 207

Page 164 of 207

Modulation: 802.11n _ HT 40MHz

Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5190	5190 (Pk)	Vertical	95.38	-	-
	5190 (Av)		84.24	-	-
	5150 (Pk)		63.74	74*	-10.26
	5150 (Av)		43.99	54*	-10.01
	10380 (Pk)		51.73	68.23	-16.50
	10380 (Av)		39.81	54	-14.19
	15570 (Pk)		53.45	68.23	-14.78
	15570 (Av)		41.32	54	-12.68
	5190 (Pk)	Horizontal	96.92	-	-
	5190 (Av)		86.36	-	-
	5150 (Pk)		65.35	74*	-8.65
	5150 (Av)		45.96	54*	-8.04
	10380 (Pk)		52.40	68.23	-15.83
	10380 (Av)		39.86	54	-14.14
	15570 (Pk)		53.54	68.23	-14.69
	15570 (Av)		41.47	54	-12.53
5230	5230 (Pk)	Vertical	98.11	-	-
	5230 (Av)		87.09	-	-
	5350 (Pk)		54.90	74*	-19.10
	5350 (Av)		36.27	54*	-17.73
	10460 (Pk)		52.59	68.23	-15.64
	10460 (Av)		40.17	54	-13.83
	15690 (Pk)		53.28	68.23	-14.95
	15690 (Av)		41.01	54	-12.99
	5230 (Pk)	Horizontal	100.76	-	-
	5230 (Av)		90.08	-	-
	5350 (Pk)		55.35	74*	-18.65
	5350 (Av)		38.64	54*	-15.36
	10460 (Pk)		52.72	68.23	-15.51
	10460 (Av)		40.19	54	-13.81
	15690 (Pk)		53.43	68.23	-14.80
	15690 (Av)		41.01	54	-12.99
5270	5270 (Pk)	Vertical	101.85	-	-
	5270 (Av)		90.53	-	-
	5350 (Pk)		61.15	74*	-12.85
	5350 (Av)		44.07	54*	-9.93
	10540 (Pk)		51.13	68.23	-17.10
	10540 (Av)		40.27	54	-13.73
	15810 (Pk)		52.23	68.23	-16.00
	15810 (Av)		40.75	54	-13.25
	5270 (Pk)	Horizontal	103.54	-	-
	5270 (Av)		91.68	-	-
	5350 (Pk)		65.75	74*	-8.25
	5350 (Av)		48.35	54*	-5.65
	10540 (Pk)		52.21	68.23	-16.02
	10540 (Av)		40.31	54	-13.69
	15810 (Pk)		53.09	68.23	-15.14
	15810 (Av)		40.76	54	-13.24

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 165 von 207

Page 165 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5310	5310 (Pk)	Vertical	97.75	-	-
	5310 (Av)		86.71	-	-
	5350 (Pk)		60.95	74*	-13.05
	5350 (Av)		41.67	54*	-12.33
	10620 (Pk)		53.28	68.23	-14.95
	10620 (Av)		40.34	54	-13.66
	15930 (Pk)		53.76	68.23	-14.47
	15930 (Av)		41.22	54	-12.78
	5310 (Pk)	Horizontal	98.73	-	-
	5310 (Av)		87.87	-	-
	5350 (Pk)		65.20	74*	-8.80
	5350 (Av)		46.02	54*	-7.98
	10620 (Pk)		51.15	68.23	-17.08
	10620 (Av)		40.29	54	-13.71
	15930 (Pk)		52.15	68.23	-16.08
	15930 (Av)		41.17	54	-12.83
5510	5510 (Pk)	Vertical	94.00	-	-
	5510 (Av)		82.80	-	-
	5460 (Pk)		49.84	74*	-24.16
	5460 (Av)		32.85	54*	-21.15
	11020 (Pk)		53.24	68.23	-14.99
	11020 (Av)		41.06	54	-12.94
	16530 (Pk)		56.47	68.23	-11.76
	16530 (Av)		43.16	54	-10.84
	5510 (Pk)	Horizontal	96.03	-	-
	5510 (Av)		85.13	-	-
	5460 (Pk)		48.74	74*	-25.26
	5460 (Av)		34.46	54*	-19.54
	11020 (Pk)		52.56	68.23	-15.67
	11020 (Av)		41.03	54	-12.97
	16530 (Pk)		55.16	68.23	-13.07
	16530 (Av)		43.13	54	-10.87
5590	5590 (Pk)	Vertical	103.44	-	-
	5590 (Av)		91.42	-	-
	5460 (Pk)		54.52	74*	-19.48
	5460 (Av)		37.49	54*	-16.51
	11180 (Pk)		51.95	68.23	-16.28
	11180 (Av)		40.75	54	-13.25
	16770 (Pk)		56.07	68.23	-12.16
	16770 (Av)		43.81	54	-10.19
	5590 (Pk)	Horizontal	103.75	-	-
	5590 (Av)		92.69	-	-
	5460 (Pk)		53.69	74*	-20.31
	5460 (Av)		37.93	54*	-16.07
	11180 (Pk)		52.29	68.23	-15.94
	11180 (Av)		40.71	54	-13.29
	16770 (Pk)		55.84	68.23	-12.39
	16770 (Av)		43.87	54	-10.13

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 166 von 207

Page 166 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5670	5670 (Pk)	Vertical	96.67	-	-
	5670 (Av)		85.55	-	-
	5460 (Pk)		43.04	74*	-30.96
	5460 (Av)		30.34	54*	-23.66
	11340 (Pk)		53.38	68.23	-14.85
	11340 (Av)		41.22	54	-12.78
	17010 (Pk)		55.07	68.23	-13.16
	17010 (Av)		43.28	54	-10.72
	5670 (Pk)	Horizontal	98.82	-	-
	5670 (Av)		87.91	-	-
	5460 (Pk)		43.17	74*	-30.83
	5460 (Av)		30.37	54*	-23.63
	11340 (Pk)		53.40	68.23	-14.83
	11340 (Av)		41.27	54	-12.73
	17010 (Pk)		54.60	68.23	-13.63
	17010 (Av)		43.31	54	-10.69
5710	5710 (Pk)	Vertical	100.95	-	-
	5710 (Av)		89.95	-	-
	5460 (Pk)		42.88	74*	-31.12
	5460 (Av)		30.37	54*	-23.63
	11420 (Pk)		53.66	68.23	-14.57
	11420 (Av)		41.95	54	-12.05
	17130 (Pk)		54.83	68.23	-13.40
	17130 (Av)		43.36	54	-10.64
	5710 (Pk)	Horizontal	103.88	-	-
	5710 (Av)		92.82	-	-
	5460 (Pk)		42.72	74*	-31.28
	5460 (Av)		30.47	54*	-23.53
	11420 (Pk)		54.51	68.23	-13.72
	11420 (Av)		42.02	54	-11.98
	17130 (Pk)		55.05	68.23	-13.18
	17130 (Av)		43.35	54	-10.65
5755	5755 (Pk)	Vertical	97.05	-	-
	5755 (Av)		86.11	-	-
	5715(Pk)		62.66	78.20*	-15.54
	5725(Pk)		64.87	78.20*	-13.33
	11510 (Pk)		54.51	68.23	-13.72
	11510 (Av)		42.69	54	-11.31
	17265(Pk)		54.38	68.23	-13.85
	17265(Av)		43.52	54	-10.48
	5755 (Pk)	Horizontal	100.03	-	-
	5755 (Av)		88.67	-	-
	5715(Pk)		68.74	78.20*	-9.46
	5725(Pk)		66.96	78.20*	-11.24
	11510 (Pk)		55.17	68.23	-13.06
	11510 (Av)		42.76	54	-11.24
	17265(Pk)		55.02	68.23	-13.21
	17265(Av)		43.49	54	-10.51

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 167 von 207

Page 167 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5795	5795 (Pk)	Vertical	100.28	-	-
	5795 (Av)		89.06	-	-
	5850 (Pk)		59.28	78.20*	-18.92
	5860 (Pk)		56.76	78.20*	-21.44
	11590 (Pk)		53.37	68.23	-14.86
	11590 (Av)		42.25	54	-11.75
	17385 (Pk)		56.04	68.23	-12.19
	17385 (Av)		43.85	54	-10.15
	5795 (Pk)	Horizontal	102.95	-	-
	5795 (Av)		91.76	-	-
	5850 (Pk)		61.59	78.20*	-16.61
	5860 (Pk)		57.88	78.20*	-20.32
	11590 (Pk)		54.27	68.23	-13.96
	11590 (Av)		42.09	54	-11.91
	17385 (Pk)		54.94	68.23	-13.29
	17385 (Pk)		43.81	54	-10.19

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 168 von 207

Page 168 of 207

Modulation: 802.11n _ HT 40MHz

Data rate: MCS7

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5190	5190 (Pk)	Vertical	96.06	-	-
	5190 (Av)		78.73	-	-
	5150 (Pk)		58.17	74*	-15.83
	5150 (Av)		38.87	54*	-15.13
	10380 (Pk)		51.77	68.23	-16.46
	10380 (Av)		39.76	54	-14.24
	15570 (Pk)		53.22	68.23	-15.01
	15570 (Av)		41.22	54	-12.78
	5190 (Pk)	Horizontal	97.58	-	-
	5190 (Av)		80.53	-	-
	5150 (Pk)		61.20	74*	-12.80
	5150 (Av)		40.57	54*	-13.43
	10380 (Pk)		52.91	68.23	-15.32
	10380 (Av)		39.73	54	-14.27
	15570 (Pk)		52.79	68.23	-15.44
	15570 (Av)		41.26	54	-12.74
5230	5230 (Pk)	Vertical	100.31	-	-
	5230 (Av)		82.70	-	-
	5350 (Pk)		55.22	74*	-18.78
	5350 (Av)		37.10	54*	-16.90
	10460 (Pk)		52.36	68.23	-15.87
	10460 (Av)		40.11	54	-13.89
	15690 (Pk)		52.73	68.23	-15.50
	15690 (Av)		40.90	54	-13.10
	5230 (Pk)	Horizontal	102.36	-	-
	5230 (Av)		84.98	-	-
	5150 (Pk)		55.76	74*	-18.24
	5150 (Av)		36.96	54*	-17.04
	10460 (Pk)		53.24	68.23	-14.99
	10460 (Av)		40.15	54	-13.85
	15690 (Pk)		53.96	68.23	-14.27
	15690 (Av)		40.96	54	-13.04
5270	5270 (Pk)	Vertical	99.21	-	-
	5270 (Av)		81.76	-	-
	5350 (Pk)		56.01	74*	-17.99
	5350 (Av)		34.46	54*	-19.54
	10540 (Pk)		52.08	68.23	-16.15
	10540 (Av)		40.20	54	-13.80
	15810 (Pk)		52.46	68.23	-15.77
	15810 (Av)		40.78	54	-13.22
	5270 (Pk)	Horizontal	100.78	-	-
	5270 (Av)		83.21	-	-
	5350 (Pk)		56.58	74*	-17.42
	5350 (Av)		34.98	54*	-19.02
	10540 (Pk)		52.13	68.23	-16.10
	10540 (Av)		40.16	54	-13.84
	15810 (Pk)		52.17	68.23	-16.06
	15810 (Av)		40.79	54	-13.21

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 169 von 207

Page 169 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5310	5310 (Pk)	Vertical	97.97	-	-
	5310 (Av)		80.64	-	-
	5350 (Pk)		63.67	74*	-10.33
	5350 (Av)		40.46	54*	-13.54
	10620 (Pk)		52.64	68.23	-15.59
	10620 (Av)		40.29	54	-13.71
	15930 (Pk)		53.43	68.23	-14.80
	15930 (Av)		41.24	54	-12.76
	5310 (Pk)	Horizontal	98.62	-	-
	5310 (Av)		81.40	-	-
	5350 (Pk)		65.81	74*	-8.19
	5350 (Av)		42.45	54*	-11.55
	10620 (Pk)		52.03	68.23	-16.20
	10620 (Av)		40.25	54	-13.75
	15930 (Pk)		53.88	68.23	-14.35
	15930 (Av)		41.28	54	-12.72
5510	5510 (Pk)	Vertical	94.55	-	-
	5510 (Av)		77.59	-	-
	5460 (Pk)		50.07	74*	-23.93
	5460 (Av)		32.90	54*	-21.10
	11020 (Pk)		52.86	68.23	-15.37
	11020 (Av)		40.95	54	-13.05
	16530 (Pk)		54.94	68.23	-13.29
	16530 (Av)		43.20	54	-10.80
	5510 (Pk)	Horizontal	95.73	-	-
	5510 (Av)		78.49	-	-
	5460 (Pk)		50.51	74*	-23.49
	5460 (Av)		33.63	54*	-20.37
	11020 (Pk)		52.68	68.23	-15.55
	11020 (Av)		41.02	54	-12.98
	16530 (Pk)		55.38	68.23	-12.85
	16530 (Av)		43.14	54	-10.86
5590	5590 (Pk)	Vertical	98.04	-	-
	5590 (Av)		81.75	-	-
	5460 (Pk)		45.65	74*	-28.35
	5460 (Av)		31.36	54*	-22.64
	11180 (Pk)		52.06	68.23	-16.17
	11180 (Av)		40.64	54	-13.36
	16770 (Pk)		55.54	68.23	-12.69
	16770 (Av)		43.83	54	-10.17
	5590 (Pk)	Horizontal	100.89	-	-
	5590 (Av)		83.78	-	-
	5460 (Pk)		47.54	74*	-26.46
	5460 (Av)		31.48	54*	-22.52
	11180 (Pk)		52.42	68.23	-15.81
	11180 (Av)		40.60	54	-13.40
	16770 (Pk)		55.39	68.23	-12.84
	16770 (Av)		43.85	54	-10.15

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 170 von 207

Page 170 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5670	5670 (Pk)	Vertical	96.87	-	-
	5670 (Av)		80.49	-	-
	5460 (Pk)		42.96	74*	-31.04
	5460 (Av)		30.28	54*	-23.72
	11340 (Pk)		52.52	68.23	-15.71
	11340 (Av)		41.19	54	-12.81
	17010 (Pk)		54.58	68.23	-13.65
	17010 (Av)		43.31	54	-10.69
	5670 (Pk)	Horizontal	100.14	-	-
	5670 (Av)		82.99	-	-
	5460 (Pk)		43.54	74*	-30.46
	5460 (Av)		30.36	54*	-23.64
	11340 (Pk)		53.10	68.23	-15.13
	11340 (Av)		41.22	54	-12.78
	17010 (Pk)		54.84	68.23	-13.39
	17010 (Av)		43.27	54	-10.73
5710	5710 (Pk)	Vertical	99.35	-	-
	5710 (Av)		81.97	-	-
	5460 (Pk)		43.29	74*	-30.71
	5460 (Av)		30.25	54*	-23.75
	11420 (Pk)		53.32	68.23	-14.91
	11420 (Av)		41.86	54	-12.14
	17130 (Pk)		55.04	68.23	-13.19
	17130 (Av)		43.38	54	-10.62
	5710 (Pk)	Horizontal	101.01	-	-
	5710 (Av)		83.76	-	-
	5460 (Pk)		43.04	74*	-30.96
	5460 (Av)		30.29	54*	-23.71
	11420 (Pk)		53.57	68.23	-14.66
	11420 (Av)		41.91	54	-12.09
	17130 (Pk)		55.27	68.23	-12.96
	17130 (Av)		43.47	54	-10.53
5755	5755 (Pk)	Vertical	99.37	-	-
	5755 (Av)		82.16	-	-
	5715(Pk)		65.31	78.20*	-12.89
	5725(Pk)		67.38	78.20*	-10.82
	11510 (Pk)		54.62	68.23	-13.61
	11510 (Av)		42.72	54	-11.28
	17265(Pk)		55.97	68.23	-12.26
	17265(Av)		43.52	54	-10.48
	5755 (Pk)	Horizontal	102.09	-	-
	5755 (Av)		84.99	-	-
	5715(Pk)		67.49	78.20*	-10.71
	5725(Pk)		69.17	78.20*	-9.03
	11510 (Pk)		54.37	68.23	-13.86
	11510 (Av)		42.71	54	-11.29
	17265(Pk)		54.29	68.23	-13.94
	17265(Av)		43.48	54	-10.52

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 171 von 207

Page 171 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5795	5795 (Pk)	Vertical	100.28	-	-
	5795 (Av)		83.17	-	-
	5850 (Pk)		56.54	78.20*	-21.66
	5860 (Pk)		53.46	78.20*	-24.74
	11590 (Pk)		53.68	68.23	-14.55
	11590 (Av)		42.12	54	-11.88
	17385 (Pk)		55.29	68.23	-12.94
	17385 (Av)		43.79	54	-10.21
	5795 (Pk)	Horizontal	101.47	-	-
	5795 (Av)		83.94	-	-
	5850 (Pk)		57.24	78.20*	-20.96
	5860 (Pk)		55.91	78.20*	-22.29
	11590 (Pk)		53.89	68.23	-14.34
	11590 (Av)		42.06	54	-11.94
	17385 (Pk)		55.57	68.23	-12.66
	17385 (Pk)		43.73	54	-10.27

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 172 von 207

Page 172 of 207

Modulation: 802.11ac _ VHT 40MHz

Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5190	5190 (Pk)	Vertical	95.84	-	-
	5190 (Av)		85.26	-	-
	5150 (Pk)		59.09	74*	-14.91
	5150 (Av)		42.70	54*	-11.30
	10380 (Pk)		51.80	68.23	-16.43
	10380 (Av)		39.71	54	-14.29
	15570 (Pk)		53.22	68.23	-15.01
	15570 (Av)		41.34	54	-12.66
	5190 (Pk)	Horizontal	98.06	-	-
	5190 (Av)		87.07	-	-
	5150 (Pk)		61.68	74*	-12.32
	5150 (Av)		44.75	54*	-9.25
	10380 (Pk)		52.00	68.23	-16.23
	10380 (Av)		39.72	54	-14.28
	15570 (Pk)		53.13	68.23	-15.10
	15570 (Av)		41.29	54	-12.71
5230	5230 (Pk)	Vertical	101.39	-	-
	5230 (Av)		89.50	-	-
	5350 (Pk)		58.92	74*	-15.08
	5350 (Av)		41.39	54*	-12.61
	10460 (Pk)		51.63	68.23	-16.60
	10460 (Av)		40.08	54	-13.92
	15690 (Pk)		52.34	68.23	-15.89
	15690 (Av)		40.94	54	-13.06
	5230 (Pk)	Horizontal	102.13	-	-
	5230 (Av)		91.16	-	-
	5350 (Pk)		54.14	74*	-19.86
	5350 (Av)		39.23	54*	-14.77
	10460 (Pk)		52.13	68.23	-16.10
	10460 (Av)		40.10	54	-13.90
	15690 (Pk)		52.87	68.23	-15.36
	15690 (Av)		41.00	54	-13.00
5270	5270 (Pk)	Vertical	99.83	-	-
	5270 (Av)		88.81	-	-
	5350 (Pk)		58.40	74*	-15.60
	5350 (Av)		41.97	54*	-12.03
	10540 (Pk)		52.50	68.23	-15.73
	10540 (Av)		40.21	54	-13.79
	15810 (Pk)		52.37	68.23	-15.86
	15810 (Av)		40.76	54	-13.24
	5270 (Pk)	Horizontal	101.21	-	-
	5270 (Av)		89.67	-	-
	5350 (Pk)		58.50	74*	-15.50
	5350 (Av)		41.24	54*	-12.76
	10540 (Pk)		51.90	68.23	-16.33
	10540 (Av)		40.18	54	-13.82
	15810 (Pk)		52.58	68.23	-15.65
	15810 (Av)		40.72	54	-13.28

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 173 von 207

Page 173 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5310	5310 (Pk)	Vertical	98.84	-	-
	5310 (Av)		87.65	-	-
	5350 (Pk)		61.99	74*	-12.01
	5350 (Av)		44.02	54*	-9.98
	10620 (Pk)		51.83	68.23	-16.40
	10620 (Av)		40.23	54	-13.77
	15930 (Pk)		53.45	68.23	-14.78
	15930 (Av)		41.22	54	-12.78
	5310 (Pk)	Horizontal	99.78	-	-
	5310 (Av)		88.69	-	-
	5350 (Pk)		65.82	74*	-8.18
	5350 (Av)		46.65	54*	-7.35
	10620 (Pk)		51.89	68.23	-16.34
	10620 (Av)		40.27	54	-13.73
	15930 (Pk)		53.10	68.23	-15.13
	15930 (Av)		41.20	54	-12.80
5510	5510 (Pk)	Vertical	95.07	-	-
	5510 (Av)		84.59	-	-
	5460 (Pk)		51.20	74*	-22.80
	5460 (Av)		34.72	54*	-19.28
	11020 (Pk)		53.35	68.23	-14.88
	11020 (Av)		41.03	54	-12.97
	16530 (Pk)		56.39	68.23	-11.84
	16530 (Av)		43.16	54	-10.84
	5510 (Pk)	Horizontal	96.71	-	-
	5510 (Av)		85.25	-	-
	5460 (Pk)		51.35	74*	-22.65
	5460 (Av)		34.88	54*	-19.12
	11020 (Pk)		53.78	68.23	-14.45
	11020 (Av)		40.99	54	-13.01
	16530 (Pk)		55.92	68.23	-12.31
	16530 (Av)		43.13	54	-10.87
5590	5590 (Pk)	Vertical	101.08	-	-
	5590 (Av)		90.41	-	-
	5460 (Pk)		52.17	74*	-21.83
	5460 (Av)		36.83	54*	-17.17
	11180 (Pk)		51.98	68.23	-16.25
	11180 (Av)		40.67	54	-13.33
	16770 (Pk)		56.20	68.23	-12.03
	16770 (Av)		43.87	54	-10.13
	5590 (Pk)	Horizontal	103.33	-	-
	5590 (Av)		91.85	-	-
	5460 (Pk)		51.74	74*	-22.26
	5460 (Av)		36.99	54*	-17.01
	11180 (Pk)		52.99	68.23	-15.24
	11180 (Av)		40.68	54	-13.32
	16770 (Pk)		55.73	68.23	-12.50
	16770 (Av)		43.88	54	-10.12

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 174 von 207

Page 174 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5670	5670 (Pk)	Vertical	97.70	-	-
	5670 (Av)		87.21	-	-
	5460 (Pk)		43.70	74*	-30.30
	5460 (Av)		30.49	54*	-23.51
	11340 (Pk)		53.84	68.23	-14.39
	11340 (Av)		41.30	54	-12.70
	17010 (Pk)		55.83	68.23	-12.40
	17010 (Av)		43.38	54	-10.62
	5670 (Pk)	Horizontal	99.22	-	-
	5670 (Av)		88.03	-	-
	5460 (Pk)		42.81	74*	-31.19
	5460 (Av)		30.55	54*	-23.45
	11340 (Pk)		53.15	68.23	-15.08
	11340 (Av)		41.23	54	-12.77
	17010 (Pk)		55.50	68.23	-12.73
	17010 (Av)		43.32	54	-10.68
5710	5710 (Pk)	Vertical	102.30	-	-
	5710 (Av)		91.43	-	-
	5460 (Pk)		42.89	74*	-31.11
	5460 (Av)		30.52	54*	-23.48
	11420 (Pk)		55.09	68.23	-13.14
	11420 (Av)		41.94	54	-12.06
	17130 (Pk)		55.70	68.23	-12.53
	17130 (Av)		43.40	54	-10.60
	5710 (Pk)	Horizontal	102.44	-	-
	5710 (Av)		91.21	-	-
	5460 (Pk)		43.58	74*	-30.42
	5460 (Av)		30.52	54*	-23.48
	11420 (Pk)		53.47	68.23	-14.76
	11420 (Av)		41.90	54	-12.10
	17130 (Pk)		55.34	68.23	-12.89
	17130 (Av)		43.37	54	-10.63
5755	5755 (Pk)	Vertical	100.91	-	-
	5755 (Av)		89.78	-	-
	5715(Pk)		66.45	78.20*	-11.75
	5725(Pk)		69.44	78.20*	-8.76
	11510 (Pk)		54.33	68.23	-13.9
	11510 (Av)		42.78	54	-11.22
	17265(Pk)		55.72	68.23	-12.51
	17265(Av)		43.53	54	-10.47
	5755 (Pk)	Horizontal	101.73	-	-
	5755 (Av)		90.59	-	-
	5715(Pk)		71.20	78.20*	-7
	5725(Pk)		69.41	78.20*	-8.79
	11510 (Pk)		54.94	68.23	-13.29
	11510 (Av)		42.78	54	-11.22
	17265(Pk)		55.71	68.23	-12.52
	17265(Av)		43.56	54	-10.44

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 175 von 207

Page 175 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5795	5795 (Pk)	Vertical	100.56	-	-
	5795 (Av)		89.27	-	-
	5850 (Pk)		56.72	78.20*	-21.48
	5860 (Pk)		52.91	78.20*	-25.29
	11590 (Pk)		53.94	68.23	-14.29
	11590 (Av)		42.16	54	-11.84
	17385 (Pk)		55.16	68.23	-13.07
	17385 (Av)		43.80	54	-10.2
	5795 (Pk)	Horizontal	101.45	-	-
	5795 (Av)		89.79	-	-
	5850 (Pk)		56.99	78.20*	-21.21
	5860 (Pk)		54.63	78.20*	-23.57
	11590 (Pk)		53.78	68.23	-14.45
	11590 (Av)		42.07	54	-11.93
	17385 (Pk)		55.10	68.23	-13.13
	17385 (Pk)		43.82	54	-10.18

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 176 von 207

Page 176 of 207

Modulation: 802.11ac _ VHT 40MHz

Data rate: MCS9

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5190	5190 (Pk)	Vertical	95.98	-	-
	5190 (Av)		77.64	-	-
	5150 (Pk)		57.05	74*	-16.95
	5150 (Av)		38.35	54*	-15.65
	10380 (Pk)		51.62	68.23	-16.61
	10380 (Av)		39.79	54	-14.21
	15570 (Pk)		53.26	68.23	-14.97
	15570 (Av)		41.04	54	-12.96
	5190 (Pk)	Horizontal	98.19	-	-
	5190 (Av)		79.84	-	-
	5150 (Pk)		59.52	74*	-14.48
	5150 (Av)		39.84	54*	-14.16
	10380 (Pk)		51.69	68.23	-16.54
	10380 (Av)		39.84	54	-14.16
	15570 (Pk)		52.52	68.23	-15.71
	15570 (Av)		41.13	54	-12.87
5230	5230 (Pk)	Vertical	99.33	-	-
	5230 (Av)		81.24	-	-
	5350 (Pk)		55.87	74*	-18.13
	5350 (Av)		35.31	54*	-18.69
	10460 (Pk)		52.22	68.23	-16.01
	10460 (Av)		39.85	54	-14.15
	15690 (Pk)		53.73	68.23	-14.50
	15690 (Av)		41.18	54	-12.82
	5230 (Pk)	Horizontal	101.91	-	-
	5230 (Av)		83.16	-	-
	5350 (Pk)		55.25	74*	-18.75
	5350 (Av)		34.94	54*	-19.06
	10460 (Pk)		50.92	68.23	-17.31
	10460 (Av)		39.77	54	-14.23
	15690 (Pk)		52.67	68.23	-15.56
	15690 (Av)		41.19	54	-12.81
5270	5270 (Pk)	Vertical	98.64	-	-
	5270 (Av)		80.15	-	-
	5350 (Pk)		50.74	74*	-23.26
	5350 (Av)		33.16	54*	-20.84
	10540 (Pk)		52.46	68.23	-15.77
	10540 (Av)		40.26	54	-13.74
	15810 (Pk)		53.50	68.23	-14.73
	15810 (Av)		40.80	54	-13.20
	5270 (Pk)	Horizontal	99.74	-	-
	5270 (Av)		82.20	-	-
	5350 (Pk)		50.36	74*	-23.64
	5350 (Av)		32.94	54*	-21.06
	10540 (Pk)		51.21	68.23	-17.02
	10540 (Av)		40.24	54	-13.76
	15810 (Pk)		52.08	68.23	-16.15
	15810 (Av)		40.74	54	-13.26

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 177 von 207

Page 177 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5310	5310 (Pk)	Vertical	98.80	-	-
	5310 (Av)		80.28	-	-
	5350 (Pk)		61.86	74*	-12.14
	5350 (Av)		40.16	54*	-13.84
	10620 (Pk)		52.33	68.23	-15.90
	10620 (Av)		40.33	54	-13.67
	15930 (Pk)		53.22	68.23	-15.01
	15930 (Av)		41.26	54	-12.74
	5310 (Pk)	Horizontal	99.41	-	-
	5310 (Av)		81.40	-	-
	5350 (Pk)		62.82	74*	-11.18
	5350 (Av)		41.91	54*	-12.09
	10620 (Pk)		52.77	68.23	-15.46
	10620 (Av)		41.08	54	-12.92
	15930 (Pk)		55.15	68.23	-13.08
	15930 (Av)		43.15	54	-10.85
5510	5510 (Pk)	Vertical	95.22	-	-
	5510 (Av)		76.85	-	-
	5460 (Pk)		49.49	74*	-24.51
	5460 (Av)		32.90	54*	-21.10
	11020 (Pk)		52.93	68.23	-15.30
	11020 (Av)		41.00	54	-13.00
	16530 (Pk)		54.92	68.23	-13.31
	16530 (Av)		43.16	54	-10.84
	5510 (Pk)	Horizontal	96.92	-	-
	5510 (Av)		78.81	-	-
	5460 (Pk)		51.23	74*	-22.77
	5460 (Av)		33.96	54*	-20.04
	11020 (Pk)		53.13	68.23	-15.10
	11020 (Av)		41.02	54	-12.98
	16530 (Pk)		54.43	68.23	-13.80
	16530 (Av)		43.08	54	-10.92
5590	5590 (Pk)	Vertical	98.65	-	-
	5590 (Av)		80.03	-	-
	5460 (Pk)		44.93	74*	-29.07
	5460 (Av)		31.04	54*	-22.96
	11180 (Pk)		52.48	68.23	-15.75
	11180 (Av)		40.76	54	-13.24
	16770 (Pk)		55.43	68.23	-12.80
	16770 (Av)		43.88	54	-10.12
	5590 (Pk)	Horizontal	99.63	-	-
	5590 (Av)		81.60	-	-
	5460 (Pk)		44.41	74*	-29.59
	5460 (Av)		30.97	54*	-23.03
	11180 (Pk)		53.18	68.23	-15.05
	11180 (Av)		40.75	54	-13.25
	16770 (Pk)		56.03	68.23	-12.20
	16770 (Av)		43.88	54	-10.12

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 178 von 207

Page 178 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5670	5670 (Pk)	Vertical	98.31	-	-
	5670 (Av)		80.32	-	-
	5460 (Pk)		43.25	74*	-30.75
	5460 (Av)		30.17	54*	-23.83
	11340 (Pk)		52.82	68.23	-15.41
	11340 (Av)		41.22	54	-12.78
	17010 (Pk)		54.99	68.23	-13.24
	17010 (Av)		43.35	54	-10.65
	5670 (Pk)	Horizontal	98.88	-	-
	5670 (Av)		81.22	-	-
	5460 (Pk)		42.95	74*	-31.05
	5460 (Av)		30.22	54*	-23.78
	11340 (Pk)		52.55	68.23	-15.68
	11340 (Av)		41.18	54	-12.82
	17010 (Pk)		54.83	68.23	-13.40
	17010 (Av)		43.35	54	-10.65
5710	5710 (Pk)	Vertical	95.57	-	-
	5710 (Av)		77.47	-	-
	5460 (Pk)		43.14	74*	-30.86
	5460 (Av)		30.07	54*	-23.93
	11420 (Pk)		53.17	68.23	-15.06
	11420 (Av)		41.88	54	-12.12
	17130 (Pk)		54.99	68.23	-13.24
	17130 (Av)		43.42	54	-10.58
	5710 (Pk)	Horizontal	98.84	-	-
	5710 (Av)		81.00	-	-
	5460 (Pk)		43.23	74*	-30.77
	5460 (Av)		30.12	54*	-23.88
	11420 (Pk)		53.64	68.23	-14.59
	11420 (Av)		41.89	54	-12.11
	17130 (Pk)		55.83	68.23	-12.40
	17130 (Av)		43.41	54	-10.59
5755	5755 (Pk)	Vertical	99.06	-	-
	5755 (Av)		80.76	-	-
	5715(Pk)		61.61	78.20*	-16.59
	5725(Pk)		65.17	78.20*	-13.03
	11510 (Pk)		54.54	68.23	-13.69
	11510 (Av)		42.82	54	-11.18
	17265(Pk)		54.67	68.23	-13.56
	17265(Av)		43.48	54	-10.52
	5755 (Pk)	Horizontal	101.34	-	-
	5755 (Av)		83.50	-	-
	5715(Pk)		64.43	78.20*	-13.77
	5725(Pk)		67.07	78.20*	-11.13
	11510 (Pk)		55.05	68.23	-13.18
	11510 (Av)		42.68	54	-11.32
	17265(Pk)		55.36	68.23	-12.87
	17265(Av)		43.52	54	-10.48

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN23VER9 001

Seite 179 von 207
Page 179 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5795	5795 (Pk)	Vertical	99.01	-	-
	5795 (Av)		81.07	-	-
	5850 (Pk)		53.22	78.20*	-24.98
	5860 (Pk)		52.00	78.20*	-26.2
	11590 (Pk)		54.28	68.23	-13.95
	11590 (Av)		42.13	54	-11.87
	17385 (Pk)		56.39	68.23	-11.84
	17385 (Av)		43.86	54	-10.14
	5795 (Pk)	Horizontal	100.11	-	-
	5795 (Av)		82.42	-	-
	5850 (Pk)		54.73	78.20*	-23.47
	5860 (Pk)		53.60	78.20*	-24.6
	11590 (Pk)		54.23	68.23	-14
	11590 (Av)		42.12	54	-11.88
	17385 (Pk)		56.03	68.23	-12.2
	17385 (Pk)		43.89	54	-10.11

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 180 von 207

Page 180 of 207

Modulation: 802.11ax _ HE 40MHz

Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5190	5190 (Pk)	Vertical	98.42	-	-
	5190 (Av)		84.18	-	-
	5150 (Pk)		62.96	74*	-11.04
	5150 (Av)		45.27	54*	-8.73
	10380 (Pk)		51.36	68.23	-16.87
	10380 (Av)		39.73	54	-14.27
	15570 (Pk)		52.12	68.23	-16.11
	15570 (Av)		41.27	54	-12.73
	5190 (Pk)	Horizontal	100.25	-	-
	5190 (Av)		85.75	-	-
	5150 (Pk)		65.03	74*	-8.97
	5150 (Av)		47.30	54*	-6.70
	10380 (Pk)		51.63	68.23	-16.60
	10380 (Av)		39.75	54	-14.25
	15570 (Pk)		52.60	68.23	-15.63
	15570 (Av)		41.27	54	-12.73
5230	5230 (Pk)	Vertical	102.67	-	-
	5230 (Av)		88.13	-	-
	5350 (Pk)		56.39	74*	-17.61
	5350 (Av)		41.60	54*	-12.40
	10460 (Pk)		51.61	68.23	-16.62
	10460 (Av)		40.11	54	-13.89
	15690 (Pk)		52.72	68.23	-15.51
	15690 (Av)		40.95	54	-13.05
	5230 (Pk)	Horizontal	104.35	-	-
	5230 (Av)		89.87	-	-
	5350 (Pk)		56.69	74*	-17.31
	5350 (Av)		41.52	54*	-12.48
	10460 (Pk)		52.85	68.23	-15.38
	10460 (Av)		40.16	54	-13.84
	15690 (Pk)		53.24	68.23	-14.99
	15690 (Av)		41.00	54	-13.00
5270	5270 (Pk)	Vertical	104.09	-	-
	5270 (Av)		89.15	-	-
	5350 (Pk)		62.75	74*	-11.25
	5350 (Av)		47.23	54*	-6.77
	10540 (Pk)		52.99	68.23	-15.24
	10540 (Av)		40.30	54	-13.70
	15810 (Pk)		53.31	68.23	-14.92
	15810 (Av)		40.85	54	-13.15
	5270 (Pk)	Horizontal	105.84	-	-
	5270 (Av)		91.11	-	-
	5350 (Pk)		63.15	74*	-10.85
	5350 (Av)		48.54	54*	-5.46
	10540 (Pk)		53.30	68.23	-14.93
	10540 (Av)		40.29	54	-13.71
	15810 (Pk)		53.05	68.23	-15.18
	15810 (Av)		40.87	54	-13.13

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 181 von 207

Page 181 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5310	5310 (Pk)	Vertical	99.05	-	-
	5310 (Av)		85.42	-	-
	5350 (Pk)		61.24	74*	-12.76
	5350 (Av)		44.13	54*	-9.87
	10620 (Pk)		51.84	68.23	-16.39
	10620 (Av)		40.35	54	-13.65
	15930 (Pk)		53.25	68.23	-14.98
	15930 (Av)		41.26	54	-12.74
	5310 (Pk)	Horizontal	100.56	-	-
	5310 (Av)		86.19	-	-
	5350 (Pk)		64.12	74*	-9.88
	5350 (Av)		46.29	54*	-7.71
	10620 (Pk)		51.49	68.23	-16.74
	10620 (Av)		40.28	54	-13.72
	15930 (Pk)		52.09	68.23	-16.14
	15930 (Av)		41.28	54	-12.72
5510	5510 (Pk)	Vertical	97.56	-	-
	5510 (Av)		82.83	-	-
	5460 (Pk)		54.72	74*	-19.28
	5460 (Av)		36.29	54*	-17.71
	11020 (Pk)		52.87	68.23	-15.36
	11020 (Av)		41.03	54	-12.97
	16530 (Pk)		54.29	68.23	-13.94
	16530 (Av)		43.15	54	-10.85
	5510 (Pk)	Horizontal	98.48	-	-
	5510 (Av)		84.40	-	-
	5460 (Pk)		54.64	74*	-19.36
	5460 (Av)		36.91	54*	-17.09
	11020 (Pk)		53.39	68.23	-14.84
	11020 (Av)		41.02	54	-12.98
	16530 (Pk)		54.26	68.23	-13.97
	16530 (Av)		43.18	54	-10.82
5590	5590 (Pk)	Vertical	104.24	-	-
	5590 (Av)		89.91	-	-
	5460 (Pk)		57.88	74*	-16.12
	5460 (Av)		43.00	54*	-11.00
	11180 (Pk)		52.29	68.23	-15.94
	11180 (Av)		40.66	54	-13.34
	16770 (Pk)		55.29	68.23	-12.94
	16770 (Av)		43.85	54	-10.15
	5590 (Pk)	Horizontal	105.79	-	-
	5590 (Av)		91.68	-	-
	5460 (Pk)		57.18	74*	-16.82
	5460 (Av)		42.40	54*	-11.60
	11180 (Pk)		52.99	68.23	-15.24
	11180 (Av)		40.65	54	-13.35
	16770 (Pk)		55.70	68.23	-12.53
	16770 (Av)		43.91	54	-10.09

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 182 von 207

Page 182 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5670	5670 (Pk)	Vertical	100.80	-	-
	5670 (Av)		86.11	-	-
	5460 (Pk)		43.24	74*	-30.76
	5460 (Av)		30.84	54*	-23.16
	11340 (Pk)		54.16	68.23	-14.07
	11340 (Av)		41.26	54	-12.74
	17010 (Pk)		55.72	68.23	-12.51
	17010 (Av)		43.38	54	-10.62
	5670 (Pk)	Horizontal	101.31	-	-
	5670 (Av)		86.64	-	-
	5460 (Pk)		43.27	74*	-30.73
	5460 (Av)		30.80	54*	-23.20
	11340 (Pk)		52.99	68.23	-15.24
	11340 (Av)		41.23	54	-12.77
	17010 (Pk)		54.37	68.23	-13.86
	17010 (Av)		43.35	54	-10.65
5710	5710 (Pk)	Vertical	105.59	-	-
	5710 (Av)		90.99	-	-
	5460 (Pk)		44.57	74*	-29.43
	5460 (Av)		31.33	54*	-22.67
	11420 (Pk)		53.87	68.23	-14.36
	11420 (Av)		42.01	54	-11.99
	17130 (Pk)		55.56	68.23	-12.67
	17130 (Av)		43.42	54	-10.58
	5710 (Pk)	Horizontal	106.11	-	-
	5710 (Av)		91.73	-	-
	5460 (Pk)		44.96	74*	-29.04
	5460 (Av)		31.32	54*	-22.68
	11420 (Pk)		54.62	68.23	-13.61
	11420 (Av)		41.97	54	-12.03
	17130 (Pk)		55.10	68.23	-13.13
	17130 (Av)		43.41	54	-10.59
5755	5755 (Pk)	Vertical	101.11	-	-
	5755 (Av)		86.60	-	-
	5715(Pk)		66.44	78.20*	-11.76
	5725(Pk)		69.74	78.20*	-8.46
	11510 (Pk)		54.05	68.23	-14.18
	11510 (Av)		42.79	54	-11.21
	17265(Pk)		55.69	68.23	-12.54
	17265(Av)		43.52	54	-10.48
	5755 (Pk)	Horizontal	103.55	-	-
	5755 (Av)		89.12	-	-
	5715(Pk)		69.55	78.20*	-8.65
	5725(Pk)		72.67	78.20*	-5.53
	11510 (Pk)		53.94	68.23	-14.29
	11510 (Av)		42.77	54	-11.23
	17265(Pk)		54.97	68.23	-13.26
	17265(Av)		43.52	54	-10.48

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 183 von 207

Page 183 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5795	5795 (Pk)	Vertical	100.95	-	-
	5795 (Av)		86.48	-	-
	5850 (Pk)		55.97	78.20*	-22.23
	5860 (Pk)		53.27	78.20*	-24.93
	11590 (Pk)		53.66	68.23	-14.57
	11590 (Av)		42.23	54	-11.77
	17385 (Pk)		56.46	68.23	-11.77
	17385 (Av)		43.82	54	-10.18
	5795 (Pk)	Horizontal	102.51	-	-
	5795 (Av)		88.13	-	-
	5850 (Pk)		57.41	78.20*	-20.79
	5860 (Pk)		52.91	78.20*	-25.29
	11590 (Pk)		53.61	68.23	-14.62
	11590 (Av)		42.11	54	-11.89
	17385 (Pk)		55.60	68.23	-12.63
	17385 (Pk)		43.81	54	-10.19

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 184 von 207

Page 184 of 207

Modulation: 802.11ax _ HE 40MHz

Data rate: MCS11

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5190	5190 (Pk)	Vertical	97.68	-	-
	5190 (Av)		78.06	-	-
	5150 (Pk)		58.63	74*	-15.37
	5150 (Av)		39.55	54*	-14.45
	10380 (Pk)		51.18	68.23	-17.05
	10380 (Av)		39.77	54	-14.23
	15570 (Pk)		53.14	68.23	-15.09
	15570 (Av)		41.29	54	-12.71
	5190 (Pk)	Horizontal	99.42	-	-
	5190 (Av)		79.88	-	-
	5150 (Pk)		61.17	74*	-12.83
	5150 (Av)		41.03	54*	-12.97
	10380 (Pk)		51.17	68.23	-17.06
	10380 (Av)		39.77	54	-14.23
	15570 (Pk)		52.89	68.23	-15.34
	15570 (Av)		41.29	54	-12.71
5230	5230 (Pk)	Vertical	97.84	-	-
	5230 (Av)		78.34	-	-
	5350 (Pk)		46.16	74*	-27.84
	5350 (Av)		31.46	54*	-22.54
	10460 (Pk)		52.05	68.23	-16.18
	10460 (Av)		40.11	54	-13.89
	15690 (Pk)		52.55	68.23	-15.68
	15690 (Av)		40.93	54	-13.07
	5230 (Pk)	Horizontal	99.54	-	-
	5230 (Av)		80.15	-	-
	5350 (Pk)		45.40	74*	-28.60
	5350 (Av)		31.54	54*	-22.46
	10460 (Pk)		51.51	68.23	-16.72
	10460 (Av)		40.10	54	-13.90
	15690 (Pk)		52.20	68.23	-16.03
	15690 (Av)		41.01	54	-12.99
5270	5270 (Pk)	Vertical	97.19	-	-
	5270 (Av)		77.02	-	-
	5350 (Pk)		44.93	74*	-29.07
	5350 (Av)		31.28	54*	-22.72
	10540 (Pk)		52.39	68.23	-15.84
	10540 (Av)		40.22	54	-13.78
	15810 (Pk)		51.94	68.23	-16.29
	15810 (Av)		40.77	54	-13.23
	5270 (Pk)	Horizontal	97.73	-	-
	5270 (Av)		78.20	-	-
	5350 (Pk)		45.43	74*	-28.57
	5350 (Av)		31.57	54*	-22.43
	10540 (Pk)		52.14	68.23	-16.09
	10540 (Av)		40.24	54	-13.76
	15810 (Pk)		52.72	68.23	-15.51
	15810 (Av)		40.81	54	-13.19

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 185 von 207

Page 185 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5310	5310 (Pk)	Vertical	97.37	-	-
	5310 (Av)		77.22	-	-
	5350 (Pk)		54.47	74*	-19.53
	5350 (Av)		34.93	54*	-19.07
	10620 (Pk)		51.22	68.23	-17.01
	10620 (Av)		40.23	54	-13.77
	15930 (Pk)		53.19	68.23	-15.04
	15930 (Av)		41.24	54	-12.76
	5310 (Pk)	Horizontal	97.86	-	-
	5310 (Av)		78.32	-	-
	5350 (Pk)		57.01	74*	-16.99
	5350 (Av)		36.79	54*	-17.21
	10620 (Pk)		52.19	68.23	-16.04
	10620 (Av)		40.29	54	-13.71
	15930 (Pk)		53.23	68.23	-15.00
	15930 (Av)		41.25	54	-12.75
5510	5510 (Pk)	Vertical	96.54	-	-
	5510 (Av)		77.26	-	-
	5460 (Pk)		52.83	74*	-21.17
	5460 (Av)		33.39	54*	-20.61
	11020 (Pk)		52.87	68.23	-15.36
	11020 (Av)		40.98	54	-13.02
	16530 (Pk)		54.96	68.23	-13.27
	16530 (Av)		43.17	54	-10.83
	5510 (Pk)	Horizontal	97.96	-	-
	5510 (Av)		78.70	-	-
	5460 (Pk)		54.07	74*	-19.93
	5460 (Av)		34.61	54*	-19.39
	11020 (Pk)		52.58	68.23	-15.65
	11020 (Av)		41.00	54	-13.00
	16530 (Pk)		54.63	68.23	-13.60
	16530 (Av)		43.12	54	-10.88
5590	5590 (Pk)	Vertical	95.89	-	-
	5590 (Av)		75.71	-	-
	5460 (Pk)		43.02	74*	-30.98
	5460 (Av)		30.48	54*	-23.52
	11180 (Pk)		52.13	68.23	-16.10
	11180 (Av)		40.63	54	-13.37
	16770 (Pk)		54.80	68.23	-13.43
	16770 (Av)		43.82	54	-10.18
	5590 (Pk)	Horizontal	97.76	-	-
	5590 (Av)		78.53	-	-
	5460 (Pk)		43.42	74*	-30.58
	5460 (Av)		30.72	54*	-23.28
	11180 (Pk)		52.68	68.23	-15.55
	11180 (Av)		40.69	54	-13.31
	16770 (Pk)		55.45	68.23	-12.78
	16770 (Av)		43.84	54	-10.16

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 186 von 207

Page 186 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5670	5670 (Pk)	Vertical	96.99	-	-
	5670 (Av)		77.59	-	-
	5460 (Pk)		43.11	74*	-30.89
	5460 (Av)		30.39	54*	-23.61
	11340 (Pk)		53.73	68.23	-14.50
	11340 (Av)		41.23	54	-12.77
	17010 (Pk)		54.76	68.23	-13.47
	17010 (Av)		43.41	54	-10.59
	5670 (Pk)	Horizontal	97.85	-	-
	5670 (Av)		78.55	-	-
	5460 (Pk)		42.80	74*	-31.20
	5460 (Av)		30.45	54*	-23.55
	11340 (Pk)		53.71	68.23	-14.52
	11340 (Av)		41.20	54	-12.80
	17010 (Pk)		54.85	68.23	-13.38
	17010 (Av)		43.37	54	-10.63
5710	5710 (Pk)	Vertical	96.98	-	-
	5710 (Av)		77.23	-	-
	5460 (Pk)		42.95	74*	-31.05
	5460 (Av)		30.20	54*	-23.80
	11420 (Pk)		53.99	68.23	-14.24
	11420 (Av)		41.91	54	-12.09
	17130 (Pk)		55.25	68.23	-12.98
	17130 (Av)		43.47	54	-10.53
	5710 (Pk)	Horizontal	97.45	-	-
	5710 (Av)		78.60	-	-
	5460 (Pk)		43.46	74*	-30.54
	5460 (Av)		30.30	54*	-23.70
	11420 (Pk)		54.50	68.23	-13.73
	11420 (Av)		41.96	54	-12.04
	17130 (Pk)		56.14	68.23	-12.09
	17130 (Av)		43.46	54	-10.54
5755	5755 (Pk)	Vertical	97.38	-	-
	5755 (Av)		77.96	-	-
	5715(Pk)		57.57	78.20*	-20.63
	5725(Pk)		59.64	78.20*	-18.56
	11510 (Pk)		54.28	68.23	-13.95
	11510 (Av)		42.66	54	-11.34
	17265(Pk)		55.70	68.23	-12.53
	17265(Av)		43.53	54	-10.47
	5755 (Pk)	Horizontal	97.84	-	-
	5755 (Av)		78.26	-	-
	5715(Pk)		58.58	78.20*	-19.62
	5725(Pk)		59.91	78.20*	-18.29
	11510 (Pk)		53.66	68.23	-14.57
	11510 (Av)		42.72	54	-11.28
	17265(Pk)		55.26	68.23	-12.97
	17265(Av)		43.52	54	-10.48

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN23VER9 001

Seite 187 von 207
Page 187 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5795	5795 (Pk)	Vertical	97.17	-	-
	5795 (Av)		78.83	-	-
	5850 (Pk)		48.27	78.20*	-29.93
	5860 (Pk)		46.30	78.20*	-31.9
	11590 (Pk)		53.76	68.23	-14.47
	11590 (Av)		42.06	54	-11.94
	17385 (Pk)		55.19	68.23	-13.04
	17385 (Av)		43.84	54	-10.16
	5795 (Pk)	Horizontal	98.56	-	-
	5795 (Av)		78.94	-	-
	5850 (Pk)		49.31	78.20*	-28.89
	5860 (Pk)		46.53	78.20*	-31.67
	11590 (Pk)		54.49	68.23	-13.74
	11590 (Av)		42.09	54	-11.91
	17385 (Pk)		54.91	68.23	-13.32
	17385 (Pk)		43.84	54	-10.16

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 188 von 207

Page 188 of 207

Modulation: 802.11ac _ VHT 80MHz

Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5210	5210 (Pk)	Vertical	92.07	-	-
	5210 (Av)		77.61	-	-
	5150 (Pk)		61.54	74*	-12.46
	5150 (Av)		45.65	54*	-8.35
	10420 (Pk)		51.88	68.23	-16.35
	10420 (Av)		39.50	54	-14.50
	15630 (Pk)		53.44	68.23	-14.79
	15630 (Av)		40.96	54	-13.04
	5210 (Pk)	Horizontal	93.19	-	-
	5210 (Av)		78.06	-	-
	5150 (Pk)		65.73	74*	-8.27
	5150 (Av)		50.02	54*	-3.98
	10420 (Pk)		53.15	68.23	-15.08
	10420 (Av)		39.23	54	-14.77
	15630 (Pk)		53.24	68.23	-14.99
	15630 (Av)		40.93	54	-13.07
5290	5290 (Pk)	Vertical	91.74	-	-
	5290 (Av)		77.59	-	-
	5350 (Pk)		58.57	74*	-15.43
	5350 (Av)		41.13	54*	-12.87
	10580 (Pk)		51.86	68.23	-16.37
	10580 (Av)		39.75	54	-14.25
	15870 (Pk)		53.27	68.23	-14.96
	15870 (Av)		40.82	54	-13.18
	5290 (Pk)	Horizontal	92.81	-	-
	5290 (Av)		78.14	-	-
	5350 (Pk)		59.21	74*	-14.79
	5350 (Av)		41.63	54*	-12.37
	10580 (Pk)		51.64	68.23	-16.59
	10580 (Av)		39.77	54	-14.23
	15870 (Pk)		52.44	68.23	-15.79
	15870 (Av)		40.87	54	-13.13
5530	5530 (Pk)	Vertical	91.91	-	-
	5530 (Av)		76.78	-	-
	5460 (Pk)		51.69	74*	-22.31
	5460 (Av)		36.13	54*	-17.87
	11060 (Pk)		52.52	68.23	-15.71
	11060 (Av)		40.46	54	-13.54
	16590 (Pk)		54.76	68.23	-13.47
	16590 (Av)		43.19	54	-10.81
	5530 (Pk)	Horizontal	89.74	-	-
	5530 (Av)		73.81	-	-
	5460 (Pk)		48.85	74*	-25.15
	5460 (Av)		33.49	54*	-20.51
	11060 (Pk)		51.84	68.23	-16.39
	11060 (Av)		40.44	54	-13.56
	16590 (Pk)		55.44	68.23	-12.79
	16590 (Av)		43.22	54	-10.78

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:
Test Report No.:

IN23VER9 001

Seite 189 von 207
Page 189 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5690	5690 (Pk)	Vertical	95.76	-	-
	5690 (Av)		80.40	-	-
	5460 (Pk)		51.10	74*	-22.90
	5460 (Av)		34.98	54*	-19.02
	11380 (Pk)		52.66	68.23	-15.57
	11380 (Av)		41.18	54	-12.82
	17070 (Pk)		55.09	68.23	-13.14
	17070 (Av)		43.84	54	-10.16
	5690 (Pk)	Horizontal	93.61	-	-
	5690 (Av)		76.80	-	-
	5460 (Pk)		48.73	74*	-25.27
	5460 (Av)		33.13	54*	-20.87
	11380 (Pk)		53.19	68.23	-15.04
	11380 (Av)		41.16	54	-12.84
	17070 (Pk)		56.03	68.23	-12.20
	17070 (Av)		43.83	54	-10.17
5775	5775 (Pk)	Vertical	95.10	-	-
	5775 (Av)		80.00	-	-
	11550 (Pk)		54.24	68.23	-13.99
	11550 (Av)		42.03	54	-11.97
	17325 (Pk)		57.25	68.23	-10.98
	17325 (Av)		44.79	54	-9.21
	5775 (Pk)	Horizontal	93.62	-	-
	5775 (Av)		77.18	-	-
	11550 (Pk)		53.62	68.23	-14.61
	11550 (Av)		41.99	54	-12.01
	17325 (Pk)		56.40	68.23	-11.83
	17325 (Av)		44.75	54	-9.25

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 190 von 207

Page 190 of 207

Modulation: 802.11ac _ VHT 80MHz

Data rate: MCS9

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
5210	5210 (Pk)	Vertical	90.73	-	-
	5210 (Av)		71.04	-	-
	5150 (Pk)		51.81	74*	-22.19
	5150 (Av)		34.58	54*	-19.42
	10420 (Pk)		50.94	68.23	-17.29
	10420 (Av)		39.08	54	-14.92
	15630 (Pk)		52.89	68.23	-15.34
	15630 (Av)		40.96	54	-13.04
	5210 (Pk)	Horizontal	94.67	-	-
	5210 (Av)		73.46	-	-
	5150 (Pk)		54.35	74*	-19.65
	5150 (Av)		36.9	54*	-17.10
	10420 (Pk)		51.52	68.23	-16.71
	10420 (Av)		39.16	54	-14.84
	15630 (Pk)		52.59	68.23	-15.64
	15630 (Av)		41.02	54	-12.98
5290	5290 (Pk)	Vertical	90.04	-	-
	5290 (Av)		69.48	-	-
	5350 (Pk)		51.51	74*	-22.49
	5350 (Av)		33.31	54*	-20.69
	10580 (Pk)		51.7	68.23	-16.53
	10580 (Av)		39.68	54	-14.32
	15870 (Pk)		52.86	68.23	-15.37
	15870 (Av)		40.76	54	-13.24
	5290 (Pk)	Horizontal	92.79	-	-
	5290 (Av)		71.71	-	-
	5350 (Pk)		52.25	74*	-21.75
	5350 (Av)		34.86	54*	-19.14
	10580 (Pk)		51.26	68.23	-16.97
	10580 (Av)		39.63	54	-14.37
	15870 (Pk)		52.45	68.23	-15.78
	15870 (Av)		40.71	54	-13.29
5530	5530 (Pk)	Vertical	92.07	-	-
	5530 (Av)		71.91	-	-
	5460 (Pk)		49.55	74*	-24.45
	5460 (Av)		32.91	54*	-21.09
	11060 (Pk)		51.83	68.23	-16.40
	11060 (Av)		40.43	54	-13.57
	16590 (Pk)		54.6	68.23	-13.63
	16590 (Av)		43.19	54	-10.81
	5530 (Pk)	Horizontal	92.39	-	-
	5530 (Av)		72.96	-	-
	5460 (Pk)		49.50	74*	-24.50
	5460 (Av)		33.20	54*	-20.80
	11060 (Pk)		52.57	68.23	-15.66
	11060 (Av)		40.40	54	-13.60
	16590 (Pk)		55.06	68.23	-13.17
	16590 (Av)		43.18	54	-10.82

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 191 von 207

Page 191 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5690	5690 (Pk)	Vertical	91.09	-	-
	5690 (Av)		72.01	-	-
	5460 (Pk)		42.98	74*	-31.02
	5460 (Av)		30.79	54*	-23.21
	11380 (Pk)		53.80	68.23	-14.43
	11380 (Av)		41.11	54	-12.89
	17070 (Pk)		56.75	68.23	-11.48
	17070 (Av)		43.82	54	-10.18
	5690 (Pk)	Horizontal	92.50	-	-
	5690 (Av)		72.38	-	-
	5460 (Pk)		43.15	74*	-30.85
	5460 (Av)		30.62	54*	-23.38
	11380 (Pk)		54.21	68.23	-14.02
	11380 (Av)		41.21	54	-12.79
	17070 (Pk)		56.45	68.23	-11.78
	17070 (Av)		43.92	54	-10.08
5775	5775 (Pk)	Vertical	92.29	-	-
	5775 (Av)		72.15	-	-
	11550 (Pk)		53.86	68.23	-14.37
	11550 (Av)		42.05	54	-11.95
	17325 (Pk)		56.29	68.23	-11.94
	17325 (Av)		44.76	54	-9.24
	5775 (Pk)	Horizontal	89.57	-	-
	5775 (Av)		69.51	-	-
	11550 (Pk)		54.31	68.23	-13.92
	11550 (Av)		42.03	54	-11.97
	17325 (Pk)		56.12	68.23	-12.11
	17325 (Av)		44.82	54	-9.18

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av : Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 192 von 207

Page 192 of 207

Modulation: 802.11ax _ HE 80MHz

Data rate: MCS0

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5210	5210 (Pk)	Vertical	96.18	-	-
	5210 (Av)		80.50	-	-
	5150 (Pk)		62.78	74*	-11.22
	5150 (Av)		43.08	54*	-10.92
	10420 (Pk)		51.02	68.23	-17.21
	10420 (Av)		39.15	54	-14.85
	15630 (Pk)		52.66	68.23	-15.57
	15630 (Av)		40.95	54	-13.05
	5210 (Pk)	Horizontal	98.66	-	-
	5210 (Av)		82.88	-	-
	5150 (Pk)		64.74	74*	-9.26
	5150 (Av)		45.41	54*	-8.59
	10420 (Pk)		50.79	68.23	-17.44
	10420 (Av)		39.11	54	-14.89
	15630 (Pk)		52.00	68.23	-16.23
	15630 (Av)		40.99	54	-13.01
5290	5290 (Pk)	Vertical	92.31	-	-
	5290 (Av)		75.43	-	-
	5350 (Pk)		59.85	74*	-14.15
	5350 (Av)		42.20	54*	-11.80
	10580 (Pk)		51.64	68.23	-16.59
	10580 (Av)		39.67	54	-14.33
	15870 (Pk)		53.30	68.23	-14.93
	15870 (Av)		40.75	54	-13.25
	5290 (Pk)	Horizontal	99.80	-	-
	5290 (Av)		83.71	-	-
	5350 (Pk)		63.66	74*	-10.34
	5350 (Av)		45.87	54*	-8.13
	10580 (Pk)		52.45	68.23	-15.78
	10580 (Av)		39.75	54	-14.25
	15870 (Pk)		52.45	68.23	-15.78
	15870 (Av)		40.75	54	-13.25
5530	5530 (Pk)	Vertical	96.17	-	-
	5530 (Av)		80.01	-	-
	5460 (Pk)		53.89	74*	-20.11
	5460 (Av)		37.49	54*	-16.51
	11060 (Pk)		52.17	68.23	-16.06
	11060 (Av)		40.42	54	-13.58
	16590 (Pk)		54.57	68.23	-13.66
	16590 (Av)		43.10	54	-10.90
	5530 (Pk)	Horizontal	98.47	-	-
	5530 (Av)		82.59	-	-
	5460 (Pk)		55.12	74*	-18.88
	5460 (Av)		37.37	54*	-16.63
	11060 (Pk)		51.83	68.23	-16.40
	11060 (Av)		40.45	54	-13.55
	16590 (Pk)		54.76	68.23	-13.47
	16590 (Av)		43.10	54	-10.90

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 193 von 207

Page 193 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5690	5690 (Pk)	Vertical	97.01	-	-
	5690 (Av)		81.74	-	-
	5460 (Pk)		47.73	74*	-26.27
	5460 (Av)		33.46	54*	-20.54
	11380 (Pk)		52.14	68.23	-16.09
	11380 (Av)		41.12	54	-12.88
	17070 (Pk)		55.55	68.23	-12.68
	17070 (Av)		43.89	54	-10.11
	5690 (Pk)	Horizontal	100.82	-	-
	5690 (Av)		84.80	-	-
	5460 (Pk)		51.54	74*	-22.46
	5460 (Av)		36.01	54*	-17.99
	11380 (Pk)		53.39	68.23	-14.84
	11380 (Av)		41.13	54	-12.87
	17070 (Pk)		55.23	68.23	-13.00
	17070 (Av)		43.90	54	-10.10
5775	5775 (Pk)	Vertical	99.86	-	-
	5775 (Av)		83.59	-	-
	11550 (Pk)		52.95	68.23	-15.28
	11550 (Av)		42.04	54	-11.96
	17325 (Pk)		56.14	68.23	-12.09
	17325 (Av)		44.76	54	-9.24
	5775 (Pk)	Horizontal	100.55	-	-
	5775 (Av)		84.64	-	-
	11550 (Pk)		54.01	68.23	-14.22
	11550 (Av)		42.03	54	-11.97
	17325 (Pk)		56.60	68.23	-11.63
	17325 (Av)		44.73	54	-9.27

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 194 von 207

Page 194 of 207

Modulation: 802.11ax _ HE 80MHz

Data rate: MCS11

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5210	5210 (Pk)	Vertical	90.00	-	-
	5210 (Av)		69.64	-	-
	5150 (Pk)		47.61	74*	-26.39
	5150 (Av)		32.02	54*	-21.98
	10420 (Pk)		50.93	68.23	-17.30
	10420 (Av)		39.15	54	-14.85
	15630 (Pk)		53.47	68.23	-14.76
	15630 (Av)		40.98	54	-13.02
	5210 (Pk)	Horizontal	91.46	-	-
	5210 (Av)		71.89	-	-
	5150 (Pk)		48.25	74*	-25.75
	5150 (Av)		32.62	54*	-21.38
	10420 (Pk)		50.61	68.23	-17.62
	10420 (Av)		39.10	54	-14.90
	15630 (Pk)		52.73	68.23	-15.50
	15630 (Av)		41.00	54	-13.00
5290	5290 (Pk)	Vertical	89.56	-	-
	5290 (Av)		69.77	-	-
	5350 (Pk)		49.16	74*	-24.84
	5350 (Av)		31.81	54*	-22.19
	10580 (Pk)		51.96	68.23	-16.27
	10580 (Av)		39.70	54	-14.30
	15870 (Pk)		53.90	68.23	-14.33
	15870 (Av)		40.74	54	-13.26
	5290 (Pk)	Horizontal	91.28	-	-
	5290 (Av)		72.71	-	-
	5350 (Pk)		50.11	74*	-23.89
	5350 (Av)		32.94	54*	-21.06
	10580 (Pk)		52.04	68.23	-16.19
	10580 (Av)		39.69	54	-14.31
	15870 (Pk)		52.98	68.23	-15.25
	15870 (Av)		40.74	54	-13.26
5530	5530 (Pk)	Vertical	92.55	-	-
	5530 (Av)		72.22	-	-
	5460 (Pk)		47.49	74*	-26.51
	5460 (Av)		31.61	54*	-22.39
	11060 (Pk)		52.68	68.23	-15.55
	11060 (Av)		40.46	54	-13.54
	16590 (Pk)		55.77	68.23	-12.46
	16590 (Av)		43.19	54	-10.81
	5530 (Pk)	Horizontal	93.07	-	-
	5530 (Av)		73.19	-	-
	5460 (Pk)		47.12	74*	-26.88
	5460 (Av)		31.90	54*	-22.10
	11060 (Pk)		52.05	68.23	-16.18
	11060 (Av)		40.39	54	-13.61
	16590 (Pk)		54.59	68.23	-13.64
	16590 (Av)		43.16	54	-10.84

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 195 von 207

Page 195 of 207

Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
5690	5690 (Pk)	Vertical	92.00	-	-
	5690 (Av)		72.09	-	-
	5460 (Pk)		43.65	74*	-30.35
	5460 (Av)		30.45	54*	-23.55
	11380 (Pk)		52.73	68.23	-15.50
	11380 (Av)		41.17	54	-12.83
	17070 (Pk)		55.24	68.23	-12.99
	17070 (Av)		43.88	54	-10.12
	5690 (Pk)	Horizontal	92.65	-	-
	5690 (Av)		73.01	-	-
	5460 (Pk)		43.56	74*	-30.44
	5460 (Av)		30.76	54*	-23.24
	11380 (Pk)		53.37	68.23	-14.86
	11380 (Av)		41.20	54	-12.80
	17070 (Pk)		55.91	68.23	-12.32
	17070 (Av)		43.85	54	-10.15
5775	5775 (Pk)	Vertical	90.96	-	-
	5775 (Av)		70.37	-	-
	11550 (Pk)		54.58	68.23	-13.65
	11550 (Av)		42.04	54	-11.96
	17325 (Pk)		56.91	68.23	-11.32
	17325 (Av)		44.76	54	-9.24
	5775 (Pk)	Horizontal	91.36	-	-
	5775 (Av)		71.08	-	-
	11550 (Pk)		54.60	68.23	-13.63
	11550 (Av)		42.05	54	-11.95
	17325 (Pk)		56.75	68.23	-11.48
	17325 (Av)		44.72	54	-9.28

Note:

* :- Indicate restricted band frequency in 15.205

Pk: Peak Detector; Av: Average Detector

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 196 von 207

Page 196 of 207

Simultaneous operation:

Combination of Wi-Fi 5GHz and Bluetooth 2.4GHz:

Data Rate (Mbps)	Channel Frequency (MHz)	Measured Frequency (MHz)	Antenna Polarization	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1	2480	4960(Pk)	Vertical	37.82	68.23	-30.41
		4960(Av)		25.73	54	-28.27
		7440(Pk)		49.51	68.23	-18.72
		7440(Av)		36.67	54	-17.33
6	5180	10360(Pk)		50.97	68.23	-17.26
		10360(Av)		38.73	54	-15.27
		15540(Pk)		52.82	68.23	-15.41
		15540(Av)		40.74	54	-13.26
1	2480	4960(Pk)	Horizontal	38.04	68.23	-30.19
		4960(Av)		25.77	54	-28.23
		7440(Pk)		47.29	68.23	-20.94
		7440(Av)		34.31	54	-19.69
6	5180	10360(Pk)		51.63	68.23	-16.60
		10360(Av)		38.78	54	-15.22
		15540(Pk)		53.08	68.23	-15.15
		15540(Av)		40.89	54	-13.11

8 Frequency Stability

Result

Pass

Test Specification

FCC part 15 Subpart C 15.407 (g) / RSS Gen Issue 5, Section 8.11

Test Method

Subclause 6.8.1 of ANSI C63.10


Port of testing

Antenna port

Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual

Test Method:

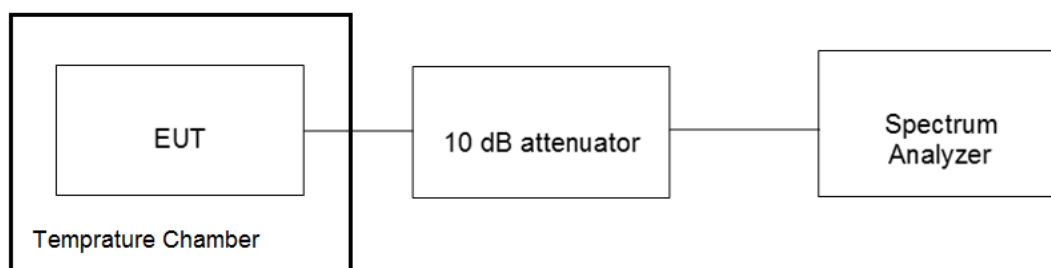

Test Condition:

Normal Test Condition:

Temperature (Norm) = + 25 °C

Voltage = 3.3 V DC through AC to Dc adaptor

Relative humidity: 62%

KDB Guidelines applied:

Measurements were made as per section 3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 198 von 207

Page 198 of 207

Test results:

Channel Bandwidth (MHz)	Channel Frequency (MHz)	Temperature (°C)	Frequency deviation for different time interval (MHz)				Limit
			0Min	2Min	5Min	10Min	
20	5180	-20	-1.53	-1.08	-1.08	-1.08	Emission drift measured are maintained within the authorised band
		25	-0.06	0.30	0.06	0.33	
		60	-2.67	0.06	0.06	0.06	
	5240	-20	1.62	-2.37	-2.37	-2.37	
		25	-0.06	-0.87	-0.15	0.27	
		60	-0.45	0.12	0.09	0.09	
	5260	-20	-1.59	-1.08	-1.08	-1.08	
		25	-0.12	-2.10	-2.67	0.12	
		60	2.37	-0.15	-0.03	-0.03	
	5320	-20	-1.14	-2.37	-2.37	-2.37	
		25	0.24	0.18	0.36	0.21	
		60	0.33	-0.03	-0.03	-0.03	
	5500	-20	1.44	0.70	0.70	0.70	
		25	0.18	0.03	0.06	-0.18	
		60	-0.48	0.09	0.00	0.00	
	5700	-20	-1.17	-1.08	-1.08	-1.08	
		25	0.33	-0.03	0.12	-0.21	
		60	0.45	-0.09	-0.09	-0.06	
	5720	-20	0.54	-1.14	-1.14	-2.37	
		25	-0.18	0.18	0.06	0.18	
		60	-1.77	0.03	0.03	0.03	
	5745	-20	0.66	-2.37	-1.14	-1.14	
		25	0.74	0.33	-0.12	0.18	
		60	-1.41	2.34	-0.27	-0.15	
	5825	-20	-0.87	-1.56	1.56	-1.11	
		25	-0.09	0.33	0.27	0.84	
		60	-1.38	0.18	-0.03	-0.03	

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 199 von 207

Page 199 of 207

Channel Bandwidth (MHz)	Channel Frequency (MHz)	Temperature (°C)	Frequency deviation for different time interval (MHz)			Temperature (°C)	Limit
			0Min	2Min	5Min	10Min	
40	5190	-20	4.48	-9.60	-9.66	-9.66	Emission drift measured are maintained within the authorised band
		25	-9.78	-9.60	-9.90	-9.66	
		60	-15.00	-9.84	-9.78	-9.72	
	5230	-20	-5.64	-9.66	-9.78	-9.78	
		25	-15.90	-10.02	-10.02	-15.84	
		60	-16.02	-9.90	-9.78	-9.78	
	5270	-20	3.36	3.54	3.42	3.42	
		25	4.74	3.48	4.56	4.44	
		60	7.98	13.68	13.68	13.68	
	5310	-20	-6.36	-9.72	-9.84	-9.78	
		25	-9.72	-9.96	-9.72	-10.02	
		60	4.62	-9.84	-9.84	-9.84	
	5510	-20	-16.14	-9.96	-9.72	-9.78	
		25	-9.84	-9.48	-9.72	-9.60	
		60	-15.00	-9.84	-9.84	-9.84	
	5590	-20	2.94	-9.84	-9.84	-9.84	
		25	-9.84	-9.60	-9.60	-9.84	
		60	-6.18	-9.84	-9.84	-9.84	
	5670	-20	4.44	-9.78	-9.72	-9.72	
		25	-6.30	-9.54	-9.78	-10.00	
		60	4.80	-9.90	-9.90	-9.90	
	5710	-20	-16.08	-15.78	-15.78	-9.84	
		25	-15.90	-15.84	-15.72	-15.48	
		60	-7.56	-9.78	-9.84	-9.84	
	5755	-20	4.80	13.98	13.86	13.74	
		25	4.80	4.62	6.12	6.67	
		60	10.56	7.26	7.26	7.26	
	5795	-20	4.50	-9.96	-9.84	-9.72	
		25	2.70	3.36	3.66	3.48	
		60	6.18	-9.78	-9.78	-9.90	
80	5210	-20	-12.10	15.80	15.80	15.80	
		25	2.00	8.00	15.70	6.10	
		60	12.60	15.60	15.70	15.80	
	5290	-20	30.20	30.20	15.90	15.90	
		25	19.10	24.80	30.30	29.90	
		60	5.90	15.70	15.90	15.90	
	5530	-20	-11.50	-12.00	-12.00	-12.00	
		25	-6.30	-8.90	-8.70	-6.20	
		60	-11.10	-2.70	-6.60	-11.00	
	5690	-20	-32.60	-30.40	-30.40	-30.40	
		25	8.00	6.00	8.20	7.80	
		60	-16.20	-31.00	-12.10	-12.10	
	5775	-20	-18.50	-30.60	-14.50	-11.90	
		25	-30.20	-30.50	-30.60	-30.20	
		60	-29.90	-14.60	-14.60	-14.60	

9 Conducted Spurious Emission test on AC Power Line

Result

Pass

Test Specification : FCC Part 15 Section 15.207 / RSS Gen Issue 5 Section 8.8

Test Method : ANSI C 63.10-2013

Testing Location : Screened room

Measurement Bandwidth : 9kHz

Frequency Range : 150kHz – 30MHz

Supply Voltage : 110VAC,60Hz

Test Method : Refer TEST METHODOLOGY

***Note: The product has tested with AC to DC adapter and Wireless Qi charger**

Limits of section 15.207

Frequency of emission (MHz)	QP Limit (dBμV)	AV Limit (dBμV/m)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency


Test Conditions:

Normal Temperature = +24°C Voltage (V norm) = 110V AC (Through AC to DC Adapter)

RH = 64 %

Test result:

Power: 110V 60HZ_LINE

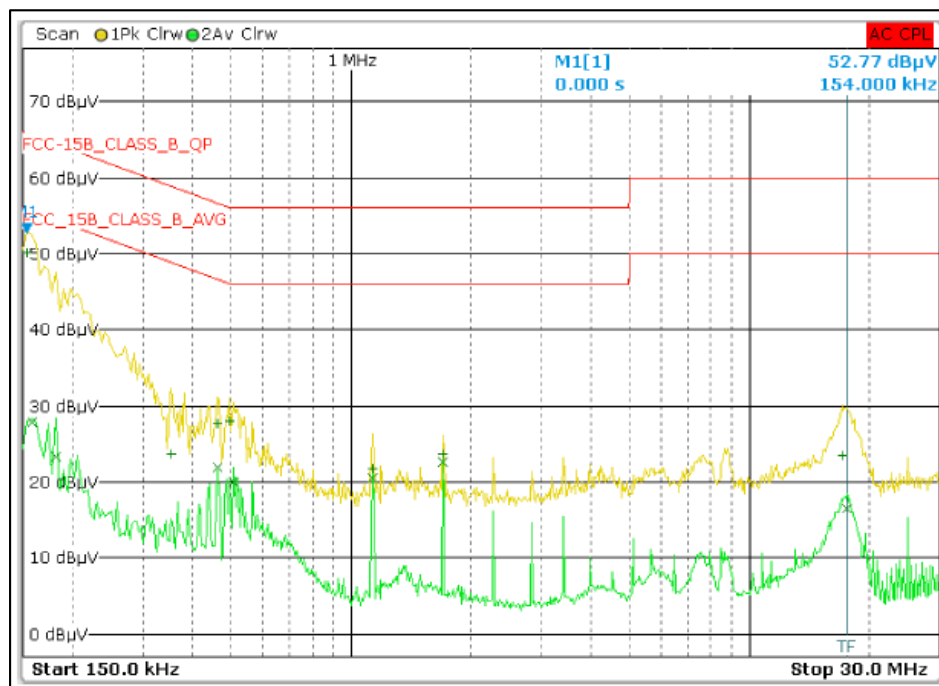


Line Graph

Trace	Frequency	Level (dBμV)	Phase	Detector	Delta Limit/dB
1	154.00000000 kHz	50.20		Quasi Peak	-15.58
2	1.70200000 MHz	22.70		Average	-23.30
2	462.00000000 kHz	21.96		Average	-24.70
2	1.13400000 MHz	20.59		Average	-25.41
2	506.00000000 kHz	19.96		Average	-26.04
2	158.00000000 kHz	27.82		Average	-27.75
1	494.00000000 kHz	27.97		Quasi Peak	-28.13
1	462.00000000 kHz	27.73		Quasi Peak	-28.93
2	182.00000000 kHz	23.32		Average	-31.07
1	1.70200000 MHz	23.69		Quasi Peak	-32.31
2	17.55800000 MHz	16.60		Average	-33.40
1	1.13400000 MHz	21.83		Quasi Peak	-34.17
1	354.00000000 kHz	23.74		Quasi Peak	-35.13
1	17.20600000 MHz	23.44		Quasi Peak	-36.56

Line Table

Power: 110V60HZ_NEUTRAL

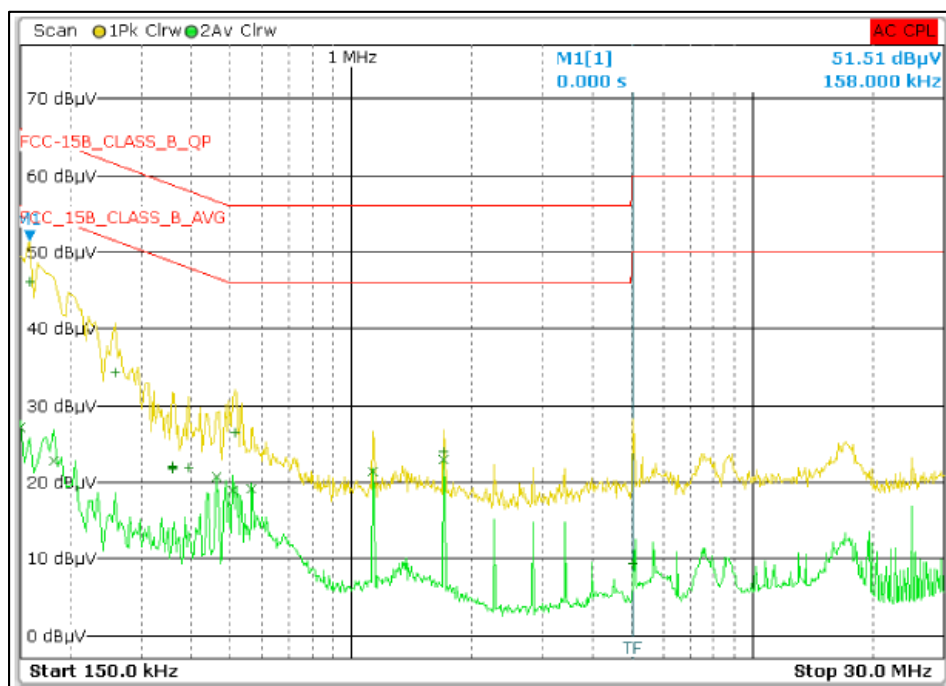

Neutral Graph

Trace	Frequency	Level (dBμV)	Phase	Detector	Delta Limit/dB
1	158.00000000 kHz	46.23		Quasi Peak	-19.34
2	1.702000000 MHz	23.02		Average	-22.98
2	1.134000000 MHz	21.40		Average	-24.60
2	462.00000000 kHz	20.64		Average	-26.02
2	566.00000000 kHz	19.17		Average	-26.83
2	506.00000000 kHz	18.92		Average	-27.08
1	258.00000000 kHz	34.31		Quasi Peak	-27.19
2	150.00000000 kHz	27.21		Average	-28.79
1	514.00000000 kHz	26.41		Quasi Peak	-29.59
2	182.00000000 kHz	22.79		Average	-31.60
1	1.702000000 MHz	24.01		Quasi Peak	-31.99
1	394.00000000 kHz	21.96		Quasi Peak	-36.02
1	394.00000000 kHz	21.90		Quasi Peak	-36.08
1	358.00000000 kHz	22.14		Quasi Peak	-36.63
1	358.00000000 kHz	21.94		Quasi Peak	-36.83
1	358.00000000 kHz	21.68		Quasi Peak	-37.09
1	5.034000000 MHz	9.29		Quasi Peak	-50.71

Neutral Table

10 LIST OF TABLES

Table 1: List of test and measurement instruments.....	6
Table 2: Instrument application Software versions.....	6
Table 3: Ratings and System Details as declared by the Client*	7
Table 4: Measurement Uncertainty	8
Table 5: List of Wi-Fi center Frequencies	10
Table 6: Undesirable emission limits	79
Table 7: Transmitter limits for Radiated emission	80

11 LIST OF Figures

Figure 1: Frequency Range 9 kHz- 30 MHz.....	14
Figure 2: Frequency Range 30 MHz – 200 MHz.....	14
Figure 3: Frequency Range 200 MHz - 1GHz	15
Figure 4: Frequency Range above 1 GHz	15

12 Power level used for testing

Antenna Type: 1001932PT (Flex/PCB Antenna) U.FL Ports

6Mbps		HT20_MCS0		HT40_MCS0	
5180	10	5180	11	5190	10
5240	17	5240	17	5230	13
5260	17	5260	17	5270	16
5320	12	5320	12	5310	13
5500	11	5500	11	5510	10
5700	11	5700	10	5590	17
5720	18	5720	17	5670	12
5745	12	5745	16	5710	17
5825	18	5825	17	5755	13
54Mbps		HT20_MCS7		HT40_MCS7	
5180	12	5180	11	5190	10
5240	16	5240	15	5230	14
5260	16	5260	15	5270	14
5320	12	5320	12	5310	13
5500	11	5500	11	5510	10
5700	11	5700	10	5590	14
5720	16	5720	15	5670	12
5745	15	5745	15	5710	14
5825	16	5825	14	5755	14
VHT20_MCS0		HE20_MCS0		VHT40_MCS0	
5180	11	5180	11	5190	10
5240	17	5240	17	5230	14
5260	17	5260	17	5270	16
5320	11	5320	12	5310	13
5500	11	5500	11	5510	10
5700	10	5700	10	5590	16
5720	18	5720	17	5670	12
5745	12	5745	12	5710	16
5825	12	5825	13	5755	14
VHT20_MCS9		HE20_MCS11		VHT40_MCS9	
5180	11	5180	10	5190	10
5240	13	5240	10	5230	13
5260	13	5260	10	5270	13
5320	12	5320	10	5310	13
5500	11	5500	10	5510	10
5700	10	5700	10	5590	13
5720	13	5720	10	5670	12
5745	13	5745	10	5710	13
5825	13	5825	10	5755	13
				5795	13

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 205 von 207

Page 205 of 207

HE40_MCS0	
5190	10
5230	14
5270	16
5310	12
5510	10
5590	17
5670	12
5710	17
5755	13
5795	13
HE40_MCS11	
5190	10
5230	10
5270	10
5310	10
5510	10
5590	10
5670	10
5710	10
5755	10
5795	10
VHT80_MCS0	
5210	13
5290	14
5530	11
5690	16
5775	16
VHT40_MCS9	
5210	12
5290	12
5530	11
5690	12
5775	12
HE80_MCS0	
5190	13
5230	14
5270	11
5310	16
5510	16
HE80_MCS11	
5210	9
5290	9
5530	9
5690	9
5775	9

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 206 von 207

Page 206 of 207

Antenna Type: FPA3020 - 10 (Flex/PCB Antenna) U.FL Ports

6Mbps		HT20_MCS0		HT40_MCS0	
5180	12	5180	10	5190	10
5240	17	5240	17	5230	13
5260	17	5260	17	5270	16
5320	12	5320	12	5310	13
5500	11	5500	11	5510	10
5700	11	5700	12	5590	17
5720	18	5720	12	5670	12
5745	16	5745	12	5710	17
5825	16	5825	12	5755	13
54Mbps		HT20_MCS7		HT40_MCS7	
5180	12	5180	10	5190	10
5240	12	5240	17	5230	14
5260	12	5260	17	5270	14
5320	12	5320	12	5310	13
5500	11	5500	11	5510	10
5700	12	5700	12	5590	14
5720	16	5720	12	5670	12
5745	12	5745	12	5710	14
5825	16	5825	12	5755	14
5825	16	5825	12	5795	14
VHT20_MCS0		HE20_MCS0		VHT40_MCS0	
5180	12	5180	12	5190	10
5240	12	5240	12	5230	14
5260	12	5260	12	5270	14
5320	12	5320	12	5310	13
5500	12	5500	12	5510	10
5700	12	5700	12	5590	16
5720	12	5720	12	5670	12
5745	14	5745	15	5710	16
5825	12	5825	12	5755	14
5825	12	5825	12	5795	14
VHT20_MCS9		HE20_MCS11		VHT40_MCS9	
5180	12	5180	12	5190	10
5240	12	5240	12	5230	13
5260	12	5260	12	5270	13
5320	12	5320	12	5310	13
5500	12	5500	12	5510	10
5700	12	5700	12	5590	13
5720	12	5720	12	5670	12
5745	12	5745	12	5710	13
5825	12	5825	12	5755	13
5825	12	5825	12	5795	13

Prüfbericht - Nr.:

Test Report No.:

IN23VER9 001

Seite 207 von 207

Page 207 of 207

HE40_MCS0	
5190	10
5230	14
5270	16
5310	12
5510	10
5590	17
5670	12
5710	17
5755	13
5795	13
HE40_MCS11	
5190	10
5230	10
5270	10
5310	10
5510	10
5590	10
5670	10
5710	10
5755	10
5795	10
VHT80_MCS0	
5210	13
5290	14
5530	11
5690	16
5775	16
VHT40_MCS9	
5210	12
5290	12
5530	11
5690	12
5775	12
HE80_MCS0	
5190	13
5230	14
5270	11
5310	16
5510	16
HE80_MCS11	
5210	9
5290	9
5530	9
5690	9
5775	9

*****END OF TEST REPORT*****