LABEL

FCC ID: 2ADAT-T40S10TOS11
IC: 12438A-T40S10TOS11

Position

FCC/IC Label

$$1\,pt = \frac{1}{72} \cdot 25{,}4\,mm$$

Schriftgröße/n - Font size/s

FCC ID bzw. CI Code   min. 8 Punkte [*pt] = ~2,8 mm

Stellungnahme - Statement Text   min. 5 Punkte [*pt] = ~1,8 mm

*DTO-Punkte / 1 pt = 0,35^{27} mm

Model: T40S10
FCC ID: 2ADAT-T40S10TOS11
IC: 12438A-T40S10TOS11
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

} 8 pt

} 5 pt

Abmessungen – Dimension [mm]

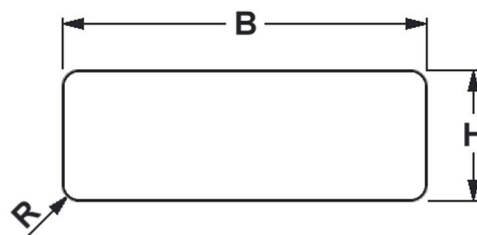|		
B	=	50,0 $^{+2}$
H	=	21,0 $^{+2}$
R	=	1,0 $^{\pm0,2}$

Material: self-adhesive polyester security film, 60 µm

Color: silver, matt coated
Adhesive: Permanent adhesive
Temperature range: -40 ° C to +150 ° C
Characteristics: weather resistant,
                   sea water,
                   resistant to many solvents,
                   weak acids and alkalis

Labels for Model

T40S10, T40S11

Model: T40S10
FCC ID: 2ADAT-T40S10TOS11
IC: 12438A-T40S10TOS11
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.

Model: T40S11
FCC ID: 2ADAT-T40S10TOS11
IC: 12438A- T40S10TOS11
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.