

FCC AND ISED CERTIFICATION TEST REPORT

FOR

Applicant	:	Corsair Memory, Inc.
Address	:	115 North McCarthy Blvd, Milpitas, CA 95035, USA
Equipment under Test	:	LT200 Smart Lighting Tower
Model No.	:	RDD0007
Trade Mark	:	CORSAIR or  or 
FCC ID	:	2AAFMRDD0007
IC	:	10954A-RDD0007
Manufacturer	:	Corsair Memory, Inc.
Address	:	115 North McCarthy Blvd, Milpitas, CA 95035, USA

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan
City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT.....	7
2.2.	Accessories of EUT	8
2.3.	Assistant equipment used for test	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard	8
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty	10
3.	Equipment Used During Test.....	11
4.	6 dB Bandwidth and 99% Bandwidth	11
4.1.	Block diagram of test setup	13
4.2.	Limits.....	13
4.3.	Test procedure	13
4.4.	Test result	14
5.	Maximum Peak Output Power.....	19
5.1.	Block diagram of test setup	19
5.2.	Limits.....	19
5.3.	Test procedure	19
5.4.	Test result	19
5.5.	Test graphs	20
6.	Power Spectral Density	22
6.1.	Block diagram of test setup	22
6.2.	Limits.....	22
6.3.	Test procedure	22
6.4.	Test result	22
6.5.	Test graphs	23
7.	Band Edge Compliance (Conducted Method).....	26
7.1.	Block diagram of test setup	26
7.2.	Limits.....	26
7.3.	Test procedure	26
7.4.	Test result	27
7.5.	Test graphs	27
8.	RF Conducted Spurious Emissions.....	29
8.1.	Block diagram of test setup	29

8.2.	Limits.....	29
8.3.	Test procedure	29
8.4.	Test result	30
8.5.	Test graphs	30
9.	Radiated Emission.....	37
9.1.	Block diagram of test setup	37
9.2.	Limit	38
9.3.	Test procedure	40
9.4.	Test result	41
10.	Emissions in Restricted Frequency Bands.....	46
10.1.	Block diagram of test setup	46
10.2.	Limit	46
10.3.	Test procedure	46
10.4.	Test result	46
11.	Power Line Conducted Emission	51
11.1.	Block diagram of test setup	51
11.2.	Power line conducted emission limits.....	51
11.3.	Test procedure	51
11.4.	Test result	52
12.	Antenna Requirements.....	55
12.1.	Limit	55
12.2.	Result.....	55
13.	Test Setup Photograph	56
14.	Photos of the EUT	58

Test Report Declare

Applicant	:	Corsair Memory, Inc.
Address	:	115 North McCarthy Blvd, Milpitas, CA 95035, USA
Equipment under Test	:	LT200 Smart Lighting Tower
Model No.	:	RDD0007
Trade Mark	:	CORSAIR or  or 
Manufacturer	:	Corsair Memory, Inc.
Address	:	115 North McCarthy Blvd, Milpitas, CA 95035, USA

Test Standard Used:

FCC Rules and Regulations Part 15.247, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021).

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-R21110501-2E01		
Date of Receipt:	Nov. 15, 2021	Date of Test:	Nov. 15, 2021 ~ Dec. 03, 2021

Prepared By:

Johnny Wang

Johnny Wang/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Dec. 06, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Power Spectral Density	FCC Part 15:15.247 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Band Edge Compliance (conducted method)	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Radiation Emission	FCC Part 15: 15.247 ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
RF Conducted Spurious Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Emission in Restricted Frequency Bands	FCC Part 15: 15.209 FCC Part 15: 15.247 ANSI C63.10: 2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: LT200 Smart Lighting Tower
Model Number	: RDD0007
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V by external AC Adapter
Radio Specification	: 2.4G Digitally Modulated
Operation Frequency	: 2403 MHz - 2479 MHz
Modulation	: GFSK
Data Rate	: 1 Mbps
Antenna Gain	: ANT1: 1.5 dBi ANT2: 1.5 dBi
Sample Type	: Series production

Note: EUT is the ab. of equipment under test. The EUT equipped with two antennas but only one antenna active at any moment in time.

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403	27	2429	53	2455
2	2404	28	2430	54	2456
3	2405	29	2431	55	2457
4	2406	30	2432	56	2458
5	2407	31	2433	57	2459
6	2408	32	2434	58	2460
7	2409	33	2435	59	2461
8	2410	34	2436	60	2462
9	2411	35	2437	61	2463
10	2412	36	2438	62	2464
11	2413	37	2439	63	2465
12	2414	38	2440	64	2466
13	2415	39	2441	65	2467
14	2416	40	2442	66	2468
15	2417	41	2443	67	2469
16	2418	42	2444	68	2470
17	2419	43	2445	69	2471
18	2420	44	2446	70	2472
19	2421	45	2447	71	2473
20	2422	46	2448	72	2474
21	2423	47	2449	73	2475

22	2424	48	2450	74	2476
23	2425	49	2451	75	2477
24	2426	50	2452	76	2478
25	2427	51	2453	77	2479
26	2428	52	2454		


2.2. Accessories of EUT

Assistant equipment	Manufacturer	Model number	Serial No.	Other
Adapter	Dongguan Guanjin Electronics Technology Co., Ltd	K20APDUC	Input: 100-240~, 50/60Hz, 0.5A; Output: 12V/1.67A or 9V/2.22A or 5V/3A	N/A
USB cable	N/A	N/A	N/A	Length: 180cm Unshielded

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	Lenovo Beijing Co. Ltd.	ThinkPad	FCC/CE	TP00015A
Dongle	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



Test software: CMD

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information			
Mode	Channel	Frequency (MHz)	Setting Tx Power
GFSK	LCH:CH1	2403	/
	MCH:CH39	2441	/
	HCH:CH76	2479	/

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 22 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz - 30 MHz)
Uncertainty for Radiation Emission test (9 kHz - 30 MHz)	3.89 dB (9 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☐ RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 02, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Sep. 02, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 18, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC0290	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☒ RF Connected Test (Tonscend RF Measurement System 2#)					
Spectrum analyzer	R&S	FSU26	101472	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☐ Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 02, 2021	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 13, 2021	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Sep. 19, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 08, 2021	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 02, 2021	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 02, 2021	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 02, 2021	1 Year
MI Cable	HUBSER	C10-01-01-	1091629	Sep. 02, 2021	1 Year

		1M			
Test software	Audix	E3	V 6.11111b	N/A	N/A
☐ Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 02, 2021	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Sep. 27, 2021	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 08, 2021	1 Year
Pre-amplifier	TERA-MW	TRLA-0040G35	101303	Sep. 02, 2021	1 Year
RF Cable	MI Cable	RG214-11	DDT-ZC01497	Jun. 09, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☒ Radiation 3#chamber					
EMI Test Receiver	R&S	ESU	100472	Jun. 01, 2021	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Aug. 07, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 02, 2021	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 02, 2021	1 Year
Test software	Audix	E3	V 9	N/A	N/A
☒ Power Line Conducted Emissions Test 1#					
EMI Test Receiver	R&S	ESU8	100551	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101109	Sep. 02, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☐ Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESPI	101761	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101170	Sep. 02, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	KH43101	431011801568-12#	Jun. 01, 2021	1 Year
CE Cable 2	HUBSER	N/A	W11.02	Jun. 01, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 6 dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

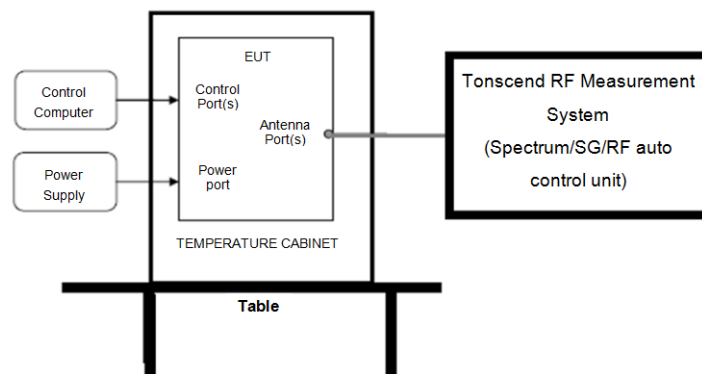

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	30 kHz
VBW:	100 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6 dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(4) Allow the trace to stabilize, measure the 6 dB and 99% bandwidth of signal.

Mode	Antenna	Channel	99% bandwidth Result (MHz)	6 dB bandwidth Result (MHz)	6 dB width Limit (MHz)	Verdict
GFSK	ANT1	CH1	1.92	0.684	>0.5	Pass
		CH39	1.95	0.724	>0.5	Pass
		CH76	1.95	0.720	>0.5	Pass
GFSK	ANT2	CH1	1.93	0.688	>0.5	Pass
		CH39	1.94	0.712	>0.5	Pass
		CH76	1.96	0.708	>0.5	Pass

Ref 20 dBm Att 20 dB RBW 30 kHz VBW 100 kHz SWT 20 ms Marker 1 [T1] 2.04 dBm 2.402992000 GHz

20 Offset 1.5 dB

1.54 V184

OSW 1.924000000 MHz Temp 1 [T1] OSW -1.54 dBm

2.402000000 GHz Temp 2 [T1] OSW -2.11 dBm

2.403940000 GHz

Center 2.403 GHz 400 kHz/ Span 4 MHz

Date: 30.NOV.2021 10:27:52

GFSK_ANT2_2403

Ref 20 dBm Att 20 dB RBW 30 kHz VBW 100 kHz SWT 20 ms Marker 1 [T1] 1.42 dBm 2.402992000 GHz

20 Offset 1.5 dB

1.42 V184

OSW 1.925000000 MHz Temp 1 [T1] OSW -1.42 dBm


2.402000000 GHz Temp 2 [T1] OSW -2.11 dBm

2.403950000 GHz

Center 2.403 GHz 400 kHz/ Span 4 MHz


Date: 30.NOV.2021 08:53:41

GFSK ANT1 2441

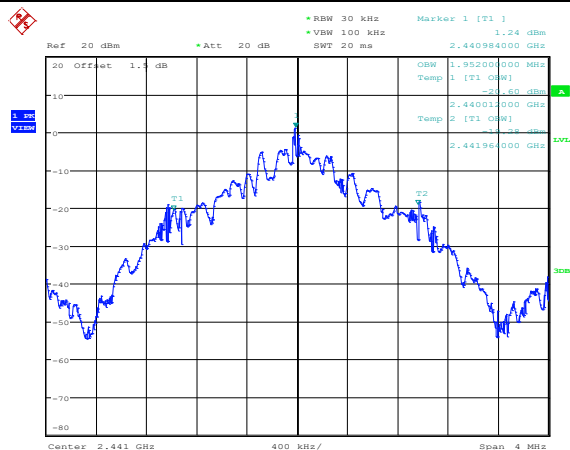


Date: 30.NOV.2021 10:31:03

GFSK_ANT2_2441

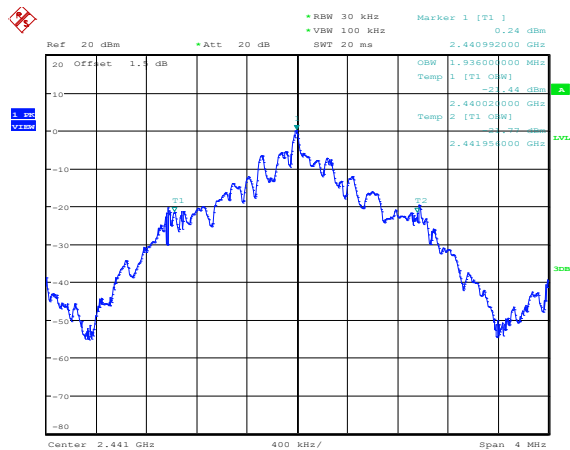


Date: 30.NOV.2021 08:45:32

GFSK_ANT1_2479


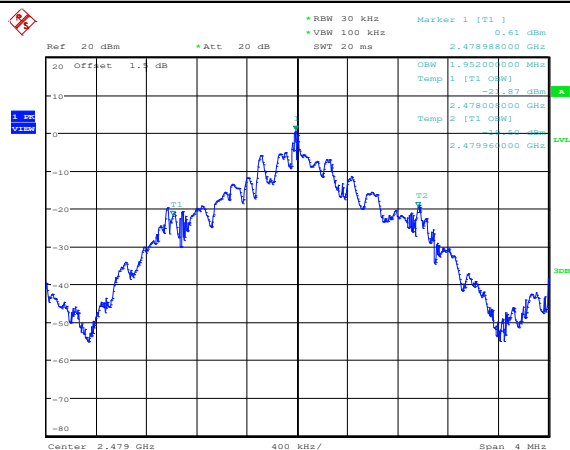



Date: 30.NOV.2021 10:34:33

GFSK_ANT2_2479

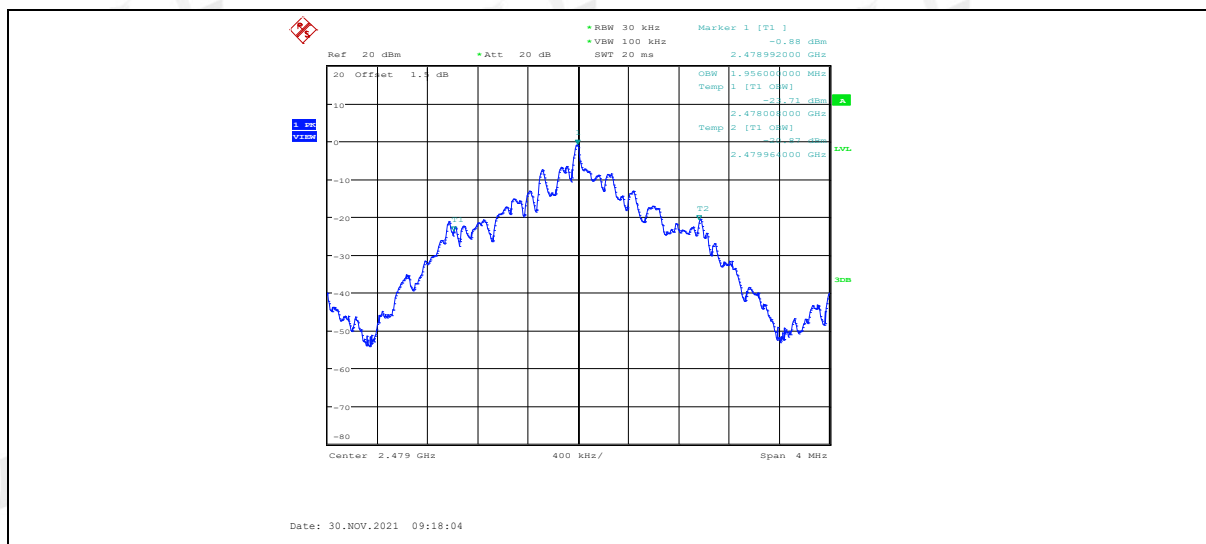


6 dB bandwidth

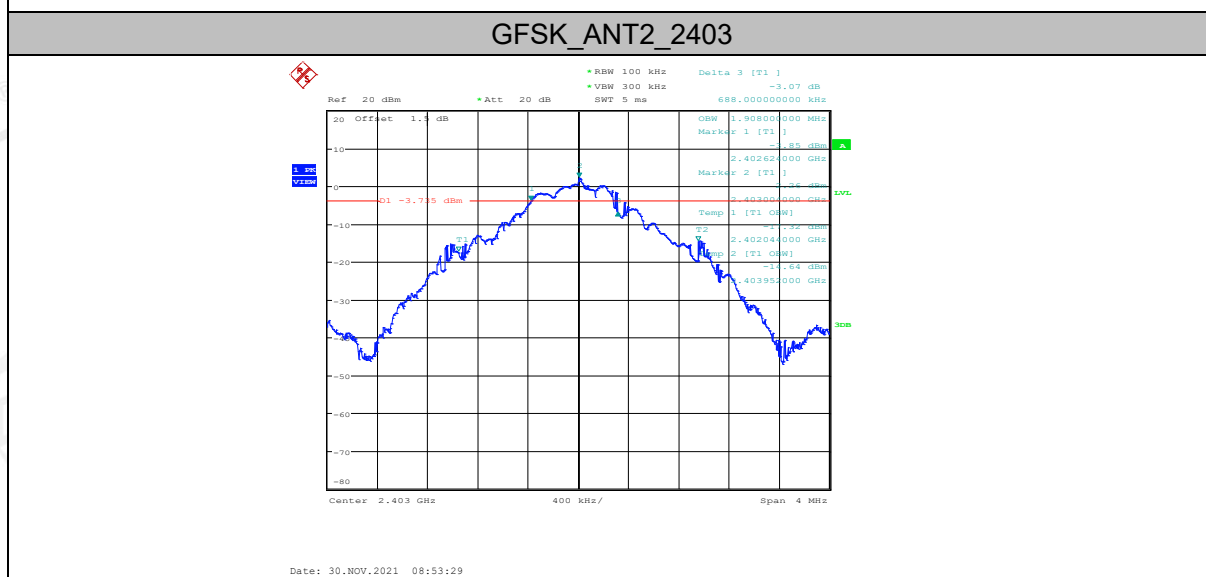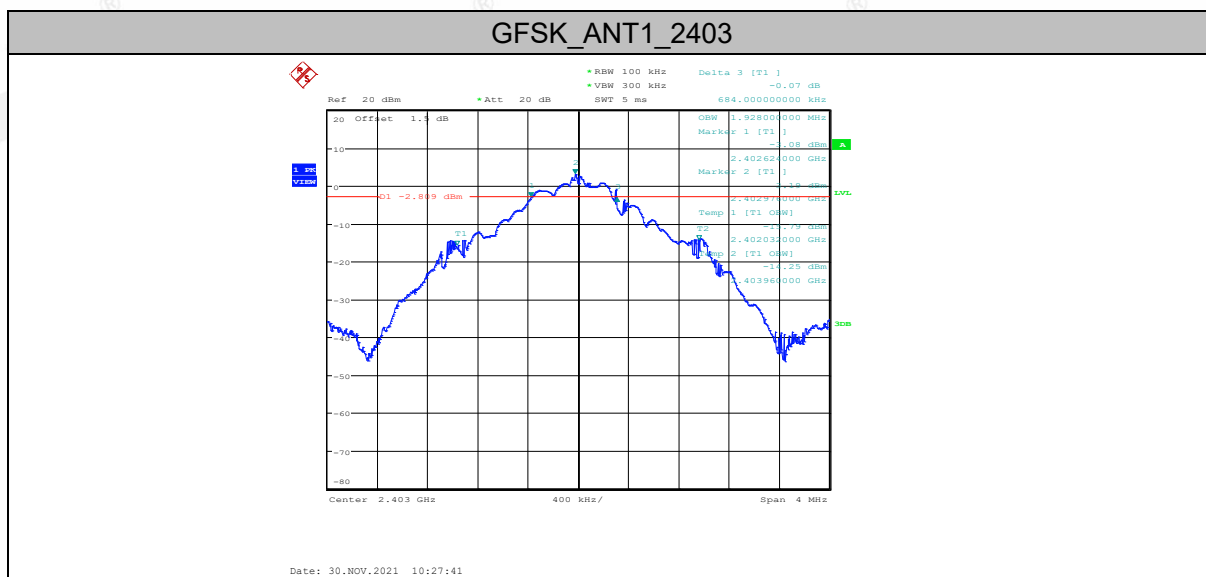

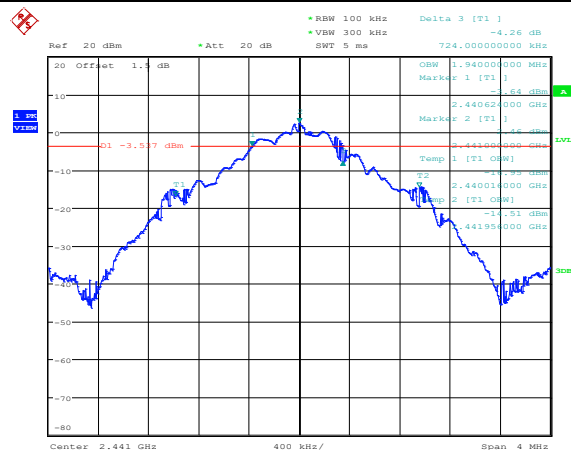


Date: 30.NOV.2021 10:30:51

GFSK_ANT2_2441

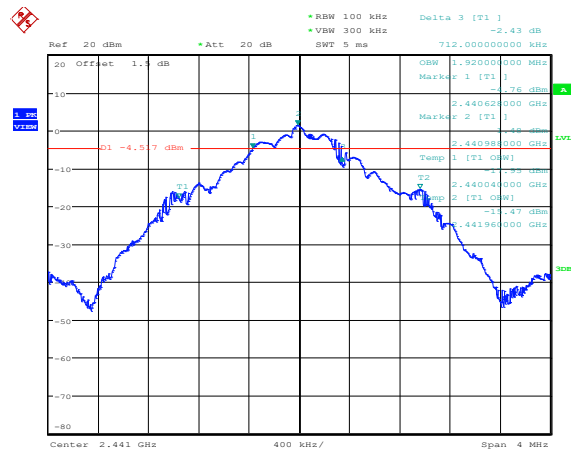


Date: 30.NOV.2021 08:45:14

GFSK_ANT1_2479

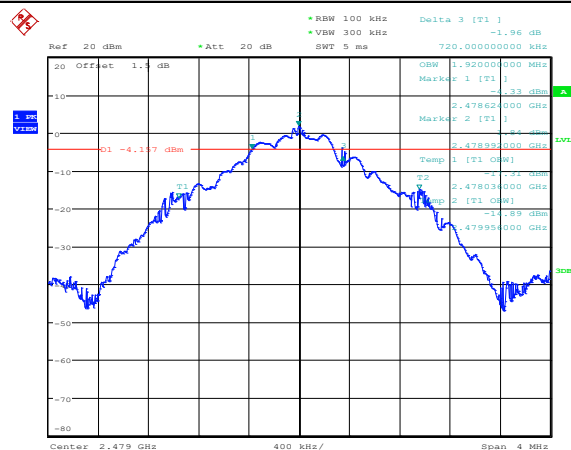

Date: 30.NOV.2021 10:34:22

GFSK_ANT2_2479

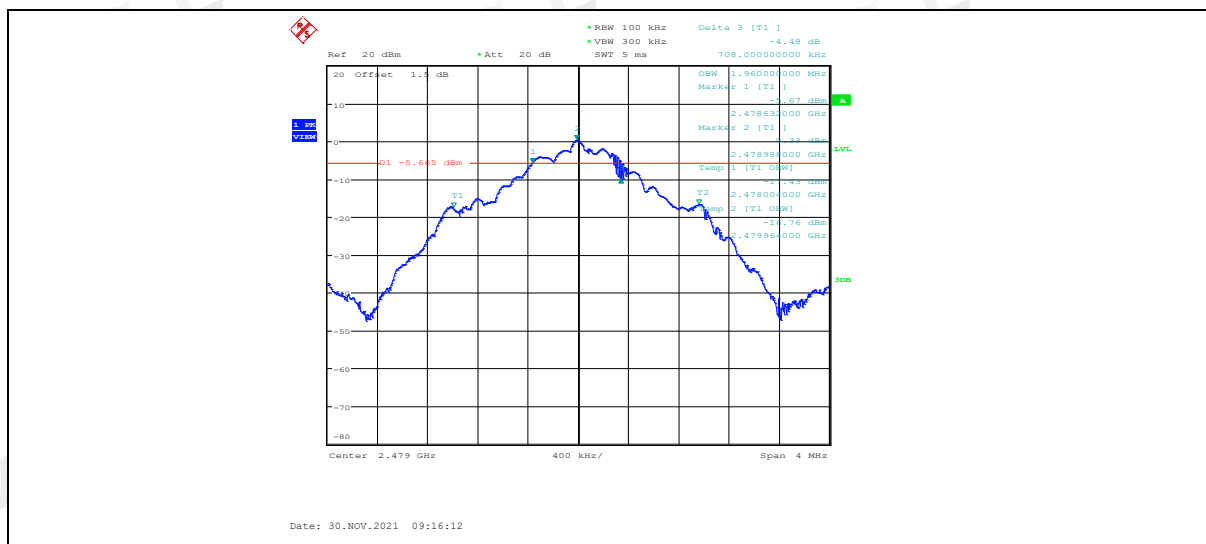

5. Maximum Peak Output Power

5.1. Block diagram of test setup

Same with 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

RBW:	≥DTS bandwidth
VBW:	≥3 x RBW
Span	≥3 x RBW
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(3) Allow the trace to stabilize, Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges measure out the PK output power.

5.4. Test result

Test Mode	Antenna	Channel	Peak Output Power (dBm)	Limit [dBm]	Verdict
GFSK	Ant1	2403	3.83	≤30	Pass
		2441	3.25	≤30	Pass
		2479	2.50	≤30	Pass
GFSK	Ant2	2403	3.16	≤30	Pass
		2441	2.01	≤30	Pass
		2479	0.90	≤30	Pass


5.5. Test graphs

GFSK_ANT1_2403

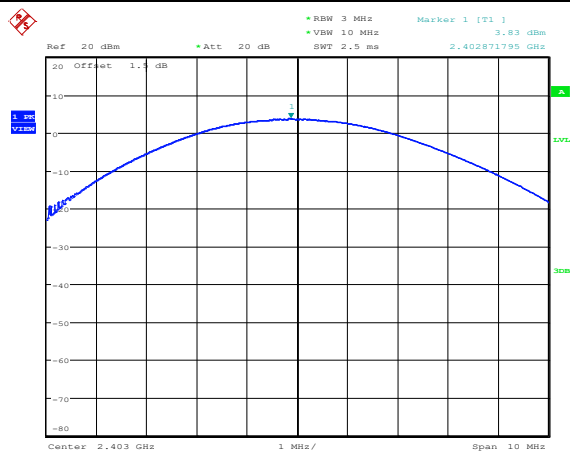


Date: 30.NOV.2021 10:28:04

GFSK_ANT2_2403

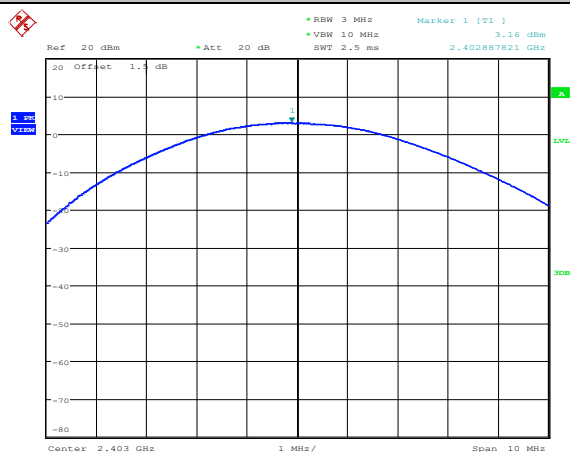


Date: 30.NOV.2021 08:53:53

GFSK_ANT1_2441

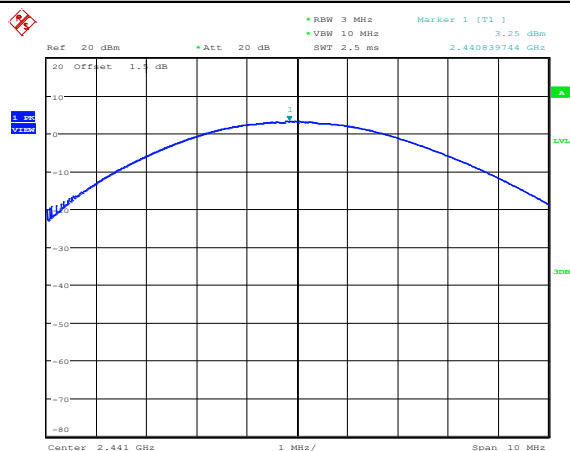


Date: 30.NOV.2021 10:31:15

GFSK_ANT2_2441

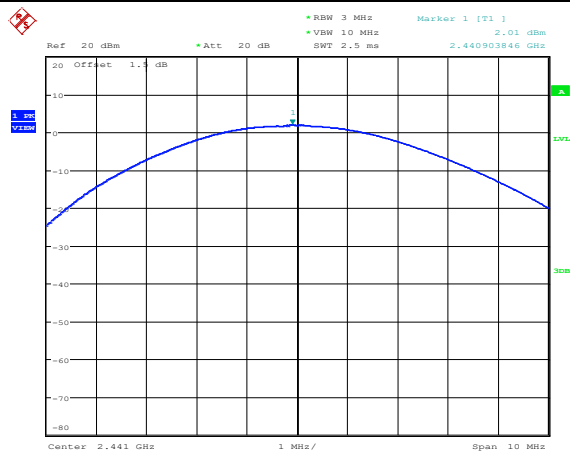


Date: 30.NOV.2021 08:45:44

GFSK_ANT1_2479

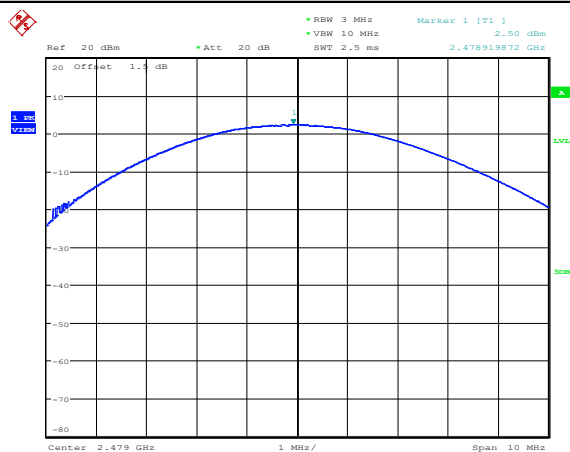

Date: 30.NOV.2021 10:34:45

GFSK_ANT2_2479

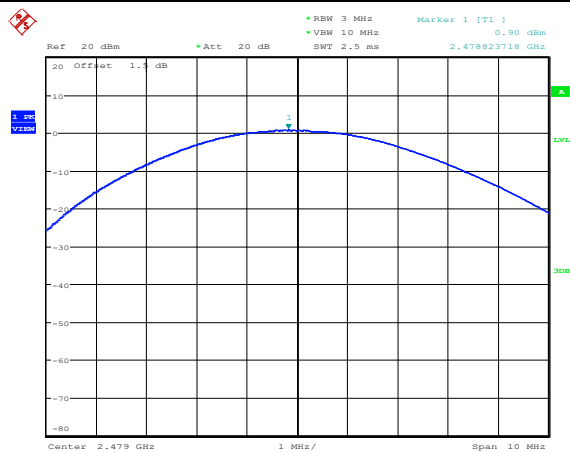

Date: 30.NOV.2021 09:18:16

6. Power Spectral Density

6.1. Block diagram of test setup

Same with 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test result

Test Mode	Antenna	Channel	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
GFSK	Ant1	2403	-6.90	≤ 8	Pass
		2441	-7.46	≤ 8	Pass
		2479	-9.71	≤ 8	Pass
GFSK	Ant2	2403	-9.63	≤ 8	Pass
		2441	-8.67	≤ 8	Pass
		2479	-9.79	≤ 8	Pass

GFSK_ANT1_2403

Ref: 20 dBm Att: 20 dB RBW: 3 kHz VBW: 10 kHz SWT: 450 ms Marker 1 [T1] -7.56 dBm 2.403048000 GHz

Center: 2.403 GHz 400 kHz/ Span: 4 MHz

1.5V

1A

1VZ

30B

Date: 30.NOV.2021 10:28:42

GFSK_ANT2_2403

Ref: 20 dBm Att: 20 dB RBW: 3 kHz VBW: 10 kHz SWT: 450 ms Marker 1 [T1] -7.60 dBm 2.403048000 GHz

Center: 2.403 GHz 400 kHz/ Span: 4 MHz

1.5V

1A

1VZ

30B

Date: 30.NOV.2021 08:55:34

GFSK_ANT1_2441

Ref: 20 dBm Att: 20 dB RBW: 3 kHz VBW: 10 kHz SWT: 450 ms Marker 1 [T1] -7.46 dBm 2.441048000 GHz

Center: 2.441 GHz 400 kHz/ Span: 4 MHz

1.5V


1A

1VZ

30B


Date: 30.NOV.2021 10:32:08

GFSK_ANT2_2441

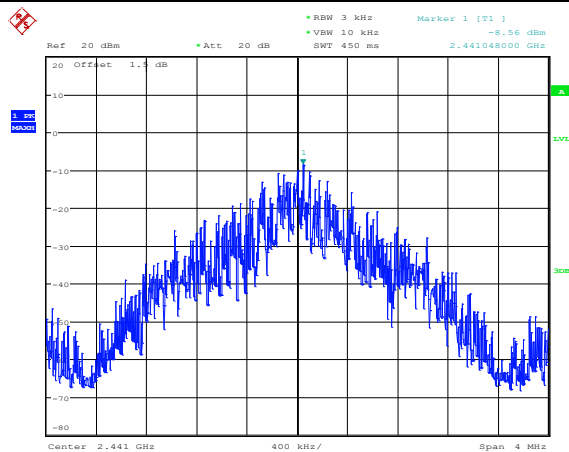


Date: 30.NOV.2021 08:49:13

GFSK_ANT1_2479

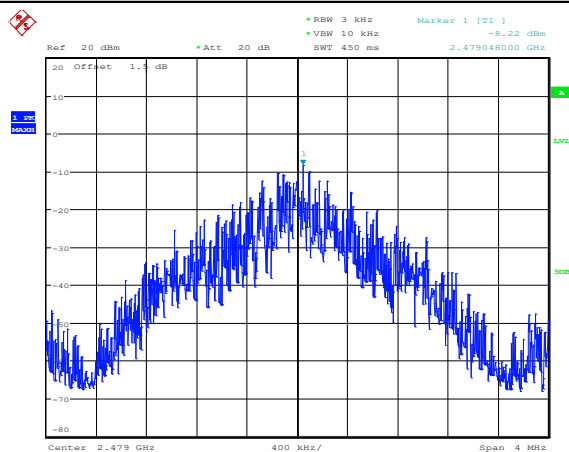


Date: 30.NOV.2021 10:35:14

GFSK_ANT2_2479

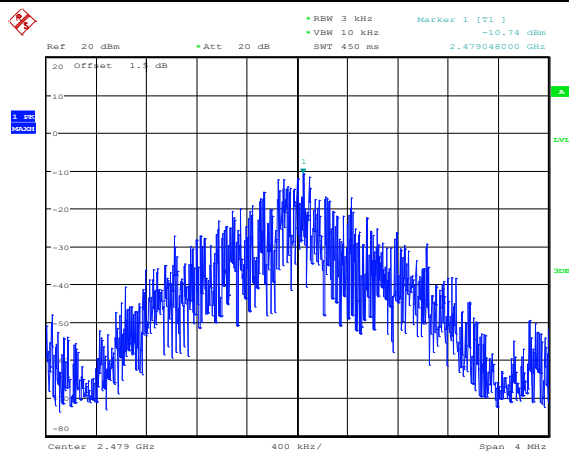

Date: 30.NOV.2021 09:18:38

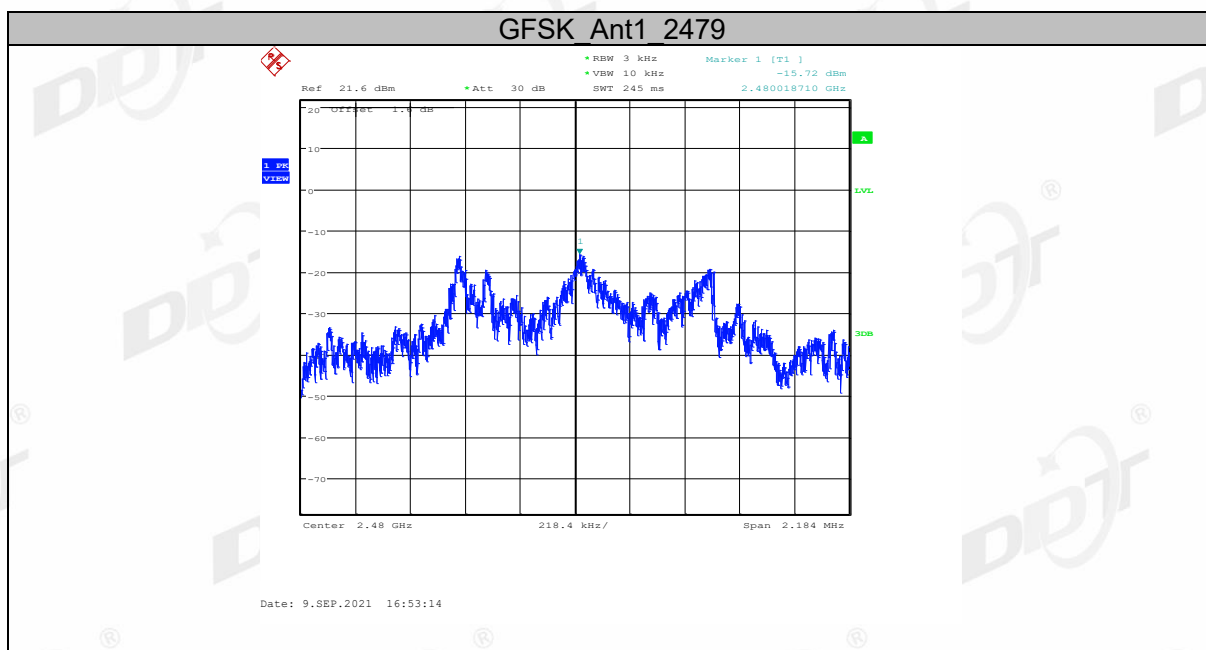

7. Band Edge Compliance (Conducted Method)

7.1. Block diagram of test setup

Same with 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100 kHz
VBW:	300 kHz
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

7.4. Test result

Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
GFSK	Ant1	Low	2403	2.35	-36.42	<=-17.65	Pass
		High	2479	1.74	-53.83	<=-18.26	Pass
GFSK	Ant2	Low	2403	1.73	-50.87	<=-18.27	Pass
		High	2479	0.17	-55.27	<=-19.83	Pass


7.5. Test graphs

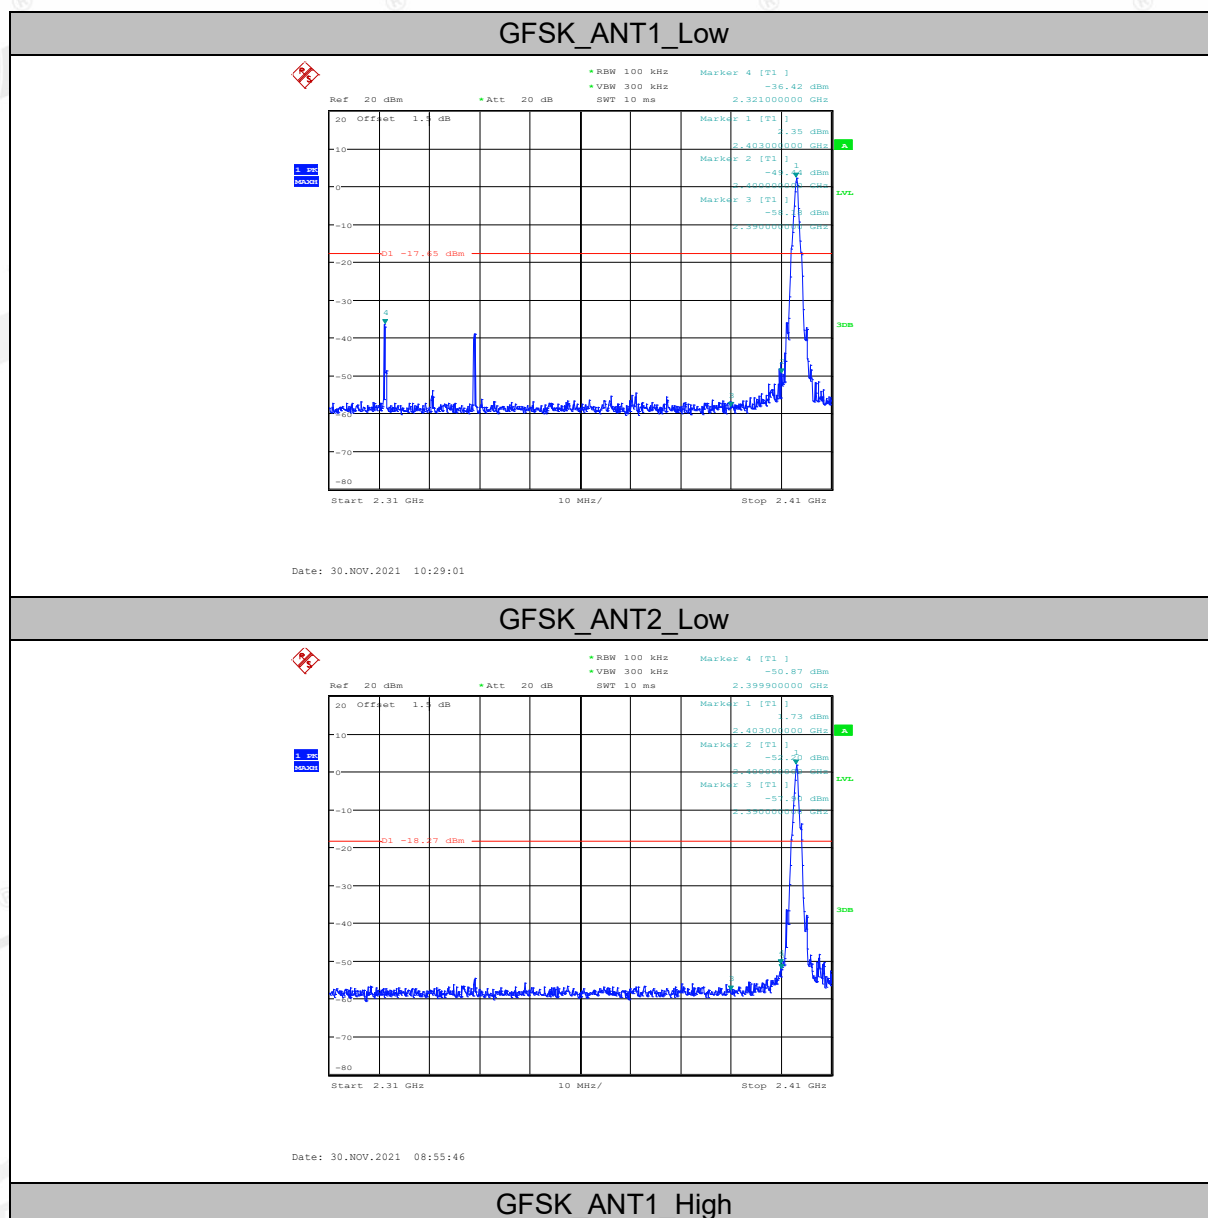

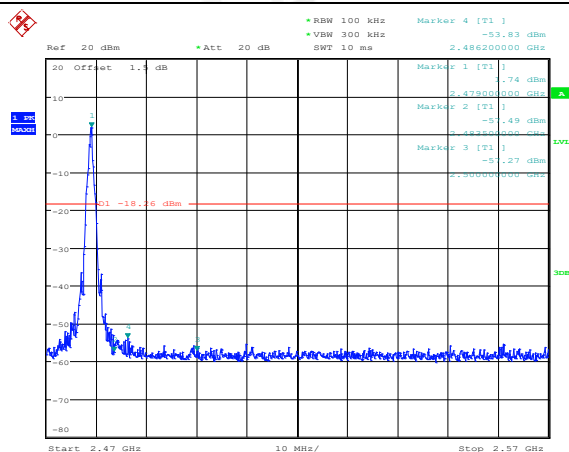

Date: 30.NOV.2021 10:35:26

GFSK_ANT2_High

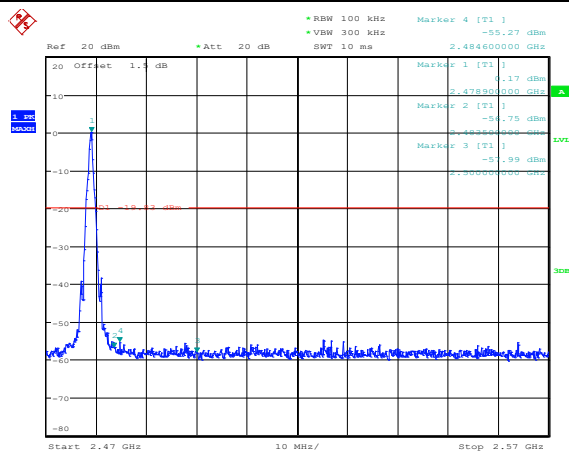

Date: 30.NOV.2021 09:18:50

8. RF Conducted Spurious Emissions

8.1. Block diagram of test setup

Same as section 4.1

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

8.4. Test result

Test Mode	Antenna	Channel	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
GFSK	Ant1	2403	Reference	3.12	3.12	---	Pass
			30~1000	30~1000	-26.93	<=-16.88	Pass
			1000~26500	1000~26500	-52.68	<=-16.88	Pass
		2441	Reference	2.72	2.72	---	Pass
			30~1000	30~1000	-43.01	<=-17.28	Pass
			1000~26500	1000~26500	-36.76	<=-17.28	Pass
		2479	Reference	0.29	0.29	---	Pass
			30~1000	30~1000	-43.03	<=-19.71	Pass
			1000~26500	1000~26500	-52.43	<=-19.71	Pass
GFSK	Ant2	2403	Reference	2.31	2.31	---	Pass
			30~1000	30~1000	-43.45	<=-17.69	Pass
			1000~26500	1000~26500	-52.52	<=-17.69	Pass
		2441	Reference	1.53	1.53	---	Pass
			30~1000	30~1000	-43.94	<=-18.47	Pass
			1000~26500	1000~26500	-52.71	<=-18.47	Pass
		2479	Reference	0.08	0.08	---	Pass
			30~1000	30~1000	-43.17	<=-19.92	Pass
			1000~26500	1000~26500	-52.91	<=-19.92	Pass


8.5. Test graphs

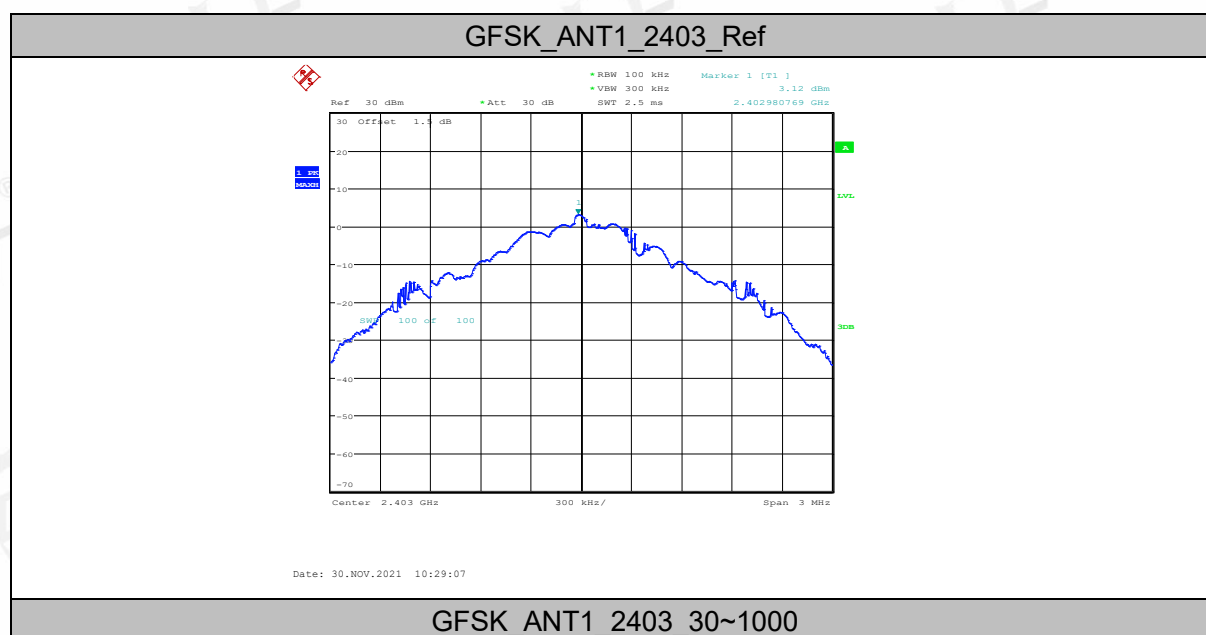

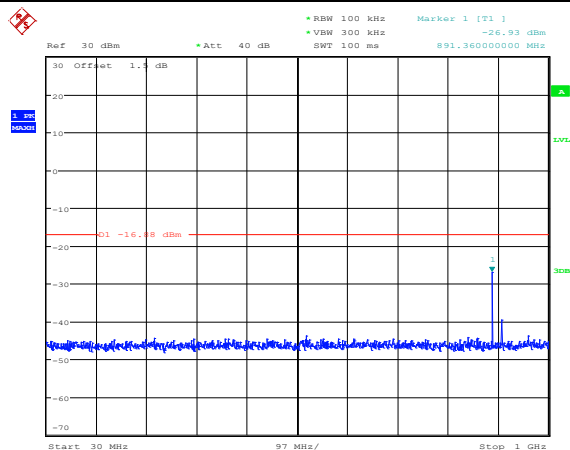


Date: 30.NOV.2021 10:29:16

GFSK_ANT1_2403_1000~26500

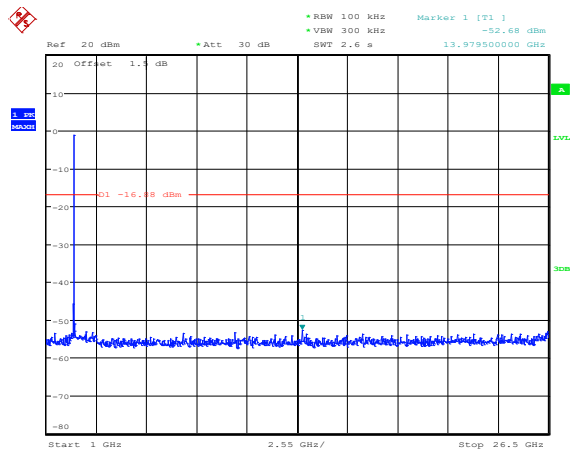


Date: 30.NOV.2021 10:29:27

GFSK_ANT2_2403_Ref

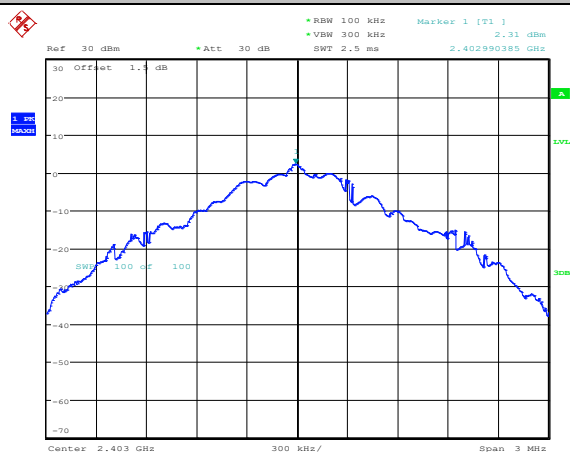


Date: 30.NOV.2021 08:55:53

GFSK_ANT2_2403_30~1000

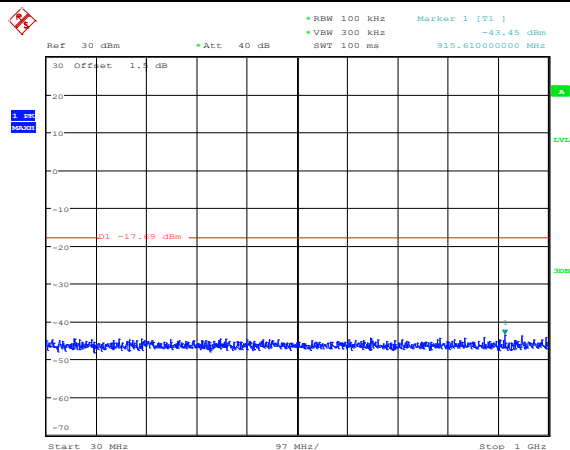


Date: 30.NOV.2021 08:56:01

GFSK_ANT2_2403_1000~26500

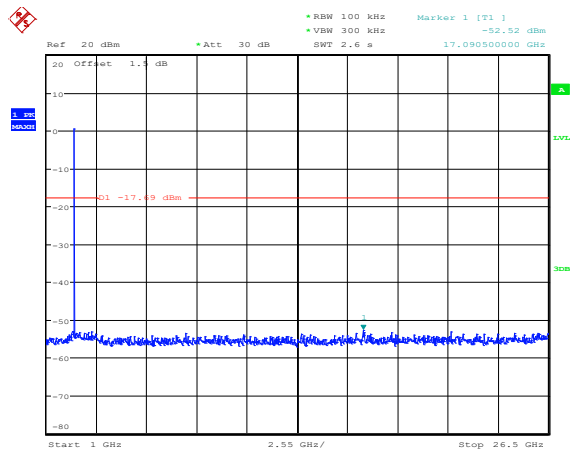


Date: 30.NOV.2021 08:56:20

GFSK_ANT1_2441_Ref

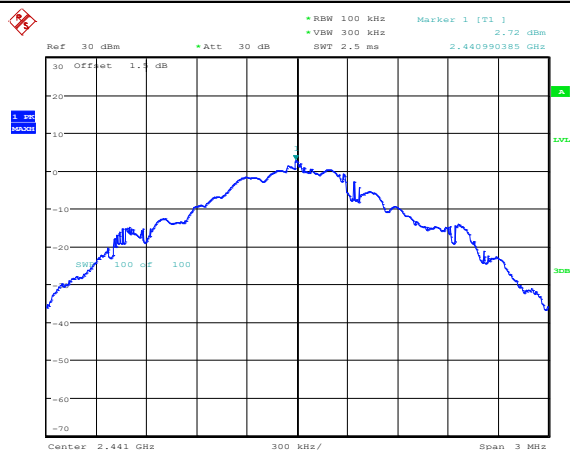


Date: 30.NOV.2021 10:32:14

GFSK_ANT1_2441_30~1000

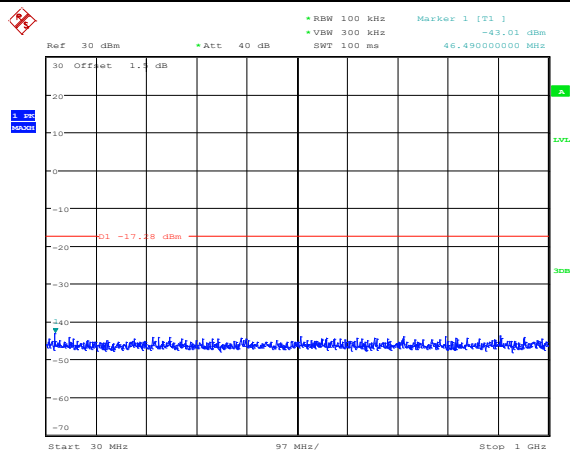


Date: 30.NOV.2021 10:32:23

GFSK_ANT1_2441_1000~26500

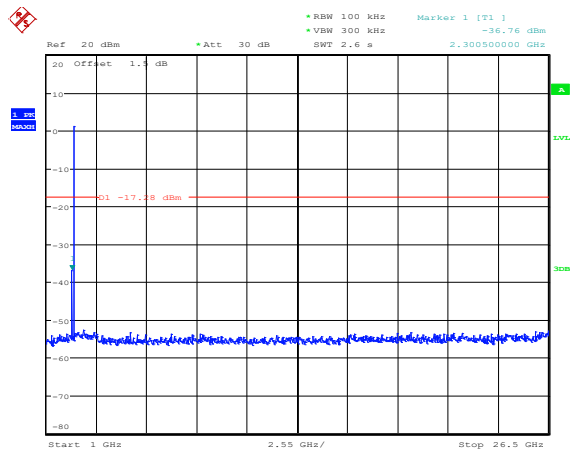


Date: 30.NOV.2021 10:32:52

GFSK_ANT2_2441_Ref

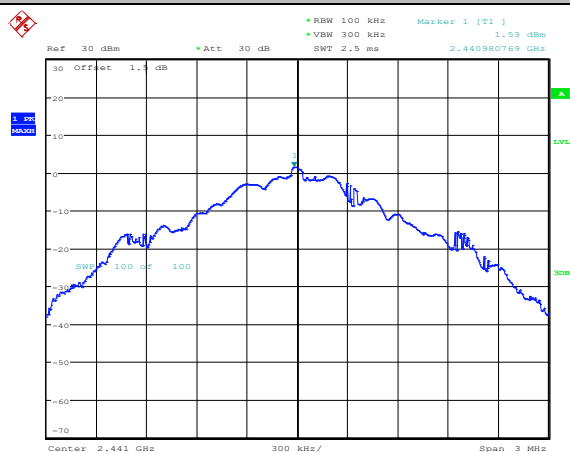


Date: 30.NOV.2021 08:49:19

GFSK_ANT2_2441_30~1000

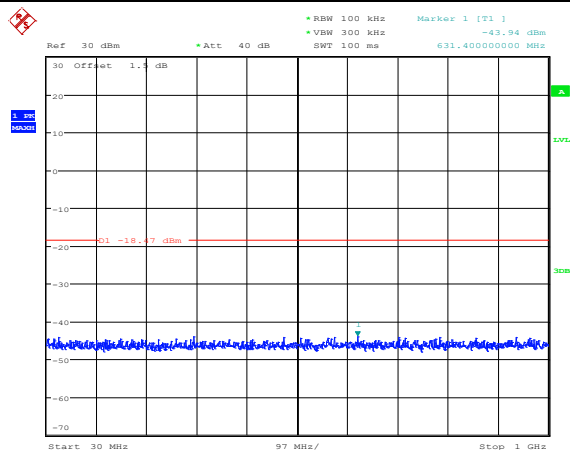


Date: 30.NOV.2021 08:49:27

GFSK_ANT2_2441_1000~26500

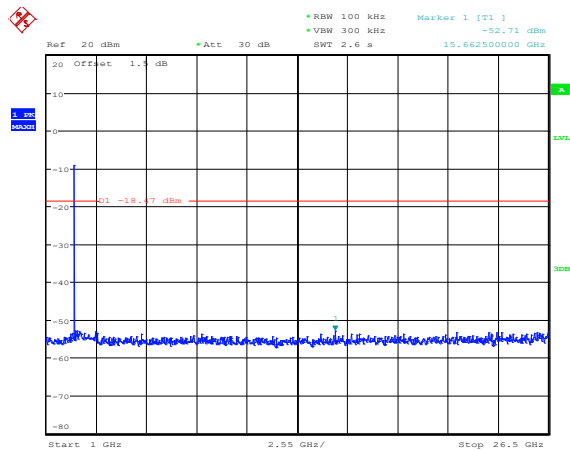


Date: 30.NOV.2021 08:49:46

GFSK_ANT1_2479_Ref

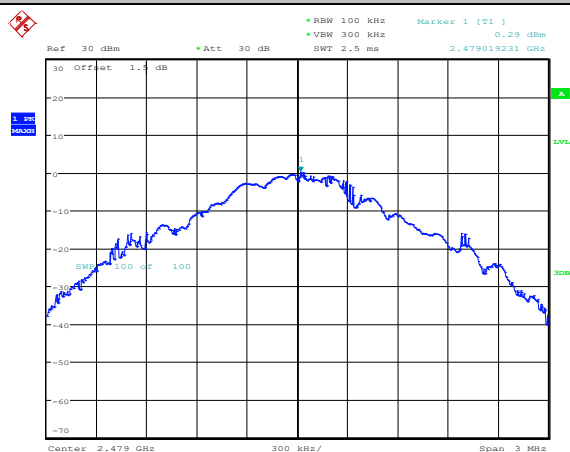


Date: 30.NOV.2021 10:35:33


GFSK_ANT1_2479_30~1000

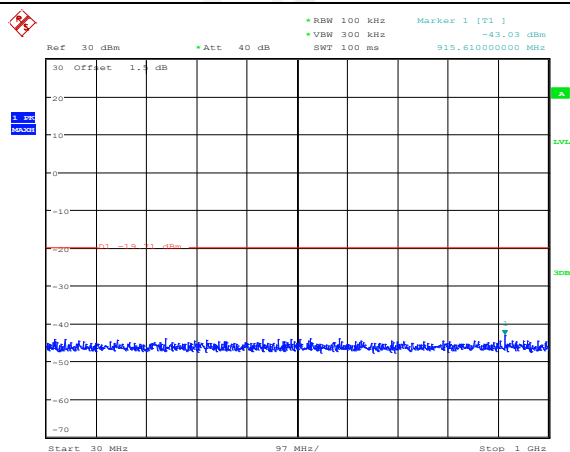


GFSK_ANT1_2479_1000~26500

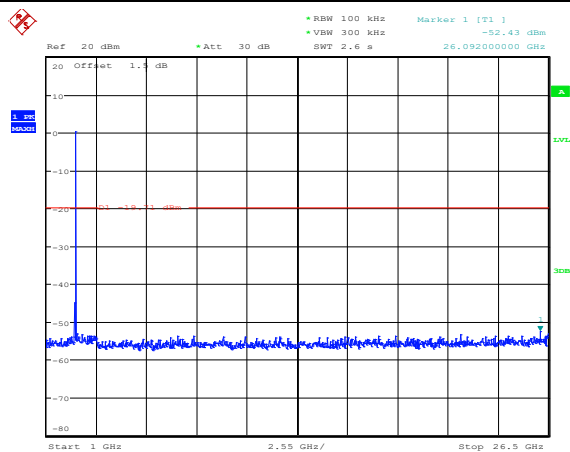

GFSK_ANT2_2479_Ref

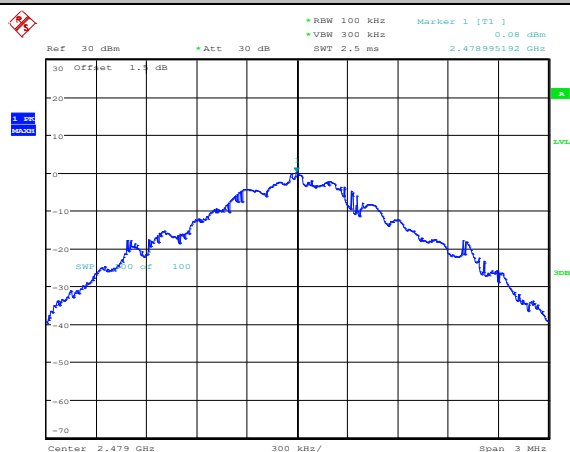


GFSK_ANT2_2479_30~1000

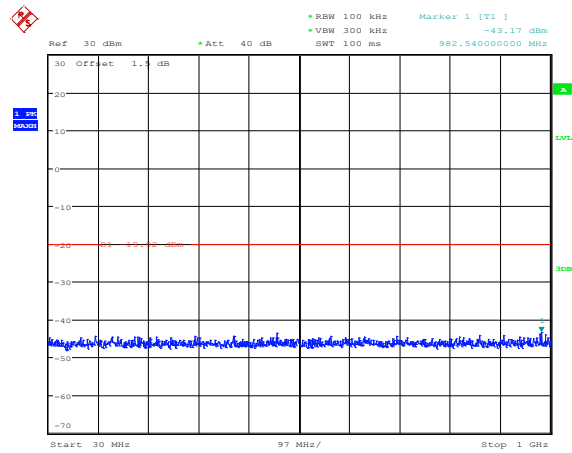

Date: 30.NOV.2021 09:19:05

GFSK_ANT2_2479_1000~26500

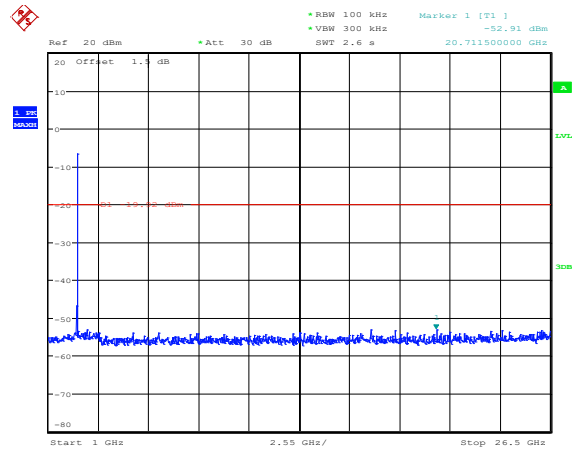


Date: 30.NOV.2021 09:19:17


9. Radiated Emission

9.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

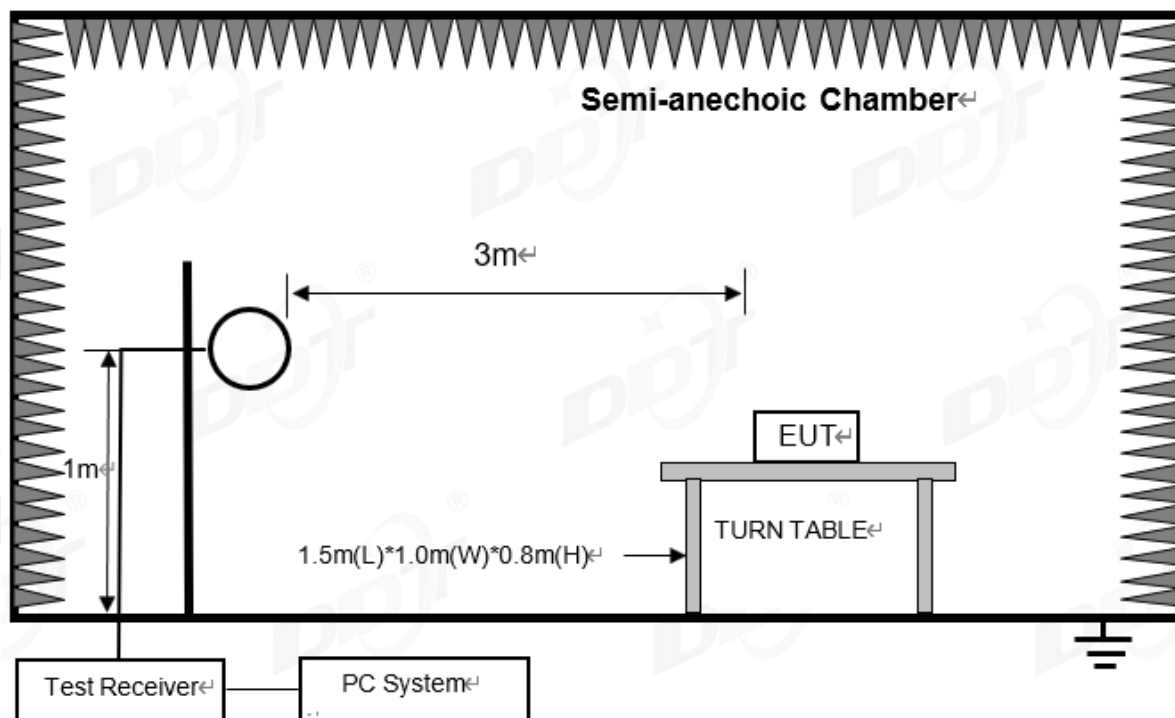

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

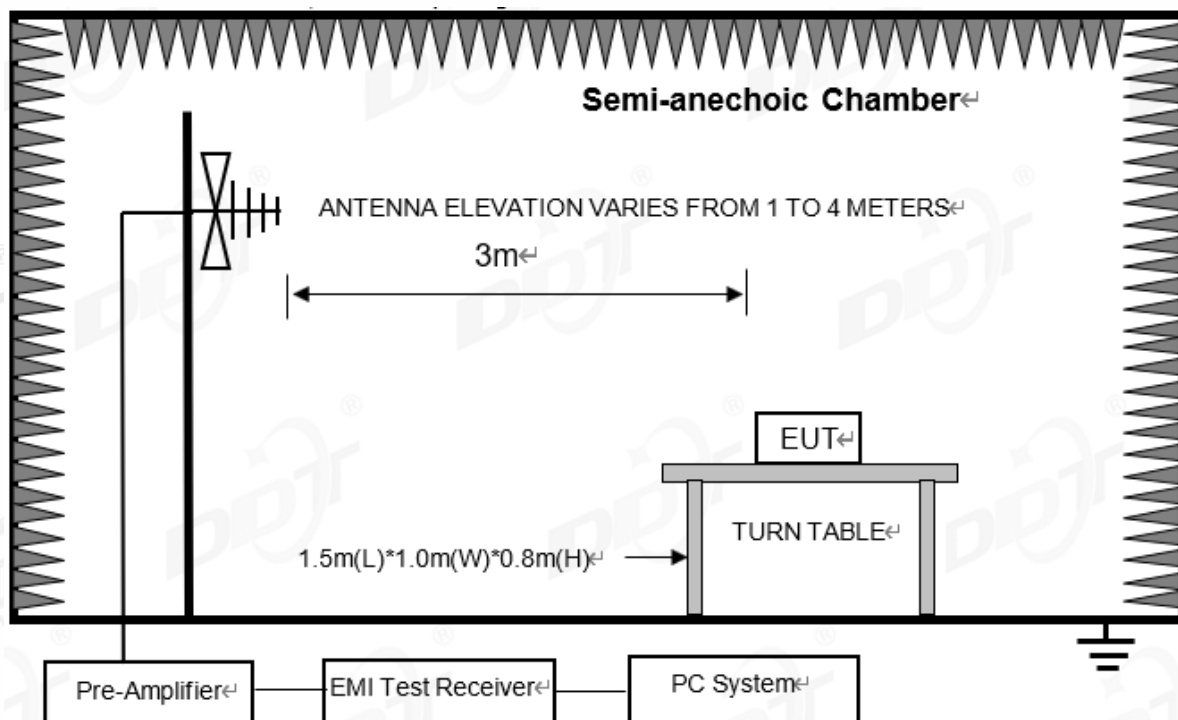

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

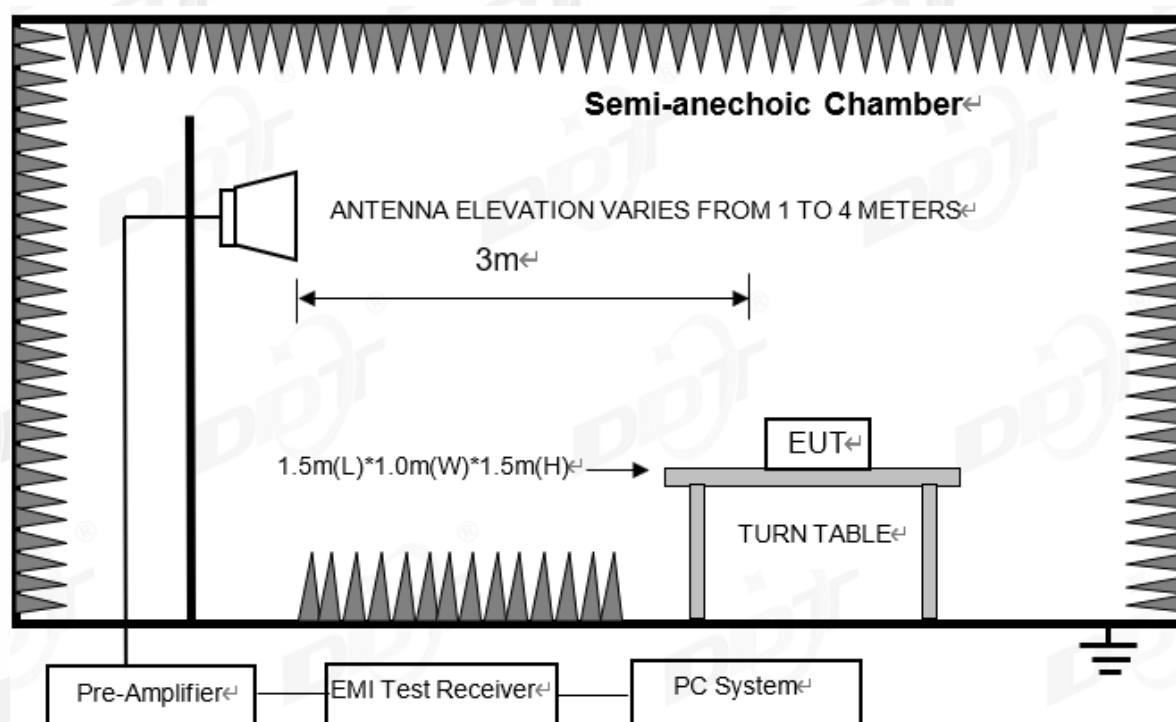

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

9.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

RSS-Gen section 8.10 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3500-4400
10.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			(²)

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

8.2.2 FCC 15.209 Limit and RSS-Gen section 8.9 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen limits.

9.3. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1 G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1 G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

- (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

- (b) Change work frequency or channel of device if practicable.

- (c) Change modulation type of device if practicable.

- (d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

9.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limit.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from

30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, all the case were tested, the final worst case test was only performed with EUT working in ANT1 GFSK, Tx 2403 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21110501-2E RDD0007\FCC
BELOW1G\FCC BELOW 1G_00001.EMI

Test Date : 2021-11-23

Tested By : Bairong

EUT : LT200 Smart Lighting Tower


Model Number : RDD0007

Power Supply : AC120V/60Hz

Test Mode : TX MODE

Condition : Temp:23.5°,Humi:55%,Press:100.1kPa Antenna/Distance : 2020 9161/3m/VERTICAL

Memo :

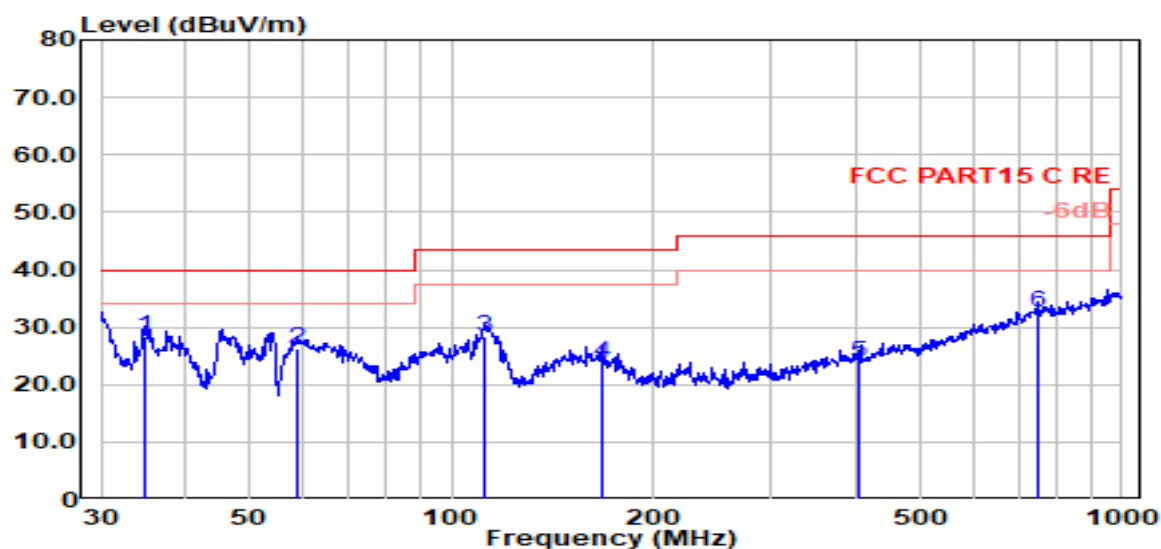

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	34.76	12.73	12.14	3.42	28.29	40.00	-11.71	QP	VERTICAL
2	59.03	12.33	10.29	3.65	26.27	40.00	-13.73	QP	VERTICAL
3	112.13	12.60	11.94	3.93	28.47	43.50	-15.03	QP	VERTICAL
4	167.82	4.08	15.47	4.16	23.72	43.50	-19.78	QP	VERTICAL
5	406.09	2.88	15.93	5.07	23.88	46.00	-22.12	QP	VERTICAL
6	750.11	4.78	21.70	6.02	32.50	46.00	-13.50	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21110501-2E RDD0007\FCC
BELOW1G\FCC BELOW 1G_00002.EMI

Test Date : 2021-11-23

Tested By : Bairong

EUT : LT200 Smart Lighting Tower


Model Number : RDD0007

Power Supply : AC120V/60Hz

Test Mode : TX MODE

Condition : Temp:23.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2020 9161/3m/HORIZONTAL

Memo :

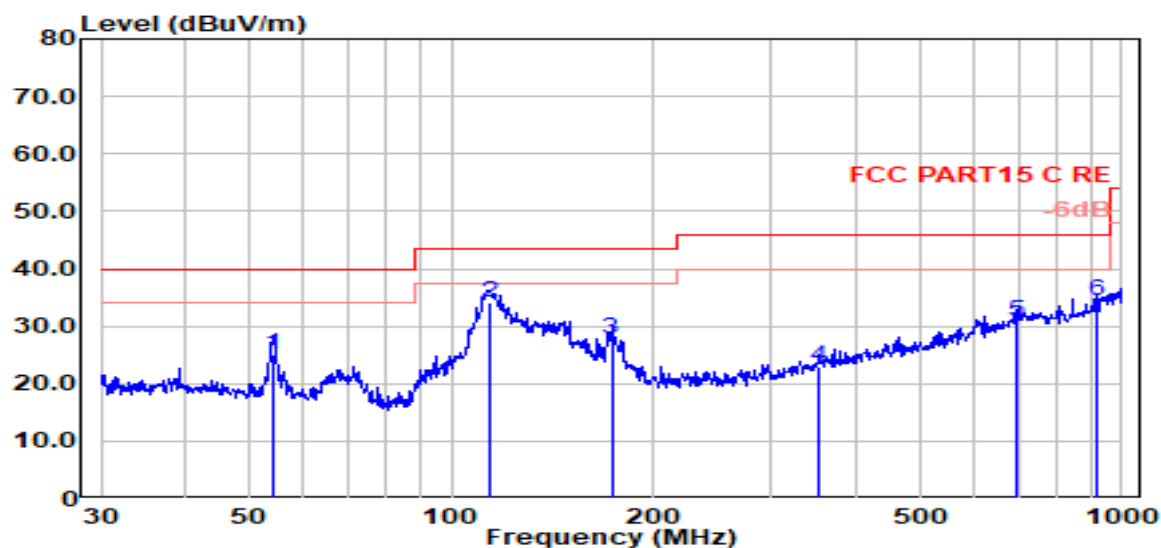

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	54.26	10.62	10.72	3.68	25.01	40.00	-14.99	QP	HORIZONTAL
2	113.71	18.34	11.97	3.94	34.25	43.50	-9.25	QP	HORIZONTAL
3	173.21	8.54	15.00	4.19	27.74	43.50	-15.76	QP	HORIZONTAL
4	352.94	3.00	15.05	4.89	22.94	46.00	-23.06	QP	HORIZONTAL
5	696.86	4.73	20.24	5.87	30.85	46.00	-15.15	QP	HORIZONTAL
6	916.07	5.00	22.86	6.41	34.28	46.00	-11.72	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Radiated Emission test (above 1 GHz)


Freq. (MHz)	Read level (dBμV)	ANT Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
Tx mode 2403 MHz									
5930.00	45.23	32.45	7.35	43.48	41.55	74.00	-32.45	Peak	HORIZONTAL
7783.00	42.77	36.83	8.72	42.45	45.87	74.00	-28.13	Peak	HORIZONTAL
10486.00	41.89	39.38	10.36	42.54	49.09	74.00	-24.91	Peak	HORIZONTAL
12288.00	41.76	39.18	11.66	41.86	50.74	74.00	-23.26	Peak	HORIZONTAL
14515.00	39.28	40.75	12.07	42.09	50.01	74.00	-23.99	Peak	HORIZONTAL
17813.00	28.32	47.57	13.66	42.44	47.11	54.00	-6.89	Average	HORIZONTAL
17813.00	36.12	47.57	13.66	42.44	54.91	74.00	-19.09	Peak	HORIZONTAL
7630.00	44.85	36.57	8.79	42.56	47.65	74.00	-26.35	Peak	VERTICAL
10197.00	42.16	39.04	10.31	42.34	49.17	74.00	-24.83	Peak	VERTICAL
11744.00	43.10	39.48	11.10	41.78	51.89	74.00	-22.11	Peak	VERTICAL
12407.00	41.38	39.14	11.91	42.05	50.37	74.00	-23.63	Peak	VERTICAL
14770.00	40.26	40.67	12.61	41.88	51.65	74.00	-22.35	Peak	VERTICAL
17966.00	28.16	48.90	13.77	42.49	48.35	54.00	-5.65	Average	VERTICAL
17966.00	36.53	48.90	13.77	42.49	56.72	74.00	-17.28	Peak	VERTICAL
Tx mode 2441 MHz									
5930.00	45.23	32.45	7.35	43.48	41.55	74.00	-32.45	Peak	HORIZONTAL
7647.00	43.85	36.60	8.78	42.55	46.68	74.00	-27.32	Peak	HORIZONTAL
8752.00	42.11	37.65	9.16	41.92	47.00	74.00	-27.00	Peak	HORIZONTAL
11829.00	42.14	39.42	11.09	41.66	50.99	74.00	-23.01	Peak	HORIZONTAL
14600.00	40.80	40.72	12.25	42.02	51.75	74.00	-22.25	Peak	HORIZONTAL
17813.00	27.85	47.57	13.66	42.44	46.64	54.00	-7.36	Average	HORIZONTAL
17813.00	36.12	47.57	13.66	42.44	54.91	74.00	-19.09	Peak	HORIZONTAL
6287.00	43.53	33.36	7.63	43.36	41.17	74.00	-32.83	Peak	VERTICAL
7851.00	43.72	36.95	8.69	42.40	46.95	74.00	-27.05	Peak	VERTICAL
10265.00	42.34	39.12	10.32	42.39	49.40	74.00	-24.60	Peak	VERTICAL
11744.00	43.10	39.48	11.10	41.78	51.89	74.00	-22.11	Peak	VERTICAL
14923.00	39.99	40.62	12.93	41.76	51.78	74.00	-22.22	Peak	VERTICAL
17966.00	29.74	48.90	13.77	42.49	49.93	54.00	-4.07	Average	VERTICAL
17966.00	36.53	48.90	13.77	42.49	56.72	74.00	-17.28	Peak	VERTICAL
Tx mode 2479 MHz									
6440.00	44.30	33.82	7.76	43.28	42.60	74.00	-31.40	Peak	HORIZONTAL
8752.00	42.11	37.65	9.16	41.92	47.00	74.00	-27.00	Peak	HORIZONTAL
10384.00	42.58	39.26	10.34	42.47	49.71	74.00	-24.29	Peak	HORIZONTAL
11829.00	42.14	39.42	11.09	41.66	50.99	74.00	-23.01	Peak	HORIZONTAL
13869.00	40.81	40.64	12.10	42.57	50.98	74.00	-23.02	Peak	HORIZONTAL
17983.00	27.96	49.05	13.79	42.49	48.30	54.00	-5.70	Average	HORIZONTAL
17983.00	35.67	49.05	13.79	42.49	56.02	74.00	-17.98	Peak	HORIZONTAL
6219.00	43.47	33.16	7.57	43.39	40.81	74.00	-33.19	Peak	VERTICAL
7851.00	43.72	36.95	8.69	42.40	46.95	74.00	-27.05	Peak	VERTICAL
10112.00	41.92	38.93	10.30	42.28	48.87	74.00	-25.13	Peak	VERTICAL
11744.00	43.10	39.48	11.10	41.78	51.89	74.00	-22.11	Peak	VERTICAL
14923.00	39.99	40.62	12.93	41.76	51.78	74.00	-22.22	Peak	VERTICAL
17966.00	28.51	48.90	13.77	42.49	48.70	54.00	-5.30	Average	VERTICAL
17966.00	36.53	48.90	13.77	42.49	56.72	74.00	-17.28	Peak	VERTICAL
Verdict: Pass									

Note:

1. The worst case is recorded in this report.
2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
3. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

10. Emissions in Restricted Frequency Bands

10.1. Block diagram of test setup

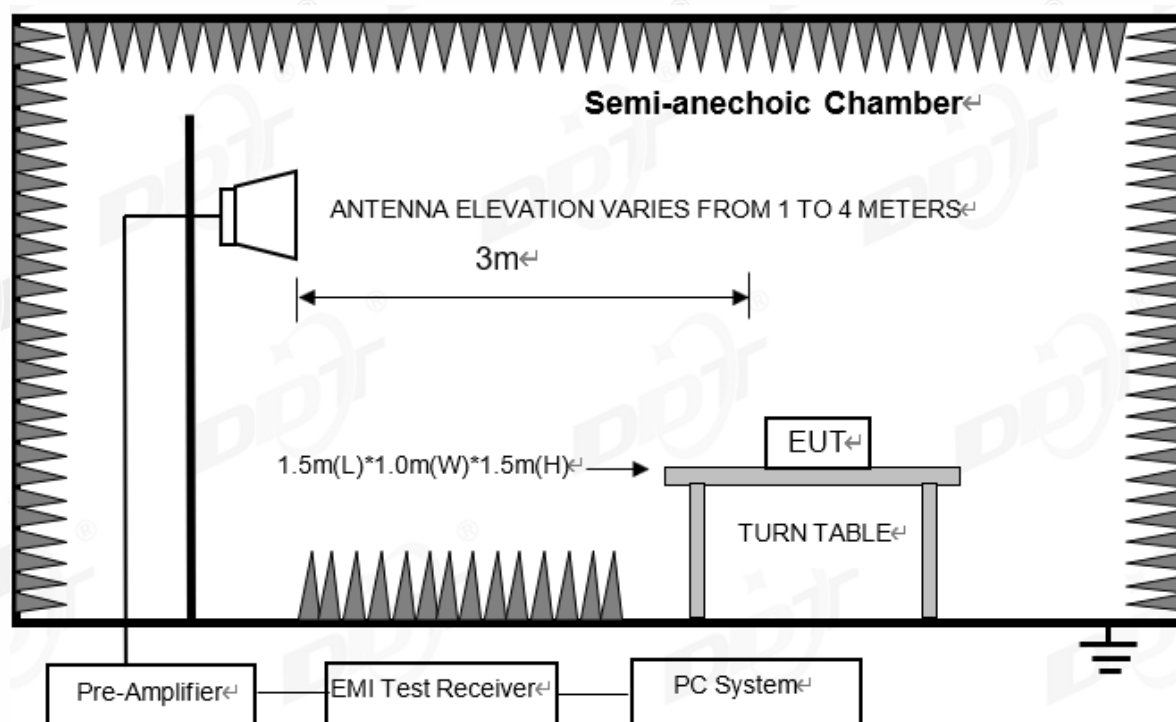

10.2. Limit

All restriction band should comply with 15.209 and RSS-Gen section 8.10, other emission should be at least 20 dB below the fundamental.

10.3. Test procedure

Same with clause 9.3 except change investigated frequency range from 2300 MHz to 2410 MHz and 2470 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

10.4. Test result

Pass. (See below detailed test result)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21110501-2E RDD0007\FCC ABOVE 1G\FCC ABOVE 1G_00001.EMI

Test Date : 2021-11-26

Tested By : Bairong

EUT : LT200 Smart Lighting Tower


Model Number : RDD0007

Power Supply : AC120V/60Hz

Test Mode : TX MODE

Condition : Temp:23.5°,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL

Memo : 2403

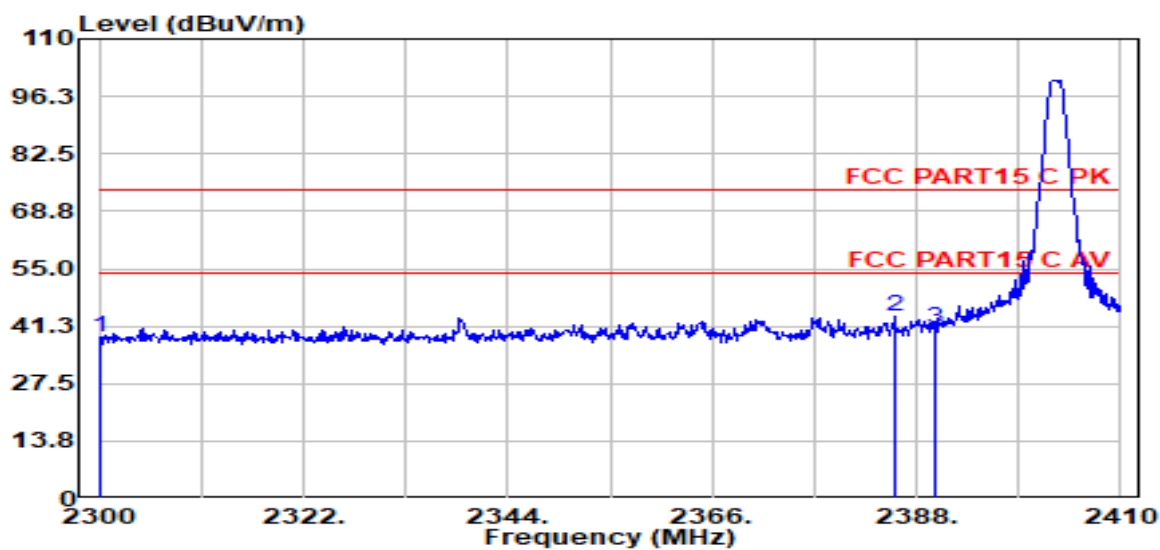

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2300.00	49.56	27.18	4.69	43.00	38.43	74.00	-35.57	Peak	HORIZONTAL
2	2385.58	54.65	27.40	4.79	43.09	43.75	74.00	-30.25	Peak	HORIZONTAL
3	2390.00	51.64	27.41	4.80	43.09	40.76	74.00	-33.24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21110501-2E RDD0007\FCC ABOVE 1G\FCC ABOVE 1G_00002.EMI

Test Date : 2021-11-26

Tested By : Bairong

EUT : LT200 Smart Lighting Tower

Model Number : RDD0007


Power Supply : AC120V/60Hz

Test Mode : TX MODE

Condition : Temp:23.5°,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/VERTICAL

Memo : 2403

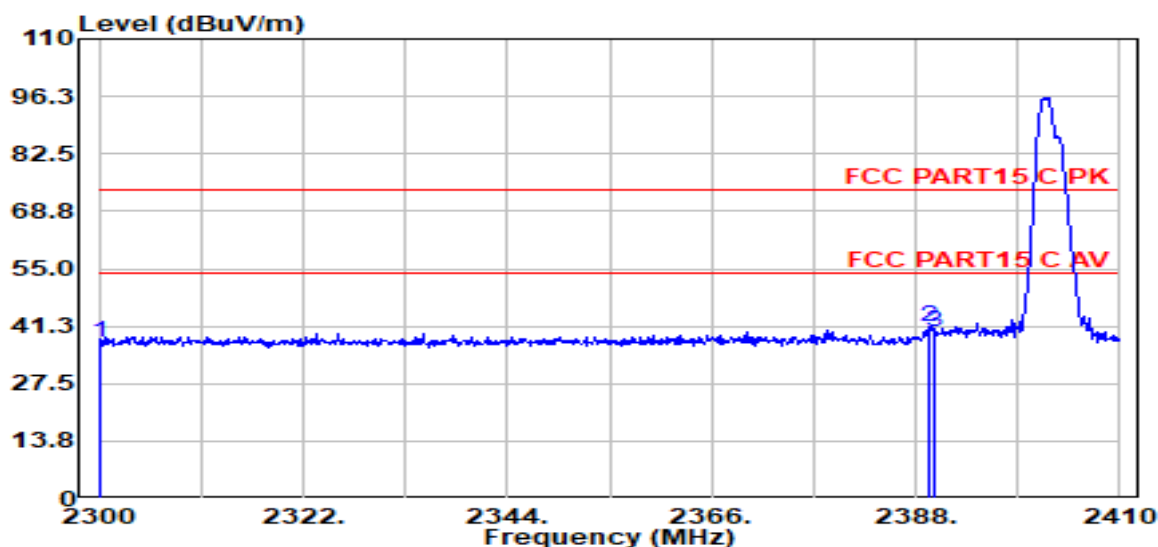

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2300.00	48.50	27.18	4.69	43.00	37.36	74.00	-36.64	Peak	VERTICAL
2	2389.32	52.06	27.41	4.79	43.09	41.17	74.00	-32.83	Peak	VERTICAL
3	2390.00	50.76	27.41	4.80	43.09	39.88	74.00	-34.12	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21110501-2E RDD0007\FCC ABOVE 1G\FCC ABOVE 1G_00003.EMI

Test Date : 2021-11-26

Tested By : Bairong

EUT : LT200 Smart Lighting Tower

Model Number : RDD0007


Power Supply : AC120V/60Hz

Test Mode : TX MODE

Condition : Temp:23.5°,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 2479

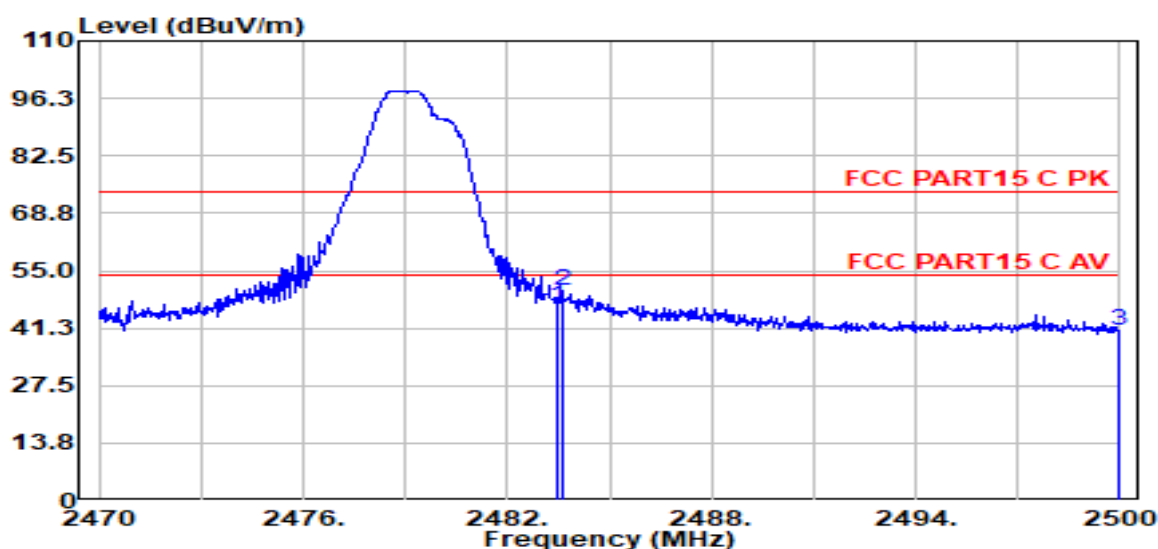

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	57.31	27.66	4.91	43.18	46.69	74.00	-27.31	Peak	HORIZONTAL
2	2483.59	60.84	27.66	4.91	43.18	50.22	74.00	-23.78	Peak	HORIZONTAL
3	2500.00	51.07	27.70	4.93	43.20	40.50	74.00	-33.50	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\2021 report data\Q21110501-2E RDD0007\FCC ABOVE 1G\FCC ABOVE 1G_00004.EMI

Test Date : 2021-11-26

Tested By : Bairong

EUT : LT200 Smart Lighting Tower

Model Number : RDD0007


Power Supply : AC120V/60Hz

Test Mode : TX MODE

Condition : Temp:23.5°,Humi:55%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/VERTICAL

Memo : 2479

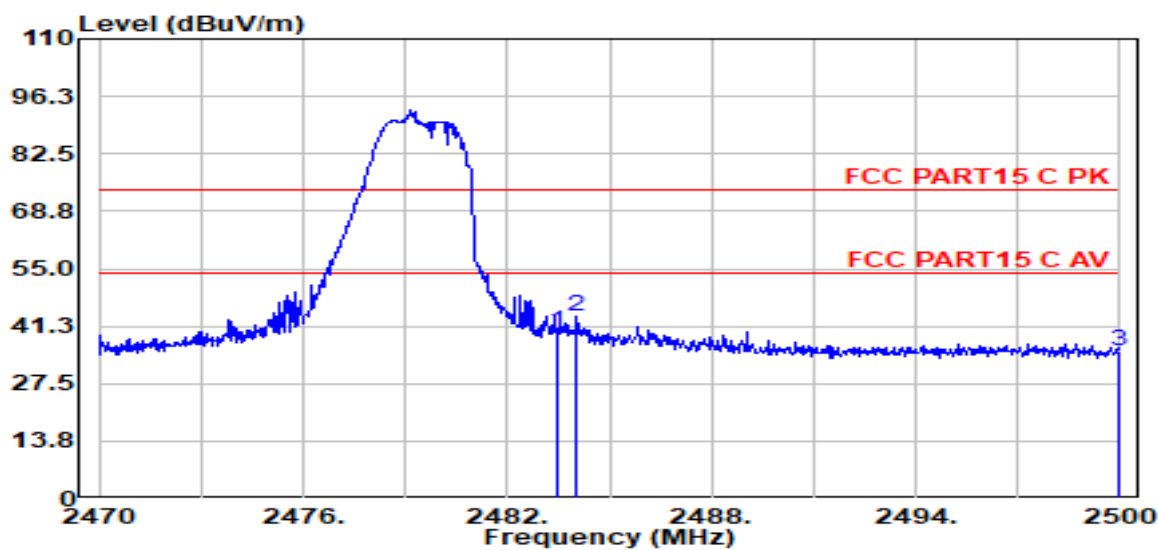

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	50.51	27.66	4.91	43.18	39.89	74.00	-34.11	Peak	VERTICAL
2	2484.04	54.04	27.66	4.91	43.18	43.43	74.00	-30.57	Peak	VERTICAL
3	2500.00	45.95	27.70	4.93	43.20	35.38	74.00	-38.62	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

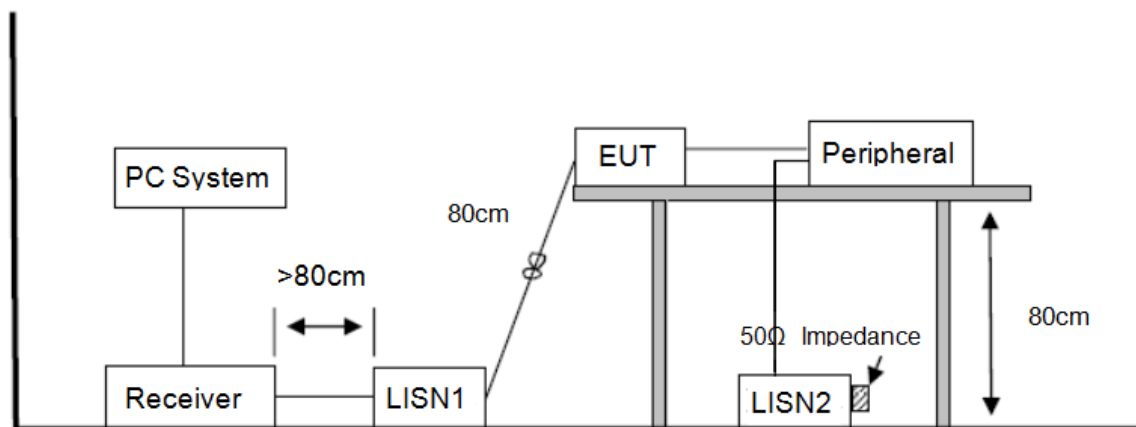

11.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80 cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.4. Test result

Pass. (See below detailed test result)


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2021 CE report date\Q21110501-2E Saber360\CE.EM6**
Test Date : 2021-11-29 **Tested By** : Bairong
EUT : LT200 Smart Lighting Tower **Model Number** : RDD0007
Power Supply : AC 120V/60Hz **Test Mode** : TX Mode
Condition : TEMP:24.8°C, RH:56.7%, BP:101.4kPa **LISN** : 2021 1# ENV216/NEUTRAL
Memo :

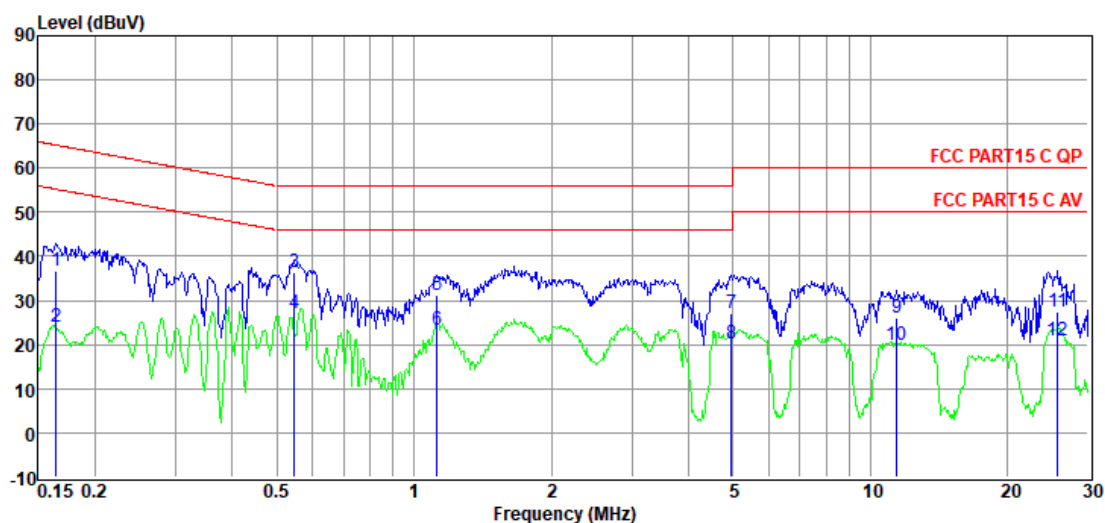


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	16.96	9.80	0.01	9.92	36.69	65.25	-28.56	QP	NEUTRAL
2	0.16	4.39	9.80	0.01	9.92	24.12	55.25	-31.13	Average	NEUTRAL
3	0.55	17.02	9.58	0.02	9.91	36.53	56.00	-19.47	QP	NEUTRAL
4	0.55	7.55	9.58	0.02	9.91	27.06	46.00	-18.94	Average	NEUTRAL
5	1.12	11.61	9.68	0.03	9.89	31.21	56.00	-24.79	QP	NEUTRAL
6	1.12	3.64	9.68	0.03	9.89	23.24	46.00	-22.76	Average	NEUTRAL
7	4.95	7.50	9.72	0.06	9.93	27.21	56.00	-28.79	QP	NEUTRAL
8	4.95	0.67	9.72	0.06	9.93	20.38	46.00	-25.62	Average	NEUTRAL
9	11.44	6.32	9.73	0.12	9.94	26.11	60.00	-33.89	QP	NEUTRAL
10	11.44	0.28	9.73	0.12	9.94	20.07	50.00	-29.93	Average	NEUTRAL
11	25.73	7.59	9.86	0.19	9.98	27.62	60.00	-32.38	QP	NEUTRAL
12	25.73	0.89	9.86	0.19	9.98	20.92	50.00	-29.08	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2021 CE report date\Q21110501-2E Saber360\CE.EM6**
Test Date : 2021-11-29 **Tested By** : Bairong
EUT : LT200 Smart Lighting Tower **Model Number** : RDD0007
Power Supply : AC 120V/60Hz **Test Mode** : TX Mode
Condition : TEMP:24.8°C, RH:56.7%, BP:101.4kPa **LISN** : 2021 1# ENV216/LINE
Memo :

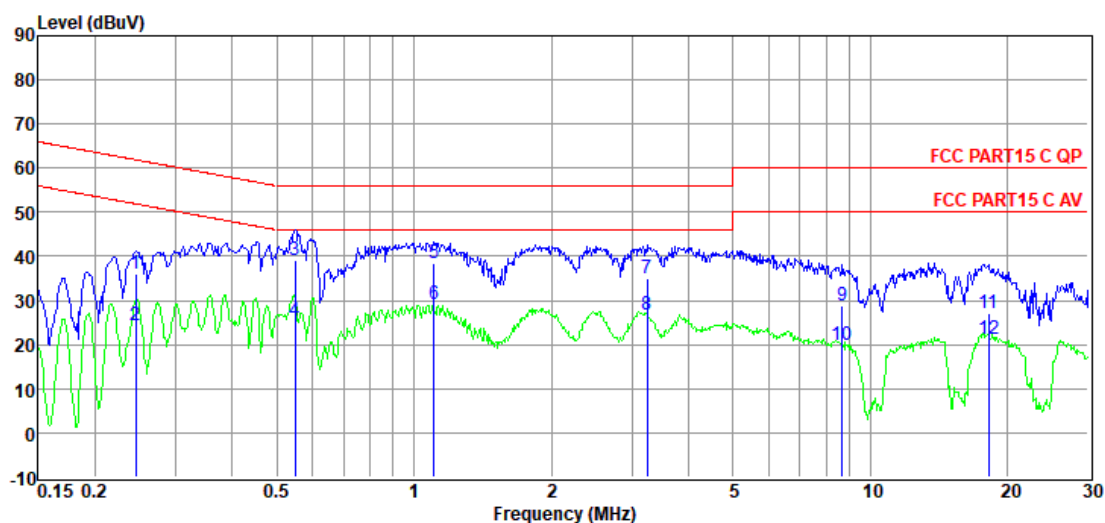

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.25	16.26	9.76	0.02	9.92	35.96	61.91	-25.95	QP	LINE
2	0.25	4.61	9.76	0.02	9.92	24.31	51.91	-27.60	Average	LINE
3	0.55	19.73	9.57	0.02	9.91	39.23	56.00	-16.77	QP	LINE
4	0.55	6.00	9.57	0.02	9.91	25.50	46.00	-20.50	Average	LINE
5	1.11	18.95	9.59	0.03	9.89	38.46	56.00	-17.54	QP	LINE
6	1.11	9.74	9.59	0.03	9.89	29.25	46.00	-16.75	Average	LINE
7	3.24	15.61	9.57	0.05	9.91	35.14	56.00	-20.86	QP	LINE
8	3.24	7.25	9.57	0.05	9.91	26.78	46.00	-19.22	Average	LINE
9	8.68	9.21	9.50	0.10	9.94	28.75	60.00	-31.25	QP	LINE
10	8.68	0.44	9.50	0.10	9.94	19.98	50.00	-30.02	Average	LINE
11	18.14	7.40	9.67	0.16	9.95	27.18	60.00	-32.82	QP	LINE
12	18.14	1.53	9.67	0.16	9.95	21.31	50.00	-28.69	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

12.2. Result

There is no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.5 dBi.