

## FCC EVALUATION REPORT FOR CERTIFICATION

*KOREA Standard Technology*

*Test report No.: KST-FCC0314*

**Manufacturer's Name :** Hyundai Corporation

**Manufacturer's Address :** 140-2, Kye-Dong, Chongro-Gu, Seoul, 110-973, Korea

**EUT's:**

**FCC ID :** RQQHLT-3000

**Product Name :** LCD Monitor

**Model Number(s) :** HLT-3000

**Product Options :** N/A

**Category :** FCC Part 15 subpart B  
Class B Computing Digital Device

### Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Date : December 27, 2003.**

---

**Tested by:**



---

Kim, Ha-Hyoung

**Approved by:**



---

Lee, Weon-Woo

## Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

### Appendix. Schematics

Specifications.

## 1. Description of Device

- |                               |  |
|-------------------------------|--|
| 1) Kind of equipment:         | LCD Monitor  |
| 2) FCC ID:                    | RQQHLT-3000  |
| 3) Model Name:                | HLT-3000   |
| 4) Serial No.:                | None   |
| 5) Type of Sample Tested:     | Pre-production   |
| 6) High Frequency Used:       | 8.000 / 12.000 / 13.500 MHz<br>18.432 / 20.250 / 25.000 MHz                |
| 7) Adapter                    | Model name: None<br>Manufacturer: None<br>Serial no: None                  |
| 8) Power Rating:              | 1phase AC100-240V, 50/60Hz, 280W<br>Output: -                              |
| 9) Tested Power supply:       | 1phase AC120V, 60Hz  |
| 10) Date of Manufacture:      | November, 2003   |
| 11) Manufacture:              | Hyundai Corporation  |
| 12) Description of Operating: | Scroll All "H" Character<br>Resolution 1024*768 , Vertical Frequency: 75Hz |
| 13) Dates of Test:            | December 22, 2003  |
| 14) Place of Tests:           | Korea Standard Technology EMC site   |
| 15) Test Report No:           | KST-FCC0314  |

## 2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology ( KOSTEC Co., Ltd)

Head office:

302 City Bild, 1600-3 Kwanyang-dong, Dongan-gu, Anyang-shi, Kyunggi-do, Korea

Telephone No : 82-31-388-2051

Facsimile No: 82-31-388-2052

Test Lab

:180-254, Annyung-Ri, Taeon-Yup, Hwasung-shi, Kyunggi-do, Korea

Telephone No : 82-31-222-4251

Facsimile No: 82-31-222-4252

**MIC**(Ministry of Information and Communication) No: **KR0042**

**FCC** Filing No. : **525762**

**VCCI** Membership Number : **2005**

**VCCI** Registration Number : **R-1657 / C-1763**


# EMC TEST REPORT



Report reference No: KST-FCC0314

## 3. MAP

Korea

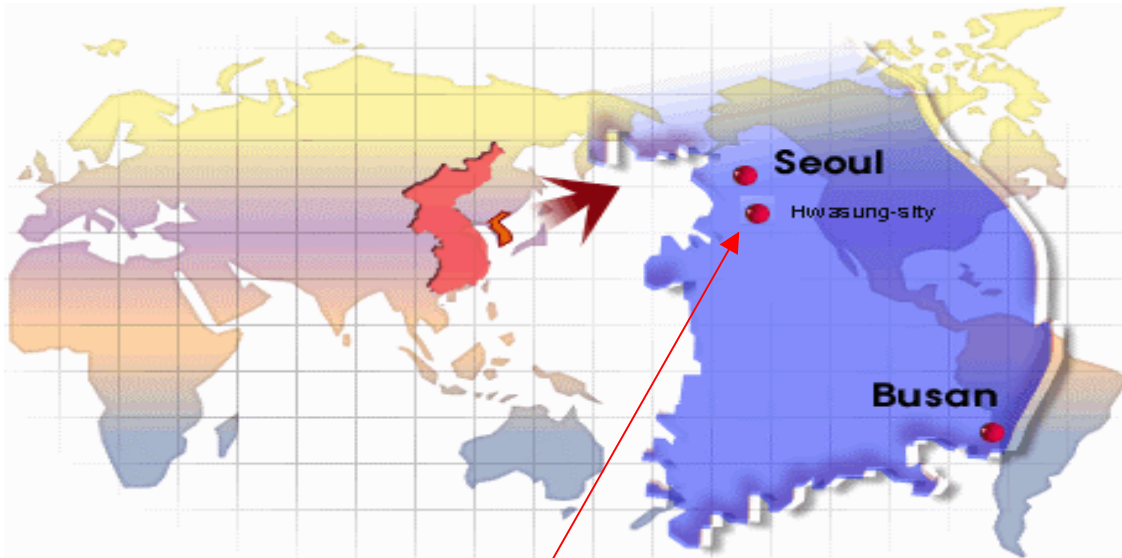

Hwasung-shi (open area test site)



KOSTEC Co.,Ltd.  
180-254,Annyung-Ri, Taeon-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kostecclab.com>

Page : 5 of 25  
December 27, 2003

## 4. Test System Configuration

### Operation Environment

Ambient	<u>Temperature</u> ( ° C )	<u>Humidity</u> ( % )	<u>Pressure</u> ( hPa )
10m Open Area site	8.5	38	1019
Shielded room:	13.8	42	1018

### Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10m Open Area Site: Radiated Emission

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, its imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

### sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32\text{dBuV}$$

## 5. Description of E.U.T.

### Product Description

Manufactured By:	Hyundai Corporation
Address:	140-2, Kye-Dong, Chongro-Gu, Seoul, 110-973, Korea
Model:	HLT-3000
Serial Number:	None

### Configuration of EUT

Description	Manufacturer	Model / Part #	Serial Number
LCD Panel	LG.PHILIPS LCD	LC300W01	30034P3N02495
Main Board	Hyundai Corporation	LCD30	None
Power Board	Hae Pyung Elelectronics	U200-M30LZ10/B	H037ALA15020
Inverter Board	K.T.Y	KLS-300	2921
OSD Board	Hyundai Corporation	None	None
Component Board	K.J.Y	LC-30IE10	None
Tuner Board	H.Y.J	LC-30IU10	030819
Speaker	Hyundai Corporation	None	None
Remote Control	Hyundai Corporation	None	None

### EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Y	1.5	-	AC INLET	Main power source	EUT
VGA In	Y	1.5	yes	D-sub	EUT	PC
S-Video	Y	1.0	-	Din	EUT	-
DVI	Y	1.0	Yes	D-sub	EUT	-
Audio	Y	1.5	-	Jack	EUT	Speaker

### Operating conditions

The operating mode/system were as follows in details:

Operating: After Connected from personal comput to E.U.T by RGB cable(D-sub 15 pin).  
And then use to "H" pattern program for data transmission and continuously 'H' pattern displayed on the LCD Monitor.

# EMC TEST REPORT




Report reference No: KST-FCC0314

## Peripherals

No	Description	Manufacturer	Model / Part #	Serial Number
1	LCD TV	Hyundai Corporation	HLT-3000	None
2	Speaker	Hyundai Corporation	None	None
3	Remote Controller	Hyundai Corporation	None	None
4	PC	Hanmi	HT-901	None
5	Printer	HP	C2605A	SG55M1B0RN
6	Ac/dc adapter	HP	Deskwriter	None
7	Keyboard	Samsung	SEM-DT35	19063587
8	Mouse	A4TECH	OK-720	None

## E.U.T Test Configuration (example)

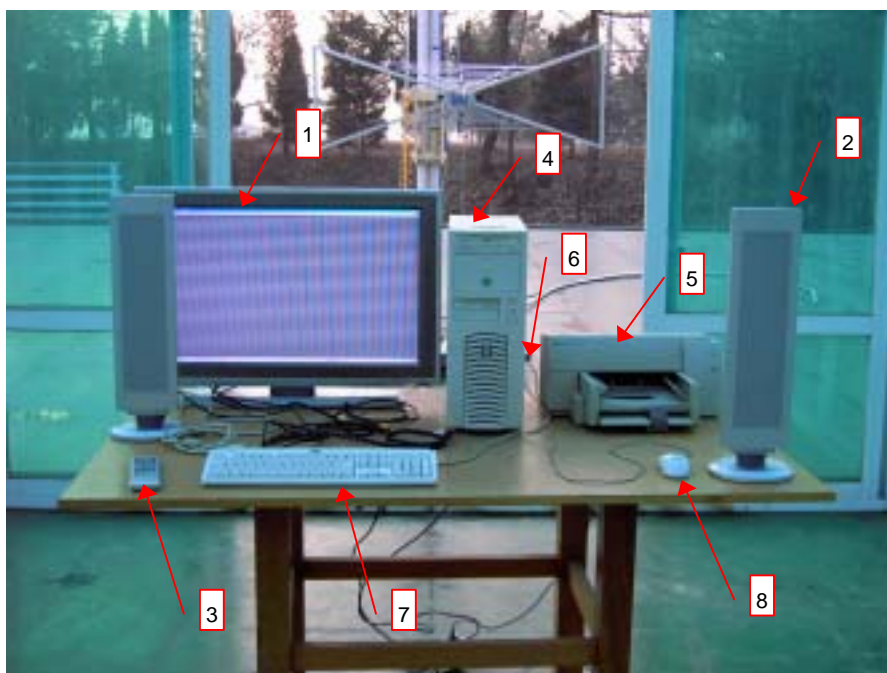

## 6. Summary of test results

Modification to the E.U.T.

- None

Result : **- PASS**

KOSTEC Co.,Ltd.  
180-254,Annyung-Ri, Taeon-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 8 of 25  
December 27, 2003



## 7. TEST RESULTS

### 7.1 Conducted emission

#### Measurement procedure

##### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4m above the reference ground plane. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

#### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2003.03.21	
L.I.S.N.	ESH2-Z5	100044	R&S	2003.04.25	
	ESH2-Z5	100147	R&S	2003.04.25	

#### Measurement uncertainty

Conducted Emission measurement :  $\pm 2.4$  (K=2)

#### Test data

FREQ. (MHz)	LEVEL(dB $\mu$ V)		LINE Pol	Loss (dB)	LIMIT(dB $\mu$ V)		MARGIN(dB $\mu$ V)	
	QP	AV			QP	AV	QP	AV
0.154	54.35	50.01	N	0.08	66.00	56.00	11.73	6.07
0.182	46.78	29.53	N	0.06	66.00	56.00	19.28	26.53
0.306	46.34	32.86	L	0.29	66.00	56.00	19.95	23.43
0.542	30.86	28.63	L	0.08	56.00	46.00	25.22	17.45
12.346	33.38	28.04	L	0.43	60.00	50.00	27.05	22.39
20.562	37.68	32.93	N	1.77	60.00	50.00	24.09	18.84
24.674	34.30	29.64	N	2.20	60.00	50.00	27.90	22.56

\* Level = test receiver reading value

\* Loss = LISN insertion Loss + Cable Loss


# EMC TEST REPORT




Report reference No: KST-FCC0314

## Conducted emission test graph

Line. Live

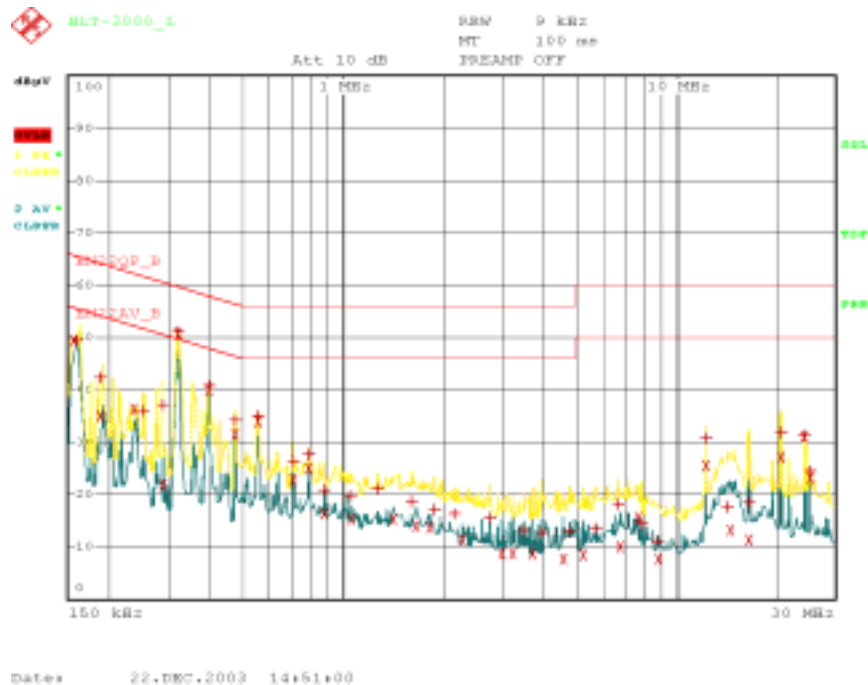

Line. Neutral

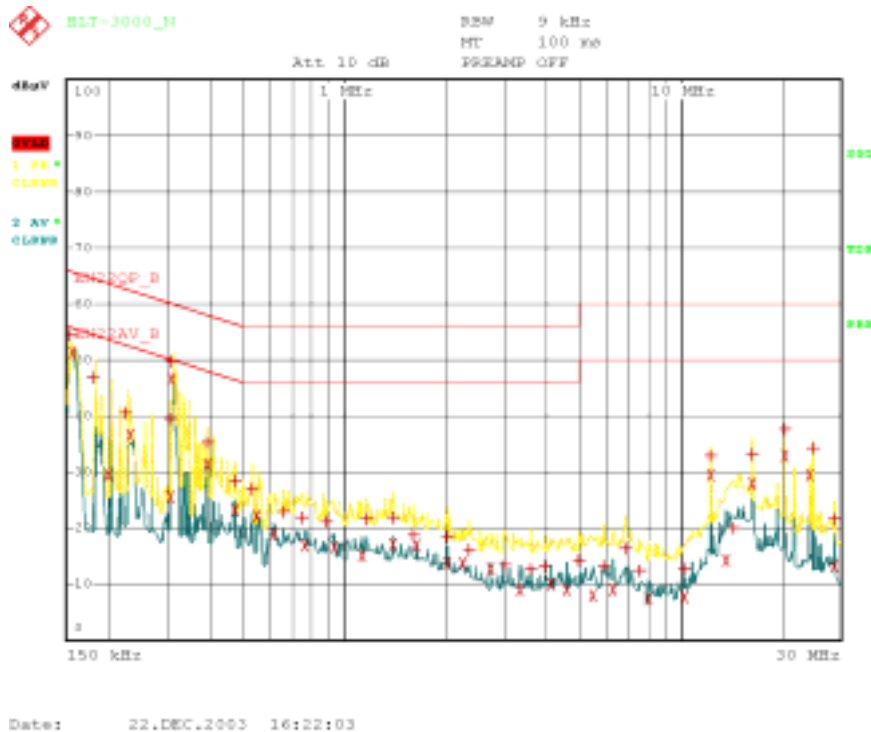

# EMC TEST REPORT



Report reference No: KST-FCC0314

## 7.2 Radiated Emission

### Measurement procedure

A pretest was performed at 3m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2004.3.17
Ultra broadband antenna	HL562	100075	R&S	2004.3.18
Matching network	RAM	358.5414.02	R&S	-
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10m Open area site	none	none	KOSTEC Lab	-
chamber(3m)	none	none	FRANCONIA	-

### Measurement uncertainty

Radiated Emission measurement :  
30-300MHz +3.96dB / -4.04dB  
300-1000MHz +3.04dB / -3.00dB

Test data : ( "H" pattern scroll ) – PC Mode

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (. )	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dB)	Margin (dB)
75.36	19.10	V	2.00	260	7.70	3.00	29.80	40.0	10.20
161.02	13.94	H	3.60	180	7.48	4.48	25.90	43.5	17.60
194.05	15.44	H	3.20	170	7.20	4.86	27.50	43.5	16.00
377.94	14.67	H	3.00	280	12.91	7.22	34.80	46.0	11.20
431.92	13.06	H	2.70	160	14.13	7.71	34.90	46.0	11.10
600.00	9.60	V	1.80	180	17.00	9.30	35.90	46.0	10.10
700.00	9.40	H	1.90	220	18.40	10.00	37.80	46.0	8.20
800.00	7.10	H	1.60	160	19.60	10.80	37.50	46.0	8.50

Reading = Test receiver reading / P= antenna Polarization / H=antenna H  
A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss  
Result = reading + antenna + loss / Margin = Limit - result  
\* Receiving Antenna Mode: Horizontal, Vertical / \* Test site: 3m Open area site