


EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

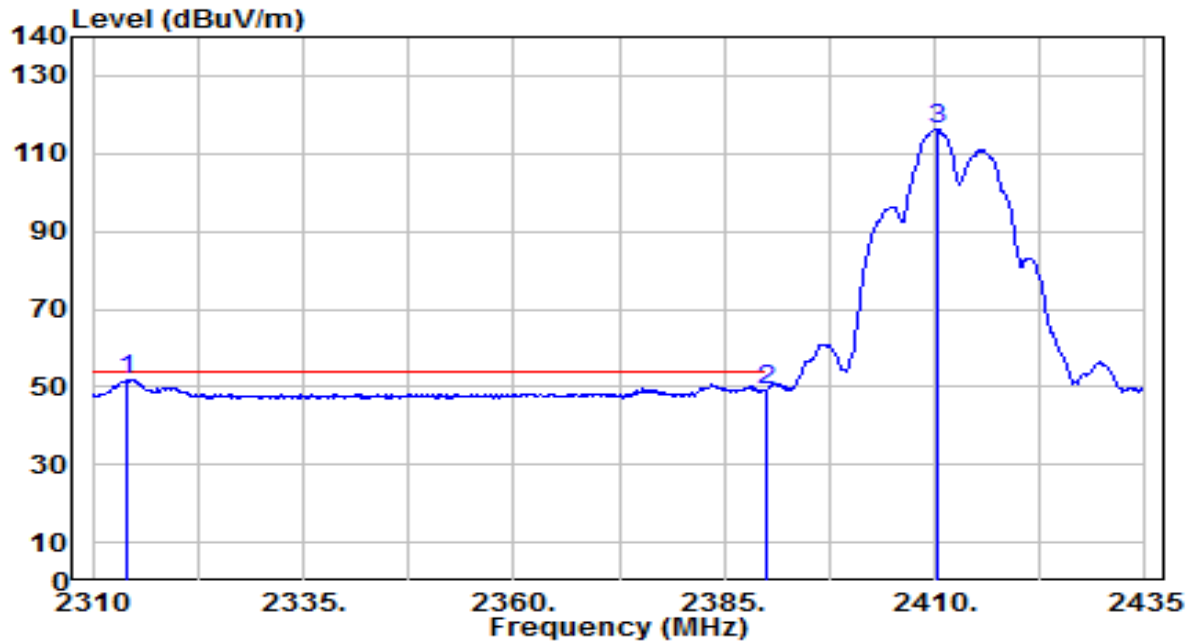


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2314.125	20.35	31.66	52.02	-1.98	54.00	210	65	Average
2		2390.000	16.95	31.95	48.90	-5.10	54.00	210	65	Average
3		2410.250	84.28	32.02	116.31	N/A	N/A	210	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

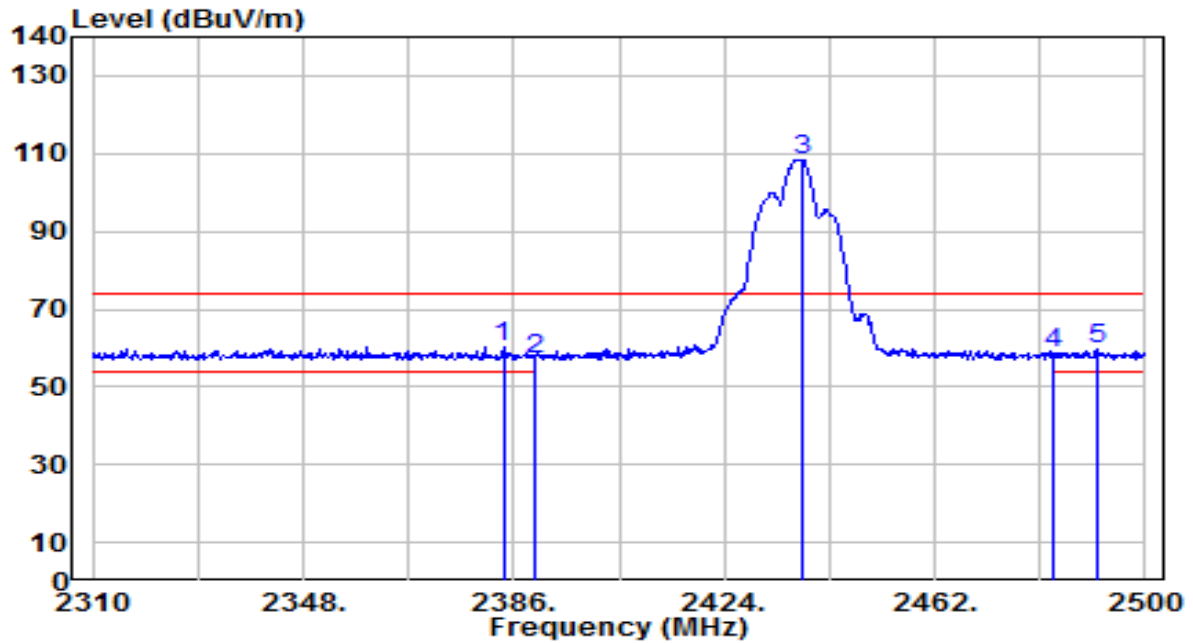


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.100	28.15	31.93	60.07	-13.93	74.00	195	345	Peak
2		2390.000	25.11	31.95	57.05	-16.95	74.00	195	345	Peak
3		2438.060	76.43	32.13	108.56	N/A	N/A	195	345	Peak
4		2483.500	26.40	32.30	58.70	-15.30	74.00	195	345	Peak
5		2491.450	27.12	32.33	59.45	-14.55	74.00	195	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

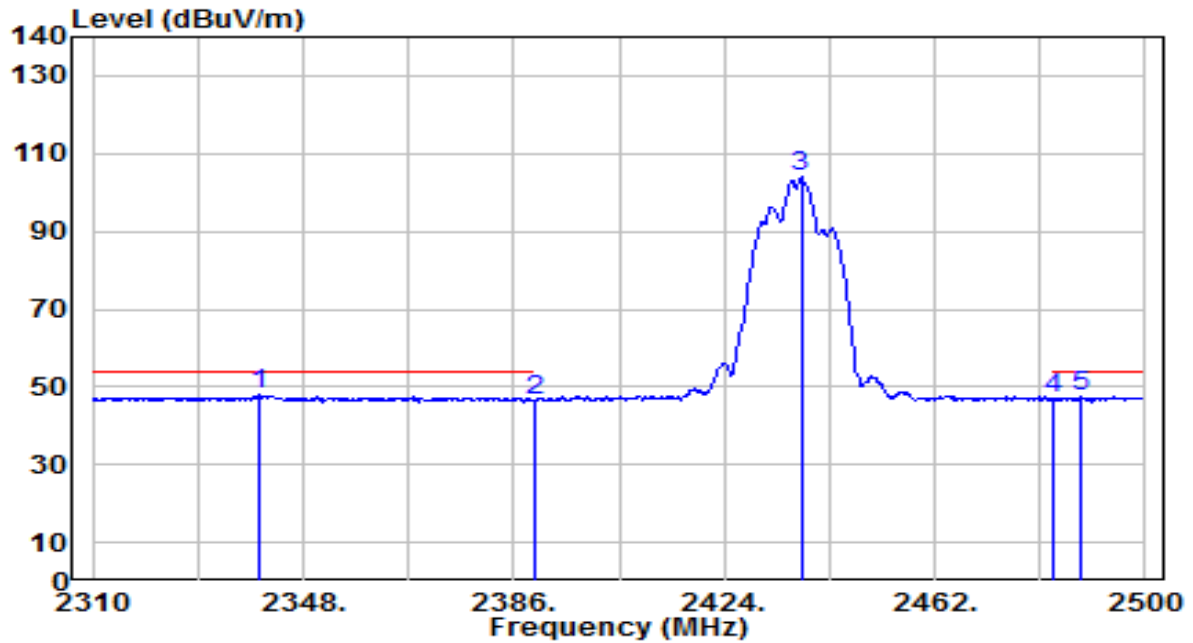


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.210	16.11	31.76	47.88	-6.12	54.00	195	345	Average
2		2390.000	14.57	31.95	46.51	-7.49	54.00	195	345	Average
3		2437.870	71.87	32.13	104.00	N/A	N/A	195	345	Average
4		2483.500	14.58	32.30	46.88	-7.12	54.00	195	345	Average
5		2488.410	15.03	32.32	47.35	-6.65	54.00	195	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

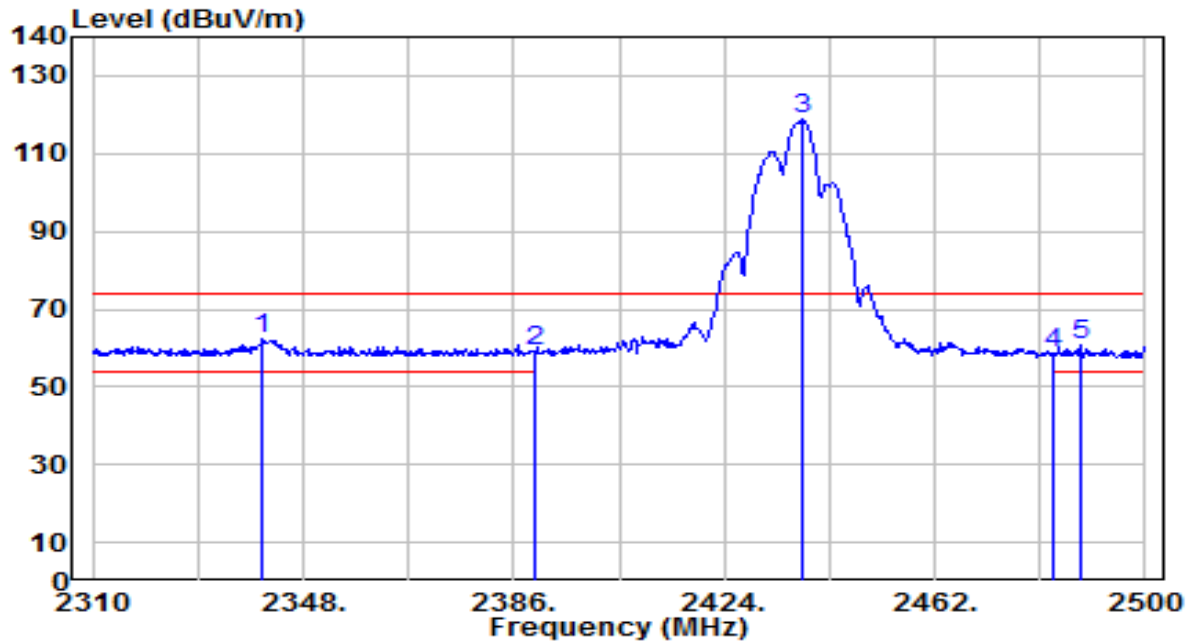


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.590	30.48	31.76	62.25	-11.75	74.00	185	70	Peak
2		2390.000	27.01	31.95	58.95	-15.05	74.00	185	70	Peak
3		2438.250	86.57	32.13	118.70	N/A	N/A	185	70	Peak
4		2483.500	26.09	32.30	58.39	-15.61	74.00	185	70	Peak
5		2488.220	28.26	32.32	60.57	-13.43	74.00	185	70	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

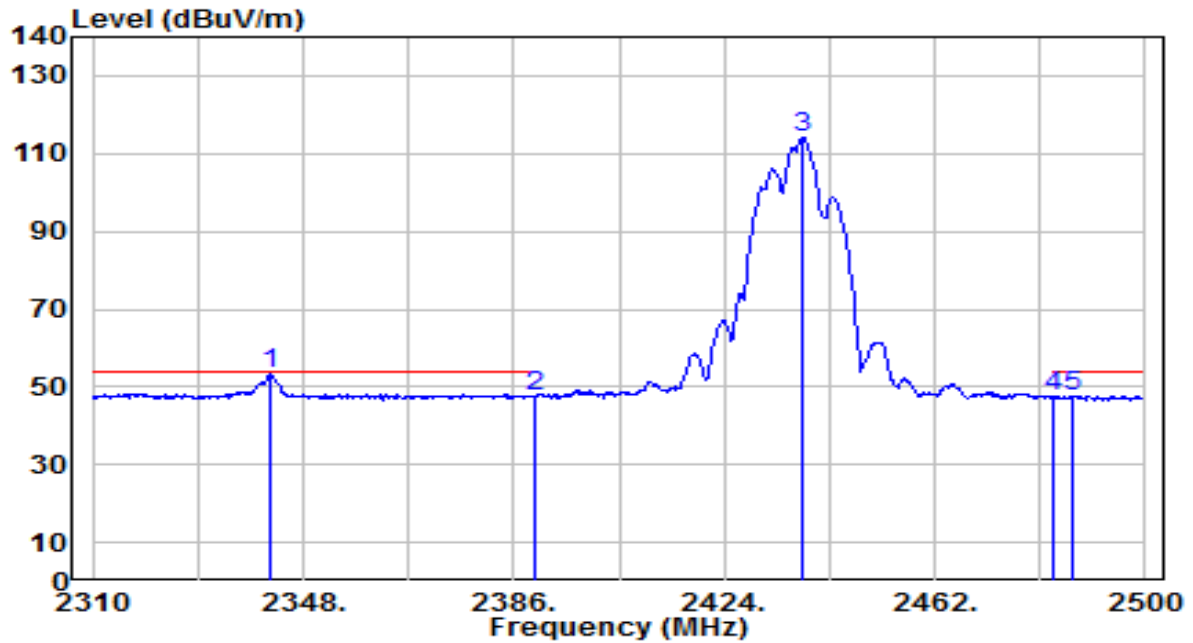


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.920	21.39	31.77	53.16	-0.84	54.00	185	70	Average
2		2390.000	15.67	31.95	47.62	-6.38	54.00	185	70	Average
3		2438.060	82.09	32.13	114.21	N/A	N/A	185	70	Average
4		2483.500	15.24	32.30	47.54	-6.46	54.00	185	70	Average
5		2487.080	15.40	32.31	47.71	-6.29	54.00	185	70	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

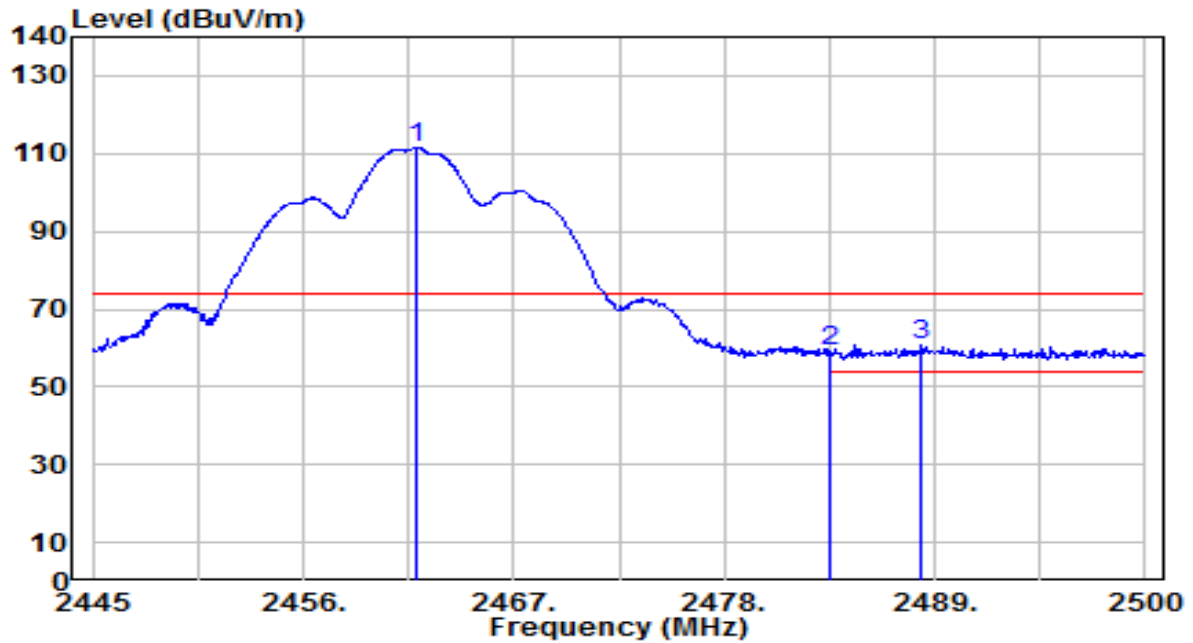


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.940	79.29	32.22	111.51	N/A	N/A	185	355	Peak
2	2483.500	26.62	32.30	58.92	-15.08	74.00	185	355	Peak
3	* 2488.340	28.26	32.32	60.57	-13.43	74.00	185	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

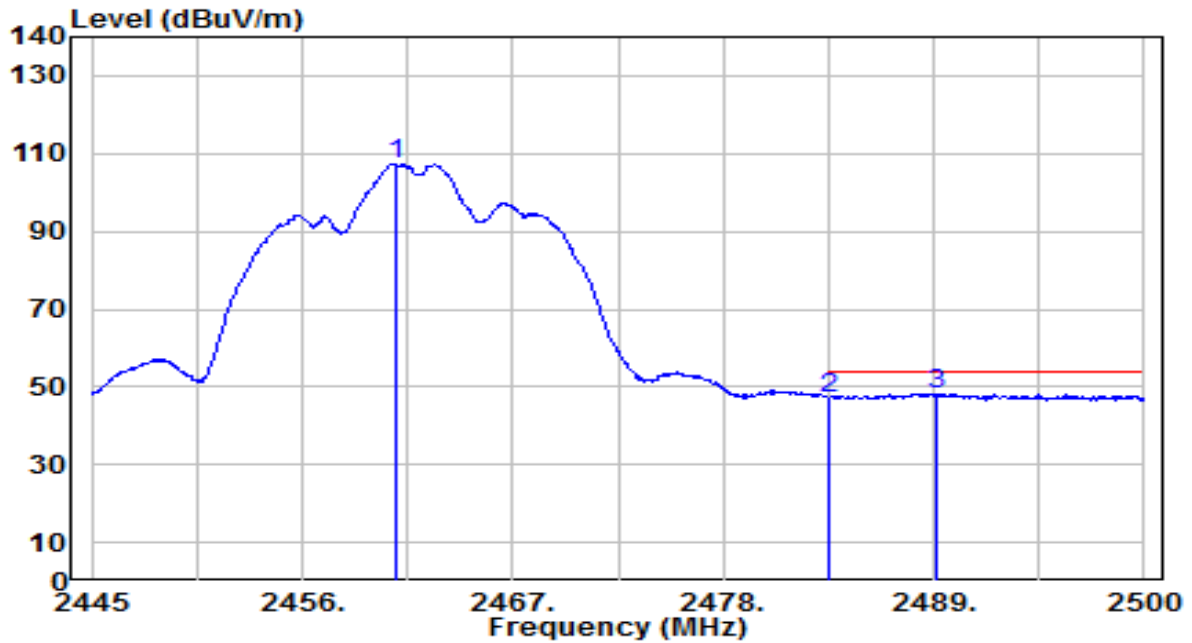


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.895	75.23	32.21	107.45	N/A	N/A	185	355	Average
2	2483.500	14.89	32.30	47.19	-6.81	54.00	185	355	Average
3	* 2489.110	16.02	32.32	48.34	-5.66	54.00	185	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

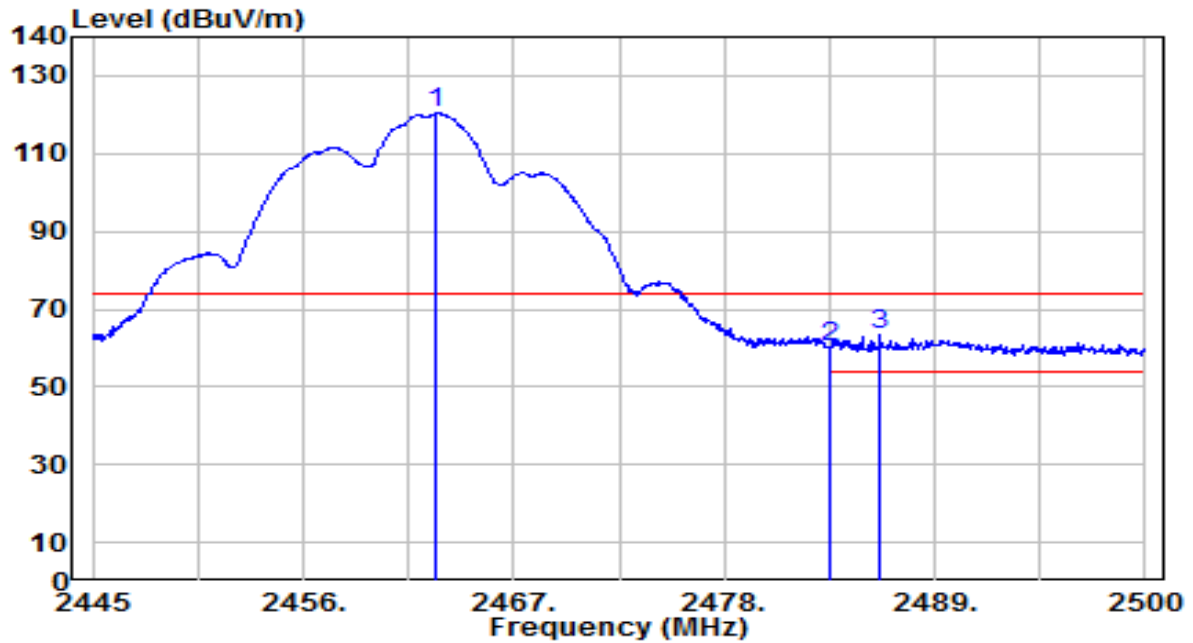


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.985	88.02	32.22	120.24	N/A	N/A	240	110	Peak
2	2483.500	27.75	32.30	60.05	-13.95	74.00	240	110	Peak
3	* 2486.140	30.83	32.31	63.14	-10.86	74.00	240	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

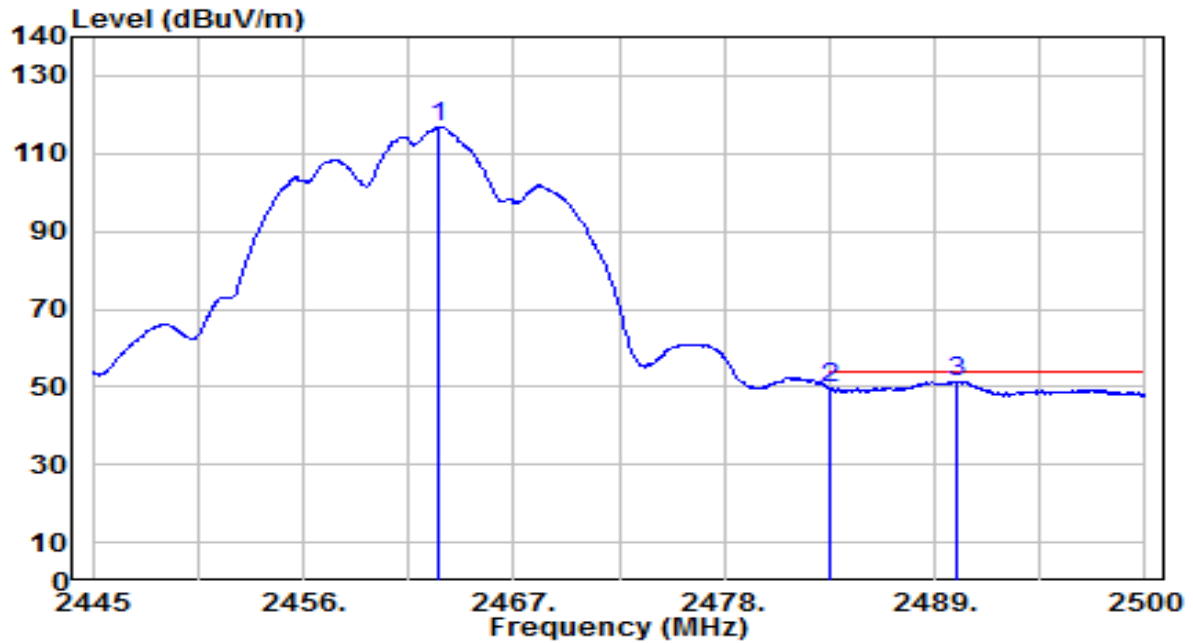


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.095	84.60	32.22	116.83	N/A	N/A	240	110	Average
2	2483.500	17.49	32.30	49.79	-4.21	54.00	240	110	Average
3	* 2490.100	19.18	32.32	51.50	-2.50	54.00	240	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

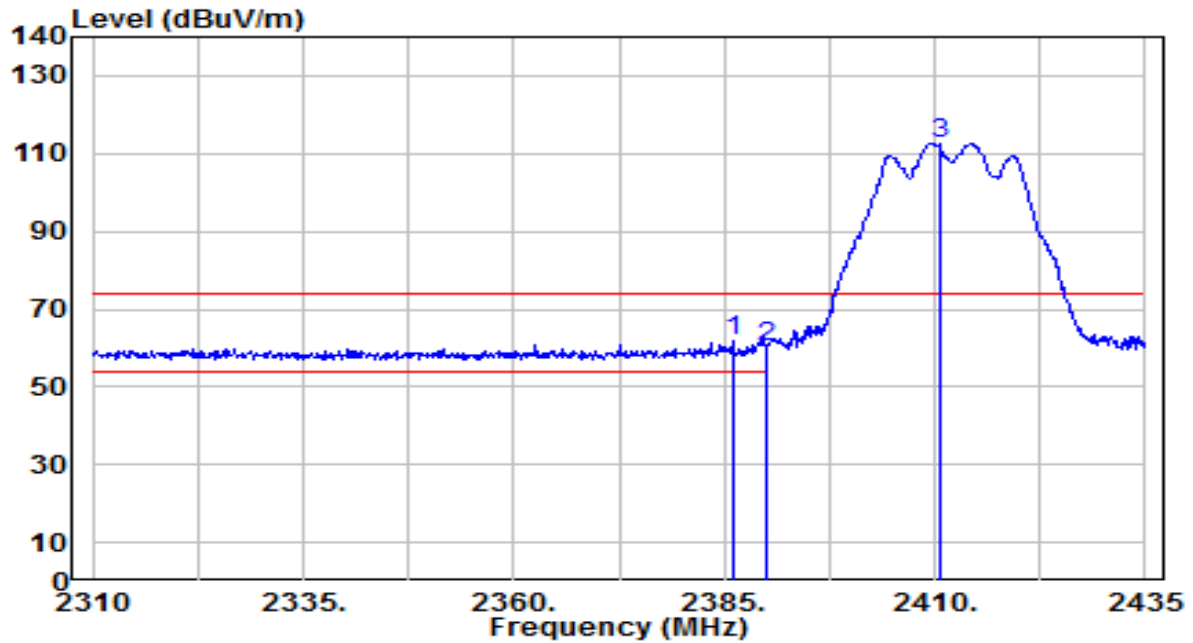


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	29.80	31.93	61.73	-12.27	74.00	175	355	Peak
2		2390.000	28.43	31.95	60.38	-13.62	74.00	175	355	Peak
3		2410.625	80.75	32.03	112.78	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

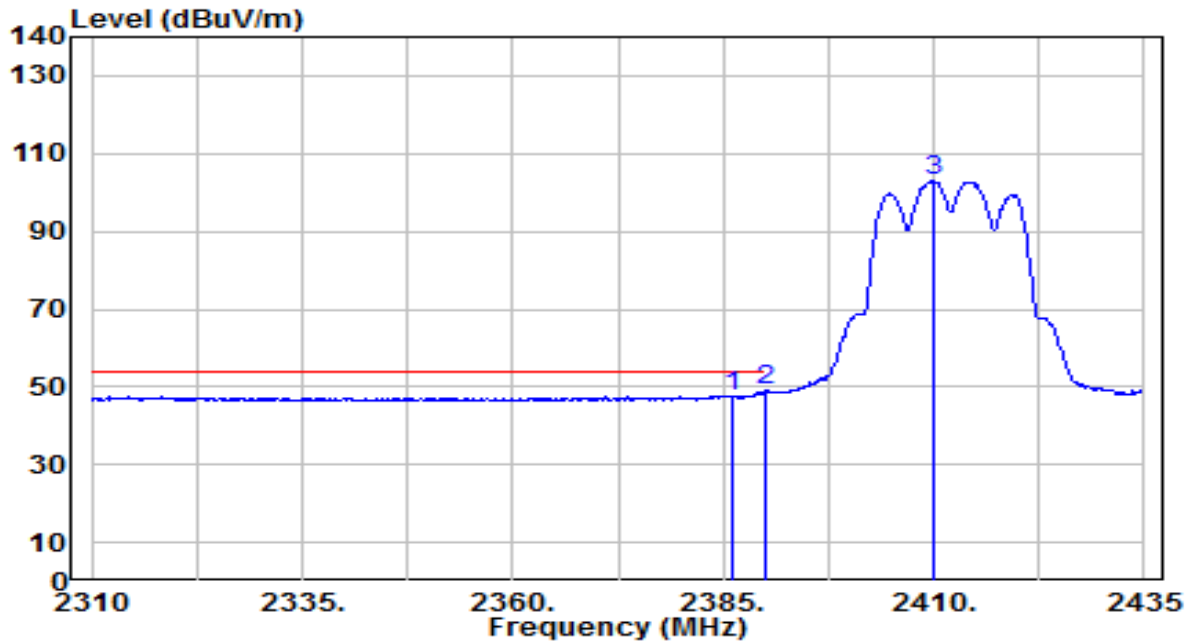


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.000	15.77	31.93	47.71	-6.29	54.00	175	355	Average
2	*	2390.000	17.39	31.95	49.34	-4.66	54.00	175	355	Average
3		2410.000	71.04	32.02	103.07	N/A	N/A	175	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

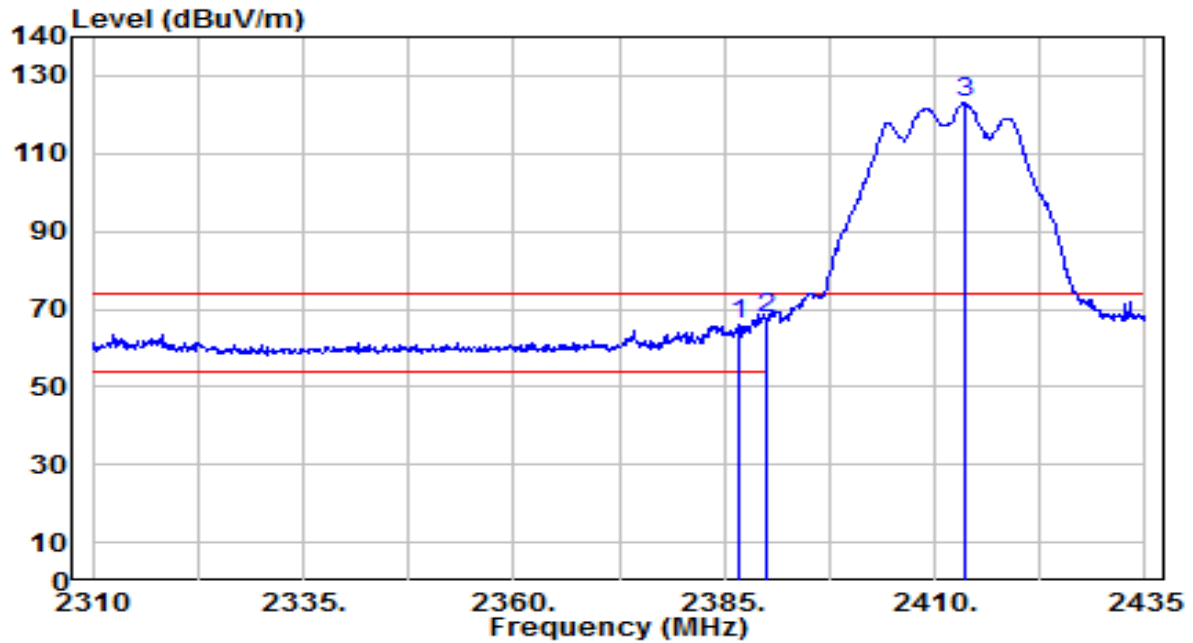


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.625	34.13	31.94	66.06	-7.94	74.00	220	65	Peak
2	*	2390.000	35.84	31.95	67.78	-6.22	74.00	220	65	Peak
3		2413.500	90.84	32.04	122.87	N/A	N/A	220	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

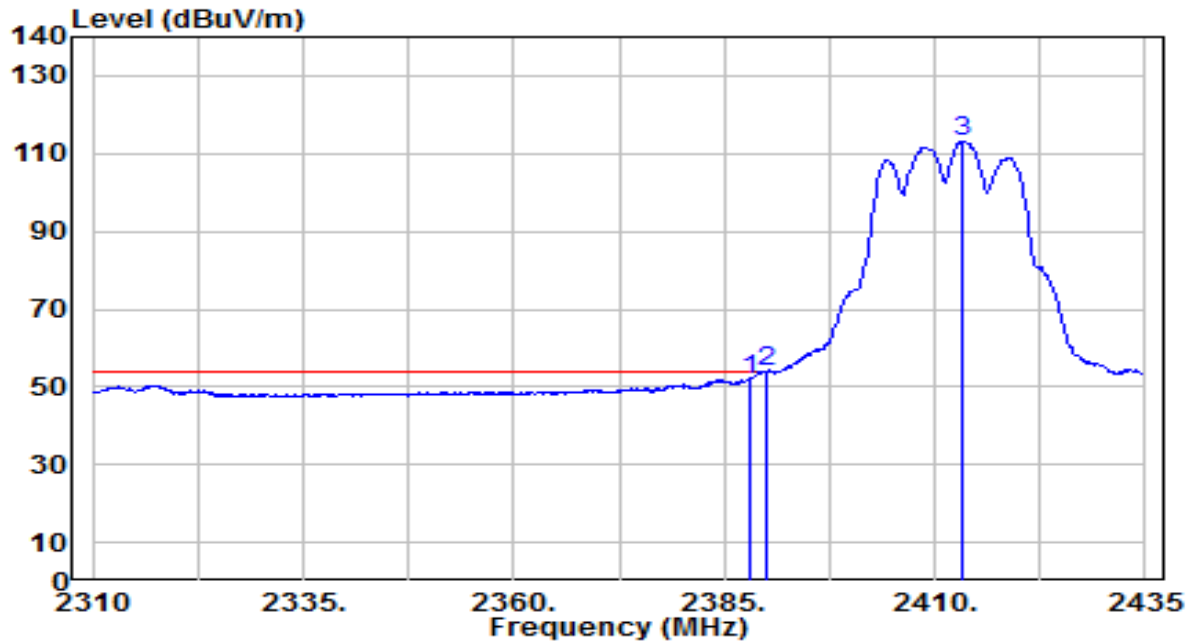


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	20.09	31.94	52.03	-1.97	54.00	220	65	Average
2	*	2390.000	21.79	31.95	53.74	-0.26	54.00	220	65	Average
3		2413.250	81.10	32.04	113.13	N/A	N/A	220	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

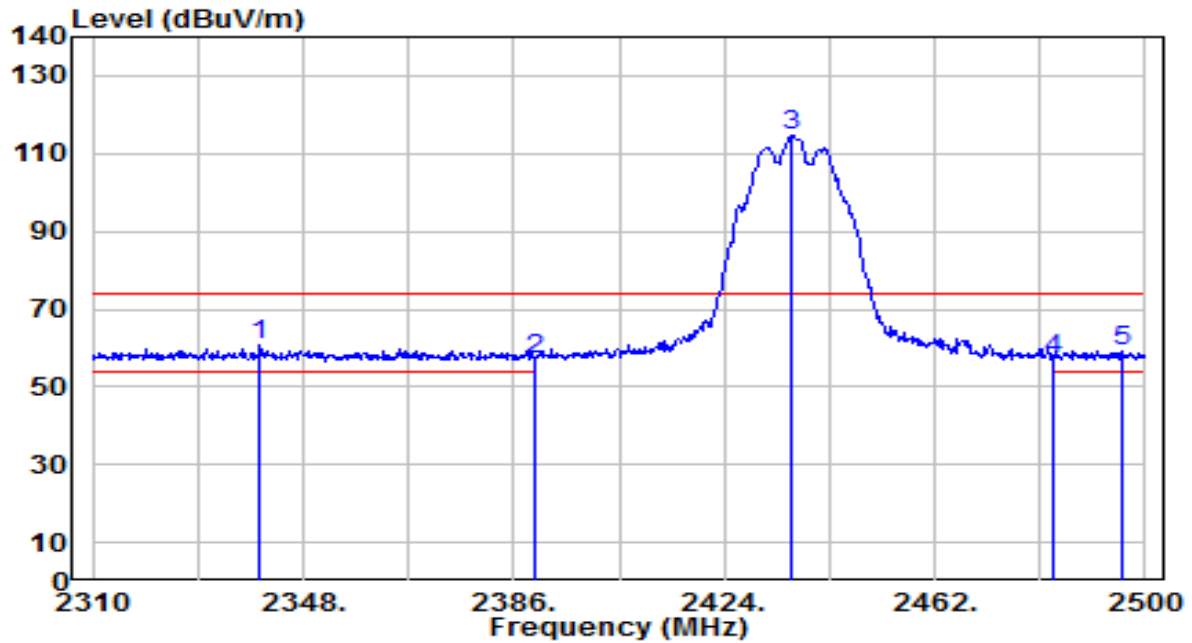


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.210	29.09	31.76	60.85	-13.15	74.00	195	345	Peak
2		2390.000	25.36	31.95	57.31	-16.69	74.00	195	345	Peak
3		2436.350	82.69	32.12	114.81	N/A	N/A	195	345	Peak
4		2483.500	24.94	32.30	57.24	-16.76	74.00	195	345	Peak
5		2495.630	26.70	32.34	59.05	-14.95	74.00	195	345	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

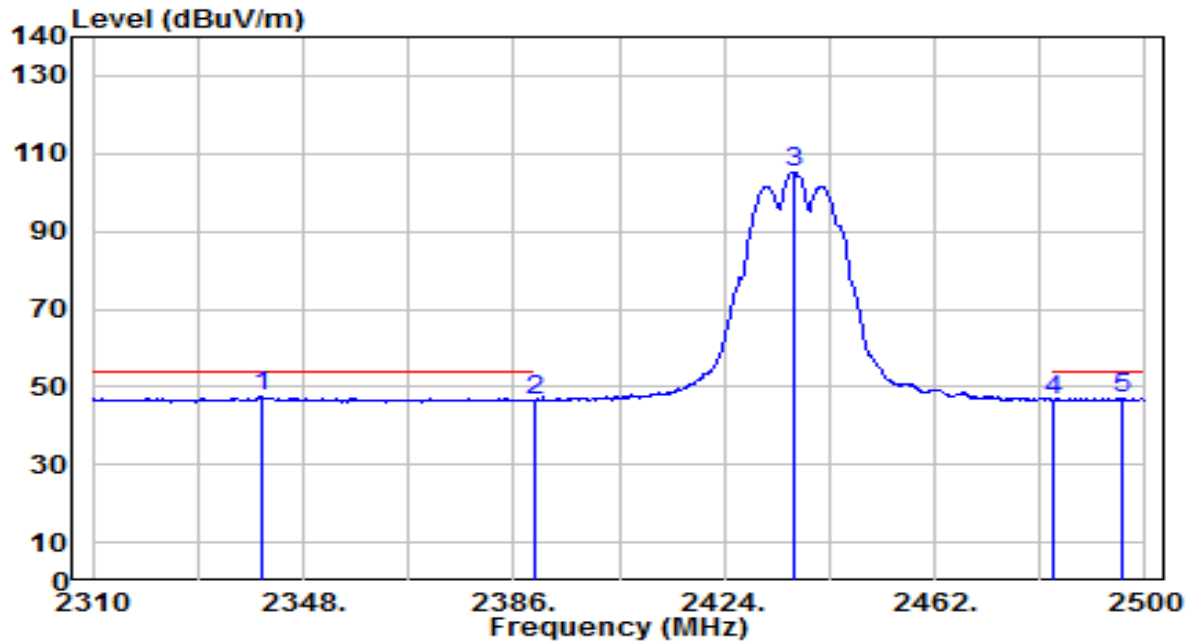


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	15.64	31.76	47.41	-6.59	54.00	195	345	Average
2		2390.000	14.45	31.95	46.40	-7.60	54.00	195	345	Average
3		2436.540	73.26	32.12	105.38	N/A	N/A	195	345	Average
4		2483.500	14.32	32.30	46.62	-7.38	54.00	195	345	Average
5		2495.630	14.68	32.34	47.02	-6.98	54.00	195	345	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

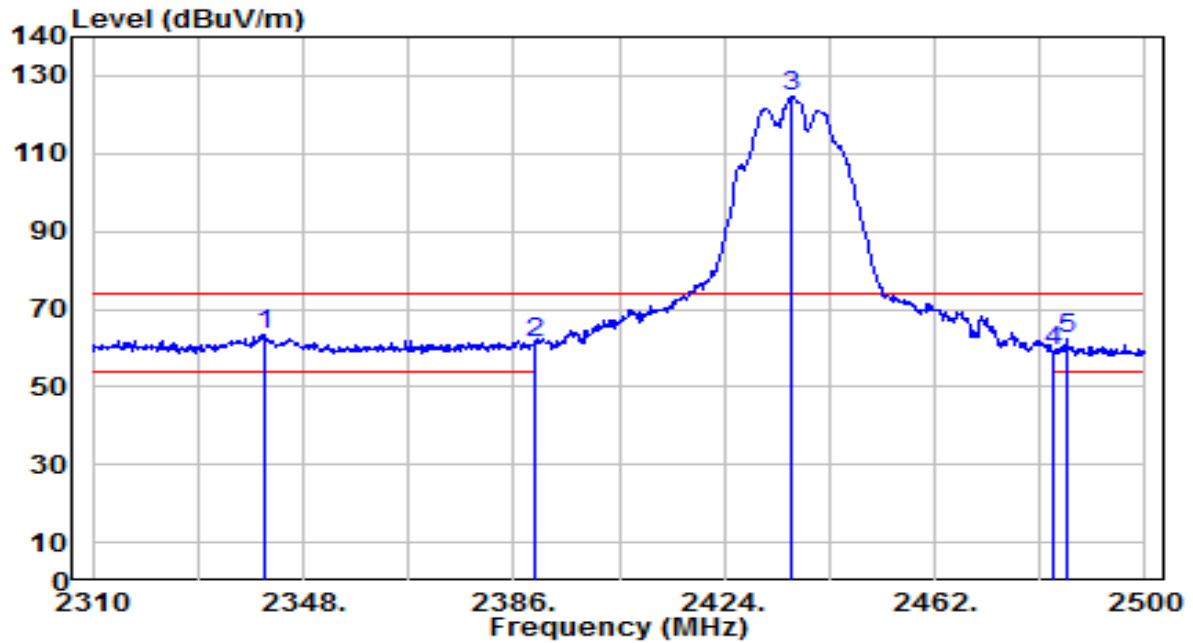


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.970	31.64	31.77	63.40	-10.60	74.00	200	70	Peak
2		2390.000	29.40	31.95	61.35	-12.65	74.00	200	70	Peak
3		2436.350	92.66	32.12	124.78	N/A	N/A	200	70	Peak
4		2483.500	26.86	32.30	59.16	-14.84	74.00	200	70	Peak
5		2485.750	30.17	32.31	62.48	-11.52	74.00	200	70	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

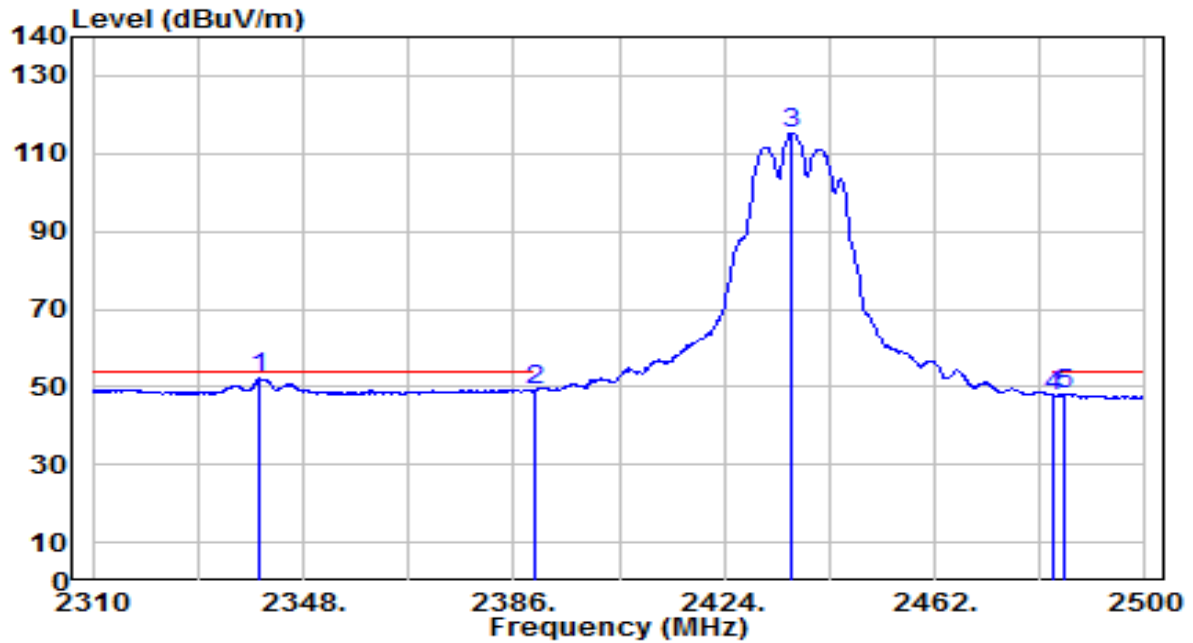


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.210	20.33	31.76	52.10	-1.90	54.00	200	70	Average
2		2390.000	17.22	31.95	49.17	-4.83	54.00	200	70	Average
3		2436.160	83.14	32.12	115.27	N/A	N/A	200	70	Average
4		2483.500	15.32	32.30	47.62	-6.38	54.00	200	70	Average
5		2485.560	15.87	32.31	48.18	-5.82	54.00	200	70	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

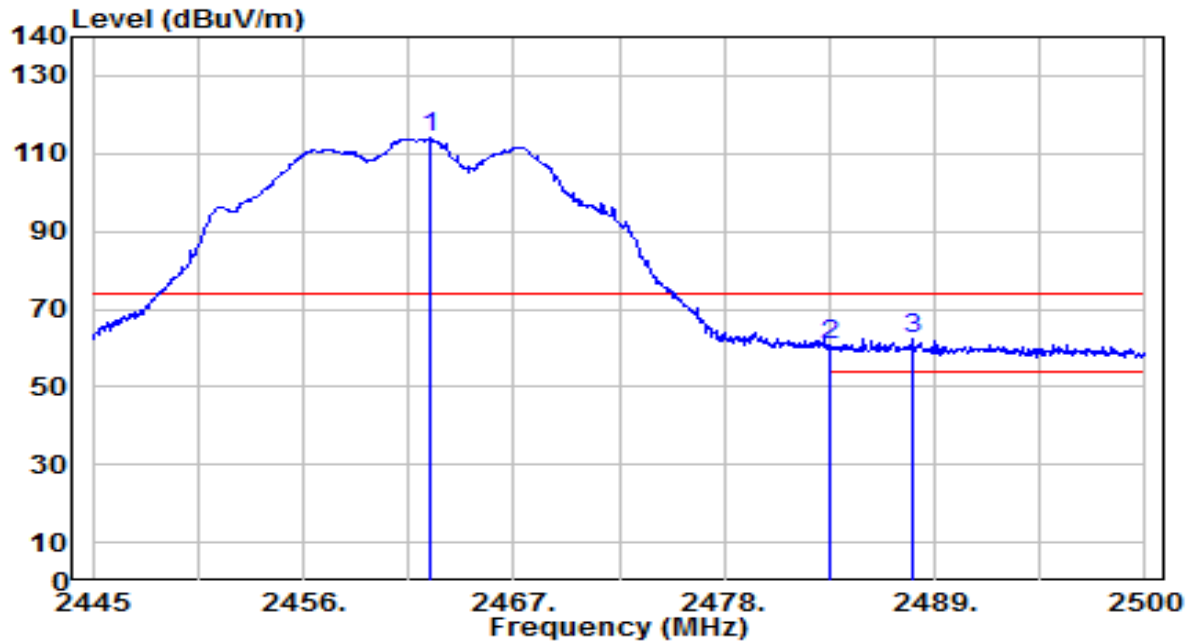


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.600	81.79	32.22	114.01	N/A	N/A	165	350	Peak
2	2483.500	28.51	32.30	60.81	-13.19	74.00	165	350	Peak
3	* 2487.790	30.02	32.31	62.33	-11.67	74.00	165	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

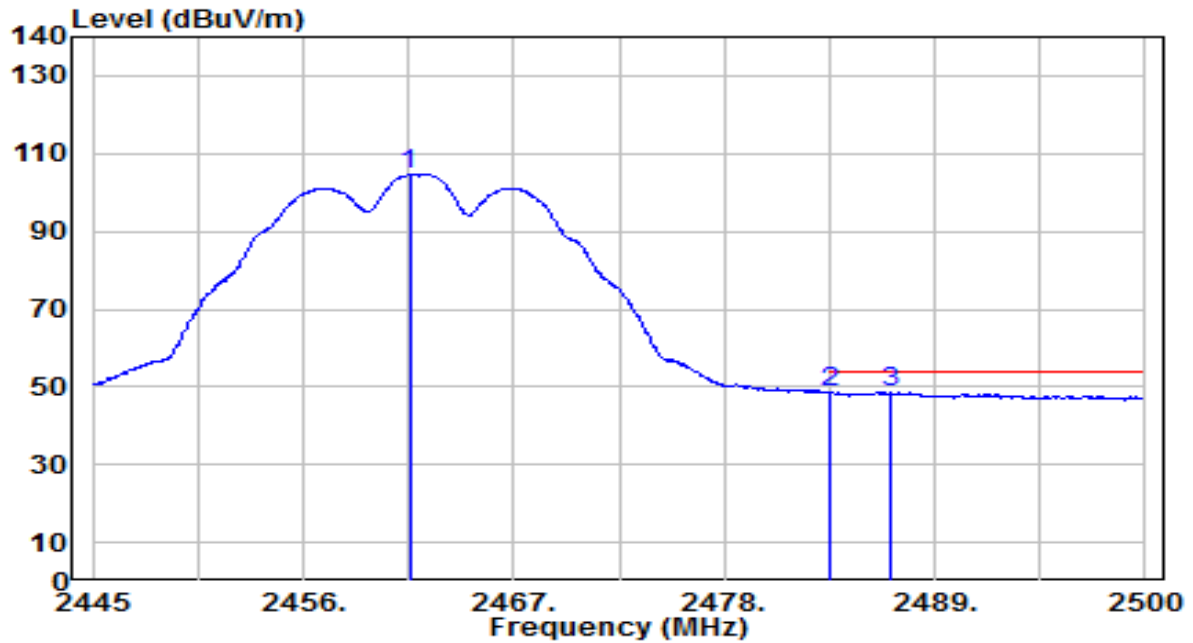


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.555	72.36	32.22	104.58	N/A	N/A	165	350	Average
2	2483.500	16.41	32.30	48.71	-5.29	54.00	165	350	Average
3	* 2486.690	16.45	32.31	48.76	-5.24	54.00	165	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

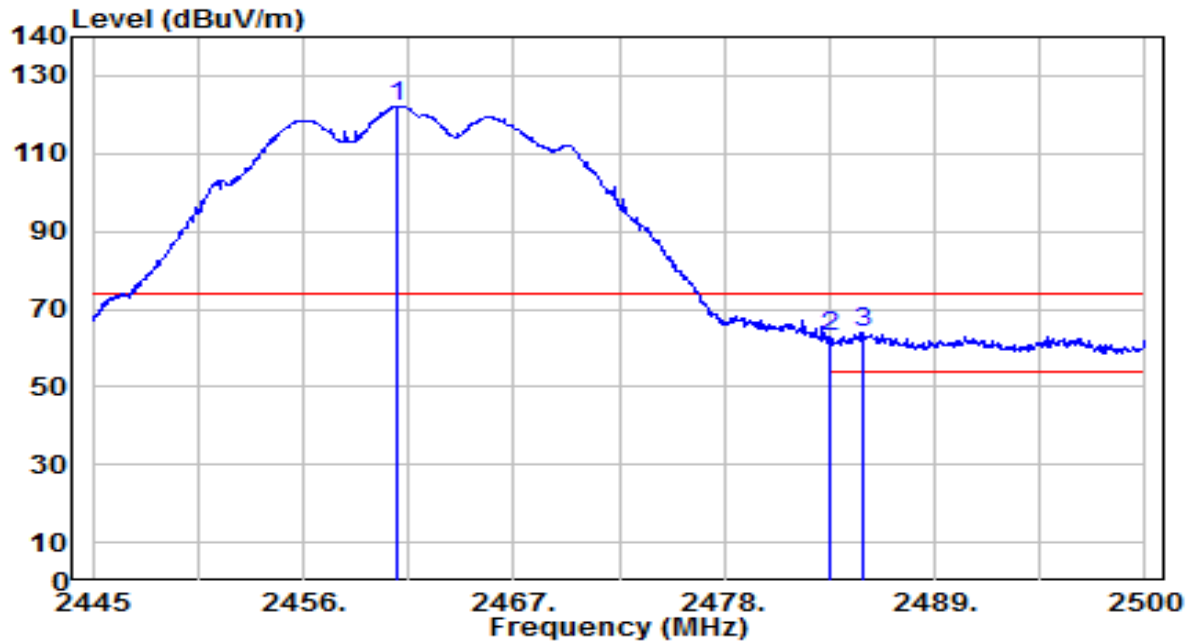


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.895	89.94	32.21	122.15	N/A	N/A	230	105	Peak
2	2483.500	30.77	32.30	63.06	-10.94	74.00	230	105	Peak
3	* 2485.260	31.39	32.30	63.70	-10.30	74.00	230	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

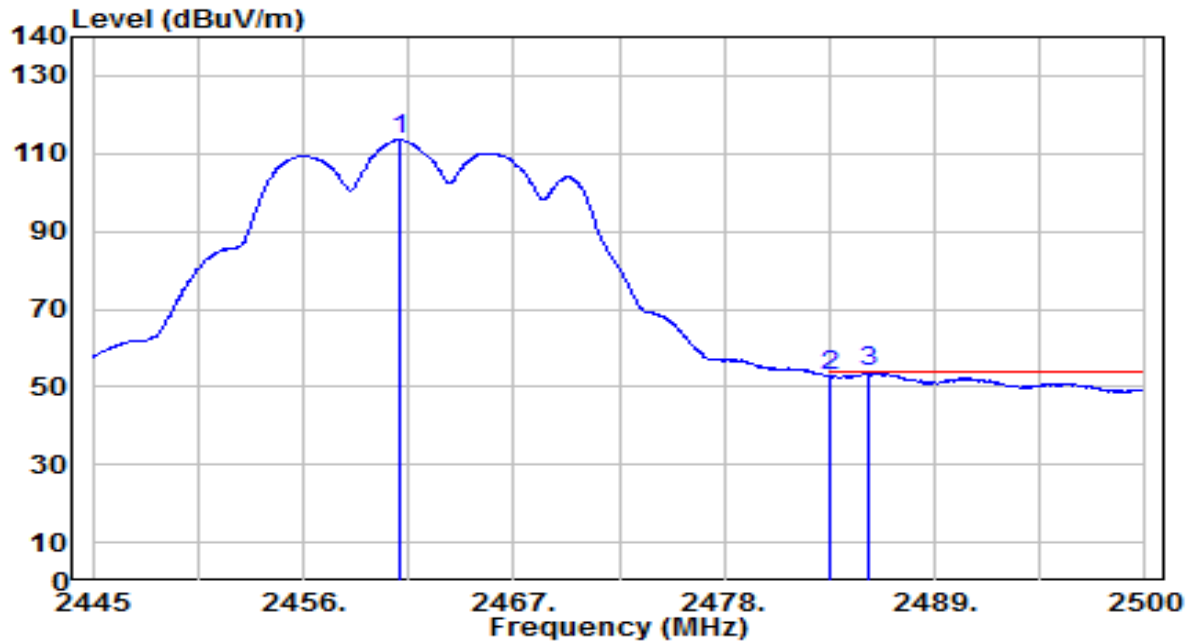


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.115	81.40	32.21	113.61	N/A	N/A	230	105	Average
2	2483.500	20.42	32.30	52.72	-1.28	54.00	230	105	Average
3	* 2485.535	21.40	32.31	53.71	-0.29	54.00	230	105	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

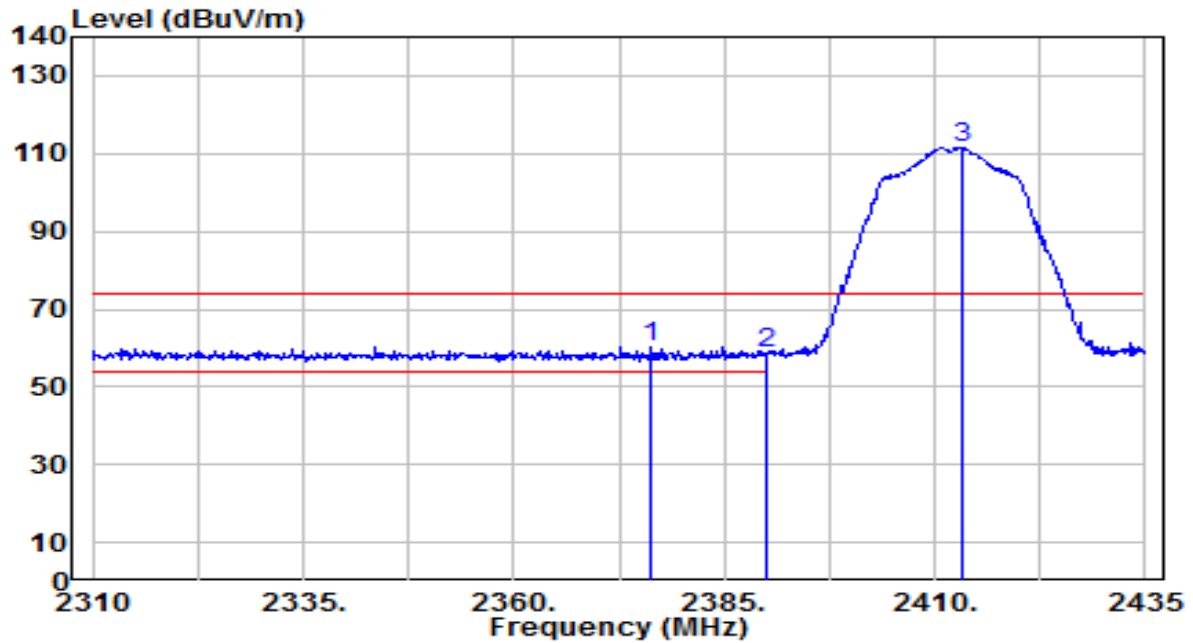


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2376.250	28.27	31.90	60.16	-13.84	74.00	175	355	Peak
2		2390.000	26.56	31.95	58.51	-15.49	74.00	175	355	Peak
3		2413.125	79.57	32.04	111.60	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

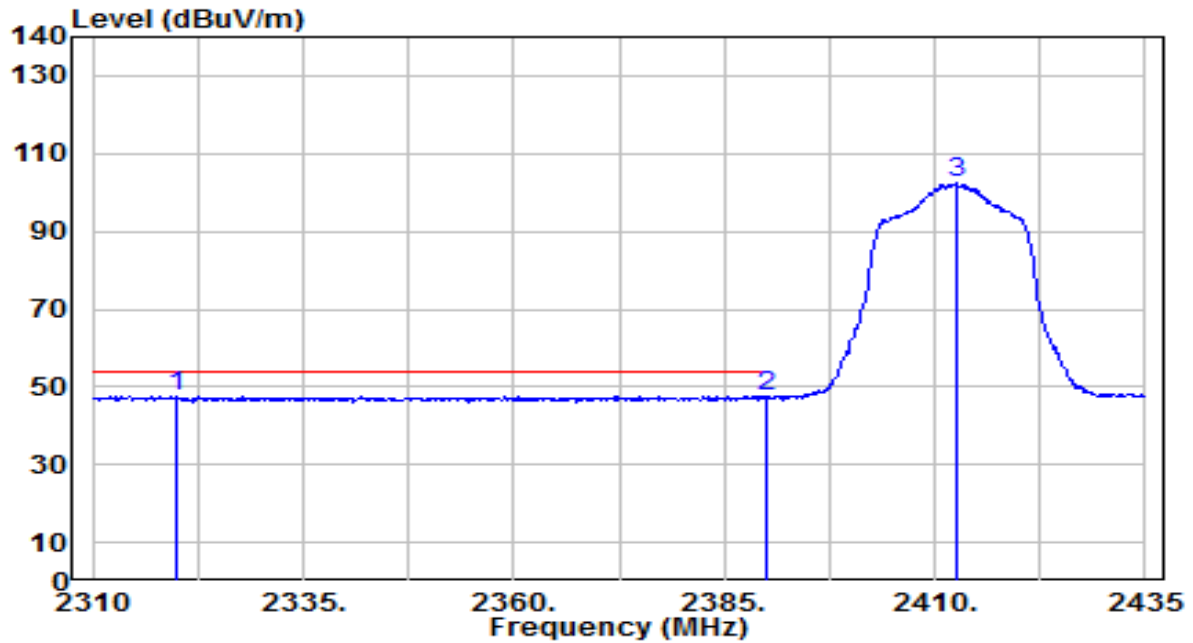


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2319.875	16.02	31.69	47.71	-6.29	54.00	175	355	Average
2		2390.000	15.46	31.95	47.40	-6.60	54.00	175	355	Average
3		2412.750	70.20	32.03	102.24	N/A	N/A	175	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

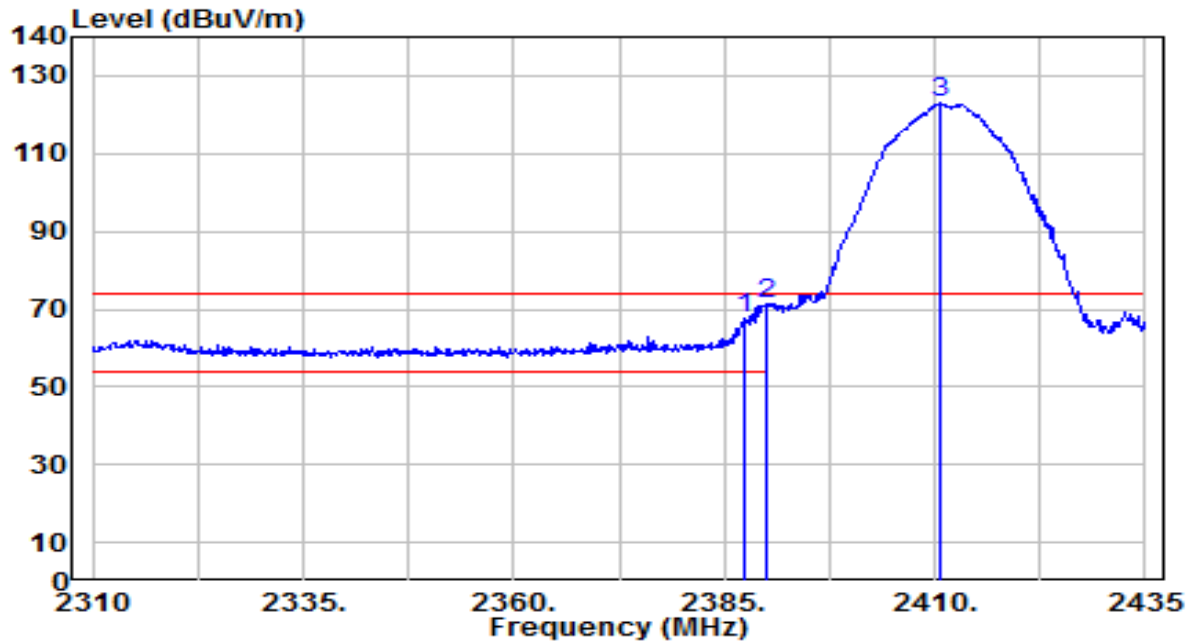


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.375	35.66	31.94	67.60	-6.40	74.00	210	75	Peak
2	*	2390.000	39.61	31.95	71.56	-2.44	74.00	210	75	Peak
3		2410.750	90.84	32.03	122.87	N/A	N/A	210	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

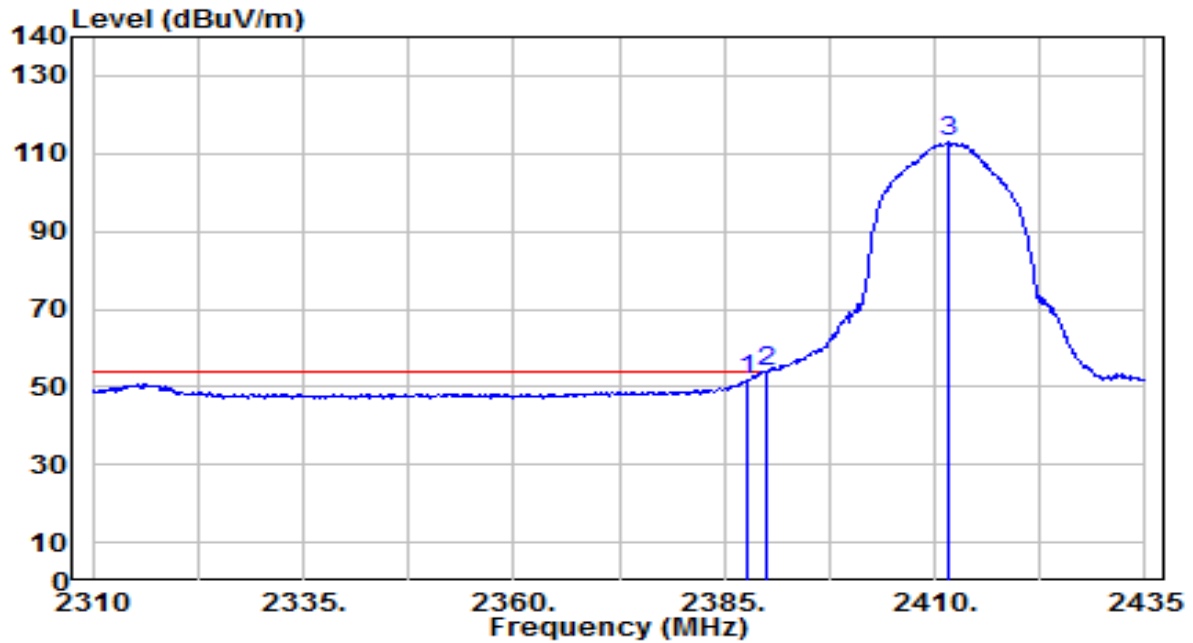


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	20.04	31.94	51.98	-2.02	54.00	210	75	Average
2	*	2390.000	21.78	31.95	53.73	-0.27	54.00	210	75	Average
3		2411.500	80.83	32.03	112.86	N/A	N/A	210	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

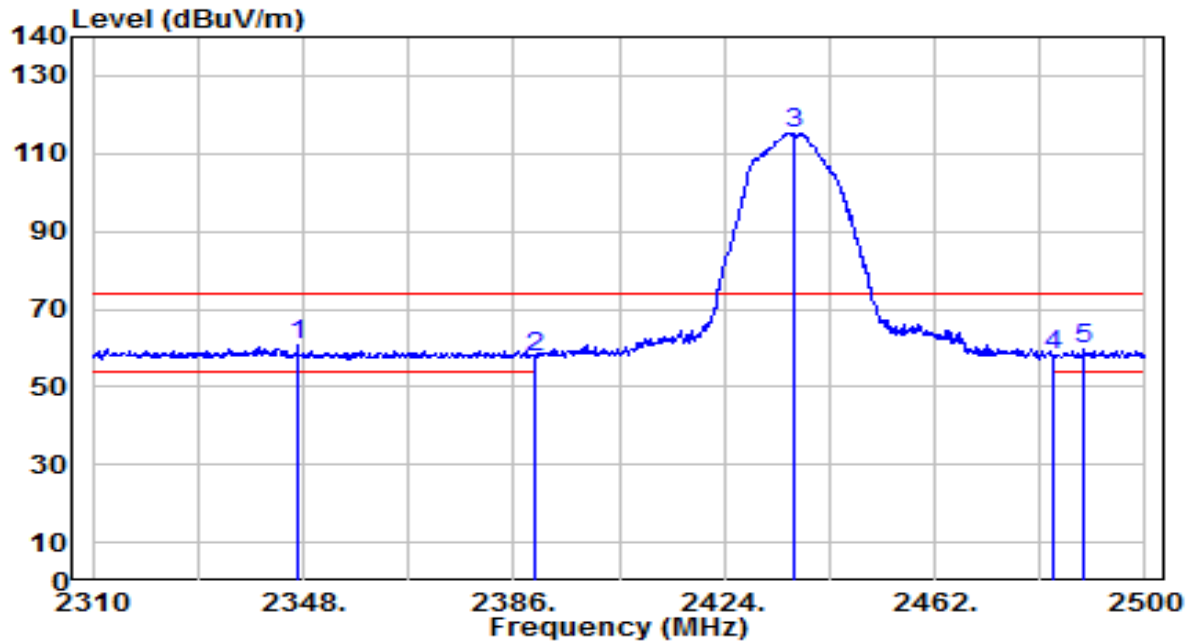


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2347.050	29.02	31.79	60.81	-13.19	74.00	195	345	Peak
2		2390.000	25.63	31.95	57.58	-16.42	74.00	195	345	Peak
3		2436.730	83.20	32.12	115.32	N/A	N/A	195	345	Peak
4		2483.500	26.03	32.30	58.32	-15.68	74.00	195	345	Peak
5		2488.980	27.30	32.32	59.62	-14.38	74.00	195	345	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

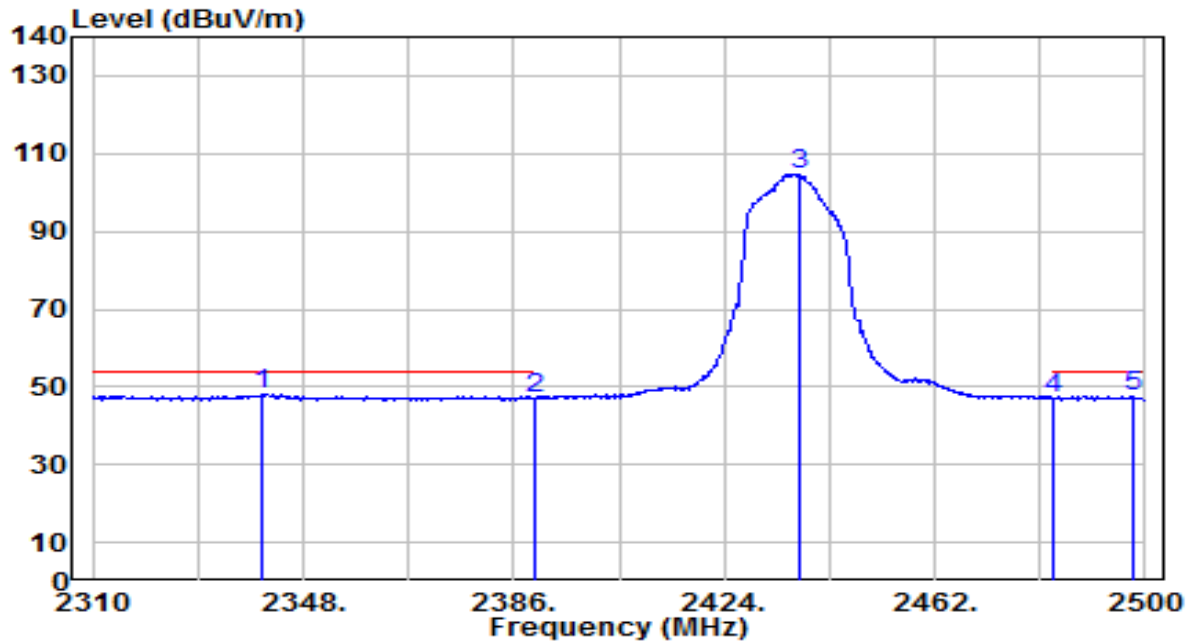


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	16.30	31.76	48.06	-5.94	54.00	195	345	Average
2		2390.000	15.29	31.95	47.24	-6.76	54.00	195	345	Average
3		2437.490	72.64	32.13	104.77	N/A	N/A	195	345	Average
4		2483.500	14.85	32.30	47.15	-6.85	54.00	195	345	Average
5		2497.720	15.43	32.35	47.78	-6.22	54.00	195	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

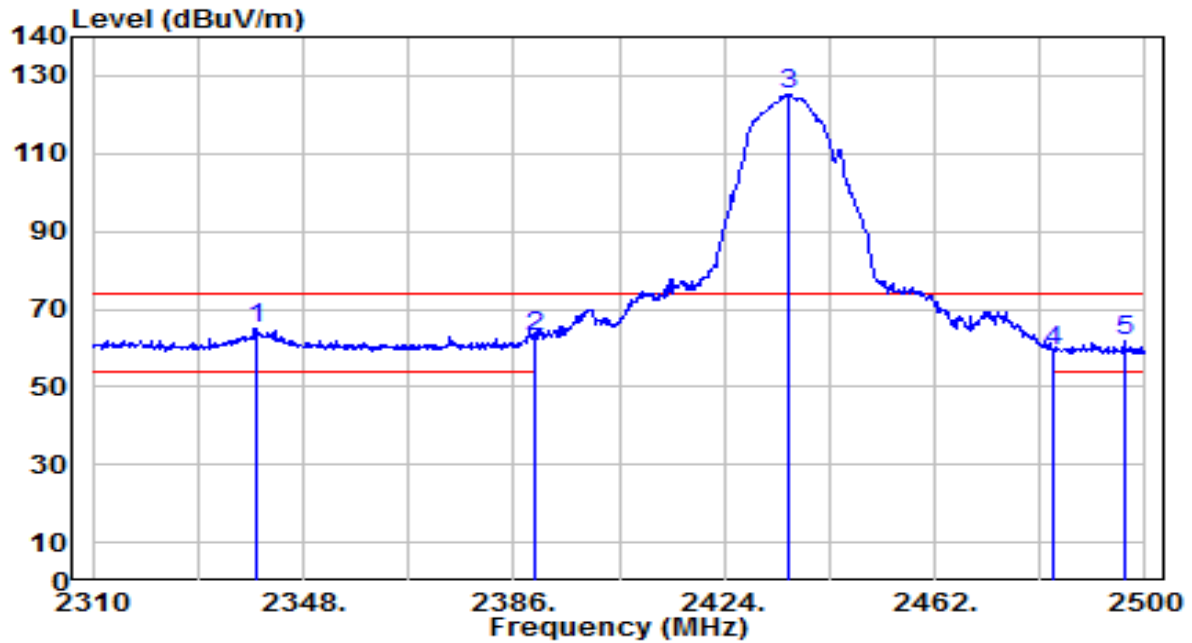


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2339.640	33.35	31.76	65.11	-8.89	74.00	180	70	Peak
2		2390.000	30.99	31.95	62.94	-11.06	74.00	180	70	Peak
3		2435.780	93.15	32.12	125.27	N/A	N/A	180	70	Peak
4		2483.500	26.70	32.30	58.99	-15.01	74.00	180	70	Peak
5		2496.390	29.31	32.35	61.66	-12.34	74.00	180	70	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

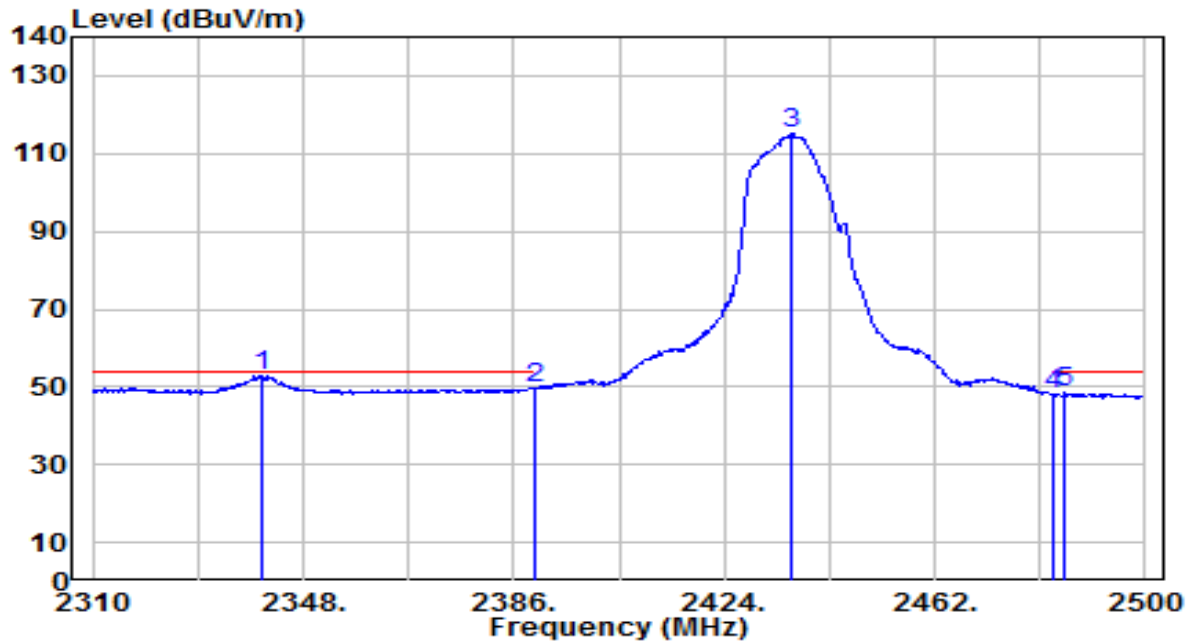


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	21.10	31.76	52.86	-1.14	54.00	180	70	Average
2		2390.000	17.60	31.95	49.55	-4.45	54.00	180	70	Average
3		2435.970	83.00	32.12	115.12	N/A	N/A	180	70	Average
4		2483.500	16.03	32.30	48.33	-5.67	54.00	180	70	Average
5		2485.560	16.09	32.31	48.40	-5.60	54.00	180	70	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

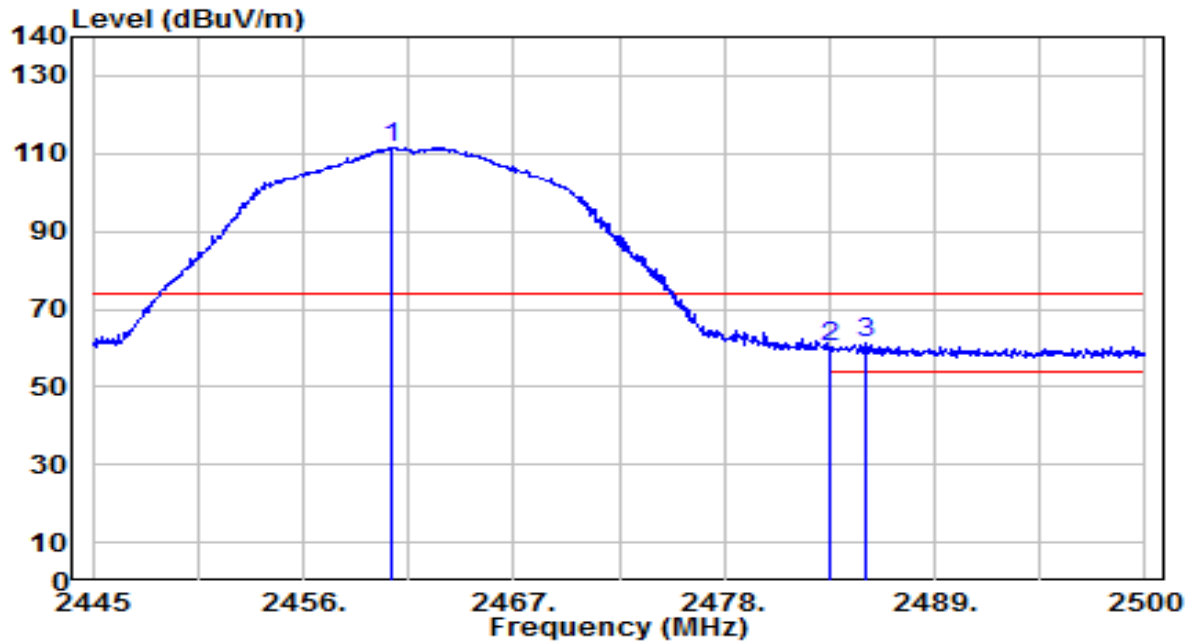


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.620	79.20	32.21	111.42	N/A	N/A	165	350	Peak
2	2483.500	27.81	32.30	60.10	-13.90	74.00	165	350	Peak
3	* 2485.370	28.94	32.31	61.25	-12.75	74.00	165	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

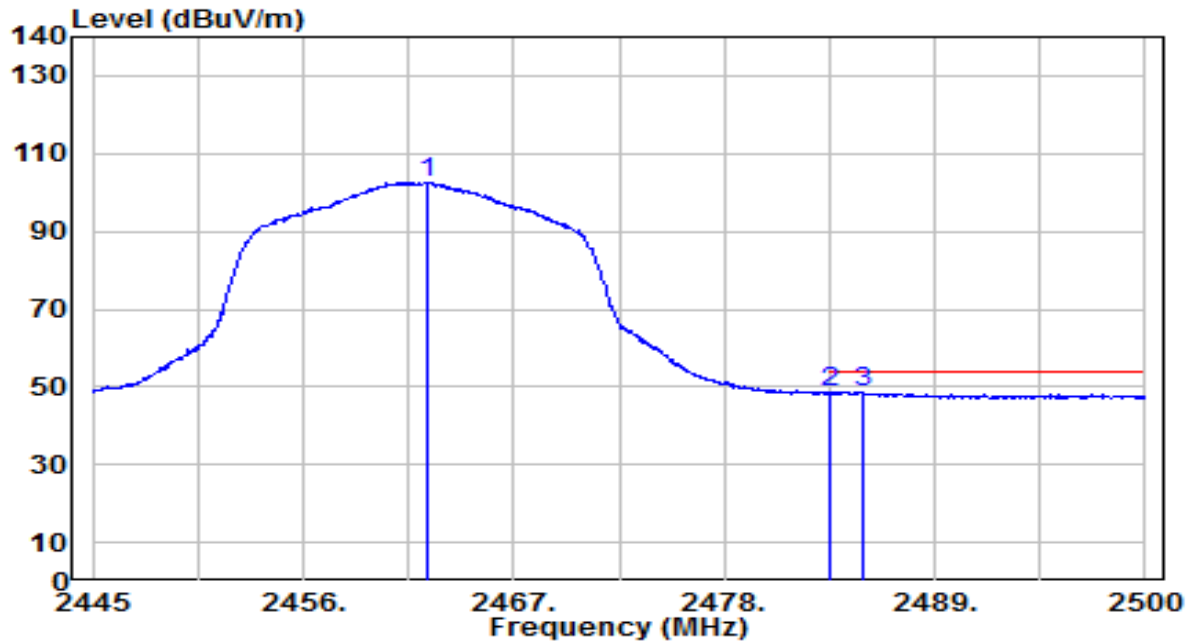


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.435	70.50	32.22	102.72	N/A	N/A	165	350	Average
2	2483.500	16.11	32.30	48.41	-5.59	54.00	165	350	Average
3	* 2485.205	16.31	32.30	48.61	-5.39	54.00	165	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

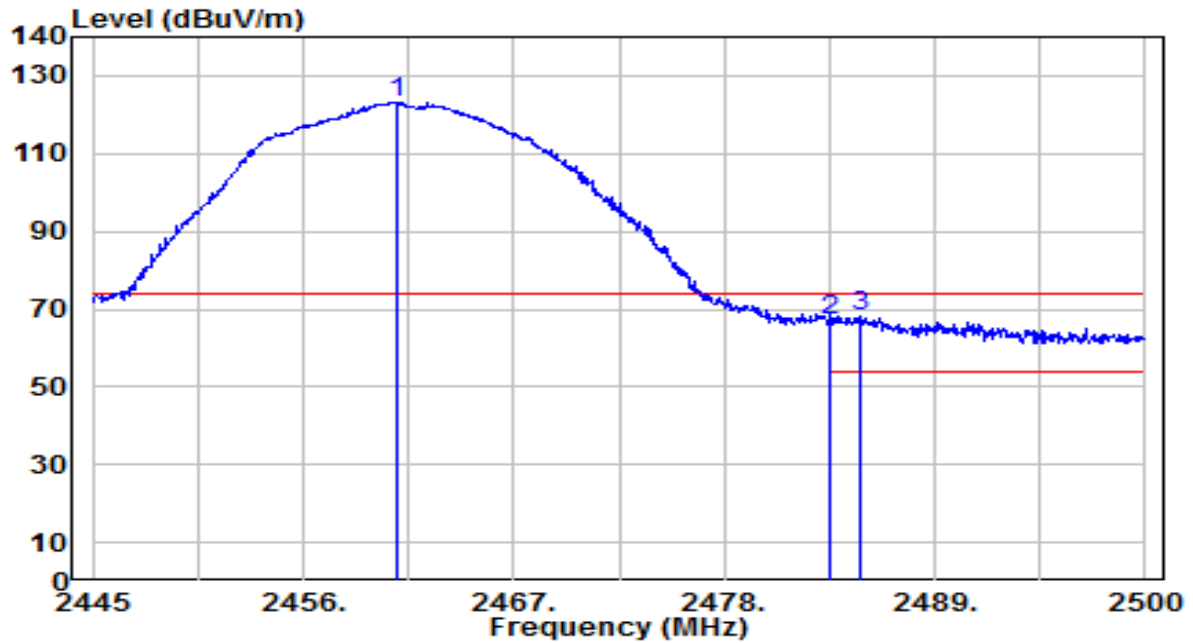


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.895	90.75	32.21	122.97	N/A	N/A	200	115	Peak
2	2483.500	34.75	32.30	67.05	-6.95	74.00	200	115	Peak
3	* 2485.095	35.95	32.30	68.25	-5.75	74.00	200	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

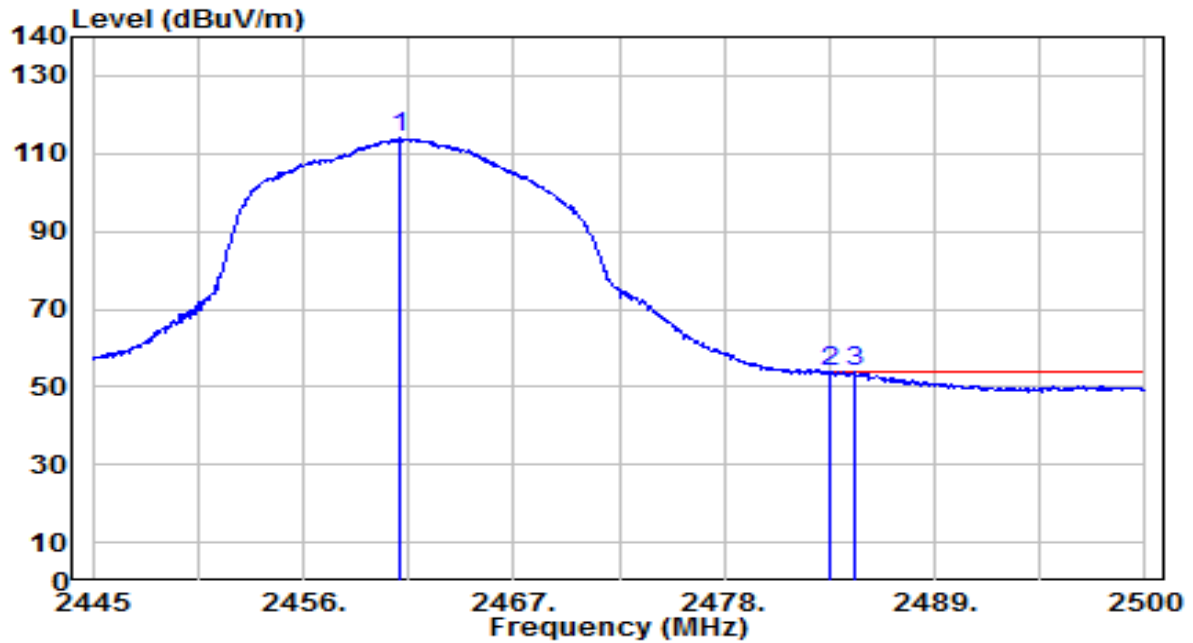


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.115	81.69	32.21	113.90	N/A	N/A	200	115	Average
2	2483.500	21.42	32.30	53.72	-0.28	54.00	200	115	Average
3	* 2484.820	21.55	32.30	53.86	-0.14	54.00	200	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

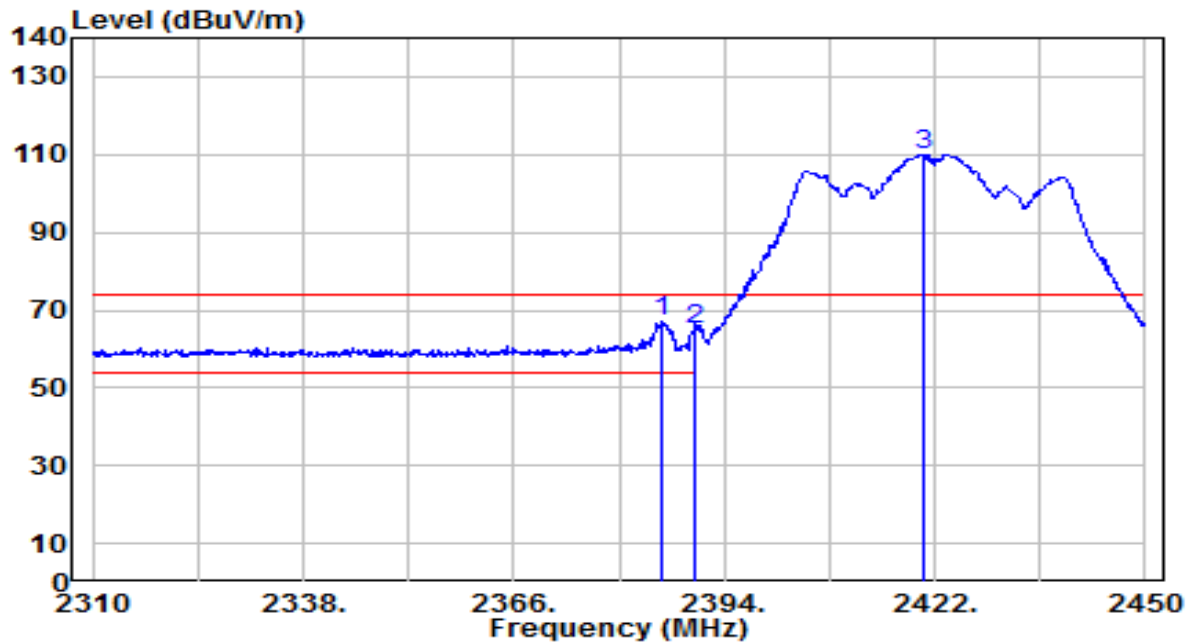


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.740	34.91	31.93	66.84	-7.16	74.00	175	355	Peak
2		2390.000	33.04	31.95	64.99	-9.01	74.00	175	355	Peak
3		2420.460	78.08	32.06	110.14	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

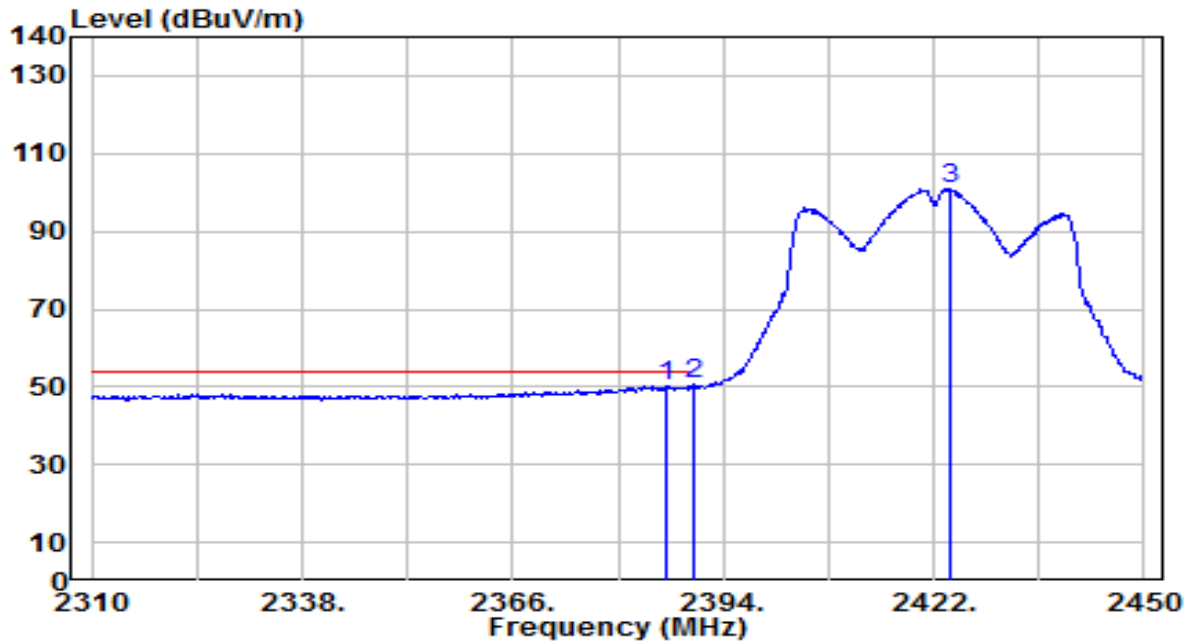


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.300	18.17	31.93	50.11	-3.89	54.00	175	355	Average
2	*	2390.000	18.52	31.95	50.47	-3.53	54.00	175	355	Average
3		2424.240	68.75	32.08	100.83	N/A	N/A	175	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

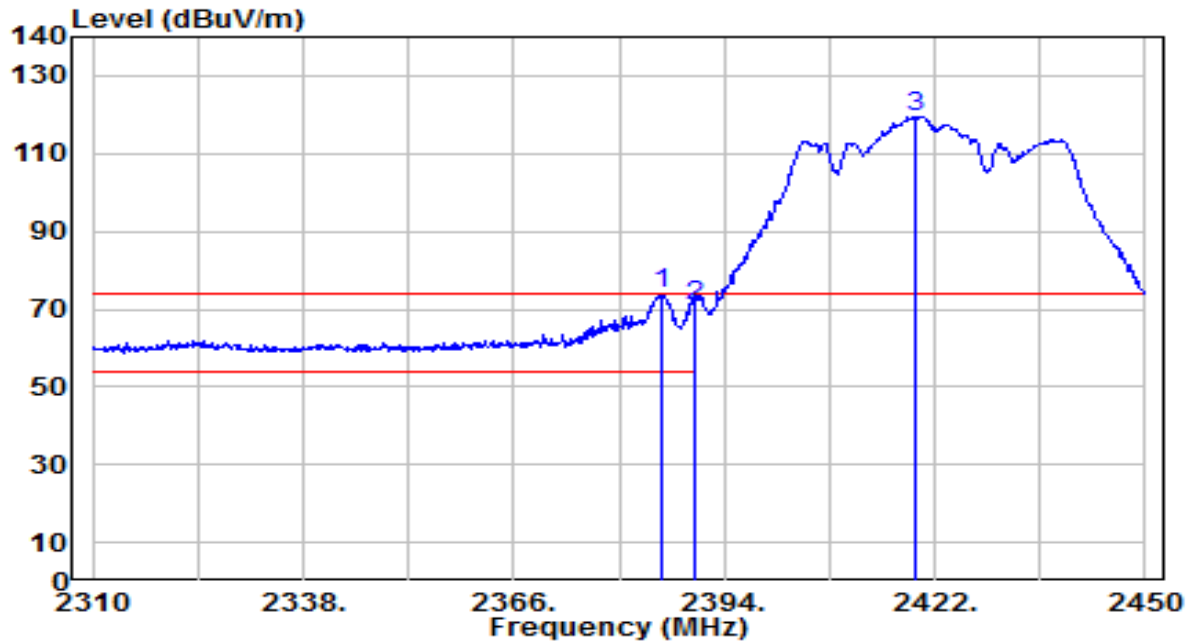


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.600	41.80	31.93	73.73	-0.27	74.00	230	70	Peak
2		2390.000	38.93	31.95	70.88	-3.12	74.00	230	70	Peak
3		2419.480	87.38	32.06	119.44	N/A	N/A	230	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

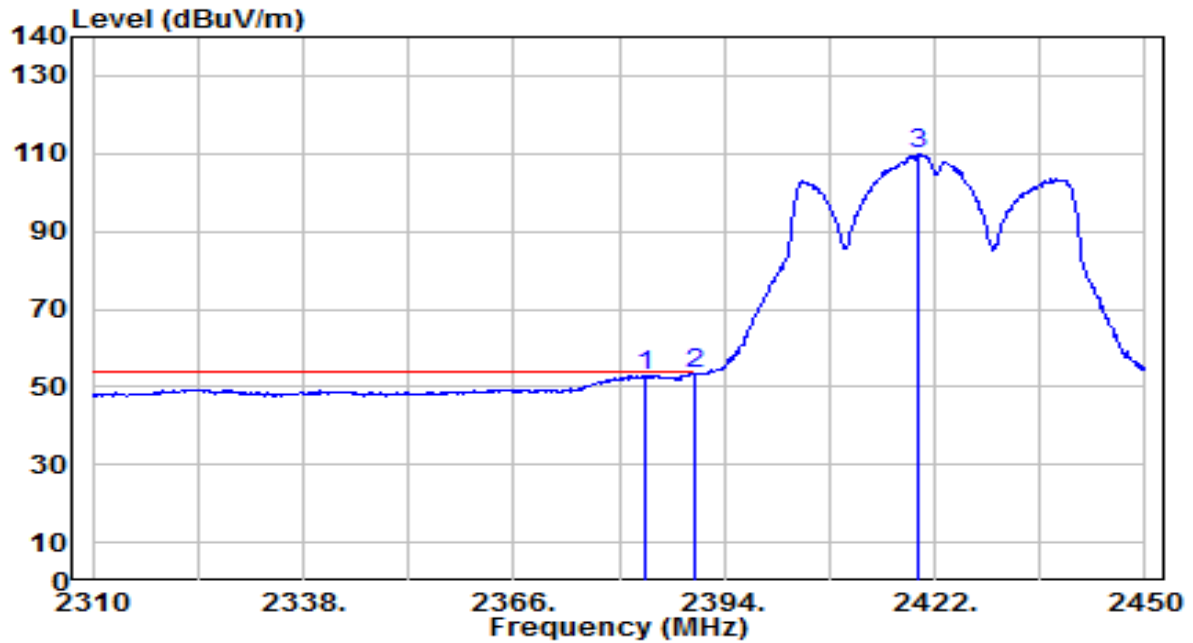


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2383.640	20.94	31.92	52.87	-1.13	54.00	230	70	Average
2	*	2390.000	21.31	31.95	53.26	-0.74	54.00	230	70	Average
3		2419.760	77.86	32.06	109.92	N/A	N/A	230	70	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

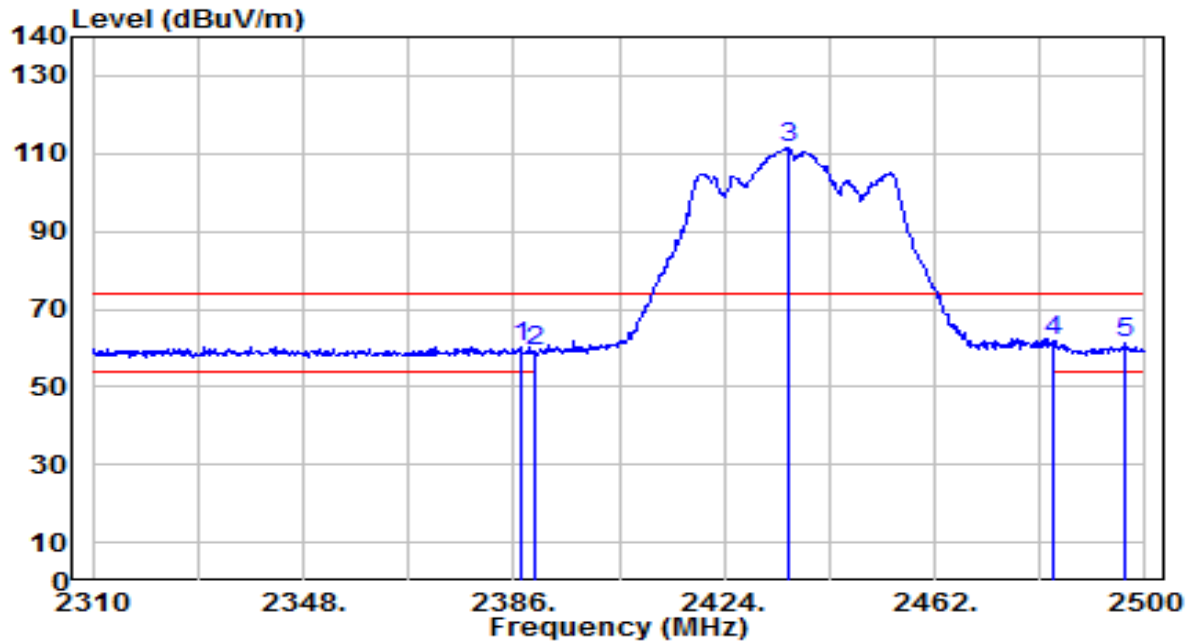


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	28.33	31.94	60.26	-13.74	74.00	195	345	Peak
2	2390.000	27.44	31.95	59.39	-14.61	74.00	195	345	Peak
3	2435.780	79.25	32.12	111.37	N/A	N/A	195	345	Peak
4	* 2483.500	29.31	32.30	61.60	-12.40	74.00	195	345	Peak
5	2496.580	28.72	32.35	61.07	-12.93	74.00	195	345	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

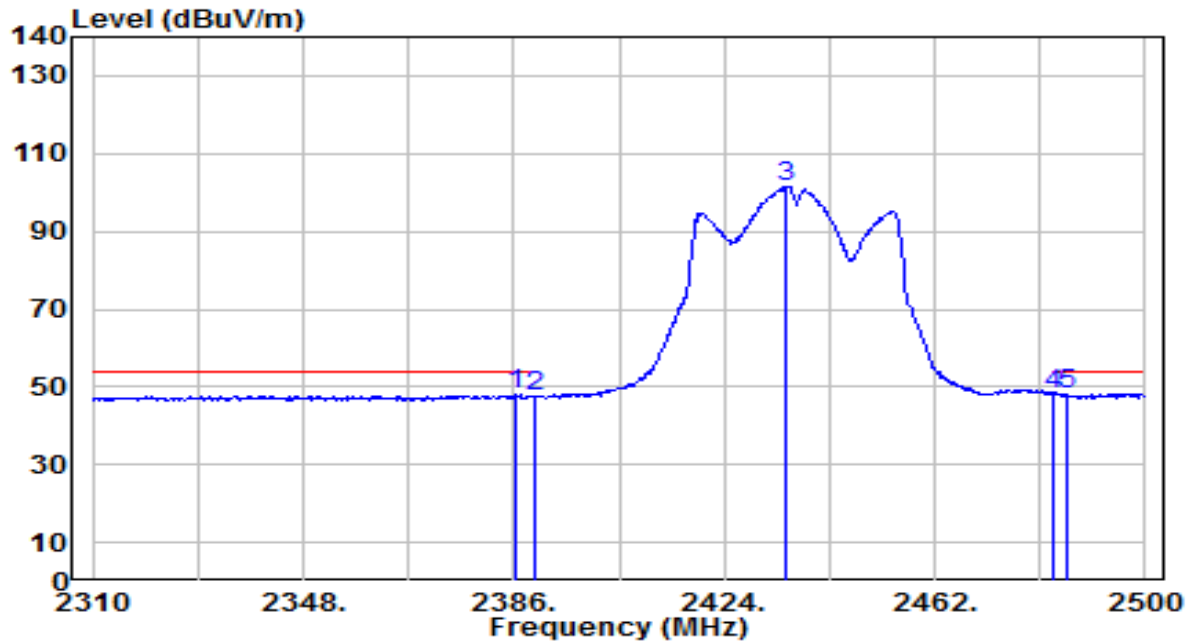


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.380	16.02	31.94	47.95	-6.05	54.00	195	345	Average
2	2390.000	15.51	31.95	47.46	-6.54	54.00	195	345	Average
3	2435.020	69.54	32.12	101.66	N/A	N/A	195	345	Average
4	2483.500	15.86	32.30	48.16	-5.84	54.00	195	345	Average
5	* 2485.750	15.96	32.31	48.27	-5.73	54.00	195	345	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

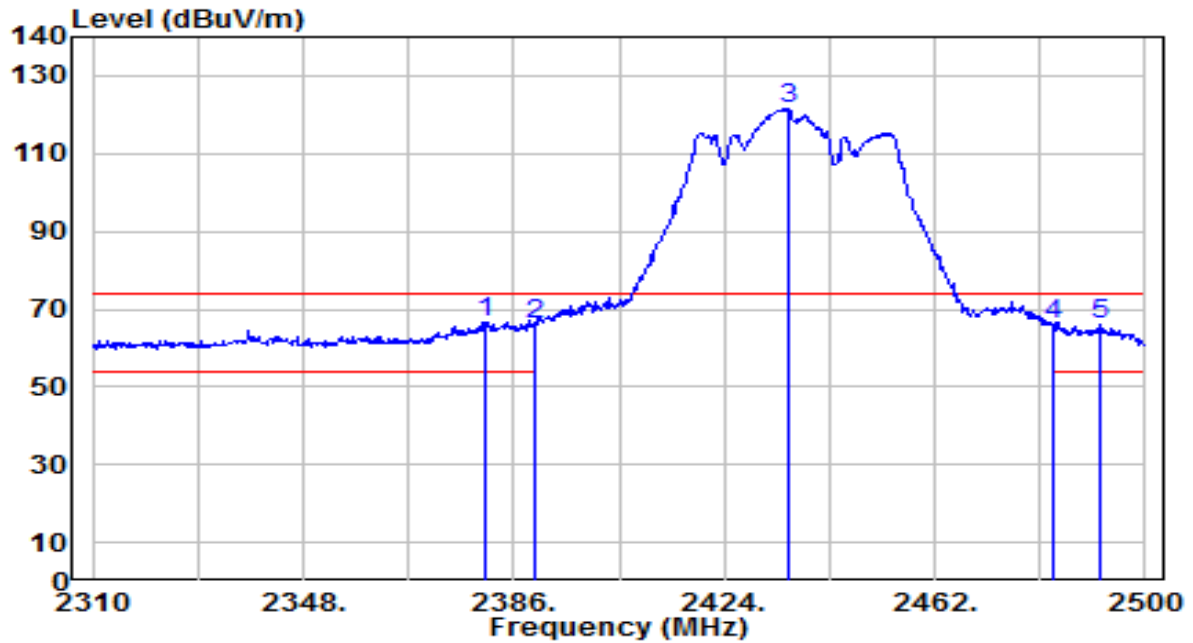


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2380.870	34.83	31.91	66.74	-7.26	74.00	180	70	Peak
2		2390.000	34.33	31.95	66.28	-7.72	74.00	180	70	Peak
3		2435.400	89.39	32.12	121.50	N/A	N/A	180	70	Peak
4		2483.500	33.55	32.30	65.85	-8.15	74.00	180	70	Peak
5		2491.640	33.63	32.33	65.95	-8.05	74.00	180	70	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

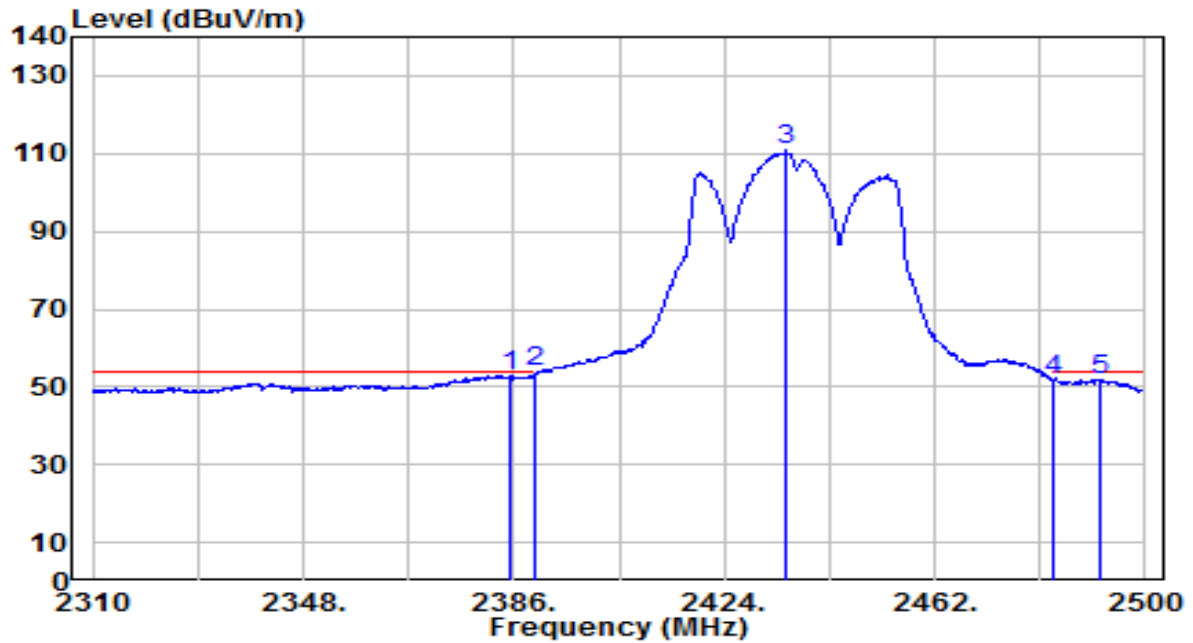


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.430	20.87	31.93	52.80	-1.20	54.00	180	70	Average
2	*	2390.000	21.83	31.95	53.78	-0.22	54.00	180	70	Average
3		2435.210	78.84	32.12	110.96	N/A	N/A	180	70	Average
4		2483.500	19.53	32.30	51.83	-2.17	54.00	180	70	Average
5		2492.020	19.58	32.33	51.91	-2.09	54.00	180	70	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

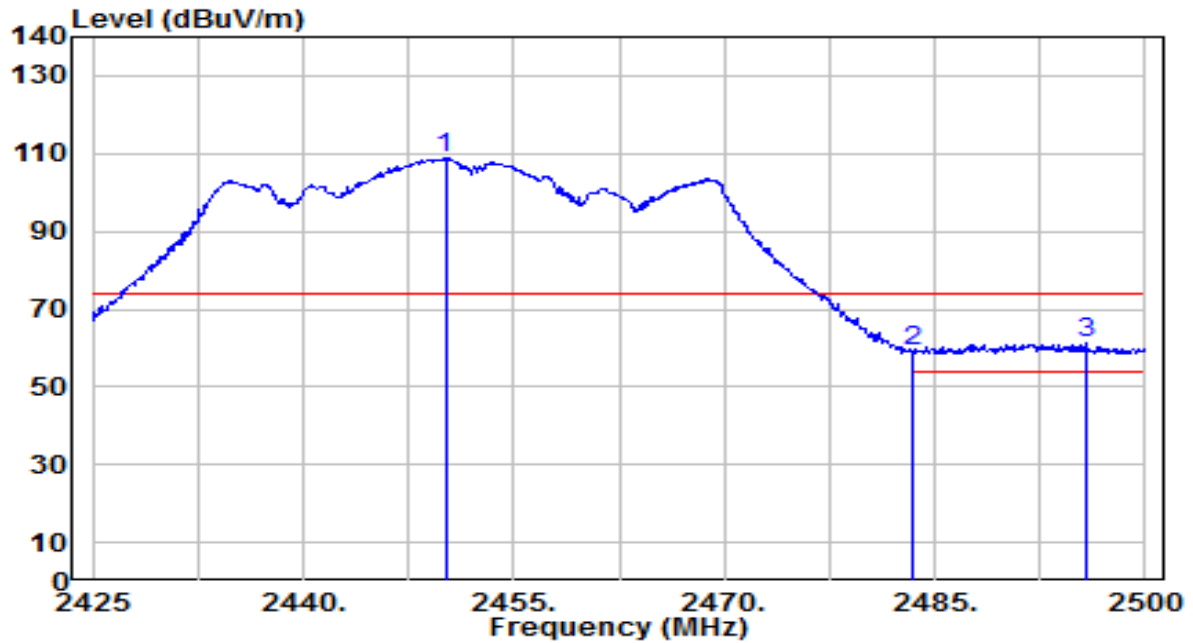


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.125	76.49	32.17	108.66	N/A	N/A	165	350	Peak
2	2483.500	26.88	32.30	59.17	-14.83	74.00	165	350	Peak
3	* 2495.725	29.09	32.34	61.44	-12.56	74.00	165	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

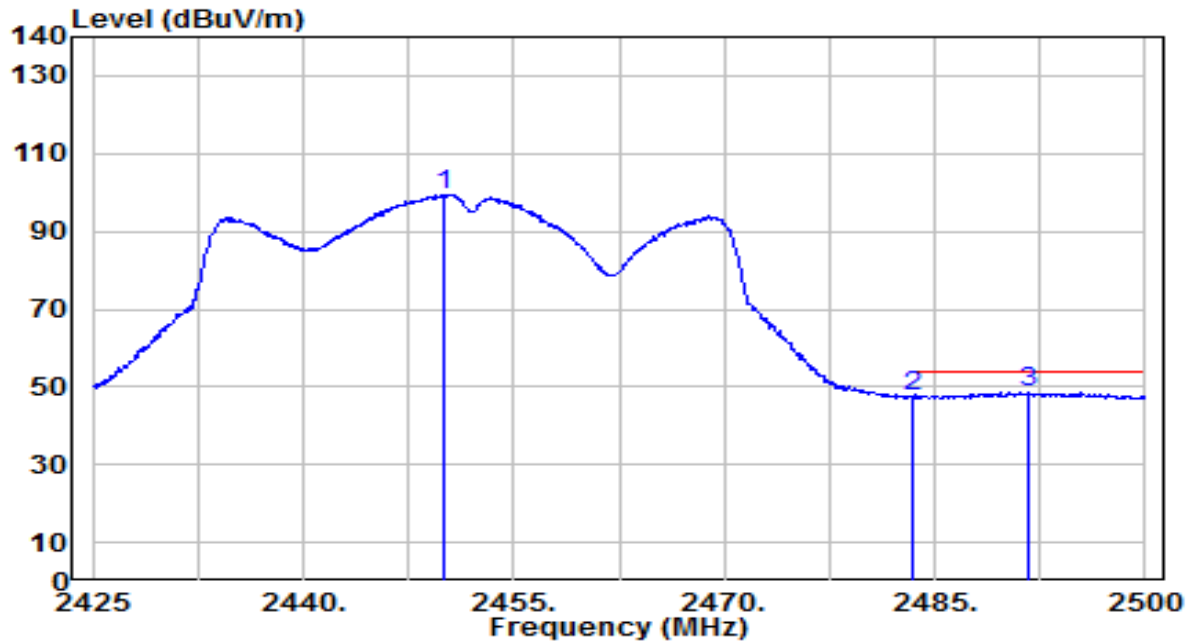


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.975	67.41	32.17	99.58	N/A	N/A	165	350	Average
2	2483.500	15.19	32.30	47.48	-6.52	54.00	165	350	Average
3	* 2491.675	16.19	32.33	48.52	-5.48	54.00	165	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

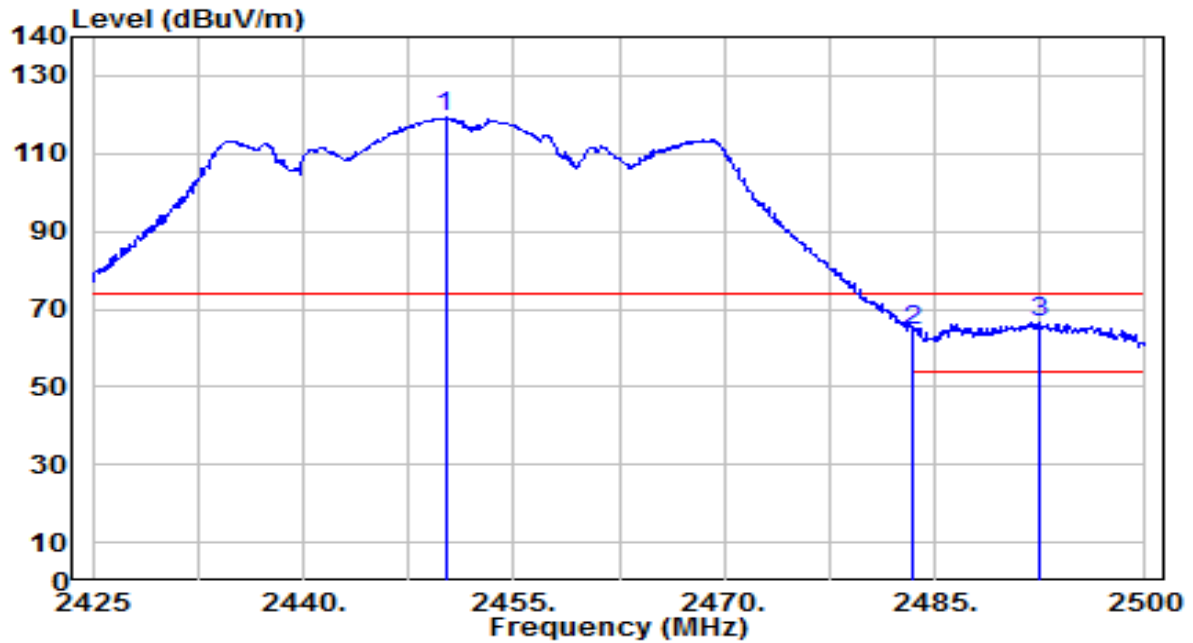


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.125	87.11	32.17	119.29	N/A	N/A	200	115	Peak
2	2483.500	32.06	32.30	64.36	-9.64	74.00	200	115	Peak
3	* 2492.500	34.15	32.33	66.48	-7.52	74.00	200	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

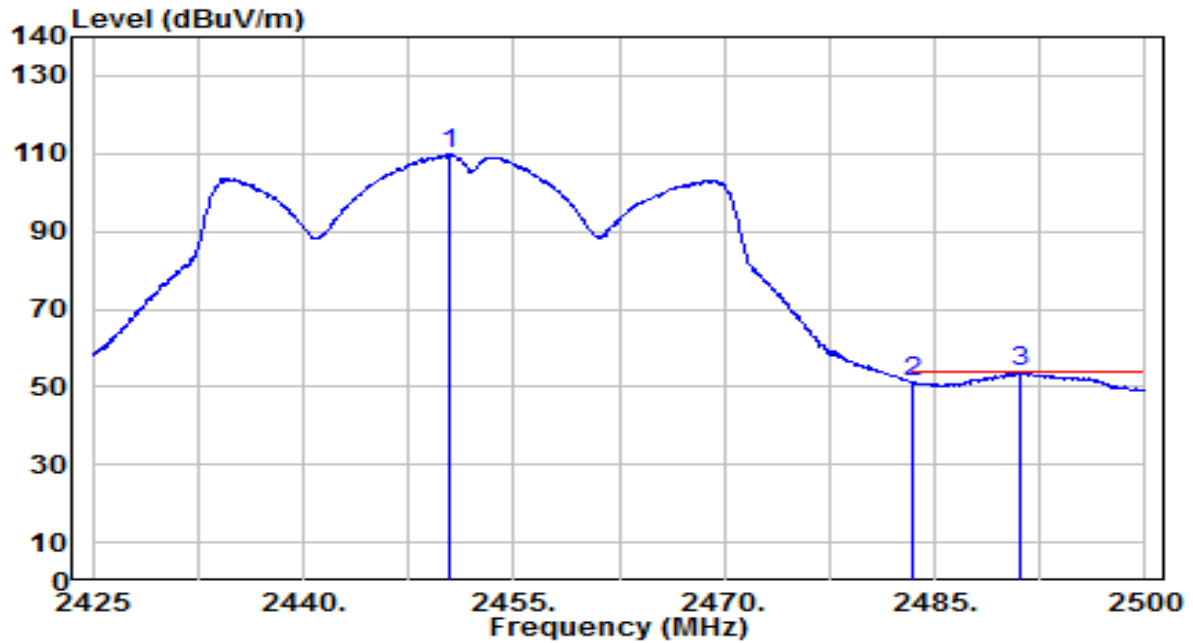


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.350	77.78	32.17	109.96	N/A	N/A	200	115	Average
2	2483.500	18.77	32.30	51.07	-2.93	54.00	200	115	Average
3	* 2491.000	21.38	32.33	53.70	-0.30	54.00	200	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

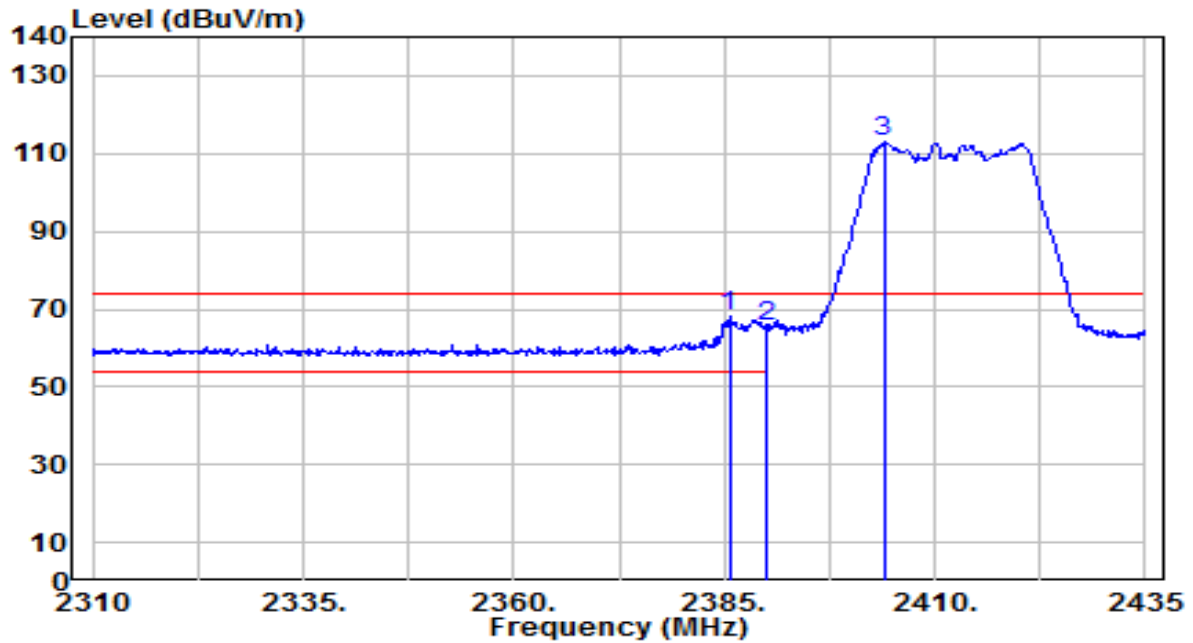


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.600	36.02	31.93	67.96	-6.04	74.00	175	355	Peak
2		2390.000	33.51	31.95	65.46	-8.54	74.00	175	355	Peak
3		2403.940	81.16	32.00	113.16	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

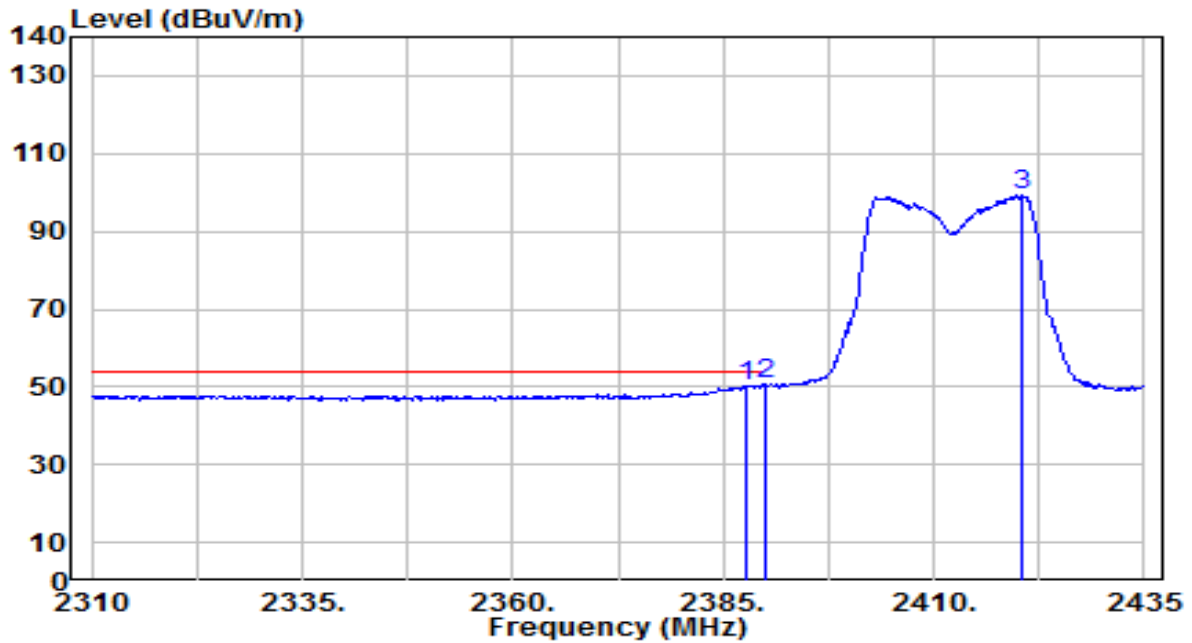


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.840	18.08	31.94	50.02	-3.98	54.00	175	355	Average
2	*	2390.000	18.53	31.95	50.48	-3.52	54.00	175	355	Average
3		2420.600	67.25	32.06	99.31	N/A	N/A	175	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

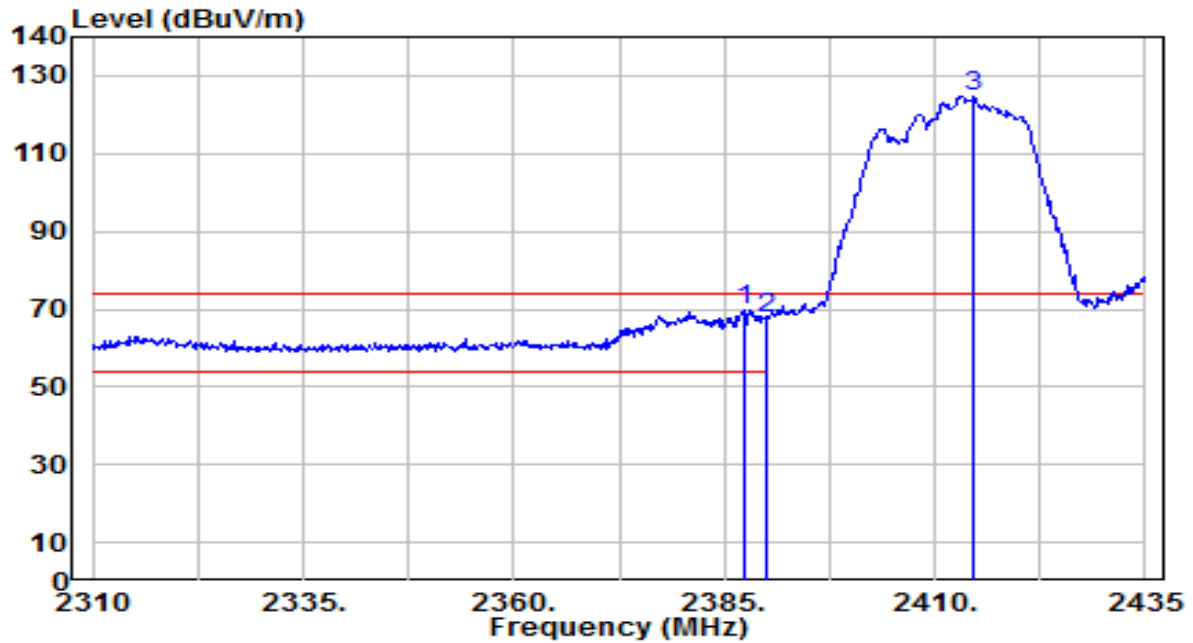


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.280	37.71	31.94	69.65	-4.35	74.00	265	60	Peak
2		2390.000	35.76	31.95	67.71	-6.29	74.00	265	60	Peak
3		2414.580	92.88	32.04	124.92	N/A	N/A	265	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

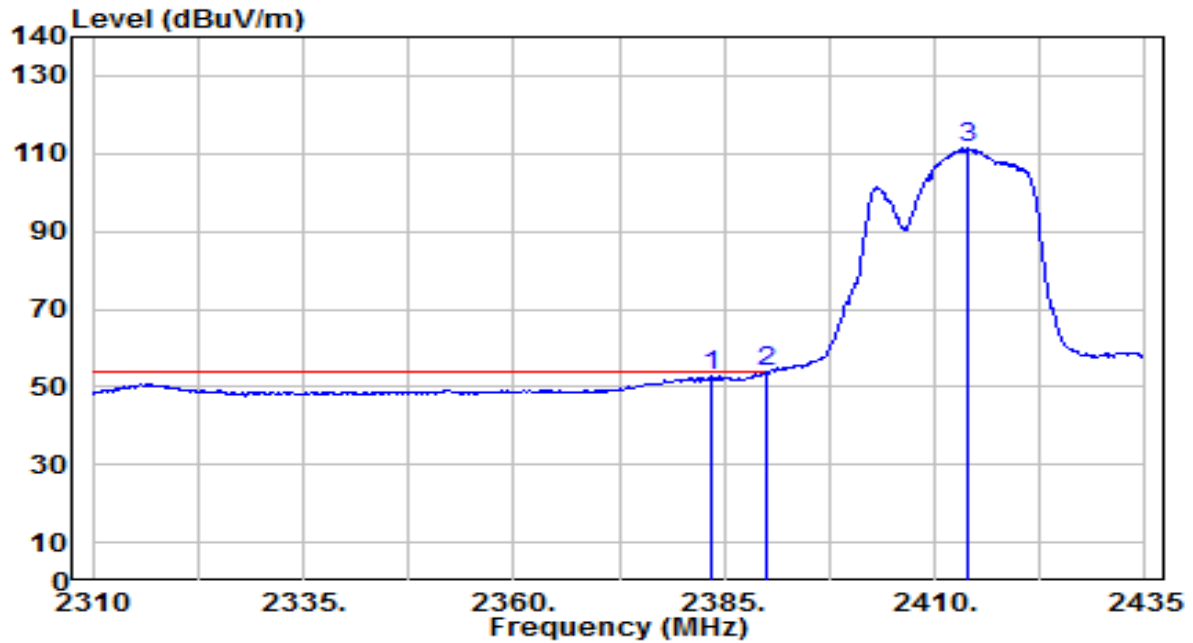


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2383.360	20.73	31.92	52.66	-1.34	54.00	265	60	Average
2	*	2390.000	21.79	31.95	53.74	-0.26	54.00	265	60	Average
3		2413.880	79.22	32.04	111.26	N/A	N/A	265	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

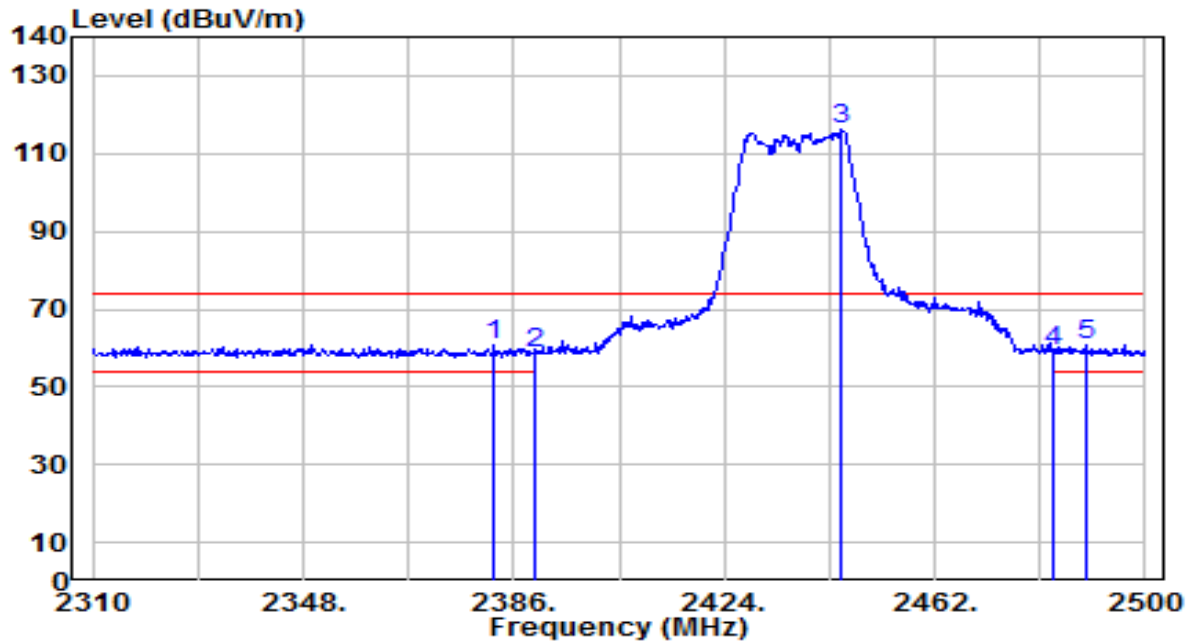


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2382.580	29.00	31.92	60.92	-13.08	74.00	195	345	Peak
2		2390.000	26.93	31.95	58.88	-15.12	74.00	195	345	Peak
3		2445.280	84.03	32.16	116.18	N/A	N/A	195	345	Peak
4		2483.500	26.87	32.30	59.17	-14.83	74.00	195	345	Peak
5		2489.170	28.22	32.32	60.54	-13.46	74.00	195	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

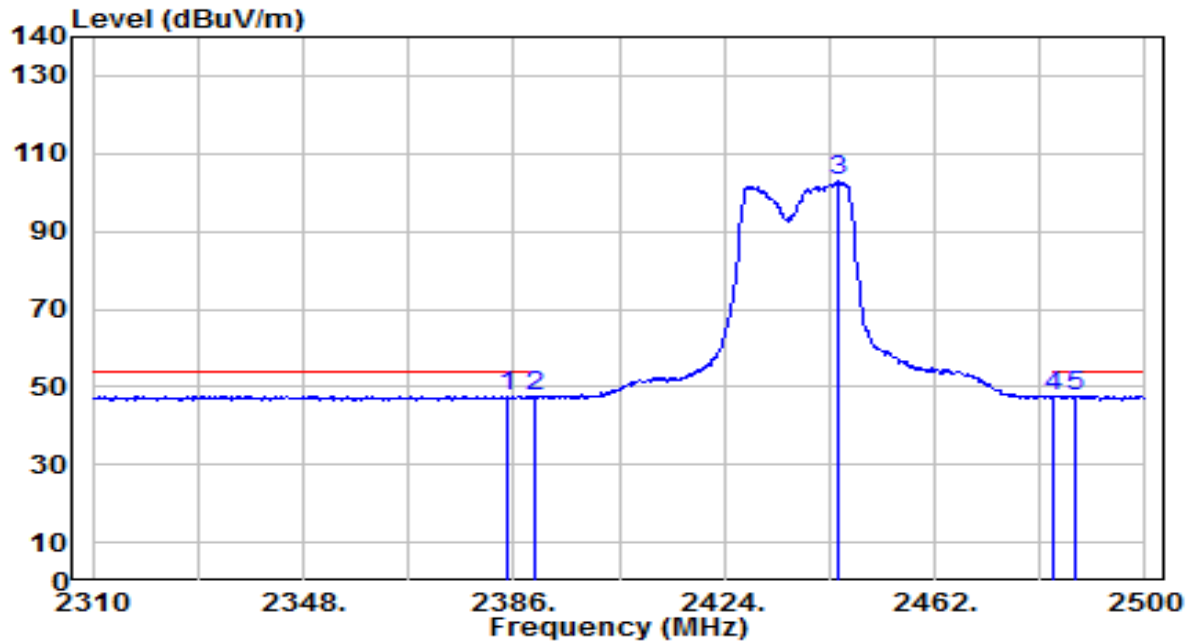


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.670	15.82	31.93	47.75	-6.25	54.00	195	345	Average
2		2390.000	15.39	31.95	47.34	-6.66	54.00	195	345	Average
3		2444.520	70.62	32.15	102.77	N/A	N/A	195	345	Average
4		2483.500	15.38	32.30	47.68	-6.32	54.00	195	345	Average
5		2487.270	15.38	32.31	47.69	-6.31	54.00	195	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

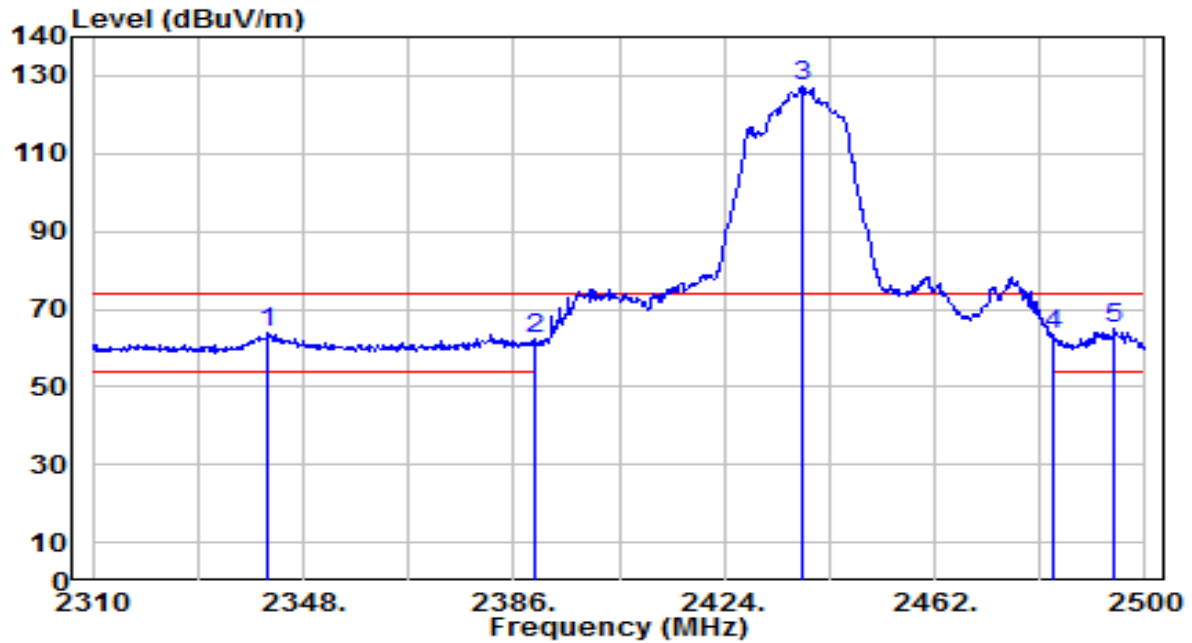


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2341.540	31.91	31.77	63.68	-10.32	74.00	220	225	Peak
2	2390.000	30.24	31.95	62.19	-11.81	74.00	220	225	Peak
3	2438.060	95.24	32.13	127.37	N/A	N/A	220	225	Peak
4	2483.500	30.97	32.30	63.27	-10.73	74.00	220	225	Peak
5	* 2494.300	32.57	32.34	64.91	-9.09	74.00	220	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

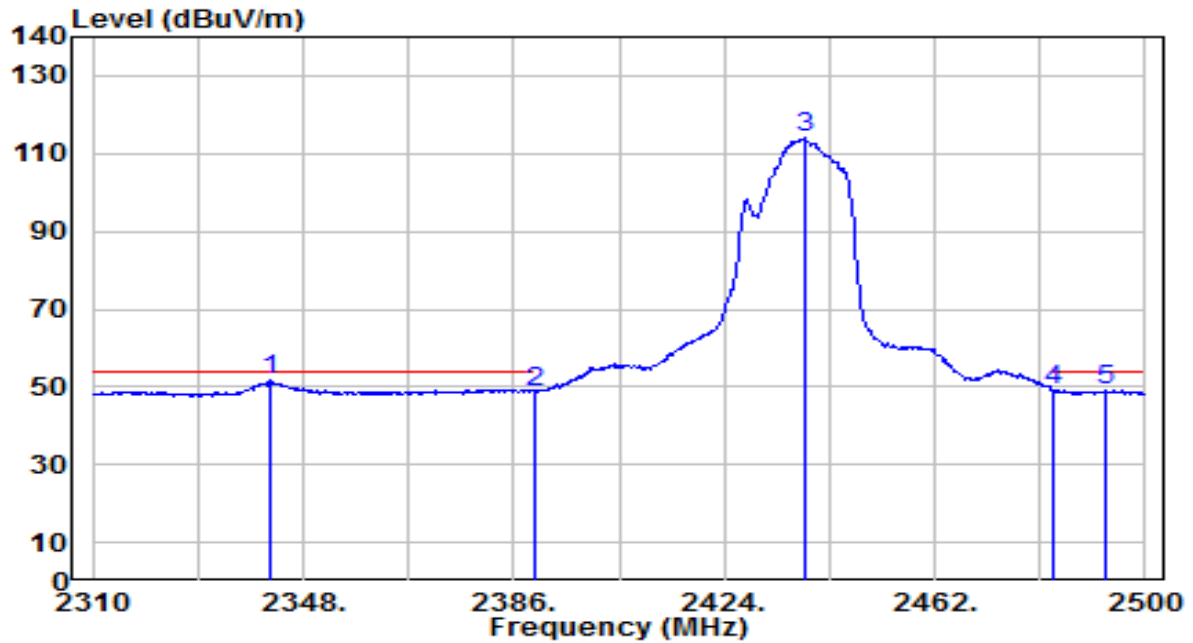


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2341.920	19.80	31.77	51.57	-2.43	54.00	220	225	Average
2		2390.000	16.73	31.95	48.68	-5.32	54.00	220	225	Average
3		2438.440	82.19	32.13	114.32	N/A	N/A	220	225	Average
4		2483.500	16.81	32.30	49.11	-4.89	54.00	220	225	Average
5		2492.780	16.82	32.33	49.15	-4.85	54.00	220	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

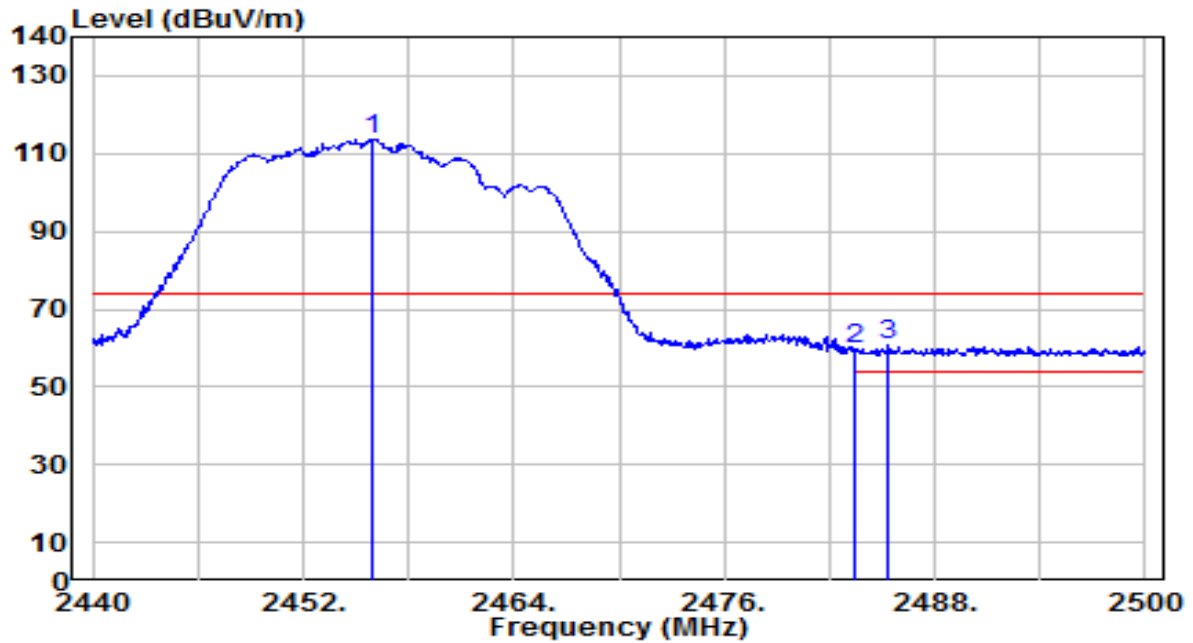


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.900	81.57	32.20	113.77	N/A	N/A	155	220	Peak
2	2483.500	27.26	32.30	59.55	-14.45	74.00	155	220	Peak
3	* 2485.360	28.48	32.31	60.78	-13.22	74.00	155	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

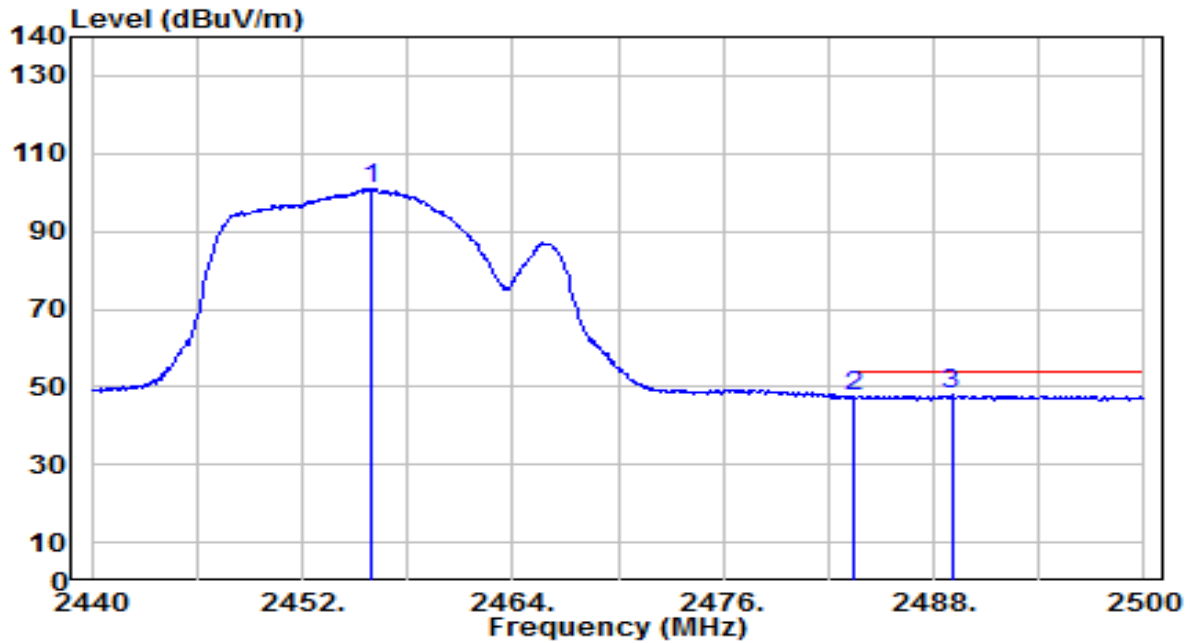


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.900	68.68	32.20	100.87	N/A	N/A	155	220	Average
2	2483.500	15.12	32.30	47.42	-6.58	54.00	155	220	Average
3	* 2489.020	15.71	32.32	48.03	-5.97	54.00	155	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

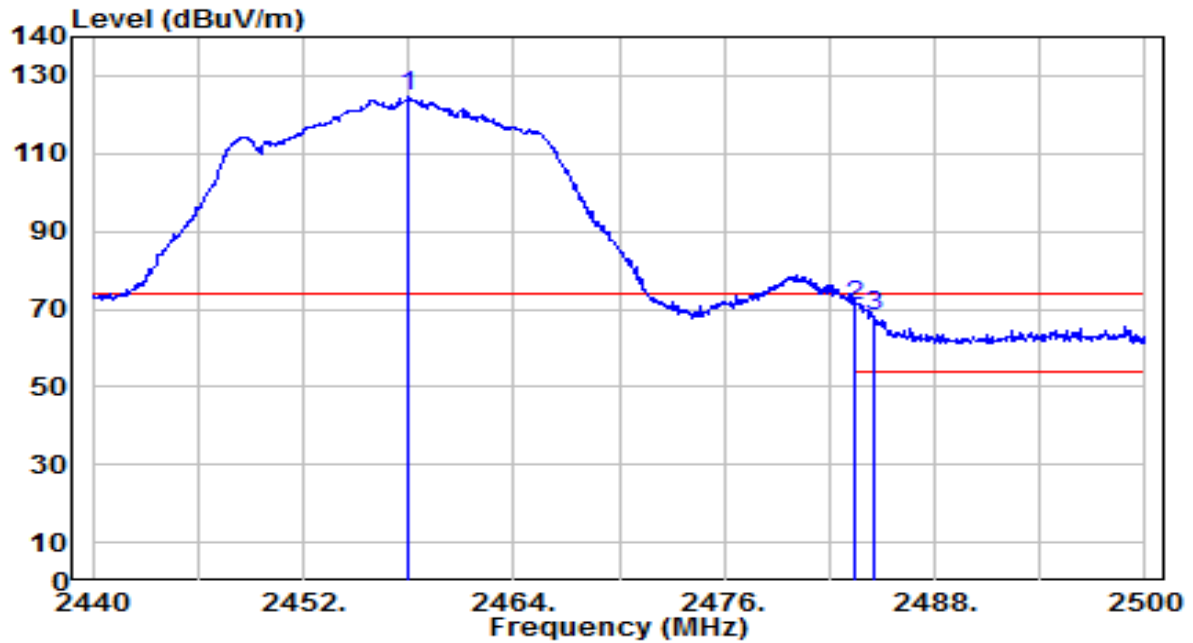


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.000	92.52	32.20	124.72	N/A	N/A	195	225	Peak
2	*	2483.500	38.68	32.30	70.98	-3.02	74.00	195	225	Peak
3		2484.580	35.71	32.30	68.02	-5.98	74.00	195	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

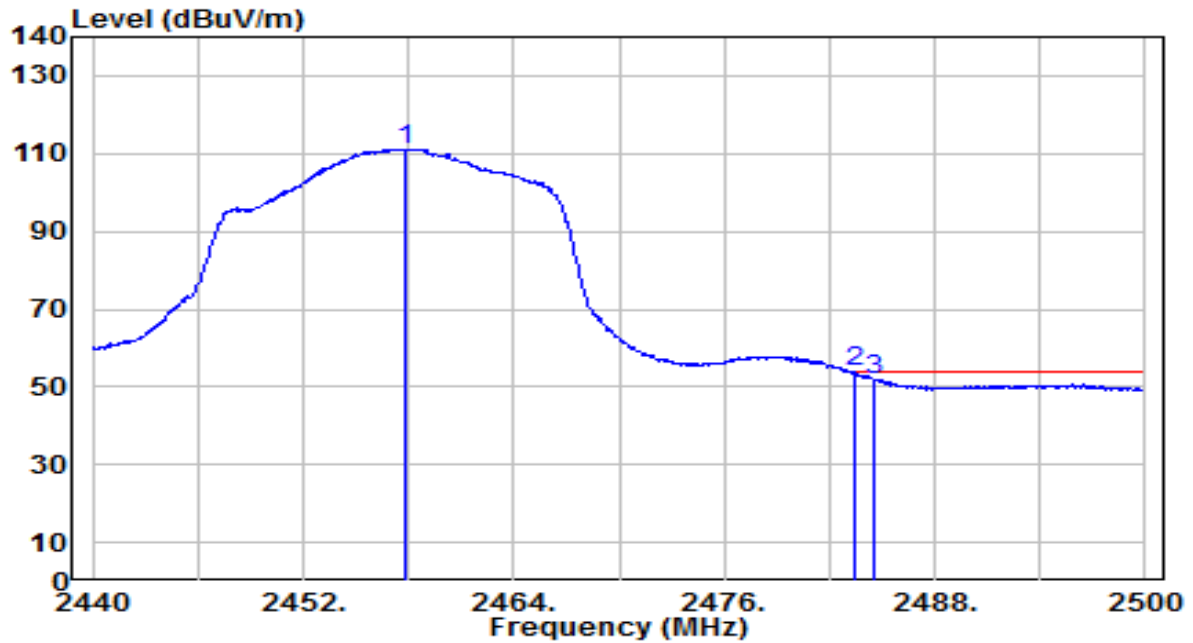


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.760	79.00	32.20	111.21	N/A	N/A	195	225	Average
2	*	2483.500	21.43	32.30	53.73	-0.27	54.00	195	225	Average
3		2484.580	19.62	32.30	51.92	-2.08	54.00	195	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

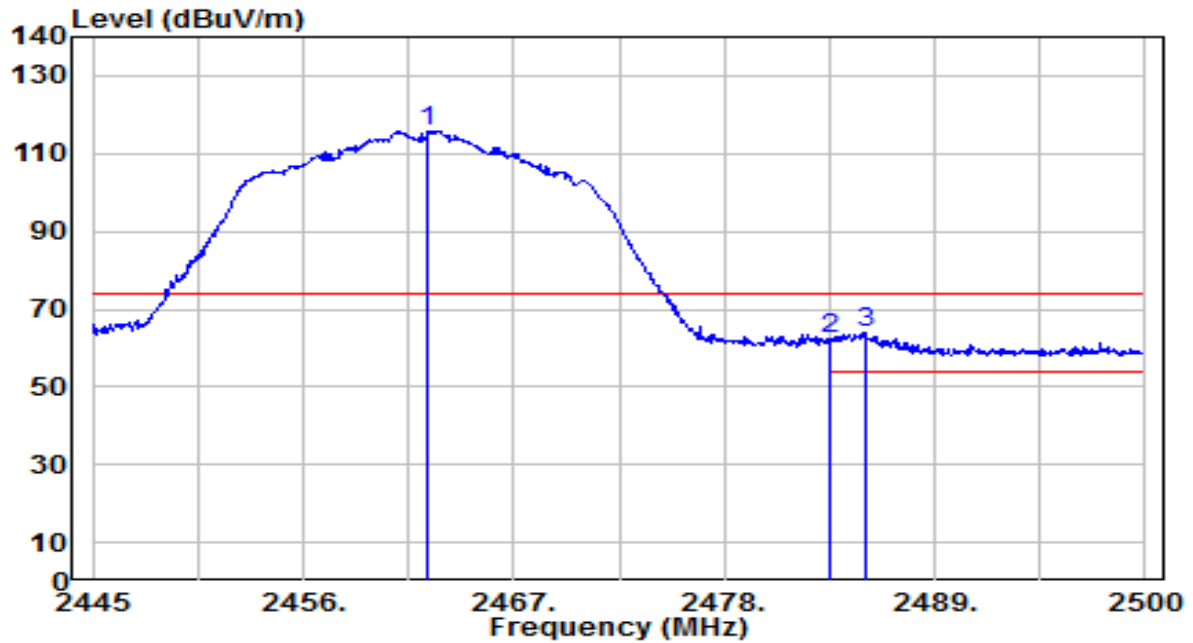


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.490	83.64	32.22	115.86	N/A	N/A	165	350	Peak
2	2483.500	30.17	32.30	62.47	-11.53	74.00	165	350	Peak
3	* 2485.370	31.57	32.31	63.88	-10.12	74.00	165	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

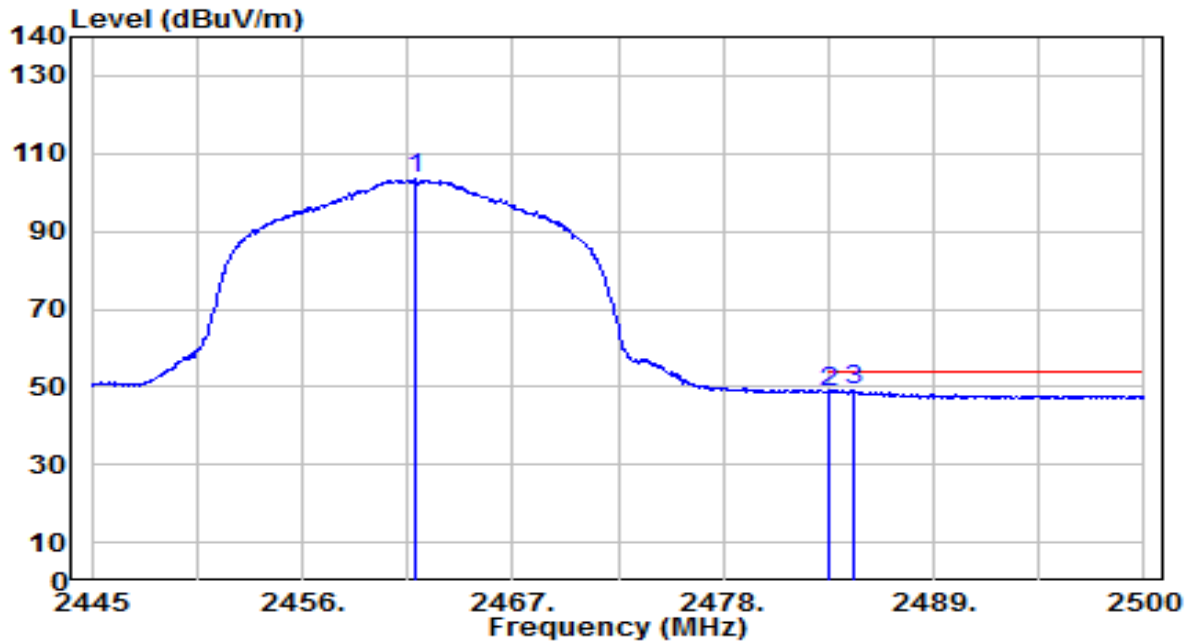


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.885	71.11	32.22	103.32	N/A	N/A	165	350	Average
2	2483.500	16.31	32.30	48.61	-5.39	54.00	165	350	Average
3	* 2484.765	16.71	32.30	49.01	-4.99	54.00	165	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

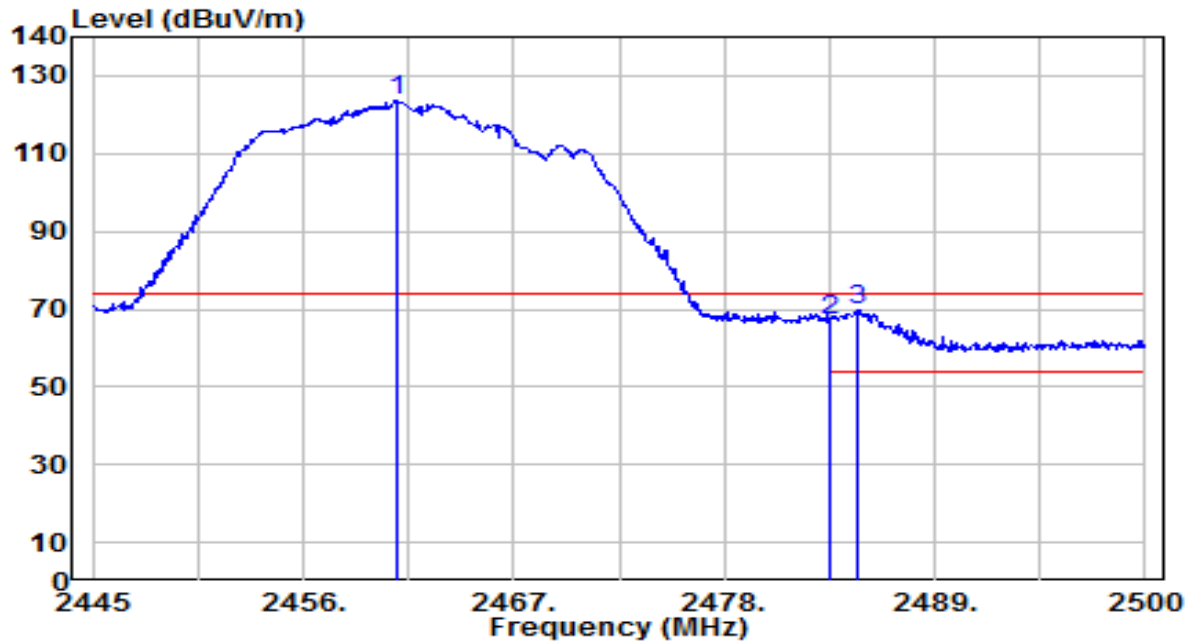


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.840	91.29	32.21	123.50	N/A	N/A	215	115	Peak
2	2483.500	35.04	32.30	67.33	-6.67	74.00	215	115	Peak
3	* 2484.930	37.48	32.30	69.79	-4.21	74.00	215	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

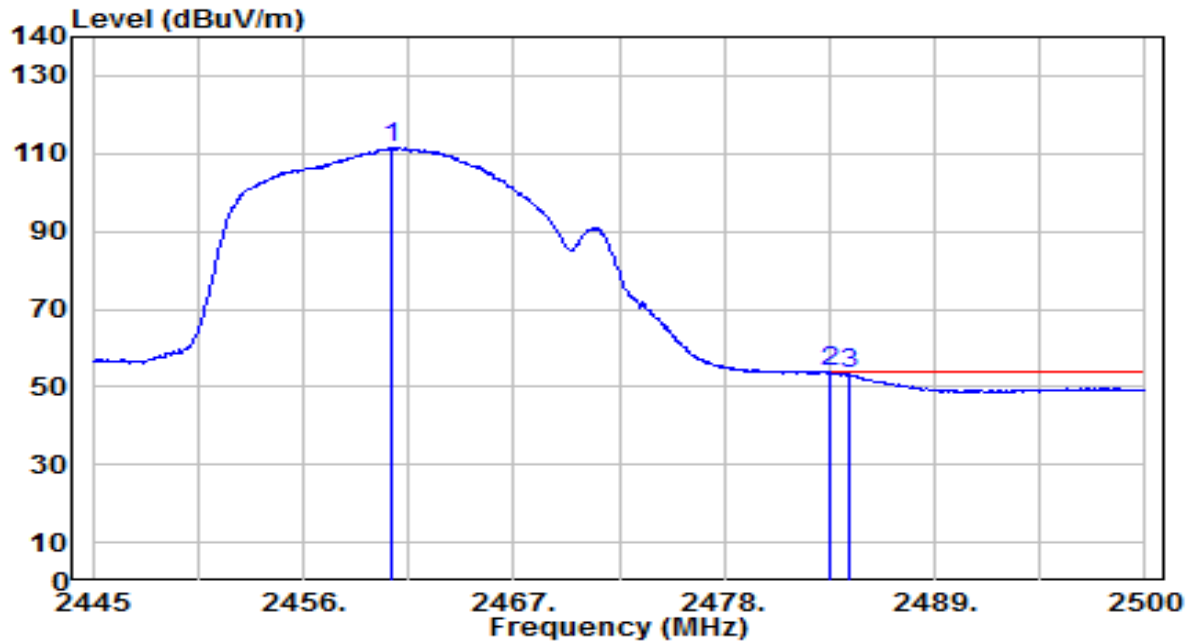


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.565	79.51	32.21	111.73	N/A	N/A	215	115	Average
2	*	2483.500	21.45	32.30	53.75	-0.25	54.00	215	115	Average
3		2484.545	20.82	32.30	53.13	-0.87	54.00	215	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

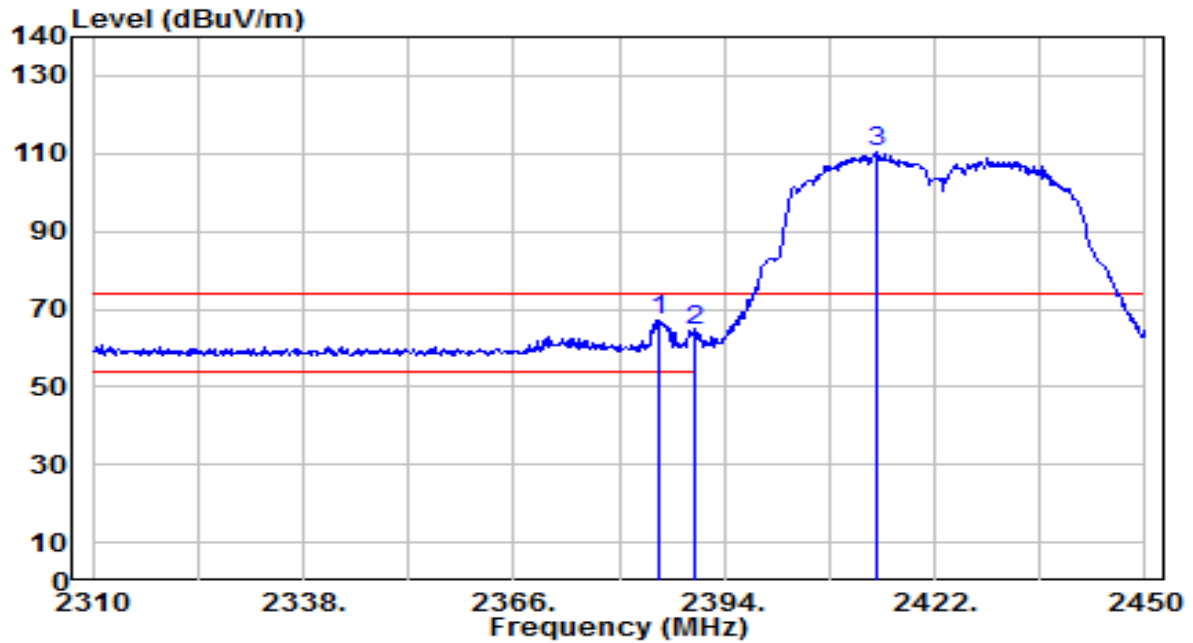


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.460	35.09	31.93	67.02	-6.98	74.00	175	355	Peak
2		2390.000	32.62	31.95	64.57	-9.43	74.00	175	355	Peak
3		2414.440	78.27	32.04	110.31	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

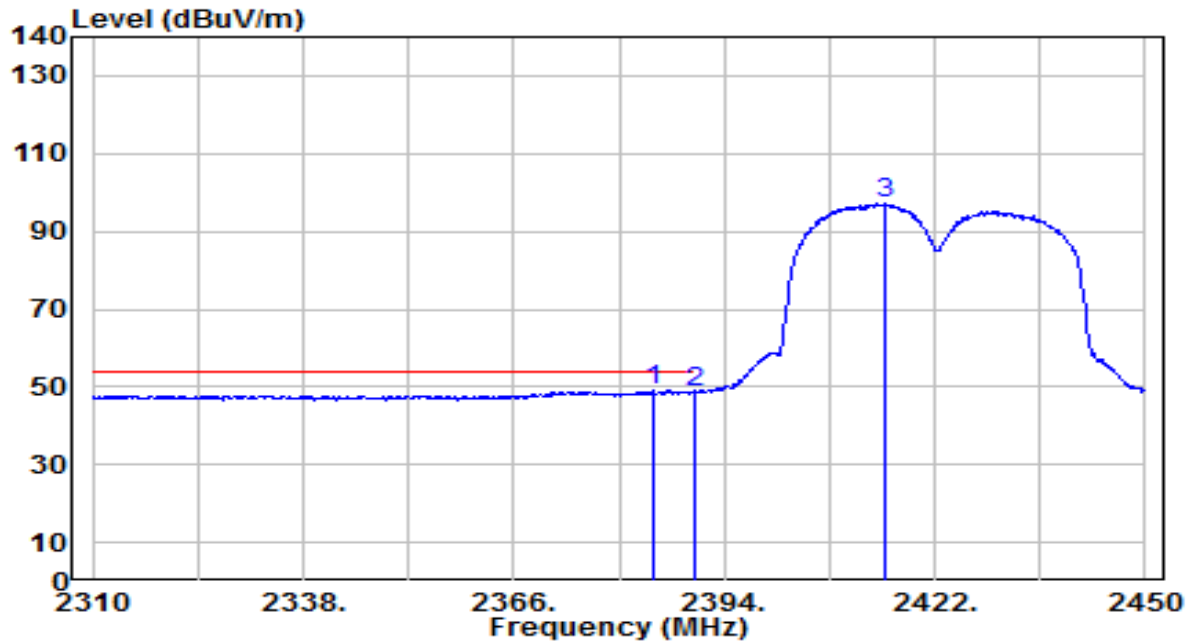


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.480	17.03	31.93	48.96	-5.04	54.00	175	355	Average
2		2390.000	16.69	31.95	48.63	-5.37	54.00	175	355	Average
3		2415.280	65.06	32.04	97.11	N/A	N/A	175	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

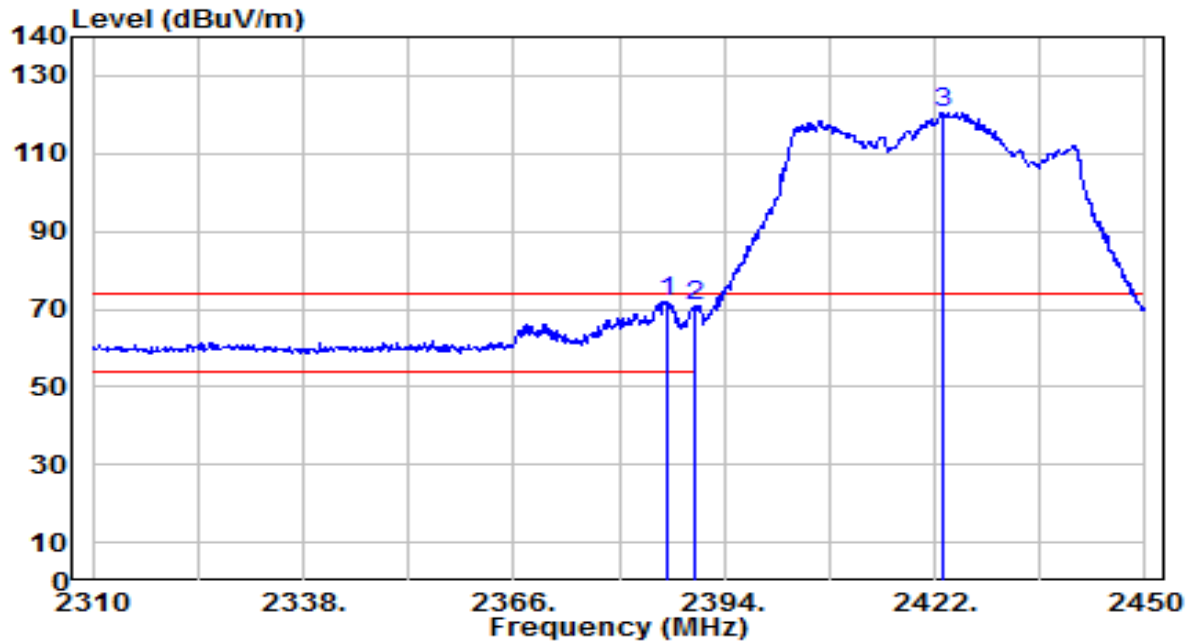


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.580	40.11	31.94	72.04	-1.96	74.00	265	60	Peak
2		2390.000	38.64	31.95	70.59	-3.41	74.00	265	60	Peak
3		2423.260	88.49	32.07	120.56	N/A	N/A	265	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

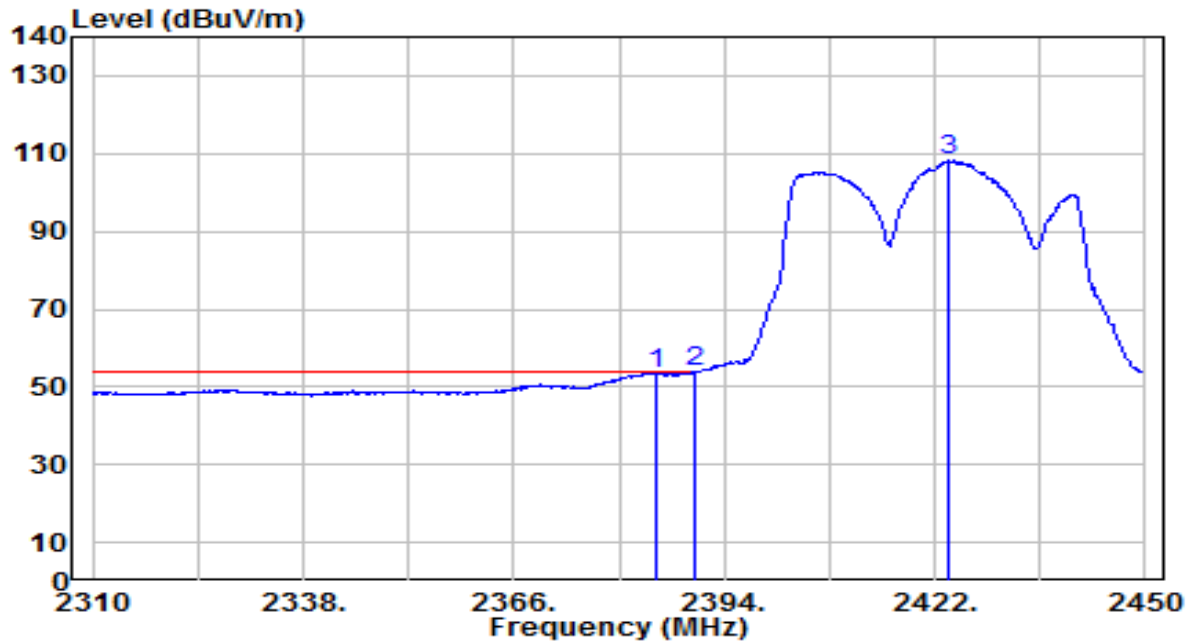


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.040	21.44	31.93	53.37	-0.63	54.00	265	60	Average
2	*	2390.000	21.79	31.95	53.74	-0.26	54.00	265	60	Average
3		2423.680	76.19	32.07	108.26	N/A	N/A	265	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

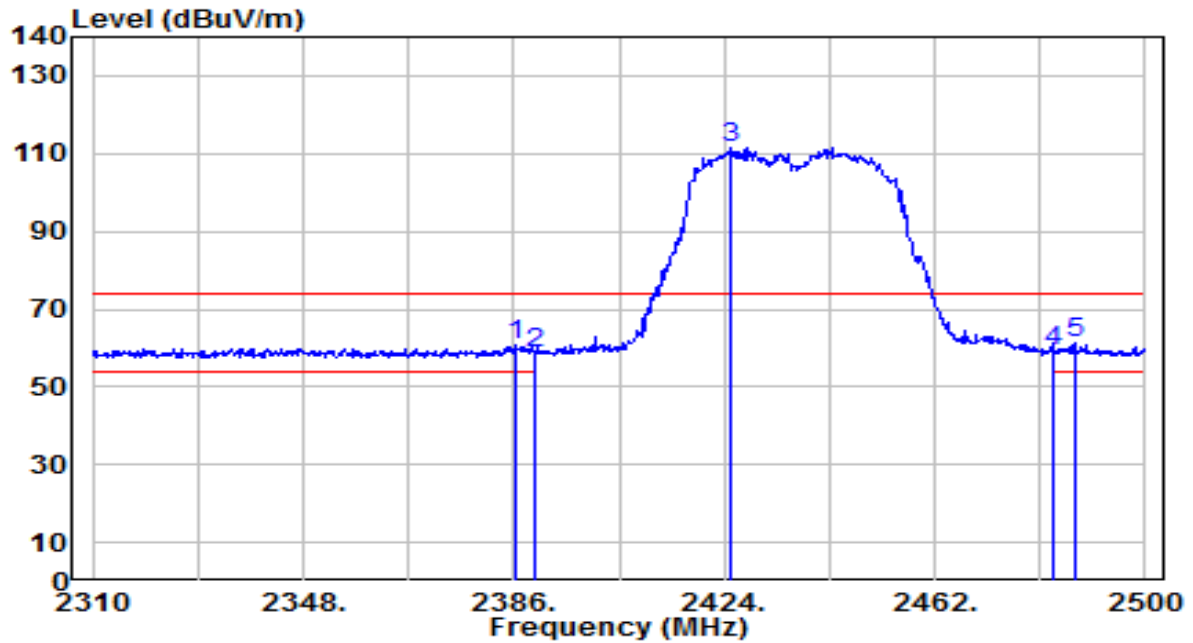


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.570	28.95	31.94	60.88	-13.12	74.00	195	345	Peak
2	2390.000	26.56	31.95	58.51	-15.49	74.00	195	345	Peak
3	2425.330	79.46	32.08	111.54	N/A	N/A	195	345	Peak
4	2483.500	27.02	32.30	59.32	-14.68	74.00	195	345	Peak
5	* 2487.270	28.91	32.31	61.23	-12.77	74.00	195	345	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

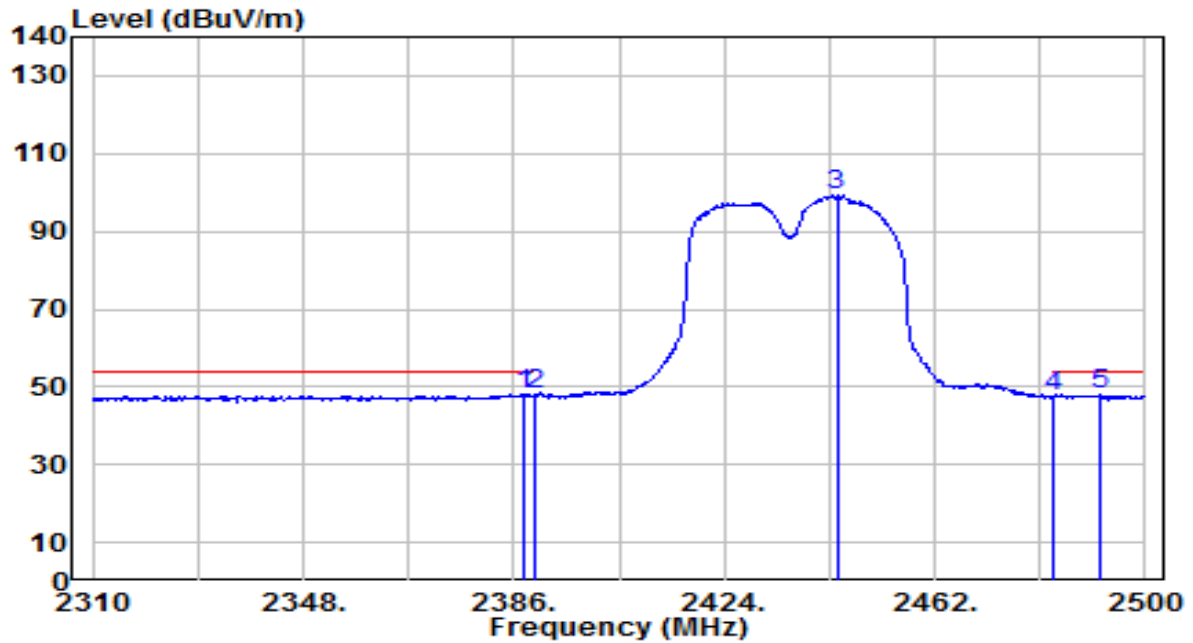


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.710	16.32	31.94	48.26	-5.74	54.00	195	345	Average
2		2390.000	15.94	31.95	47.89	-6.11	54.00	195	345	Average
3		2444.330	66.92	32.15	99.07	N/A	N/A	195	345	Average
4		2483.500	15.27	32.30	47.57	-6.43	54.00	195	345	Average
5		2491.640	15.53	32.33	47.86	-6.14	54.00	195	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

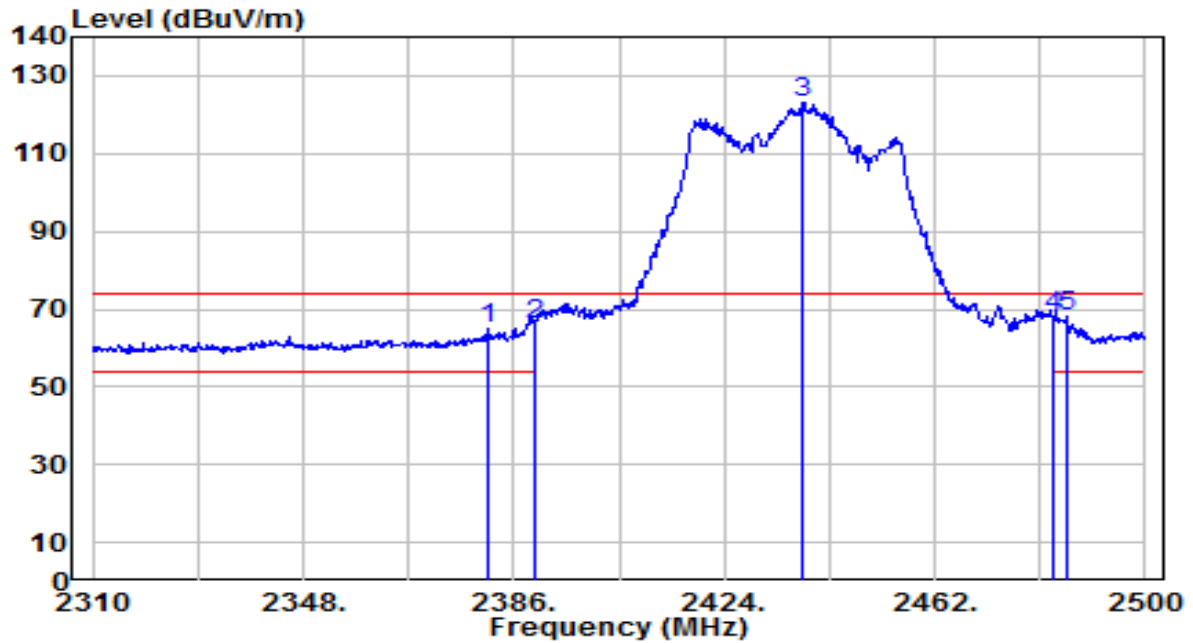


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2381.440	33.28	31.92	65.20	-8.80	74.00	220	225	Peak
2		2390.000	34.28	31.95	66.23	-7.77	74.00	220	225	Peak
3		2438.060	90.97	32.13	123.10	N/A	N/A	220	225	Peak
4	*	2483.500	36.09	32.30	68.39	-5.61	74.00	220	225	Peak
5		2485.750	36.02	32.31	68.32	-5.68	74.00	220	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

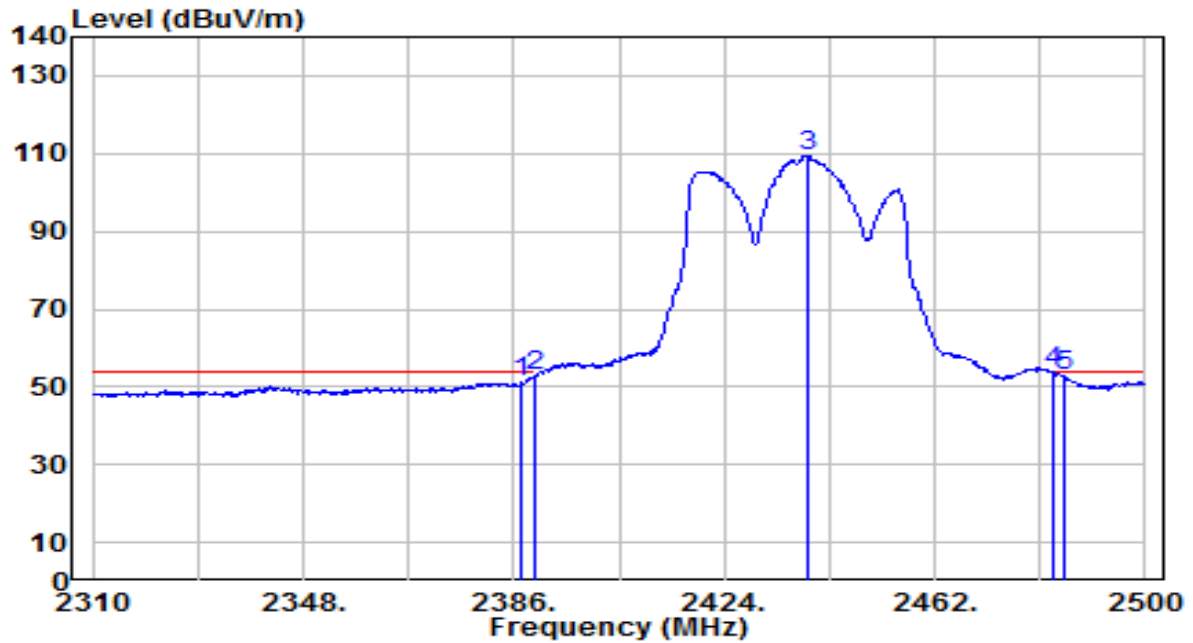


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.520	19.10	31.94	51.04	-2.96	54.00	220	225	Average
2		2390.000	20.91	31.95	52.86	-1.14	54.00	220	225	Average
3		2439.010	77.17	32.13	109.30	N/A	N/A	220	225	Average
4	*	2483.500	21.56	32.30	53.86	-0.14	54.00	220	225	Average
5		2485.370	20.46	32.31	52.77	-1.23	54.00	220	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

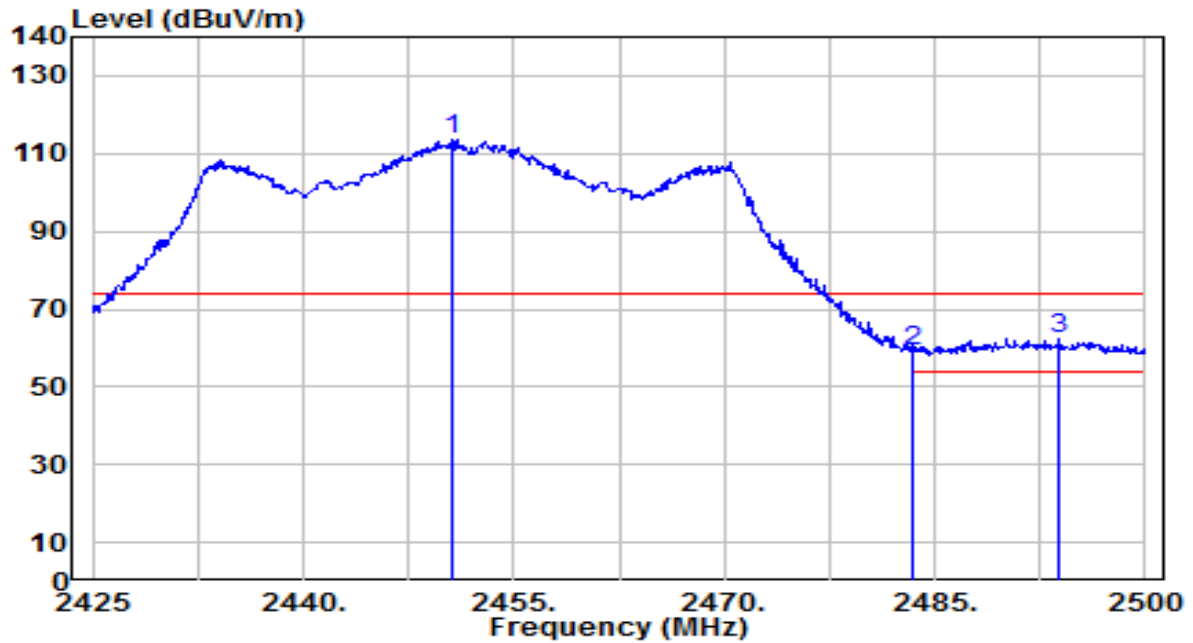


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.575	81.47	32.18	113.65	N/A	N/A	165	350	Peak
2	2483.500	27.11	32.30	59.41	-14.59	74.00	165	350	Peak
3	* 2493.850	30.10	32.34	62.44	-11.56	74.00	165	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

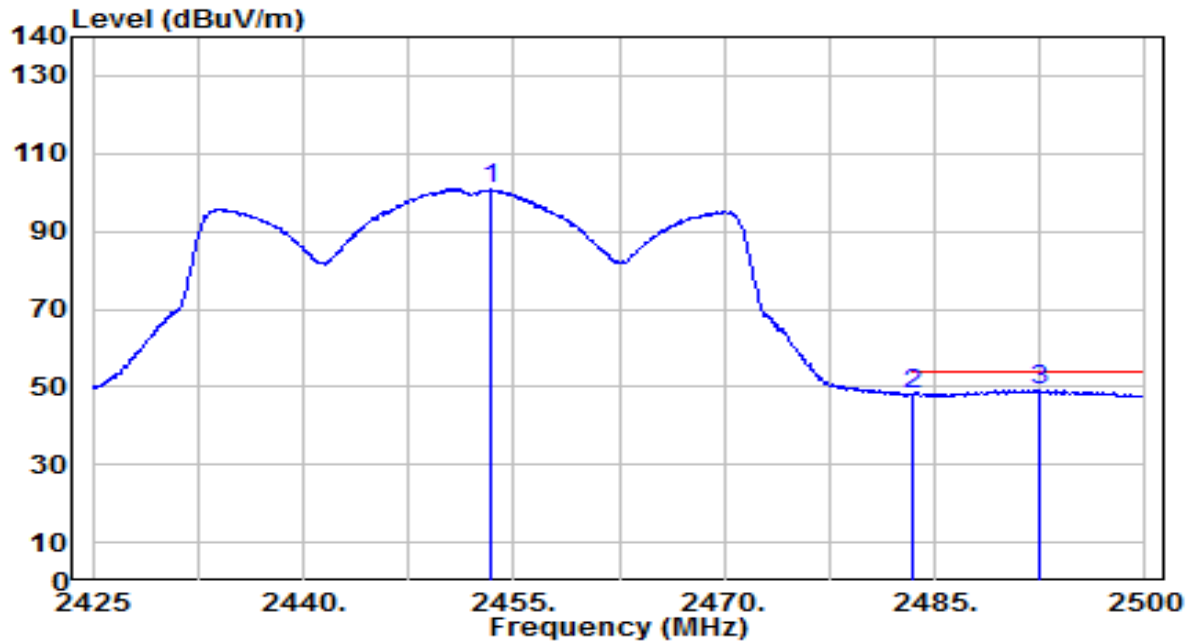


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.275	68.80	32.19	100.99	N/A	N/A	165	350	Average
2	2483.500	15.86	32.30	48.16	-5.84	54.00	165	350	Average
3	* 2492.425	16.89	32.33	49.23	-4.77	54.00	165	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

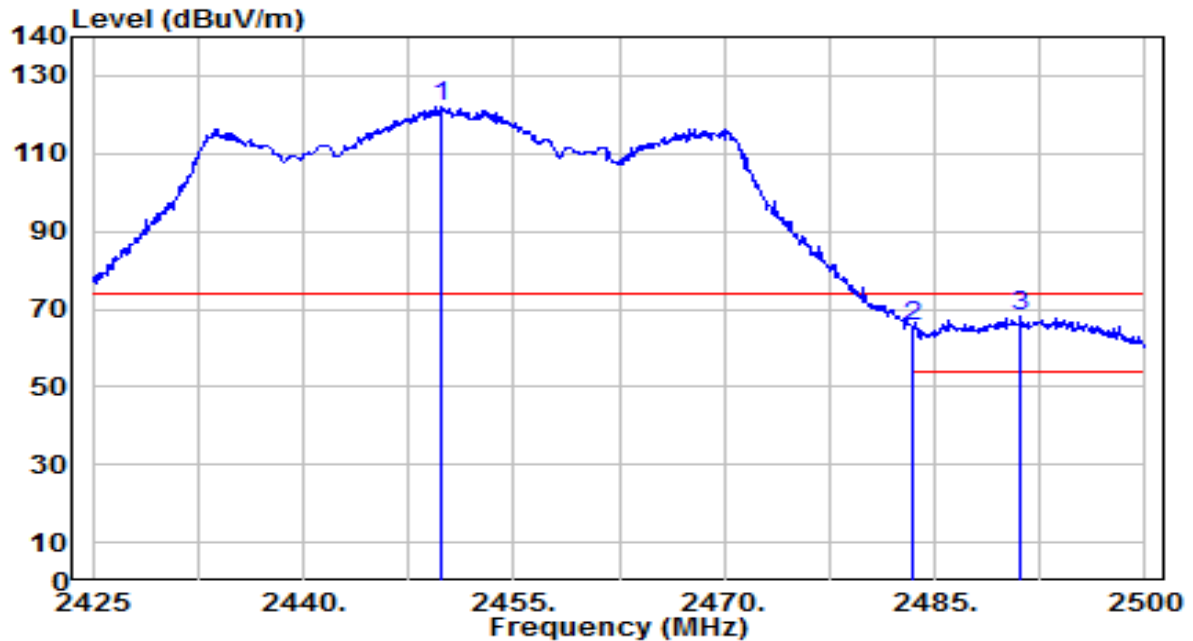


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2449.750	89.68	32.17	121.85	N/A	N/A	215	115	Peak
2	2483.500	33.37	32.30	65.67	-8.33	74.00	215	115	Peak
3	* 2491.150	35.76	32.33	68.09	-5.91	74.00	215	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

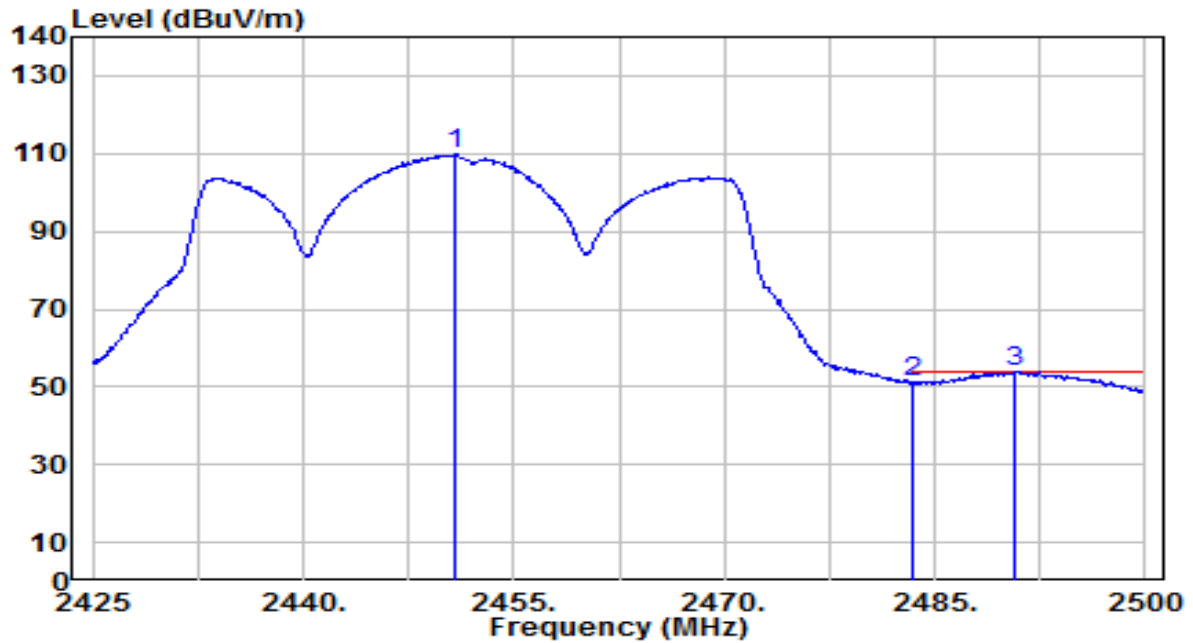


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.800	77.59	32.18	109.76	N/A	N/A	215	115	Average
2	2483.500	18.98	32.30	51.28	-2.72	54.00	215	115	Average
3	* 2490.700	21.51	32.33	53.84	-0.16	54.00	215	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

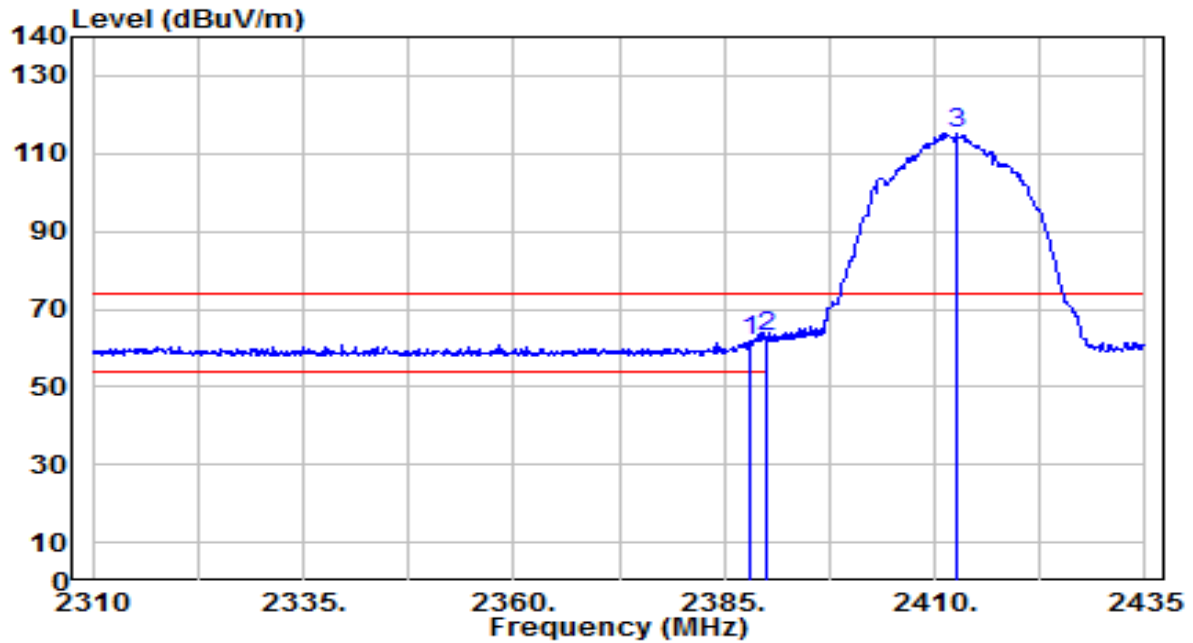


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	29.69	31.94	61.63	-12.37	74.00	175	355	Peak
2	*	2390.000	30.92	31.95	62.86	-11.14	74.00	175	355	Peak
3		2412.625	83.01	32.03	115.04	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

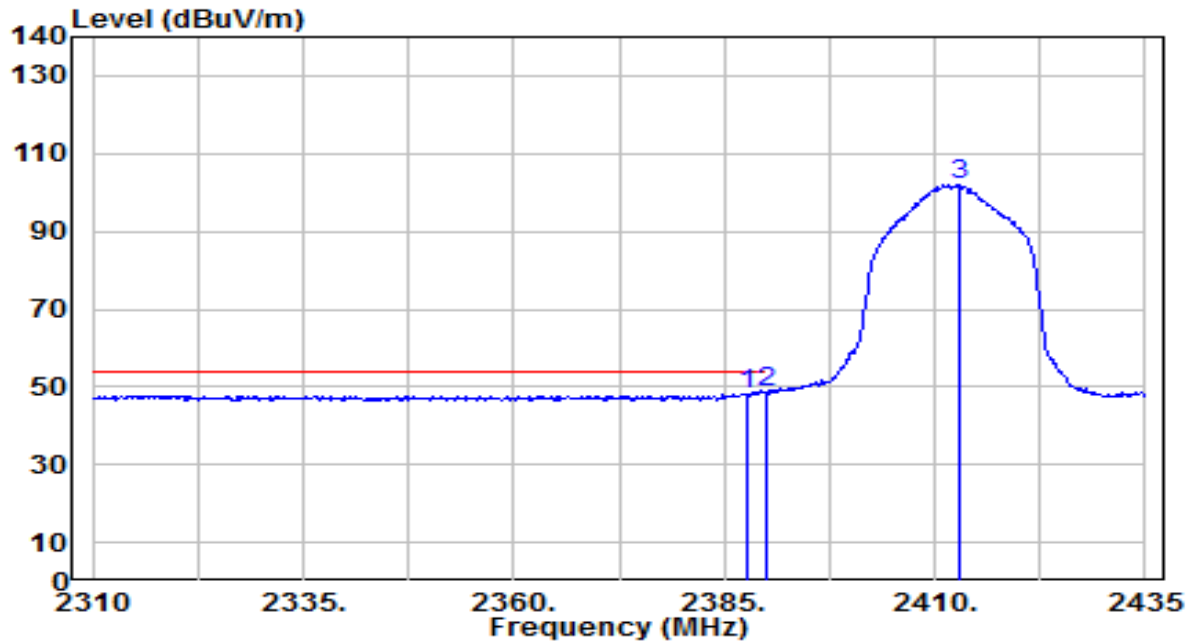


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.625	16.38	31.94	48.32	-5.68	54.00	175	355	Average
2	*	2390.000	16.45	31.95	48.40	-5.60	54.00	175	355	Average
3		2413.000	70.07	32.03	102.11	N/A	N/A	175	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

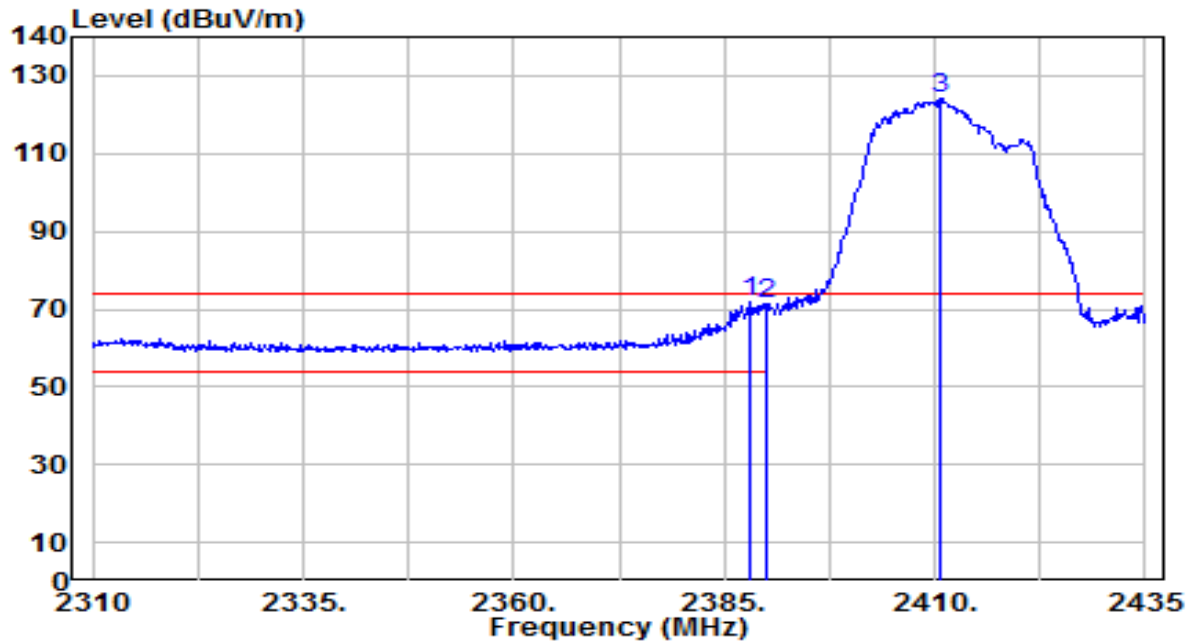


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	39.79	31.94	71.73	-2.27	74.00	225	65	Peak
2		2390.000	39.30	31.95	71.24	-2.76	74.00	225	65	Peak
3		2410.500	92.22	32.03	124.24	N/A	N/A	225	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

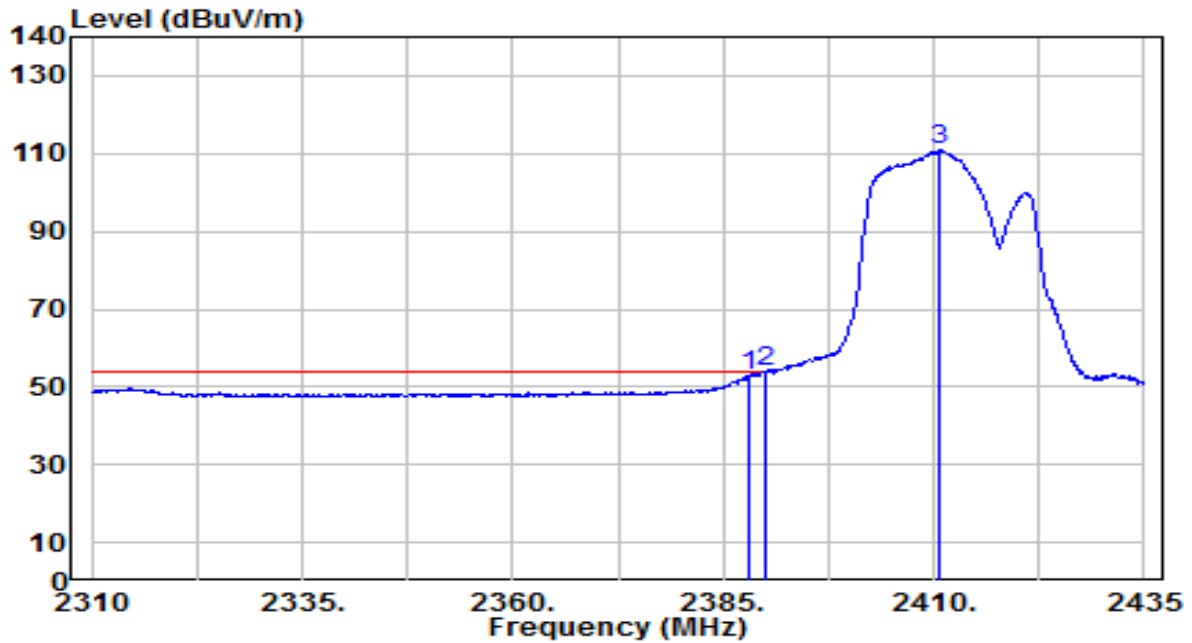


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	20.99	31.94	52.93	-1.07	54.00	225	65	Average
2	*	2390.000	21.87	31.95	53.82	-0.18	54.00	225	65	Average
3		2410.625	78.88	32.03	110.91	N/A	N/A	225	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

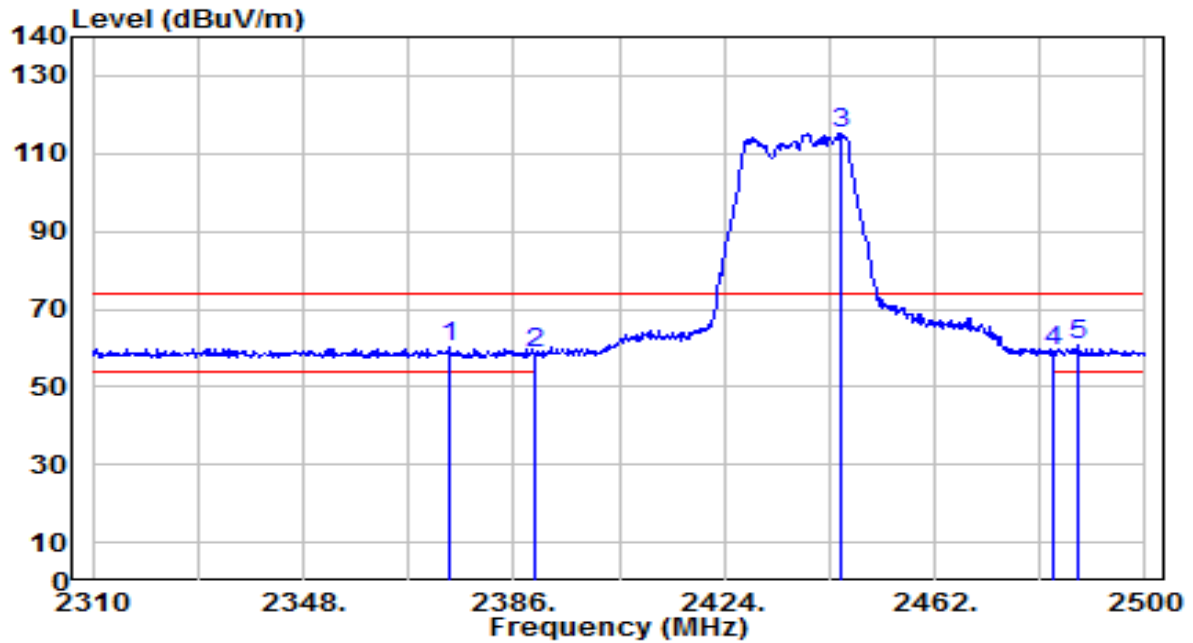


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2374.410	28.51	31.89	60.40	-13.60	74.00	195	345	Peak
2	2390.000	26.86	31.95	58.81	-15.19	74.00	195	345	Peak
3	2445.090	83.08	32.15	115.23	N/A	N/A	195	345	Peak
4	2483.500	26.62	32.30	58.92	-15.08	74.00	195	345	Peak
5	* 2487.650	28.67	32.31	60.98	-13.02	74.00	195	345	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

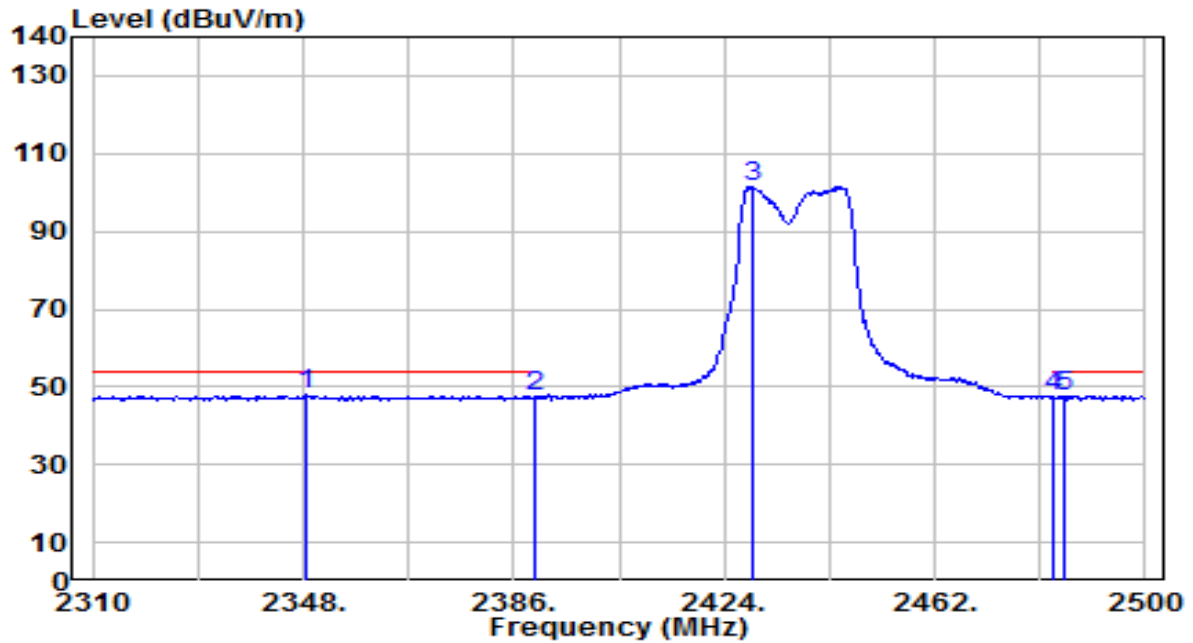


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2348.380	16.13	31.79	47.92	-6.08	54.00	195	345	Average
2		2390.000	15.52	31.95	47.47	-6.53	54.00	195	345	Average
3		2429.130	69.44	32.09	101.54	N/A	N/A	195	345	Average
4		2483.500	15.07	32.30	47.36	-6.64	54.00	195	345	Average
5		2485.560	15.35	32.31	47.65	-6.35	54.00	195	345	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

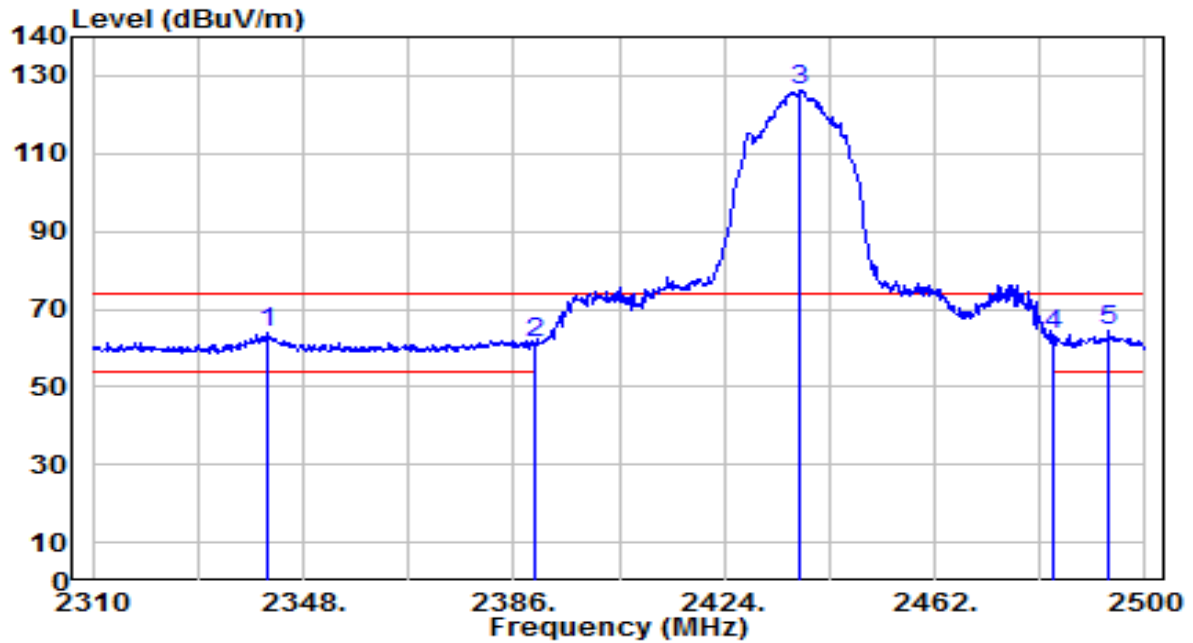


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2341.350	32.27	31.77	64.03	-9.97	74.00	215	225	Peak
2	2390.000	29.24	31.95	61.19	-12.81	74.00	215	225	Peak
3	2437.680	94.16	32.13	126.29	N/A	N/A	215	225	Peak
4	2483.500	30.98	32.30	63.27	-10.73	74.00	215	225	Peak
5	* 2493.350	31.97	32.34	64.31	-9.69	74.00	215	225	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

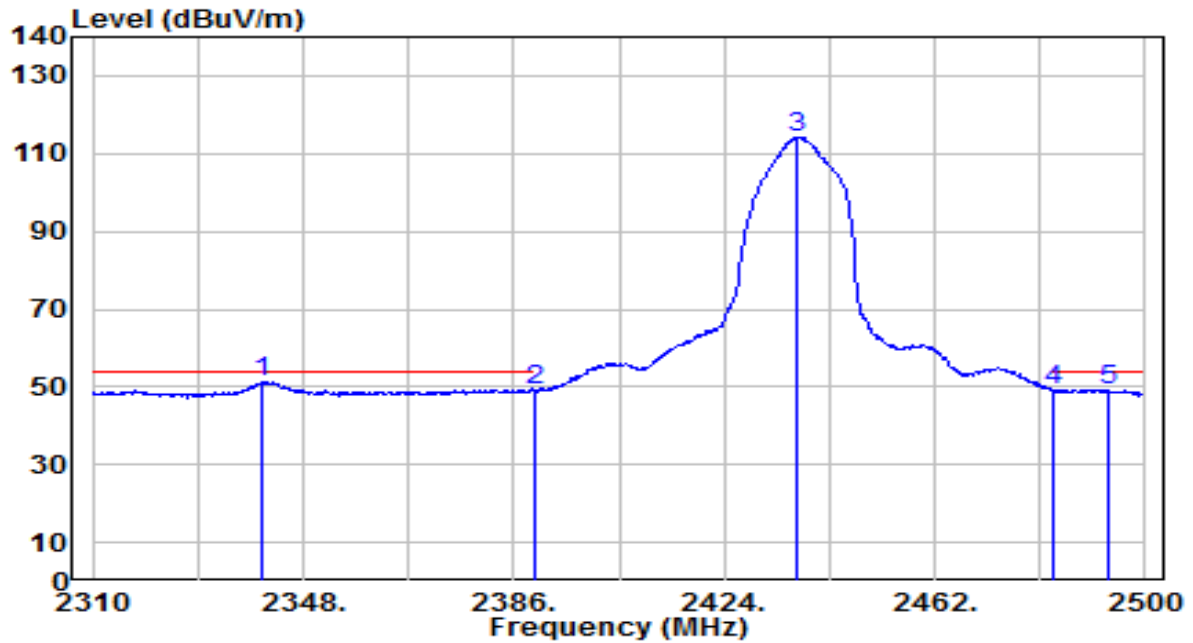


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2340.400	19.39	31.76	51.15	-2.85	54.00	215	225	Average
2		2390.000	17.07	31.95	49.02	-4.98	54.00	215	225	Average
3		2436.920	82.09	32.12	114.21	N/A	N/A	215	225	Average
4		2483.500	16.74	32.30	49.04	-4.96	54.00	215	225	Average
5		2493.540	17.04	32.34	49.38	-4.62	54.00	215	225	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

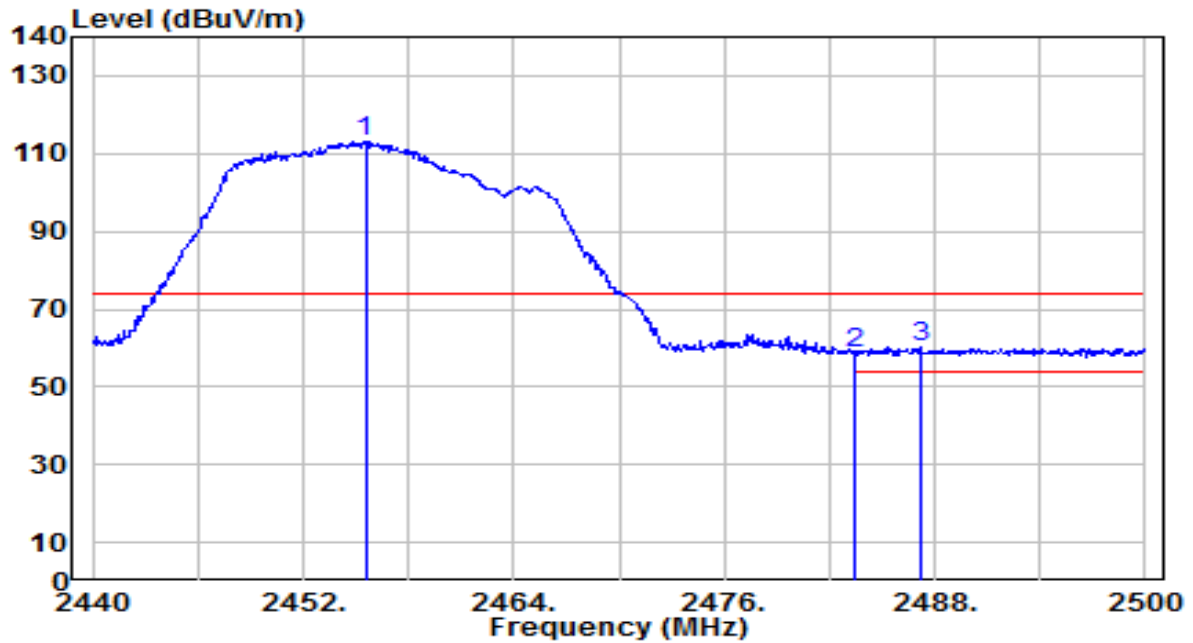


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.540	80.73	32.19	112.93	N/A	N/A	155	220	Peak
2	2483.500	26.53	32.30	58.82	-15.18	74.00	155	220	Peak
3	* 2487.160	27.79	32.31	60.11	-13.89	74.00	155	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

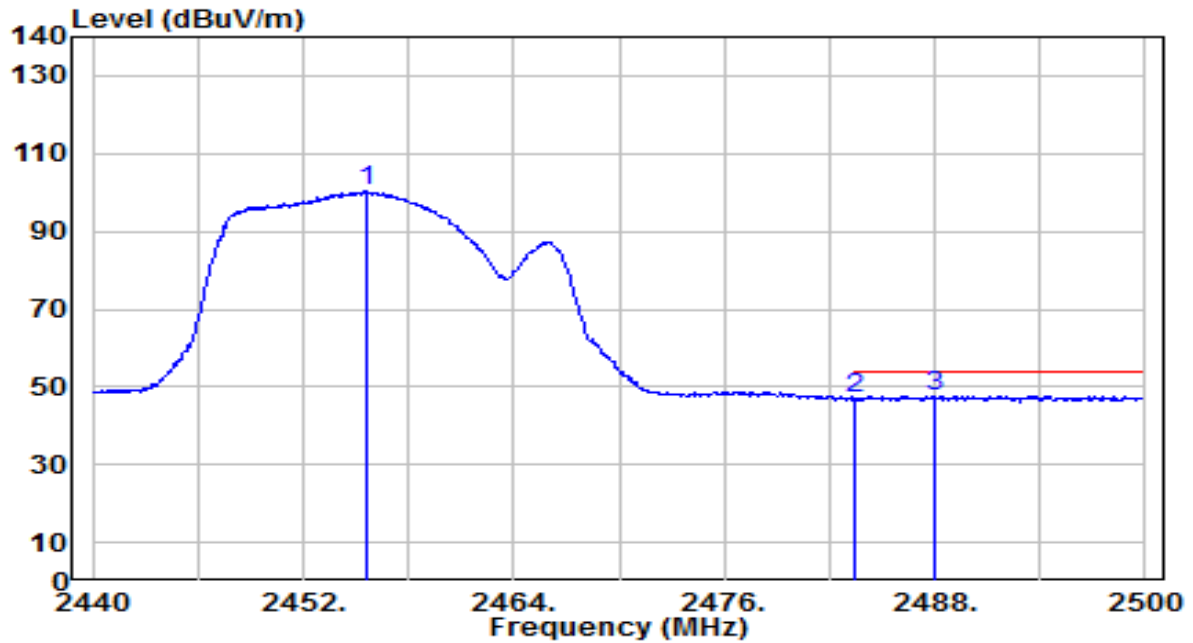


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.660	68.41	32.19	100.61	N/A	N/A	155	220	Average
2	2483.500	14.79	32.30	47.09	-6.91	54.00	155	220	Average
3	* 2488.060	15.36	32.32	47.68	-6.32	54.00	155	220	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

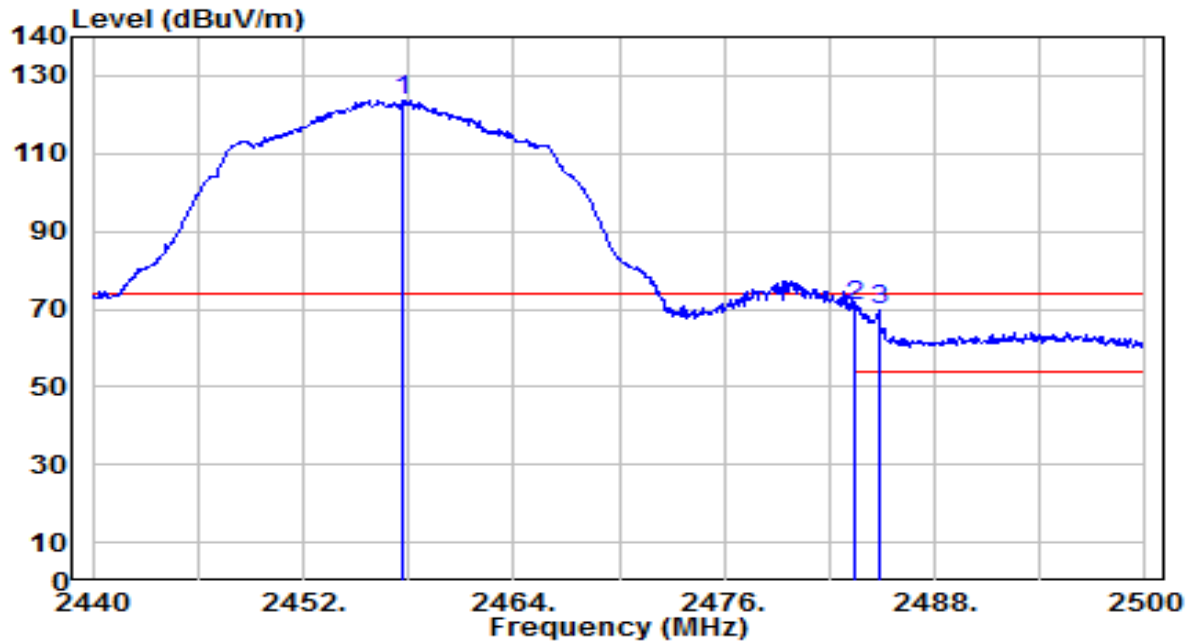


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.700	91.60	32.20	123.80	N/A	N/A	205	225	Peak
2	*	2483.500	38.69	32.30	70.99	-3.01	74.00	205	225	Peak
3		2484.820	37.28	32.30	69.59	-4.41	74.00	205	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 10_ANT 0+1	Test Voltage	AC 120V/60Hz

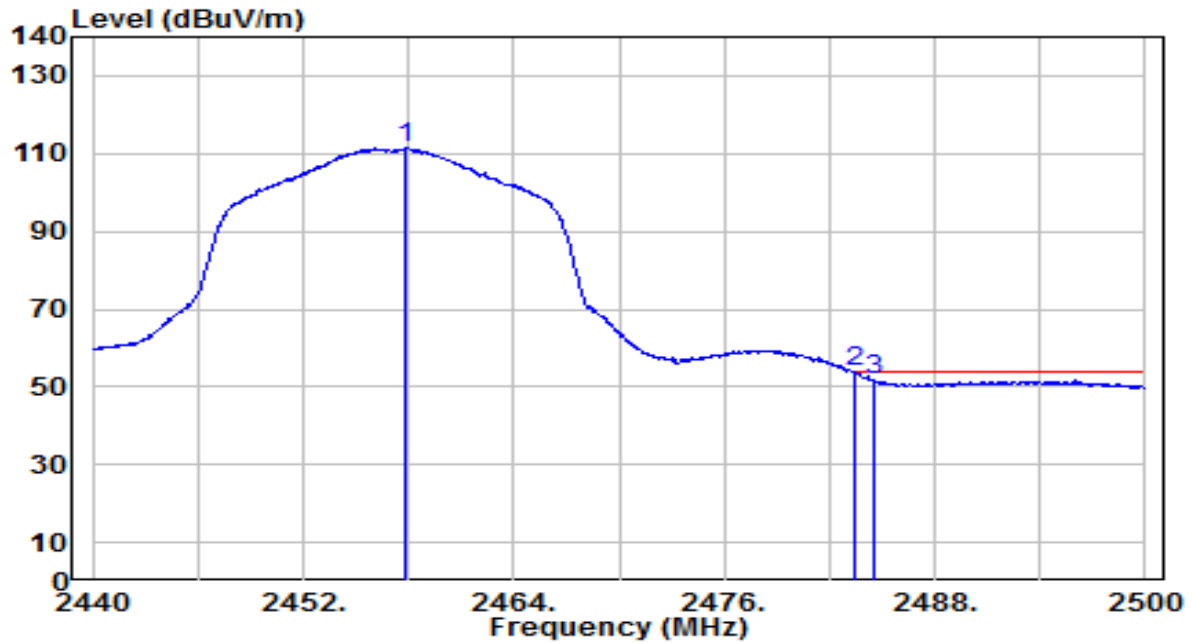


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.760	79.22	32.20	111.42	N/A	N/A	205	225	Average
2	*	2483.500	21.41	32.30	53.71	-0.29	54.00	205	225	Average
3		2484.520	19.55	32.30	51.86	-2.14	54.00	205	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

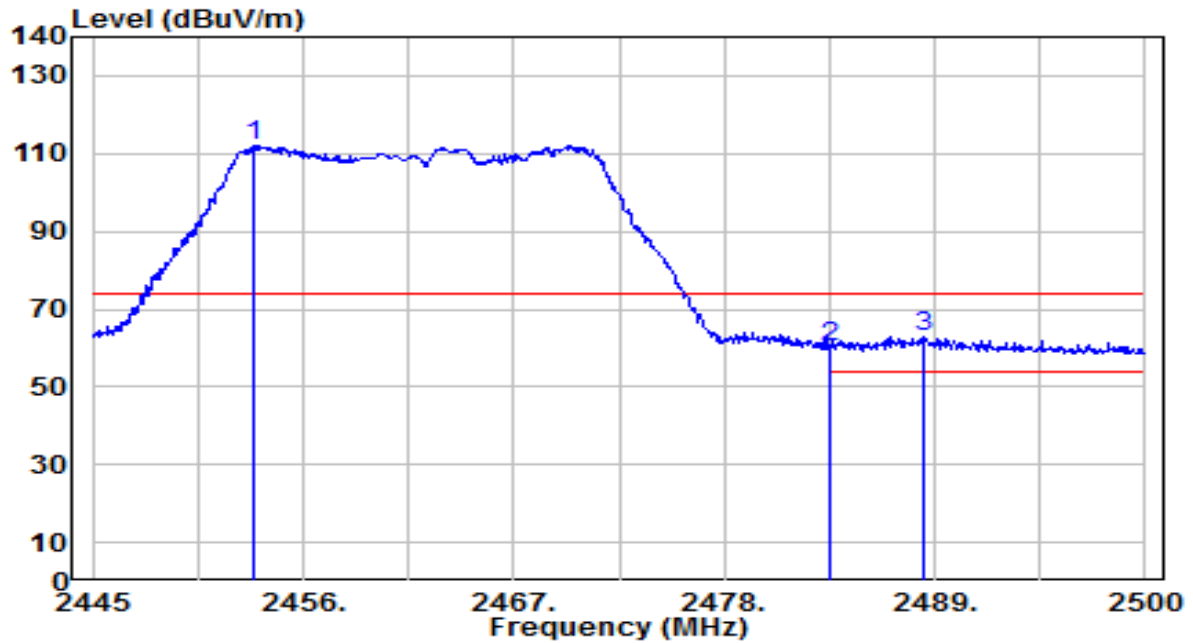


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.470	79.85	32.19	112.04	N/A	N/A	165	350	Peak
2	2483.500	27.94	32.30	60.24	-13.76	74.00	165	350	Peak
3	* 2488.395	30.37	32.32	62.69	-11.31	74.00	165	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

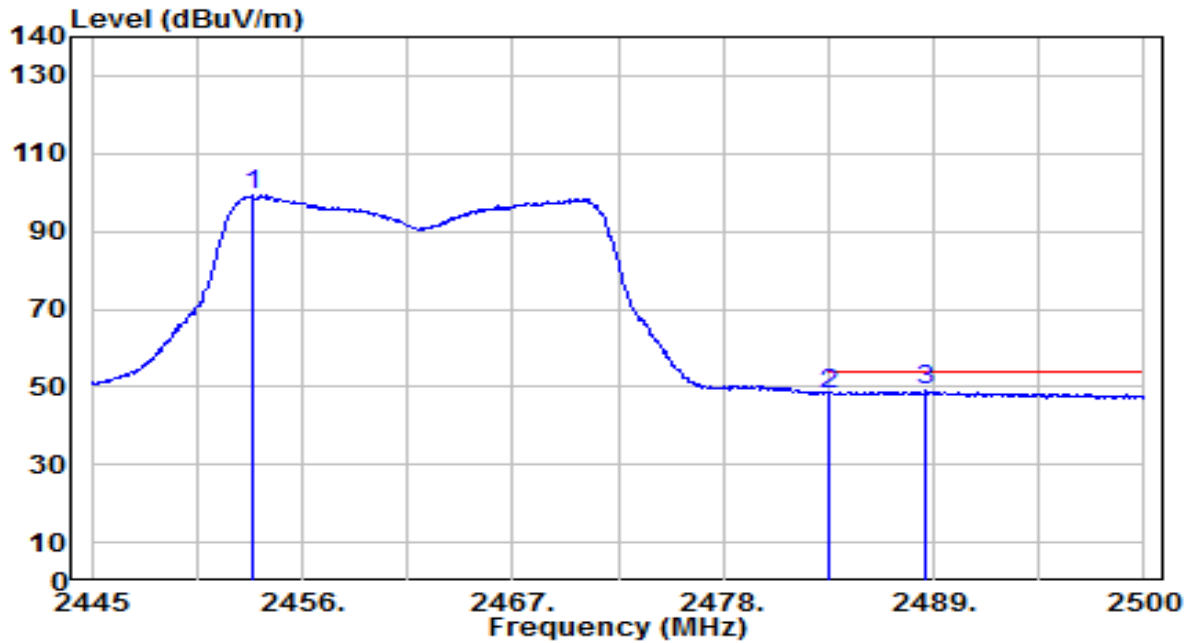


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.360	67.24	32.19	99.43	N/A	N/A	165	350	Average
2	2483.500	15.62	32.30	47.92	-6.08	54.00	165	350	Average
3	* 2488.615	16.62	32.32	48.94	-5.06	54.00	165	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

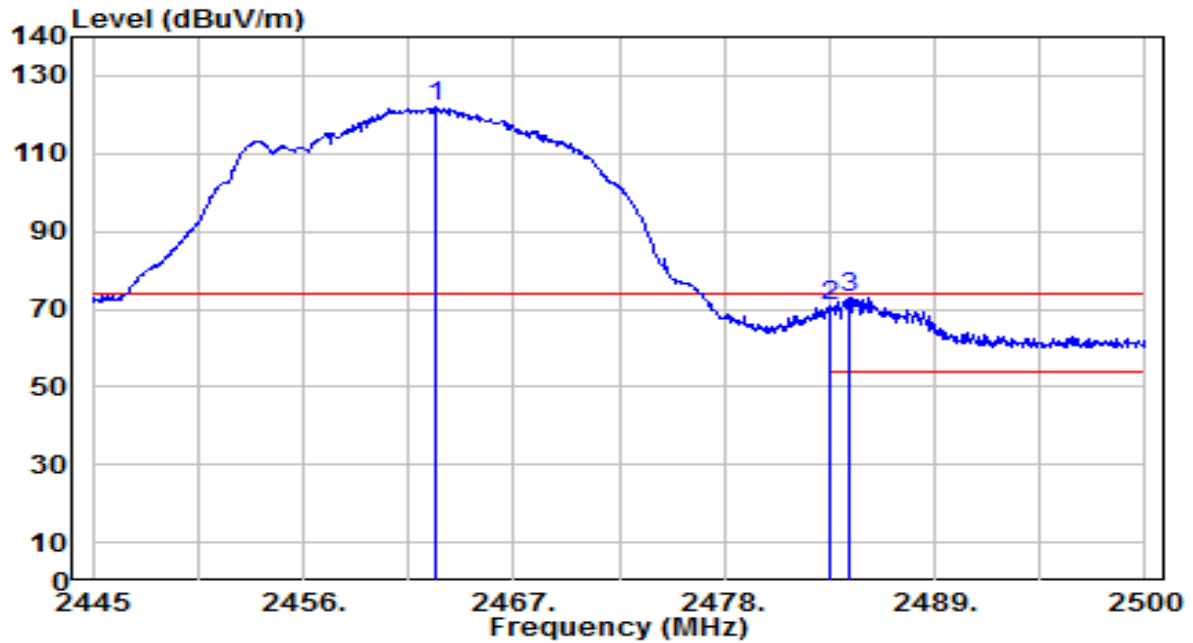


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.875	89.61	32.22	121.83	N/A	N/A	225	55	Peak
2	2483.500	38.72	32.30	71.01	-2.99	74.00	225	55	Peak
3	* 2484.490	40.86	32.30	73.16	-0.84	74.00	225	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

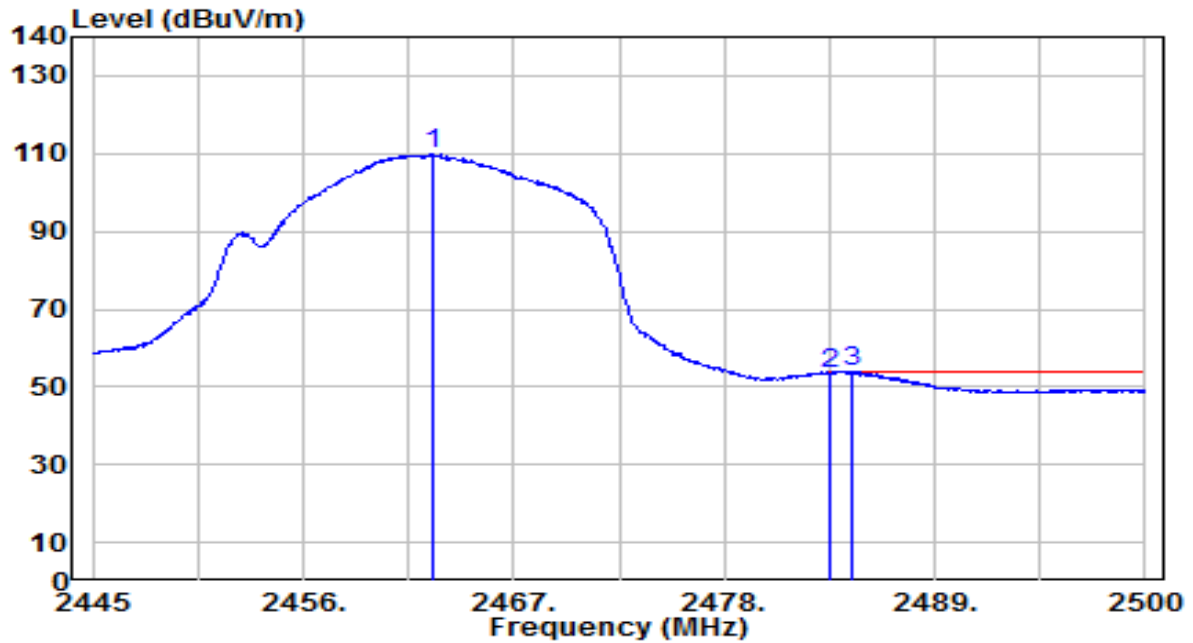


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.765	77.44	32.22	109.66	N/A	N/A	225	55	Average
2	2483.500	20.83	32.30	53.13	-0.87	54.00	225	55	Average
3	* 2484.655	21.48	32.30	53.78	-0.22	54.00	225	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

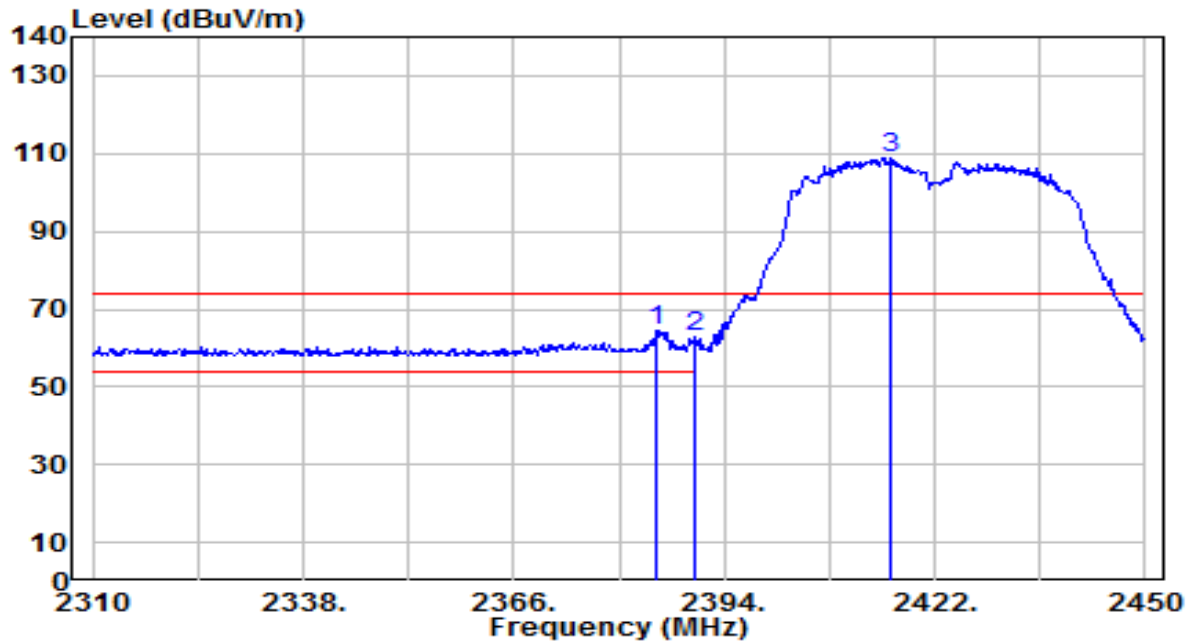


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.040	32.77	31.93	64.70	-9.30	74.00	175	355	Peak
2	2390.000	30.99	31.95	62.93	-11.07	74.00	175	355	Peak
3	* 2416.260	76.86	32.05	108.90	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

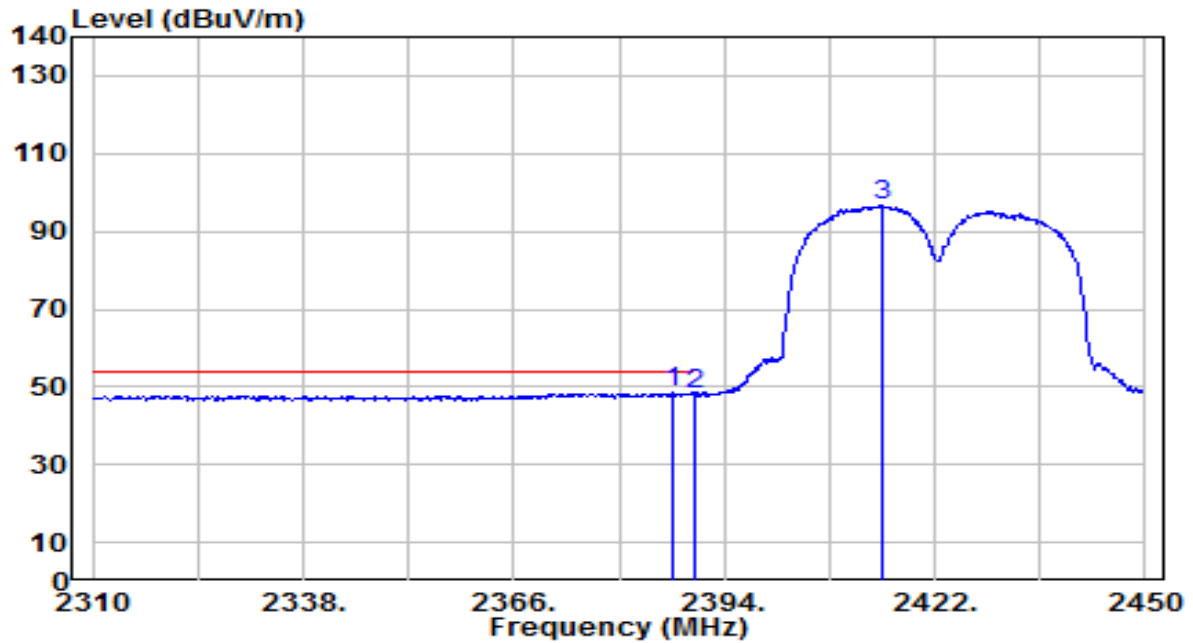


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	16.51	31.94	48.45	-5.55	54.00	175	355	Average
2		2390.000	16.19	31.95	48.14	-5.86	54.00	175	355	Average
3		2414.860	64.79	32.04	96.84	N/A	N/A	175	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

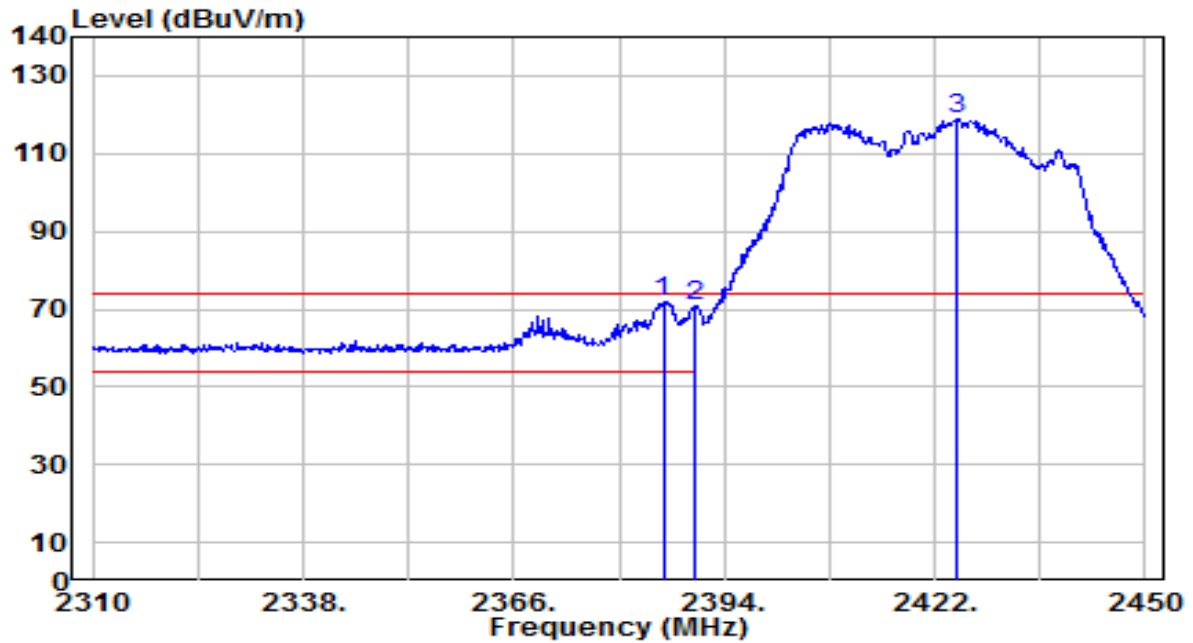


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.880	40.10	31.93	72.03	-1.97	74.00	225	65	Peak
2		2390.000	38.59	31.95	70.54	-3.46	74.00	225	65	Peak
3		2425.080	86.72	32.08	118.80	N/A	N/A	225	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

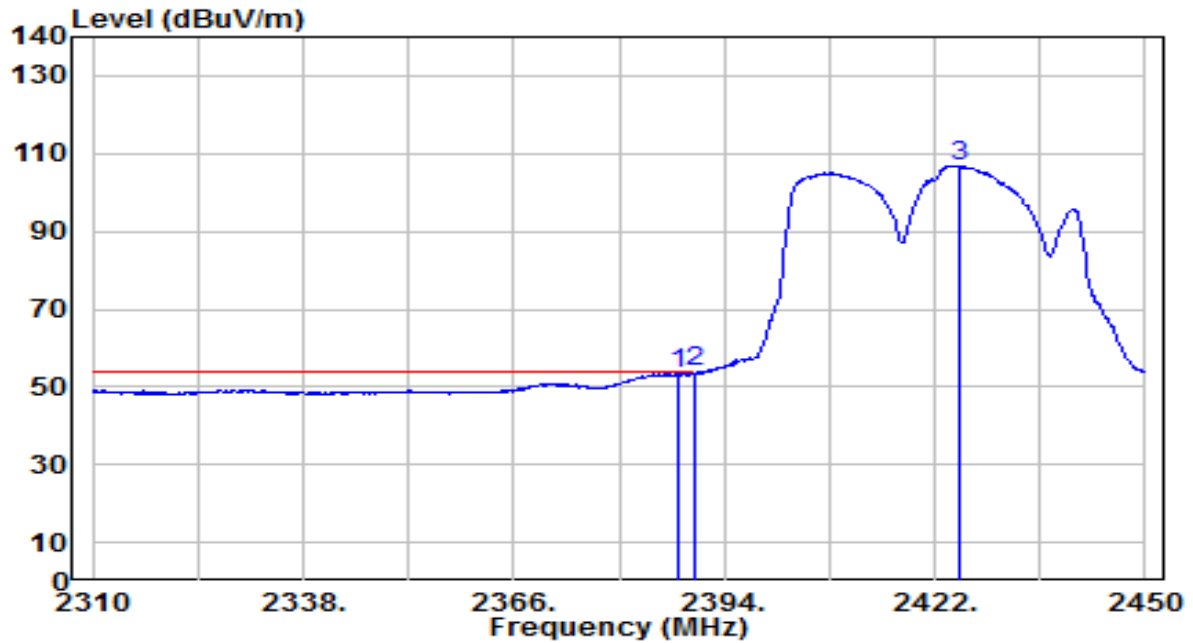


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.840	21.62	31.94	53.56	-0.44	54.00	225	65	Average
2	*	2390.000	21.79	31.95	53.74	-0.26	54.00	225	65	Average
3		2425.220	74.89	32.08	106.97	N/A	N/A	225	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

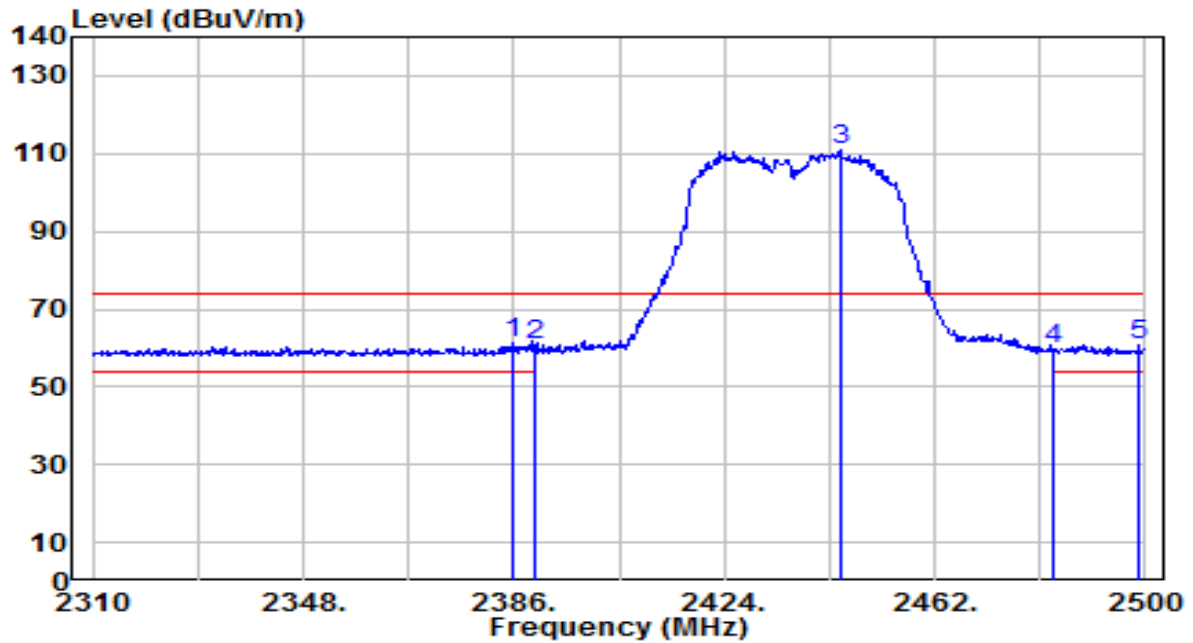


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.810	29.21	31.93	61.14	-12.86	74.00	195	345	Peak
2		2390.000	28.68	31.95	60.62	-13.38	74.00	195	345	Peak
3		2444.900	78.53	32.15	110.68	N/A	N/A	195	345	Peak
4		2483.500	27.35	32.30	59.65	-14.35	74.00	195	345	Peak
5		2498.860	28.44	32.36	60.79	-13.21	74.00	195	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

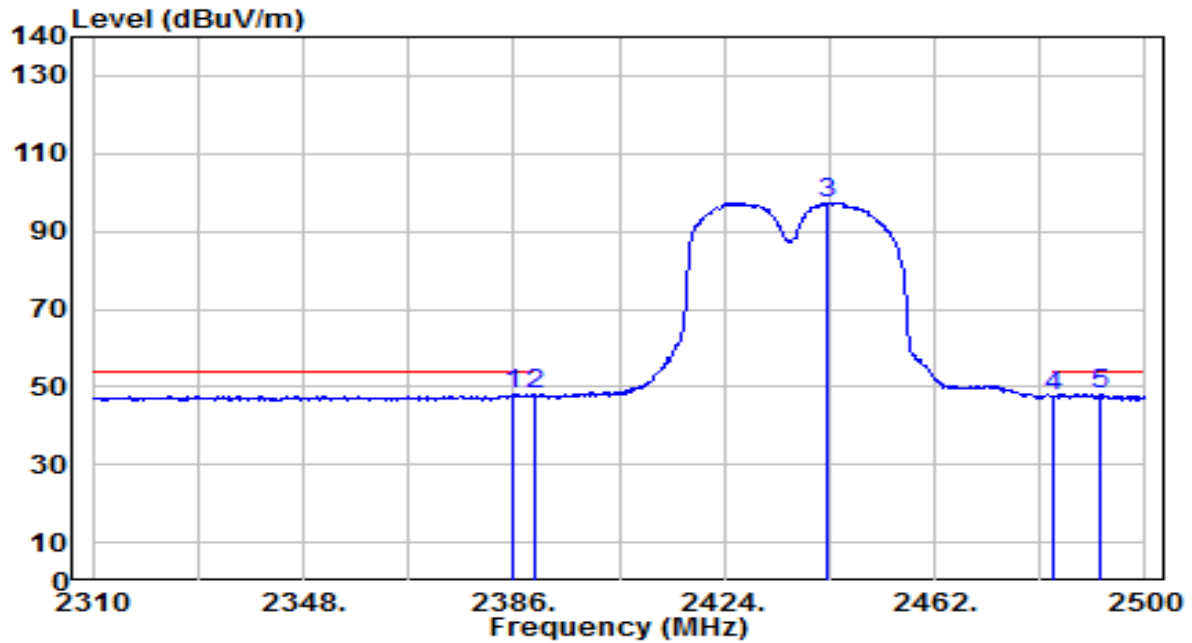


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	15.97	31.93	47.91	-6.09	54.00	195	345	Average
2	2390.000	15.89	31.95	47.84	-6.16	54.00	195	345	Average
3	2442.810	65.29	32.15	97.43	N/A	N/A	195	345	Average
4	2483.500	15.09	32.30	47.39	-6.61	54.00	195	345	Average
5	* 2492.020	15.84	32.33	48.17	-5.83	54.00	195	345	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

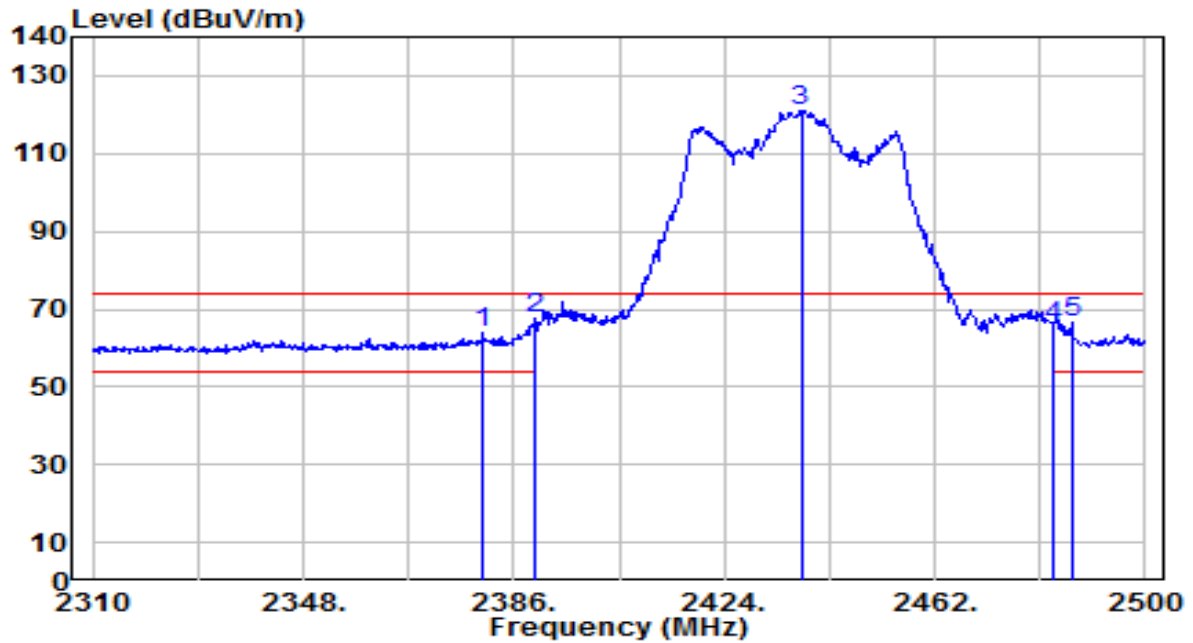


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2380.490	32.02	31.91	63.94	-10.06	74.00	215	225	Peak
2	*	2390.000	35.54	31.95	67.49	-6.51	74.00	215	225	Peak
3		2437.870	89.07	32.13	121.19	N/A	N/A	215	225	Peak
4		2483.500	33.36	32.30	65.66	-8.34	74.00	215	225	Peak
5		2486.700	34.05	32.31	66.37	-7.64	74.00	215	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

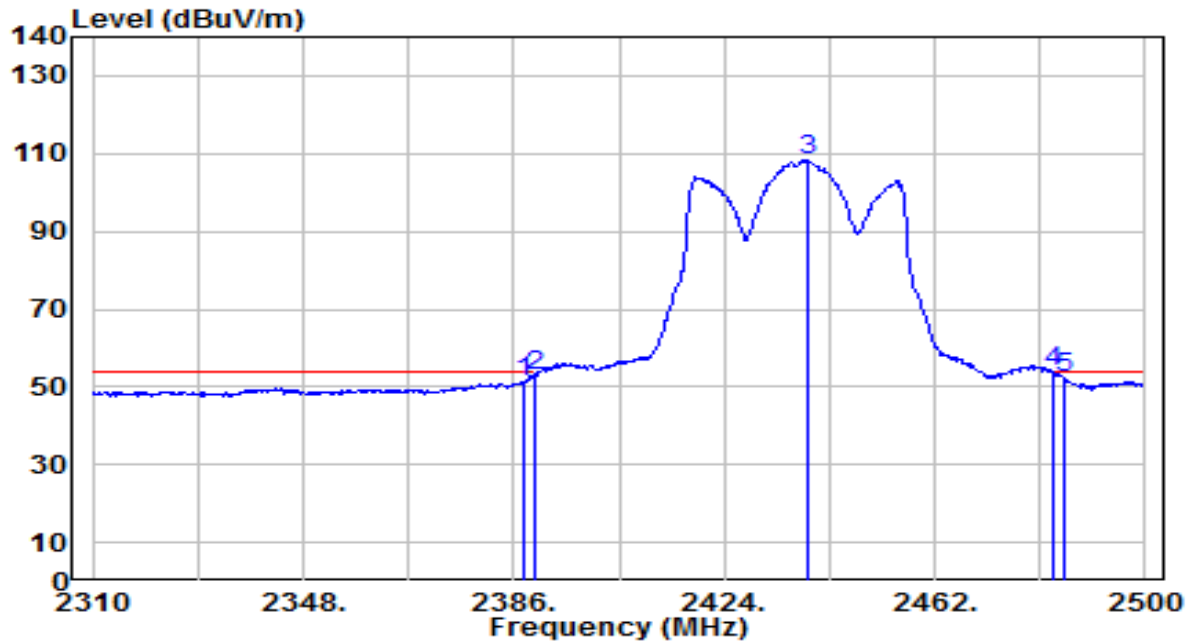


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	19.54	31.94	51.48	-2.52	54.00	215	225	Average
2	2390.000	21.10	31.95	53.05	-0.95	54.00	215	225	Average
3	2439.010	76.41	32.13	108.54	N/A	N/A	215	225	Average
4	* 2483.500	21.47	32.30	53.77	-0.23	54.00	215	225	Average
5	2485.560	19.97	32.31	52.27	-1.73	54.00	215	225	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

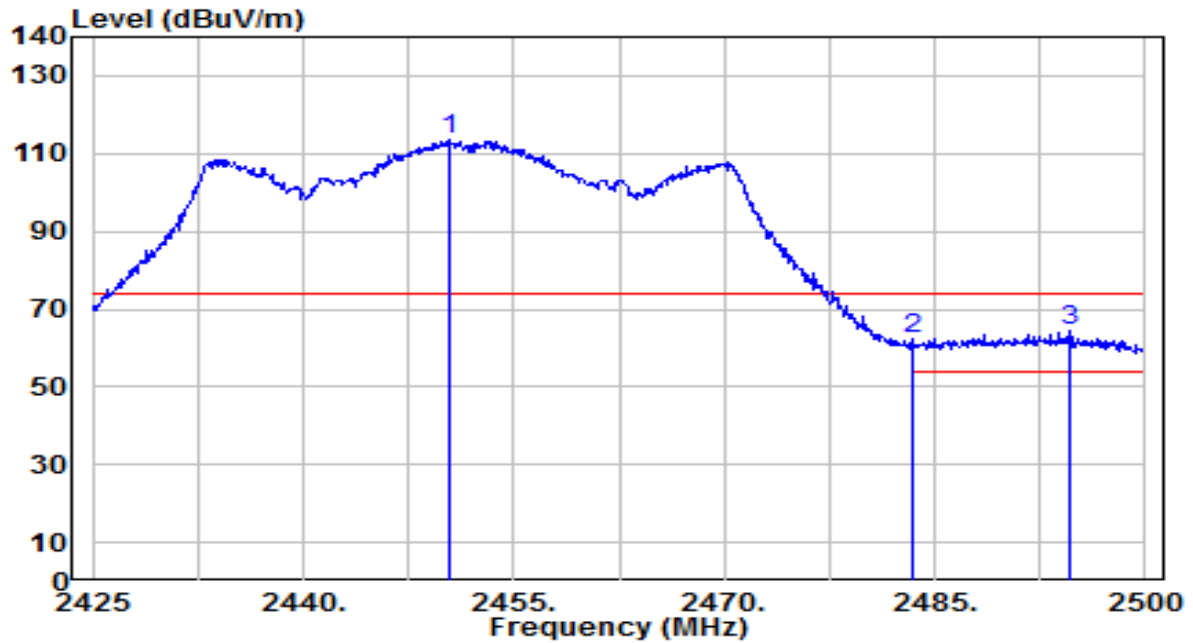


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.425	81.28	32.17	113.46	N/A	N/A	165	350	Peak
2	2483.500	30.03	32.30	62.33	-11.67	74.00	165	350	Peak
3	* 2494.675	32.01	32.34	64.36	-9.64	74.00	165	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

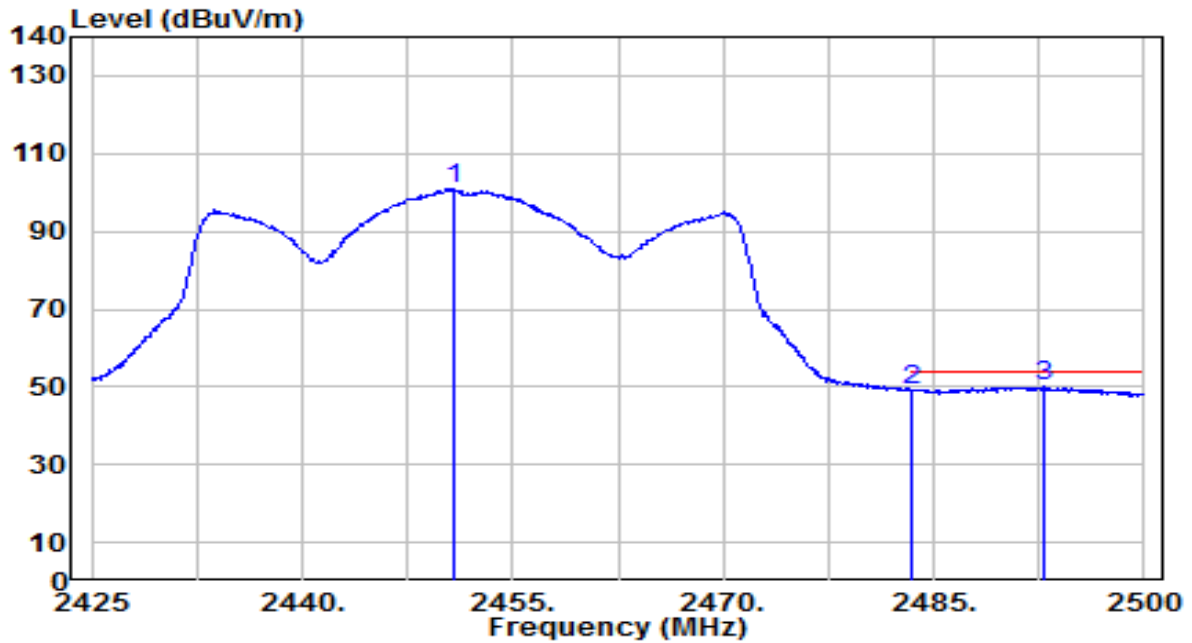


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.875	68.73	32.18	100.91	N/A	N/A	165	350	Average
2	2483.500	16.88	32.30	49.18	-4.82	54.00	165	350	Average
3	* 2492.800	17.62	32.33	49.96	-4.04	54.00	165	350	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

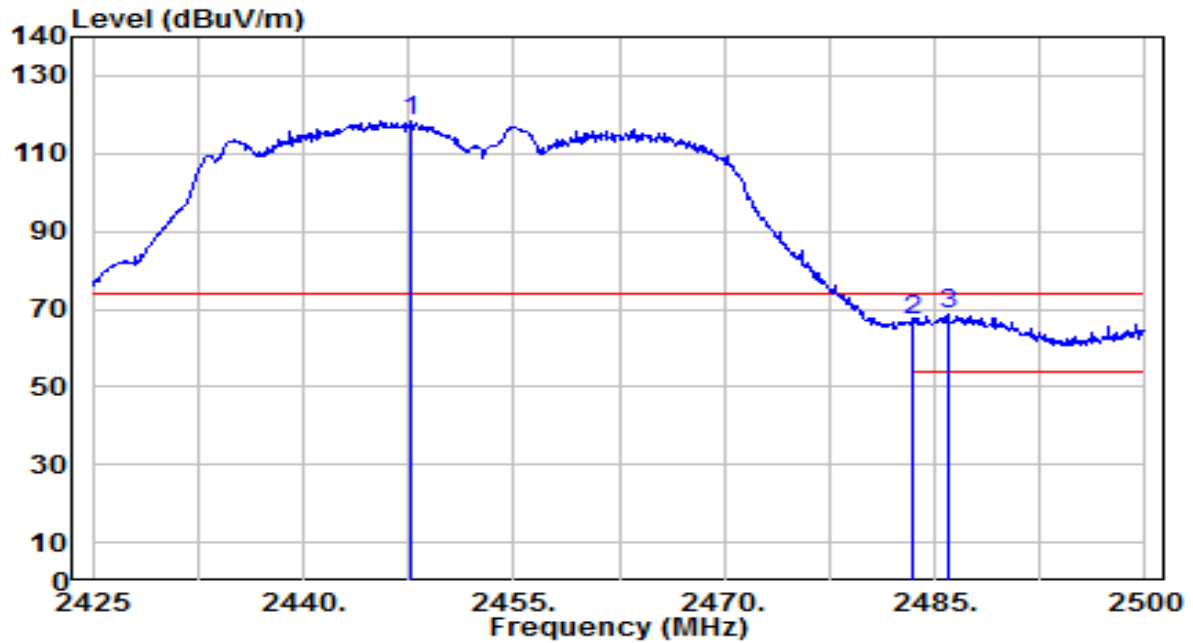


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2447.725	86.29	32.16	118.45	N/A	N/A	225	55	Peak
2	2483.500	35.03	32.30	67.33	-6.67	74.00	225	55	Peak
3	* 2485.900	36.49	32.31	68.80	-5.20	74.00	225	55	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-12-10
Factor	BBHA 9120D	Temp. / Humidity	25°C /56%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

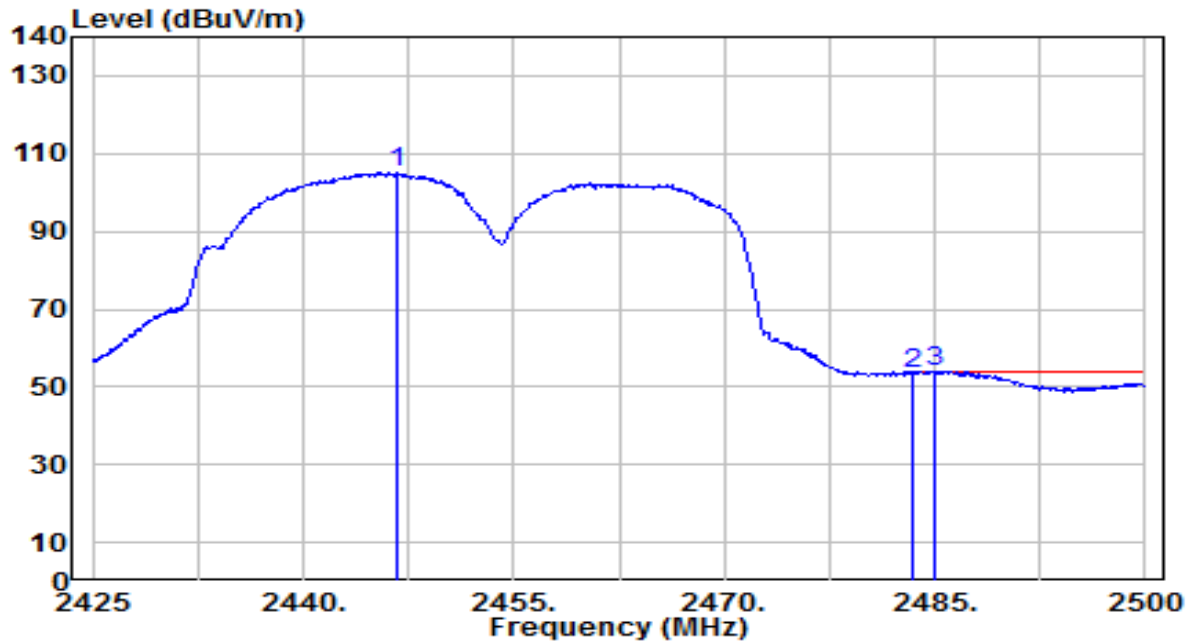

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2446.600	72.83	32.16	104.99	N/A	N/A	225	55	Average
2	2483.500	21.11	32.30	53.41	-0.59	54.00	225	55	Average
3	* 2485.000	21.52	32.30	53.82	-0.18	54.00	225	55	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

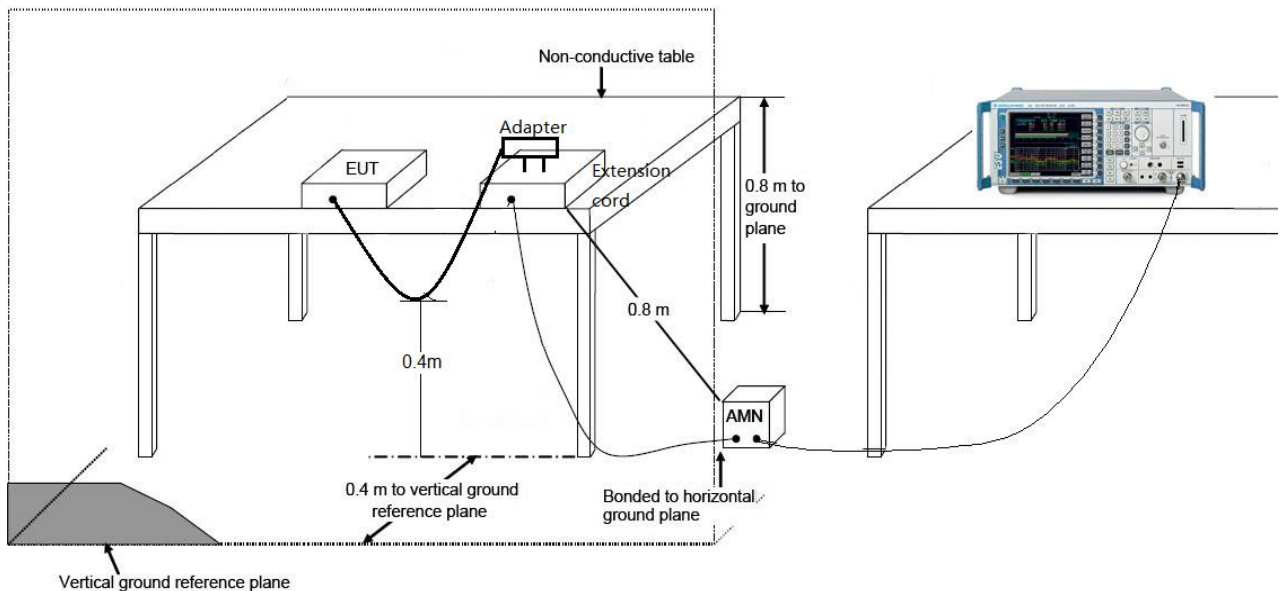

7.8.3.Test Result

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-11-11
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.1°C /62%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

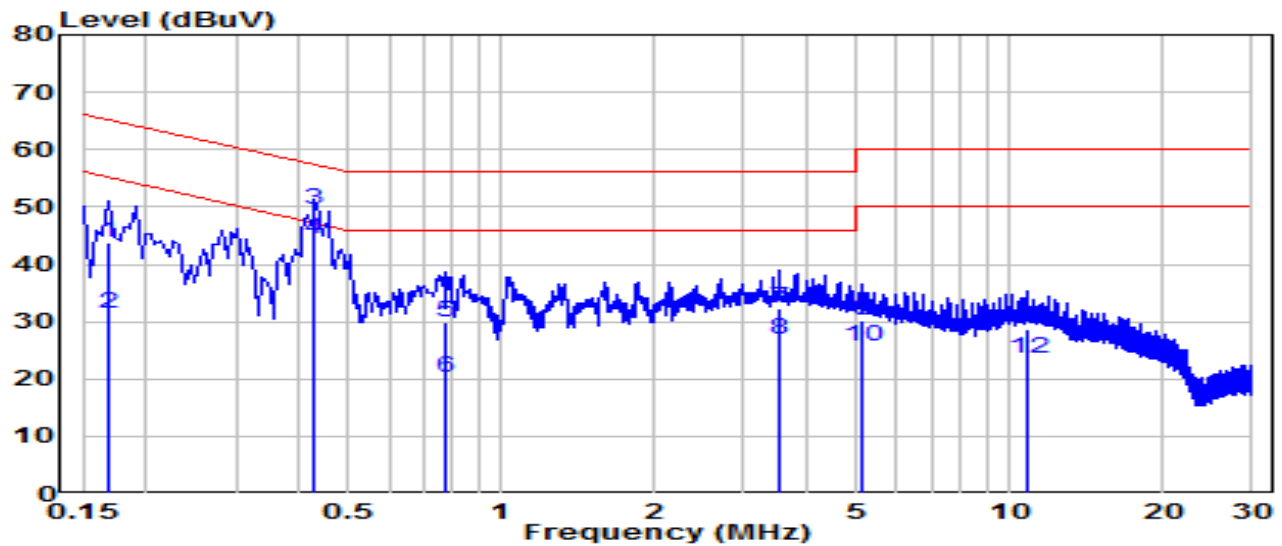


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.168	34.18	9.63	43.81	-21.25	65.06	QP
2	0.168	21.69	9.63	31.32	-23.73	55.06	Average
3	* 0.429	39.89	9.65	49.54	-7.74	57.27	QP
4	* 0.429	34.85	9.65	44.49	-2.78	47.27	Average
5	0.771	20.26	9.67	29.93	-26.07	56.00	QP
6	0.771	10.57	9.67	20.24	-25.76	46.00	Average
7	3.511	22.57	9.72	32.29	-23.71	56.00	QP
8	3.511	17.10	9.72	26.82	-19.18	46.00	Average
9	5.153	20.46	9.75	30.21	-29.79	60.00	QP
10	5.153	15.84	9.75	25.59	-24.41	50.00	Average
11	10.899	18.66	9.88	28.53	-31.47	60.00	QP
12	10.899	13.77	9.88	23.65	-26.35	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	BE11000 Tri-Band Wi-Fi 7 Gaming Router	Date of Test	2024-11-11
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.1°C /62%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

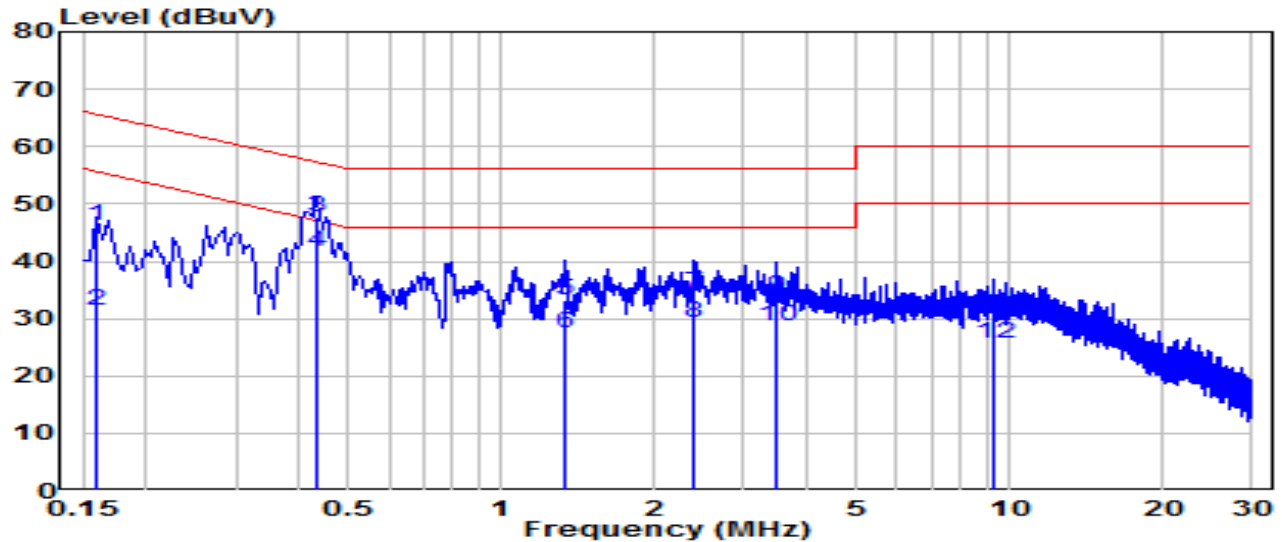

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	36.55	9.63	46.18	-19.33	65.52	QP
2	0.159	21.75	9.63	31.38	-24.14	55.52	Average
3	* 0.433	37.93	9.65	47.58	-9.61	57.19	QP
4	* 0.433	32.12	9.65	41.77	-5.42	47.19	Average
5	1.324	23.65	9.69	33.34	-22.66	56.00	QP
6	1.324	17.77	9.69	27.46	-18.54	46.00	Average
7	2.400	24.61	9.72	34.32	-21.68	56.00	QP
8	2.400	19.66	9.72	29.37	-16.63	46.00	Average
9	3.475	24.02	9.73	33.75	-22.25	56.00	QP
10	3.475	18.97	9.73	28.71	-17.29	46.00	Average
11	9.298	21.08	9.87	30.95	-29.05	60.00	QP
12	9.298	15.90	9.87	25.77	-24.23	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2411TW0102-UT” file.

Appendix B : External Photograph

Refer to “2411TW0102-UE” file.

Appendix C : Internal Photograph

Refer to “2411TW0102-UI” file.

_____ The End _____