
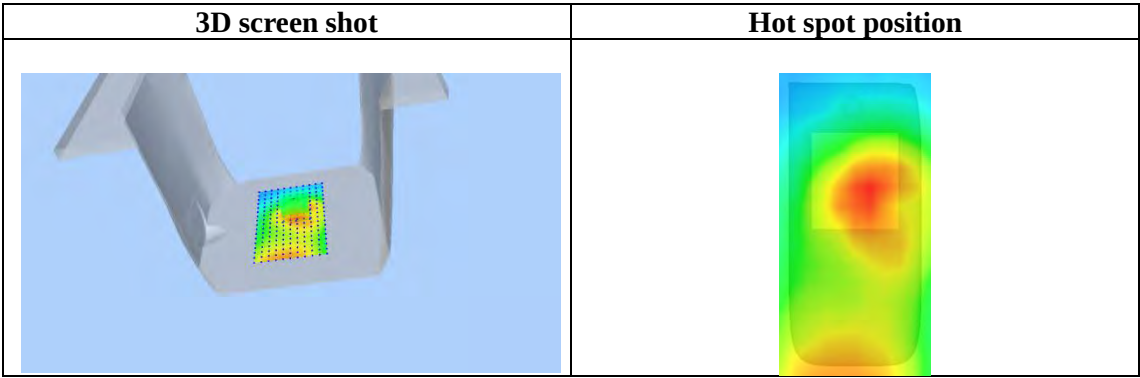


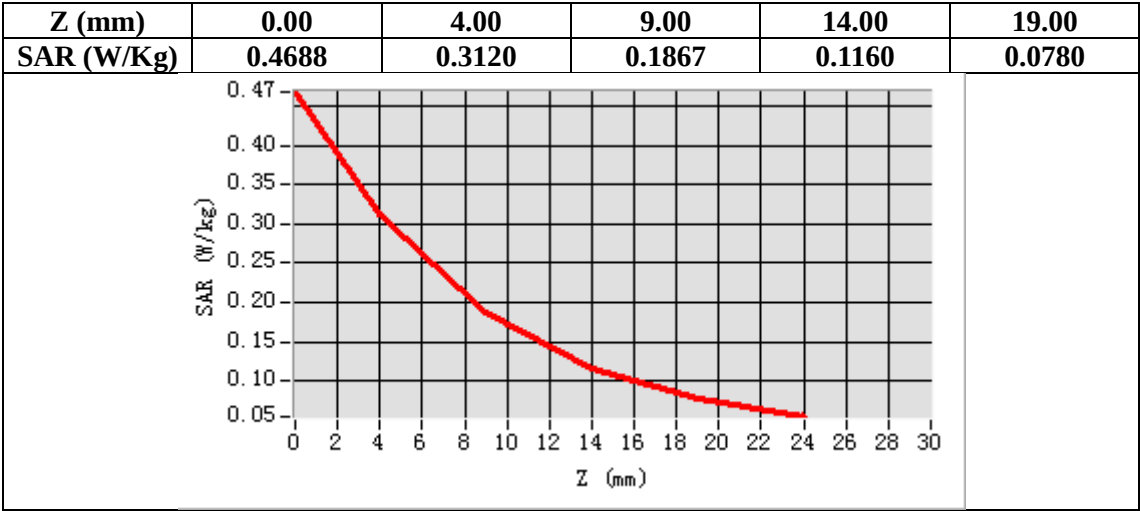

Test Laboratory: AGC Lab
LTE Band 12 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOJO**

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.04
Frequency: 707.5 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 12 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

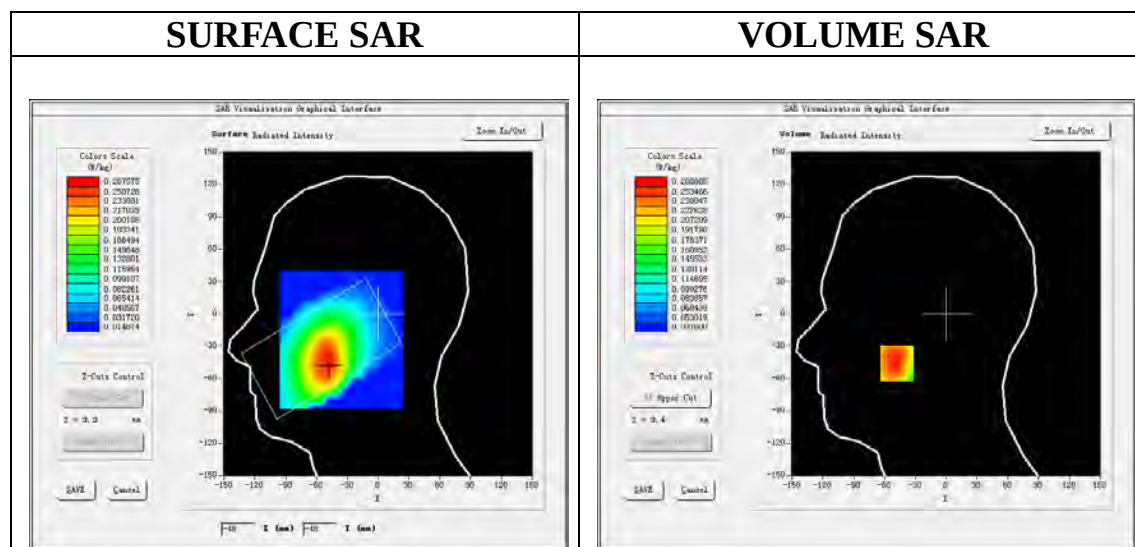

Maximum location: X=-48.00, Y=-46.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.199553
SAR 1g (W/Kg)	0.211171

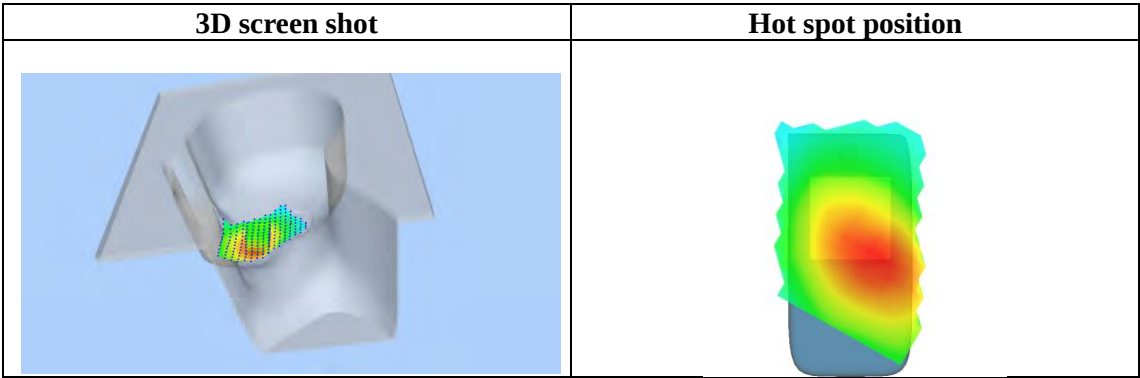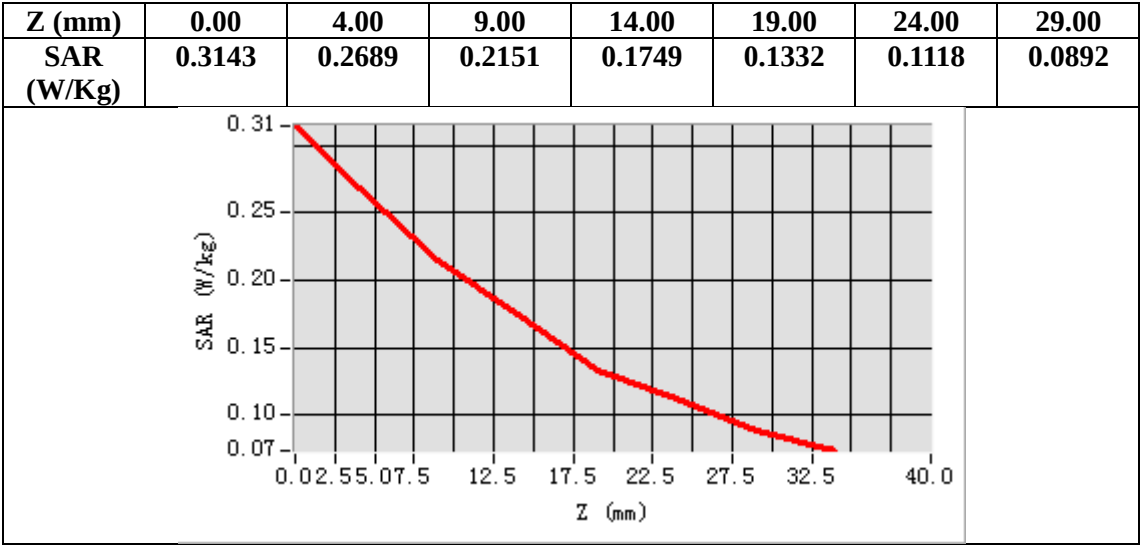

Test Laboratory: AGC Lab
LTE Band 12 Mid-Body- Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOJO**

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.04;
Frequency: 707.5 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid- Body Right k/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 12 Mid- Body Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Right
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

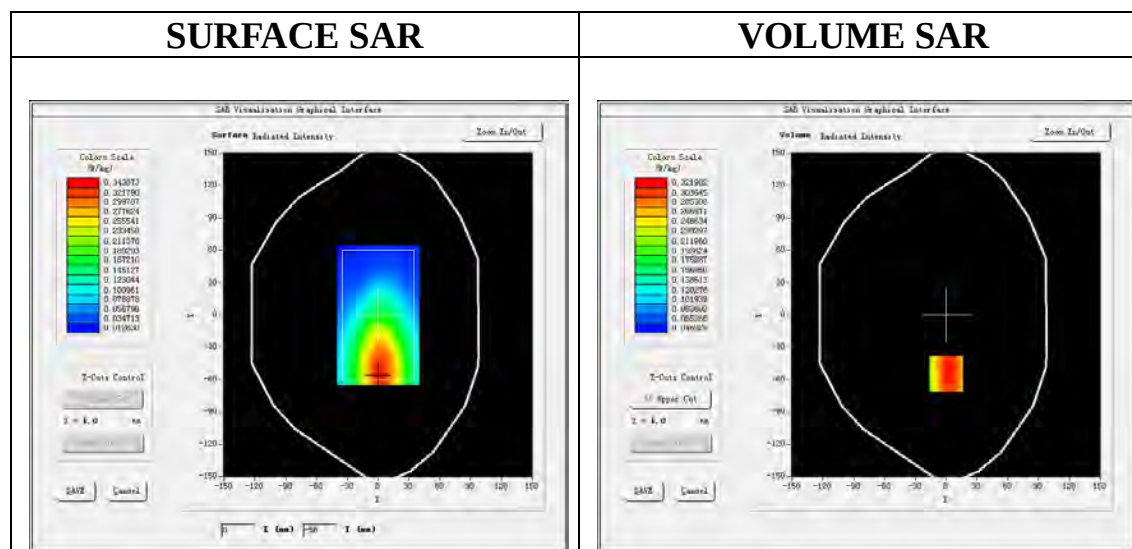

Maximum location: X=0.00, Y=-55.00

SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.219390
SAR 1g (W/Kg)	0.317011

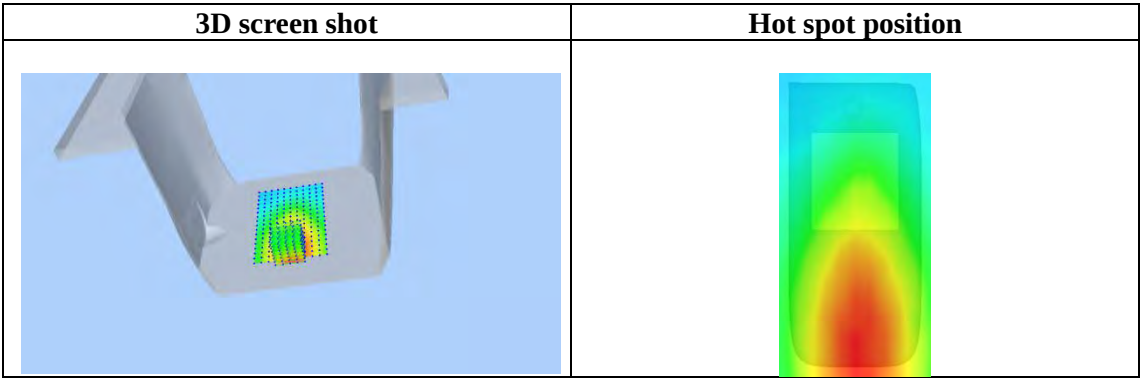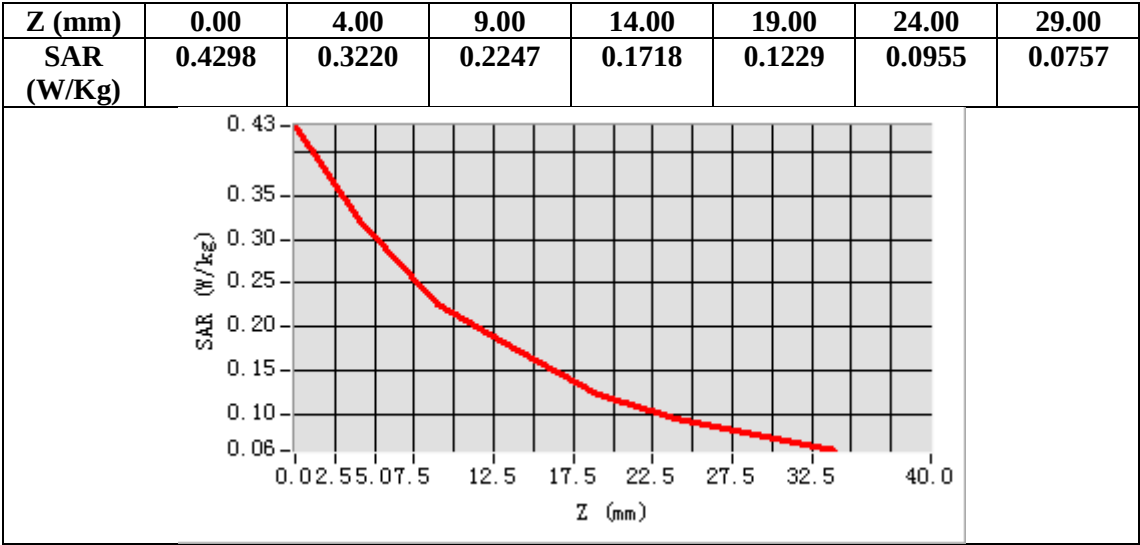

Test Laboratory: AGC Lab
LTE Band 13 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.04
Frequency: 782 MHz; Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.932 \text{ mho/m}$; $\epsilon_r = 39.32$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 22.3, Liquid temperature ($^{\circ}\text{C}$): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 13 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 13 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

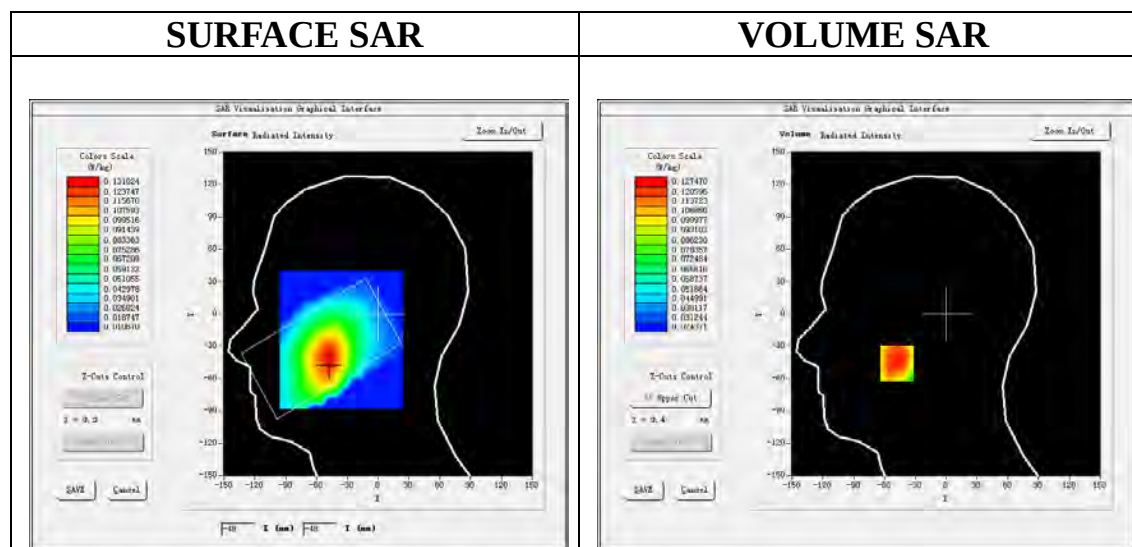

Maximum location: X=-48.00, Y=-46.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.094683
SAR 1g (W/Kg)	0.123413

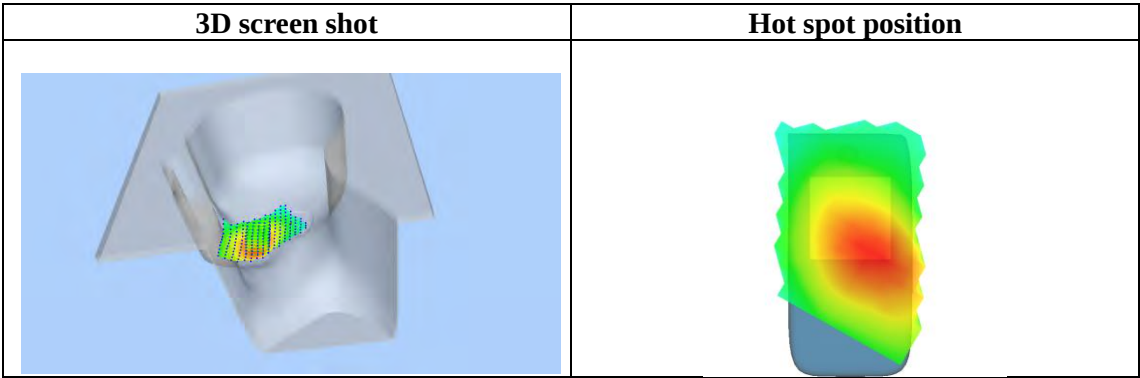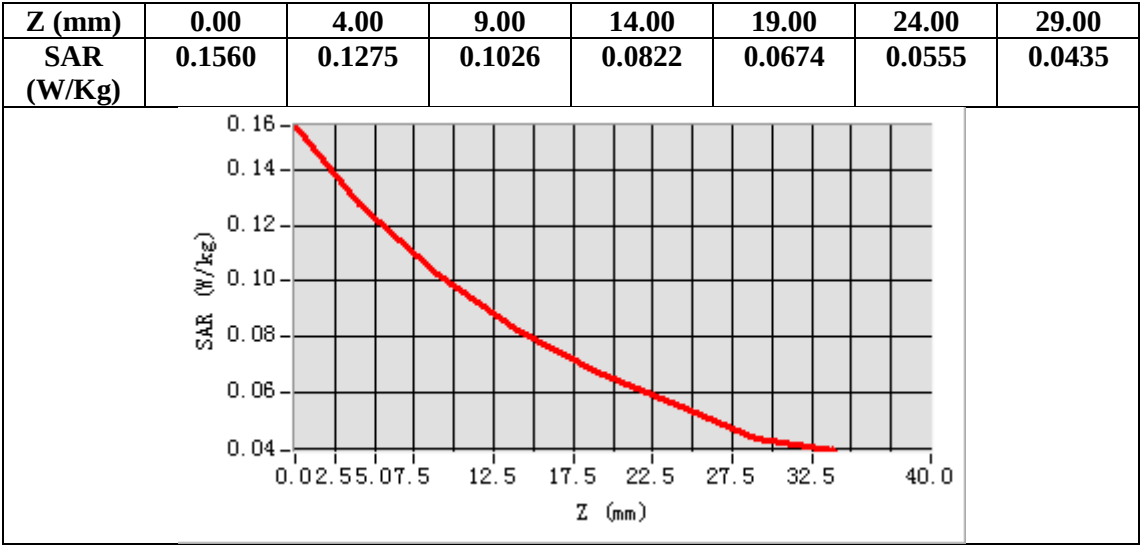

Test Laboratory: AGC Lab
LTE Band 13 Mid-Body-Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.04;
Frequency: 782 MHz; Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.932 \text{ mho/m}$; $\epsilon_r = 39.32$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 22.3, Liquid temperature ($^{\circ}\text{C}$): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 13 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 13 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Right
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

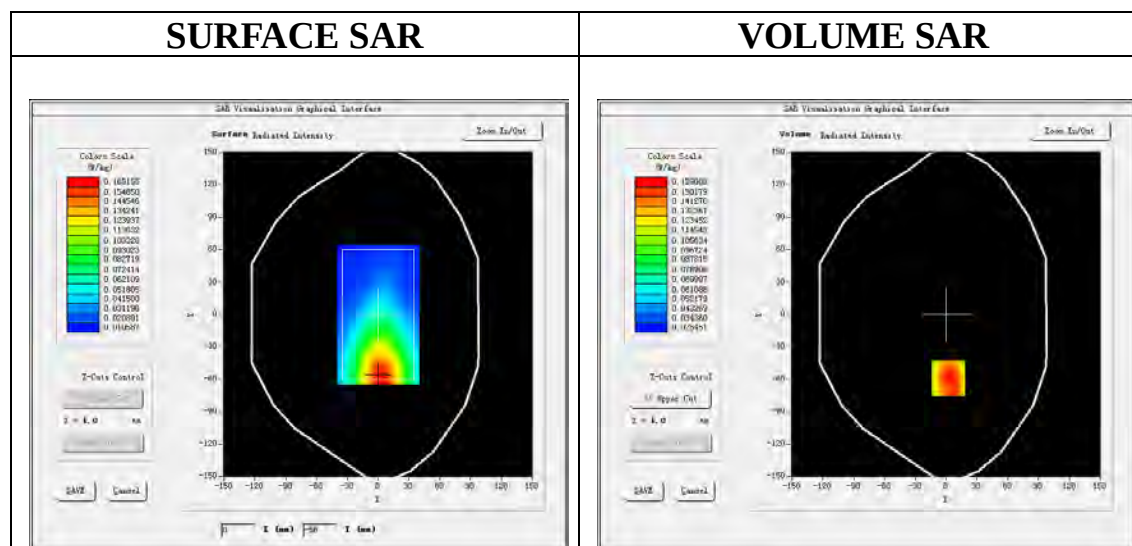

Maximum location: X=2.00, Y=-59.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.106815
SAR 1g (W/Kg)	0.152954

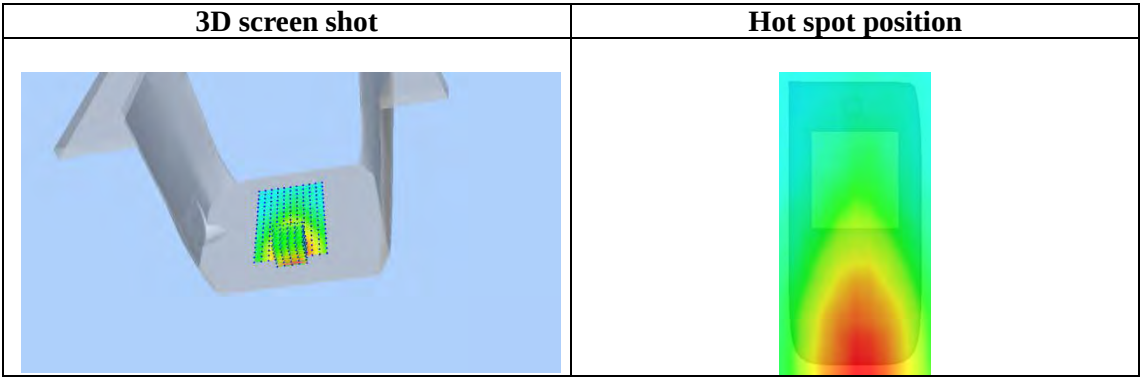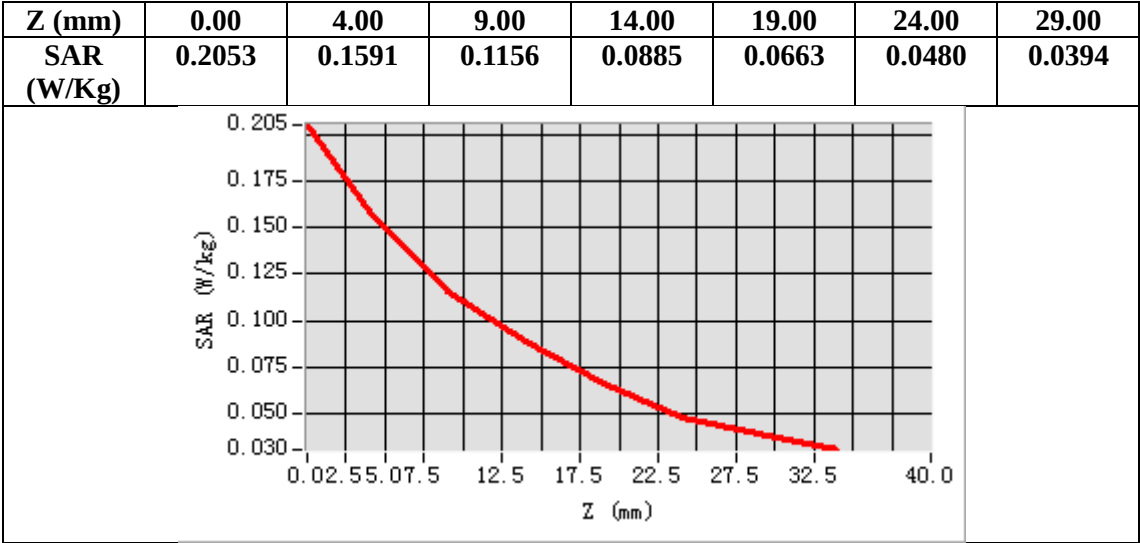

Test Laboratory: AGC Lab
LTE Band 25 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 25, 2024


Communication System: LTE; Communication System Band: LTE Band 25; Duty Cycle:1:1; Conv.F=2.06;
Frequency:1882.5MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 25 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 25 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 25
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

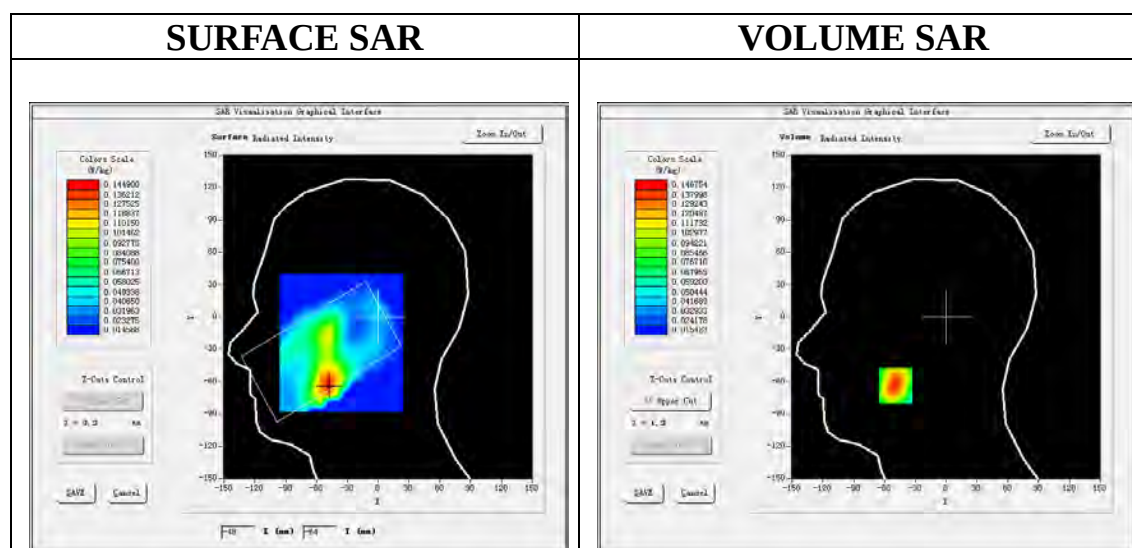

Maximum location: X=-49.00, Y=-64.00
SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.088284
SAR 1g (W/Kg)	0.140079

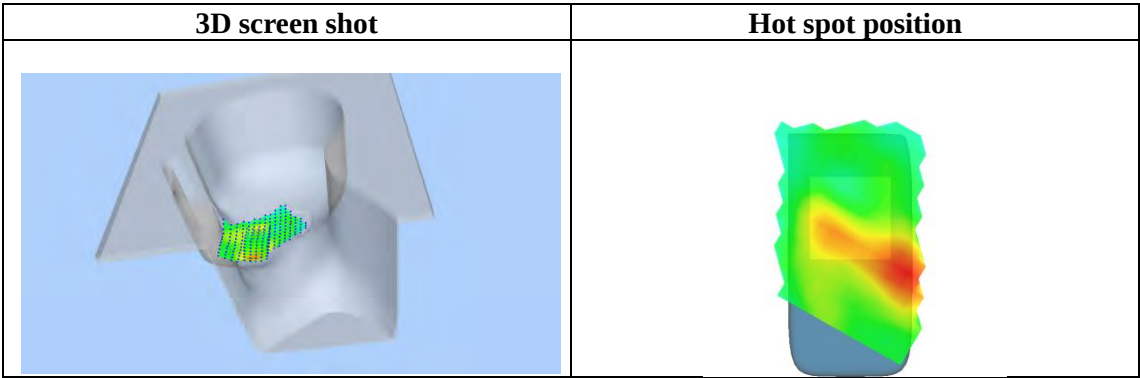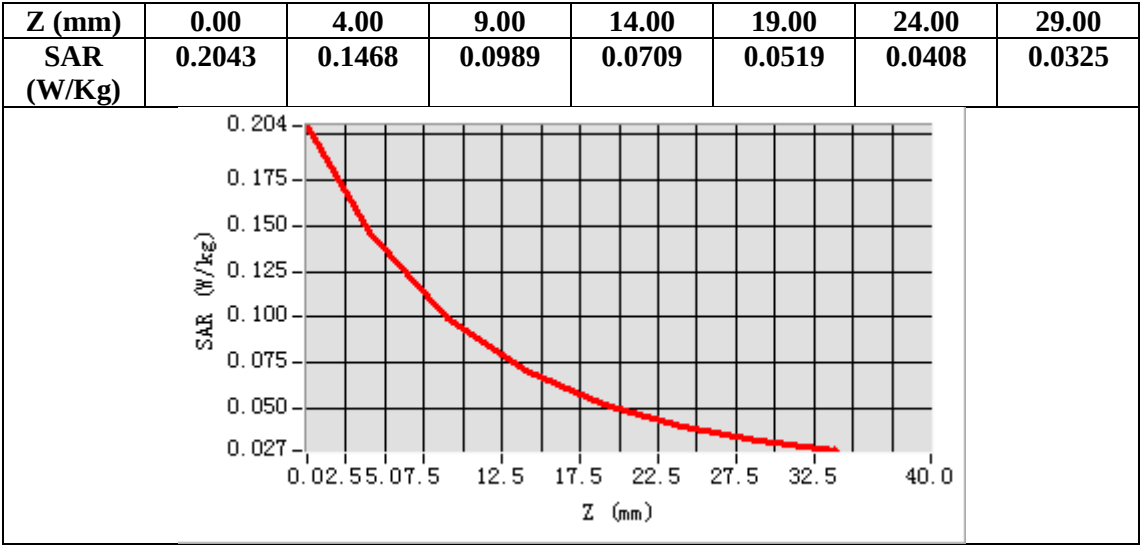

Test Laboratory: AGC Lab
LTE Band 25 Mid-Body- Botomm (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 25, 2024


Communication System: LTE; Communication System Band: LTE Band 25; Duty Cycle:1:1; Conv.F=2.06;
Frequency:1882.5MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 25 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 25 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Botomm
Band	LTE Band 25
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

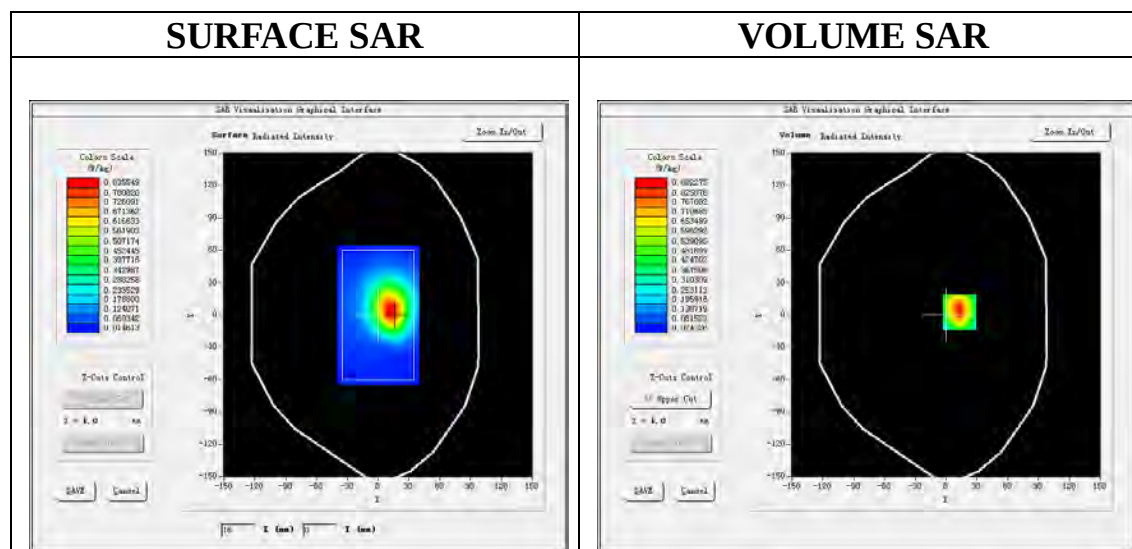

Maximum location: X=13.00, Y=3.00
SAR Peak: 1.31 W/kg

SAR 10g (W/Kg)	0.458536
SAR 1g (W/Kg)	0.824890

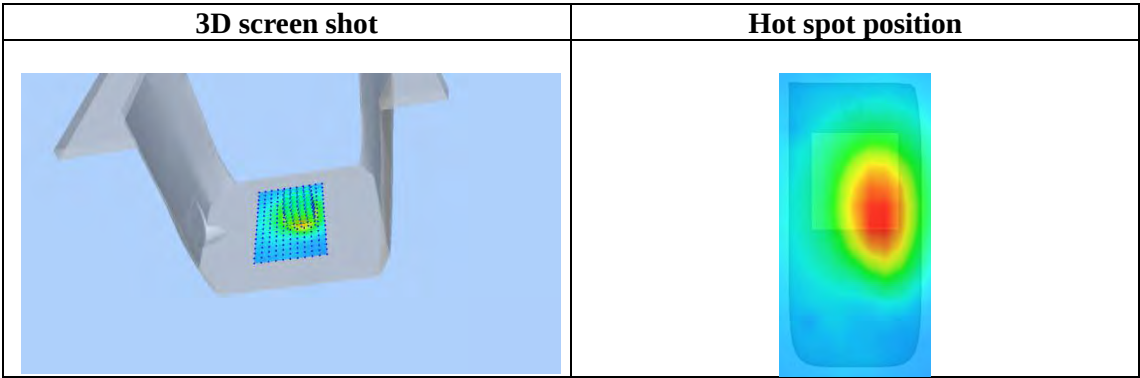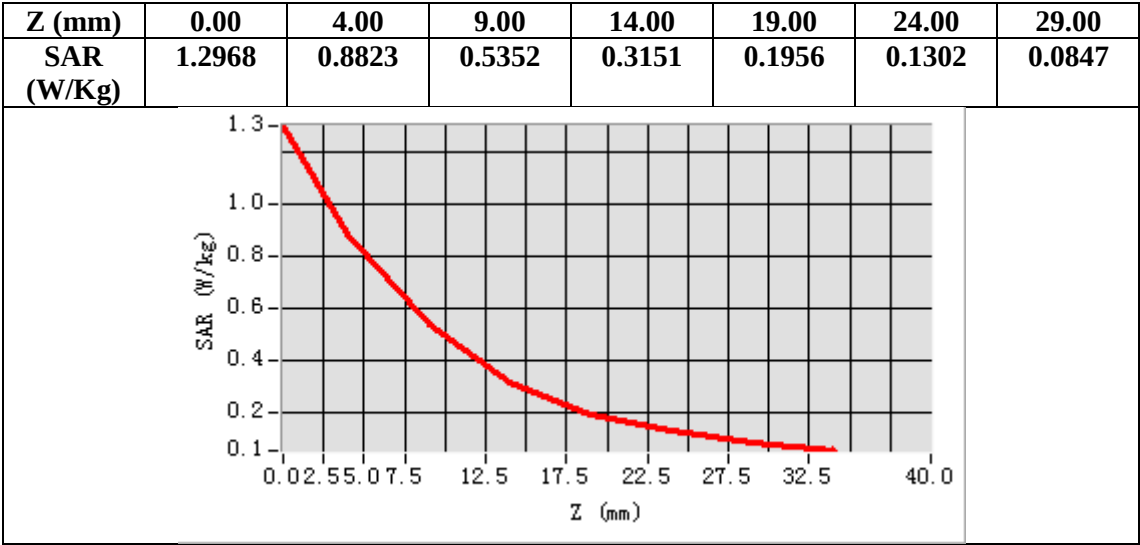

Test Laboratory: AGC Lab
LTE Band 26 Mid-Touch- Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOJO**

Date: May 12, 2024

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=1.89
Frequency: 831.5 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 38.36$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.5

SATIMO Configuration:


Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 26 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 26 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 26
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

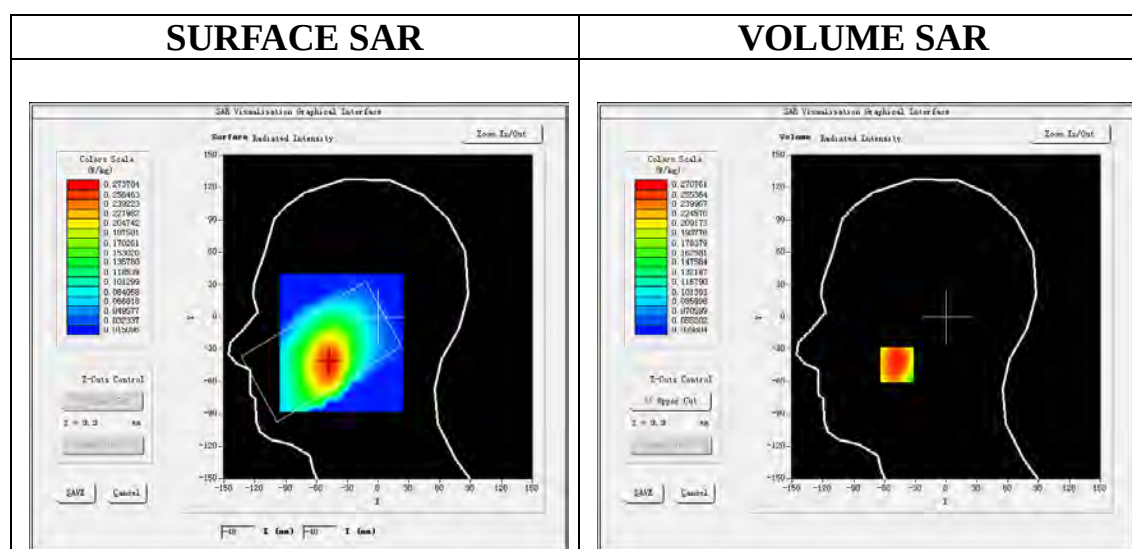

Maximum location: X=-48.00, Y=-44.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.194264
SAR 1g (W/Kg)	0.259232

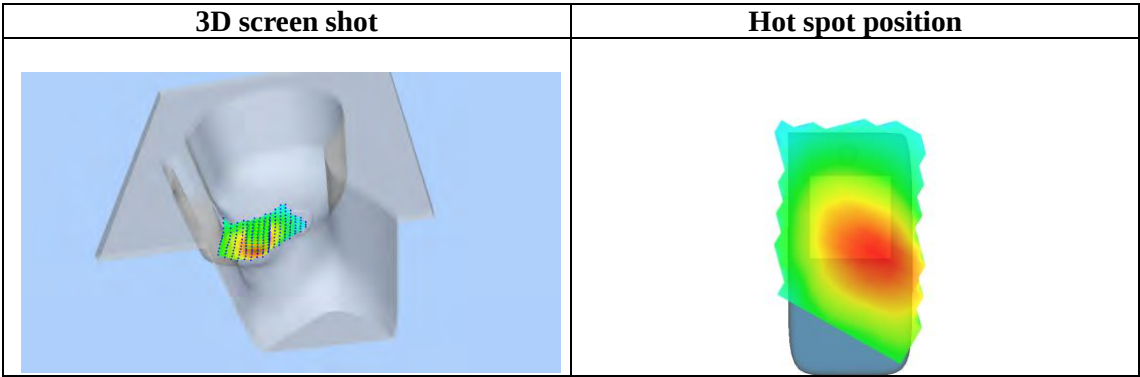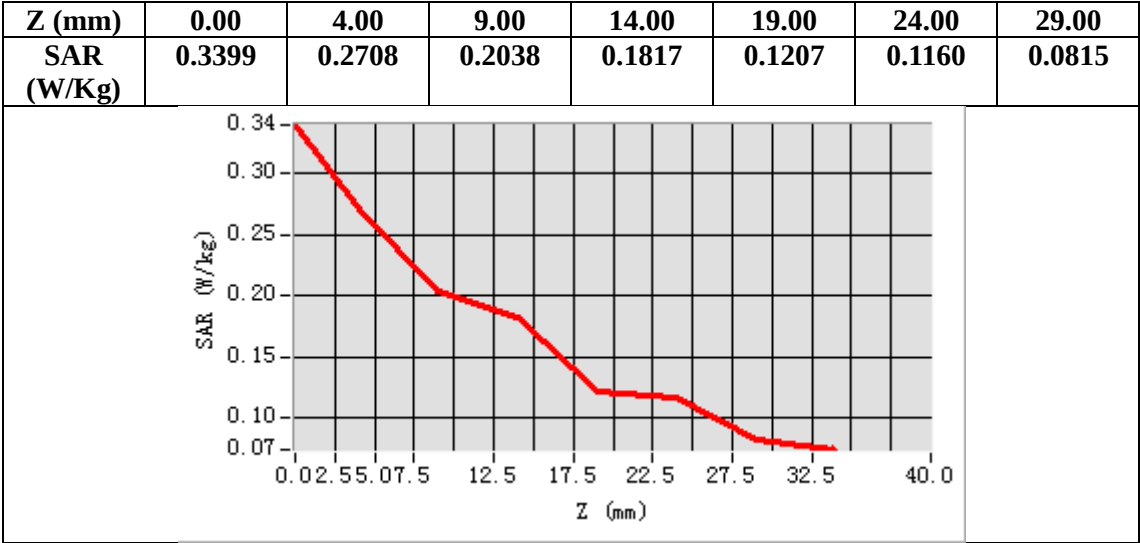

Test Laboratory: AGC Lab
LTE Band 26 Mid-Body-Back (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 12, 2024


Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=1.89
Frequency:831.5 MHz; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 38.36$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.6, Liquid temperature ($^{\circ}\text{C}$): 21.5

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 26 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 26 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 26
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

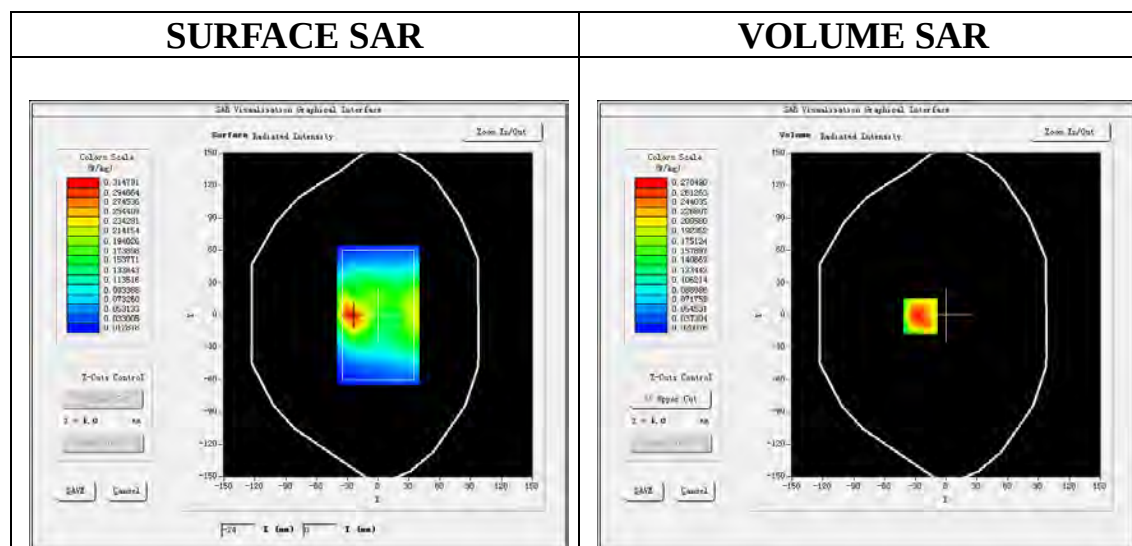

Maximum location: X=-25.00, Y=-1.00
SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.154334
SAR 1g (W/Kg)	0.226091

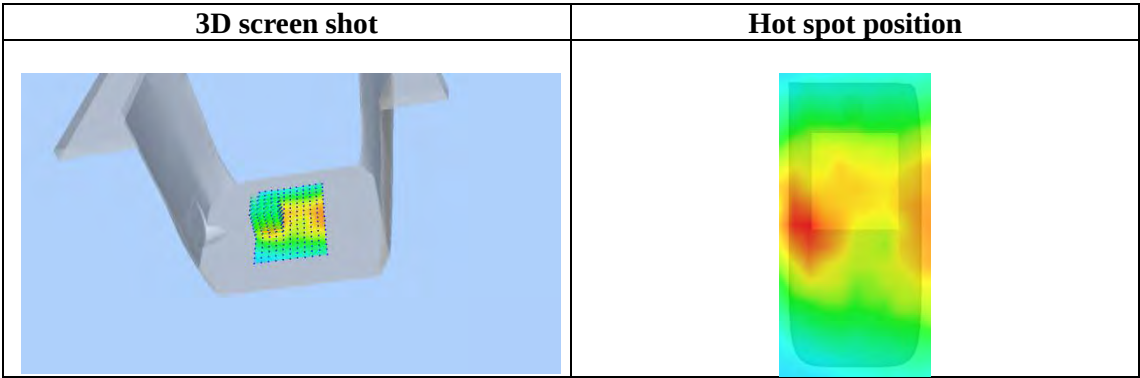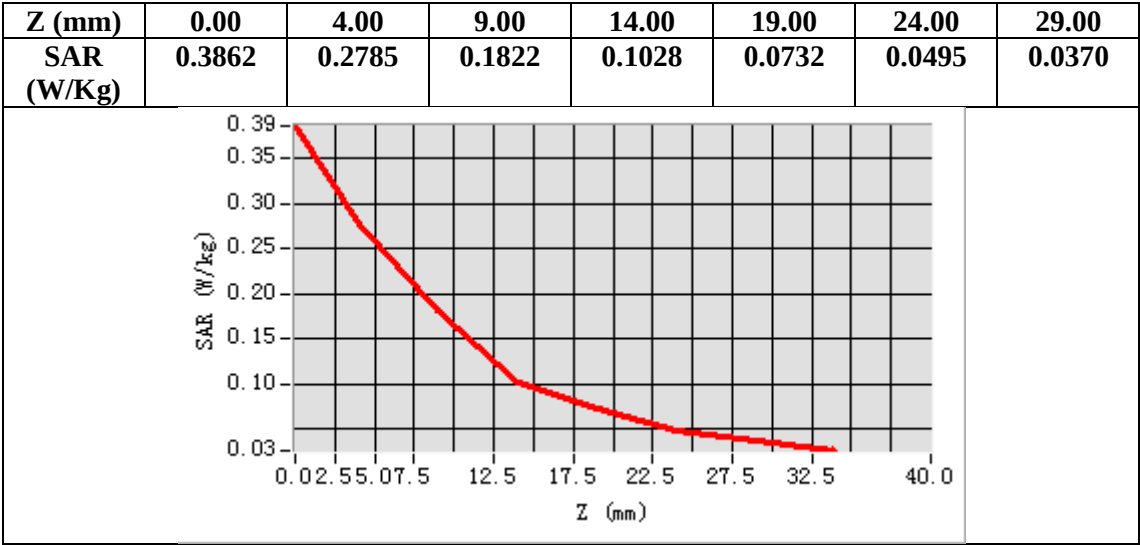

Test Laboratory: AGC Lab
LTE Band 41 Mid-Touch-Right (1RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 29, 2024


Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06
Frequency: 2593MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 39.32$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 41 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 41 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

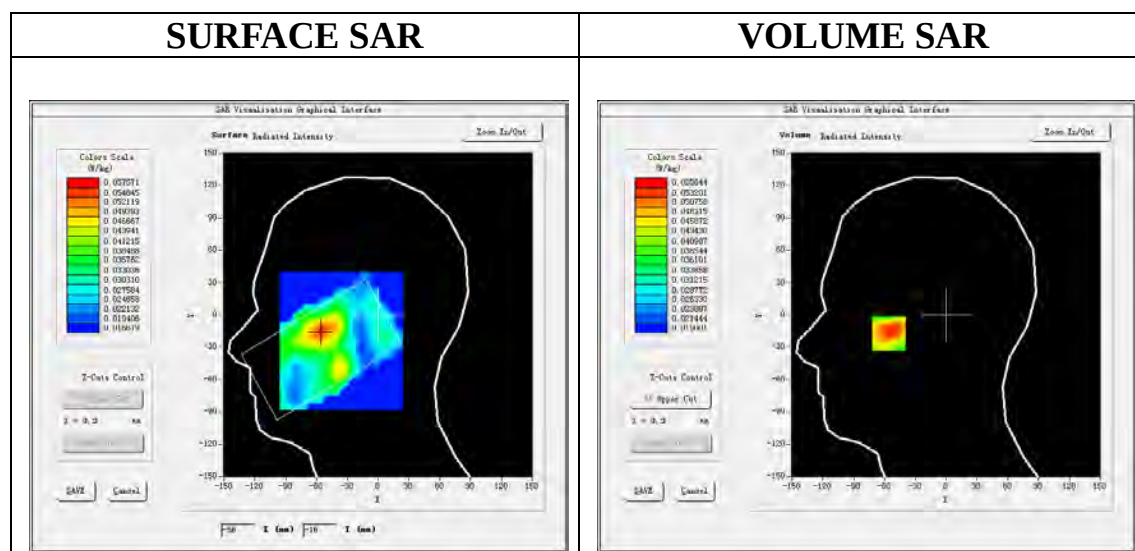

Maximum location: X=-56.00, Y=-16.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.038550
SAR 1g (W/Kg)	0.053861

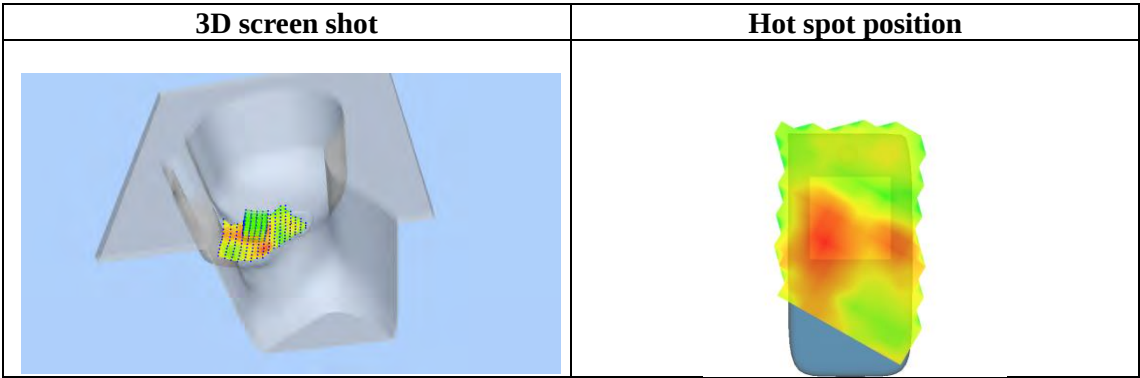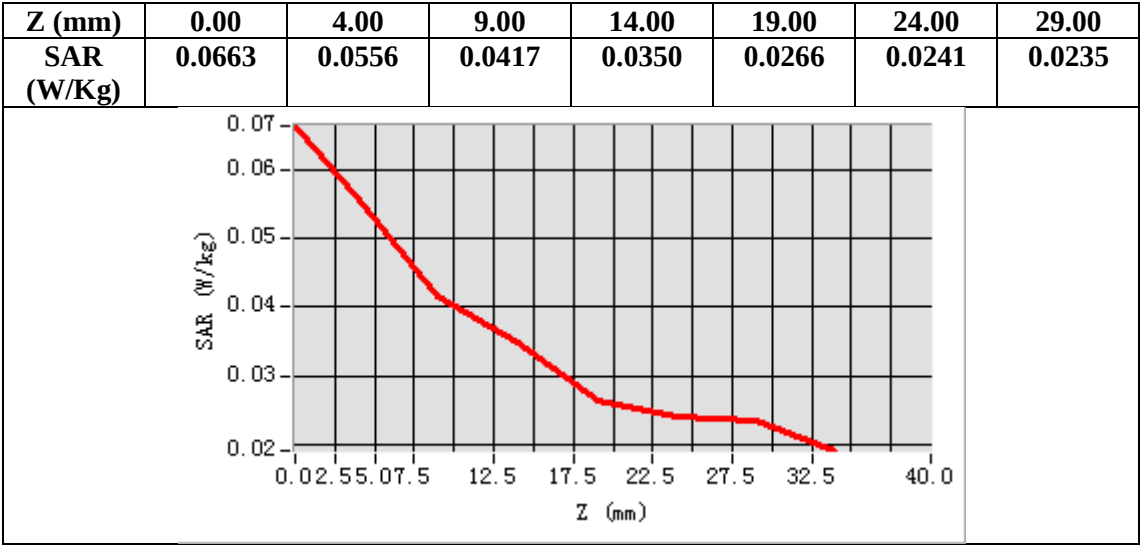

Test Laboratory: AGC Lab
LTE Band 41 Mid-Body- Botomm(1RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 29, 2024


Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06
Frequency: 2593MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 39.32$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 41 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm
Configuration/ LTE BAND 41 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Botomm
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

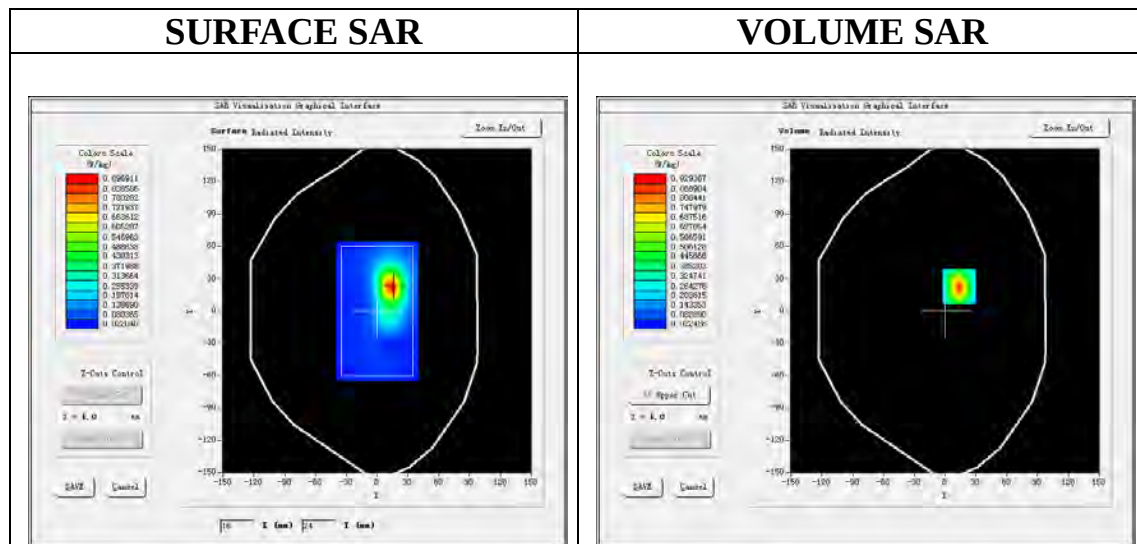

Maximum location: X=14.00, Y=23.00

SAR Peak: 1.48 W/kg

SAR 10g (W/Kg)	0.391015
SAR 1g (W/Kg)	0.833565

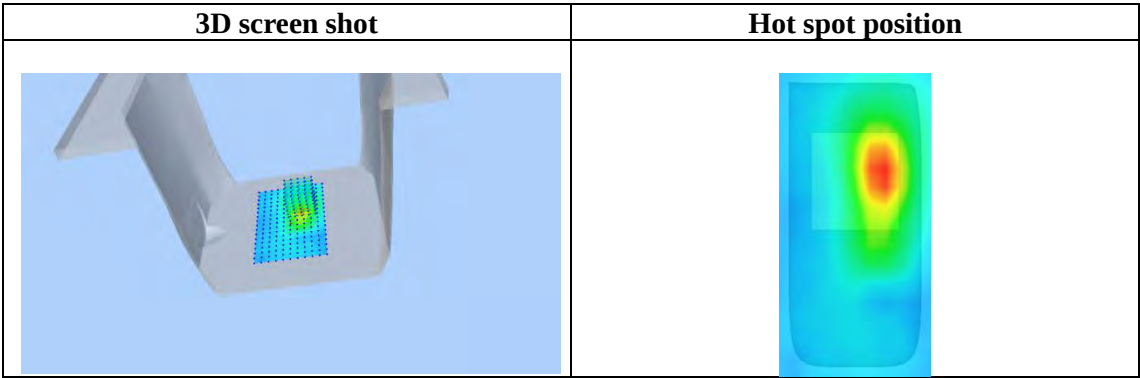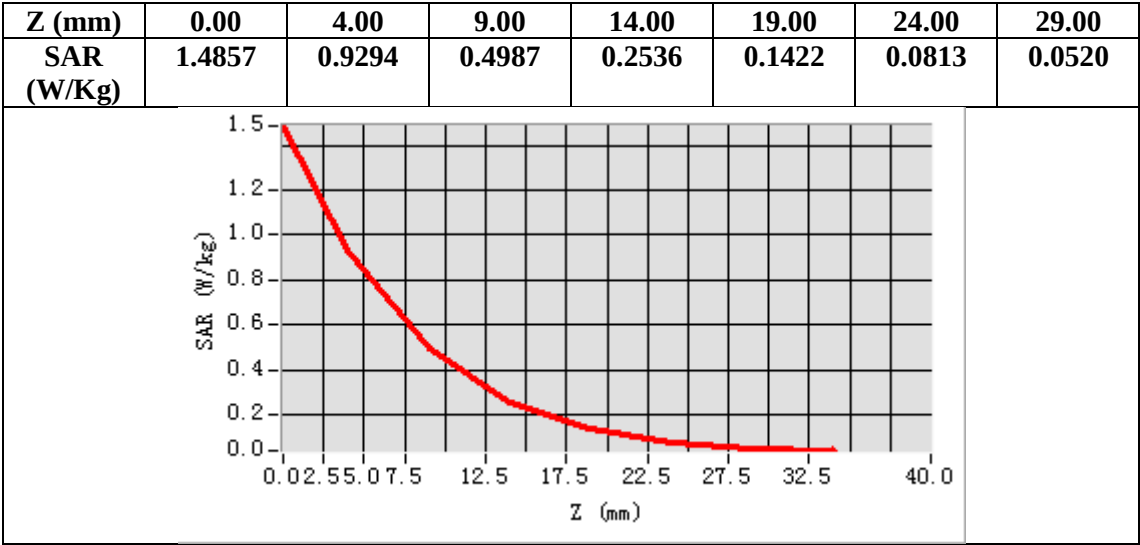

Test Laboratory: AGC Lab
LTE Band 66 Mid-Touch- Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 18, 2024


Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=1.99;
Frequency:1755 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.0

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 66 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 66 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

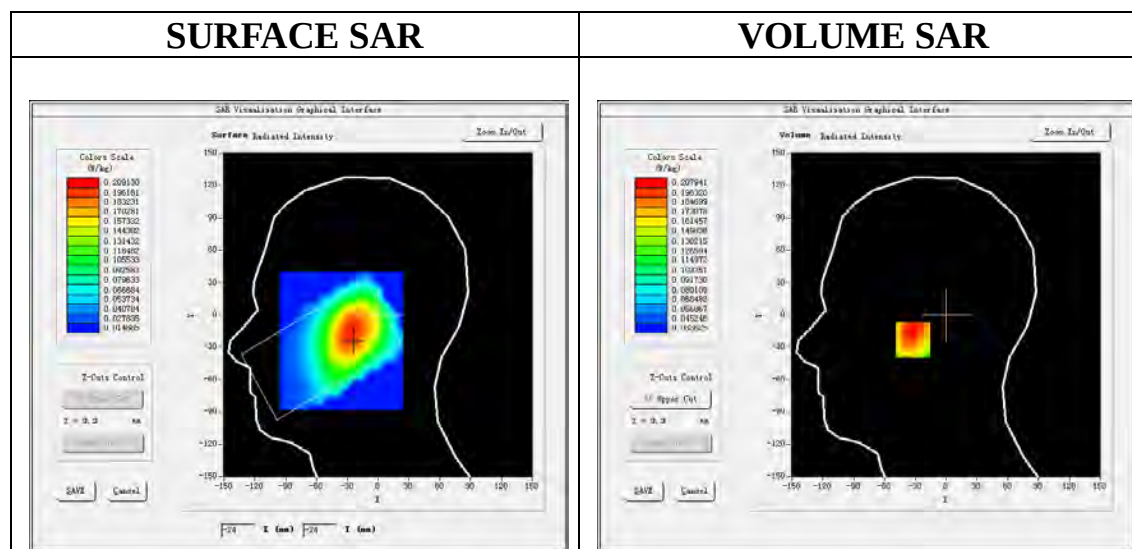

Maximum location: X=-25.00, Y=-23.00
SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.149604
SAR 1g (W/Kg)	0.205357

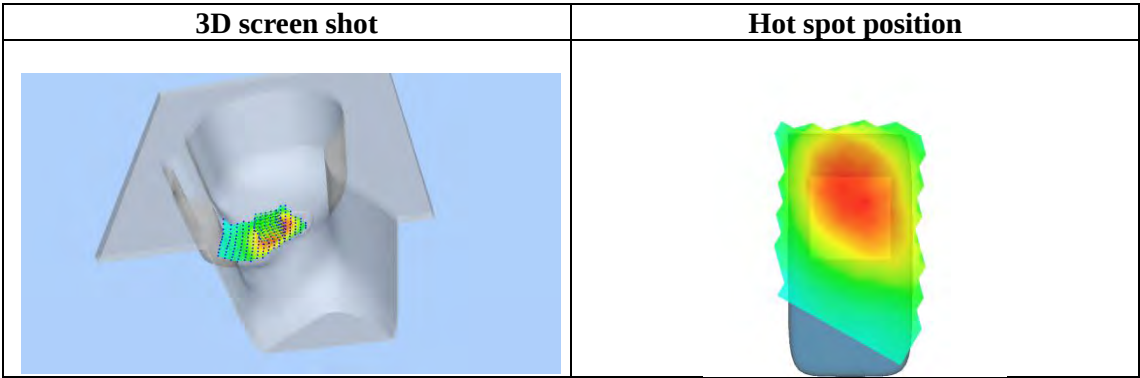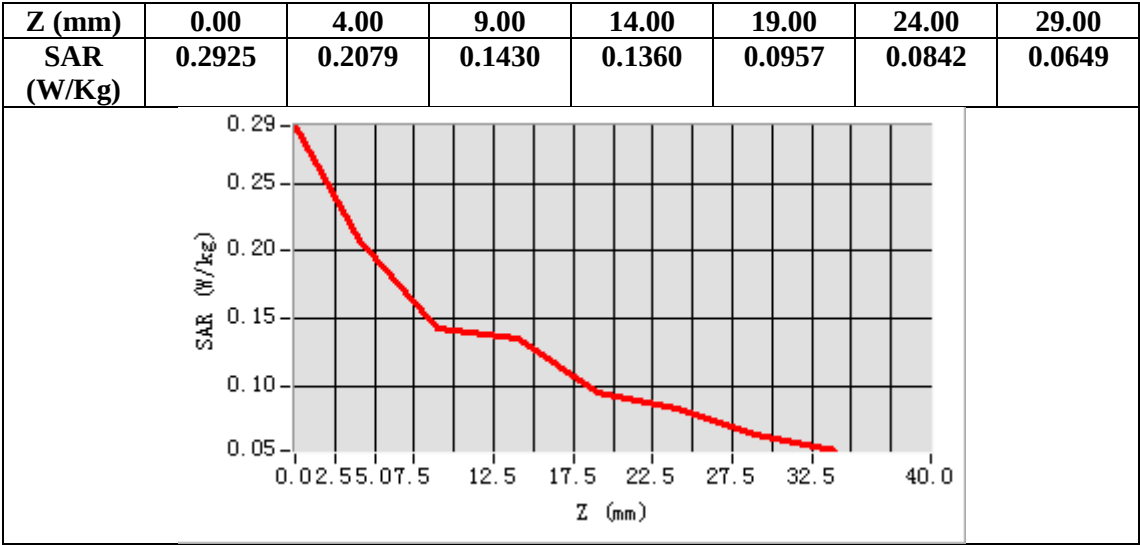

Test Laboratory: AGC Lab
LTE Band 66 Mid-Body- Botomm (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 18, 2024


Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=1.99;
Frequency:1755 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.0

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 66 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 66 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Botomm
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

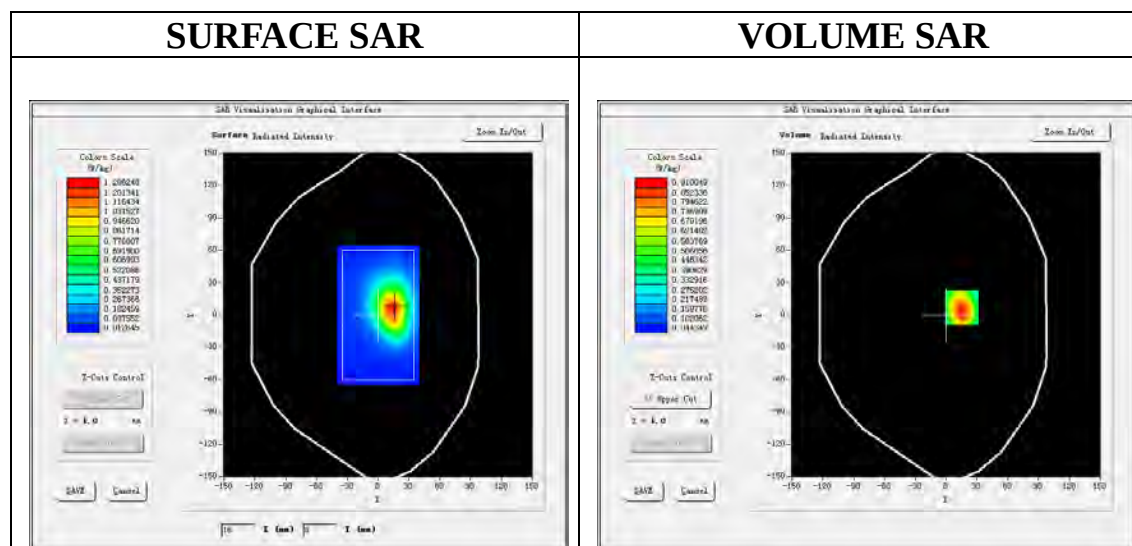

Maximum location: X=15.00, Y=7.00
SAR Peak: 1.28 W/kg

SAR 10g (W/Kg)	0.551991
SAR 1g (W/Kg)	0.877821

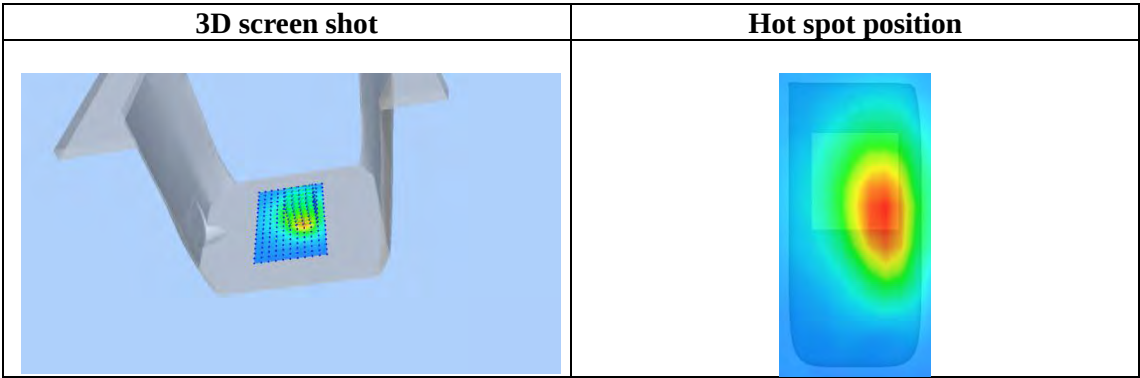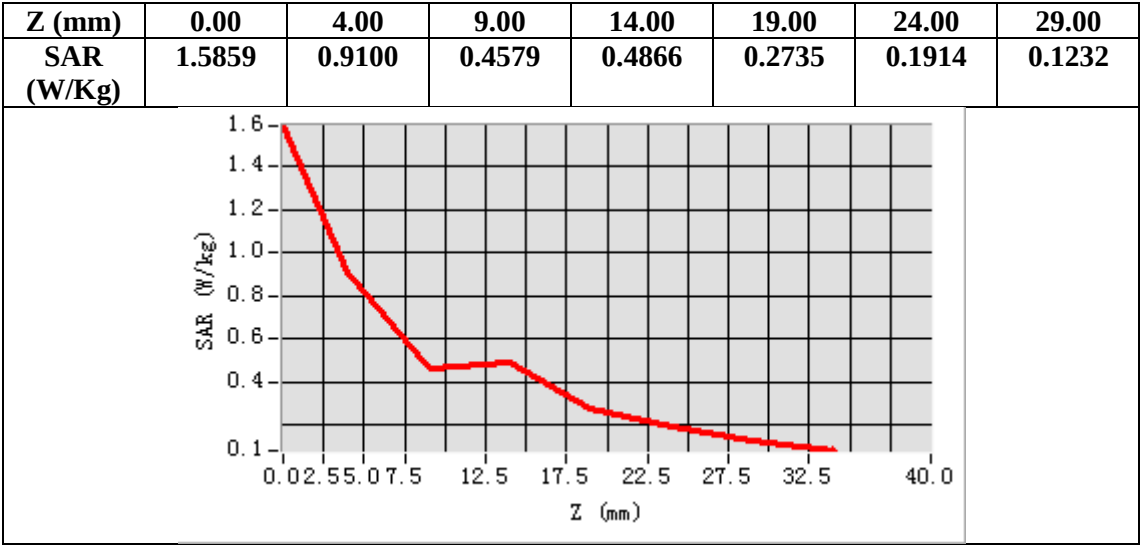

Test Laboratory: AGC Lab
LTE Band 71 Mid-Touch- Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOJO**

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 71; Duty Cycle:1:1; Conv.F=2.04
Frequency: 683 MHz; Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 40.10$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): TAPA07, Liquid temperature ($^{\circ}\text{C}$): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 71 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 71 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 71
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

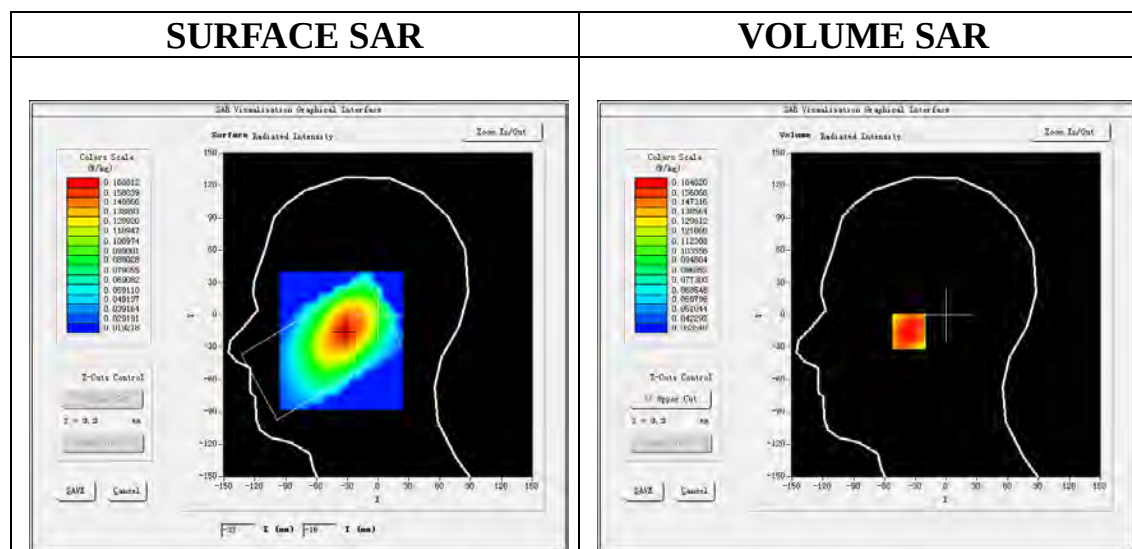

Maximum location: X=-32.00, Y=-15.00
SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.128018
SAR 1g (W/Kg)	0.166864

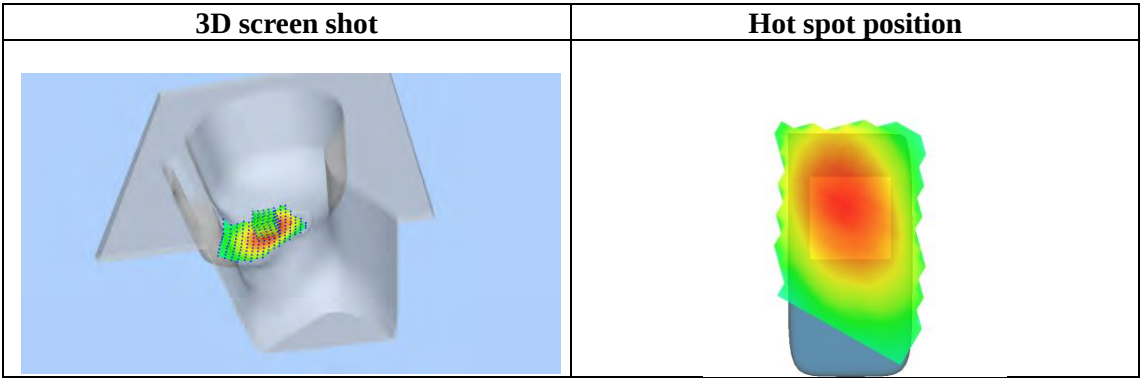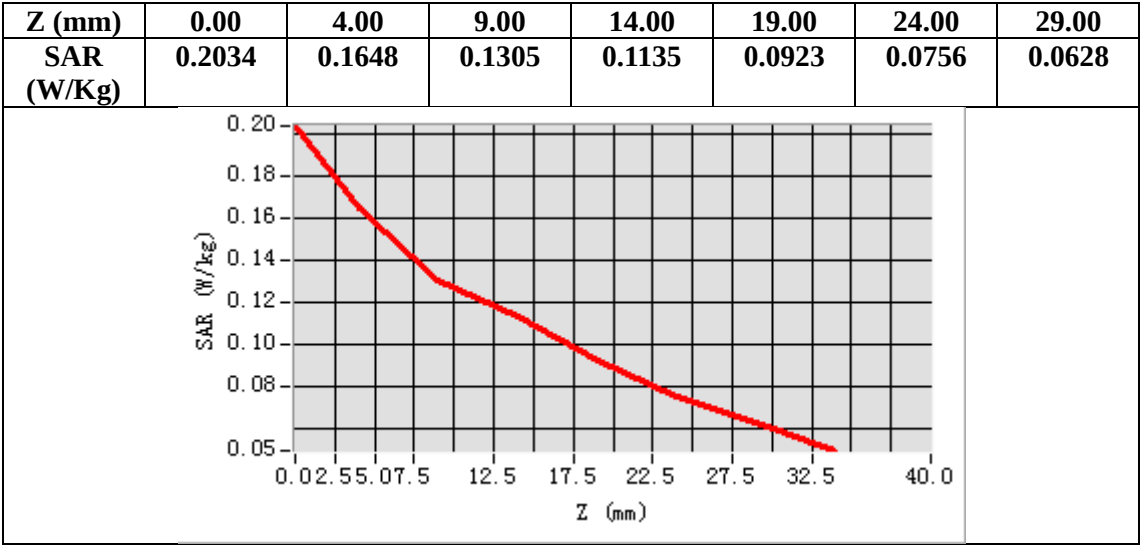

Test Laboratory: AGC Lab
LTE Band 71 Mid-Body-Back (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOJO

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 71; Duty Cycle:1:1; Conv.F=2.04;
Frequency: 683 MHz; Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 40.10$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA07, Liquid temperature ($^{\circ}\text{C}$): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 71 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 71 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 71
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

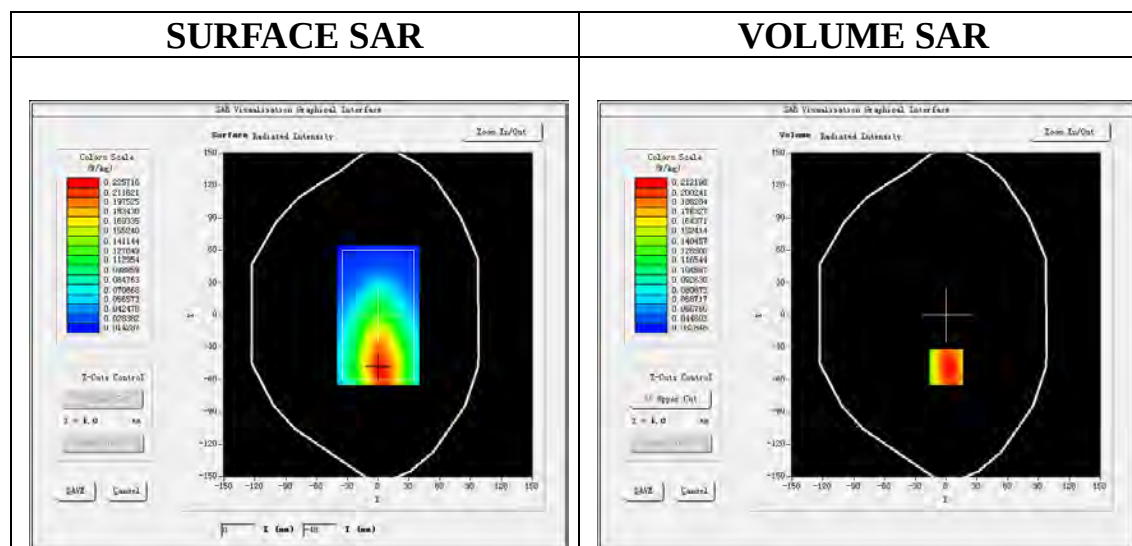

Maximum location: X=0.00, Y=-48.00
SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.147573
SAR 1g (W/Kg)	0.213000

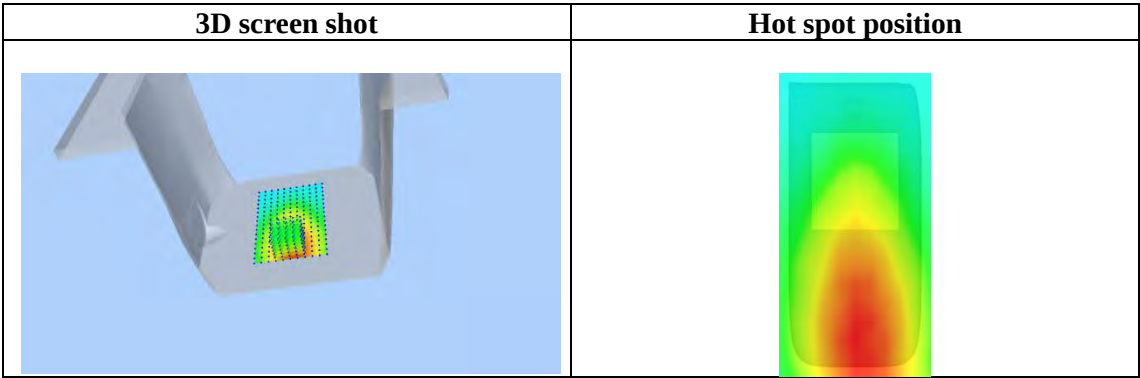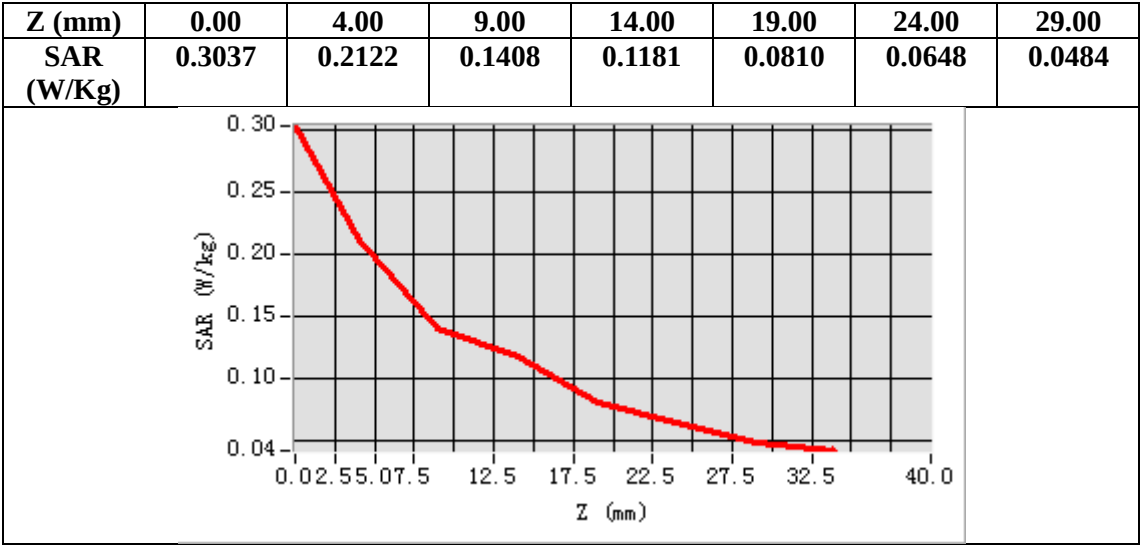

WIFI MODE

Test Laboratory: AGC Lab

Date: TTDD7

802.11b Mid-Touch-Right

DUT: 4G SMARTPHONE; Type: MOJO

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.16;

Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = \delta$ Pmho/m; $\epsilon_r = \epsilon$ rP $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

Ambient temperature (°C):TAPA7, Liquid temperature (°C): TTPPP


SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11b Mid- Touch-Right/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

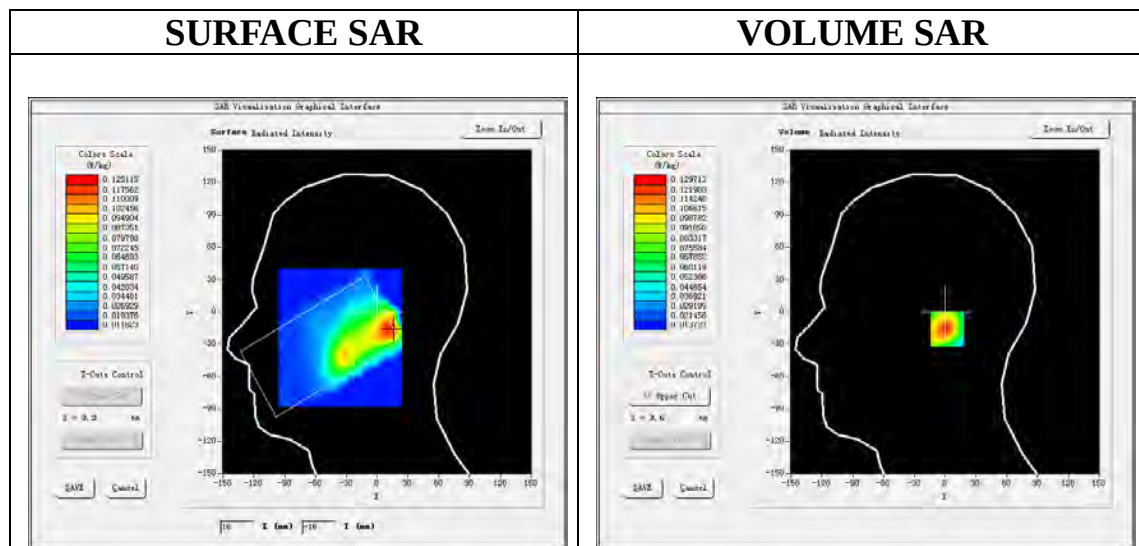

Maximum location: X=13.00, Y=-16.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.071702
SAR 1g (W/Kg)	0.124171

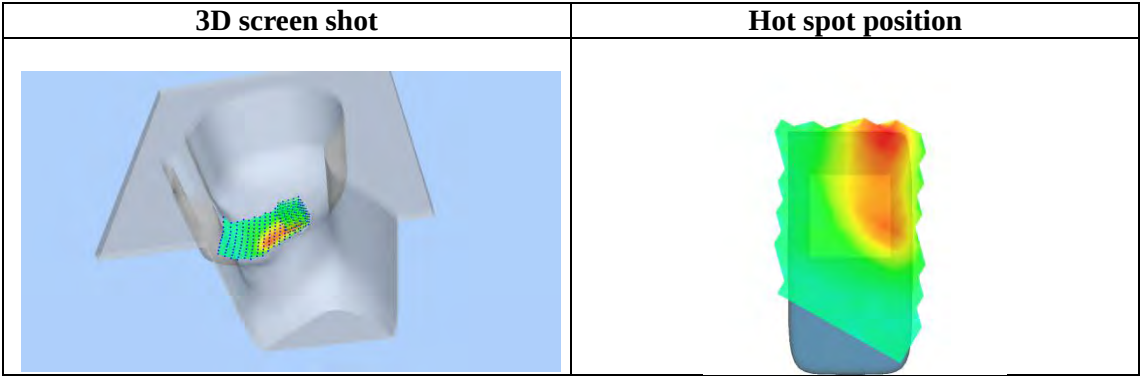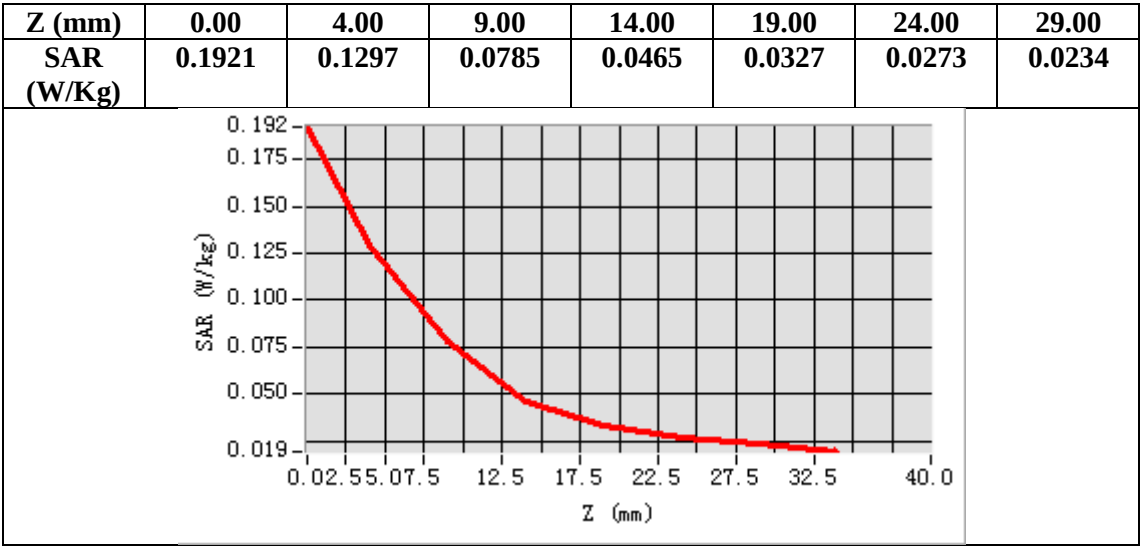

Test Laboratory: AGC Lab

Date: TTDD7

802.11b Mid-Body-Worn- Right

DUT: 4G SMARTPHONE; Type: MOJO

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.16;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = \delta P \text{mho/m}$; $\epsilon_r = \epsilon_r P$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$):TAPA7, Liquid temperature ($^{\circ}\text{C}$): TTPPP


SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Body- Right /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11b Mid- Body- Right /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Right
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

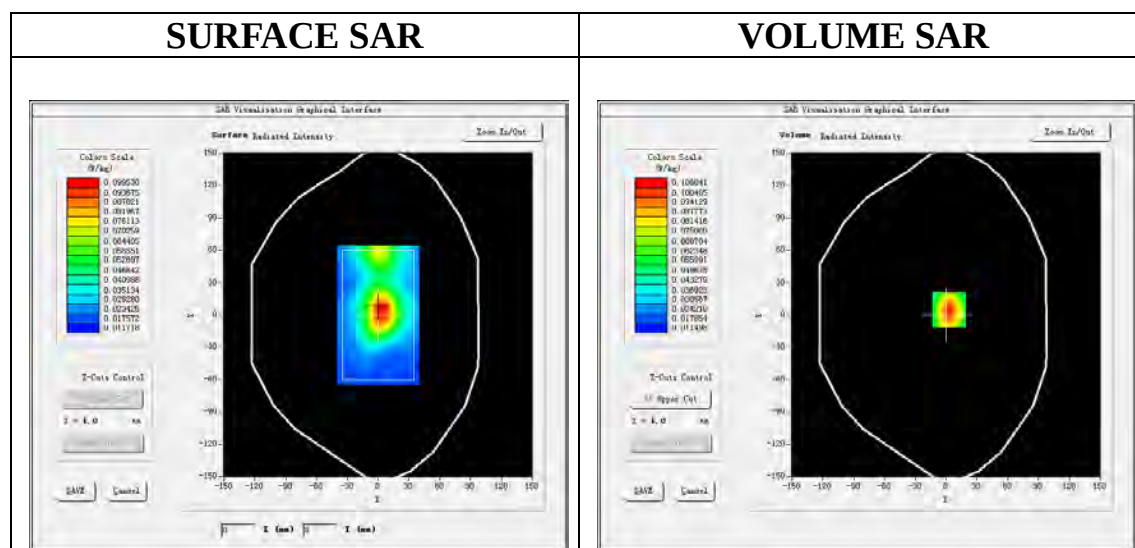

Maximum location: X=3.00, Y=5.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.060746
SAR 1g (W/Kg)	0.103035

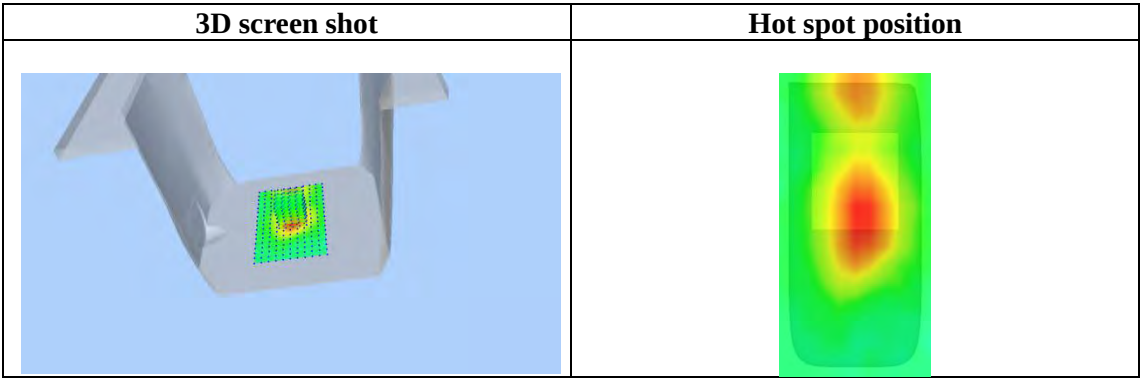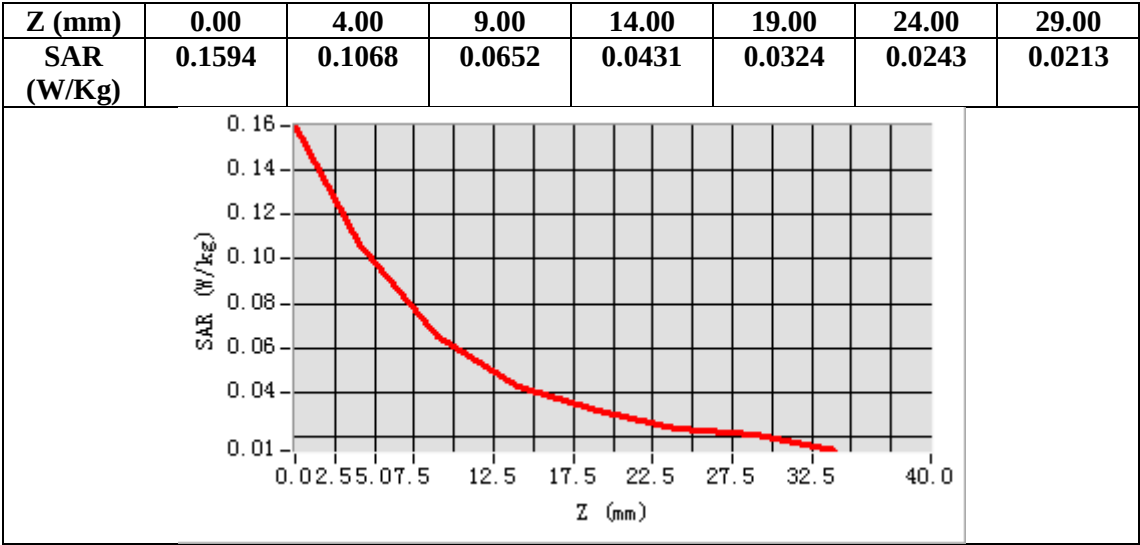

5.2GHz 802.11a

Test Laboratory: AGC Lab

802.11a CH36- Touch- Right

DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD06

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.53;
Frequency: 5180MHz; Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = \delta \text{ Hmho/m}$; $\epsilon_r = \epsilon \text{ rH}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): TAPA06, Liquid temperature ($^{\circ}\text{C}$): TTPPH


SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11a CH36- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11a CH36- Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5180MHz
Channels	CH36
Signal	Crest factor: 1.0

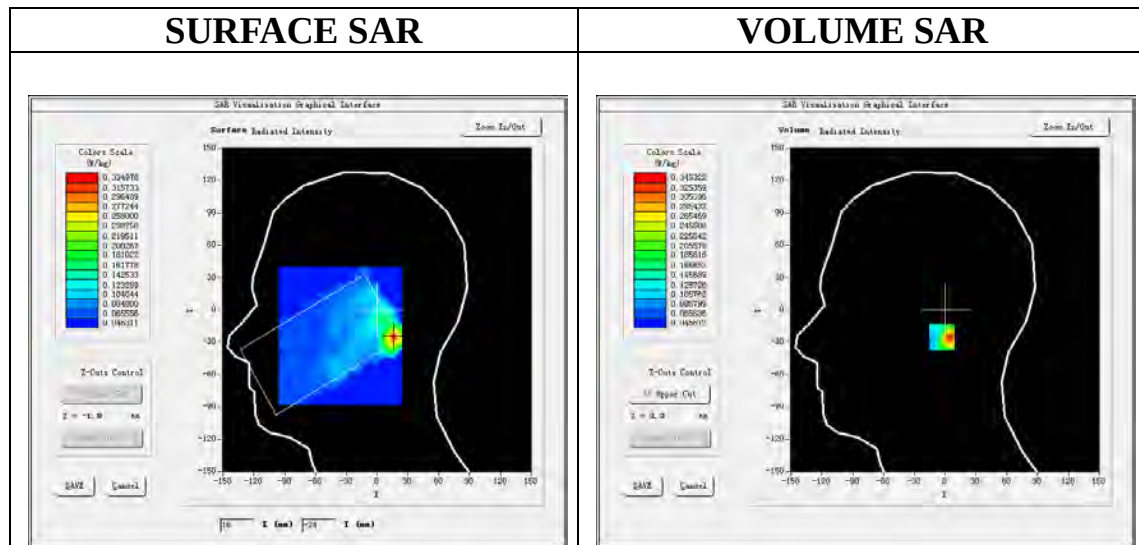

Maximum location: X=8.00, Y=-25.00

SAR Peak: 0.79 W/kg

SAR 10g (W/Kg)	0.140870
SAR 1g (W/Kg)	0.317690

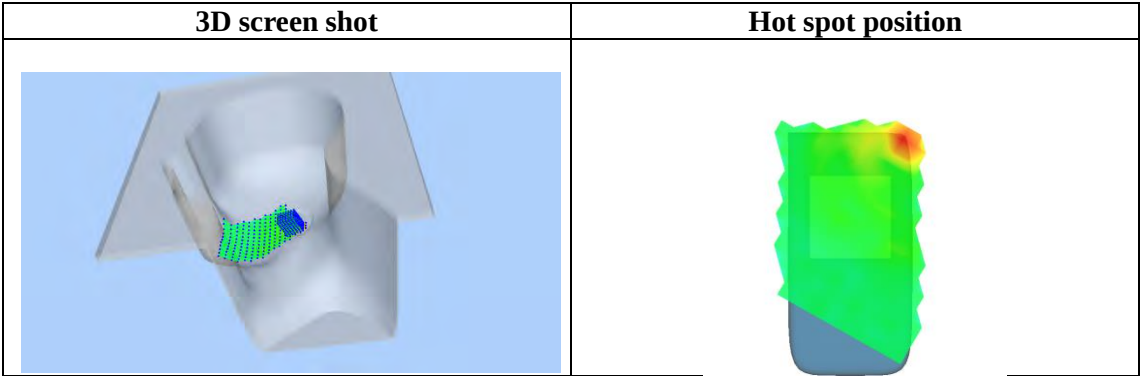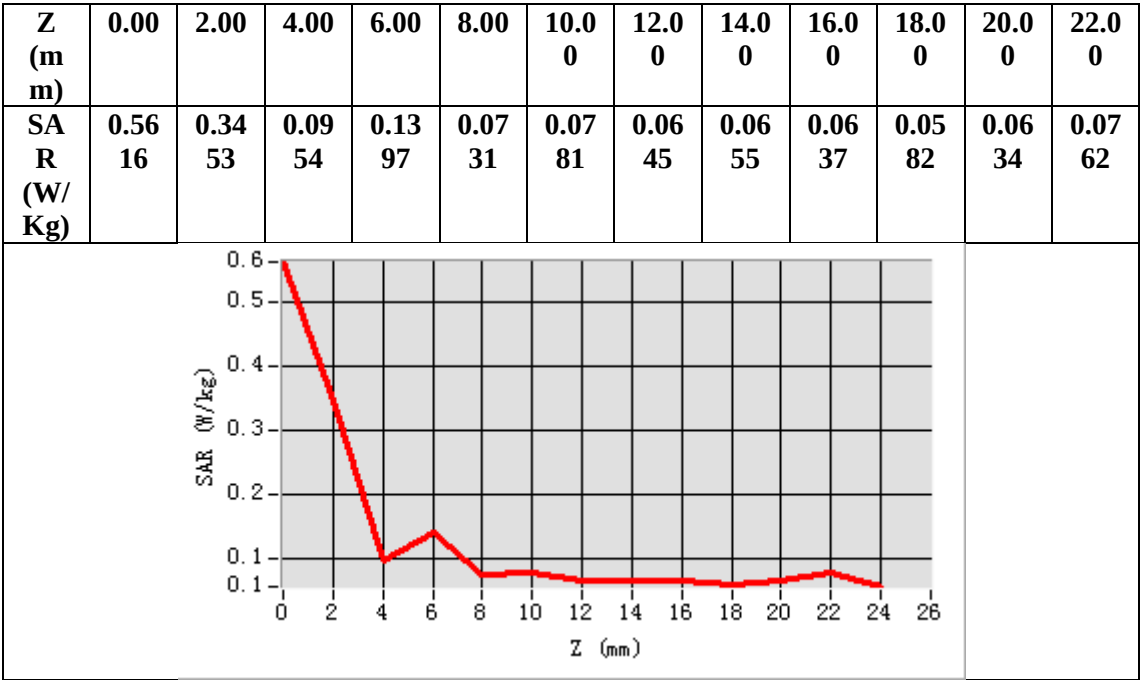

Test Laboratory: AGC Lab
802.11a CH36-Back
DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD06


Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.53;
Frequency: 5180MHz; Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = \delta \text{ Hmho/m}$; $\epsilon_r = \epsilon \text{ rH}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA06, Liquid temperature ($^{\circ}\text{C}$): TTPPH

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11a CH36- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11a CH36- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5180MHz
Channels	CH36
Signal	Crest factor: 1.0

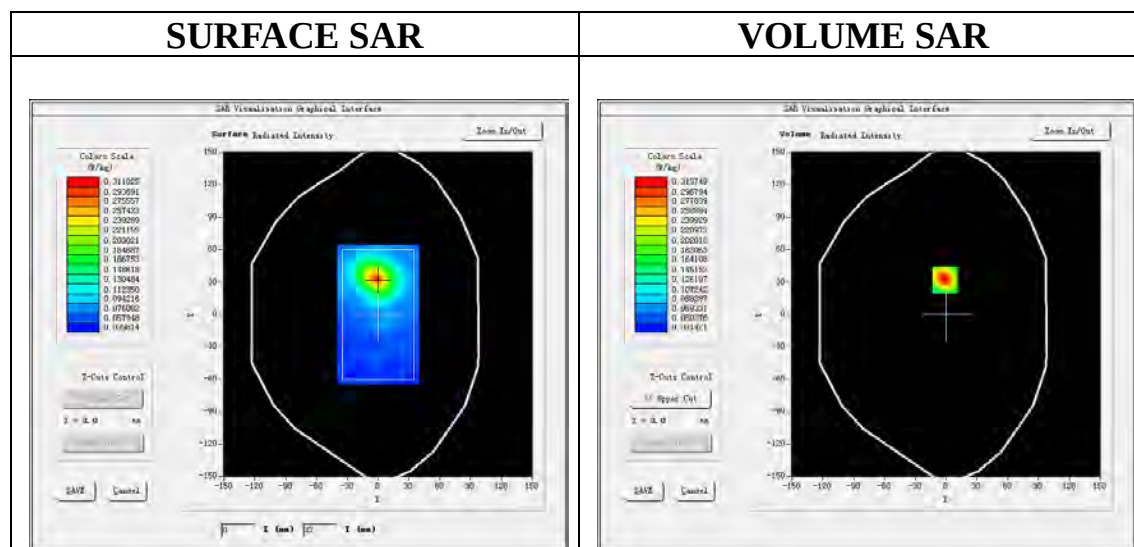

Maximum location: X=-1.00, Y=32.00

SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.108630
SAR 1g (W/Kg)	0.260693

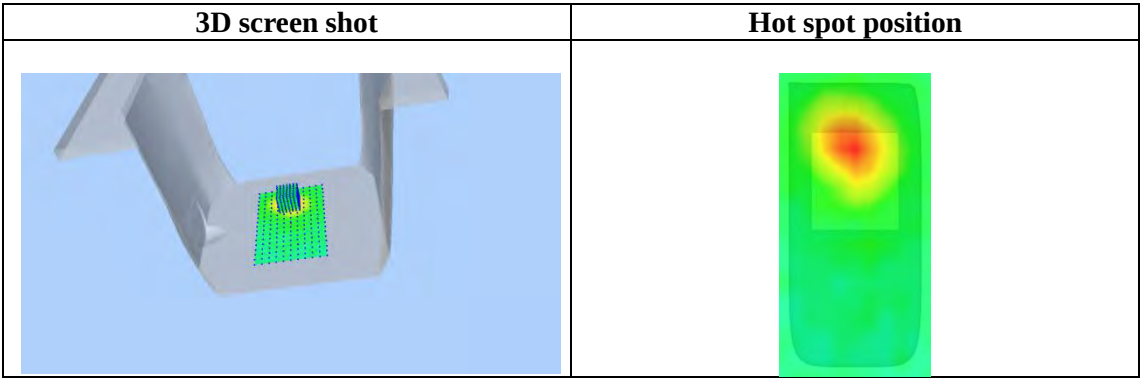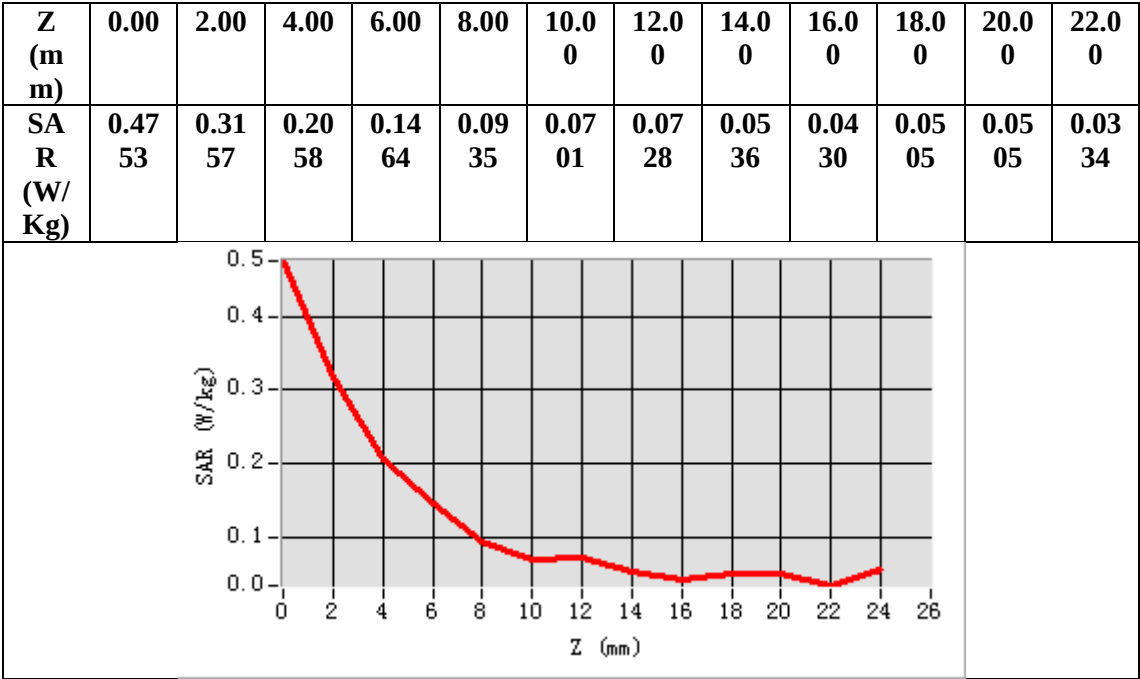

5.3GHz 802.11ac VHT40
Test Laboratory: AGC Lab
802.11ac VHT40 CH60-Touch-Right
DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD03


Communication System: Wi-Fi; Communication System Band: 802.11ac VHT40; Duty Cycle: 1:1; Conv.F=1.53;
Frequency: 5300MHz; Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = \delta \text{ 0Smho/m}$; $\epsilon_r = \epsilon \text{ r0S}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): TAPA03, Liquid temperature ($^{\circ}\text{C}$): TTPPS

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac VHT40 CH60- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac VHT40 CH60- Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5300MHz
Channels	CH60
Signal	Crest factor: 1.0

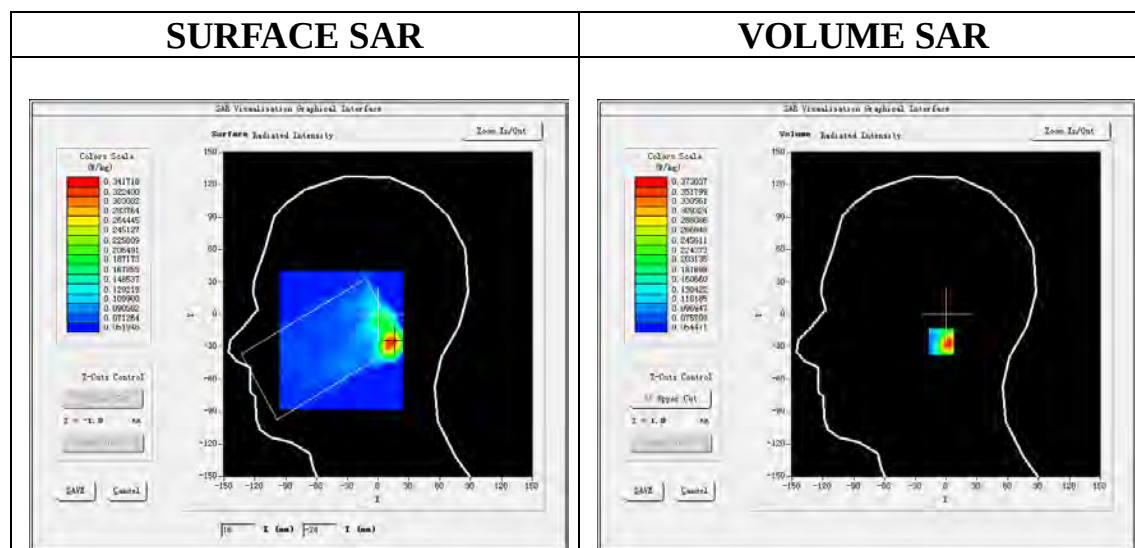

Maximum location: X=5.00, Y=-25.00

SAR Peak: 0.89 W/kg

SAR 10g (W/Kg)	0.152209
SAR 1g (W/Kg)	0.362582

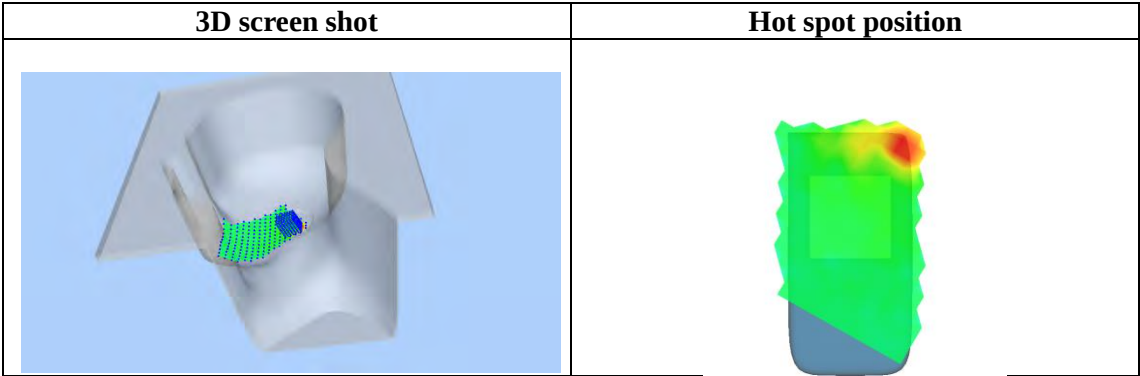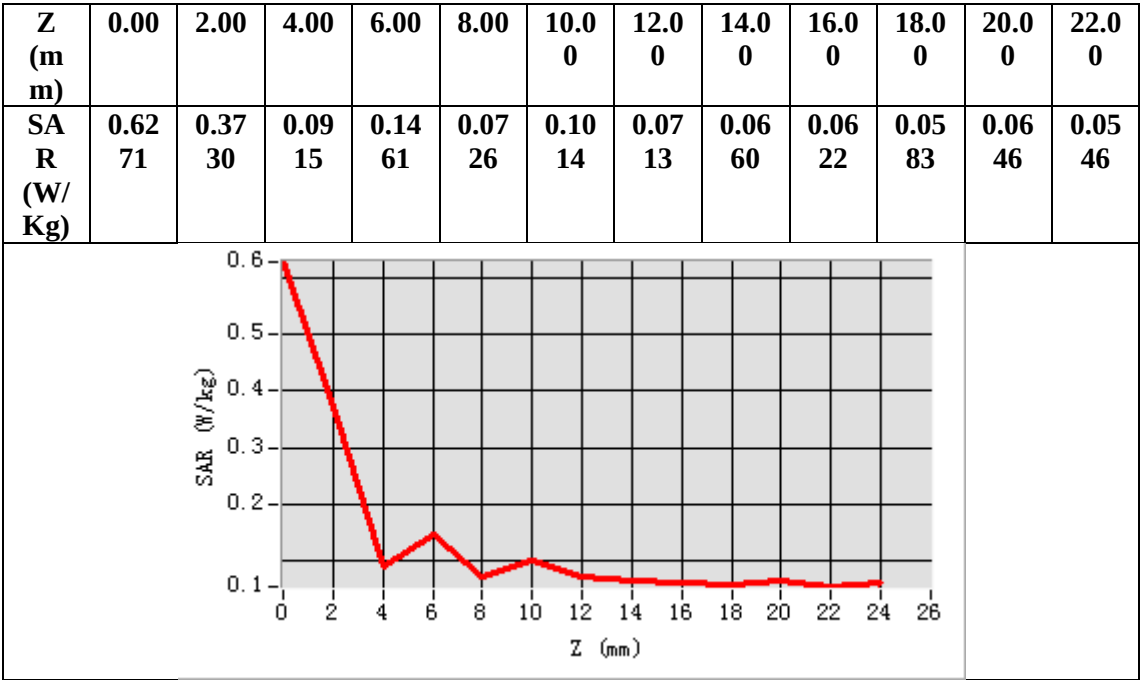

Test Laboratory: AGC Lab
802.11ac VHT40 CH60-Back
DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD03


Communication System: Wi-Fi; Communication System Band: 802.11ac VHT40; Duty Cycle: 1:1; Conv.F=1.53;
Frequency: 5290MHz; Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = \delta 0 \text{ Smho/m}$; $\epsilon r = \epsilon r 0 \text{ S}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA03, Liquid temperature ($^{\circ}\text{C}$): TTPPS

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac VHT40 CH60- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac VHT40 CH60- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5300MHz
Channels	CH60
Signal	Crest factor: 1.0

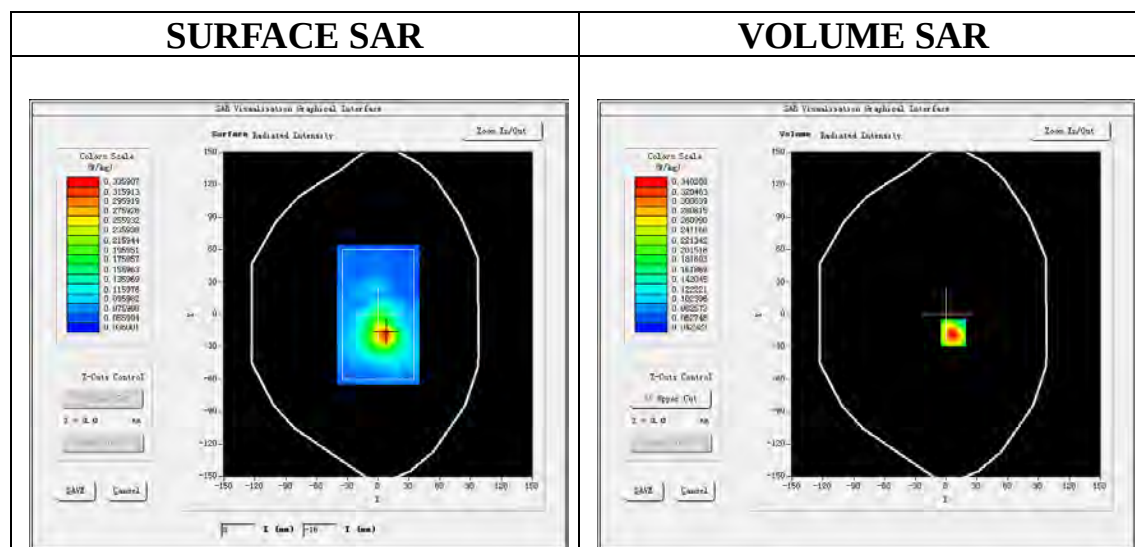

Maximum location: X=7.00, Y=-17.00

SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.120806
SAR 1g (W/Kg)	0.222703

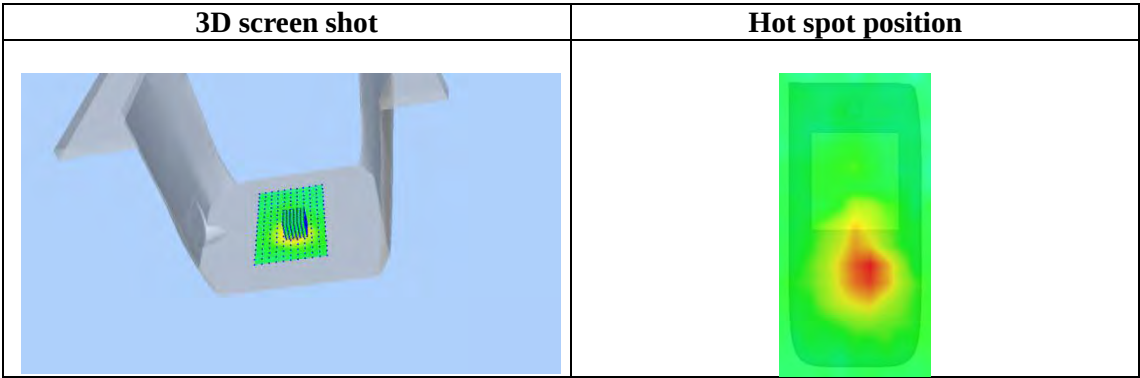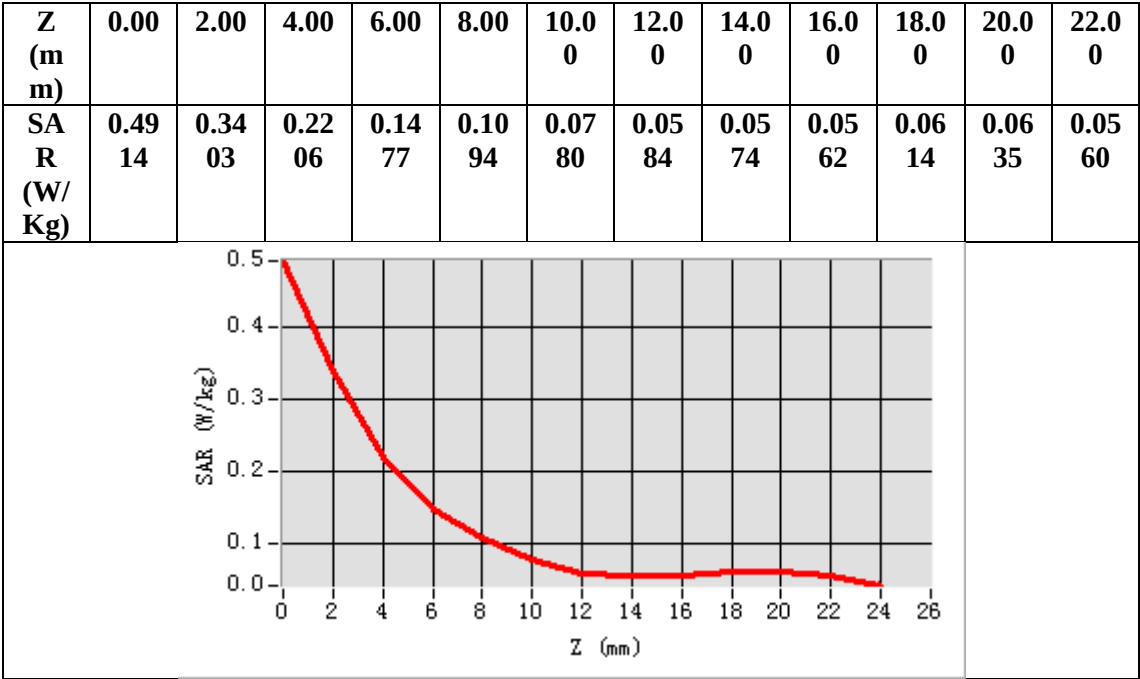

5.6GHz 802.11ac-VHT40

Test Laboratory: AGC Lab

Date: TTDD09

802.11ac-VHT40 CH110-Touch- Right

DUT: 4G SMARTPHONE; Type: MOJO

Communication System: Wi-Fi; Communication System Band: 802.11ac-VHT40; Duty Cycle: 1:1; Conv.F=1.24;

Frequency: 5700MHz; Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = \delta 0 \text{ Bmho/m}$; $\epsilon_r = \epsilon_r 0 \text{ B}$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

Ambient temperature ($^{\circ}\text{C}$): TAPA09, Liquid temperature ($^{\circ}\text{C}$): TTPPB


SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac-VHT40 CH110-Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11ac-VHT40 CH110-Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5600MHz
Channels	CH110
Signal	Crest factor: 1.0

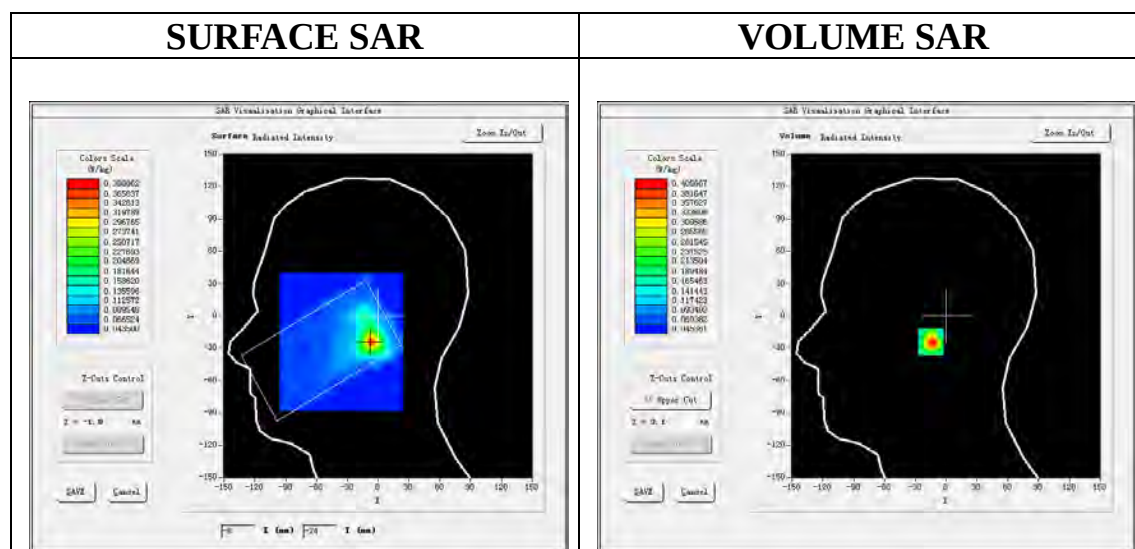

Maximum location: X=-7.00, Y=-24.00

SAR Peak: 1.00 W/kg

SAR 10g (W/Kg)	0.164404
SAR 1g (W/Kg)	0.391181

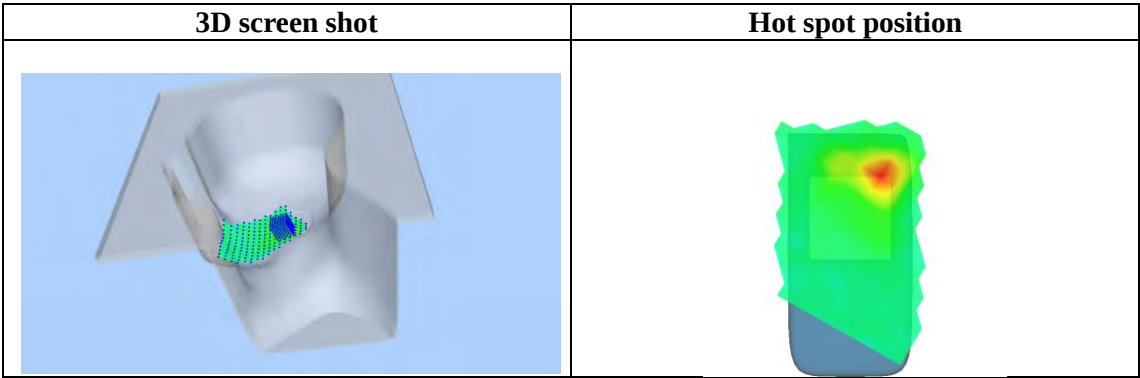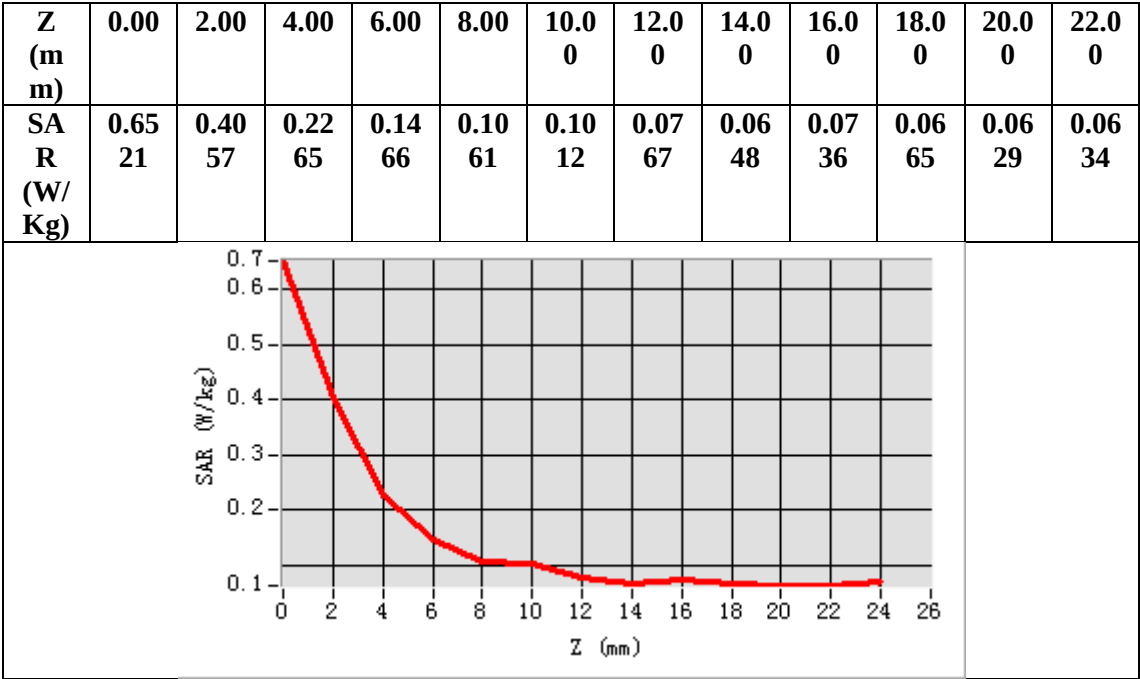

Test Laboratory: AGC Lab
802.11ac-VHT40 CH110-Back
DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD09


Communication System: Wi-Fi; Communication System Band: 802.11ac-VHT40; Duty Cycle: 1:1; Conv.F=1.24;
Frequency: 5600MHz; Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = \delta 0 \text{ Bmho/m}$; $\epsilon r = \epsilon r 0 \text{ B}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA09, Liquid temperature ($^{\circ}\text{C}$): TTPPB

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac-VHT40 CH110- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac-VHT40 CH110- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5600MHz
Channels	CH110
Signal	Crest factor: 1.0

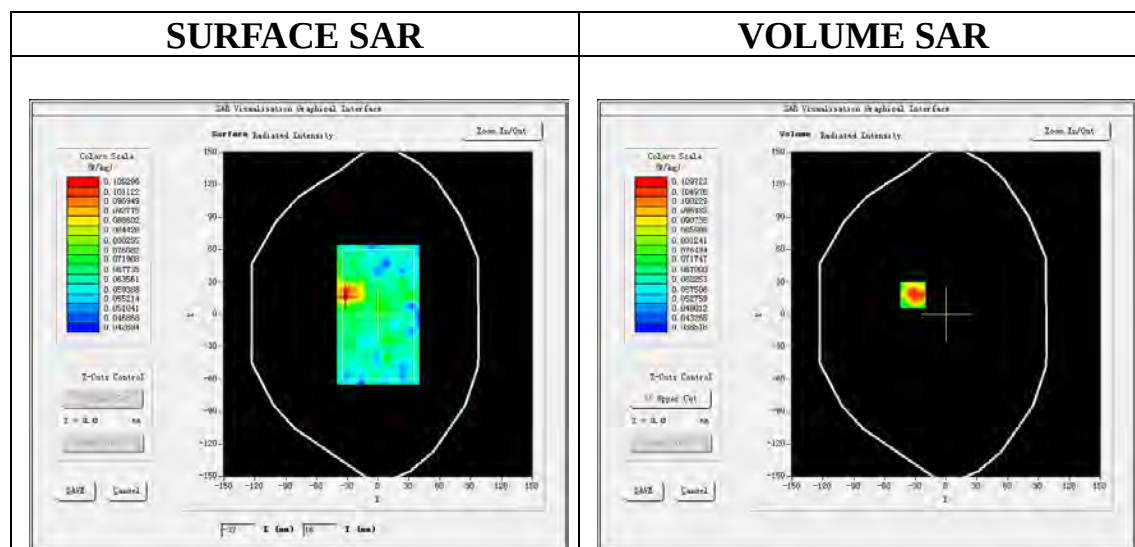

Maximum location: X=-32.00, Y=18.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.069293
SAR 1g (W/Kg)	0.085448

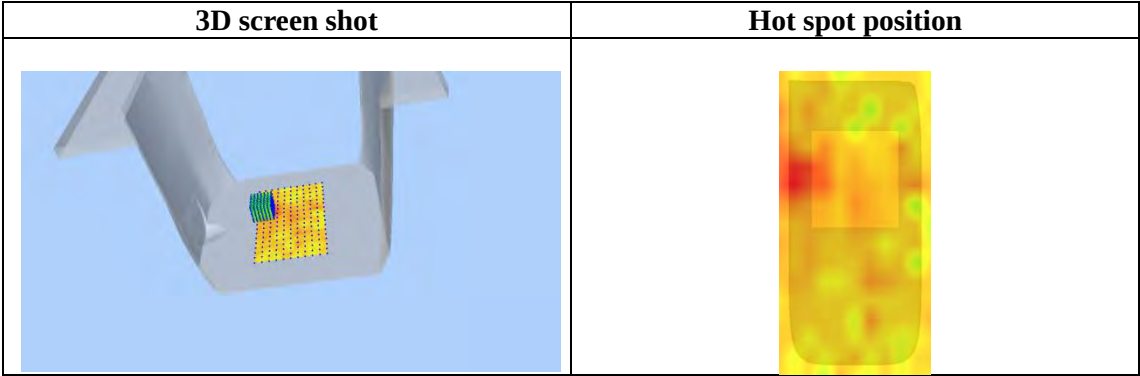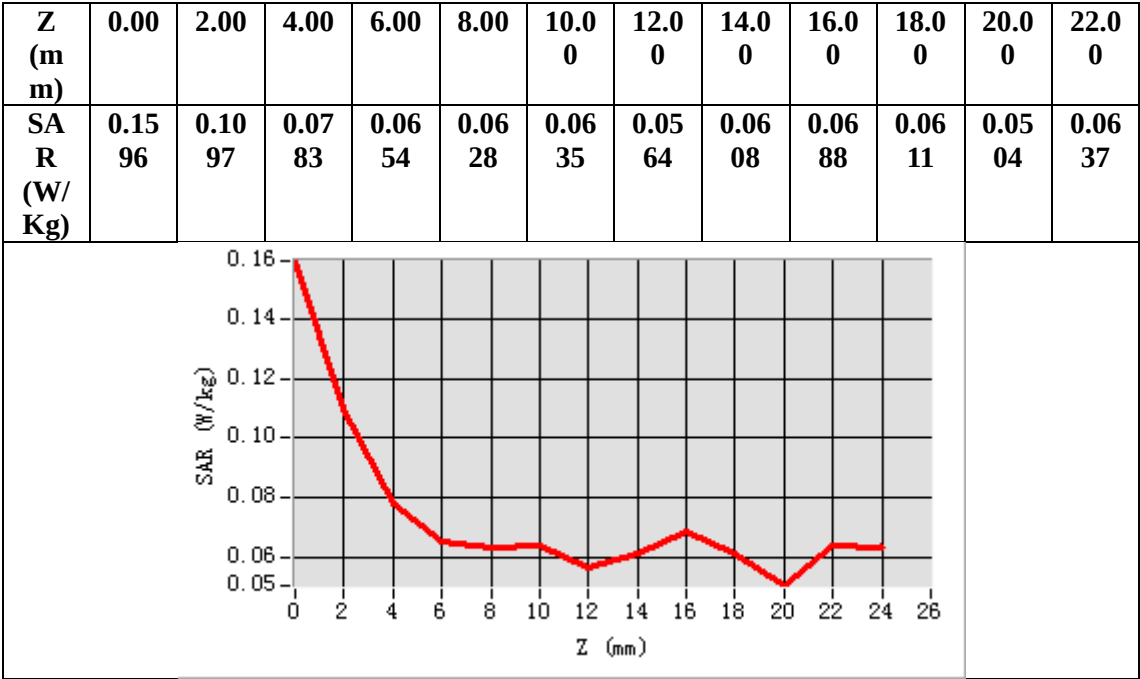

5.8GHz 802.11ac-VHT80
Test Laboratory: AGC Lab
802.11ac VHT80 CH155- Touch-Right
DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD02


Communication System: Wi-Fi; Communication System Band: 802.11ac VHT80; Duty Cycle: 1:1; Conv.F=1.37;
Frequency: 5775MHz; Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = \delta \text{ Xmho/m}$; $\epsilon_r = \epsilon_r \text{ X}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): TAPA02, Liquid temperature ($^{\circ}\text{C}$): TTPPX

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac VHT80 CH155- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac VHT80 CH155- Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5775MHz
Channels	CH155
Signal	Crest factor: 1.0

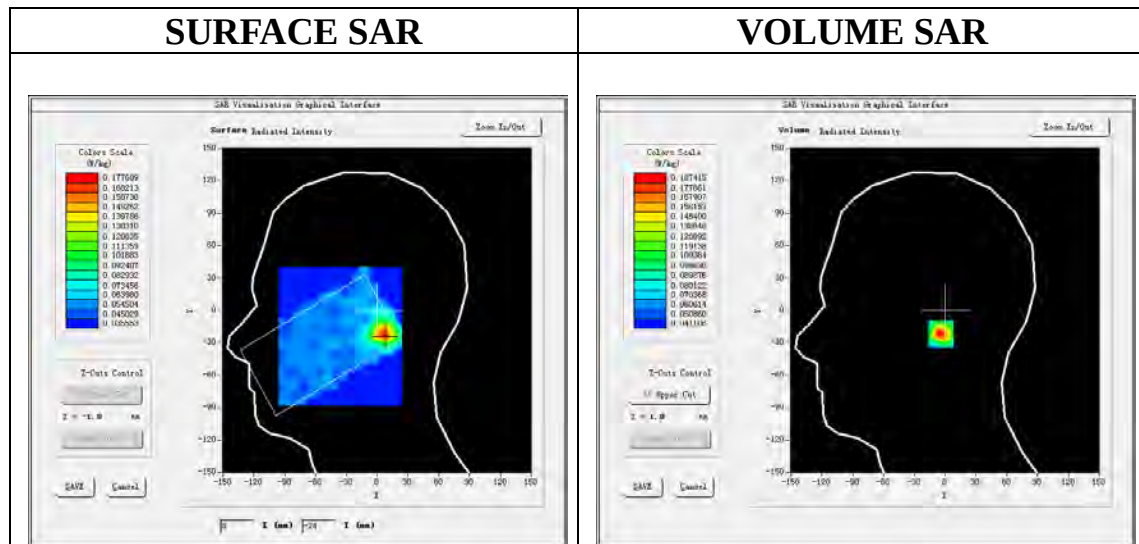

Maximum location: X=6.00, Y=-22.00

SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.095233
SAR 1g (W/Kg)	0.183077

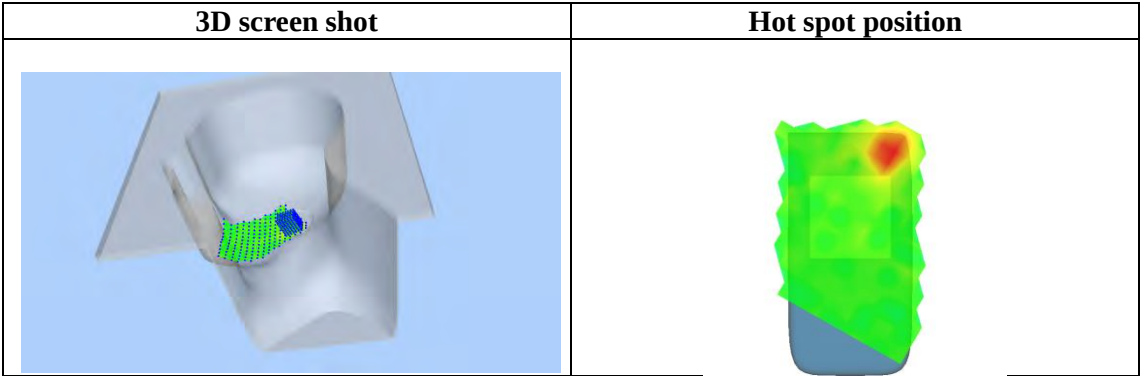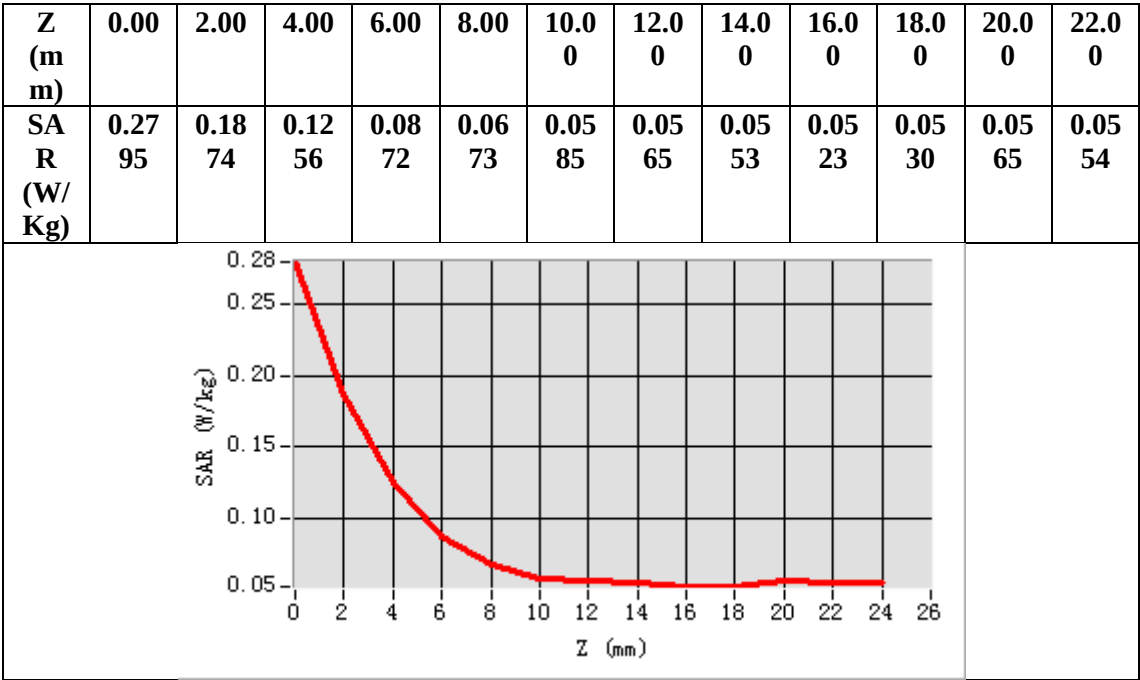

Test Laboratory: AGC Lab
802.11ac VHT80 CH155-Back
DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD02


Communication System: Wi-Fi; Communication System Band: 802.11ac VHT80 CH155; Duty Cycle: 1:1;
Conv.F=1.37;
Frequency: 5775MHz; Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = \delta \text{ Xmho/m}$; $\epsilon_r = \epsilon \text{ rX}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature (°C): TAPA02, Liquid temperature (°C): TTPPX

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ 802.11ac VHT80 CH155- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 802.11ac VHT80 CH155- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5775MHz
Channels	CH155
Signal	Crest factor: 1.0

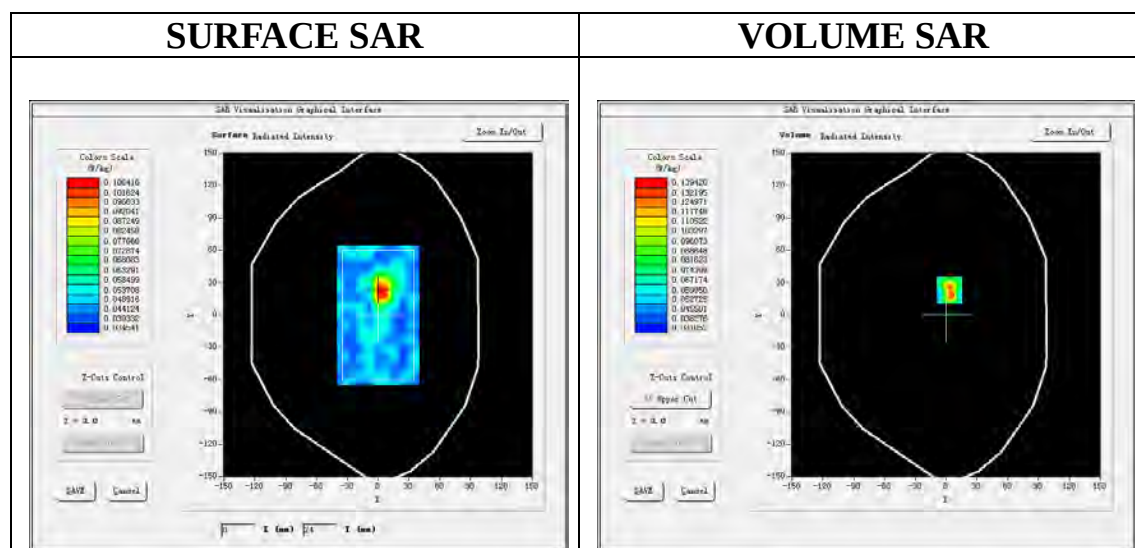

Maximum location: X=3.00, Y=23.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.058528
SAR 1g (W/Kg)	0.091629

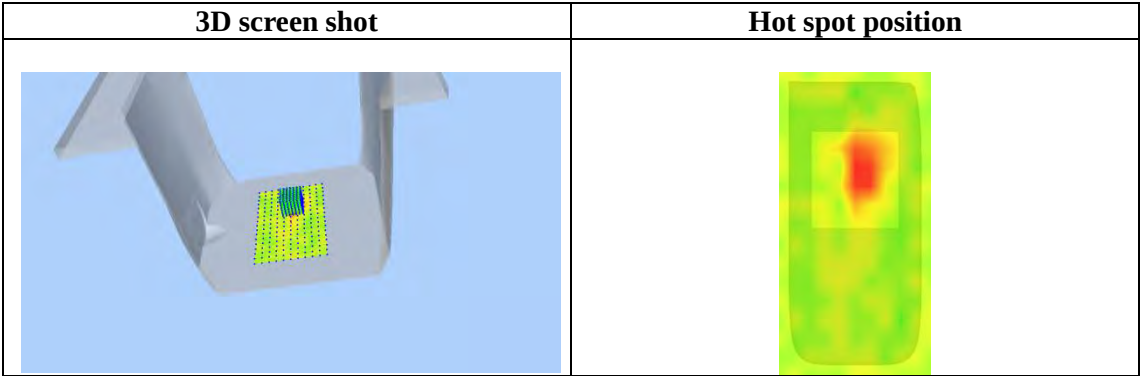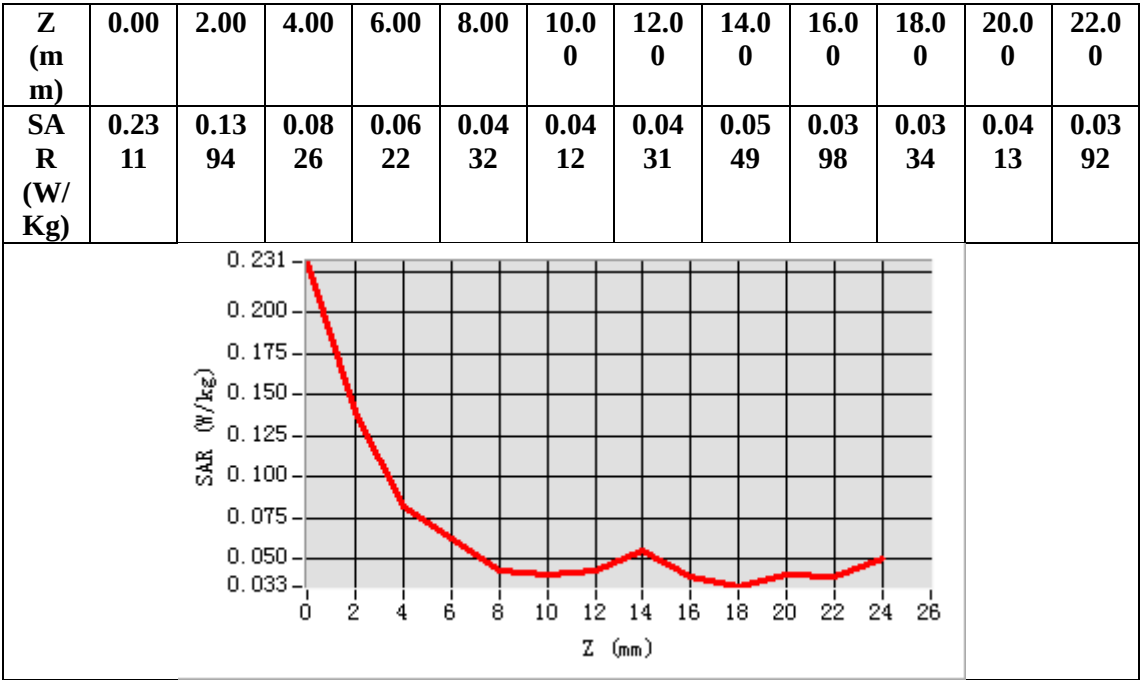

BlueTooth

Test Laboratory: AGC Lab

BT High-Touch- Right

DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD09


Communication System: BT; Communication System Band: GFSK; Duty Cycle: 1:1; Conv.F=2.16;
Frequency: 2480MHz; Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 4.93 \text{ mho/m}$; $\epsilon_r = 34.32$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 22.6, Liquid temperature ($^{\circ}\text{C}$): 22.6

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GFSK High- Touch- Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GFSK High- Touch- Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	2480
Channels	High
Signal	Crest factor: 1.0

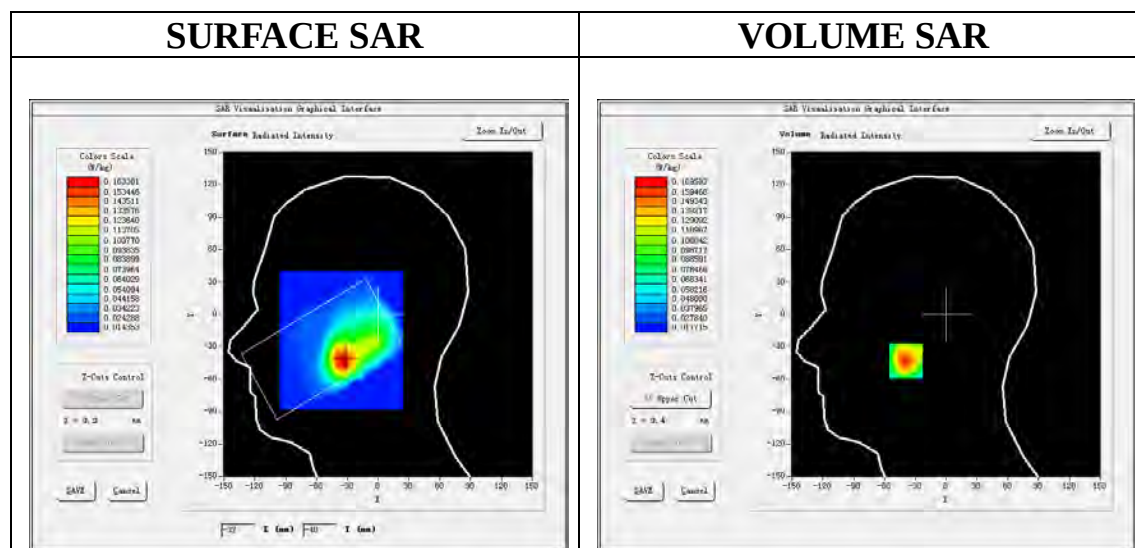

Maximum location: X=-34.00, Y=-43.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.092275
SAR 1g (W/Kg)	0.159103

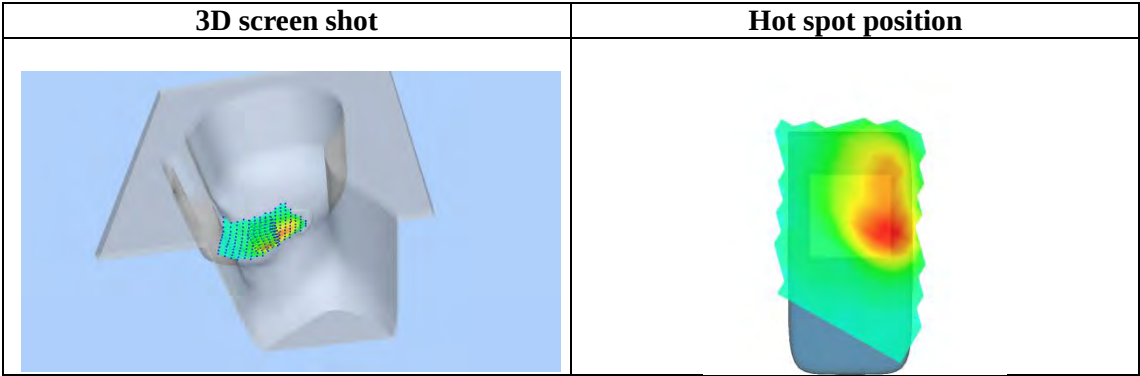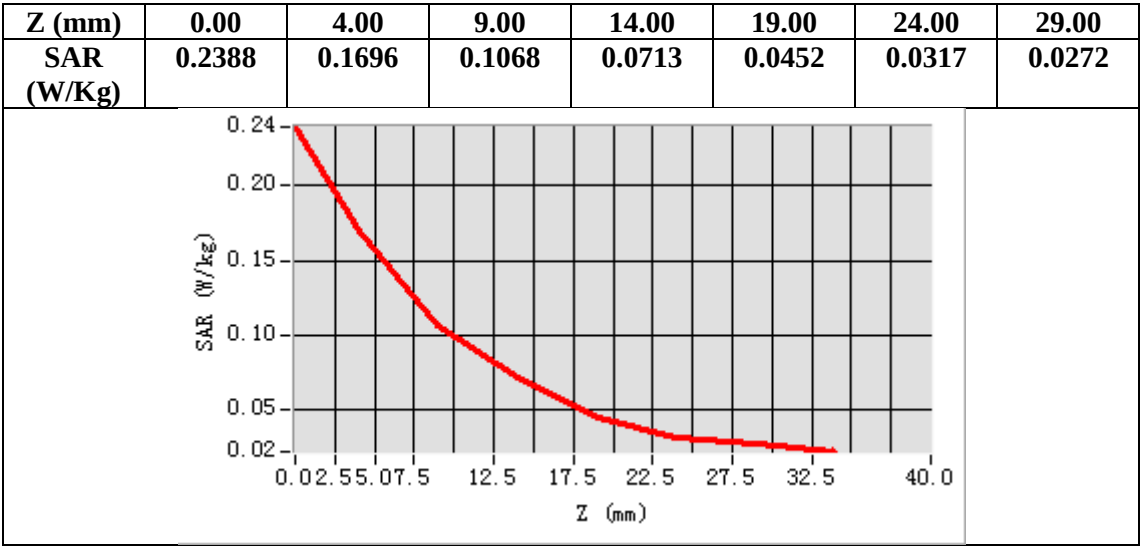

Test Laboratory: AGC Lab
BT High-Front
DUT: 4G SMARTPHONE; Type: MOJO

Date: TTDD09


Communication System: BT; Communication System Band: GFSK; Duty Cycle: 1:1; Conv.F=2.16;
Frequency:2480MHz; Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = \delta \text{ 0Bmho/m}$; $\epsilon r = \epsilon r \text{ 0B}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA09, Liquid temperature ($^{\circ}\text{C}$): TTPPB

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GFSK High- Body Front/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GFSK High- Body Front/Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body Front
Band	2480
Channels	High
Signal	Crest factor: 1.0

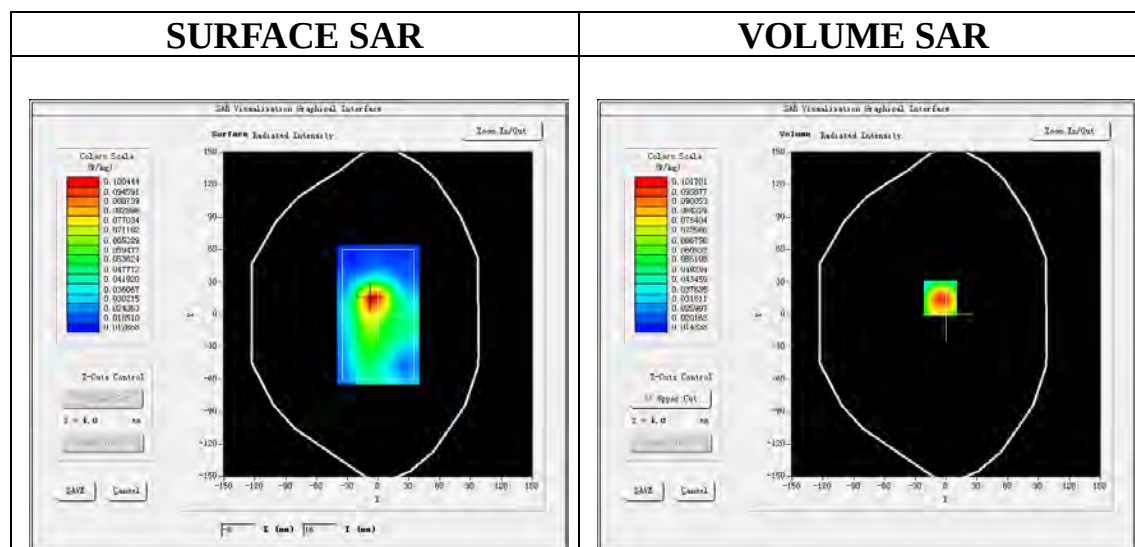

Maximum location: X=-6.00, Y=15.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.056878
SAR 1g (W/Kg)	0.096950

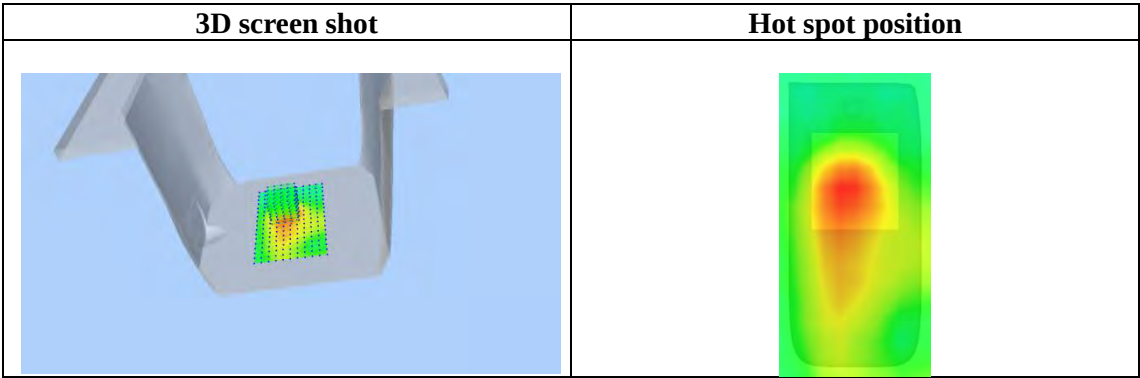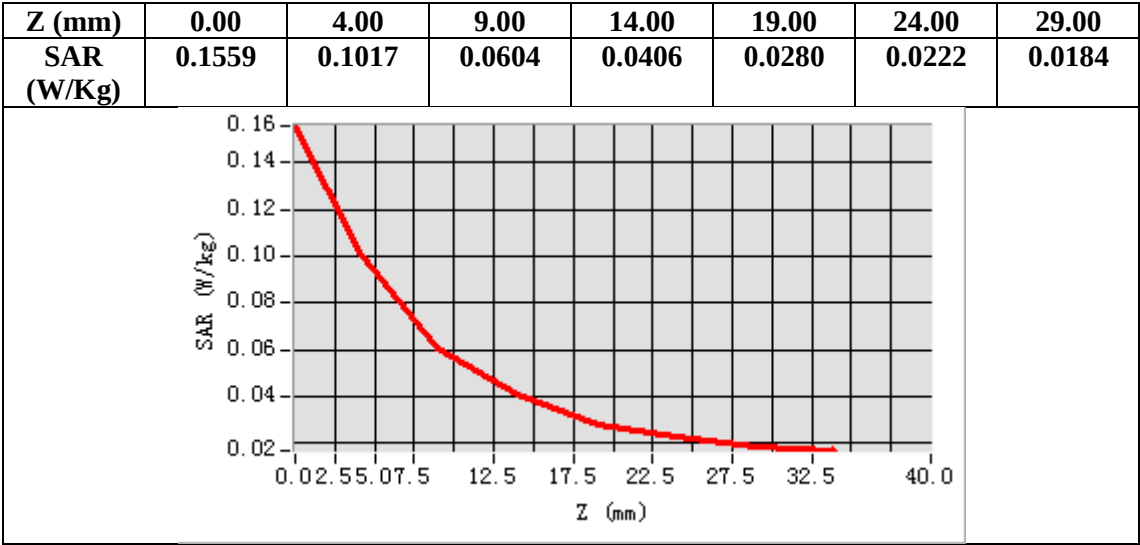

Test Laboratory: AGC Lab
GSM 850 Mid-Touch-Right <SIM 1>
DUT: 4G SMARTPHONE; **Type:** MOX 2


Date: May 05, 2024

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=1.89;
Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 39.36$; $\rho = 1000$ kg/m³;
Phantom section: Right Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

SATIMO Configuration

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/GSM 850 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GSM 850 Mid-Touch-Right/Zoom Scan : Measurement grid: dx=8mm,dy=8mm, dz=5mm

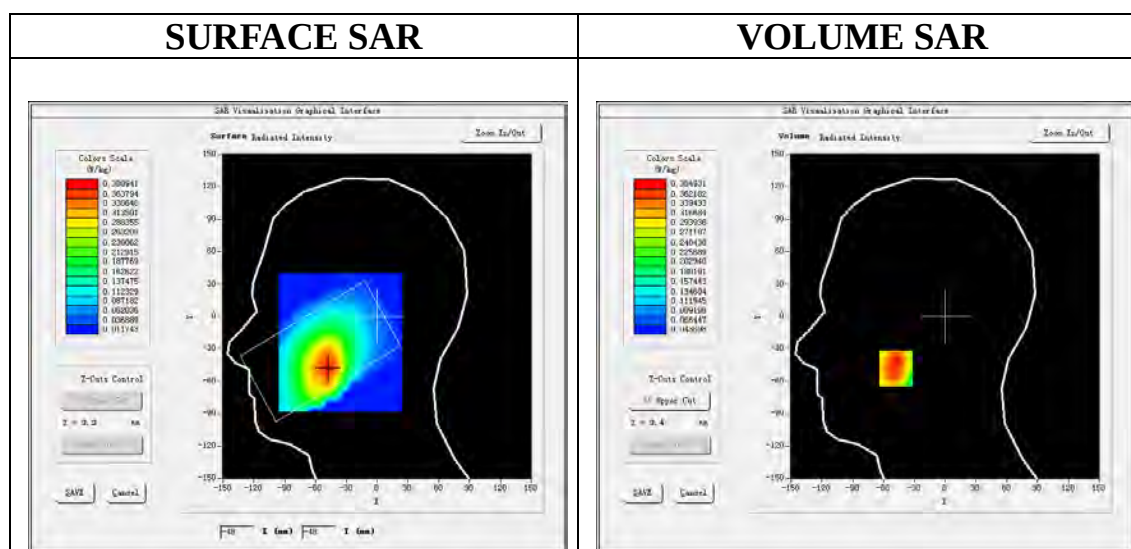

Maximum location: X=-48.00, Y=-48.00

SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.264542
SAR 1g (W/Kg)	0.368672

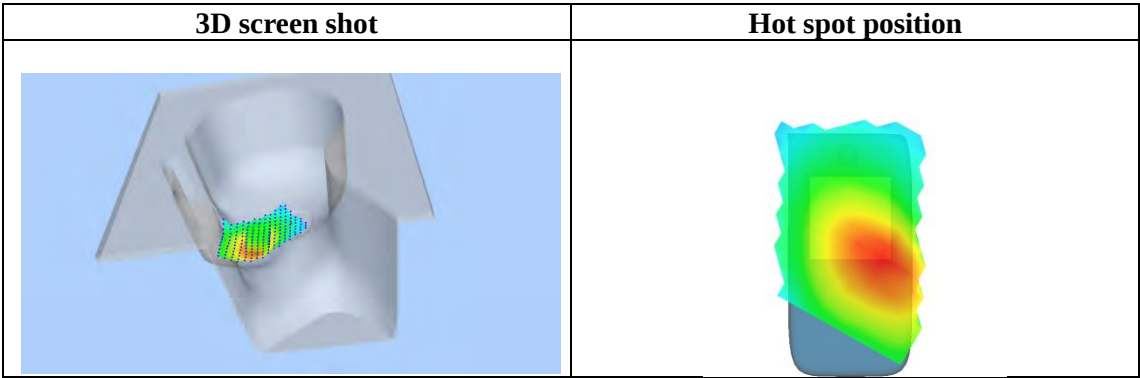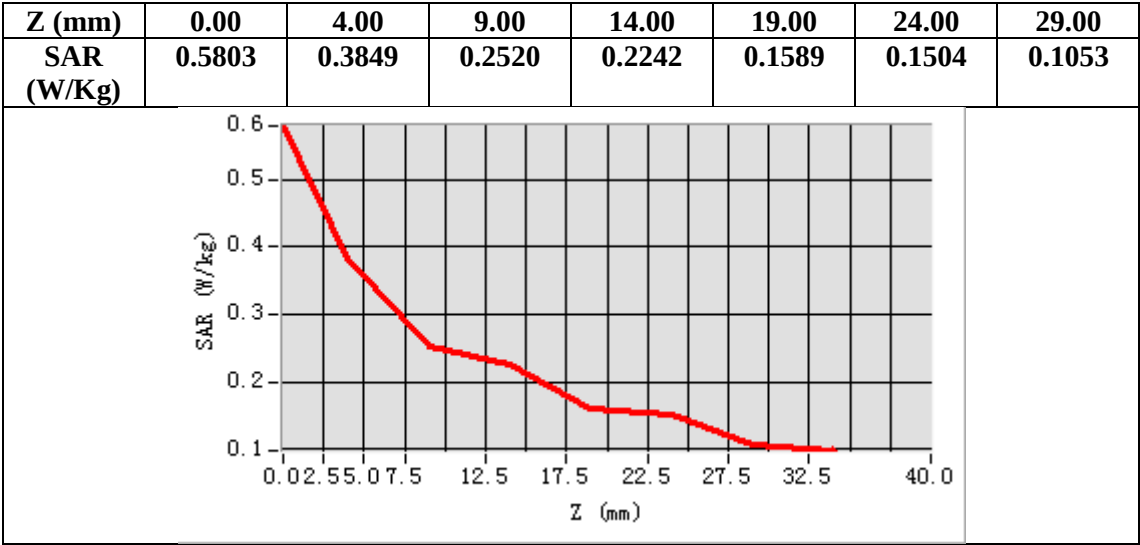

Test Laboratory: AGC Lab
GSM 850 Mid- Body- Back (MS)<SIM 1>
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 05, 2024


Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3; Conv.F=1.89;
Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 39.36$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GSM 850 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GSM 850 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	GSM 850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

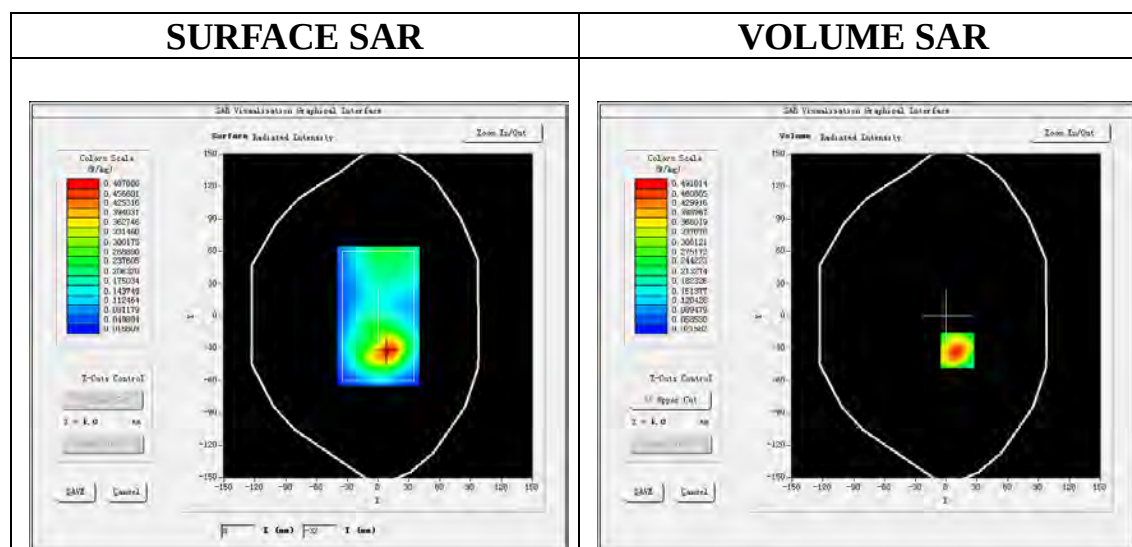

Maximum location: X=11.00, Y=-32.00

SAR Peak: 0.75 W/kg

SAR 10g (W/Kg)	0.260961
SAR 1g (W/Kg)	0.470357

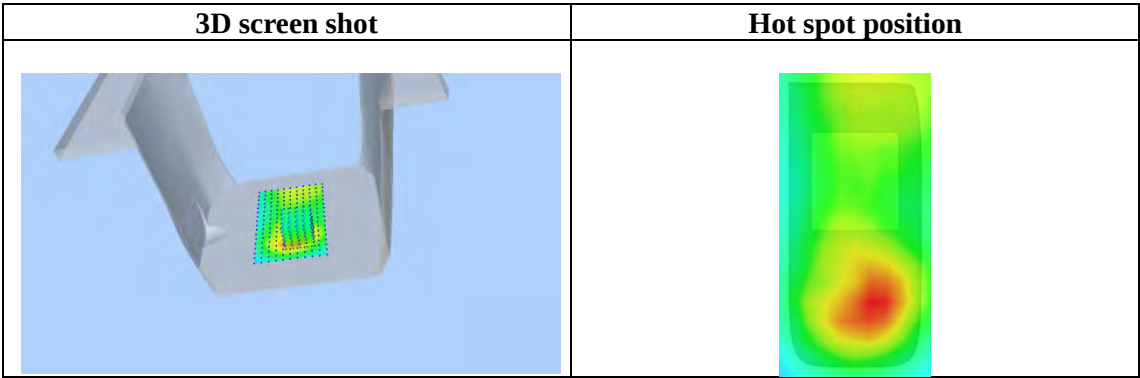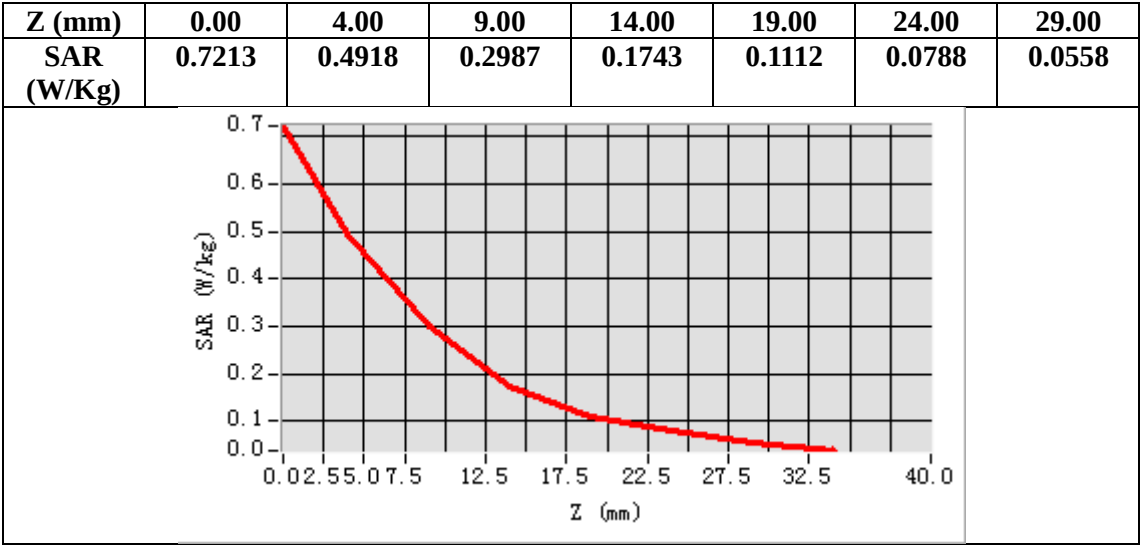

Test Laboratory: AGC Lab
GPRS 850 Mid- Body- Back (2up)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 05, 2024


Communication System: GPRS-2 Slot; Communication System Band: GSM 850; Duty Cycle: 1:4.2; Conv.F=1.89;
Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 39.36$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 850 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS 850 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	GSM 850
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

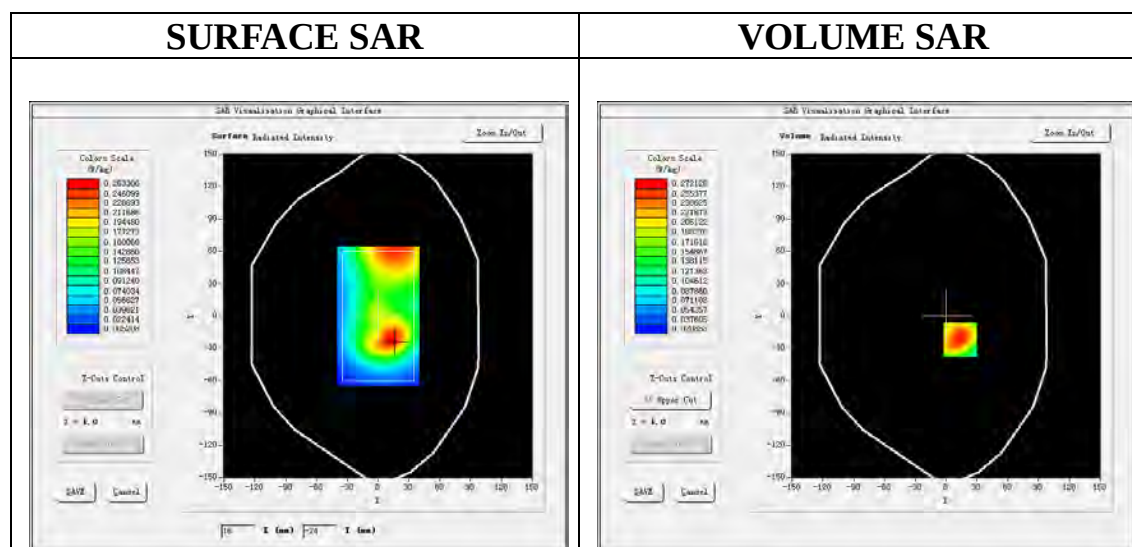

Maximum location: X=14.00, Y=-22.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.154705
SAR 1g (W/Kg)	0.258474

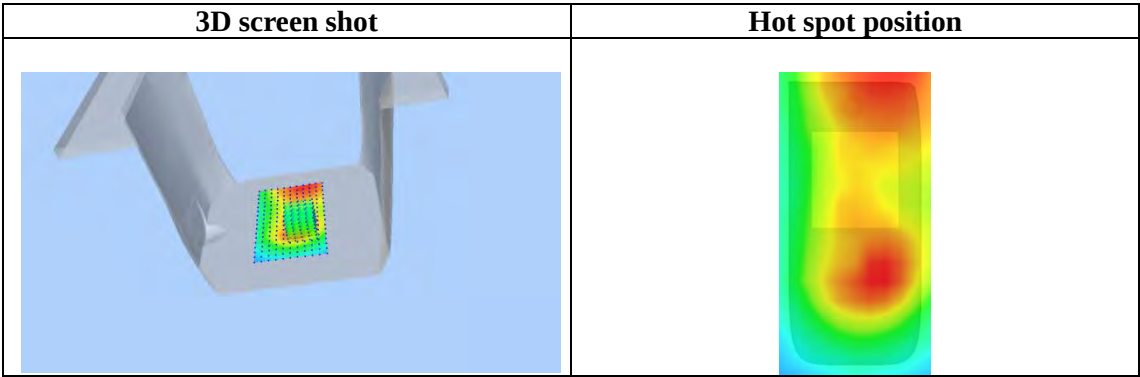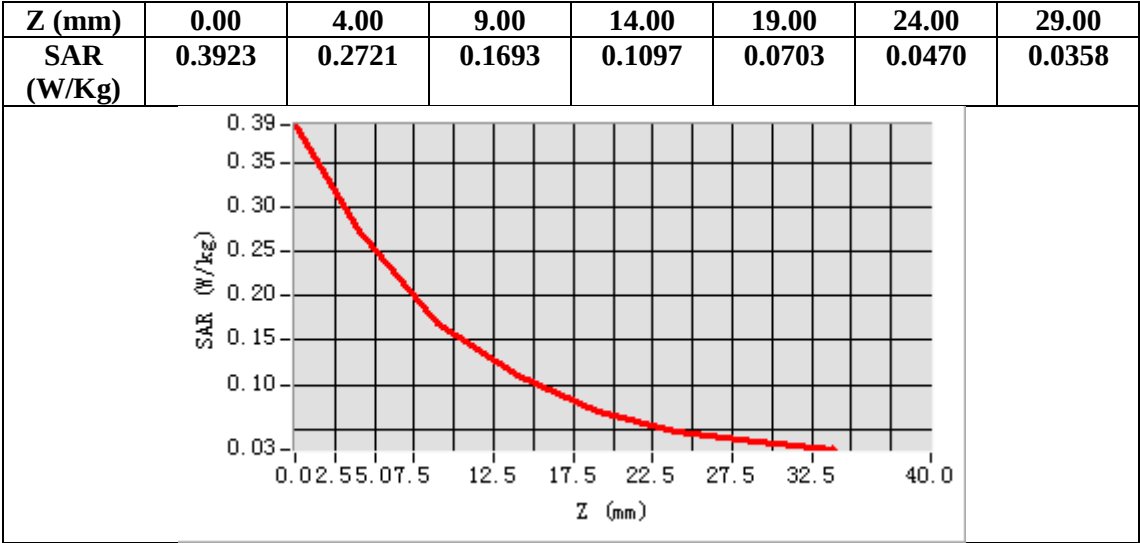

Test Laboratory: AGC Lab
PCS 1900 Mid-Touch-Right <SIM 1>
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 19, 2024


Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=2.06;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.21$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/PCS1900 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/PCS1900 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

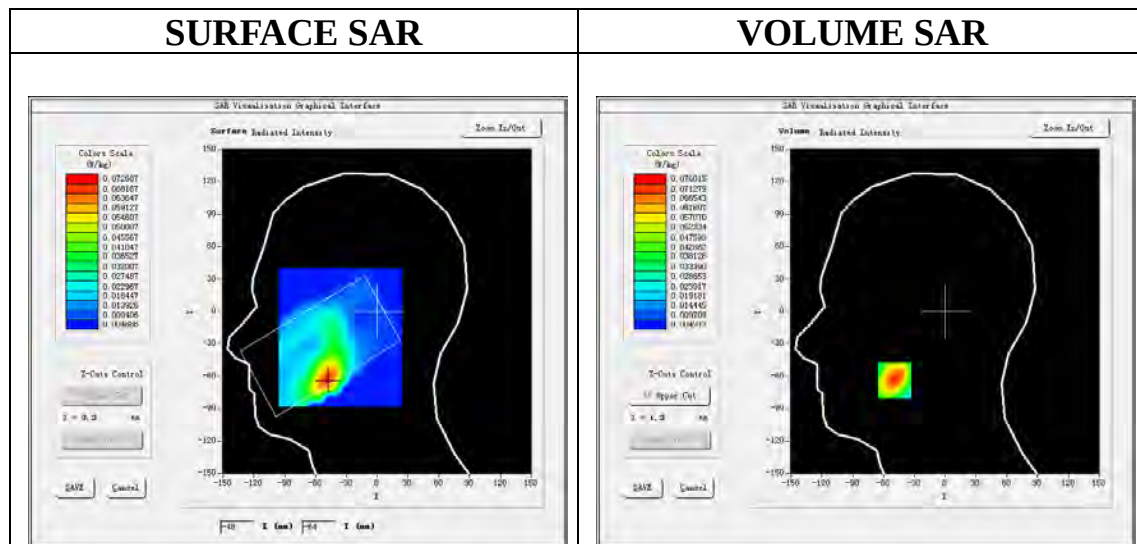

Maximum location: X=-49.00, Y=-64.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.044488
SAR 1g (W/Kg)	0.073402

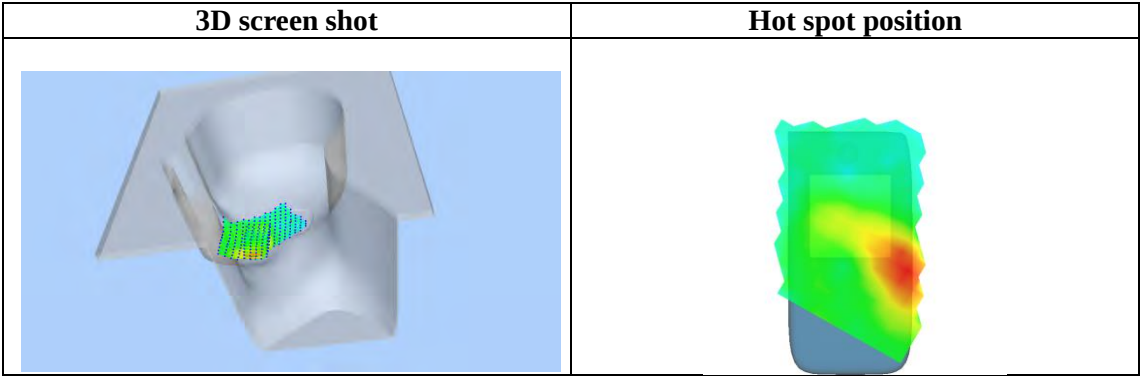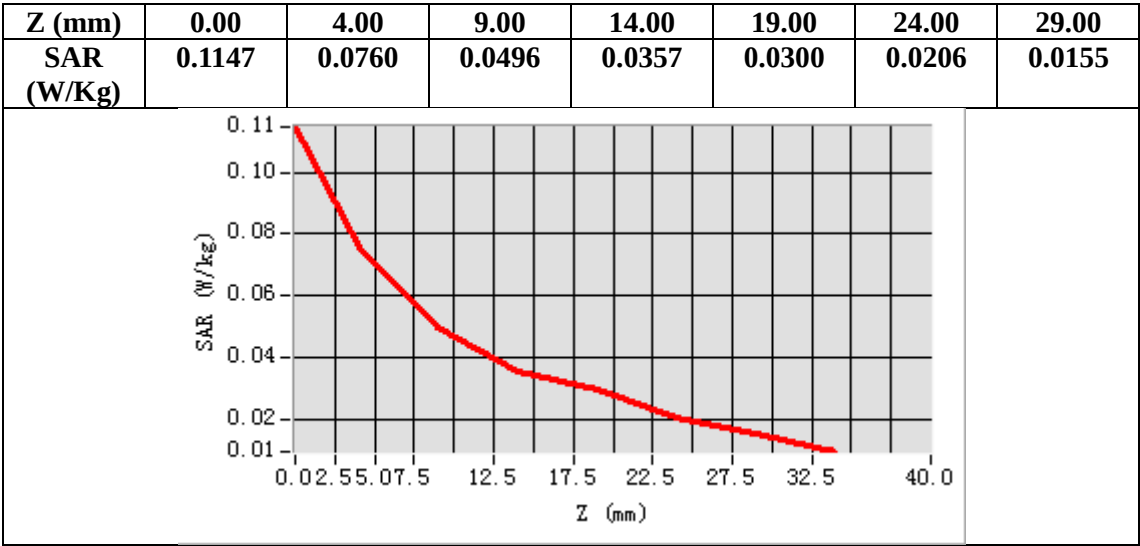

Test Laboratory: AGC Lab
PCS 1900 Mid-Body-Back (MS)<SIM 1>
DUT: 4G SMARTPHONE; **Type: MOX 2**

Date: May 19, 2024


Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3; Conv.F=2.06;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.21$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/PCS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/PCS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

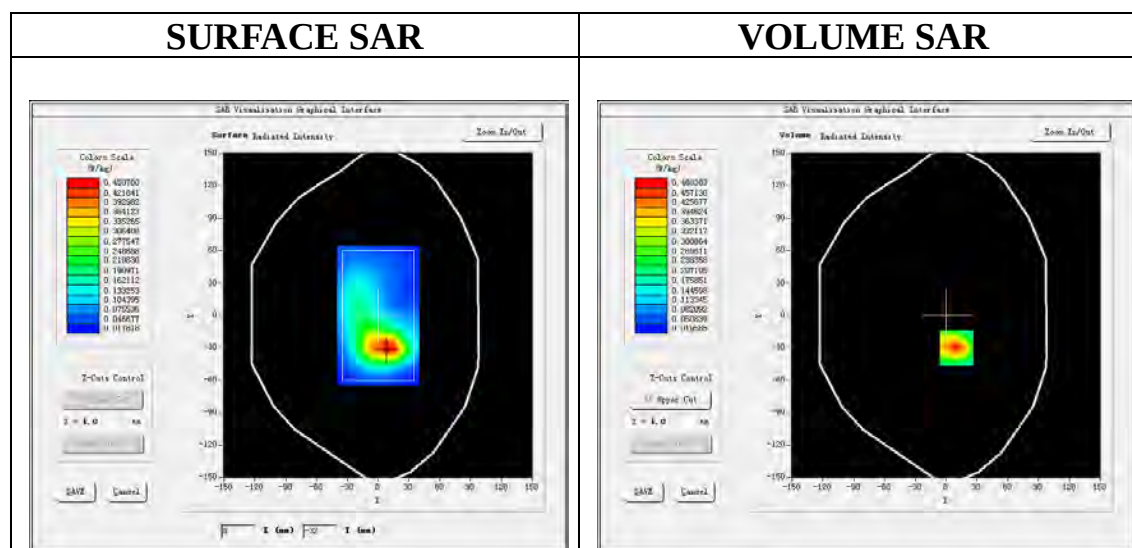

Maximum location: X=10.00, Y=-30.00
SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.254238
SAR 1g (W/Kg)	0.462753

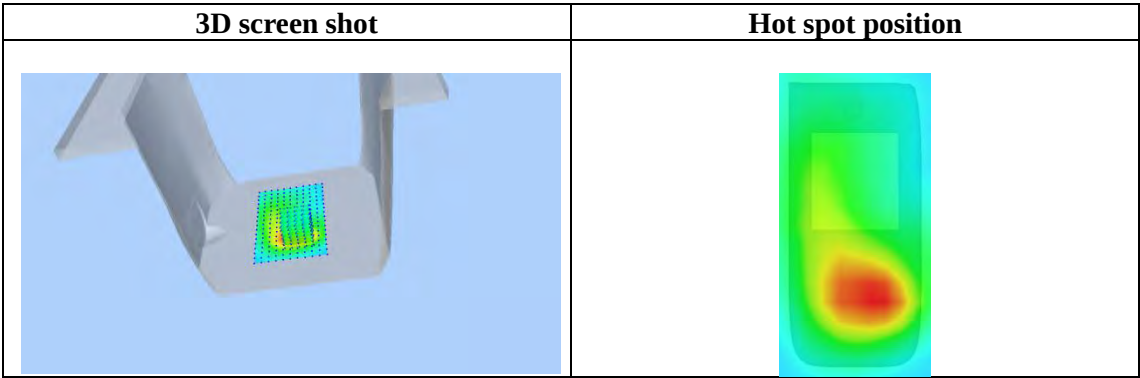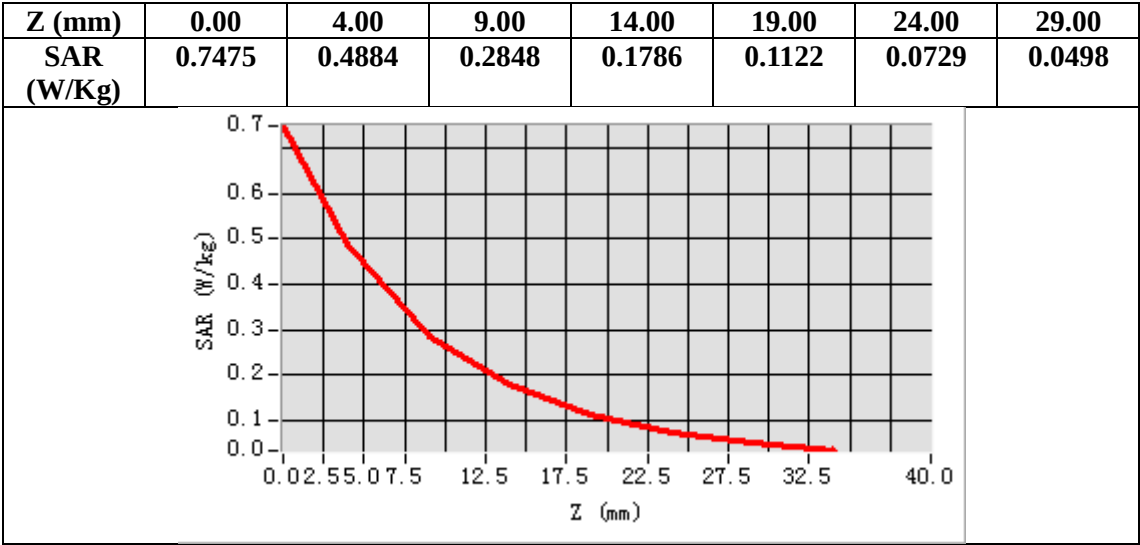

Test Laboratory: AGC Lab
GPRS 1900 Mid-Body-Back (3up)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 19, 2024


Communication System: GPRS-3Slot; Communication System Band: PCS 1900; Duty Cycle: 1:4.2; Conv.F=2.06;
Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.21$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GPRS1900 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS1900 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	PCS 1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

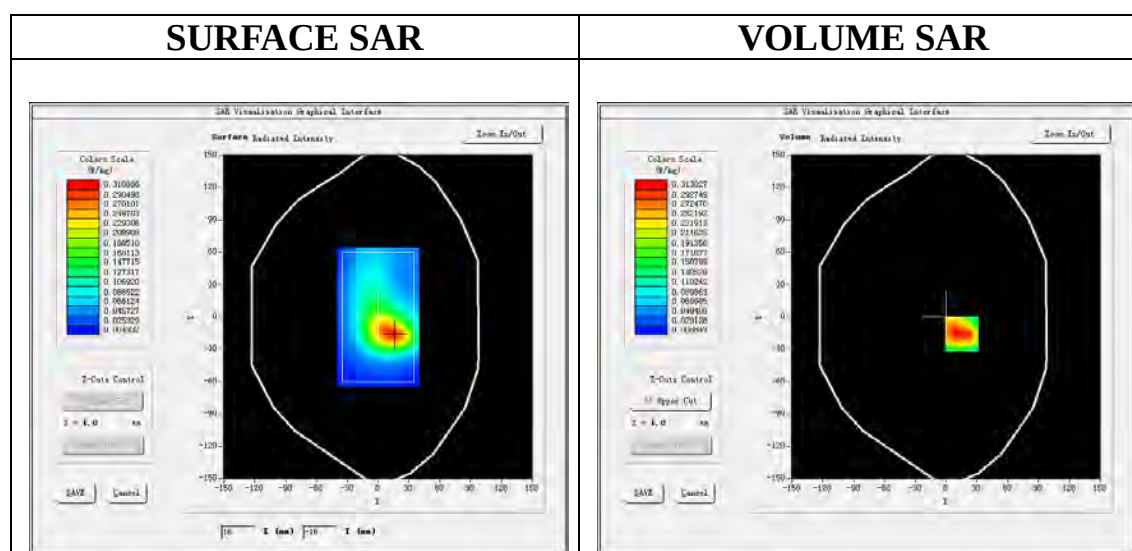

Maximum location: X=15.00, Y=-16.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.175071
SAR 1g (W/Kg)	0.300188

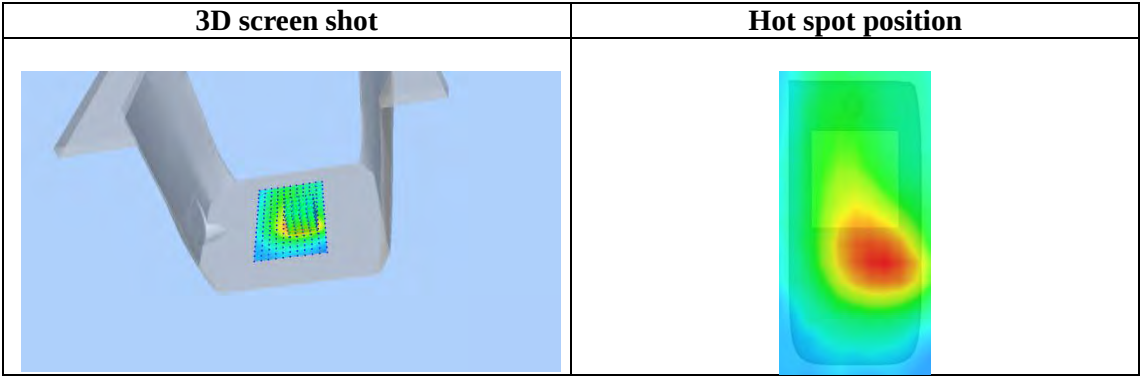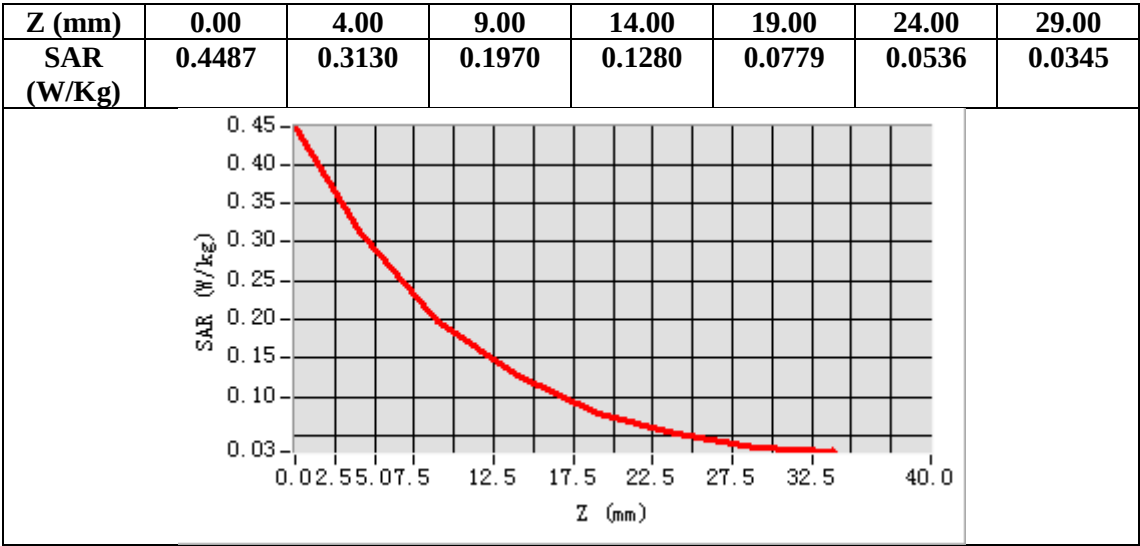

Test Laboratory: AGC Lab
LTE Band 2 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 25, 2024


Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.06;
Frequency:1880MHz; Medium parameters used: $f=1900$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.35$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 2 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

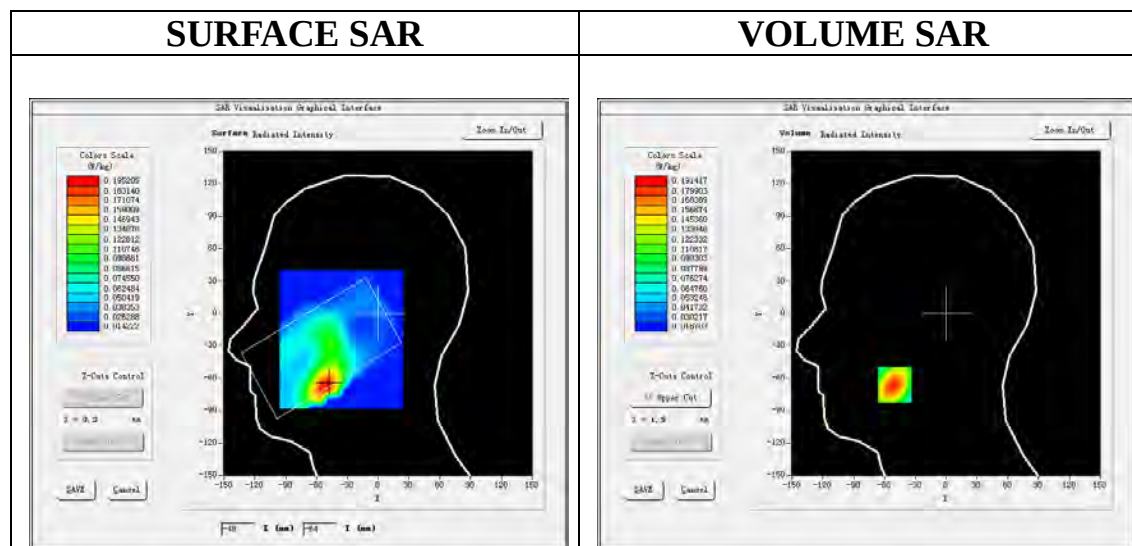

Maximum location: X=-50.00, Y=-66.00

SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.115204
SAR 1g (W/Kg)	0.187363

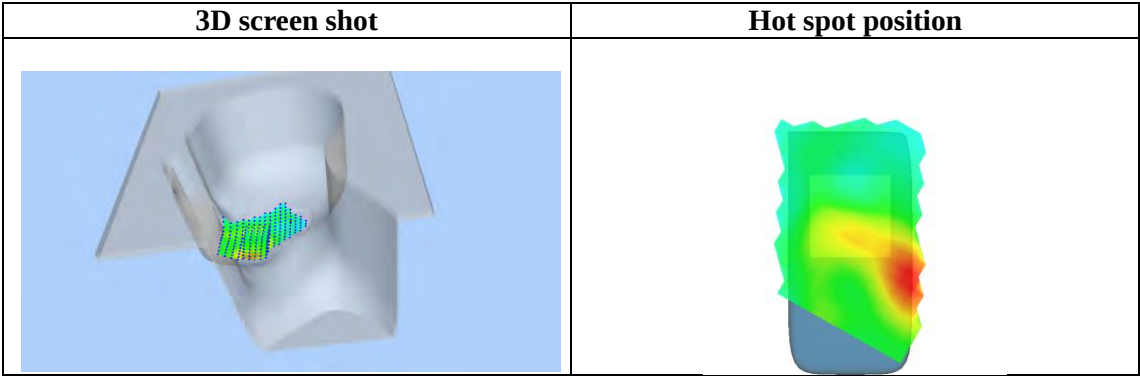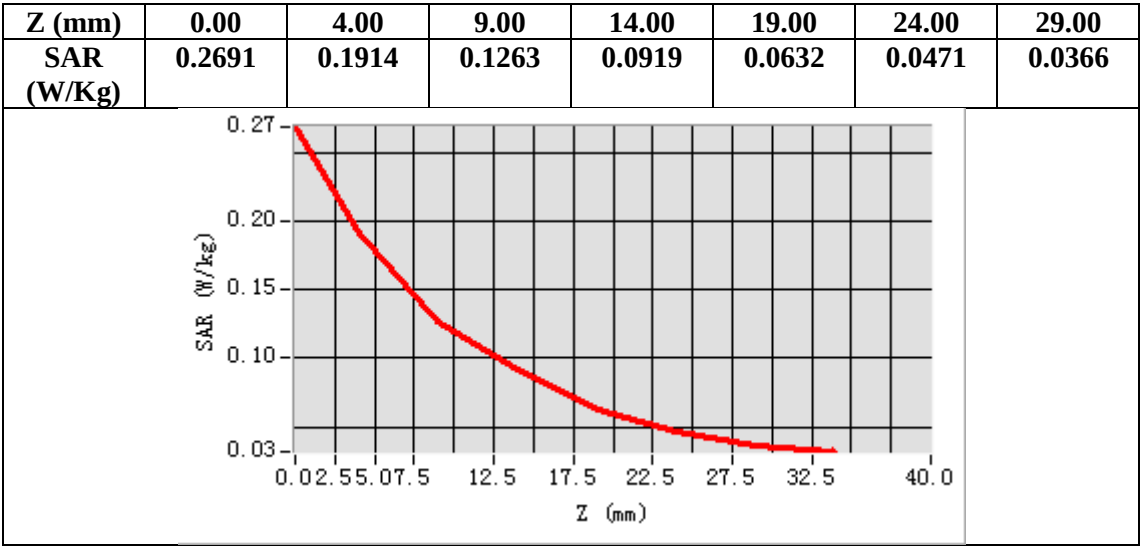

Test Laboratory: AGC Lab
LTE Band 2 Mid-Body- Botomm (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 25, 2024


Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.06;
Frequency:1880MHz; Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.35$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 22.1, Liquid temperature ($^{\circ}\text{C}$): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 2 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 2 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Botomm
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

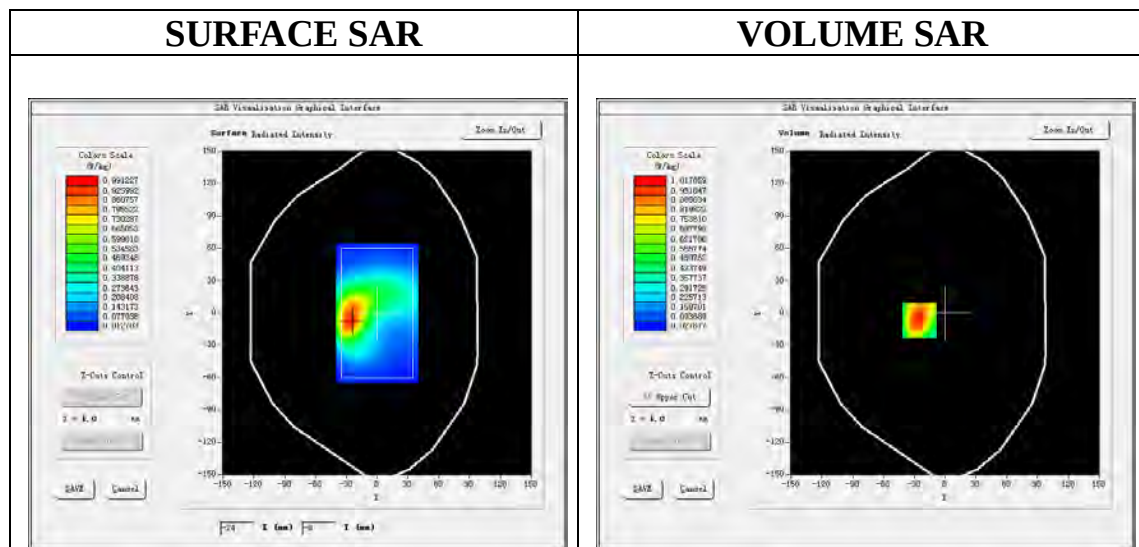

Maximum location: X=-25.00, Y=-7.00

SAR Peak: 1.56 W/kg

SAR 10g (W/Kg)	0.551957
SAR 1g (W/Kg)	0.999079

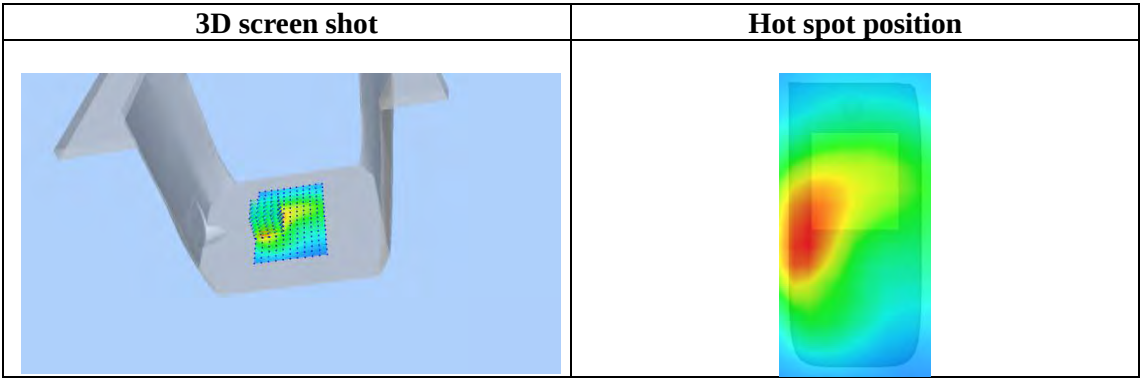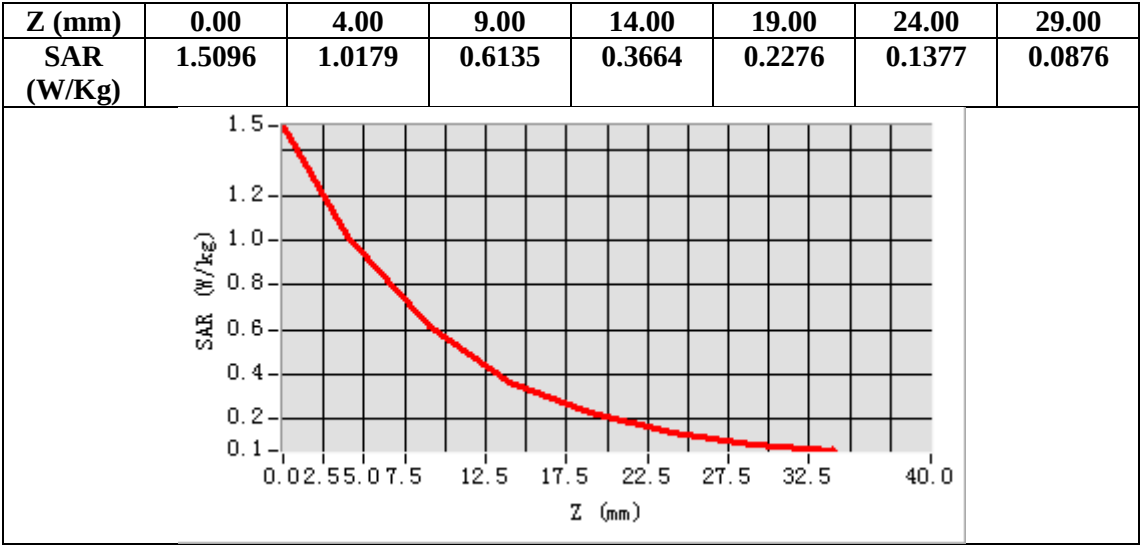

Test Laboratory: AGC Lab
LTE Band 4 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOX 2**

Date: May 18, 2024


Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=1.99;
Frequency:1732.5 MHz; Medium parameters used: $f=1750$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r=39.39$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.0

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 4 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 4 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

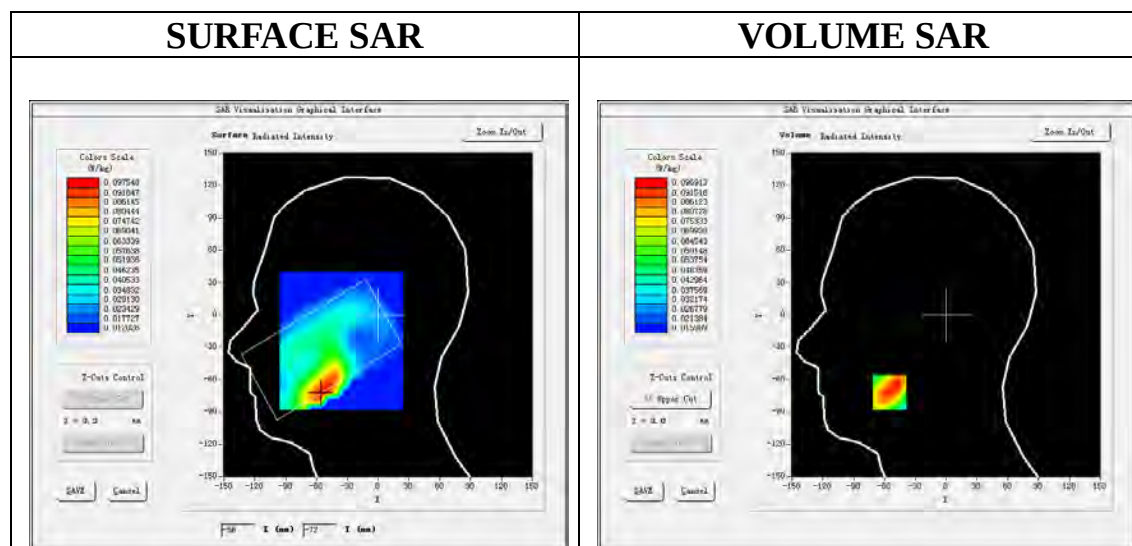

Maximum location: X=-55.00, Y=-72.00
SAR Peak: 0.13 W/kg

SAR 10g (W/Kg)	0.062551
SAR 1g (W/Kg)	0.093277

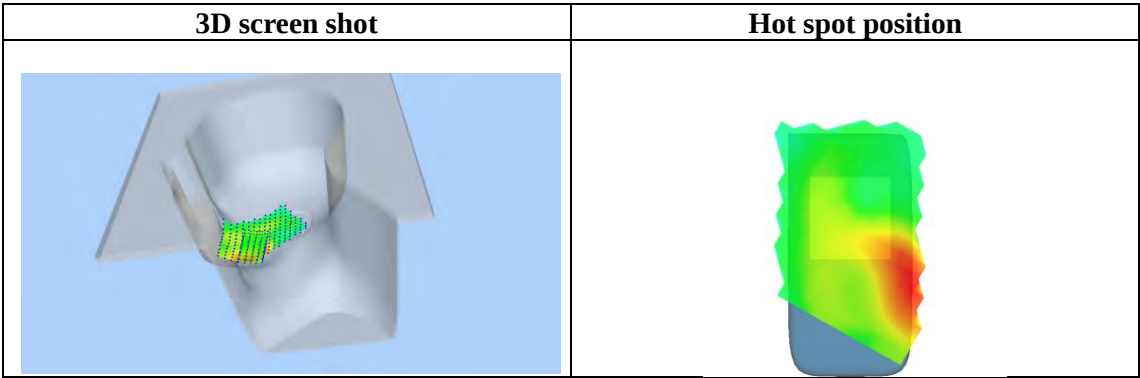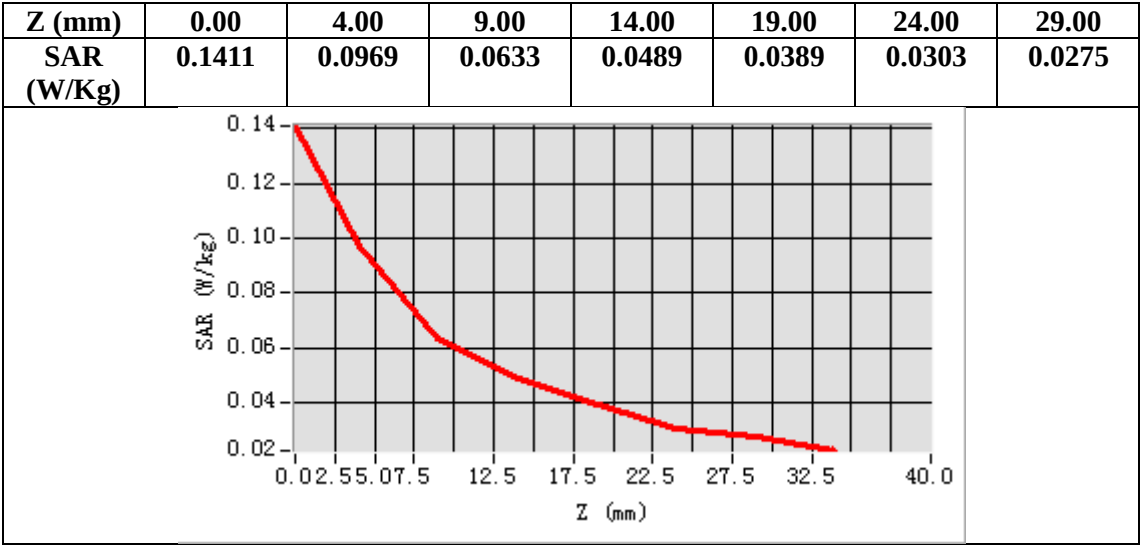

Test Laboratory: AGC Lab
LTE Band 4 Mid-Body-Back (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 18, 2024


Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=1.99;
Frequency:1732.5 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 39.39$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.0

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 4 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 4 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

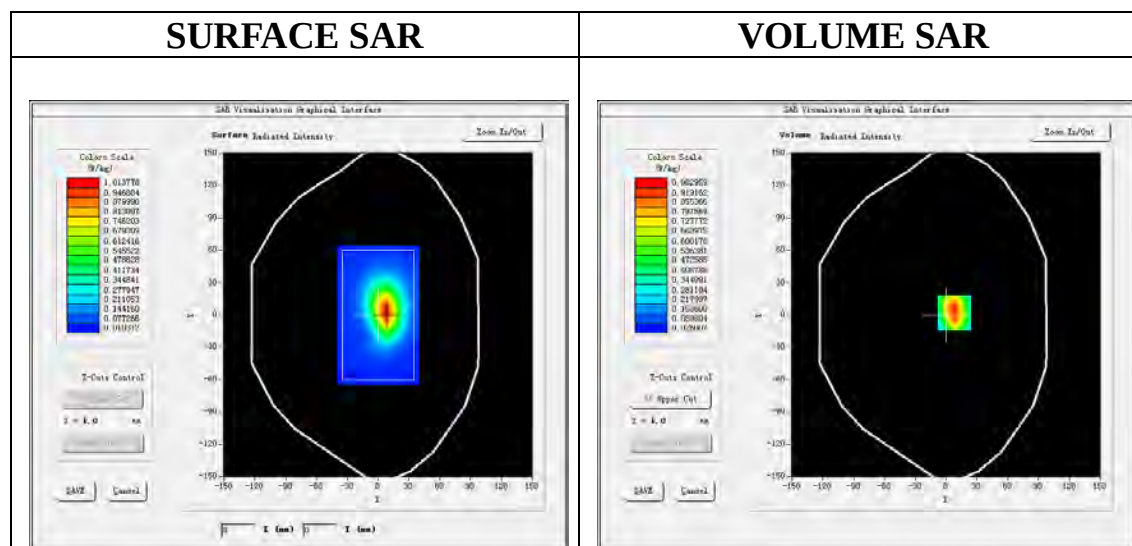

Maximum location: X=8.00, Y=2.00
SAR Peak: 1.40 W/kg

SAR 10g (W/Kg)	0.516405
SAR 1g (W/Kg)	0.916656

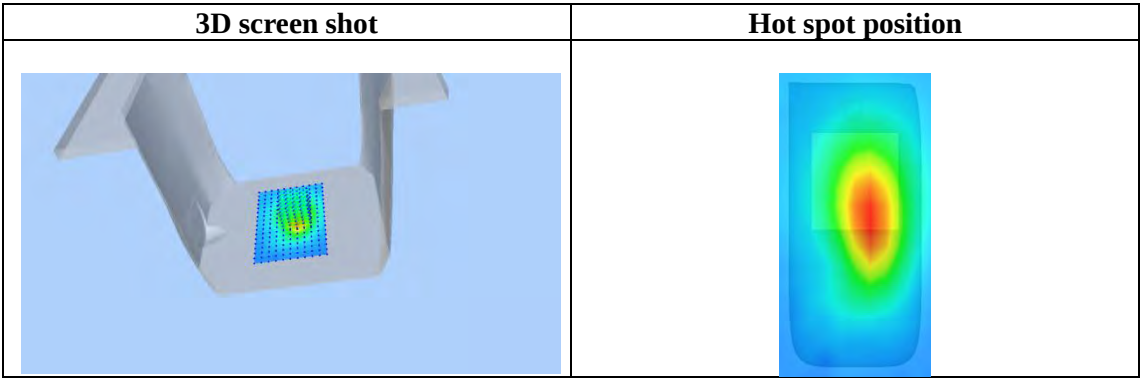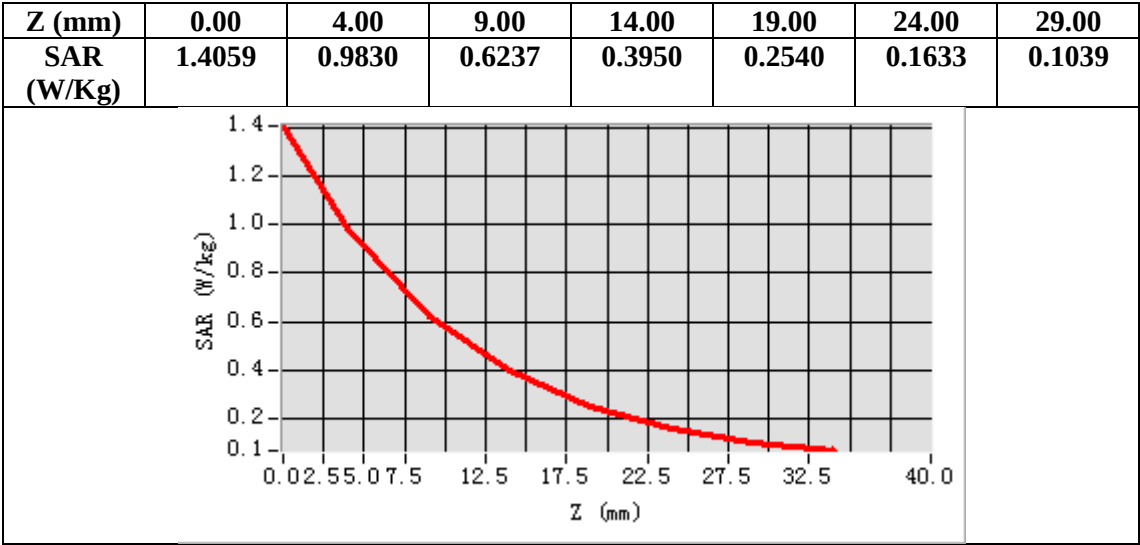

Test Laboratory: AGC Lab
LTE Band 5 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOX 2**

Date: May 12, 2024

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=1.89
Frequency: 836.5 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.21$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.5

SATIMO Configuration:


Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 5 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 5 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

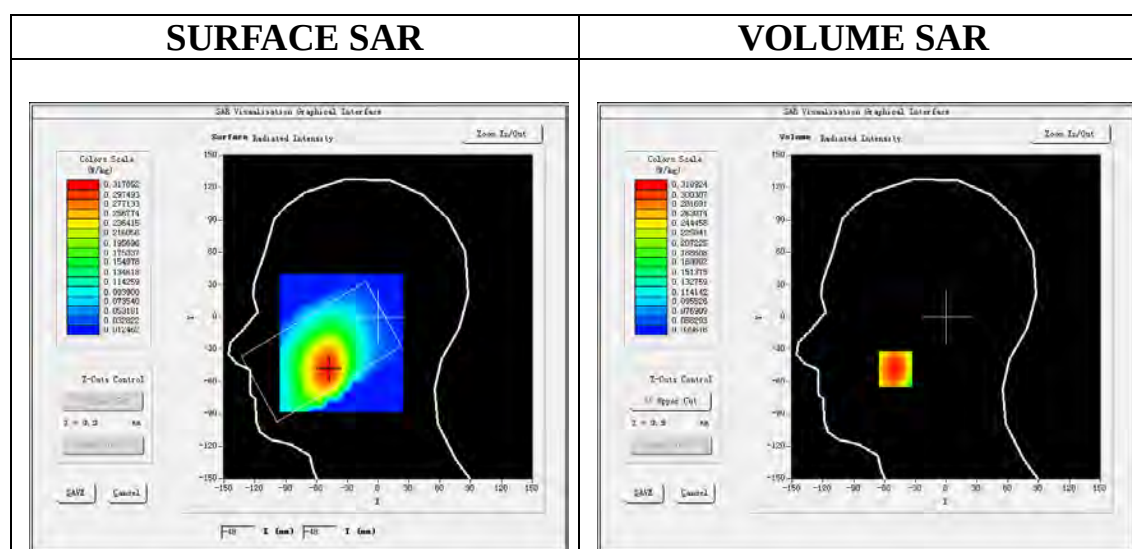

Maximum location: X=-49.00, Y=-48.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.231533
SAR 1g (W/Kg)	0.312272

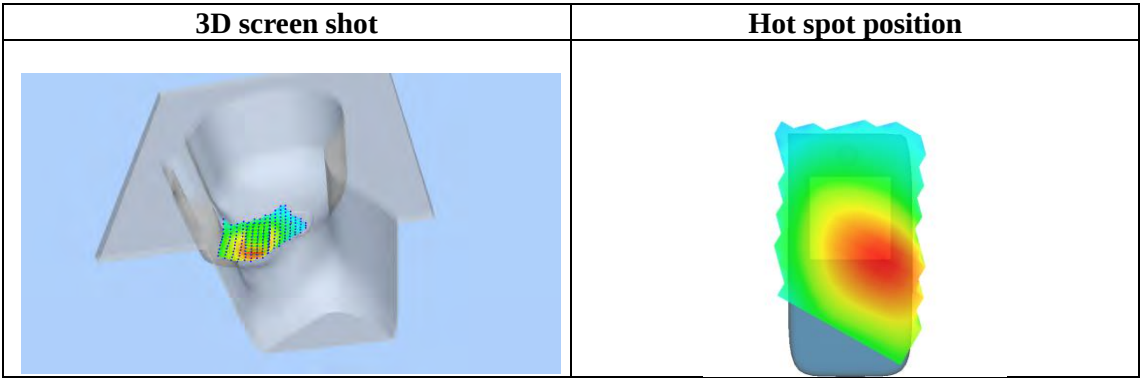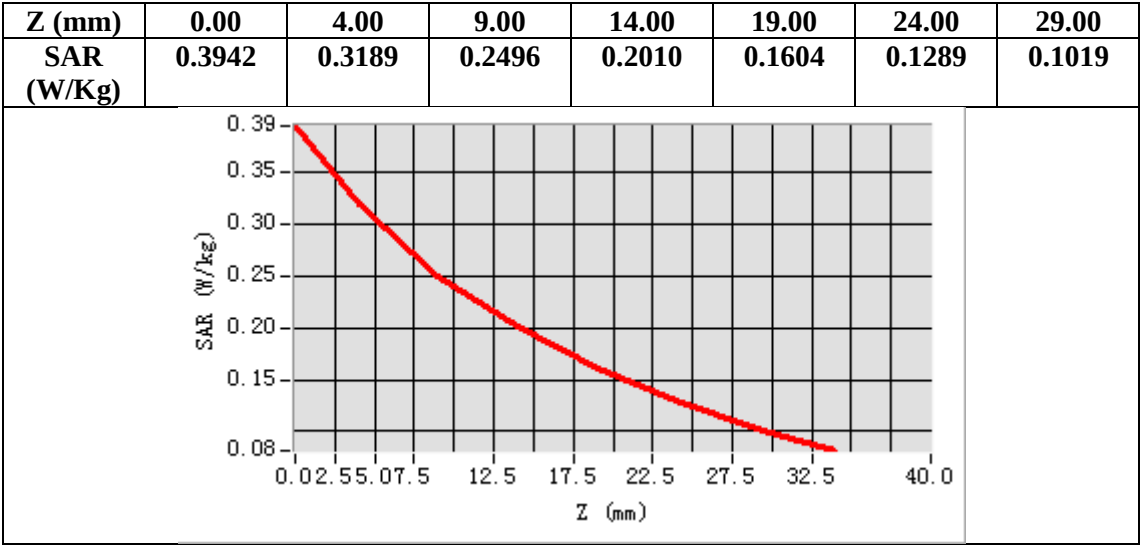

Test Laboratory: AGC Lab
LTE Band 5 Mid-Body-Back (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 12, 2024


Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=1.89
Frequency:836.5 MHz; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 40.21$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.6, Liquid temperature ($^{\circ}\text{C}$): 21.5

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 5 Mid-Body Bottom /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 5 Mid-Body Bottom /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Bottom
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

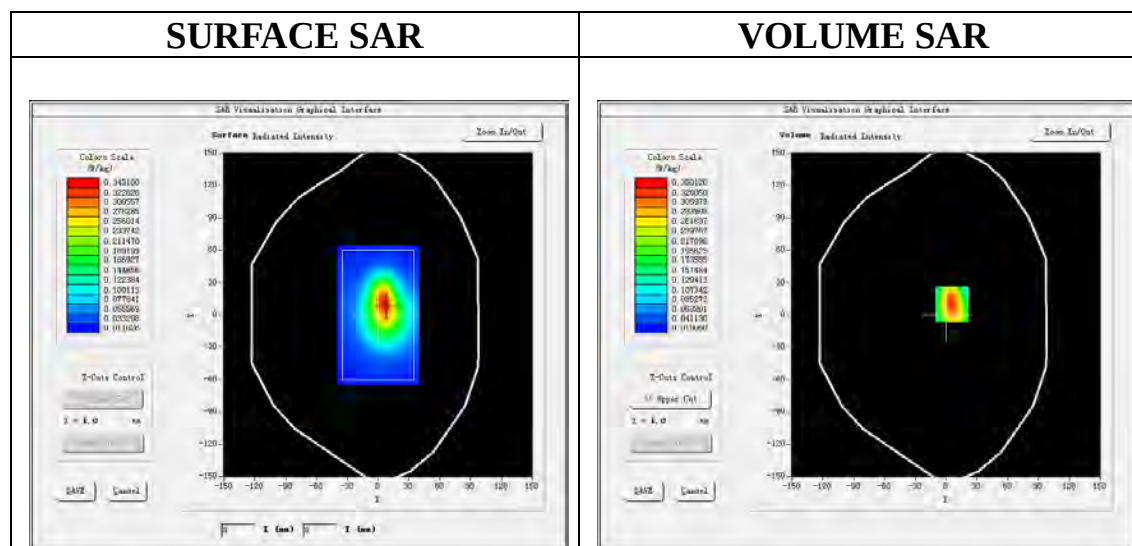

Maximum location: X=6.00, Y=10.00
SAR Peak: 0.55 W/kg

SAR 10g (W/Kg)	0.185608
SAR 1g (W/Kg)	0.331610

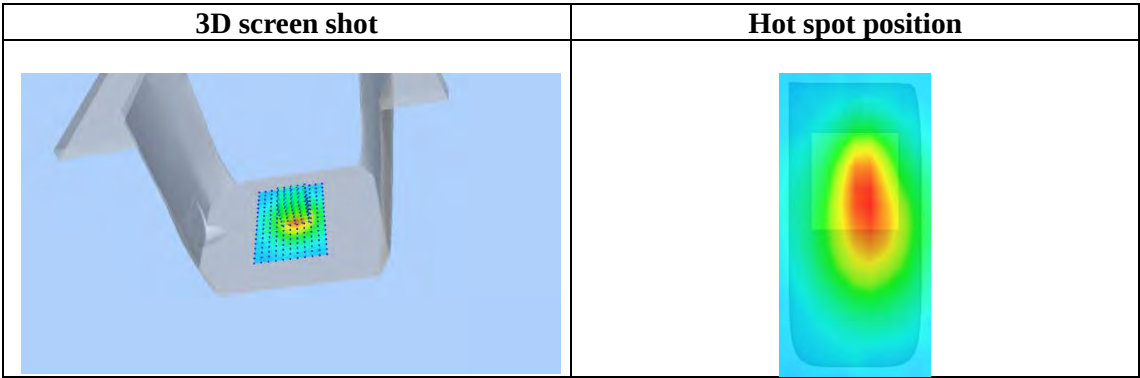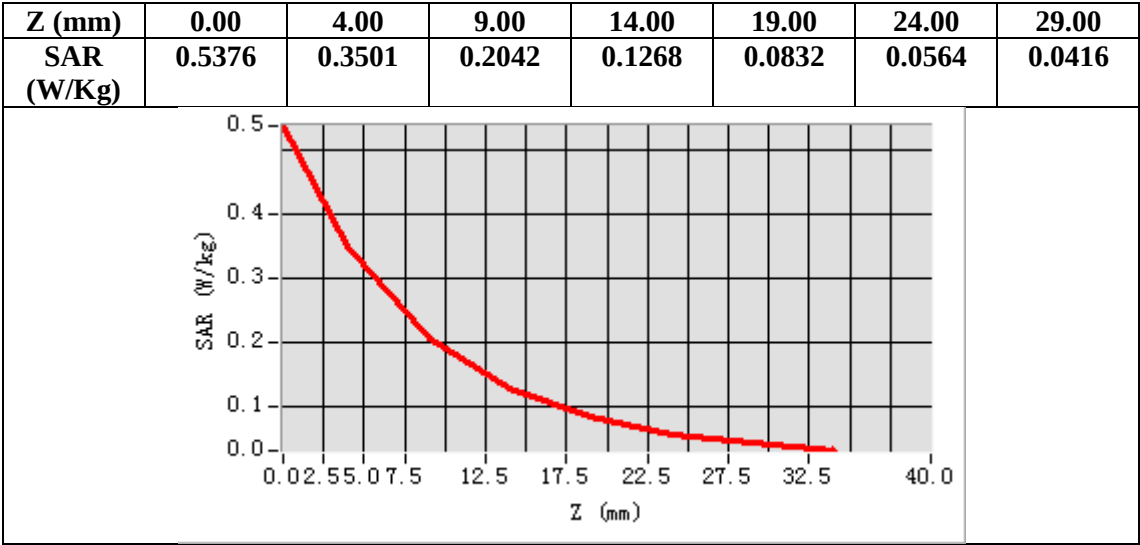

Test Laboratory: AGC Lab
LTE Band 12 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOX 2**

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.04
Frequency: 707.5 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 12 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 12 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

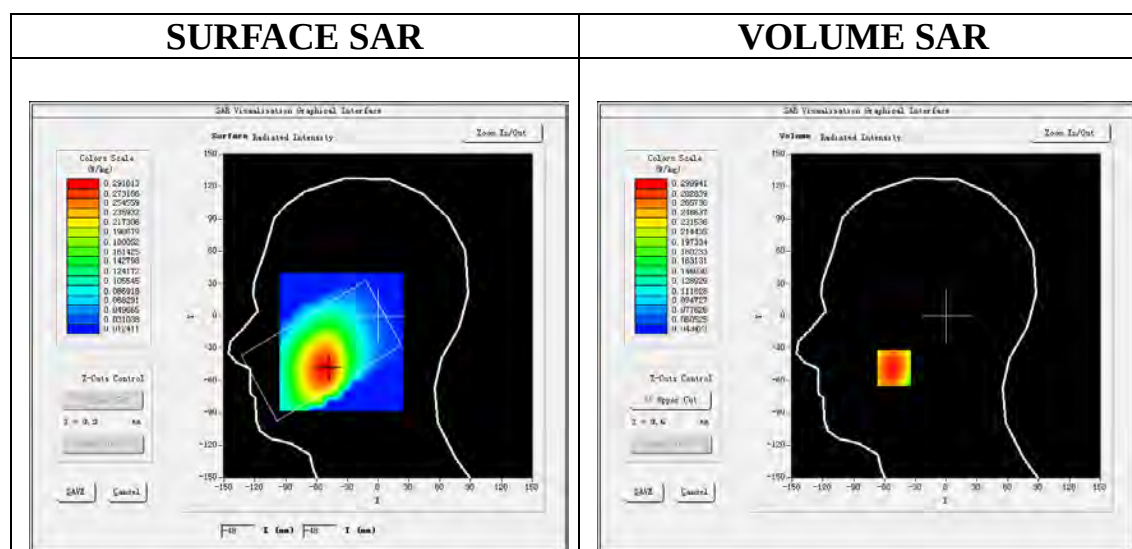

Maximum location: X=-51.00, Y=-48.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.221256
SAR 1g (W/Kg)	0.291872

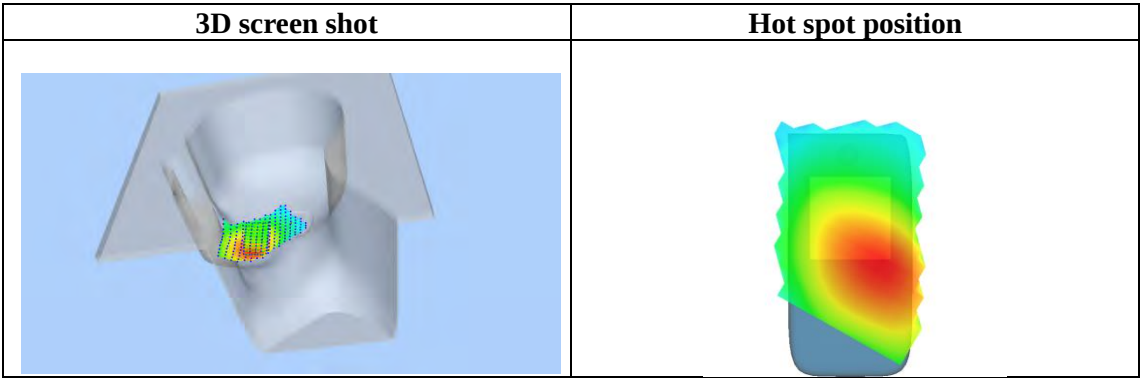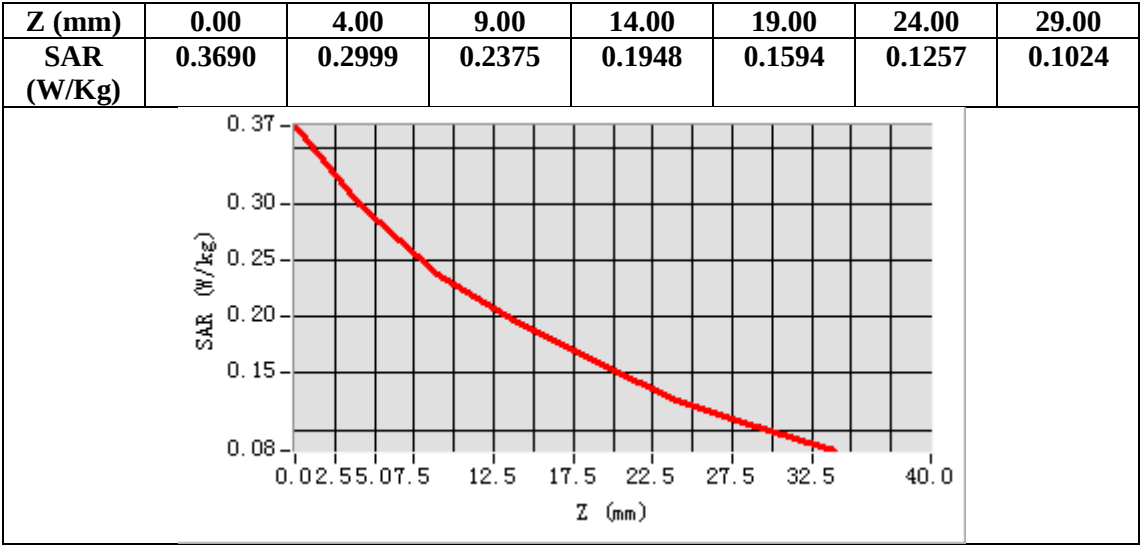

Test Laboratory: AGC Lab
LTE Band 12 Mid-Body-Back (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.04;
Frequency: 707.5 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 38.16$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 12 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 12 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

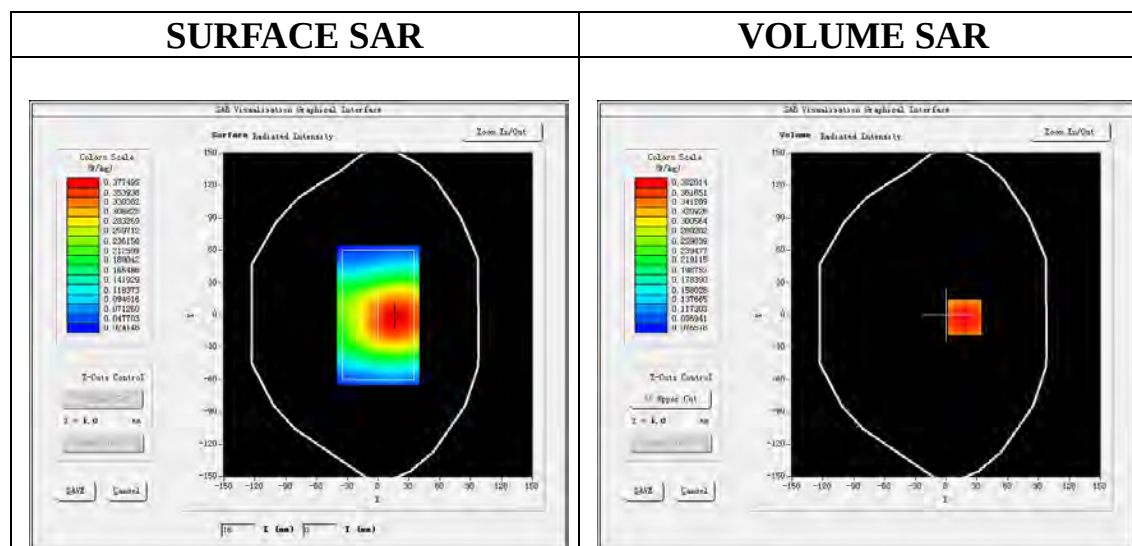

Maximum location: X=18.00, Y=-2.00
SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.283091
SAR 1g (W/Kg)	0.372162

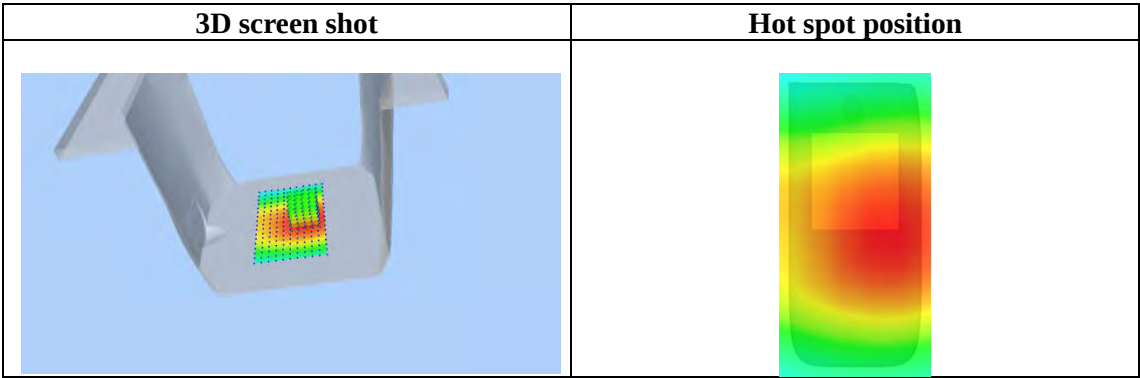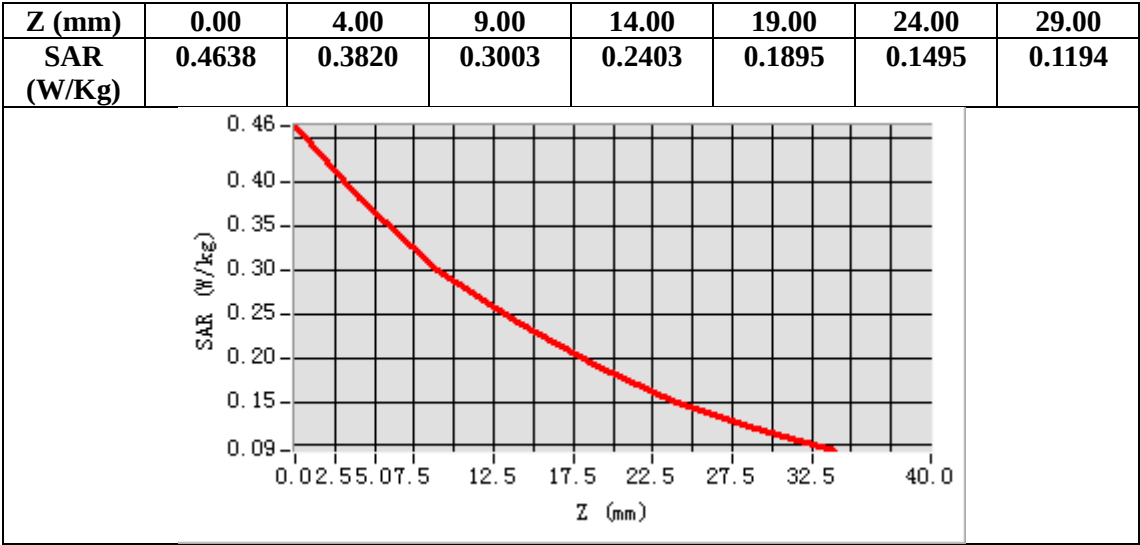

Test Laboratory: AGC Lab
LTE Band 13 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.04
Frequency: 782 MHz; Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.932 \text{ mho/m}$; $\epsilon_r = 39.32$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 22.3, Liquid temperature ($^{\circ}\text{C}$): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 13 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 13 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

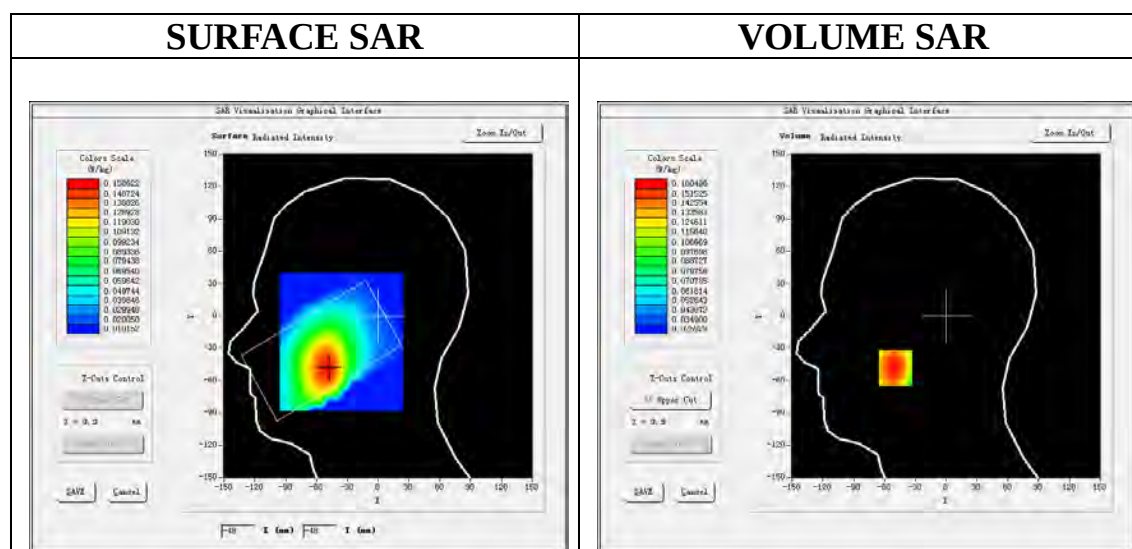

Maximum location: X=-49.00, Y=-48.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.116484
SAR 1g (W/Kg)	0.155726

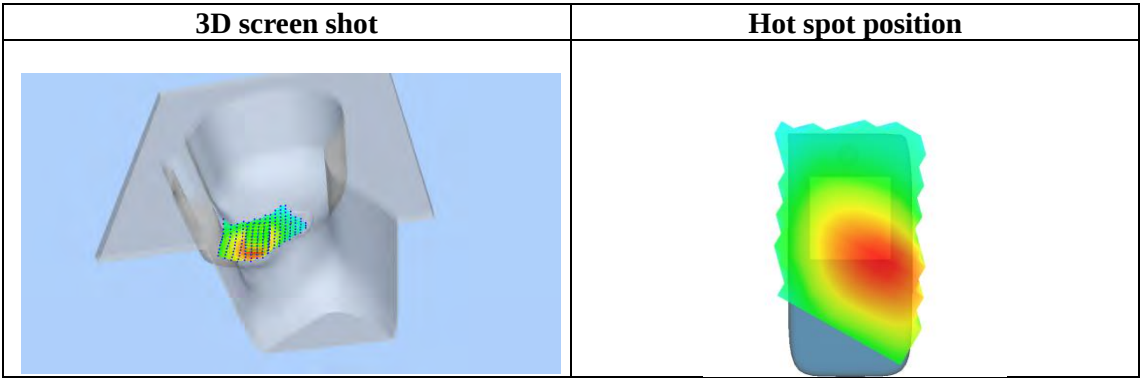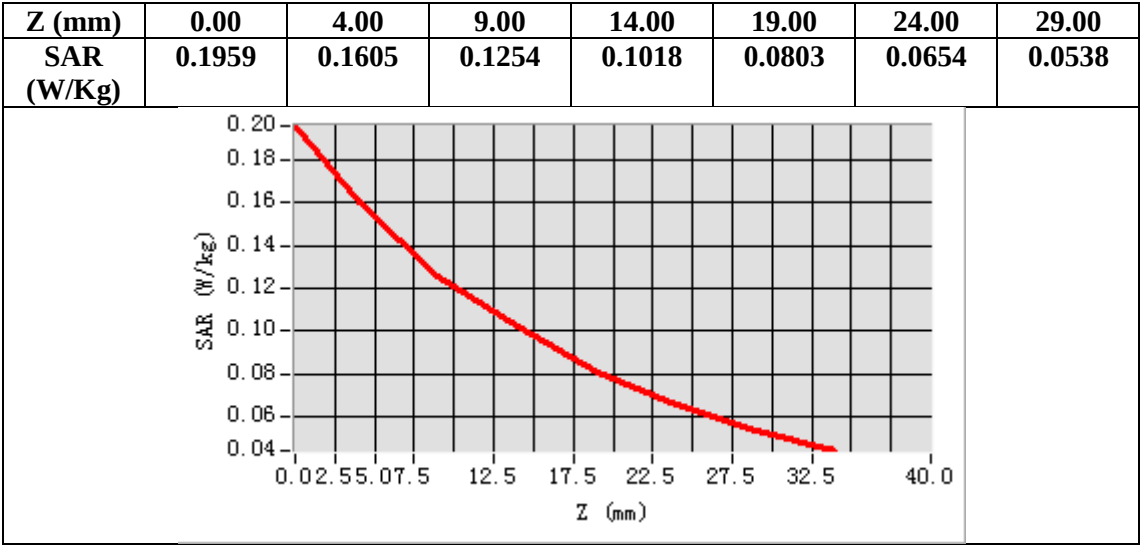

Test Laboratory: AGC Lab
LTE Band 13 Mid-Body-Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.04;
Frequency: 782 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.932$ mho/m; $\epsilon_r = 39.32$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 13 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 13 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Right
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

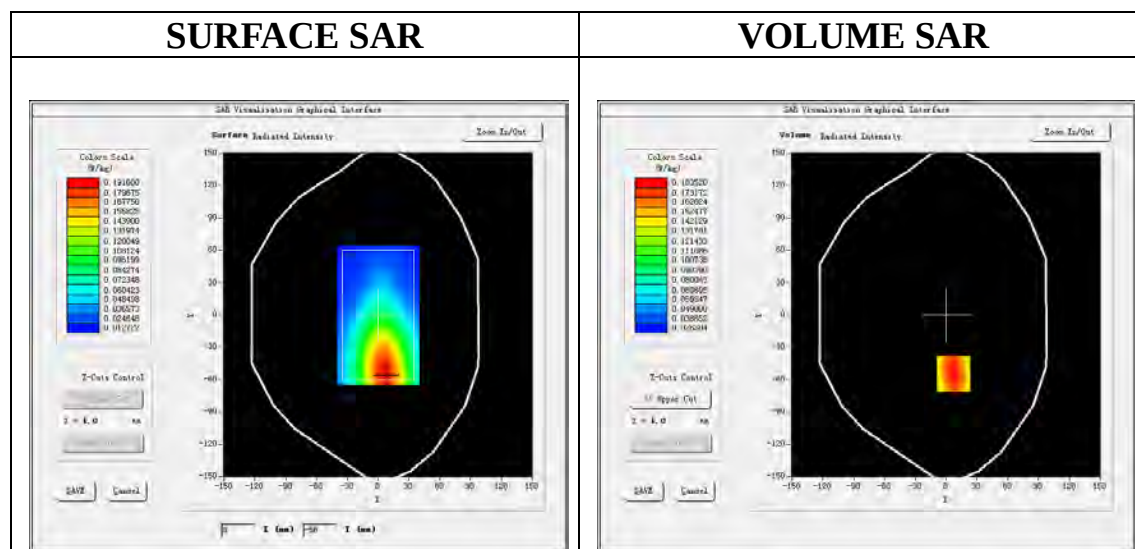

Maximum location: X=7.00, Y=-55.00
SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.123971
SAR 1g (W/Kg)	0.176215

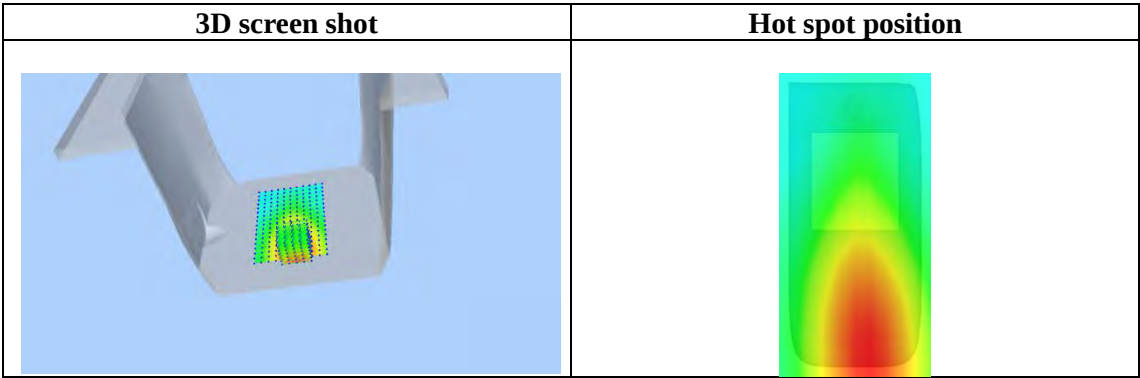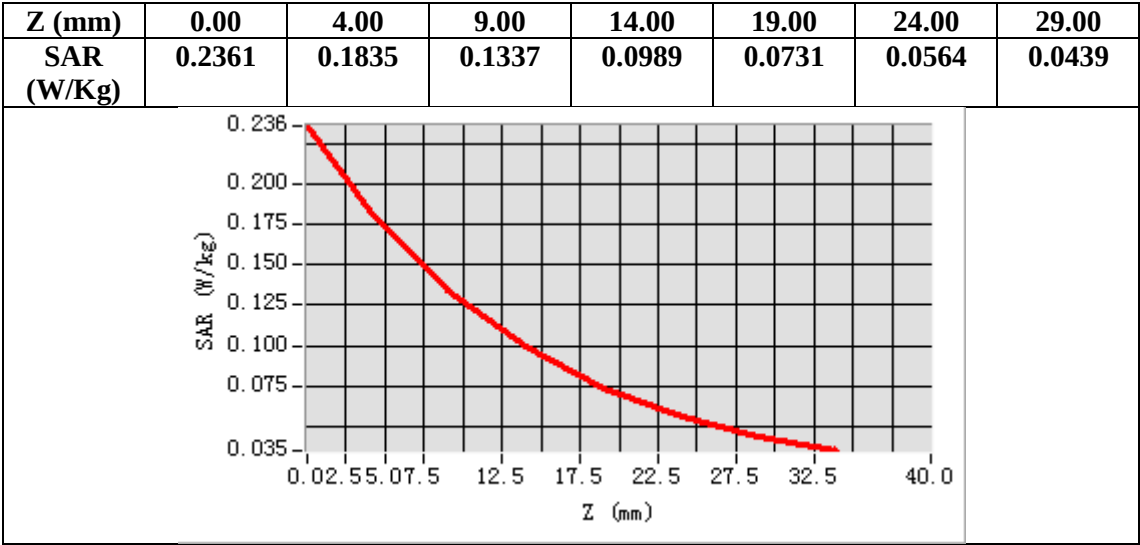

Test Laboratory: AGC Lab
LTE Band 25 Mid-Touch-Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 25, 2024


Communication System: LTE; Communication System Band: LTE Band 25; Duty Cycle:1:1; Conv.F=2.06;
Frequency:1882.5MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.01$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 25 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 25 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 25
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

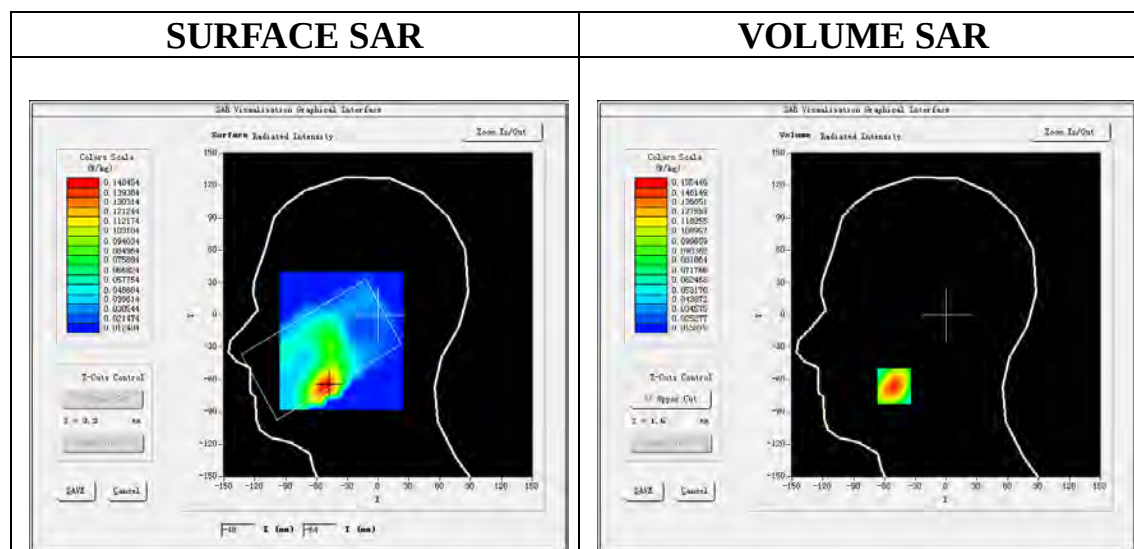

Maximum location: X=-51.00, Y=-66.00
SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.091808
SAR 1g (W/Kg)	0.147287

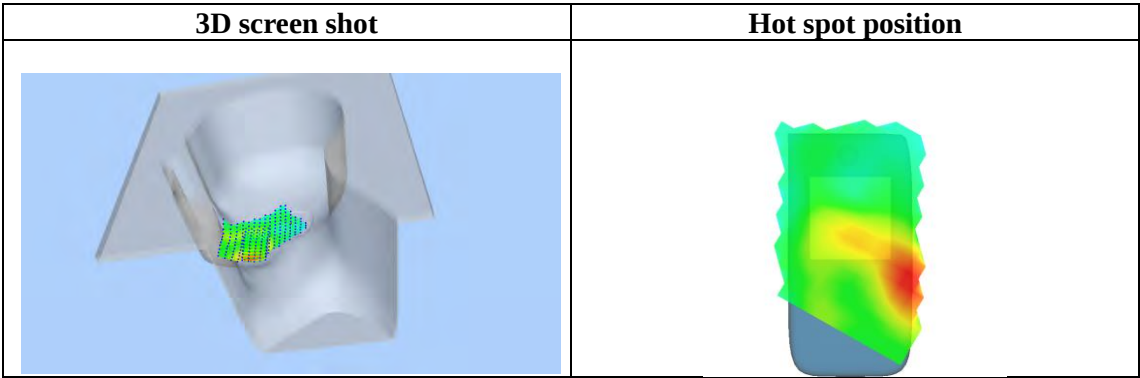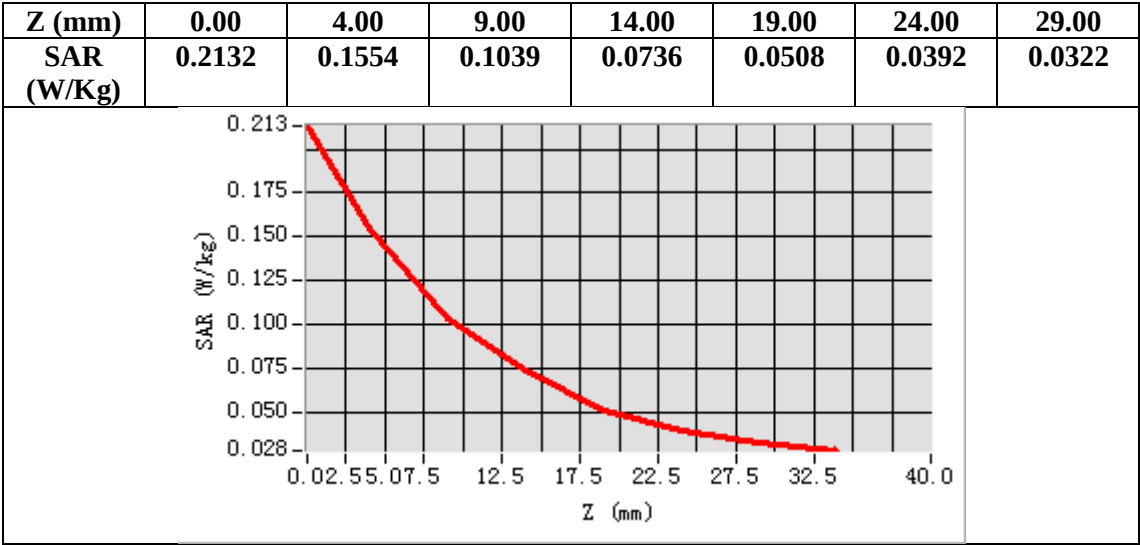

Test Laboratory: AGC Lab
LTE Band 25 Mid-Body- Botomm (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 25, 2024


Communication System: LTE; Communication System Band: LTE Band 25; Duty Cycle:1:1; Conv.F=2.06;
Frequency:1882.5MHz; Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.01$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 22.1, Liquid temperature ($^{\circ}\text{C}$): 21.9

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 25 Mid-Body- Botomm /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 25 Mid-Body- Botomm /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Botomm
Band	LTE Band 25
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

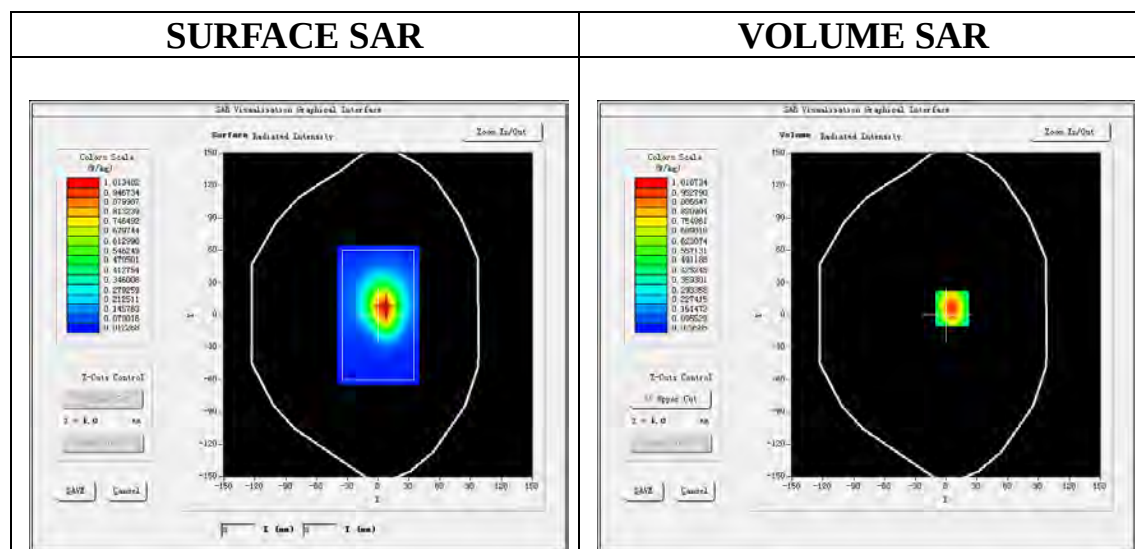

Maximum location: X=6.00, Y=6.00
SAR Peak: 1.50 W/kg

SAR 10g (W/Kg)	0.534368
SAR 1g (W/Kg)	0.955734

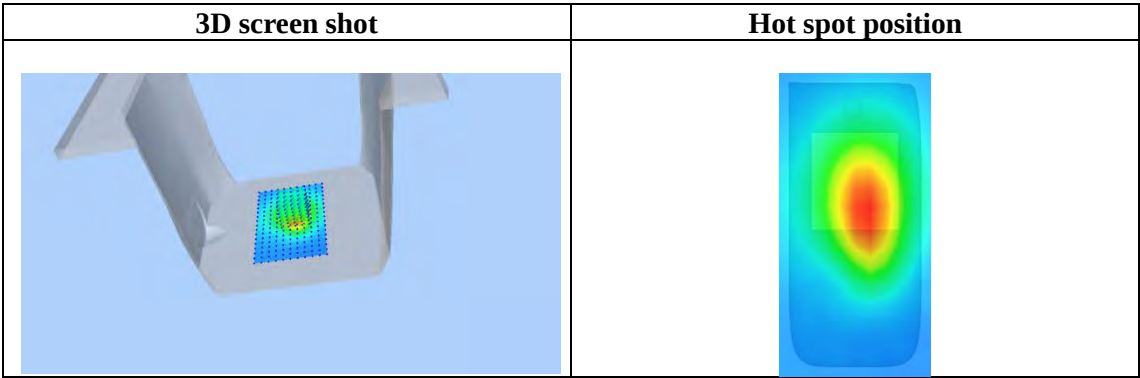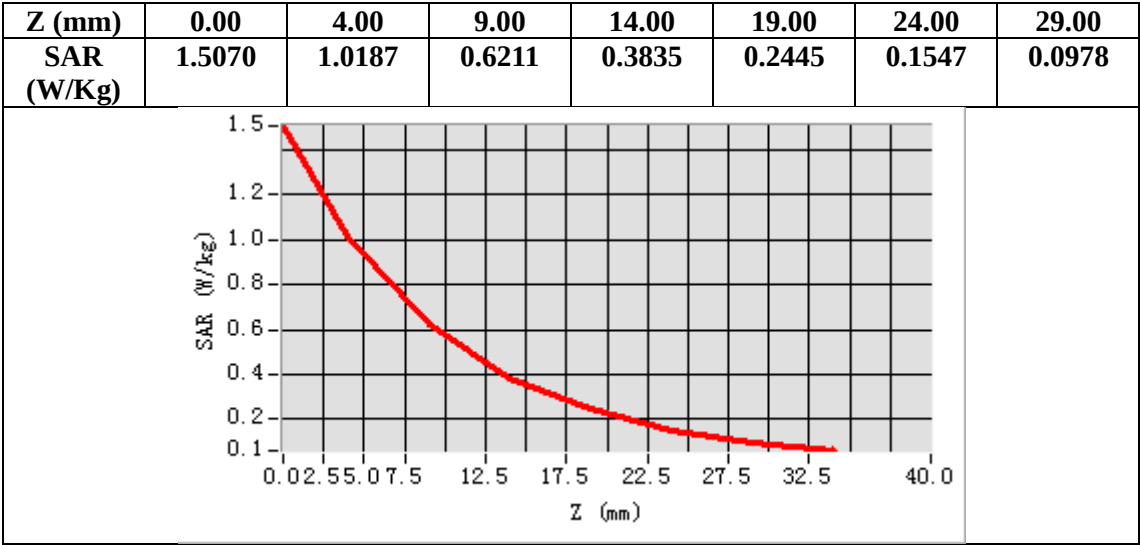

Test Laboratory: AGC Lab
LTE Band 26 Mid-Touch- Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 12, 2024

Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=1.89
Frequency: 831.5 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 38.36$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.5

SATIMO Configuration:


Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 26 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/ LTE Band 26 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 26
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

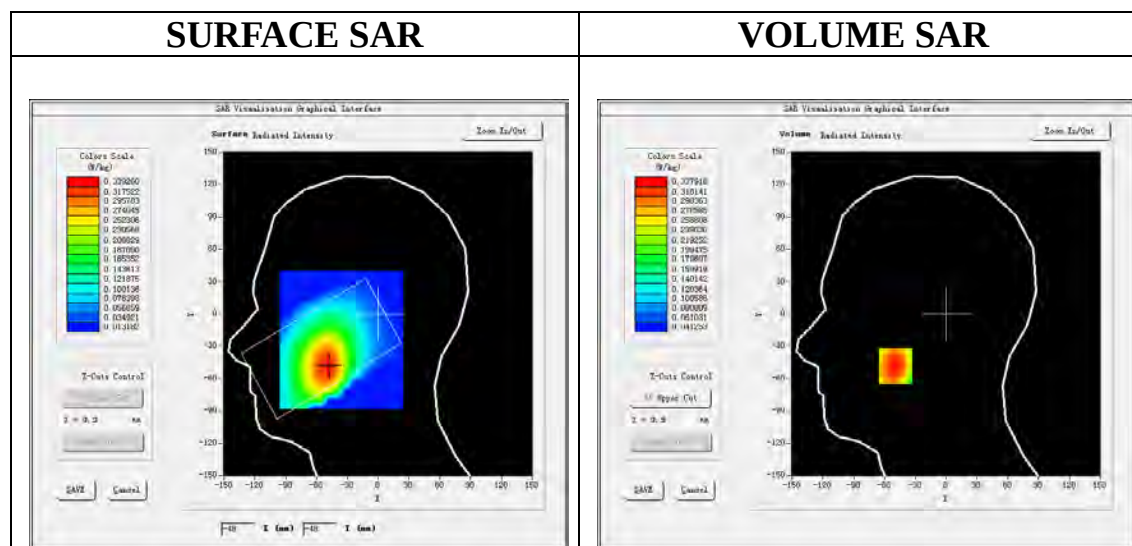

Maximum location: X=-49.00, Y=-48.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.243327
SAR 1g (W/Kg)	0.328052

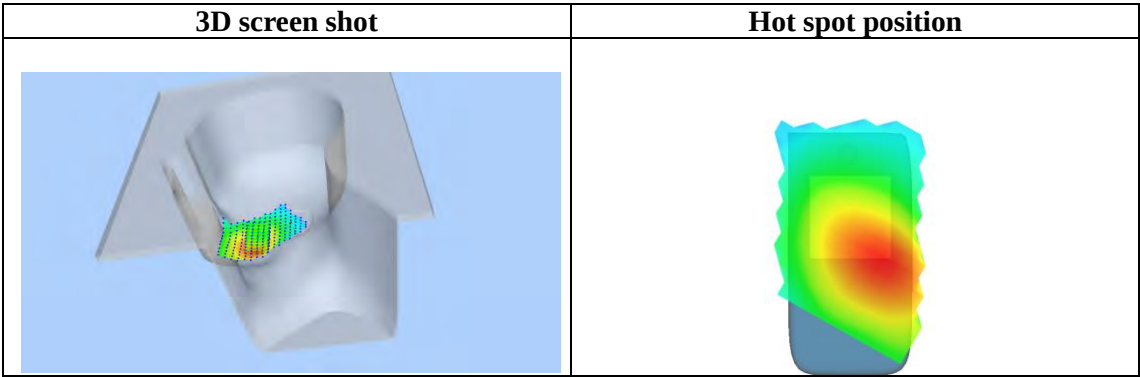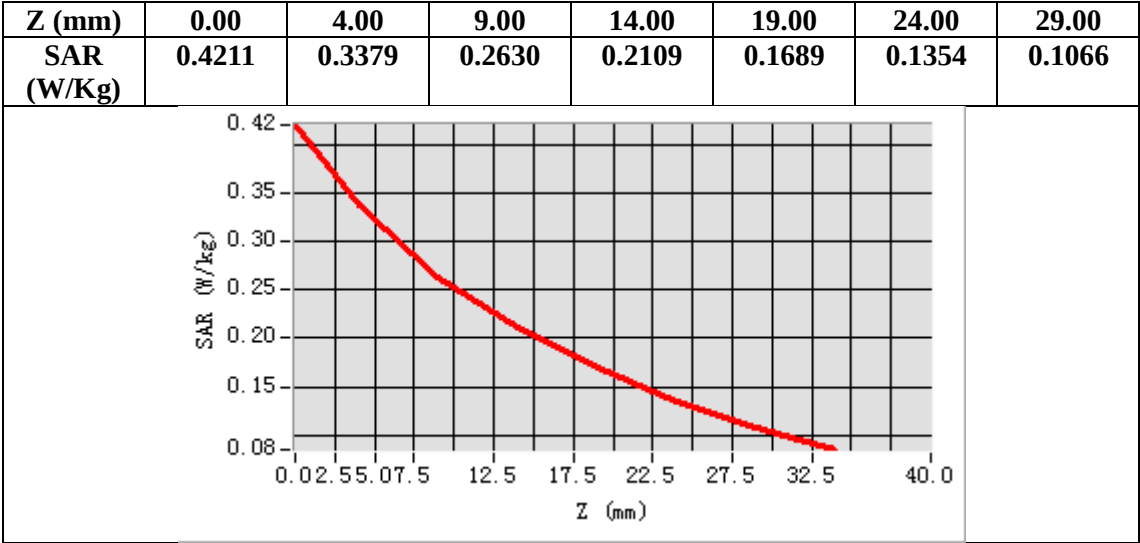

Test Laboratory: AGC Lab
LTE Band 26 Mid-Body-Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOX 2**

Date: May 12, 2024


Communication System: LTE; Communication System Band: LTE Band 26; Duty Cycle:1:1; Conv.F=1.89
Frequency:831.5 MHz; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 38.36$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.6, Liquid temperature ($^{\circ}\text{C}$): 21.5

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 26 Mid-Body Right /Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$
Configuration/ LTE Band 26 Mid-Body Right /Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Right
Band	LTE Band 26
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

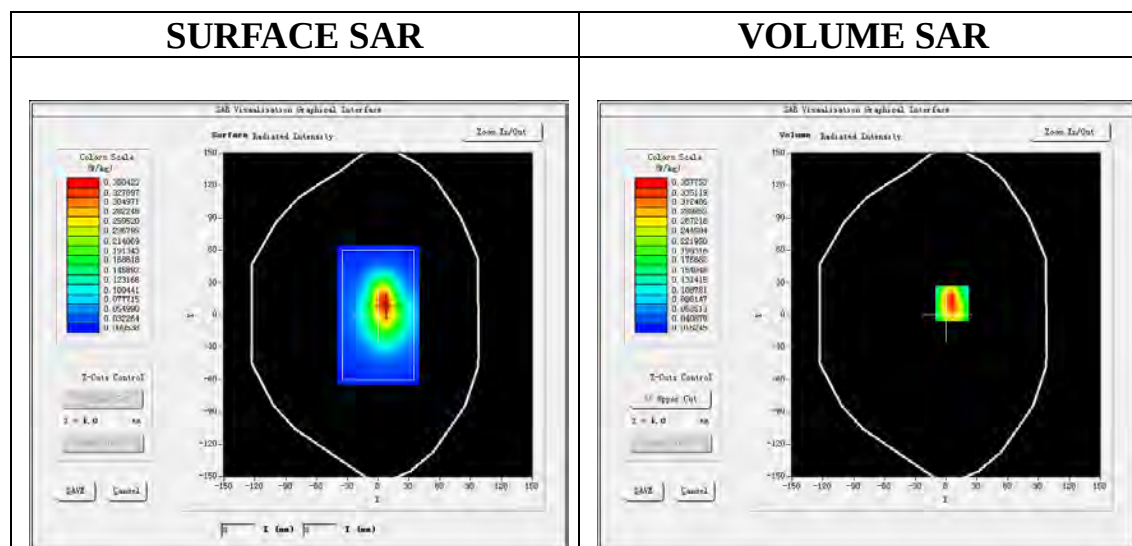

Maximum location: X=6.00, Y=11.00
SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.187160
SAR 1g (W/Kg)	0.314628

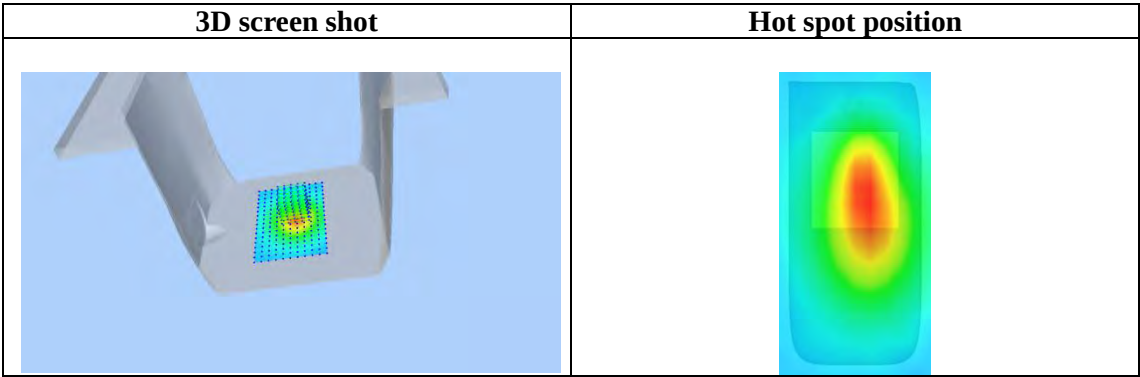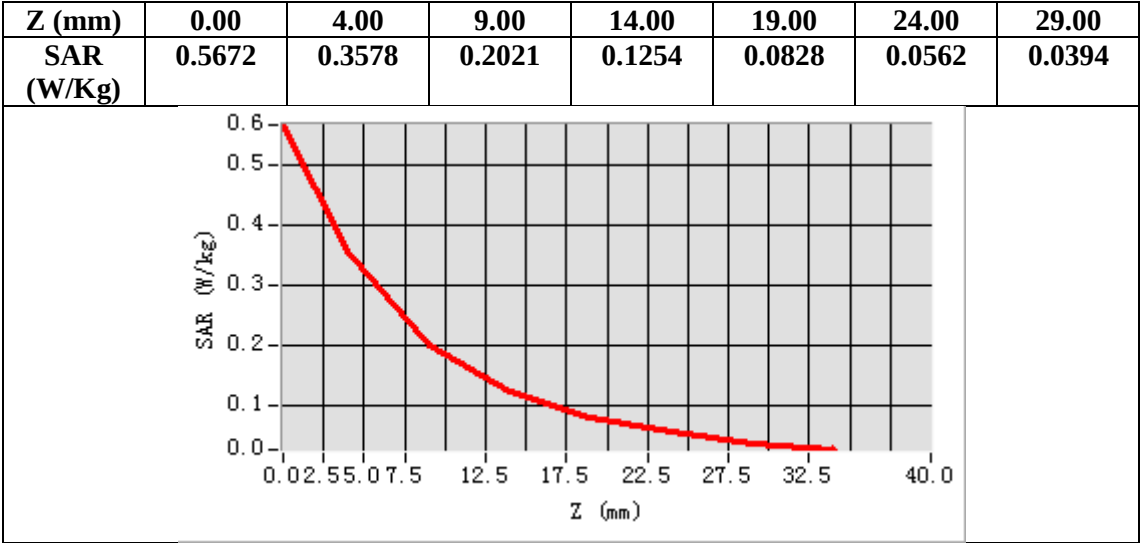

Test Laboratory: AGC Lab
LTE Band 41 Mid-Touch-Right (1RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 29, 2024


Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06
Frequency: 2593MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 39.32$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 41 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 41 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

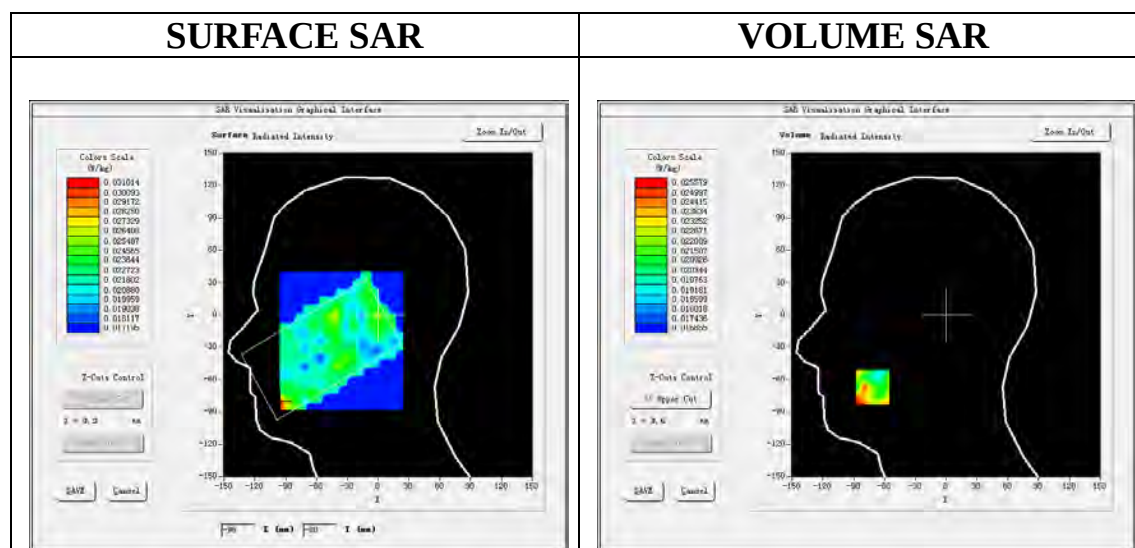

Maximum location: X=-72.00, Y=-67.00

SAR Peak: 0.04 W/kg

SAR 10g (W/Kg)	0.021400
SAR 1g (W/Kg)	0.024845

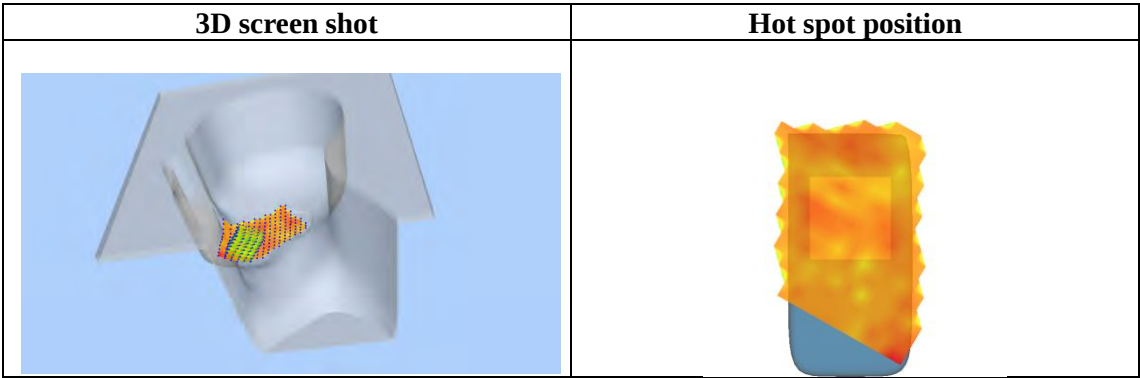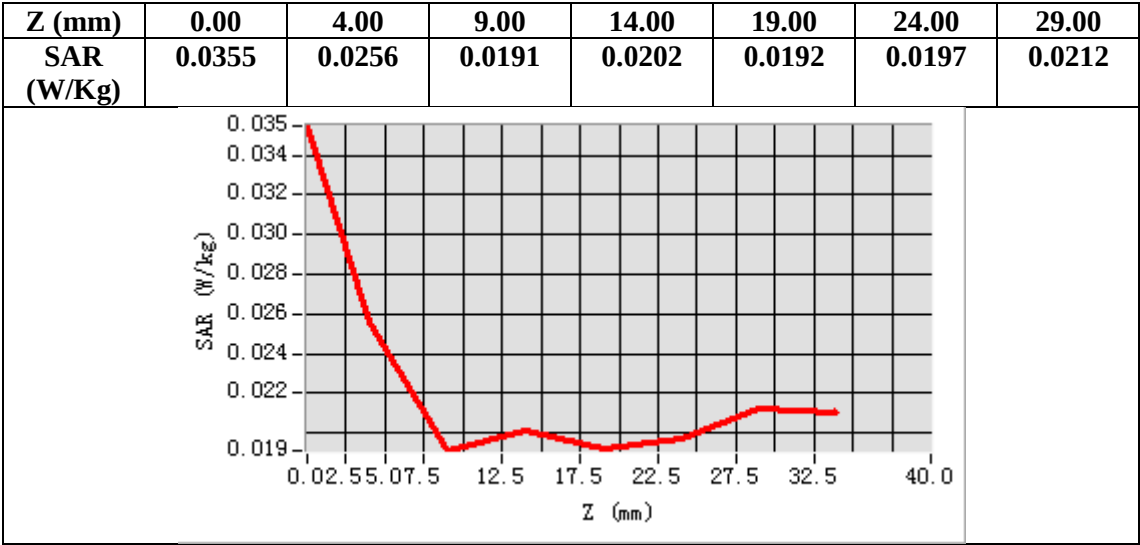

Test Laboratory: AGC Lab
LTE Band 41 Mid-Body- Botomm(1RB#0)
DUT: 4G SMARTPHONE; **Type: MOX 2**

Date: May 29, 2024


Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.06
Frequency: 2593MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 39.32$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 41 Mid-Body-Back /Area Scan: Measurement grid: dx=10mm, y=10mm
Configuration/ LTE BAND 41 Mid-Body-Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm



Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Botomm
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

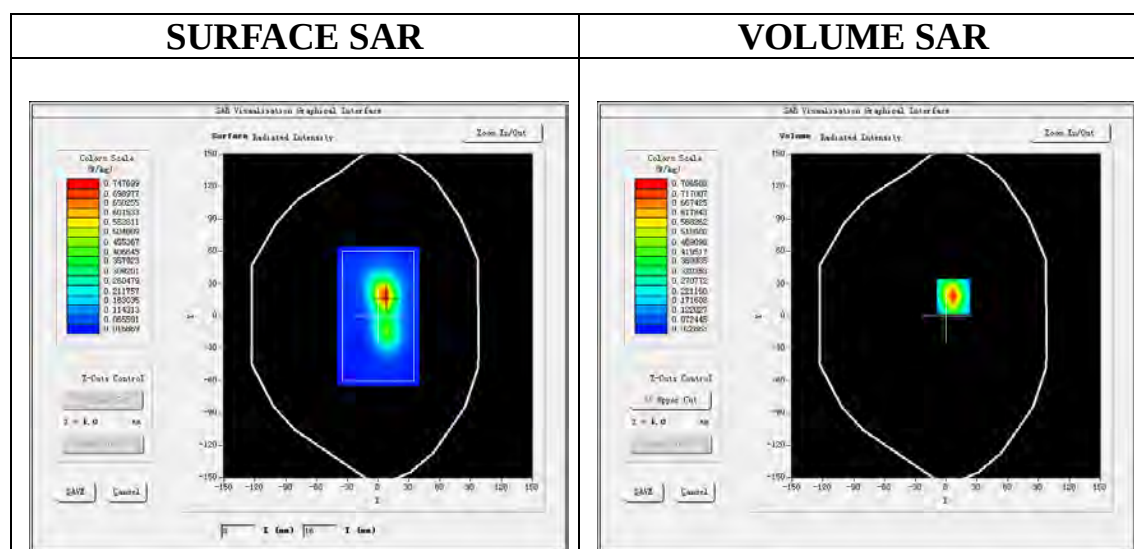

Maximum location: X=7.00, Y=18.00

SAR Peak: 1.27 W/kg

SAR 10g (W/Kg)	0.318129
SAR 1g (W/Kg)	0.698916

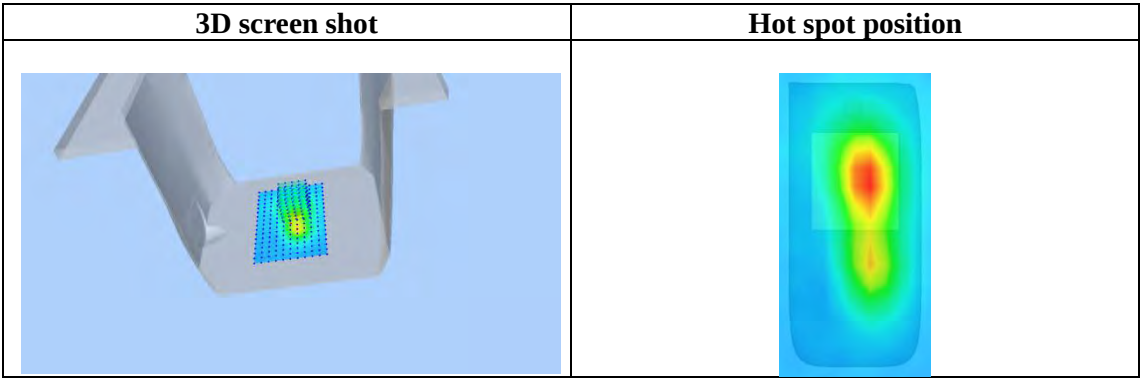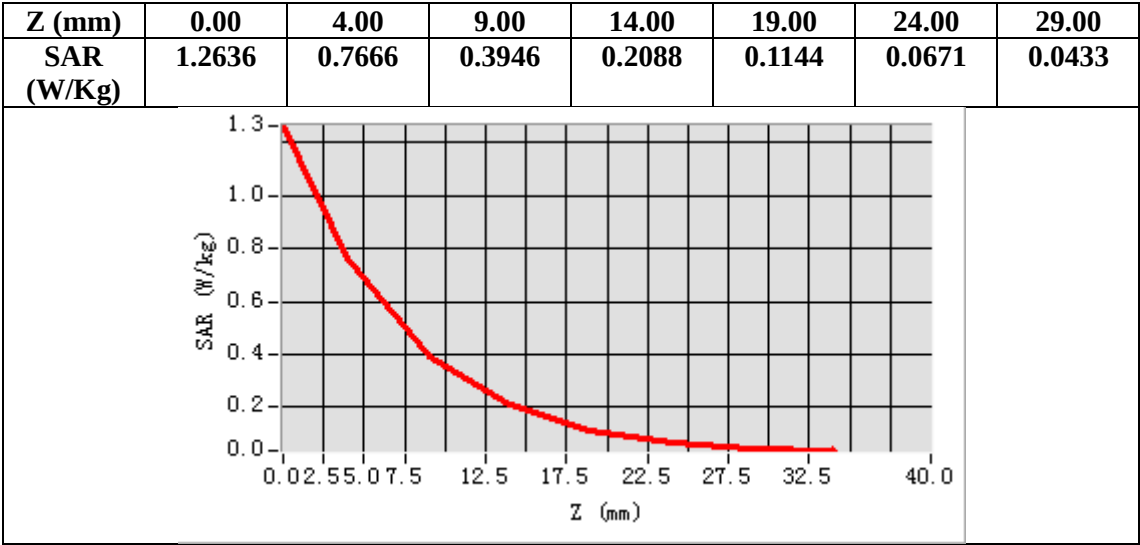

Test Laboratory: AGC Lab
LTE Band 66 Mid-Touch- Right (1 RB#0)
DUT: 4G SMARTPHONE; **Type: MOX 2**

Date: May 18, 2024


Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=1.99;
Frequency:1755 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.0

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 66 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 66 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

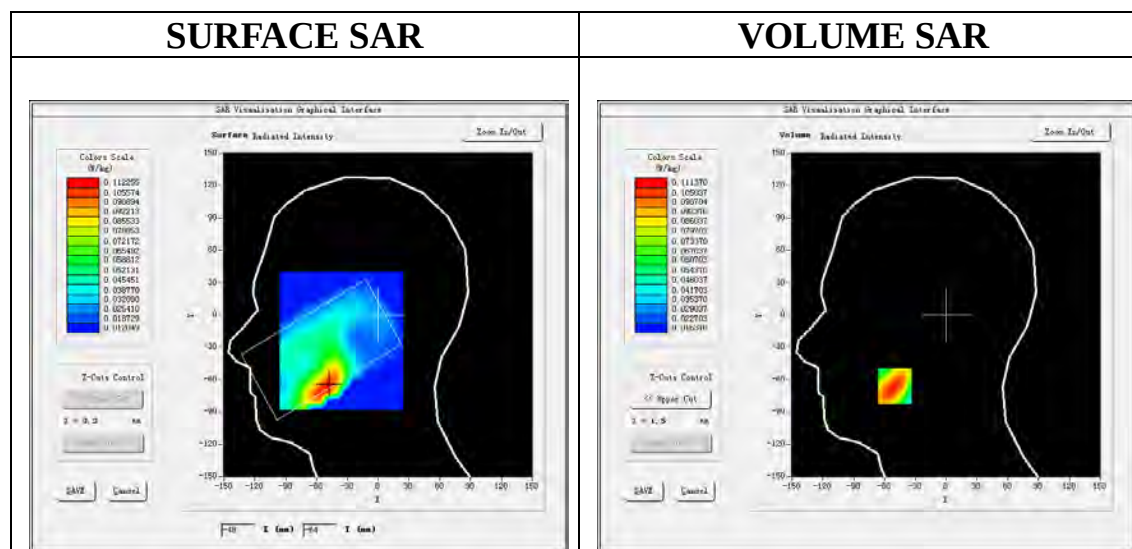

Maximum location: X=-50.00, Y=-66.00
SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.071595
SAR 1g (W/Kg)	0.108278

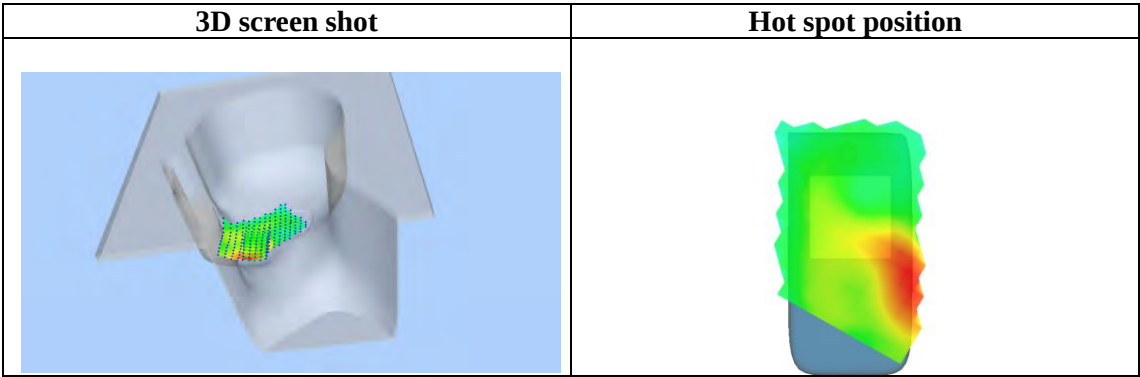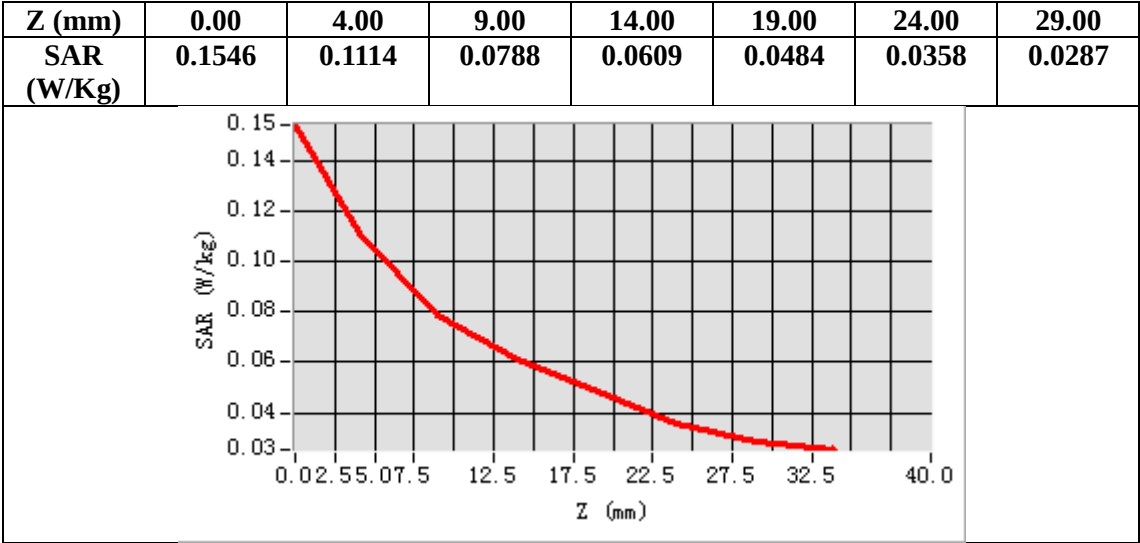

Test Laboratory: AGC Lab
LTE Band 66 Mid-Body- Botomm (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 18, 2024


Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=1.99;
Frequency:1755 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.3, Liquid temperature (°C): 22.0

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/ LTE Band 66 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 66 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Botomm
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

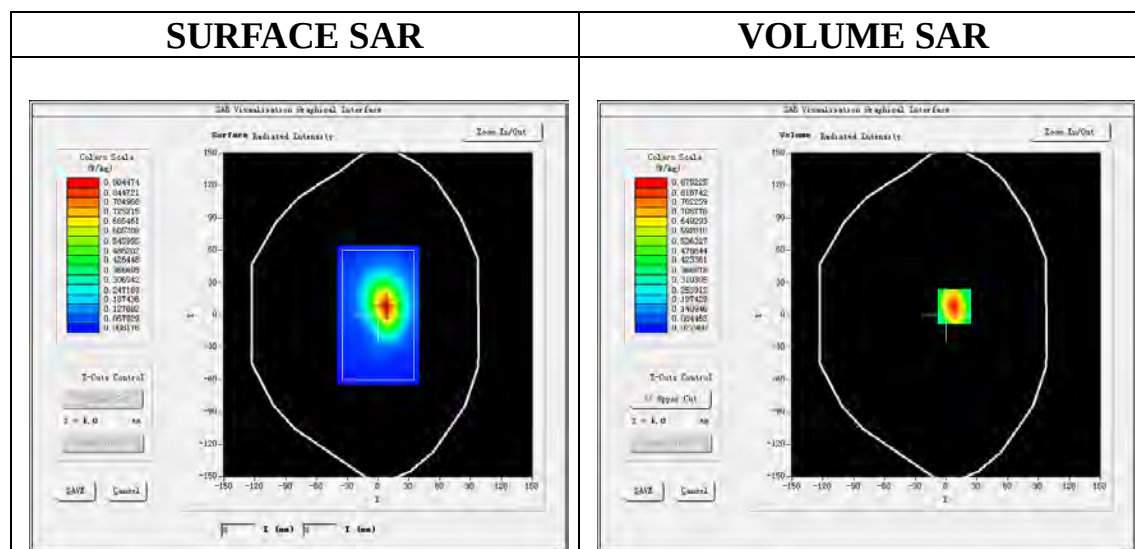

Maximum location: X=8.00, Y=8.00
SAR Peak: 1.27 W/kg

SAR 10g (W/Kg)	0.468072
SAR 1g (W/Kg)	0.824503

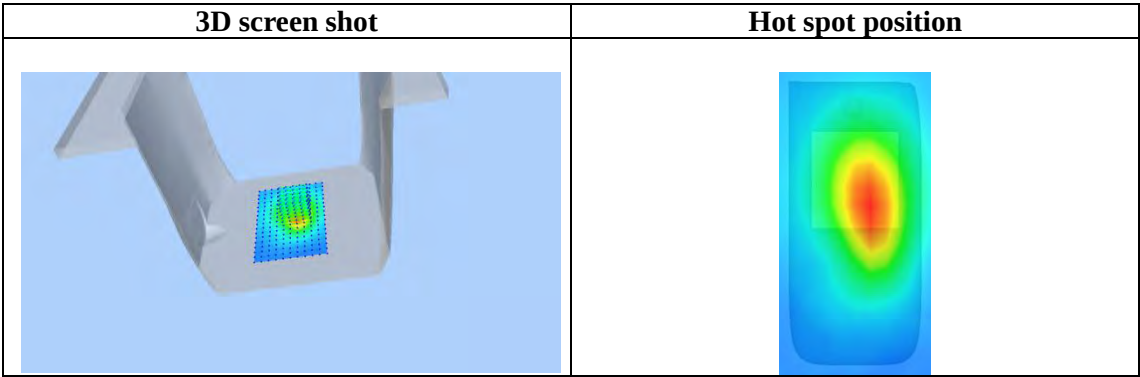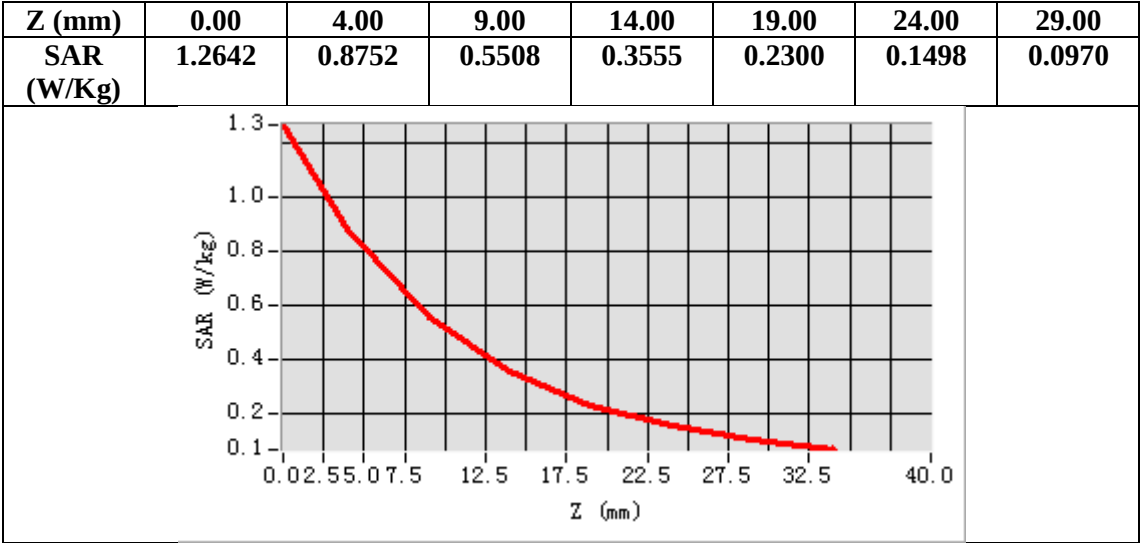

Test Laboratory: AGC Lab
LTE Band 71 Mid-Touch- Right (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 71; Duty Cycle:1:1; Conv.F=2.04
Frequency: 683 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 40.10$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): TAPA07, Liquid temperature (°C): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 71 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 71 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 71
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

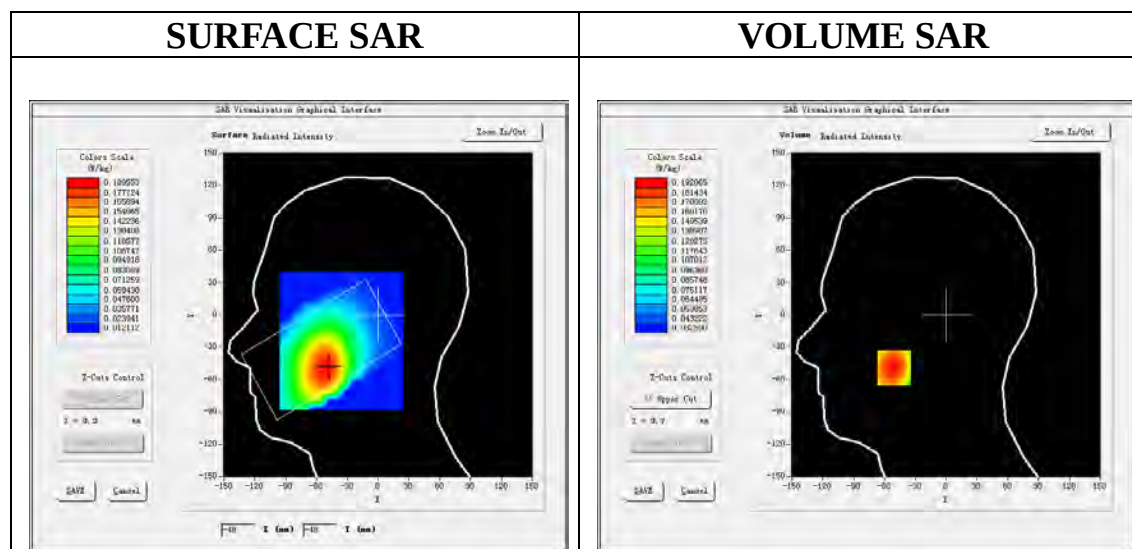

Maximum location: X=-51.00, Y=-49.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.146219
SAR 1g (W/Kg)	0.193253

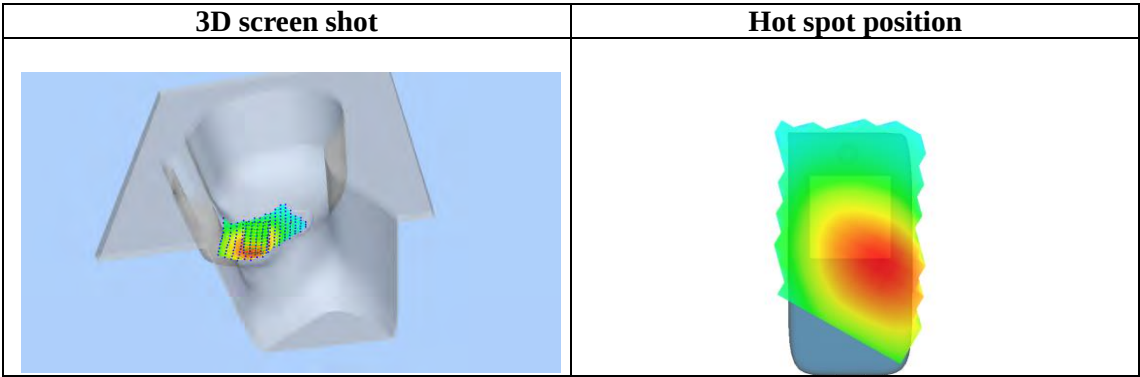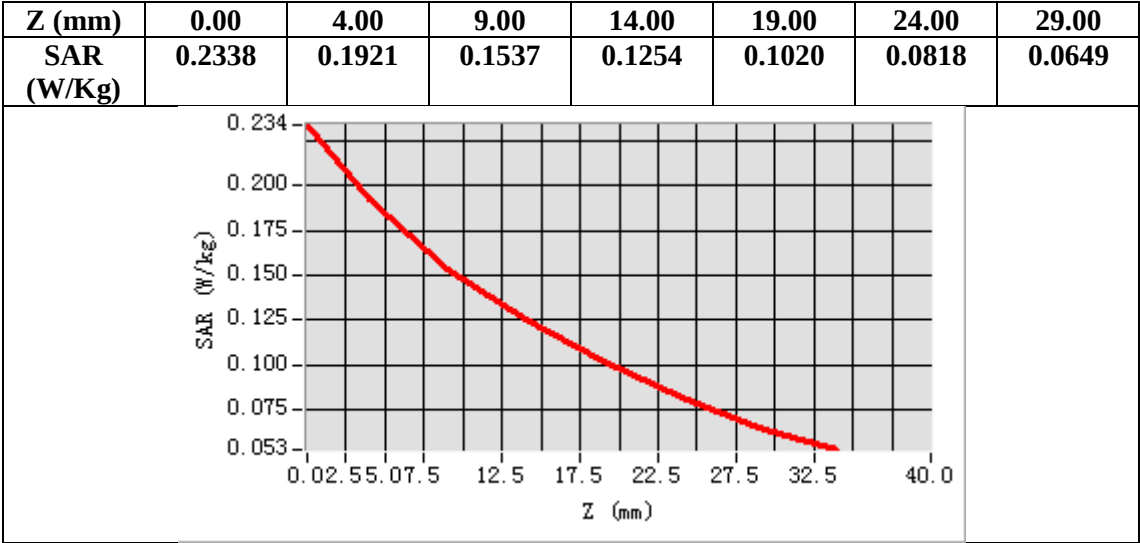

Test Laboratory: AGC Lab
LTE Band 71 Mid-Body- Front (1 RB#0)
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 04, 2024


Communication System: LTE; Communication System Band: LTE Band 71; Duty Cycle:1:1; Conv.F=2.04;
Frequency: 683 MHz; Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 40.10$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA07, Liquid temperature ($^{\circ}\text{C}$): 22.1

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE Band 71 Mid-Body- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 71 Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Front
Band	LTE Band 71
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

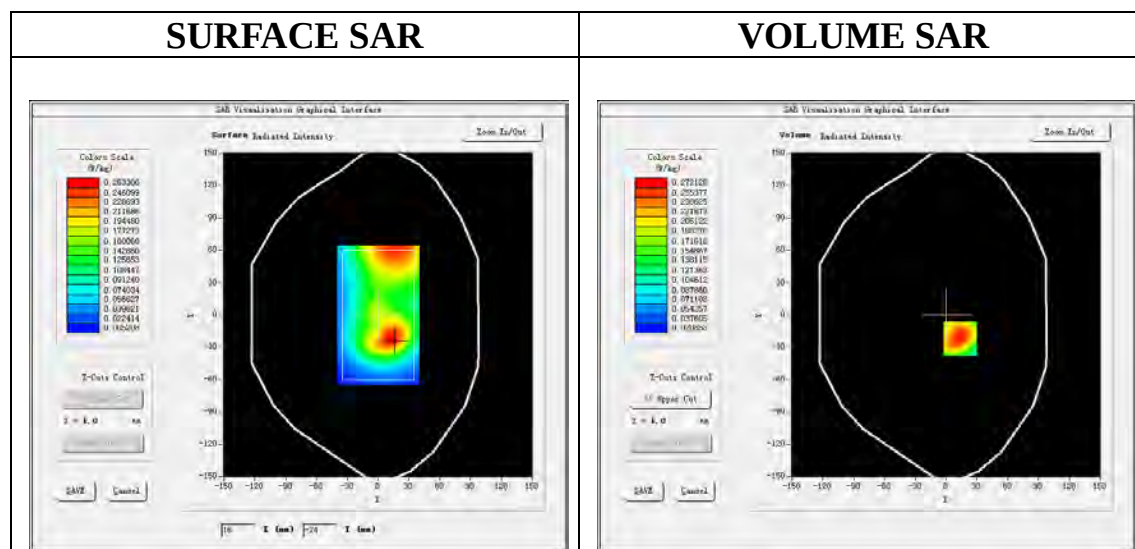

Maximum location: X=14.00, Y=-22.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.154705
SAR 1g (W/Kg)	0.258474

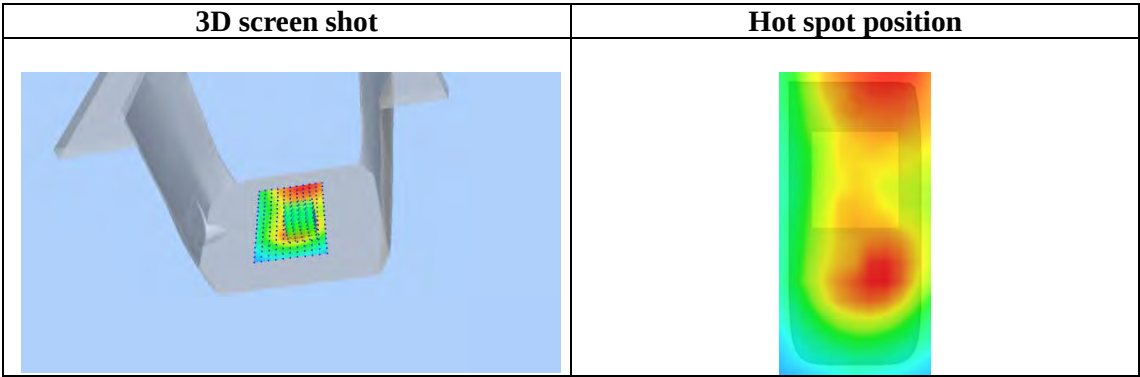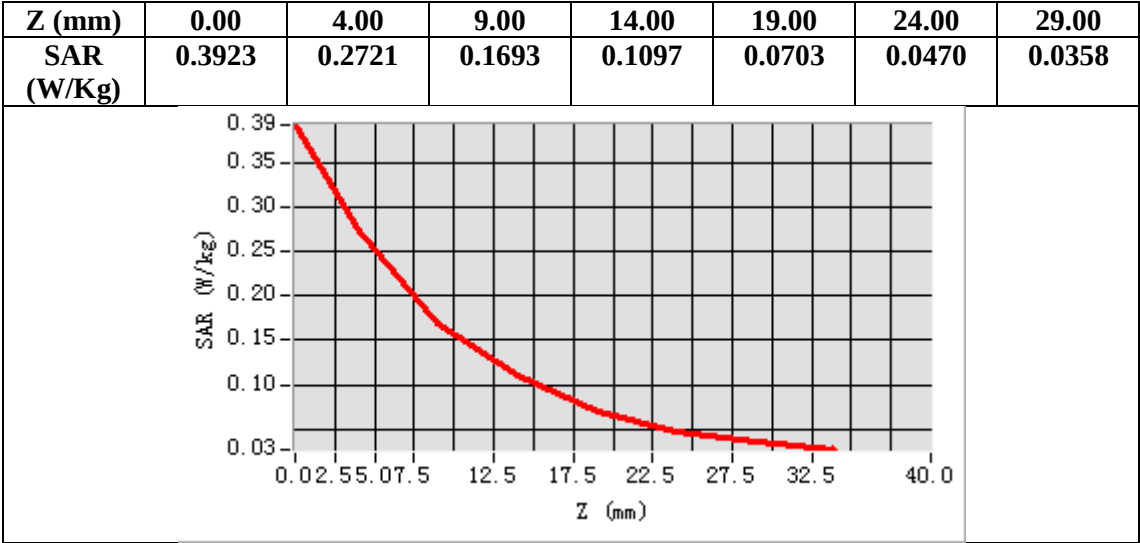

WIFI MODE

Test Laboratory: AGC Lab

Date: TTDD7

802.11b Mid-Touch-Right

DUT: 4G SMARTPHONE; Type: MOX 2

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.16;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = \delta$ Pmho/m; $\epsilon_r = \epsilon$ rP $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):TAPA7, Liquid temperature (°C): TTPPP


SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11b Mid- Touch-Right/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

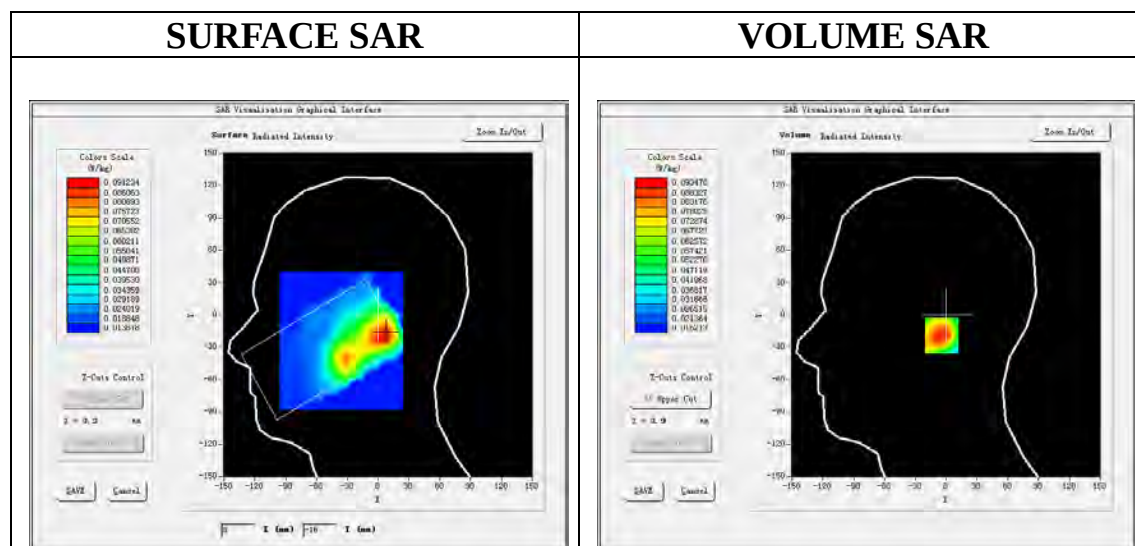

Maximum location: X=6.00, Y=-19.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.055320
SAR 1g (W/Kg)	0.093537

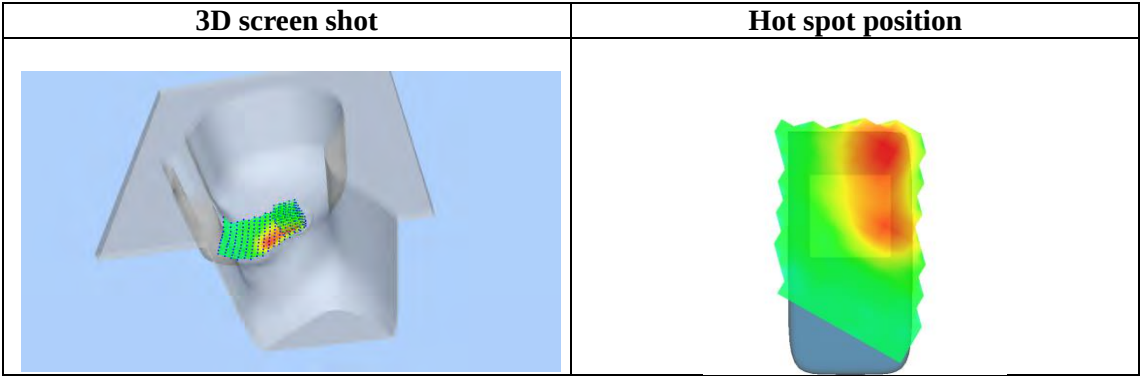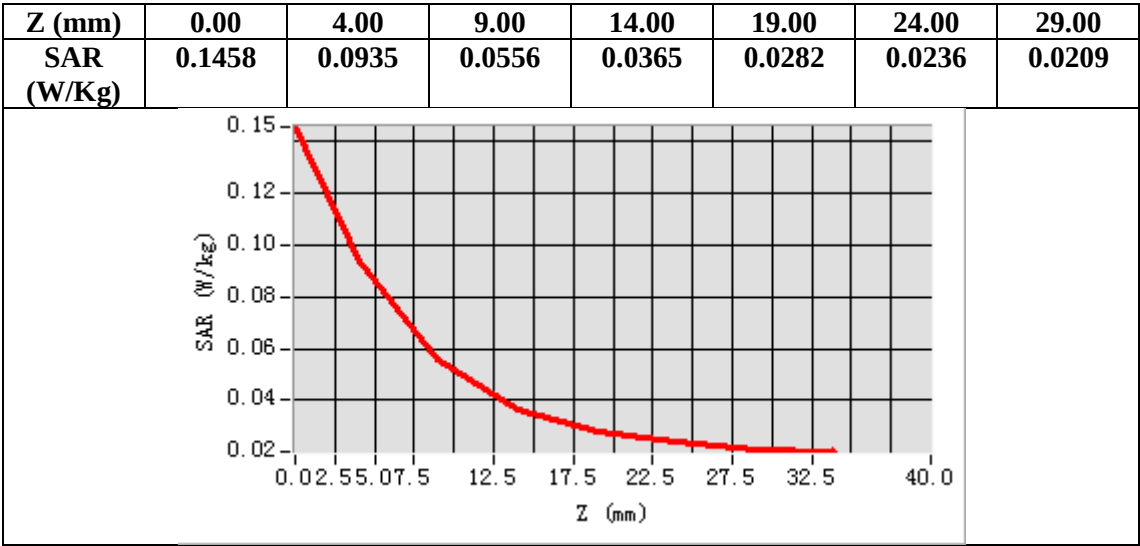

Test Laboratory: AGC Lab
802.11b Mid-Body-Worn- Back
DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD7


Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.16;
Frequency: 2437 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = \delta P \text{mho/m}$; $\epsilon_r = \epsilon_r P$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$):TAPA7, Liquid temperature ($^{\circ}\text{C}$): TTPPP

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11b Mid- Body- Back /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;



Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Back
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

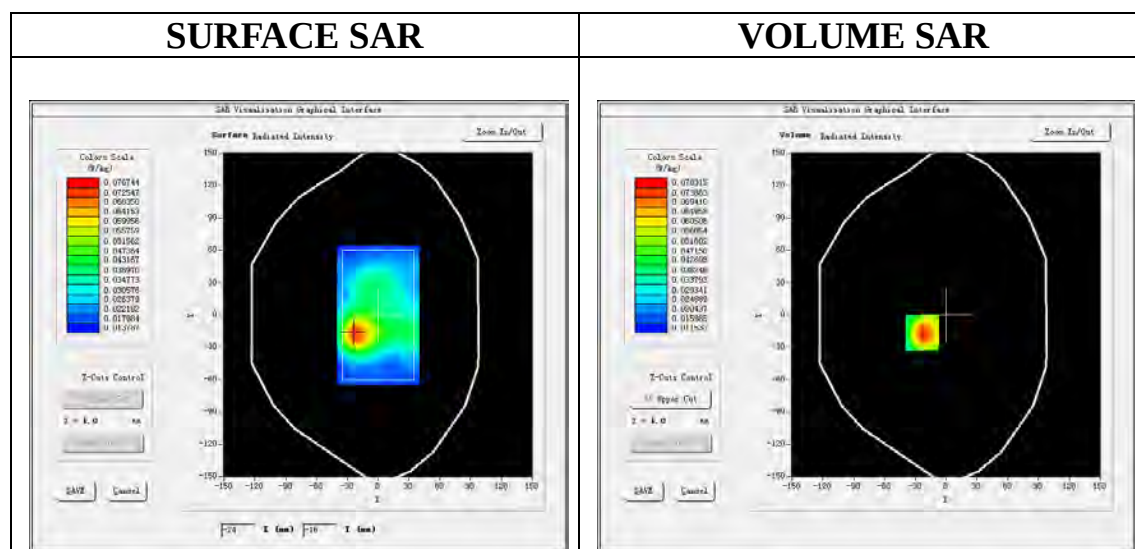

Maximum location: X=-23.00, Y=-17.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.046649
SAR 1g (W/Kg)	0.078109

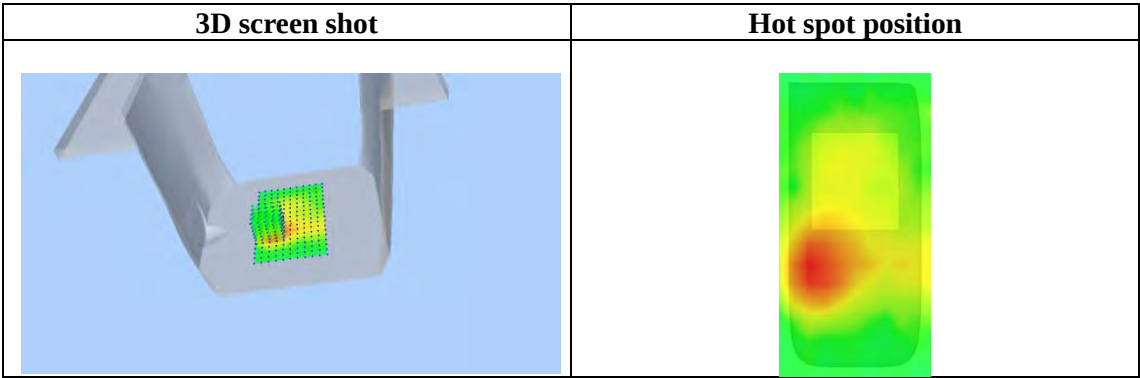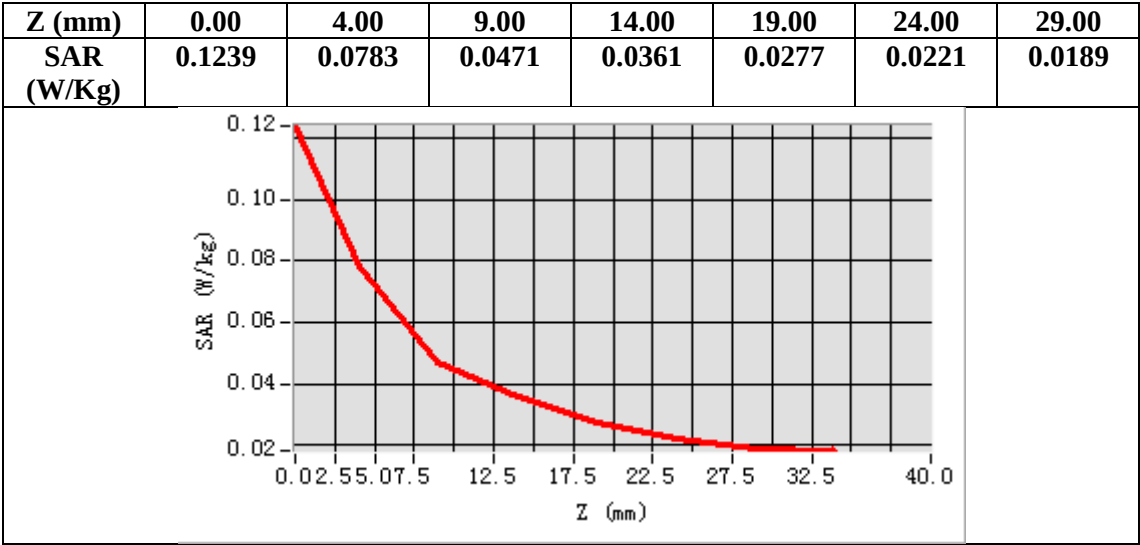

5.2GHz 802.11a

Test Laboratory: AGC Lab

802.11a CH36- Touch- Right

DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD06

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.53;
Frequency: 5180MHz; Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = \delta \text{ Hmho/m}$; $\epsilon_r = \epsilon \text{ rH}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): TAPA06, Liquid temperature ($^{\circ}\text{C}$): TTPPH


SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11a CH36- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11a CH36- Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5200MHz
Channels	CH36
Signal	Crest factor: 1.0

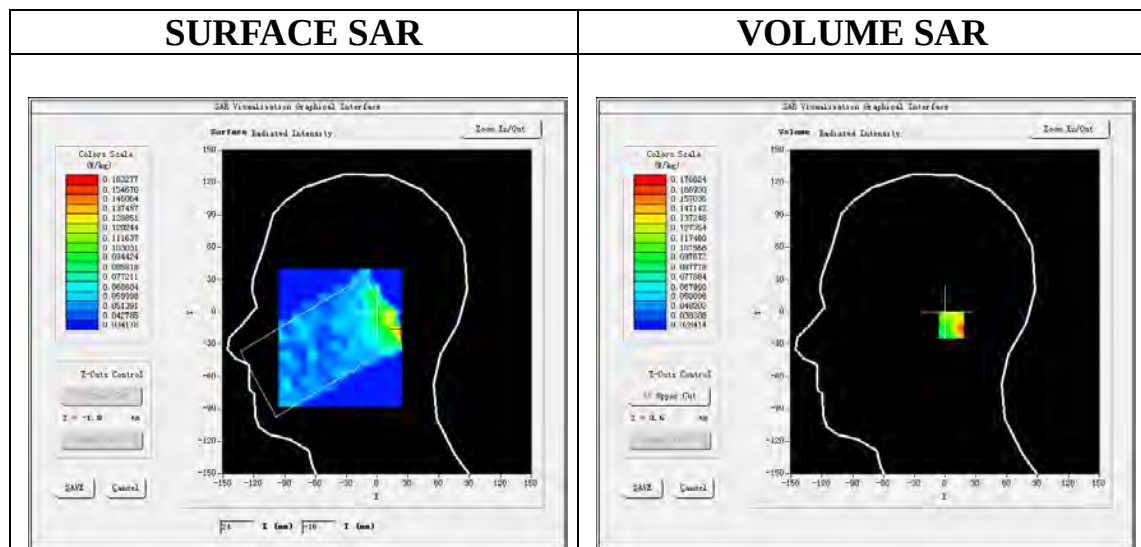

Maximum location: X=16.00, Y=-12.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.088796
SAR 1g (W/Kg)	0.156358

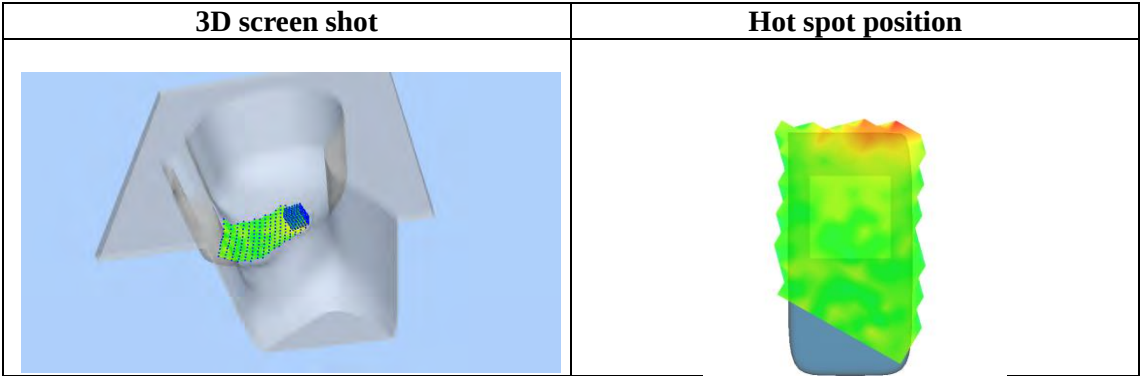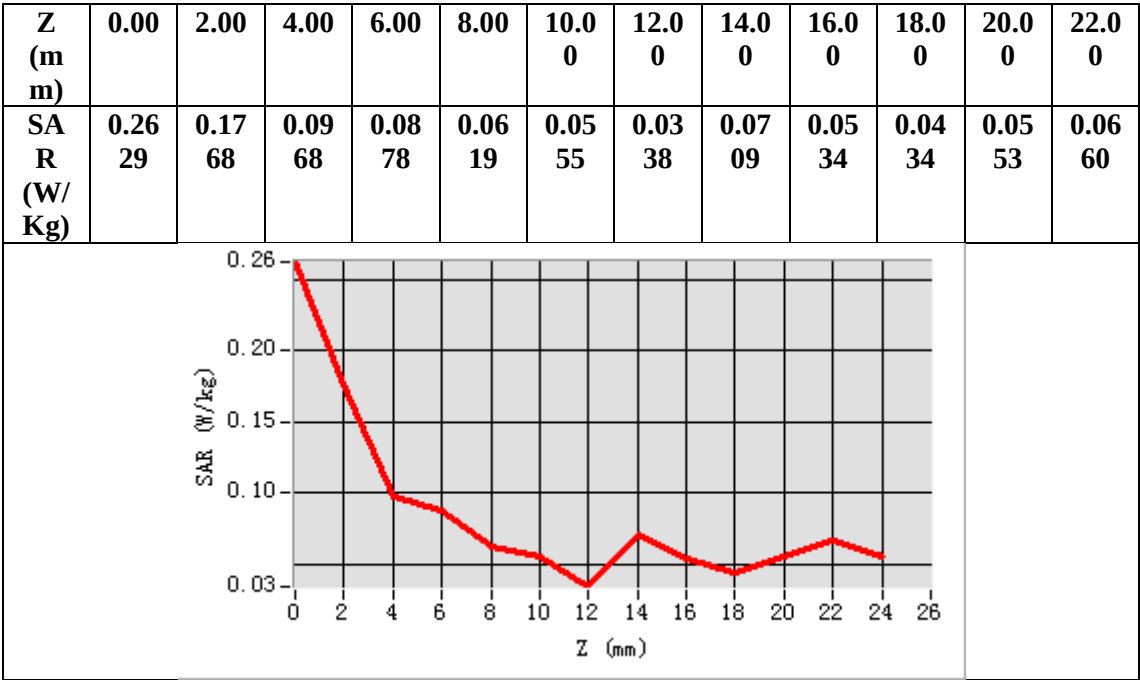

Test Laboratory: AGC Lab
802.11a CH36-Back
DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD06


Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.53;
Frequency: 5180MHz; Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = \delta \text{ Hmho/m}$; $\epsilon_r = \epsilon \text{ rH}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA06, Liquid temperature ($^{\circ}\text{C}$): TTPPH

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11a CH36- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11a CH36- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5180MHz
Channels	CH36
Signal	Crest factor: 1.0

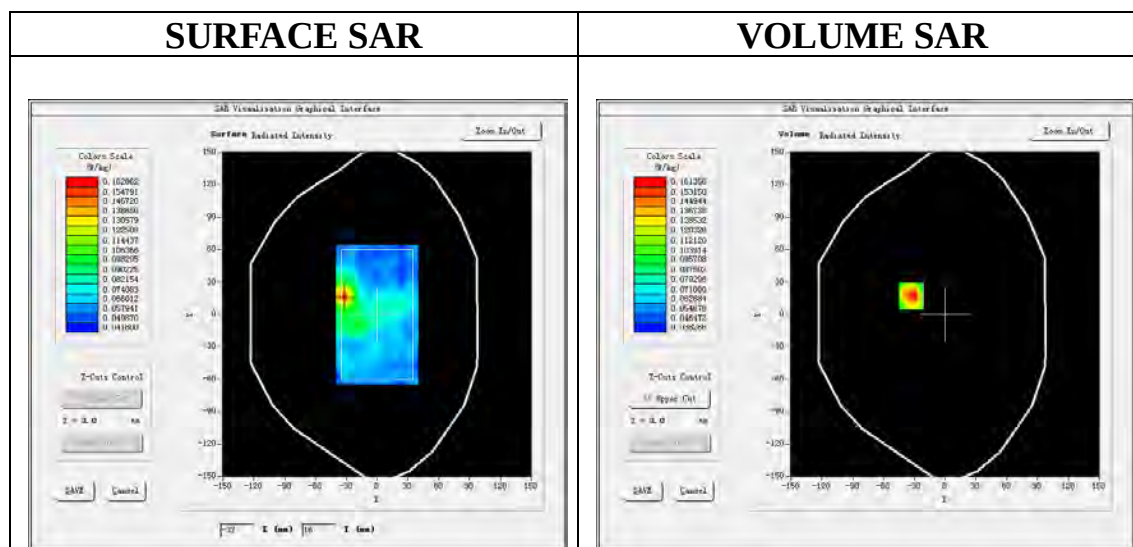

Maximum location: X=-33.00, Y=17.00

SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.075618
SAR 1g (W/Kg)	0.117895

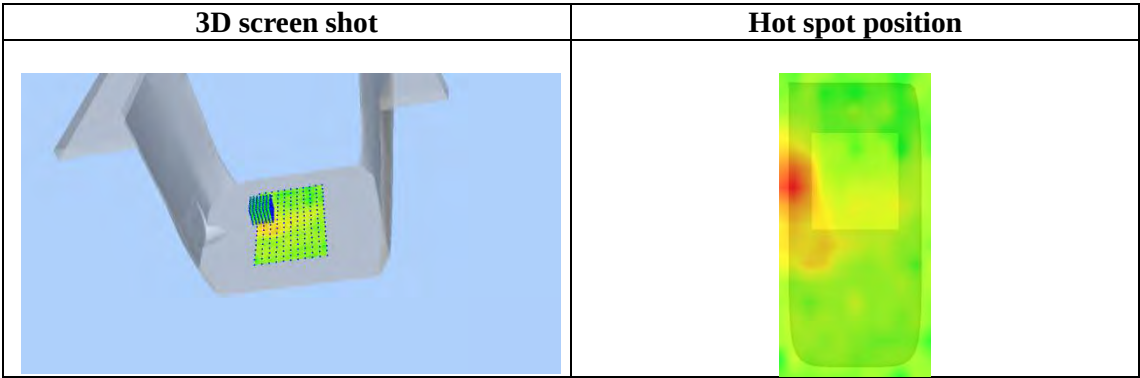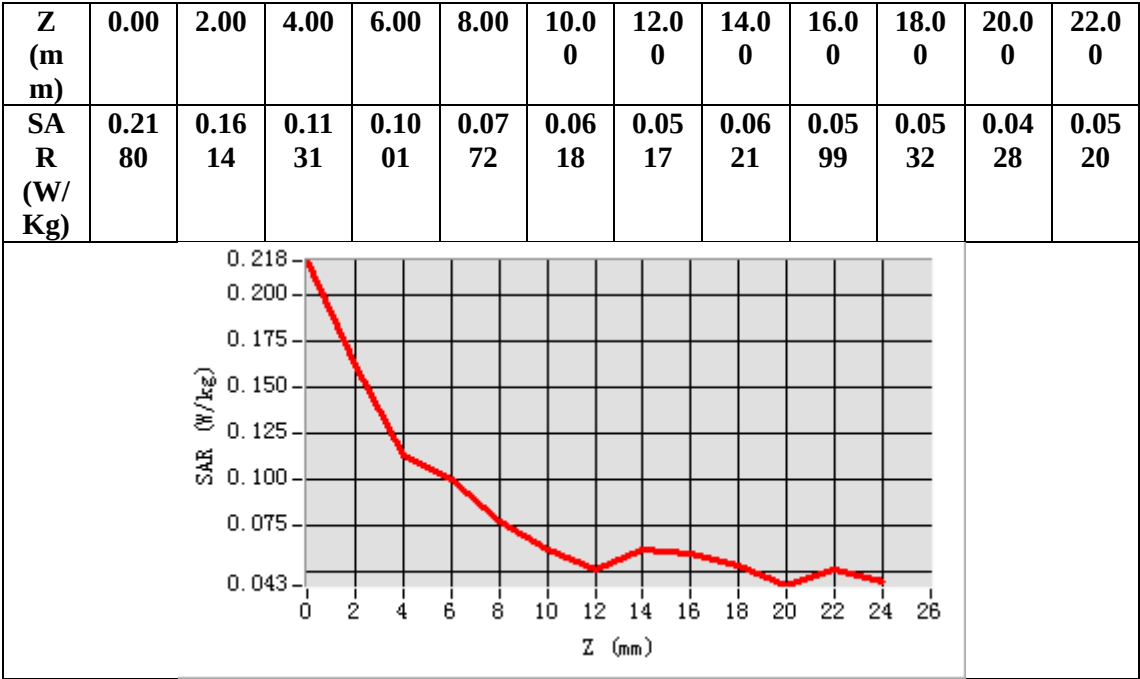

5.3GHz 802.11ac VHT40
Test Laboratory: AGC Lab
802.11ac VHT40 CH60-Touch-Right
DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD03


Communication System: Wi-Fi; Communication System Band: 802.11ac VHT40; Duty Cycle: 1:1; Conv.F=1.53;
Frequency: 5300MHz; Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = \delta \text{ 0Smho/m}$; $\epsilon_r = \epsilon \text{ r0S}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): TAPA03, Liquid temperature ($^{\circ}\text{C}$): TTPPS

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac VHT40 CH60- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac VHT40 CH60- Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5300MHz
Channels	CH60
Signal	Crest factor: 1.0

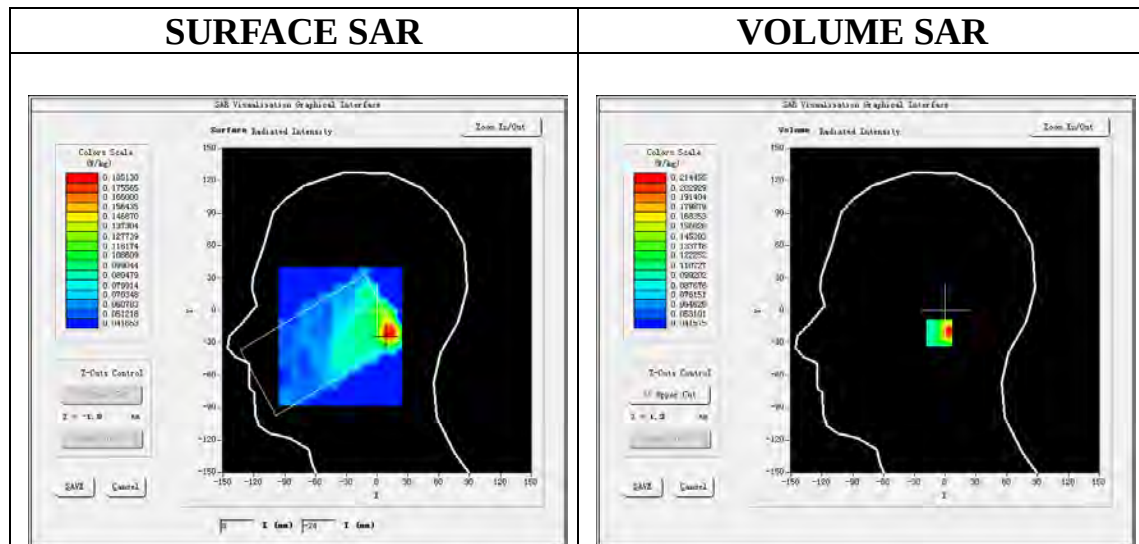

Maximum location: X=3.00, Y=-21.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.098016
SAR 1g (W/Kg)	0.195789

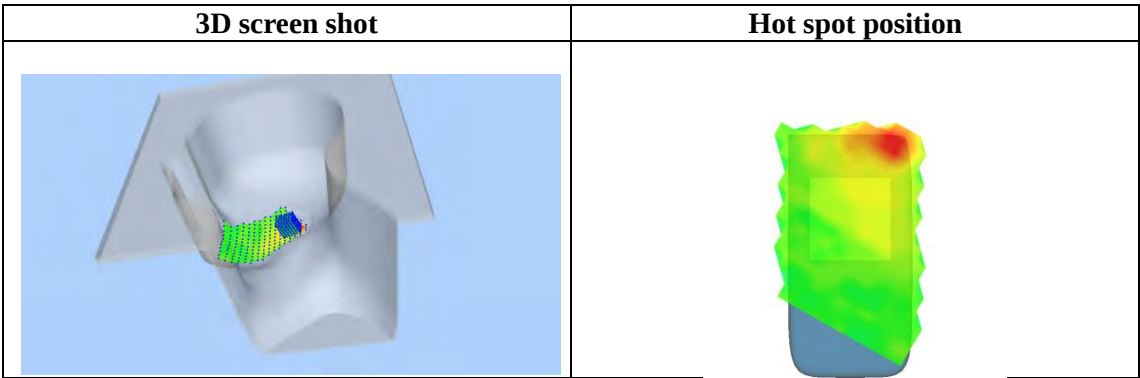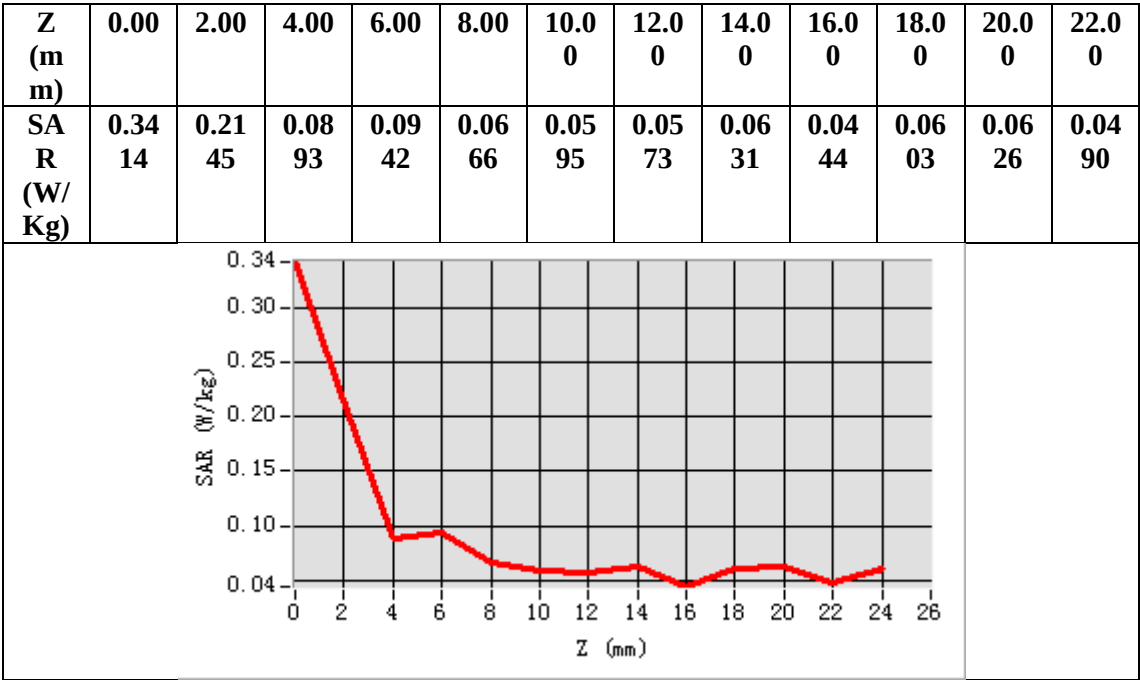

Test Laboratory: AGC Lab
802.11ac VHT40 CH60-Back
DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD03


Communication System: Wi-Fi; Communication System Band: 802.11ac-VHT40; Duty Cycle: 1:1; Conv.F=1.53;
Frequency: 5300MHz; Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = \delta 0 \text{ Smho/m}$; $\epsilon r = \epsilon r 0 \text{ S}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA03, Liquid temperature ($^{\circ}\text{C}$): TTPPS

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac-VHT40 CH60- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac-VHT40 CH60- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5300MHz
Channels	CH60
Signal	Crest factor: 1.0

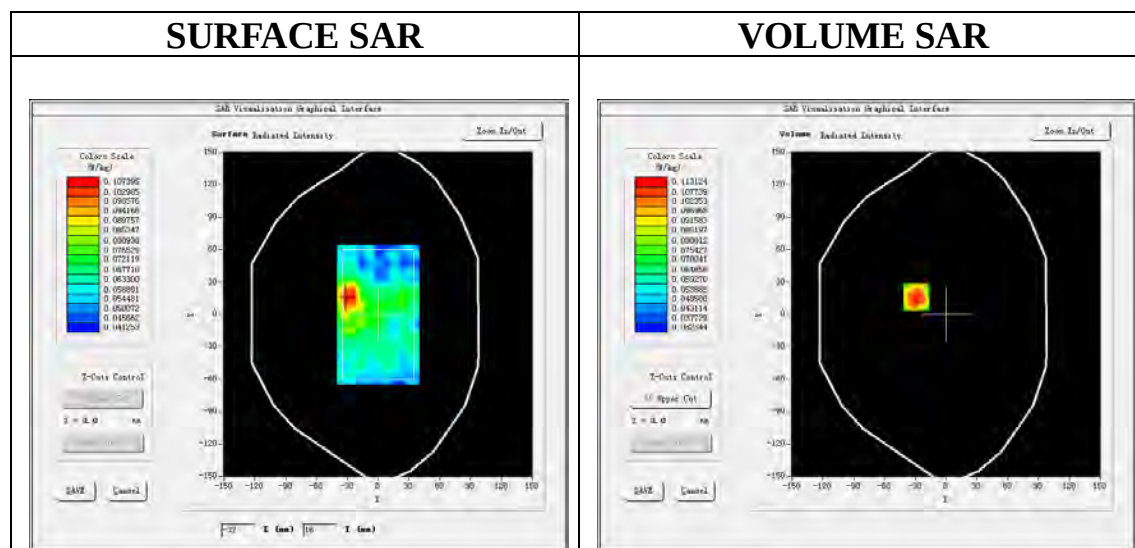

Maximum location: X=-29.00, Y=16.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.065543
SAR 1g (W/Kg)	0.091098

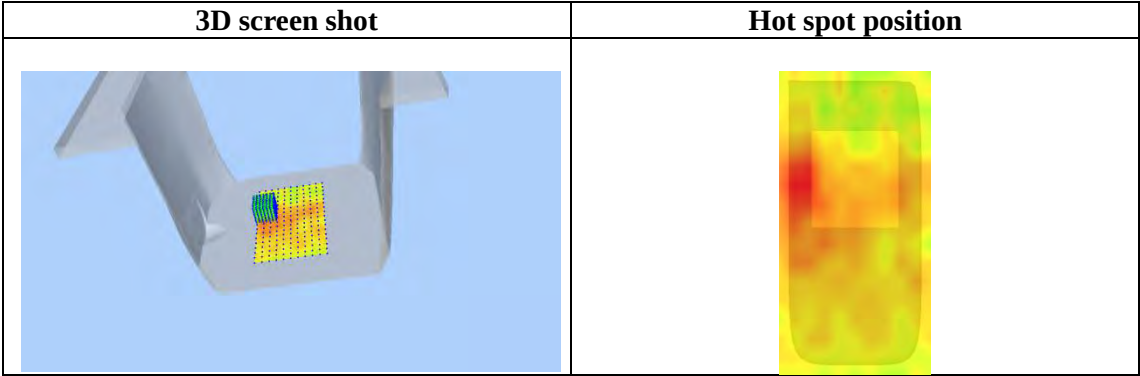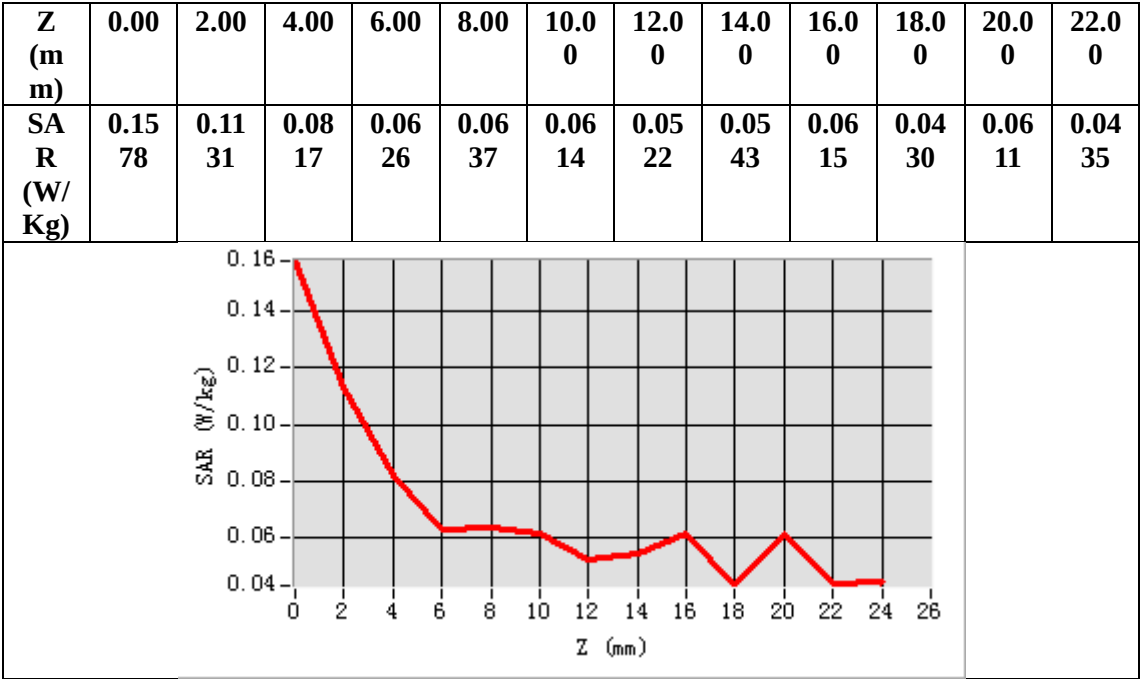

5.6GHz 802.11ac-VHT40
Test Laboratory: AGC Lab
802.11ac-VHT40 High-Touch- Right
DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD09


Communication System: Wi-Fi; Communication System Band: 802.11ac-VHT40; Duty Cycle: 1:1; Conv.F=1.24;
Frequency: 5500MHz; Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = \delta 0 \text{ Bmho/m}$; $\epsilon r = \epsilon r 0 \text{ B}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): TAPA09, Liquid temperature ($^{\circ}\text{C}$): TTPPB

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac-VHT40 High- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac-VHT40 High -Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5500MHz
Channels	Ch110
Signal	Crest factor: 1.0

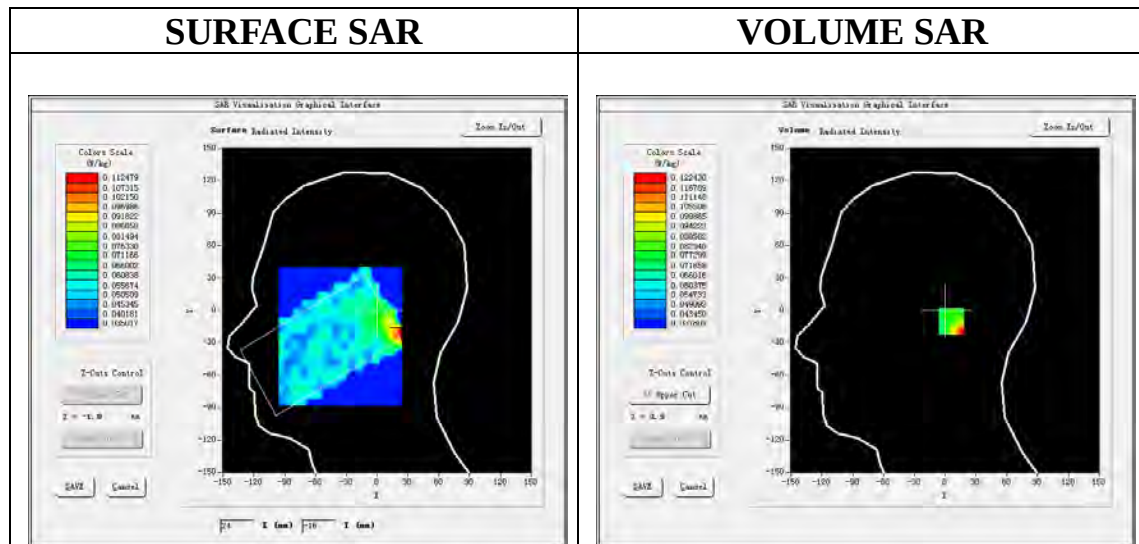

Maximum location: X=16.00, Y=-10.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.072935
SAR 1g (W/Kg)	0.130142

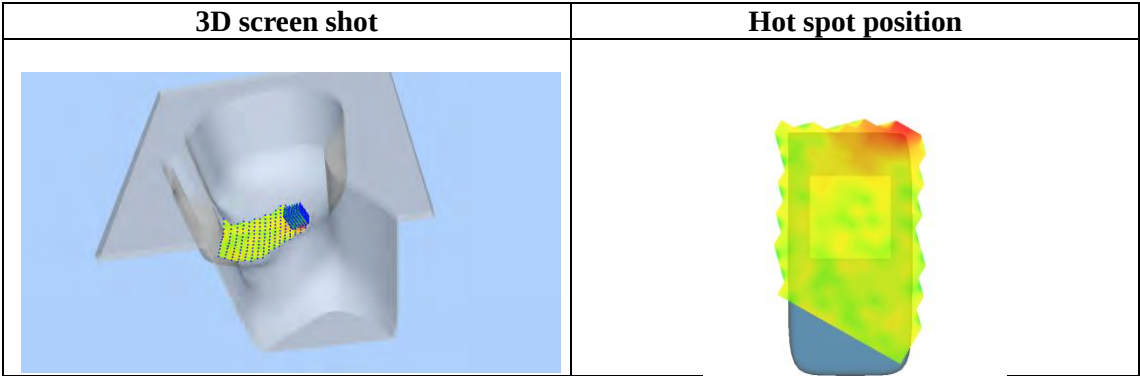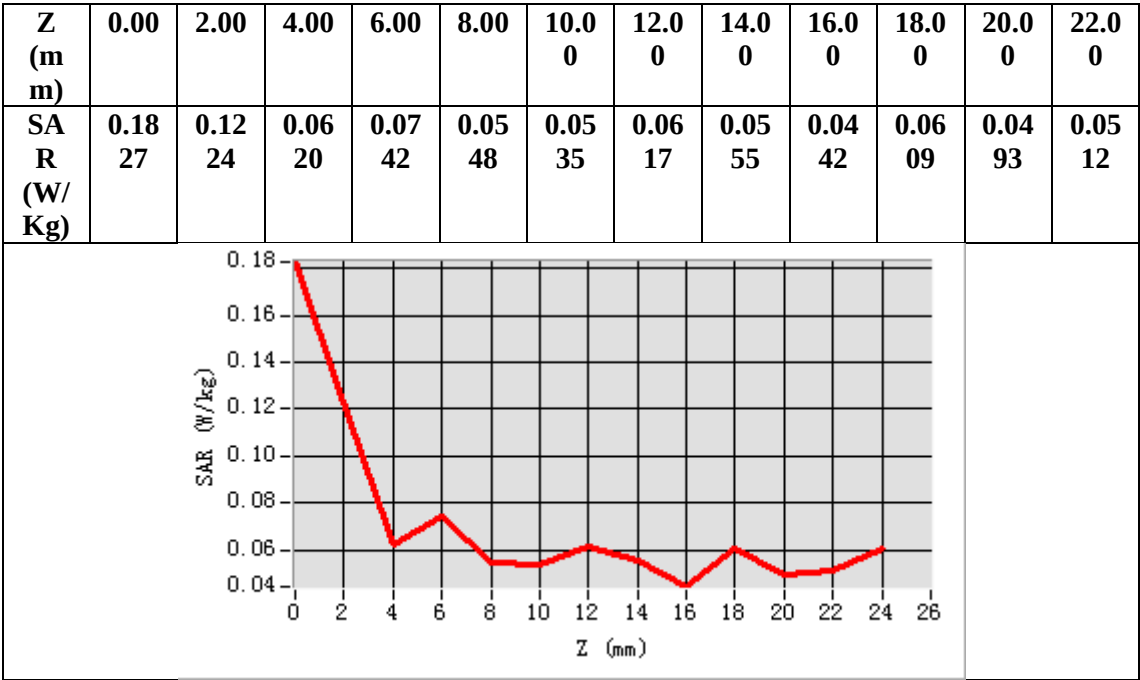

Test Laboratory: AGC Lab
802.11ac-VHT40 High-Back
DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD09


Communication System: Wi-Fi; Communication System Band: 802.11ac-VHT40; Duty Cycle: 1:1; Conv.F=1.24;
Frequency: 5500MHz; Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = \delta 0 \text{ Bmho/m}$; $\epsilon_r = \epsilon_r 0 \text{ B}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA09, Liquid temperature ($^{\circ}\text{C}$): TTPPB

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac-VHT40 High- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac-VHT40 High- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5500MHz
Channels	Ch110
Signal	Crest factor: 1.0

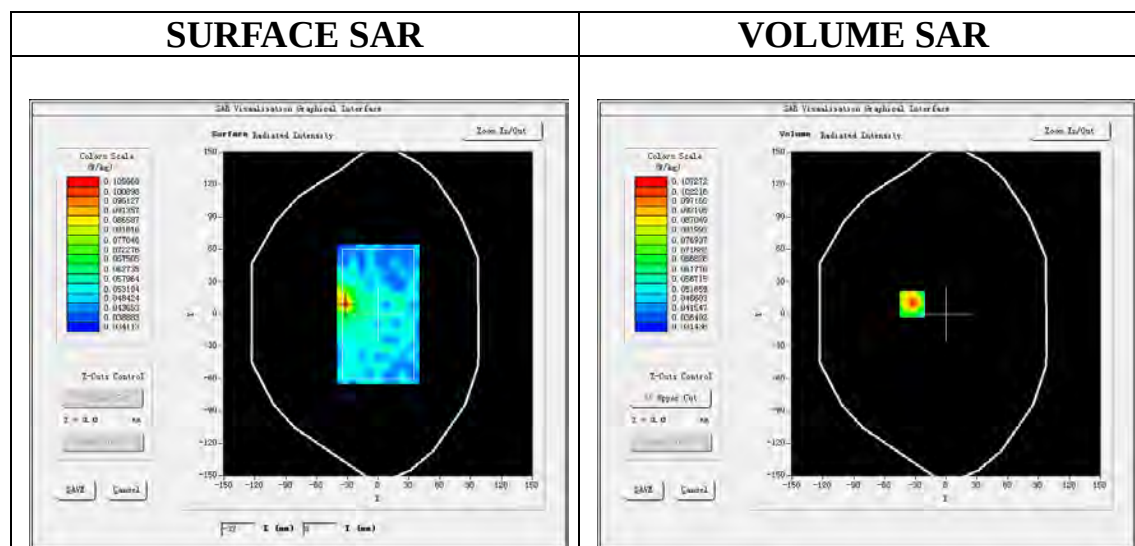

Maximum location: X=-33.00, Y=9.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.057096
SAR 1g (W/Kg)	0.086228

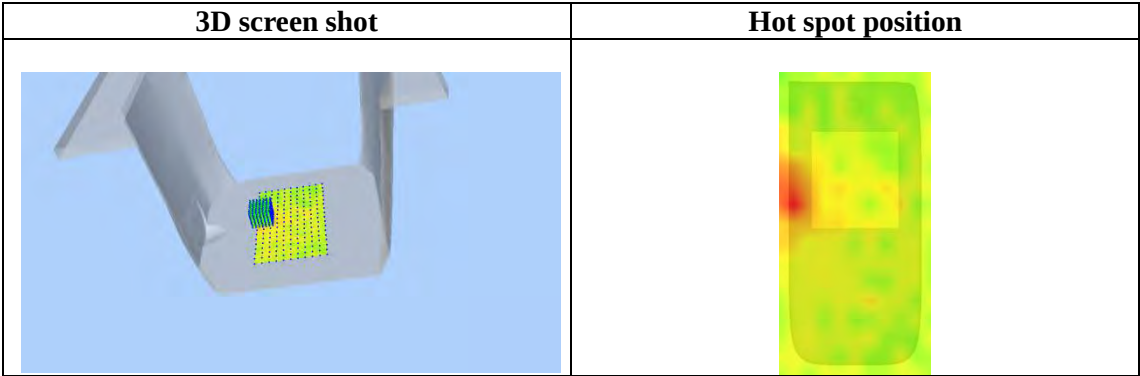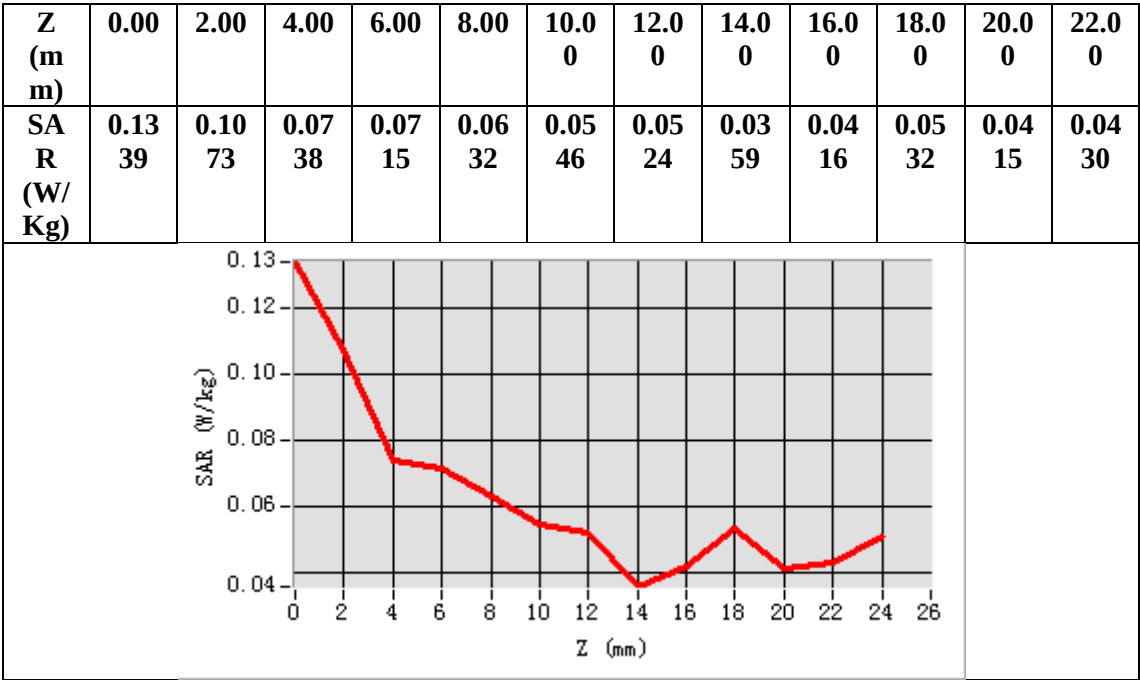

5.8GHz 802.11 ac VHT80
Test Laboratory: AGC Lab
802.11ac VHT80 CH155- Touch-Right
DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD02


Communication System: Wi-Fi; Communication System Band: 802.11ac VHT80; Duty Cycle: 1:1; Conv.F=1.37;
Frequency: 5775MHz; Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = \delta \text{ Xmho/m}$; $\epsilon_r = \epsilon_r \text{ X}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): TAPA02, Liquid temperature ($^{\circ}\text{C}$): TTPPX

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11ac VHT80 CH155- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11ac VHT80 CH155- Touch-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5775MHz
Channels	CH155
Signal	Crest factor: 1.0

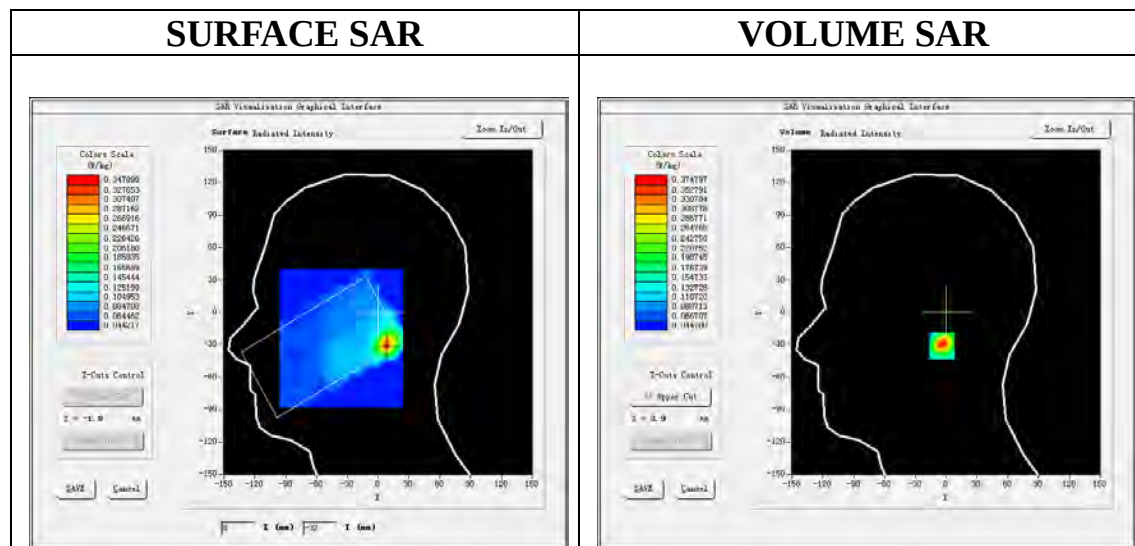

Maximum location: X=8.00, Y=-31.00

SAR Peak: 0.97 W/kg

SAR 10g (W/Kg)	0.154740
SAR 1g (W/Kg)	0.206765

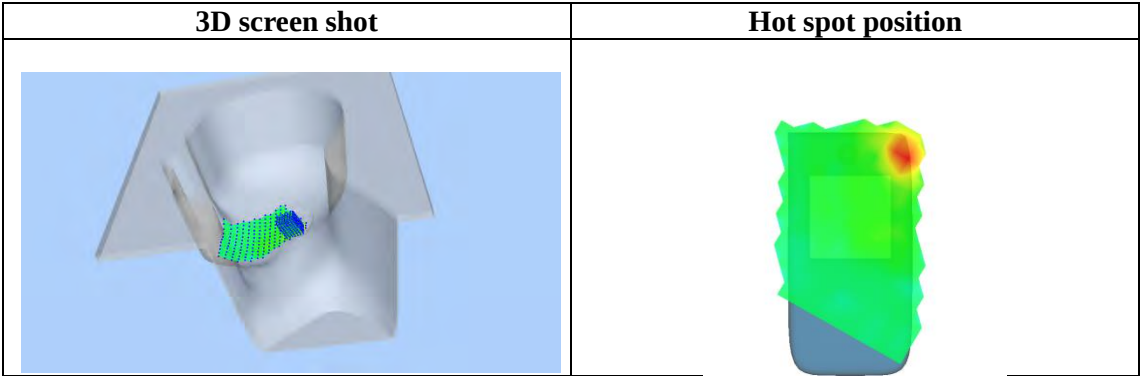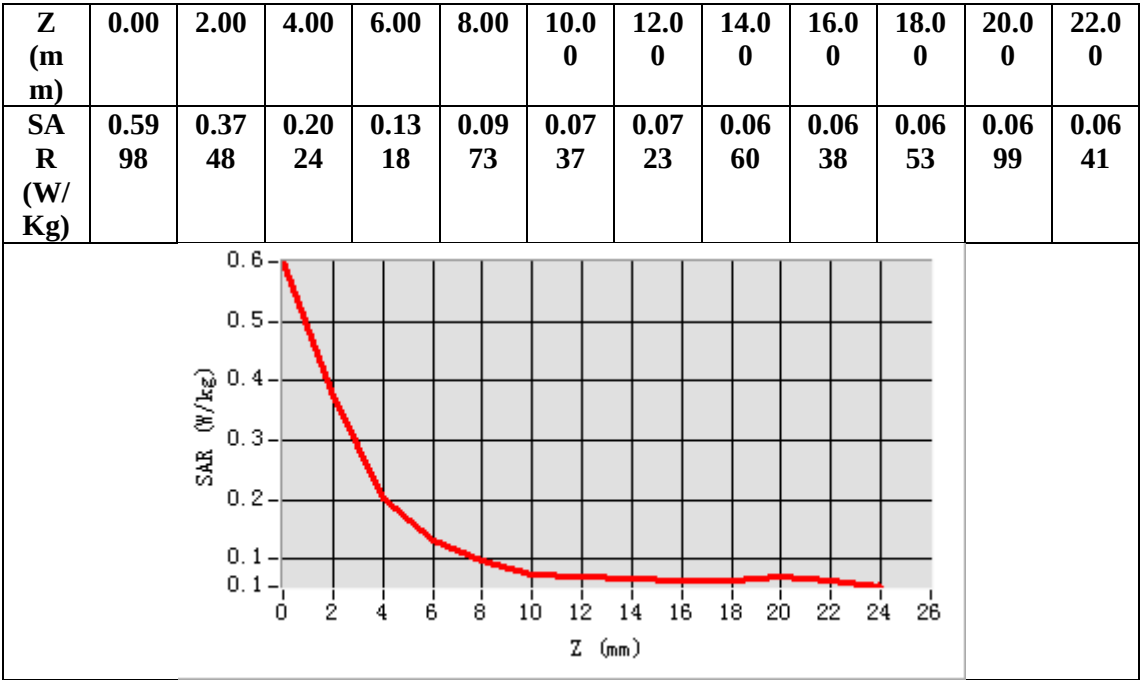

Test Laboratory: AGC Lab
802.11ac VHT80 CH155-Back
DUT: 4G SMARTPHONE; Type: MOX 2

Date: TTDD02


Communication System: Wi-Fi; Communication System Band: 802.11ac VHT80; Duty Cycle: 1:1; Conv.F=1.37;
Frequency: 5775MHz; Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = \delta \text{ Xmho/m}$; $\epsilon_r = \epsilon_r \text{ X}$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): TAPA02, Liquid temperature ($^{\circ}\text{C}$): TTPPX

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ 802.11ac VHT80 CH155- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 802.11ac VHT80 CH155- Back /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back
Band	5800MHz
Channels	Middle
Signal	Crest factor: 1.0

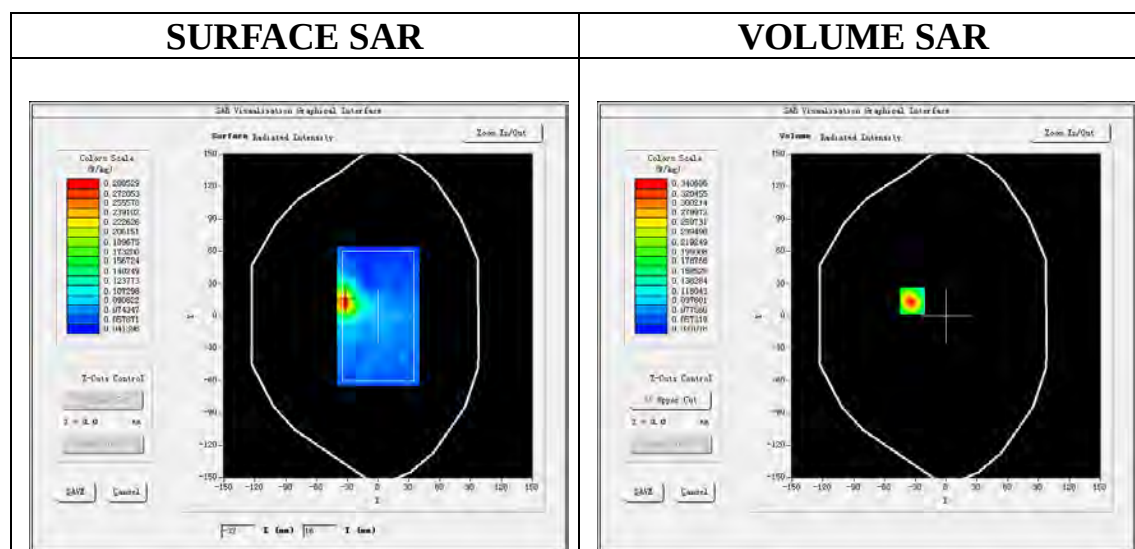

Maximum location: X=-33.00, Y=14.00

SAR Peak: 0.54 W/kg

SAR 10g (W/Kg)	0.111029
SAR 1g (W/Kg)	0.207643

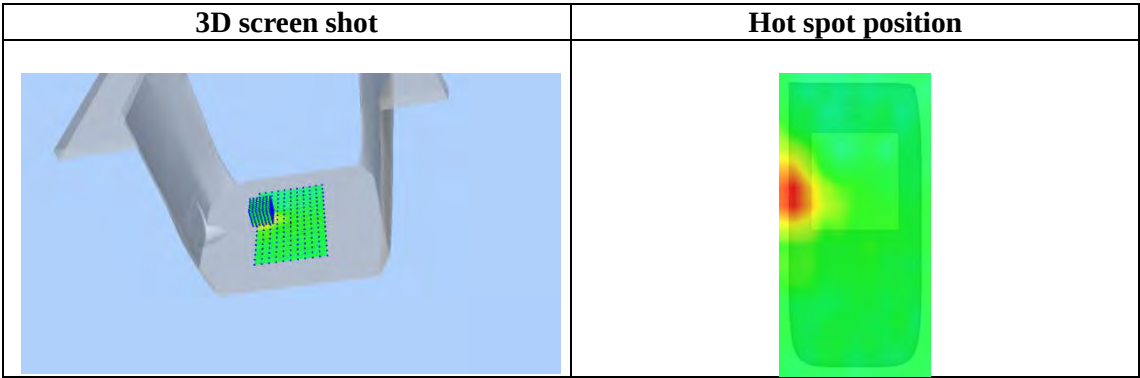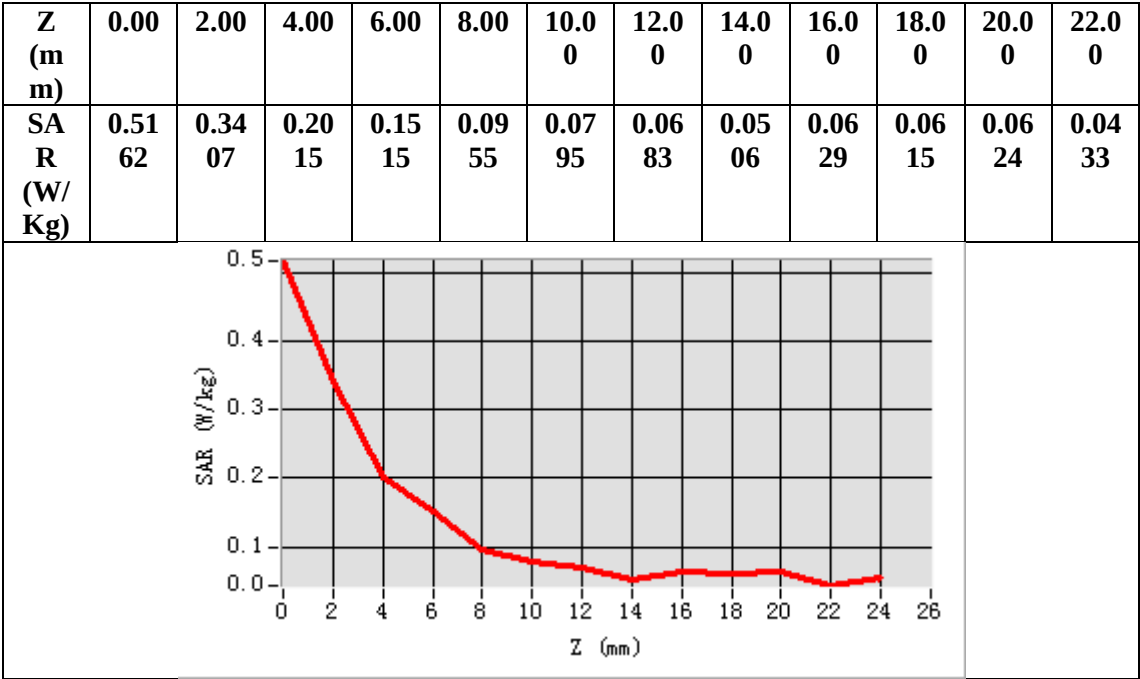

BlueTooth

Test Laboratory: AGC Lab

BT High-Touch- Right

DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 31, 2024


Communication System: BT; Communication System Band: GFSK; Duty Cycle: 1:1; Conv.F=2.16;
Frequency: 2480MHz; Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 4.93 \text{ mho/m}$; $\epsilon_r = 34.32$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 22.6, Liquid temperature ($^{\circ}\text{C}$): 22.6

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GFSK High- Touch- Right /Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$
Configuration/GFSK High- Touch- Right /Zoom Scan: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$



Area Scan	$dx=8\text{mm}$ $dy=8\text{mm}$, $h= 5.00 \text{ mm}$
ZoomScan	$7 \times 7 \times 12$ $dx=4\text{mm}$ $dy=4\text{mm}$ $dz=2\text{mm}$
Phantom	Right head
Device Position	Cheek
Band	BT
Channels	High
Signal	Crest factor: 1.0

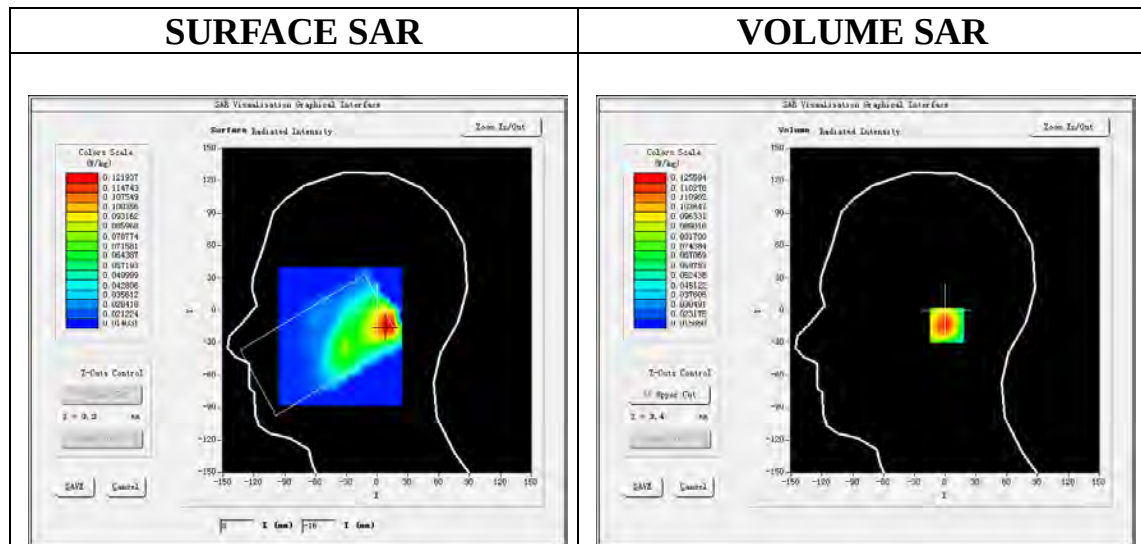

Maximum location: $X=12.00$, $Y=-14.00$

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.069823
SAR 1g (W/Kg)	0.119057

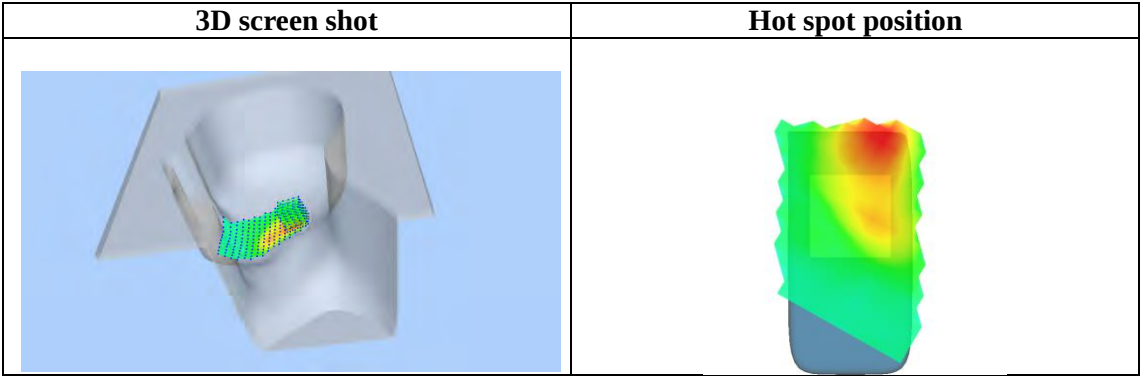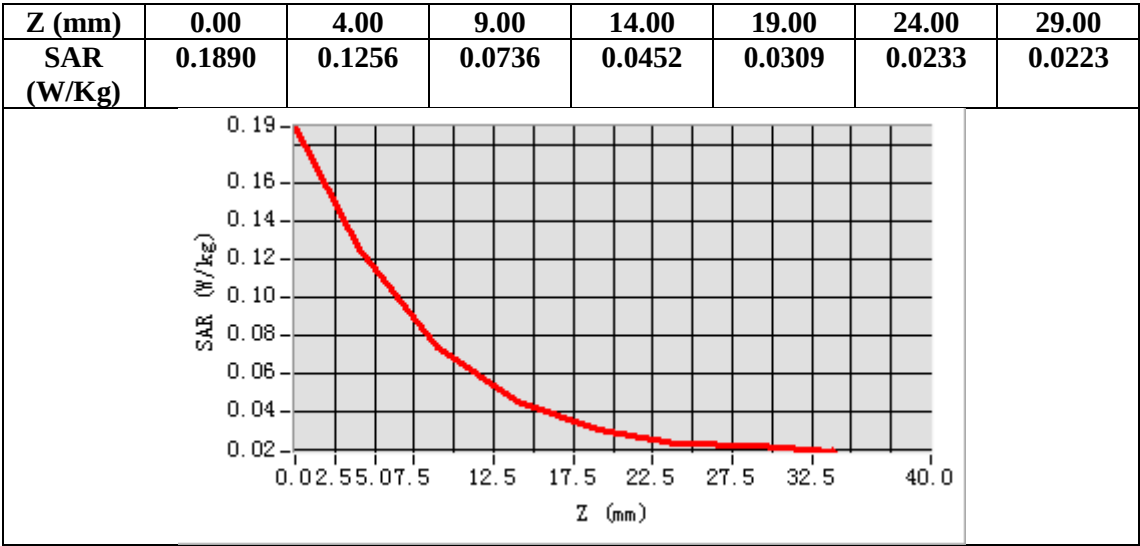

Test Laboratory: AGC Lab
BT High-Front
DUT: 4G SMARTPHONE; Type: MOX 2

Date: May 31, 2024


Communication System: BT; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.16;
Frequency: 2480 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 38.39$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.2, Liquid temperature (°C): 22.0

SATIMO Configuration:

- Probe: SSE2; Calibrated: May 31, 2023; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GFSK High- Body Front/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GFSK High- Body Front/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;



Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body Front
Band	BT
Channels	High
Signal	Crest factor: 1.0

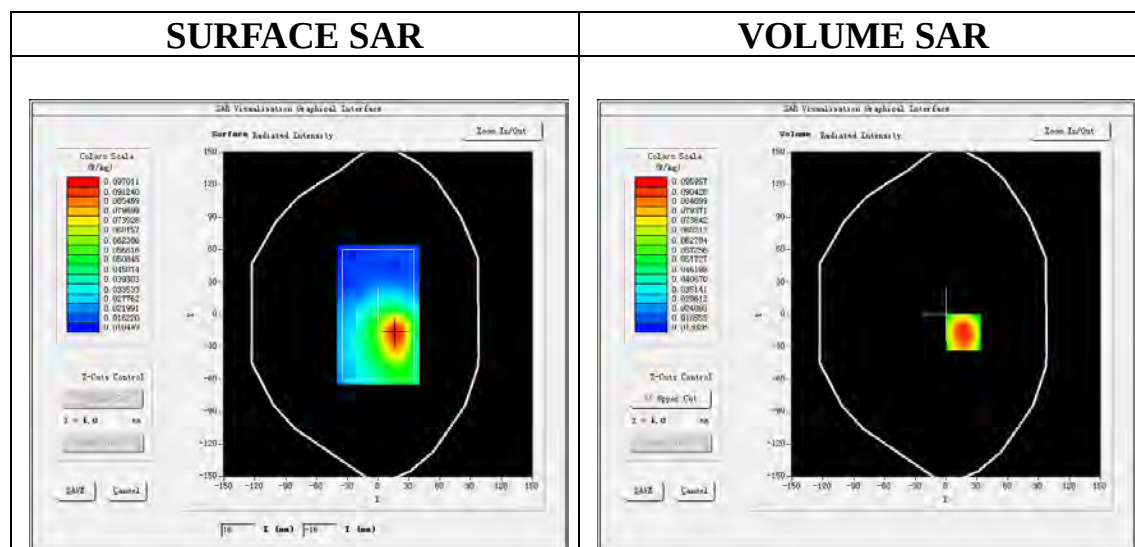

Maximum location: X=17.00, Y=-17.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.057954
SAR 1g (W/Kg)	0.092333

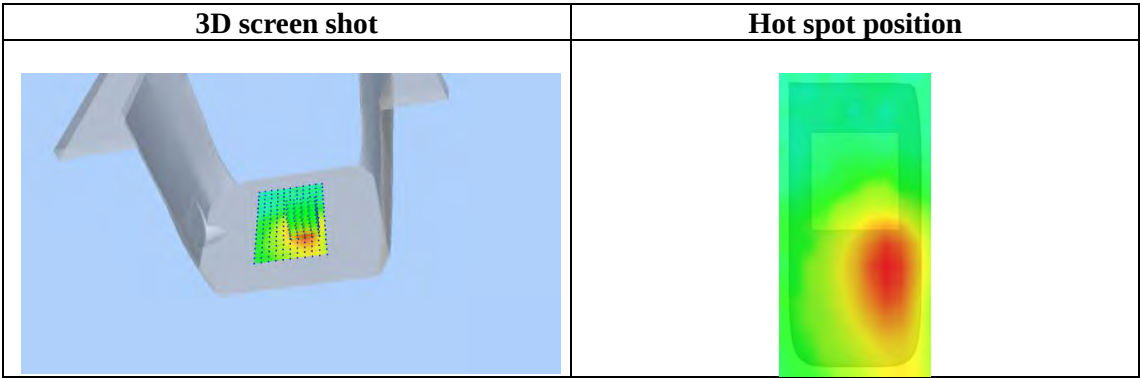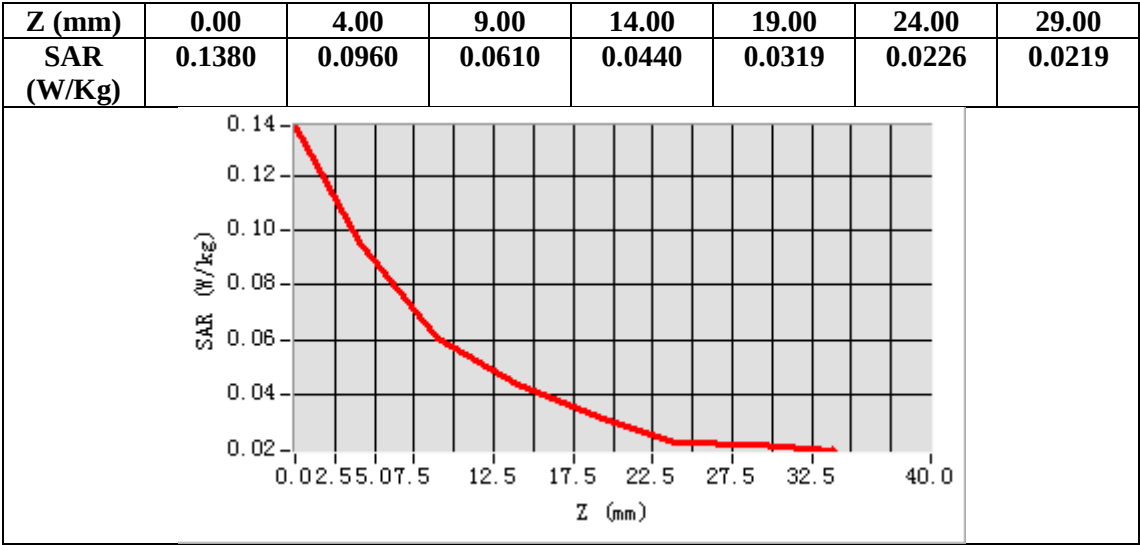


APPENDIX C. TEST SETUP PHOTOGRAPHS

Model: MOJO

Right Touch



Right Tilt

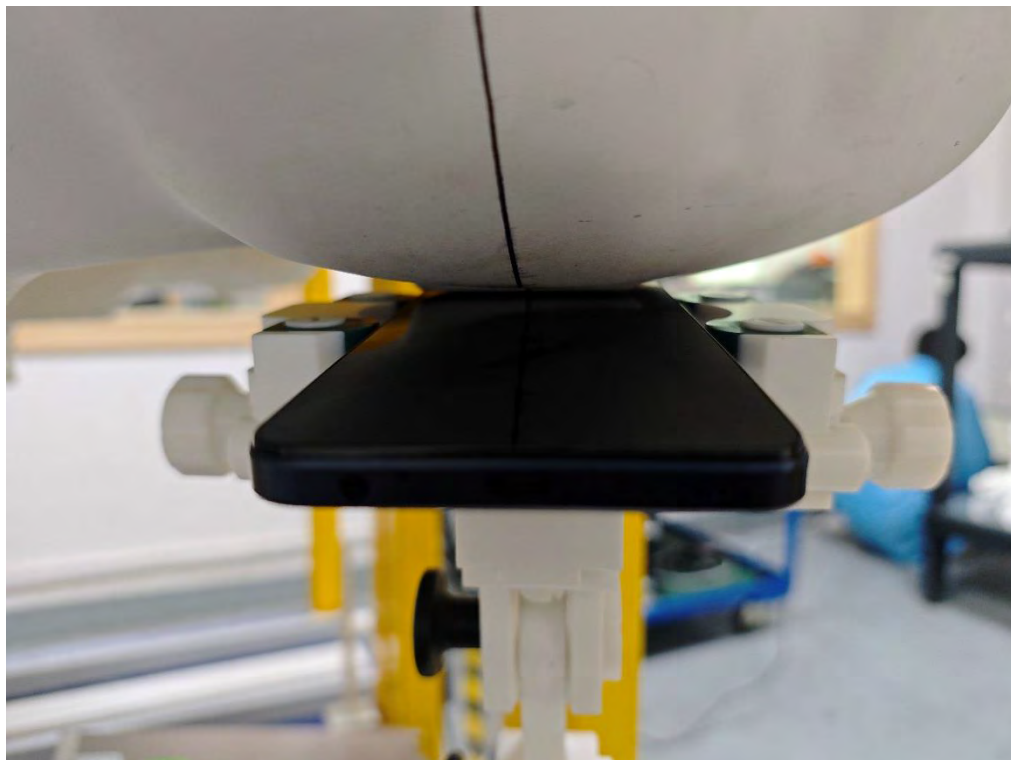

Left Touch




Left Tilt



Body Front side(separation distance is 10mm)



Body Back side(separation distance is 10mm)

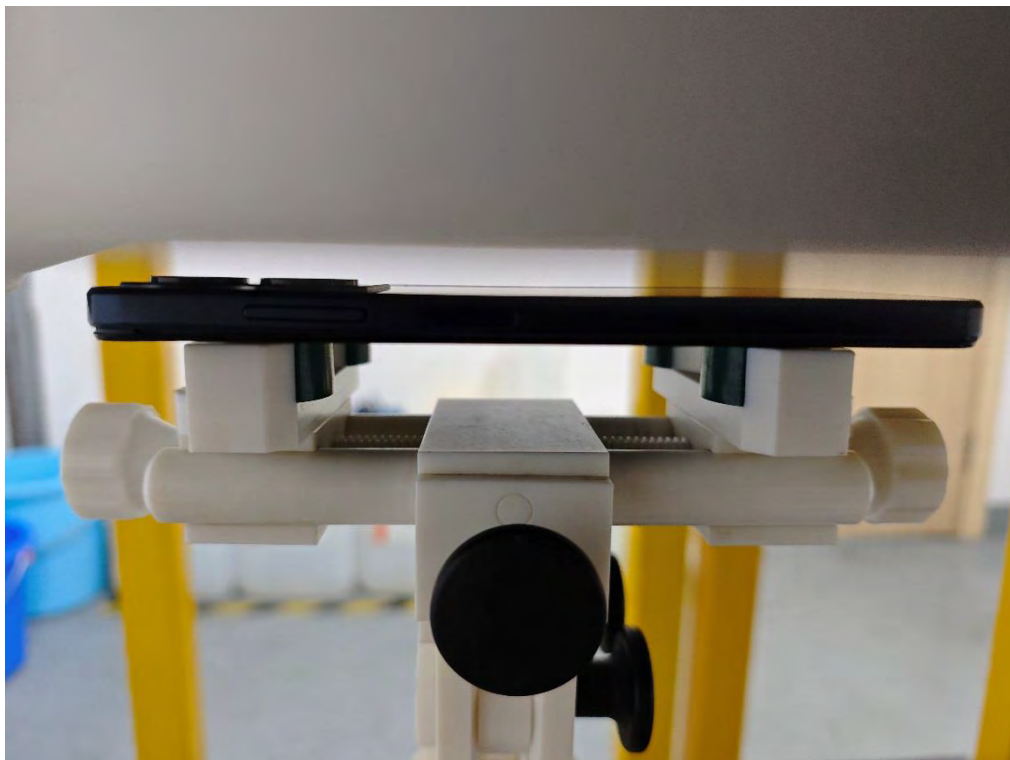

Body Edge 4(Left) (separation distance is 10mm)



Body Edge 2(Right) (separation distance is 10mm)




Body Edge 3(Bottom) (separation distance is 10mm)




Body Top side(separation distance is 10mm)



Model: MOX 2
Right Touch

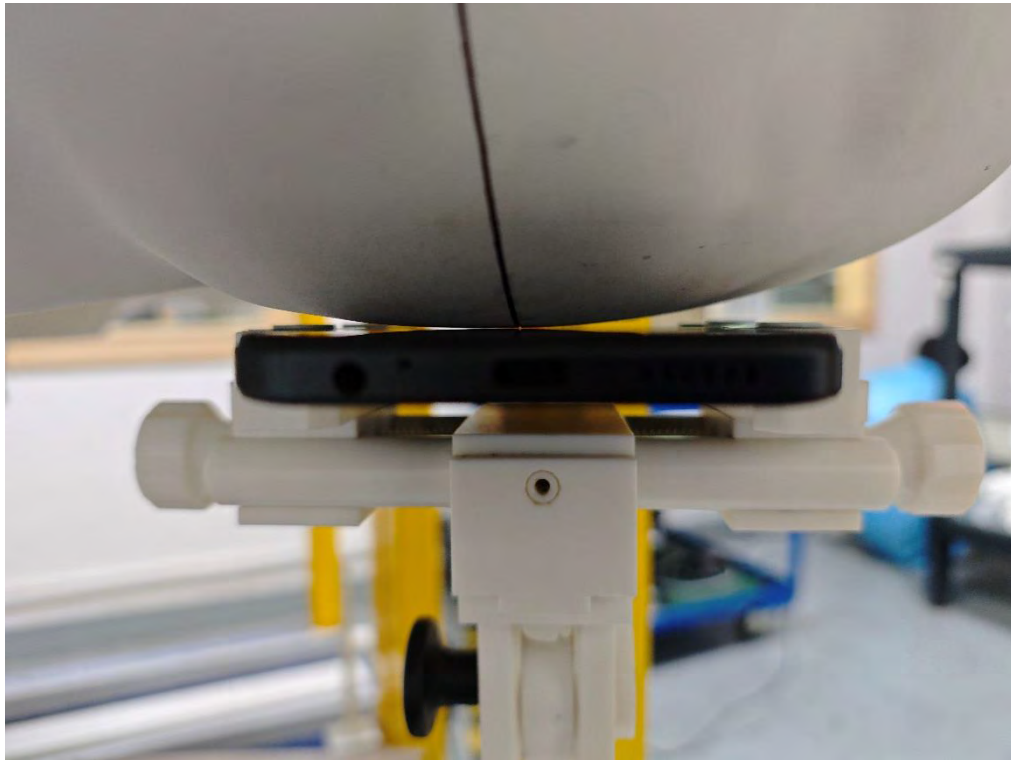

Right Tilt

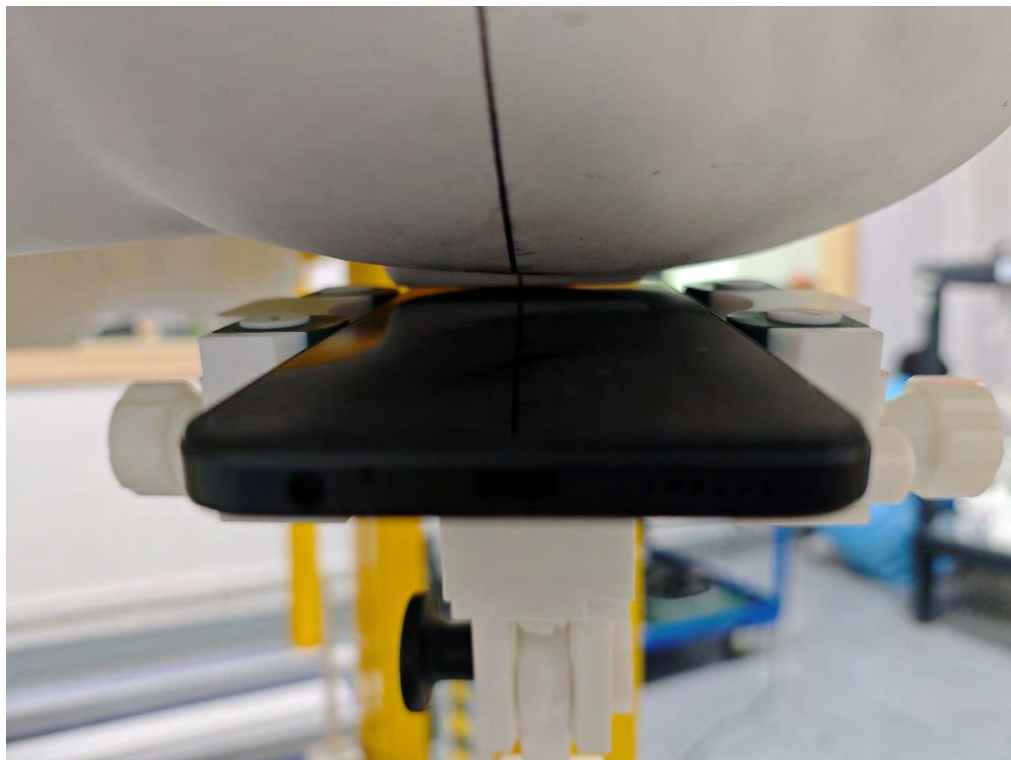

Left Touch



Left Tilt



Body Front side(separation distance is 10mm)



Body Back side(separation distance is 10mm)



Body Edge 4(Left) (separation distance is 10mm)



Body Edge 2(Right) (separation distance is 10mm)



Body Edge 3(Bottom) (separation distance is 10mm)






Body Top side(separation distance is 10mm)




DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note : The position used in the measurement were according to IEEE 1528-2013

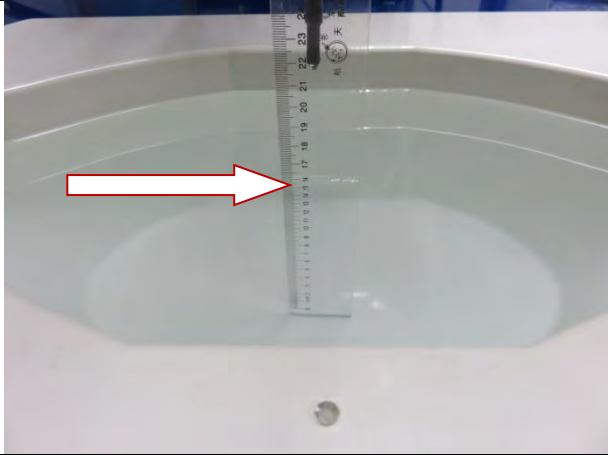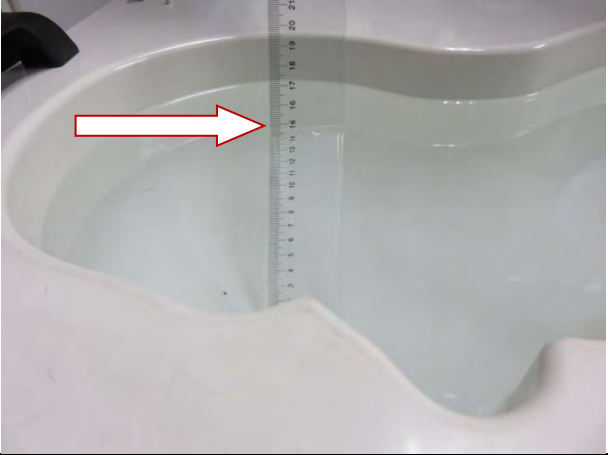750MHz head  A photograph showing a ruler placed vertically inside a white phantom head. A red arrow points to the liquid level, which is approximately at the 15 cm mark on the ruler.	750MHz body  A photograph showing a ruler placed vertically inside a white phantom body. A red arrow points to the liquid level, which is approximately at the 18 cm mark on the ruler.
835MHz head  A photograph showing a ruler placed vertically inside a white phantom head. A red arrow points to the liquid level, which is approximately at the 15 cm mark on the ruler.	835MHz body  A photograph showing a ruler placed vertically inside a white phantom body. A red arrow points to the liquid level, which is approximately at the 18 cm mark on the ruler.
1900MHz head  A photograph showing a ruler placed vertically inside a white phantom head. A red arrow points to the liquid level, which is approximately at the 15 cm mark on the ruler.	1900MHz body  A photograph showing a ruler placed vertically inside a white phantom body. A red arrow points to the liquid level, which is approximately at the 18 cm mark on the ruler.

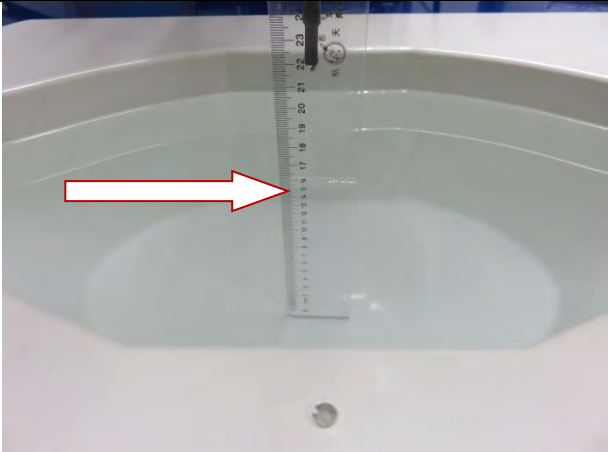1750MHz head  A photograph showing a white, irregularly shaped object (likely a head model) with a ruler placed vertically against its side. A red arrow points to the ruler at approximately the 15 cm mark.	1750MHz body  A photograph showing a white, irregularly shaped object (likely a body model) with a ruler placed vertically against its side. A red arrow points to the ruler at approximately the 18 cm mark.
2450MHz head  A photograph showing a white, irregularly shaped object (likely a head model) with a ruler placed vertically against its side. A red arrow points to the ruler at approximately the 15 cm mark.	2450MHz body  A photograph showing a white, irregularly shaped object (likely a body model) with a ruler placed vertically against its side. A red arrow points to the ruler at approximately the 18 cm mark.

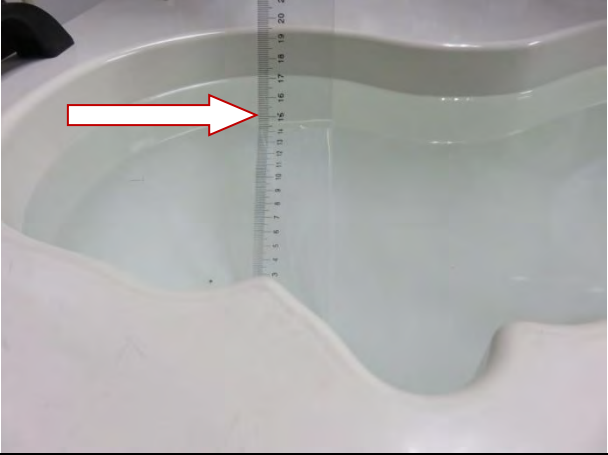2600MHz head  A photograph showing a measurement of the head of a white ceramic bathtub. A vertical ruler is placed against the side of the tub. A red arrow points to the measurement line on the ruler, which is approximately at the 15 cm mark.	2600MHz body  A photograph showing a measurement of the body of a white ceramic bathtub. A vertical ruler is placed against the side of the tub. A red arrow points to the measurement line on the ruler, which is approximately at the 18 cm mark.
5000MHz head  A photograph showing a measurement of the head of a white ceramic bathtub. A vertical ruler is placed against the side of the tub. A red arrow points to the measurement line on the ruler, which is approximately at the 15 cm mark.	5000MHz body  A photograph showing a measurement of the body of a white ceramic bathtub. A vertical ruler is placed against the side of the tub. A red arrow points to the measurement line on the ruler, which is approximately at the 18 cm mark.

APPENDIX D. CALIBRATION DATA

Refer to Attached files.

----END OF REPORT----