


4.5.7 TEST RESULTS


EUT	Mini- PCI CARD	MODEL	WLL4030
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
MODE	CCK	TESTED BY	Leo Hung

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.17	8	PASS
6	2437	-7.54	8	PASS
11	2462	-7.48	8	PASS

CH1

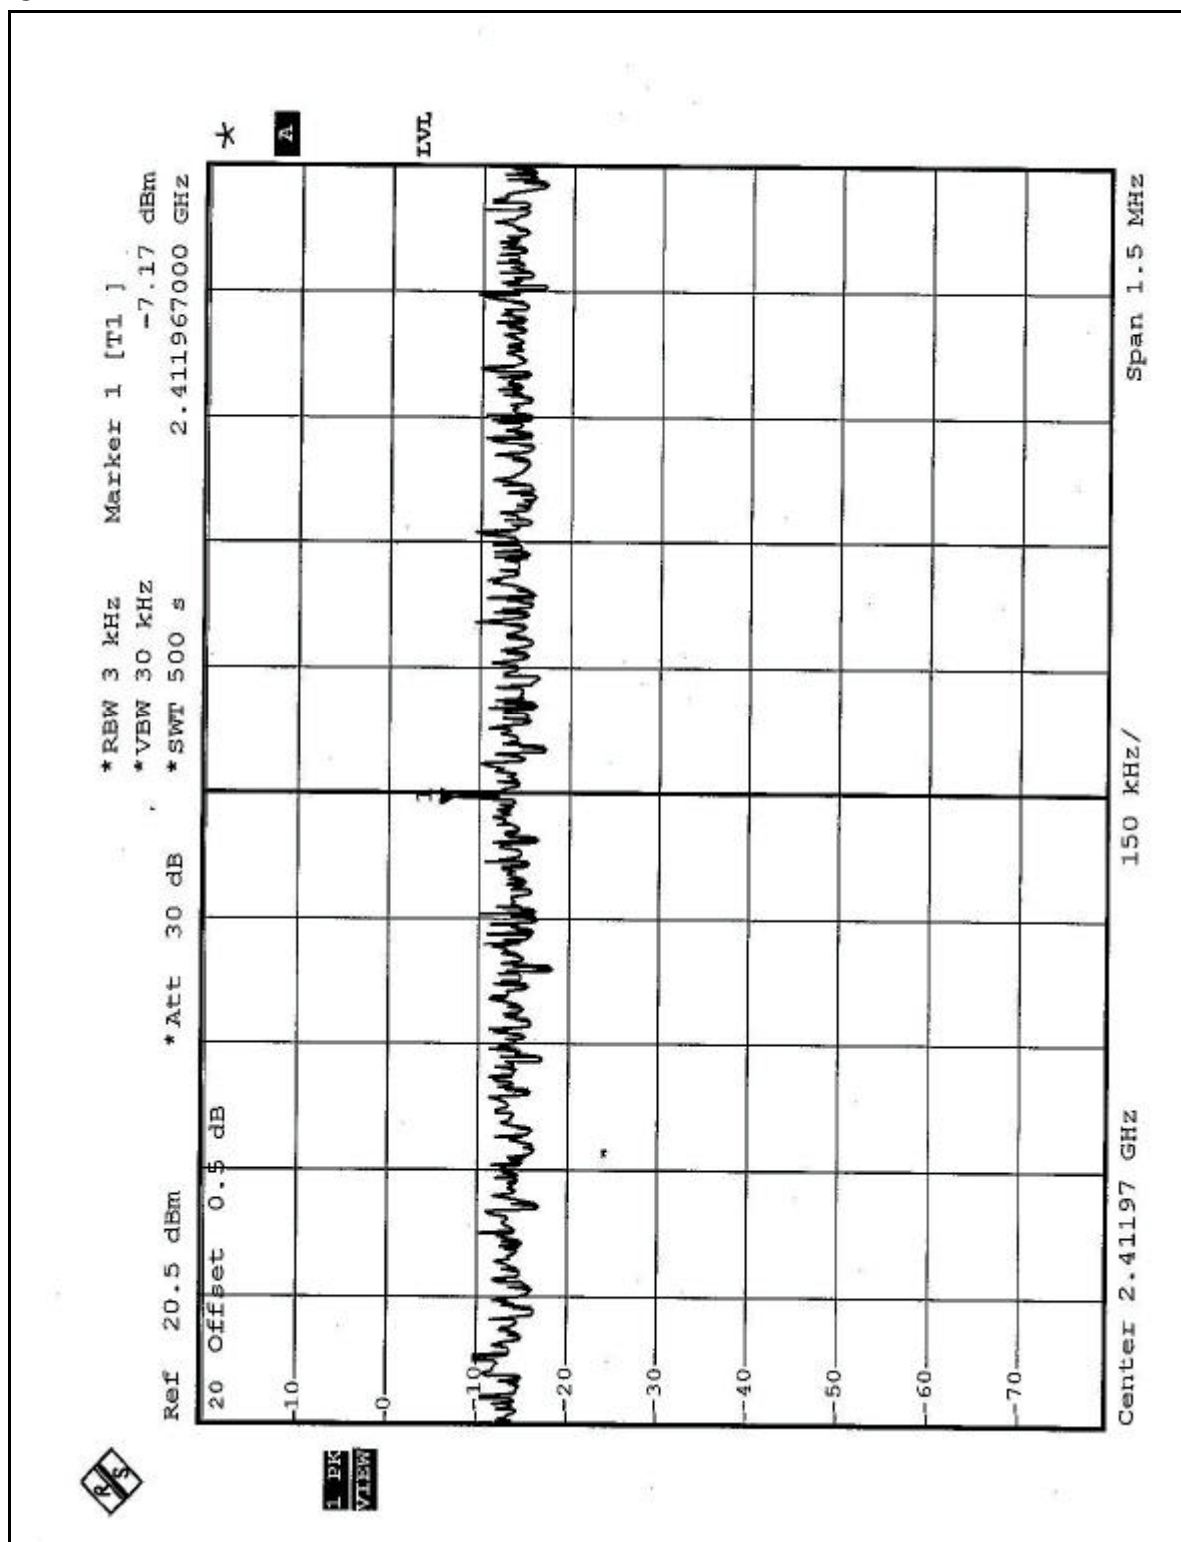

CH6

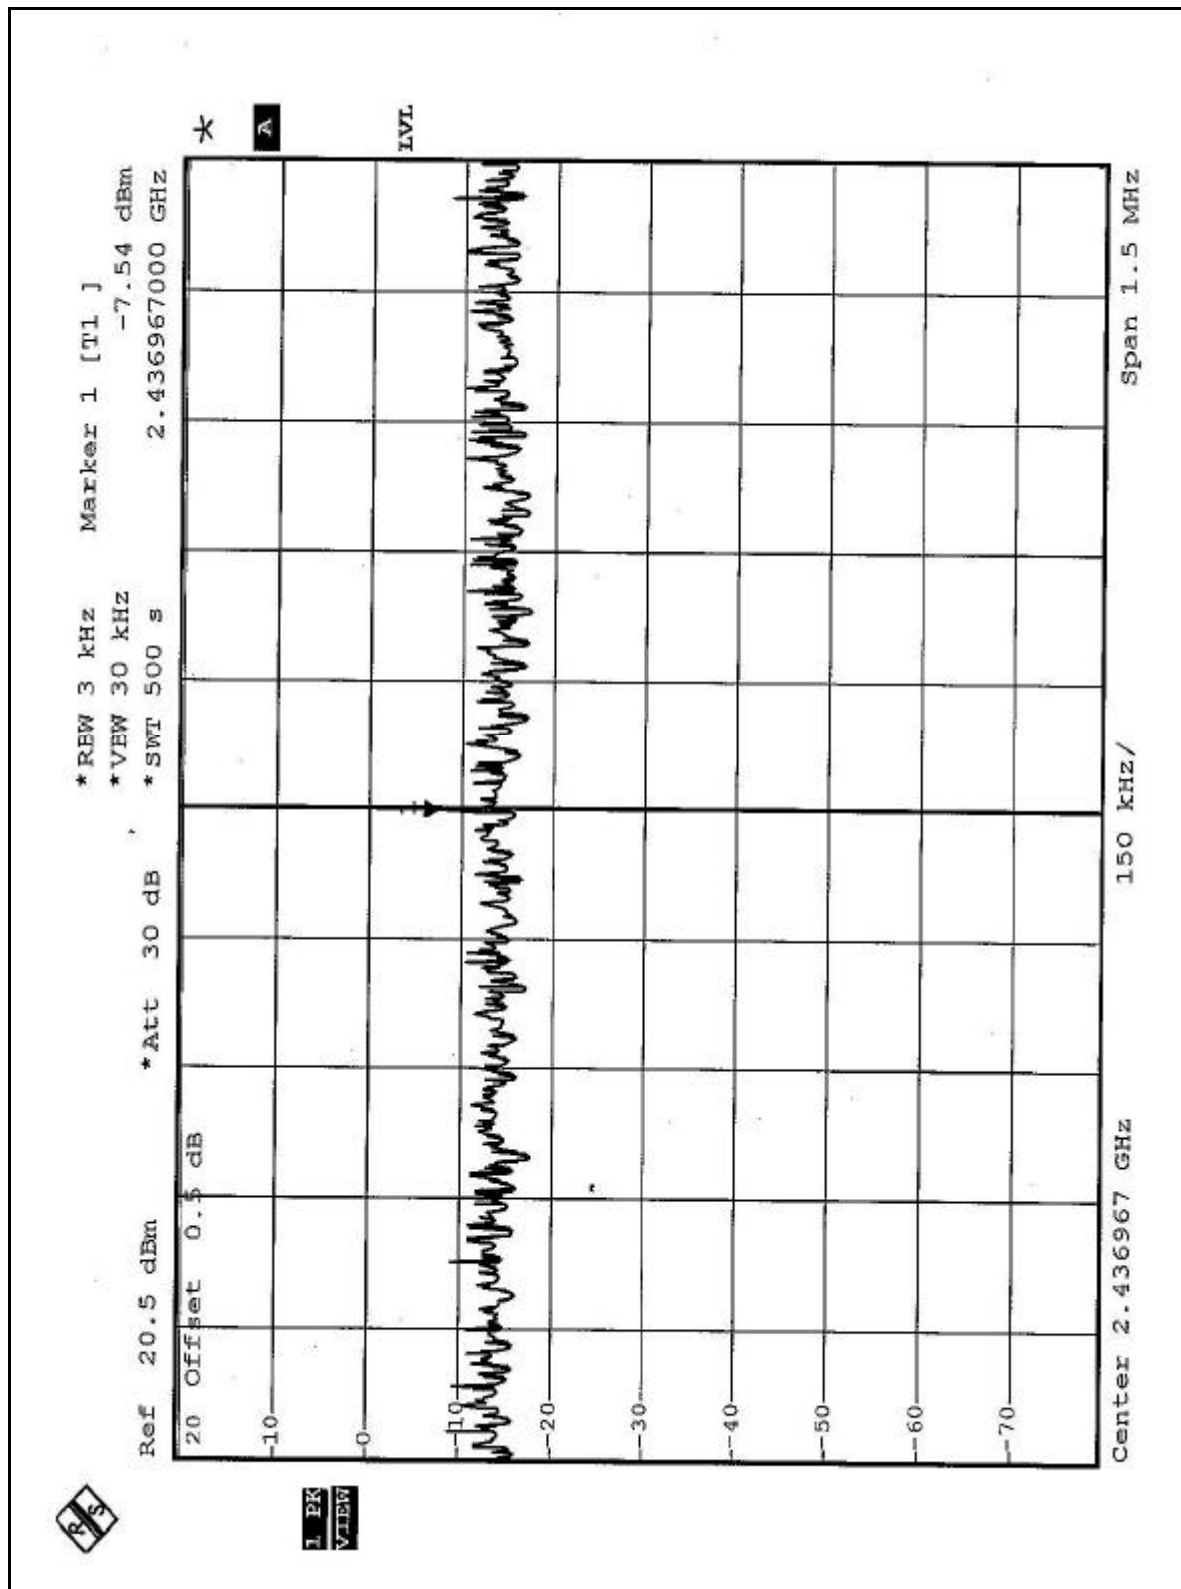


* RBW 3 kHz Marker 1 [T1] -7.48 dBm
 * VBW 30 kHz
 * Att 30 dB * SWT 500 s 2.461970000 GHz
 Ref 20.5 dBm
 20 Offset 0.5 dB
 -10
 -20
 -30
 -40
 -50
 -60
 -70
 150 kHz /
 Span 1.5 MHz
 Center 2.46197 GHz
 * A
 LVL


EUT	Mini- PCI CARD	MODEL	WLL4030
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
MODE	OFDM	TESTED BY	Leo Hung

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.98	8	PASS
6	2437	-11.28	8	PASS
11	2462	-11.19	8	PASS


CH1

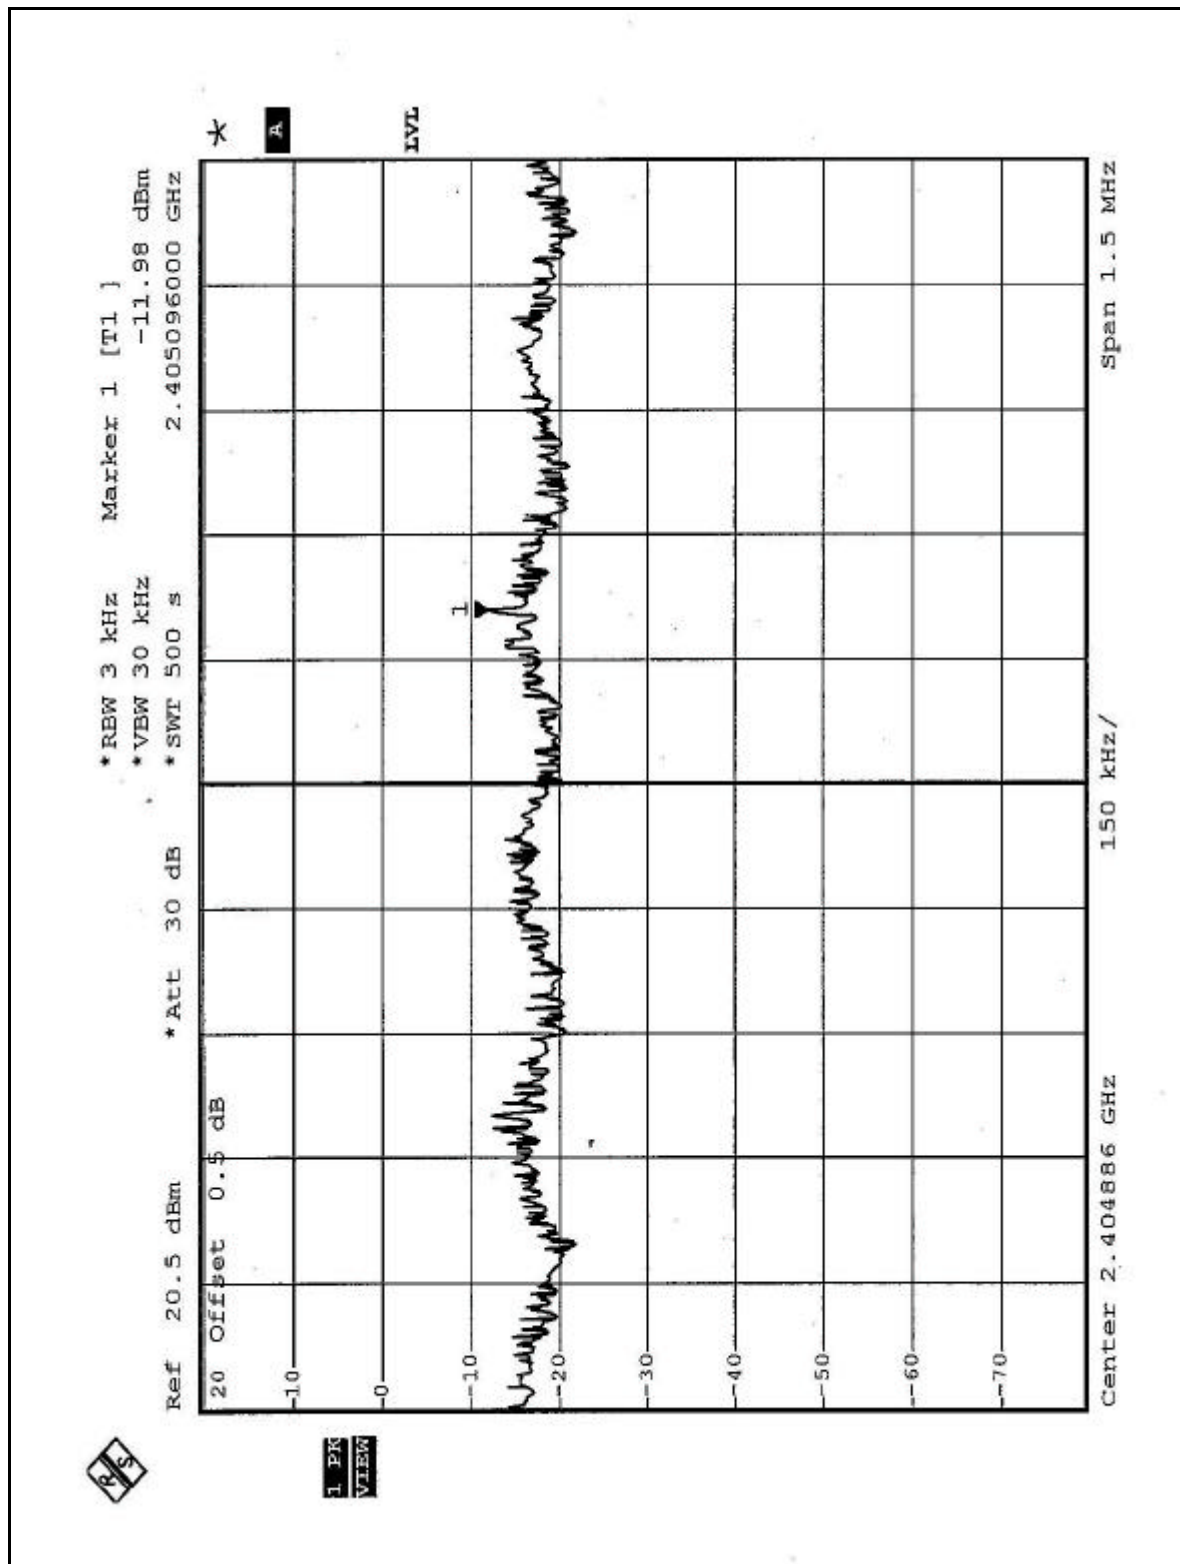

CH6

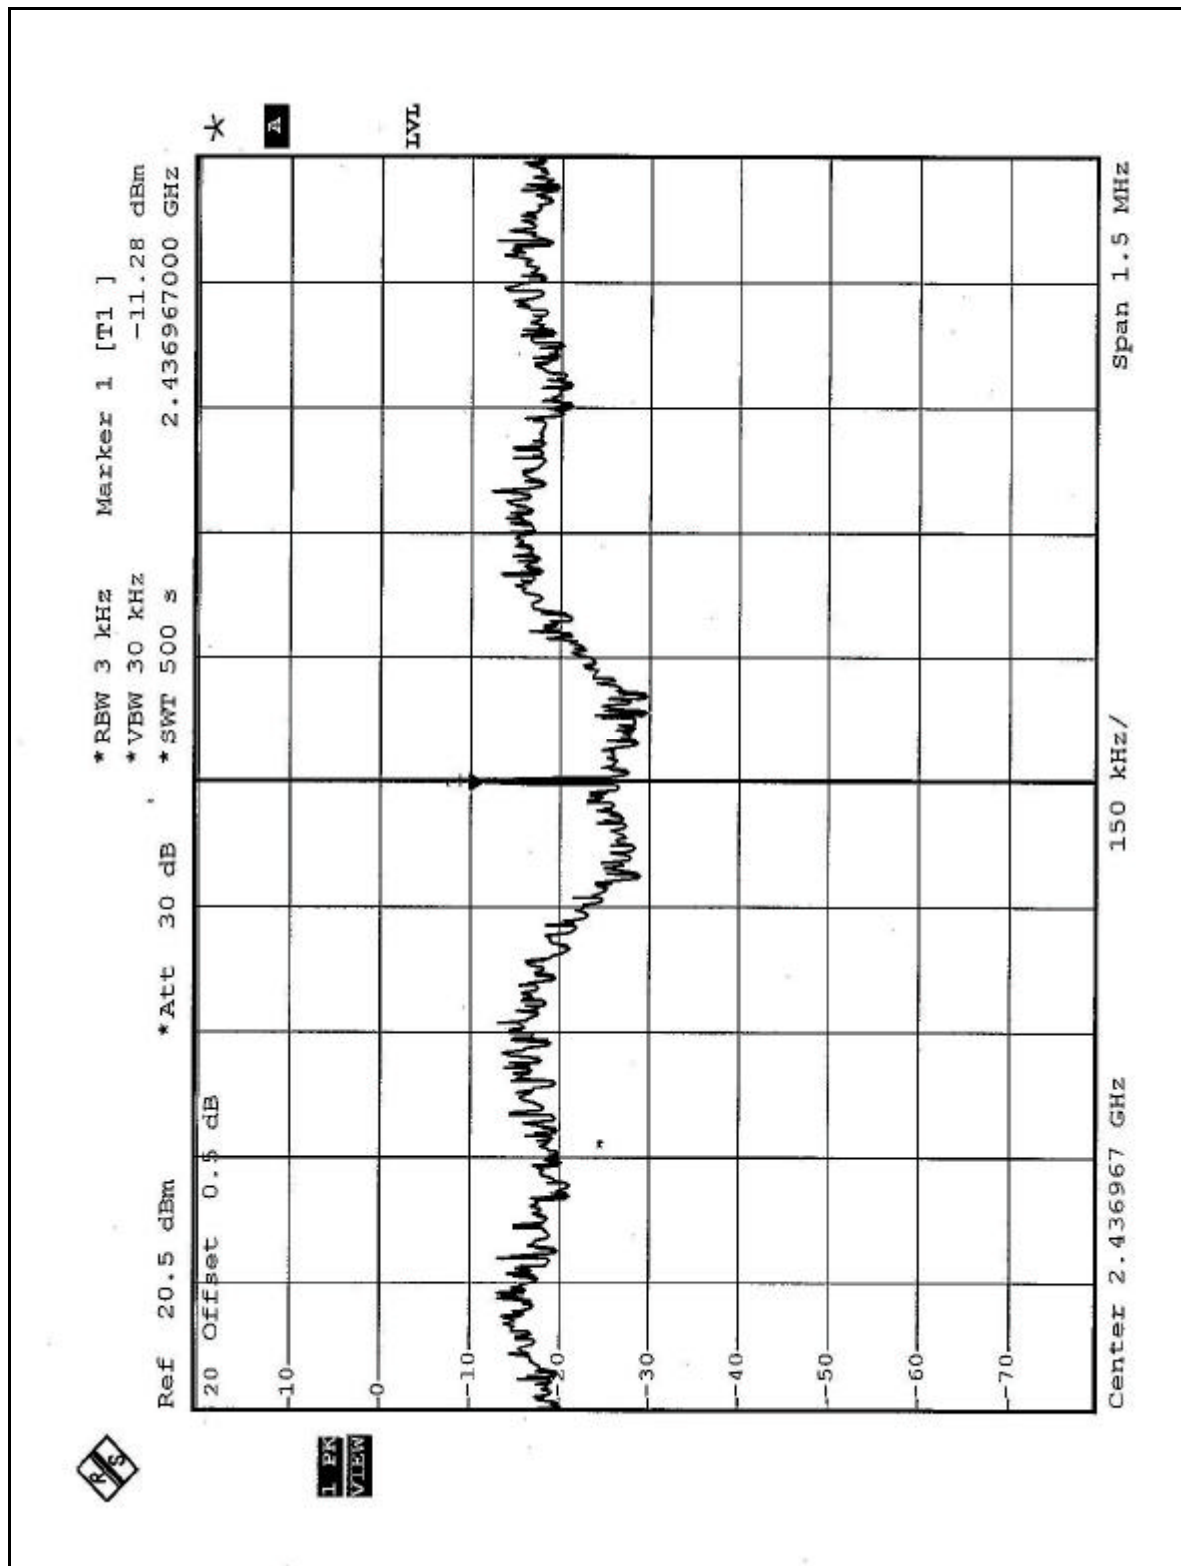

CH11

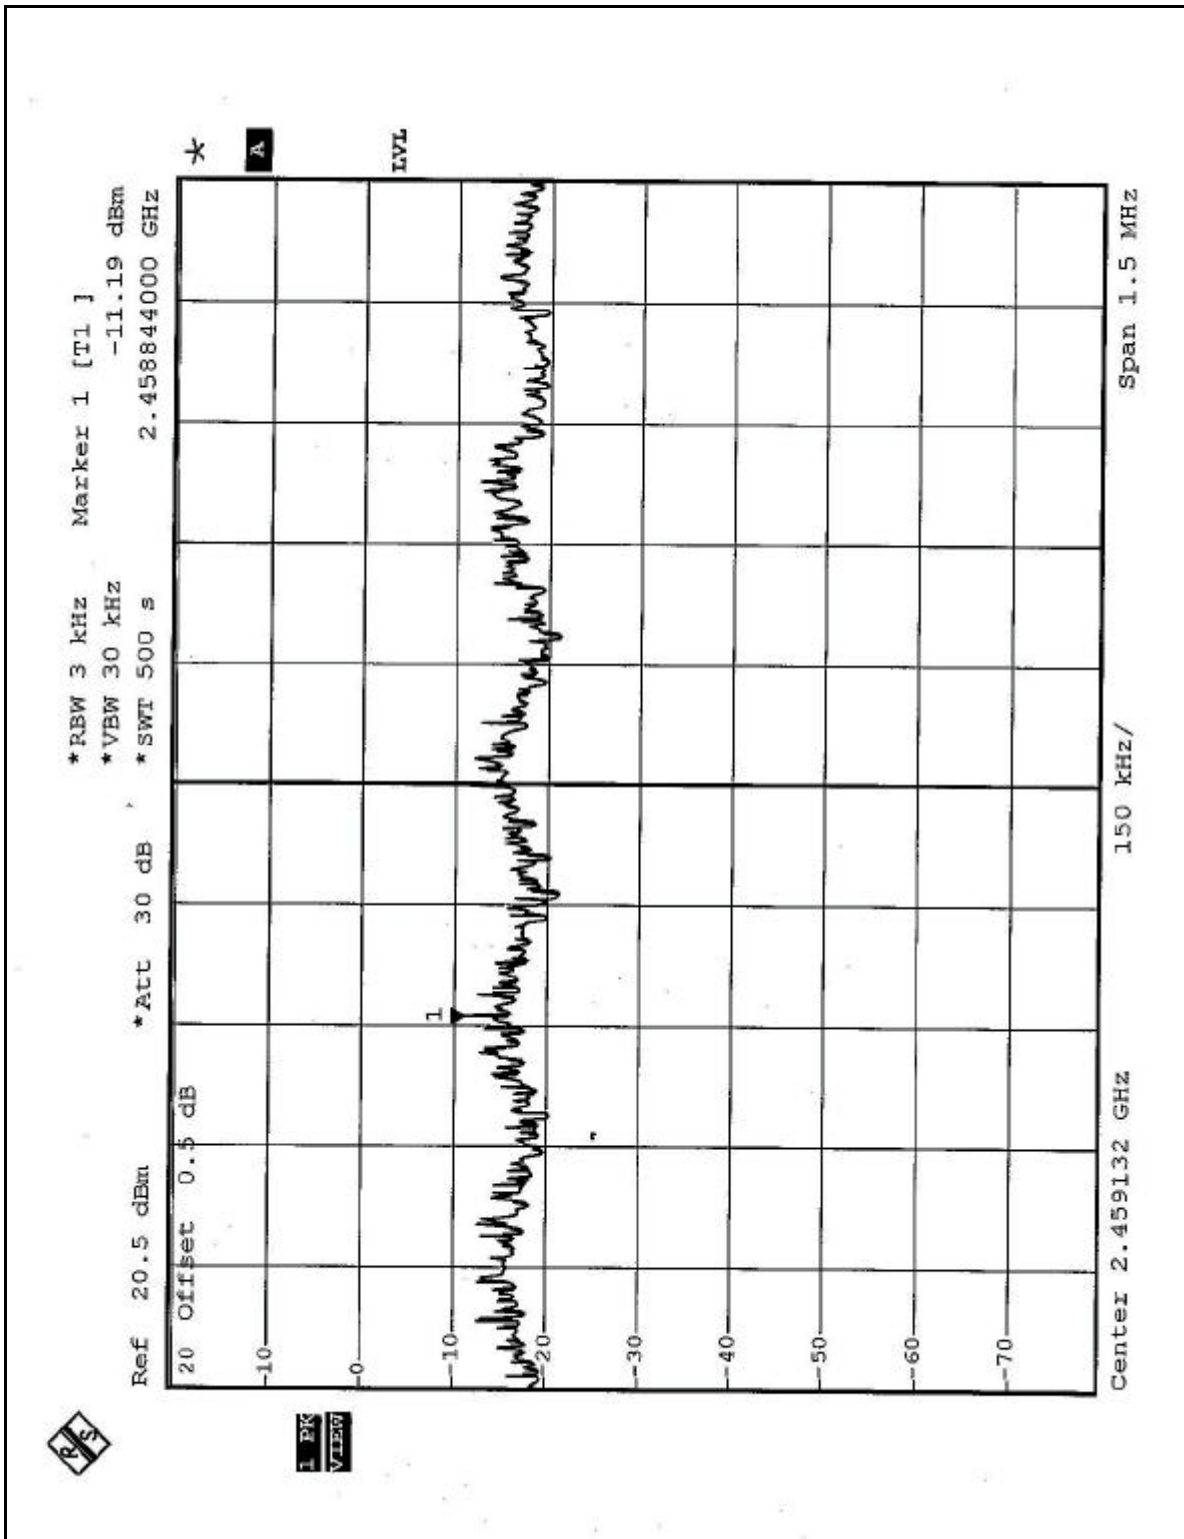

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz and 10kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following 8 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).


NOTE 1: The band edge emission plot of CCK technique on following page 1 ~ 2 show 51.40dB delta between carrier maximum power and local maximum emission in restrict band (2.3867GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 100.64dBuV/m, so the maximum field strength in restrict band is $100.64 - 51.40 = 49.24$ dBuV/m which is under 54dBuV/m limit.


OTE 2: The band edge emission plot of CCK technique on following page 3 ~ 4 show 51.28dB delta between carrier maximum power and local maximum emission in restrict band (2.4873GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.37dBuV/m, so the maximum field strength in restrict band is $100.37 - 51.28 = 49.09$ dBuV/m which is under 54dBuV/m limit.


NOTE 3: The band edge emission plot of OFDM technique on following page 5 ~ 6 show 45.35dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 97.23dBuV/m, so the maximum field strength in restrict band is $97.23 - 45.35 = 51.88$ dBuV/m which is under 54dBuV/m limit.


NOTE 4: The band edge emission plot of OFDM technique on following page 7 ~ 8 show 46.27dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 97.03dBuV/m, so the maximum field strength in restrict band is $97.03 - 46.27 = 50.76$ dBuV/m which is under 54dBuV/m limit.




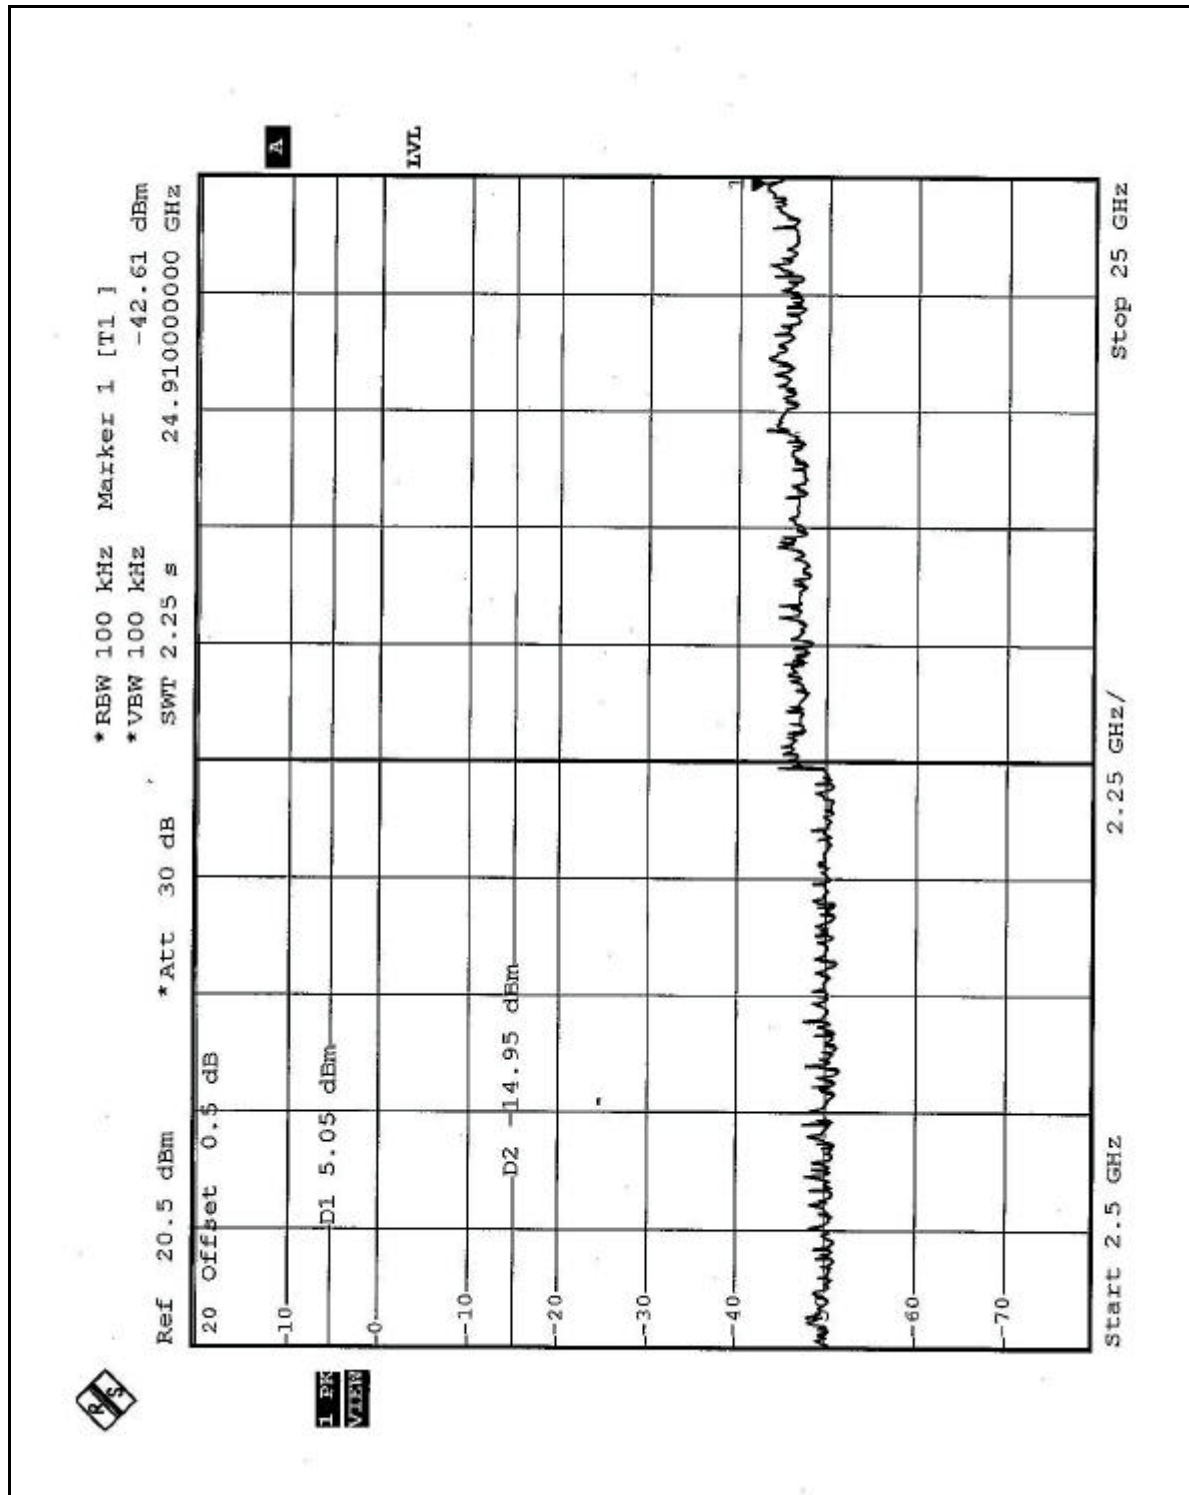


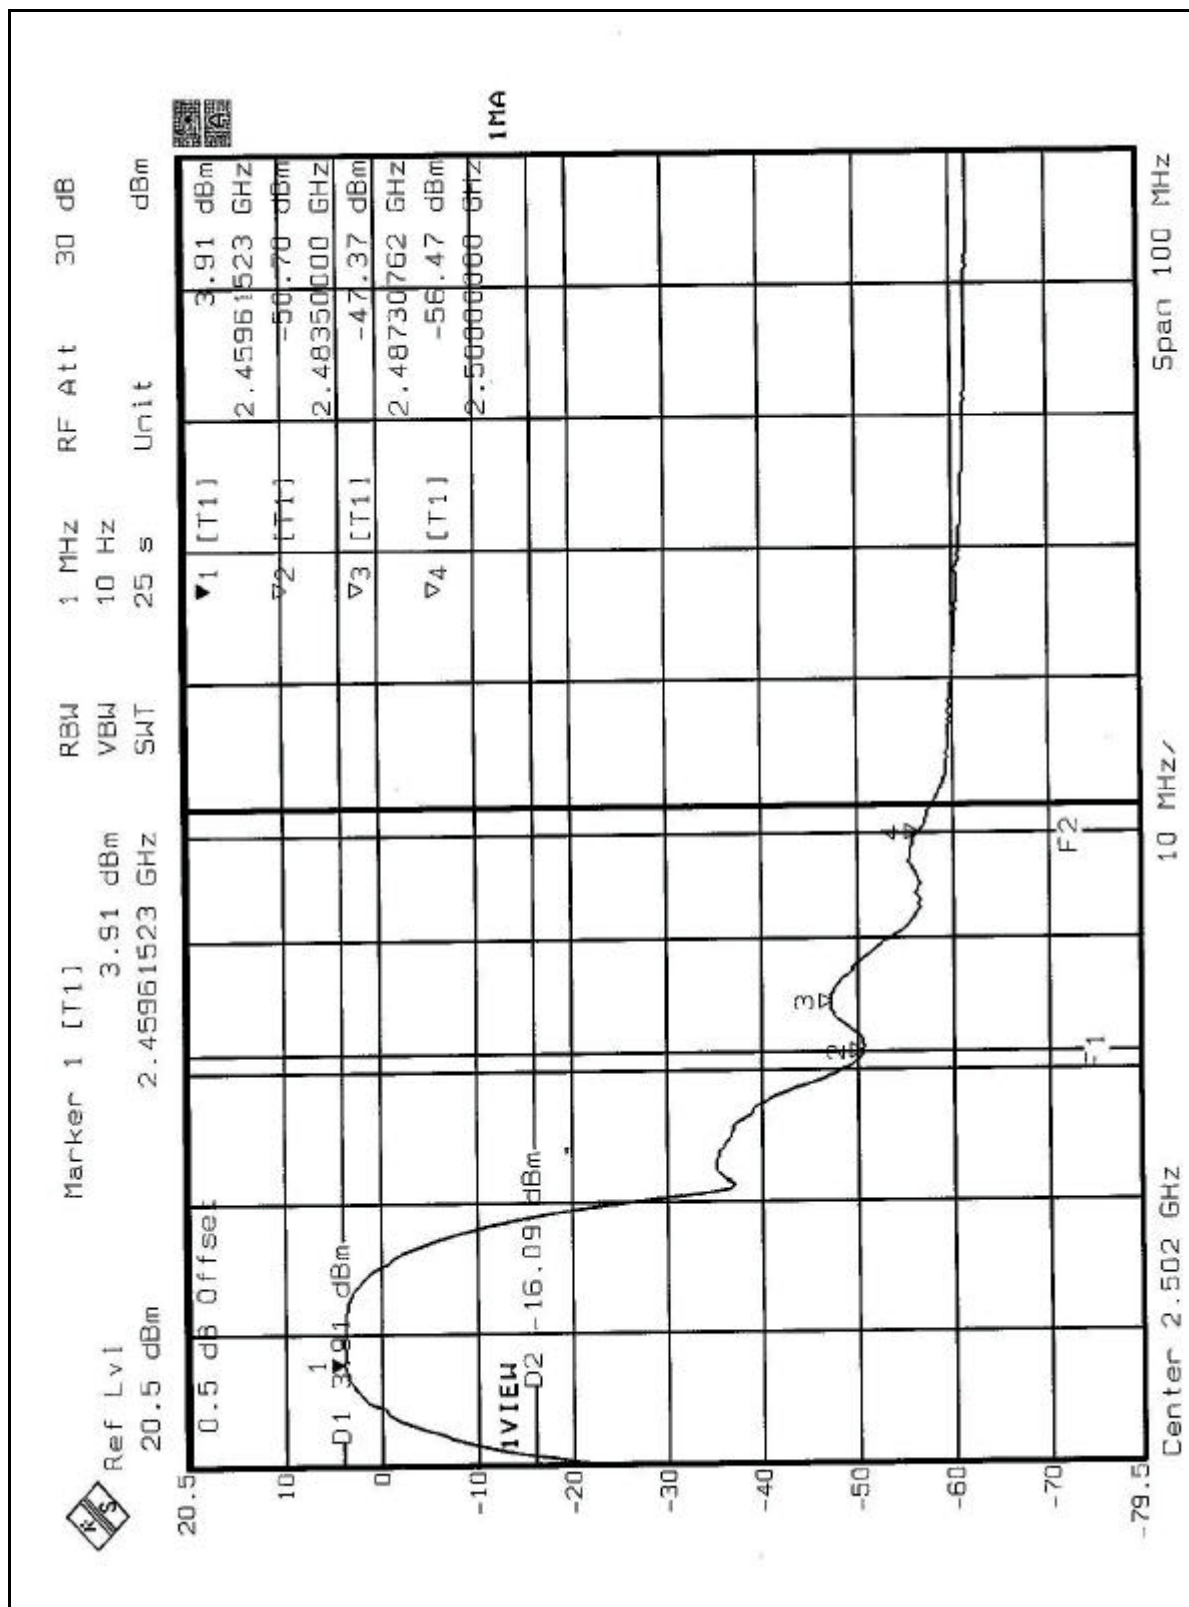


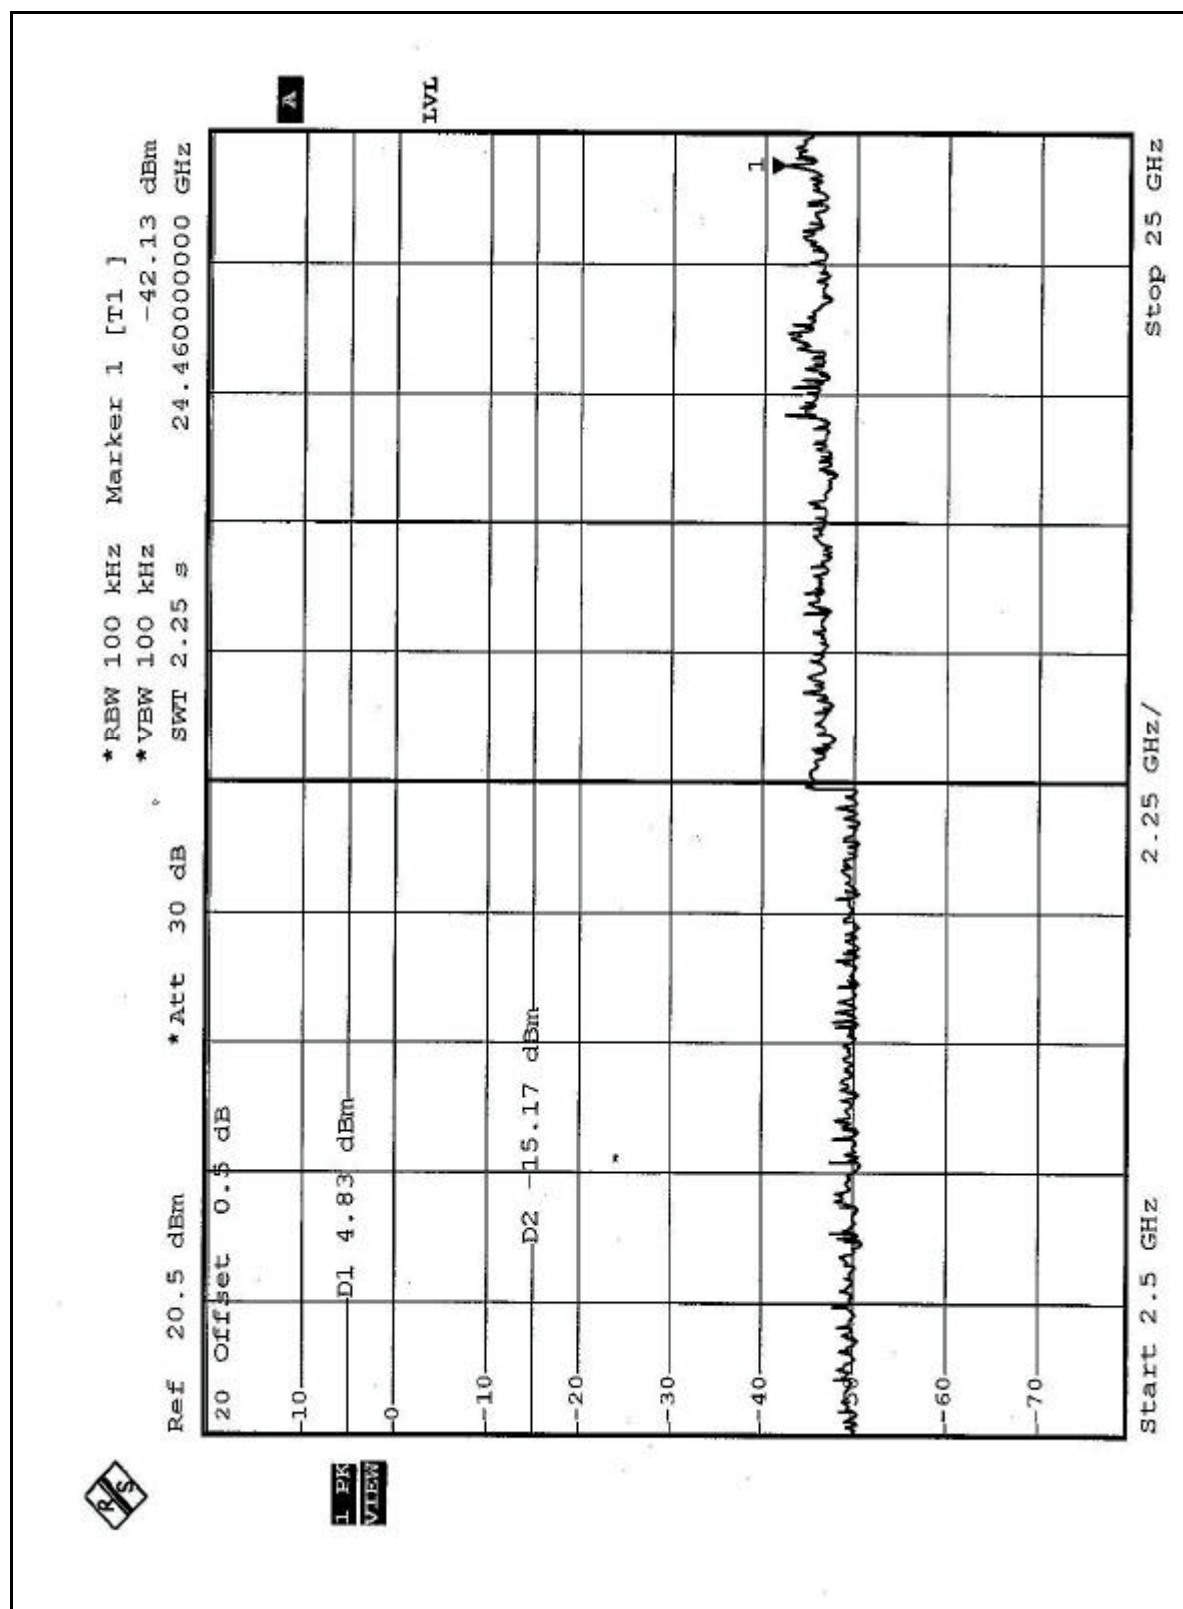

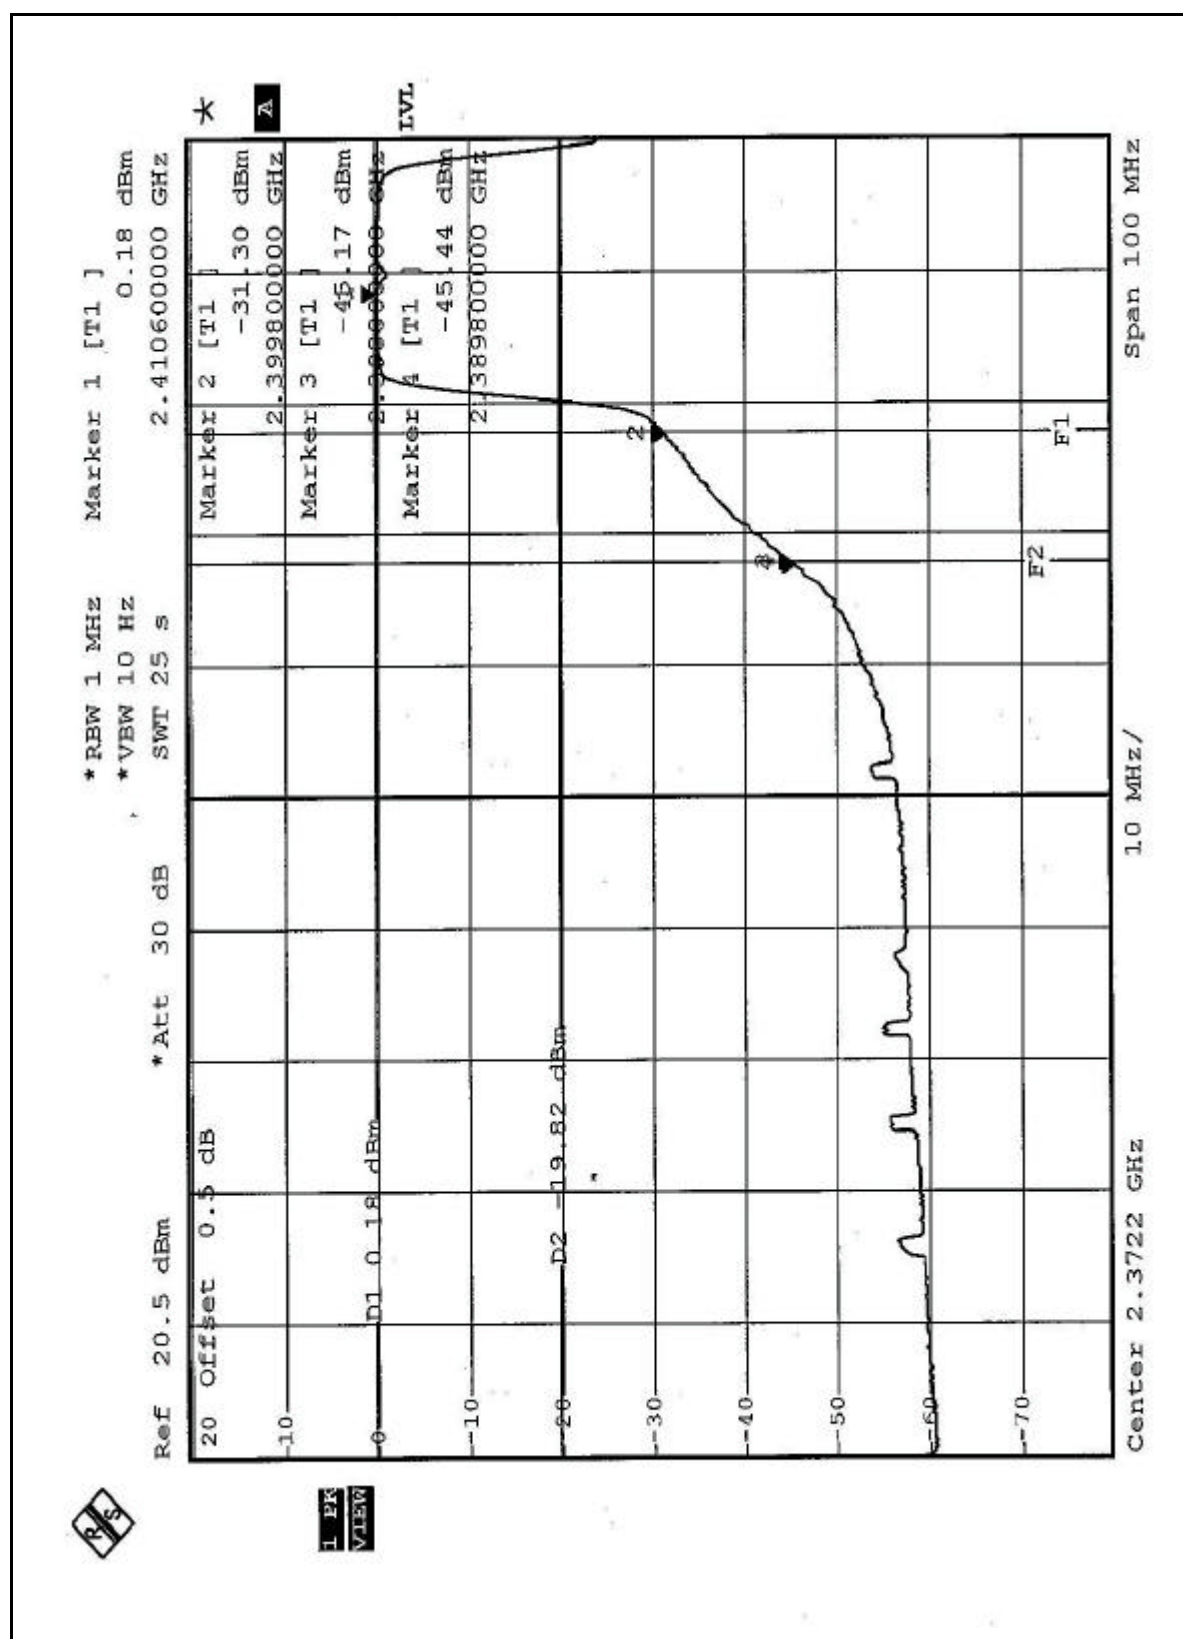

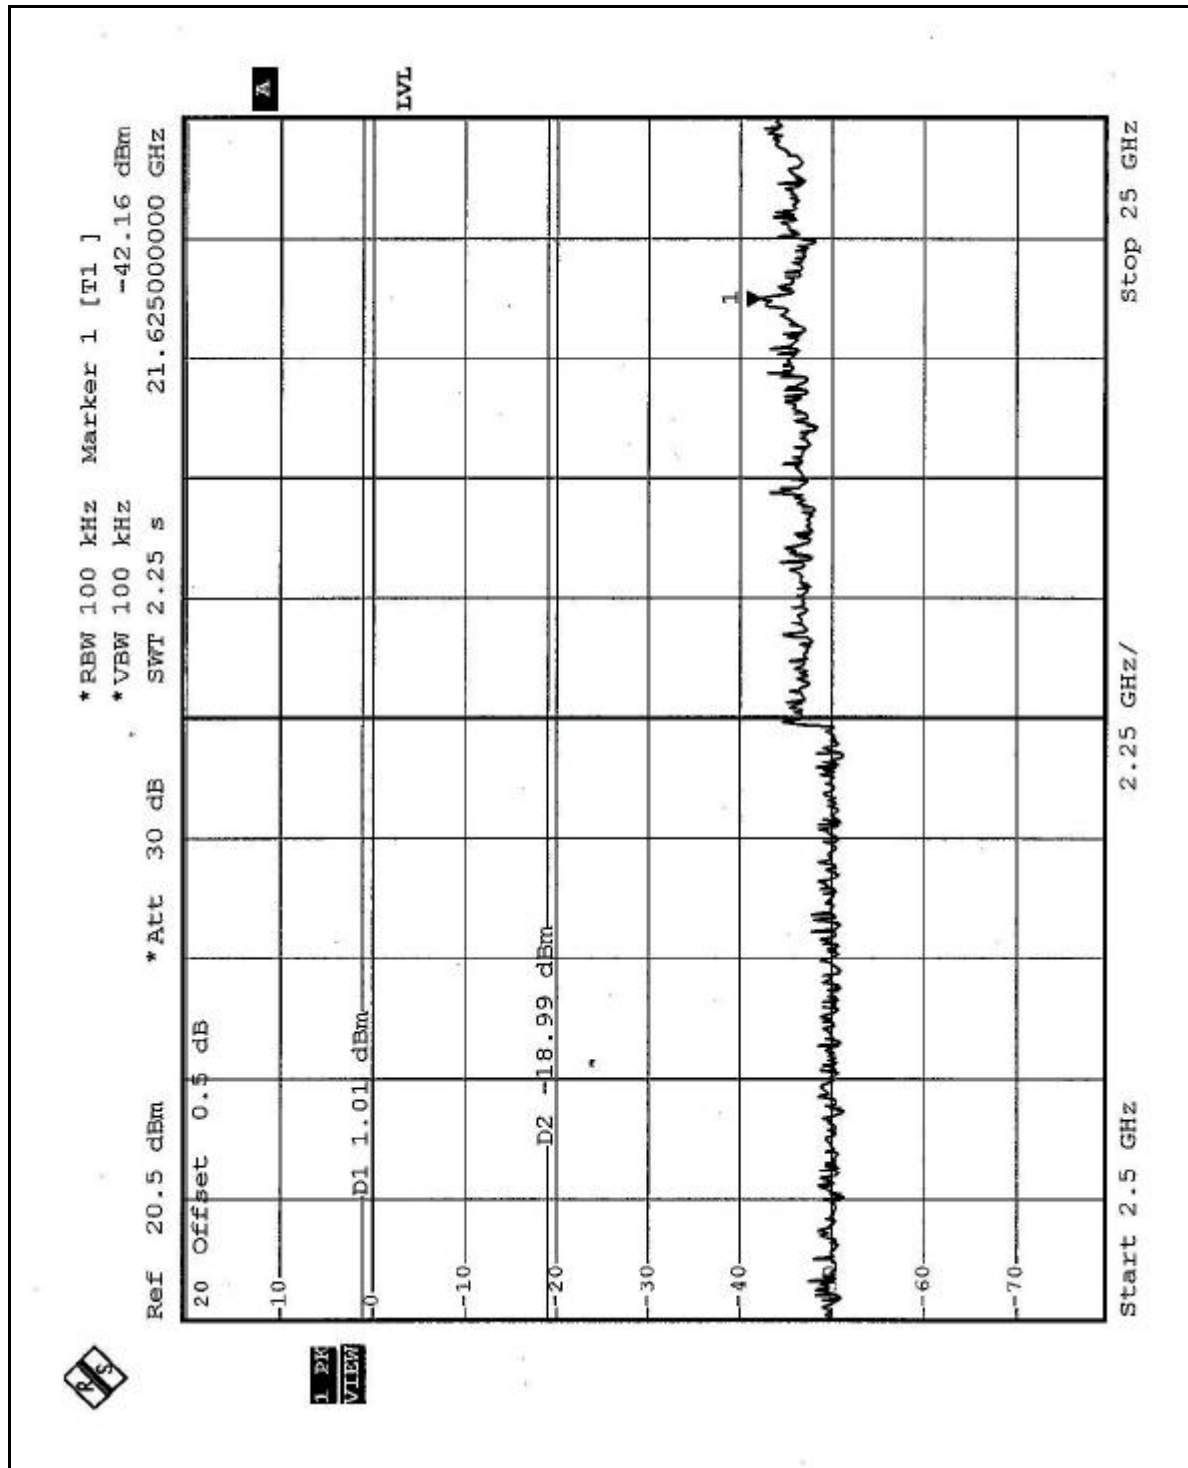

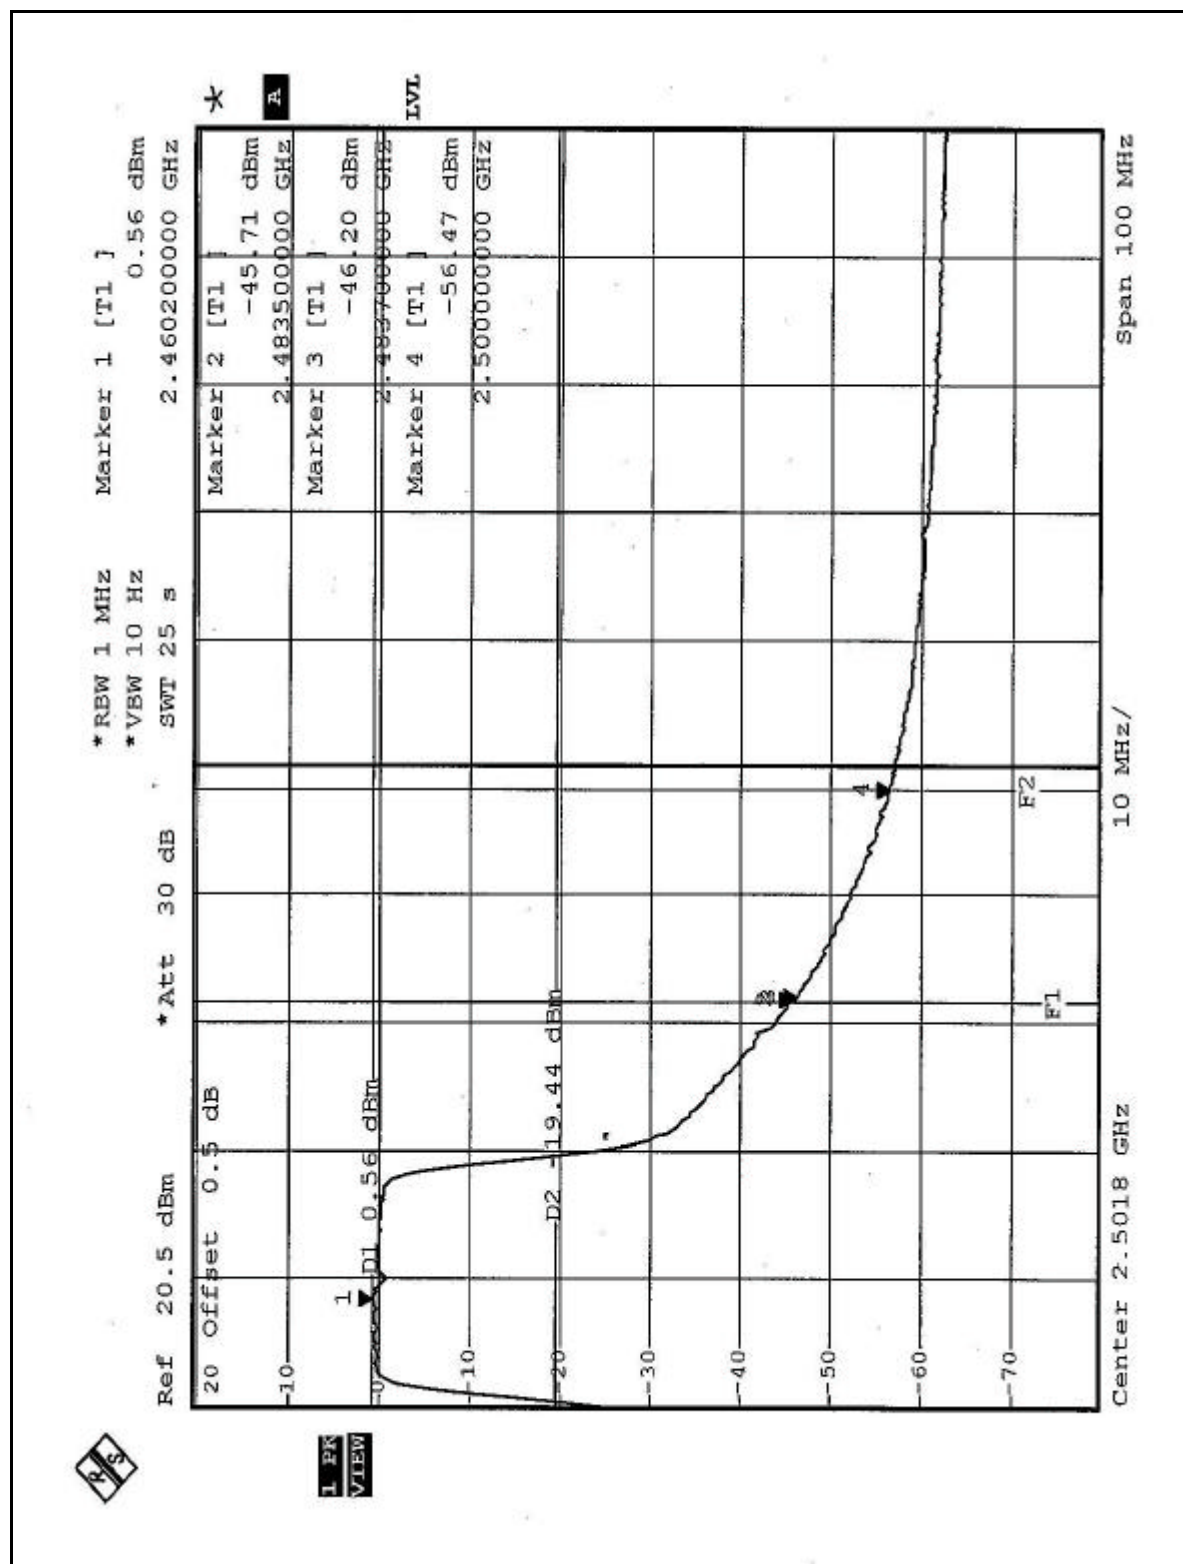

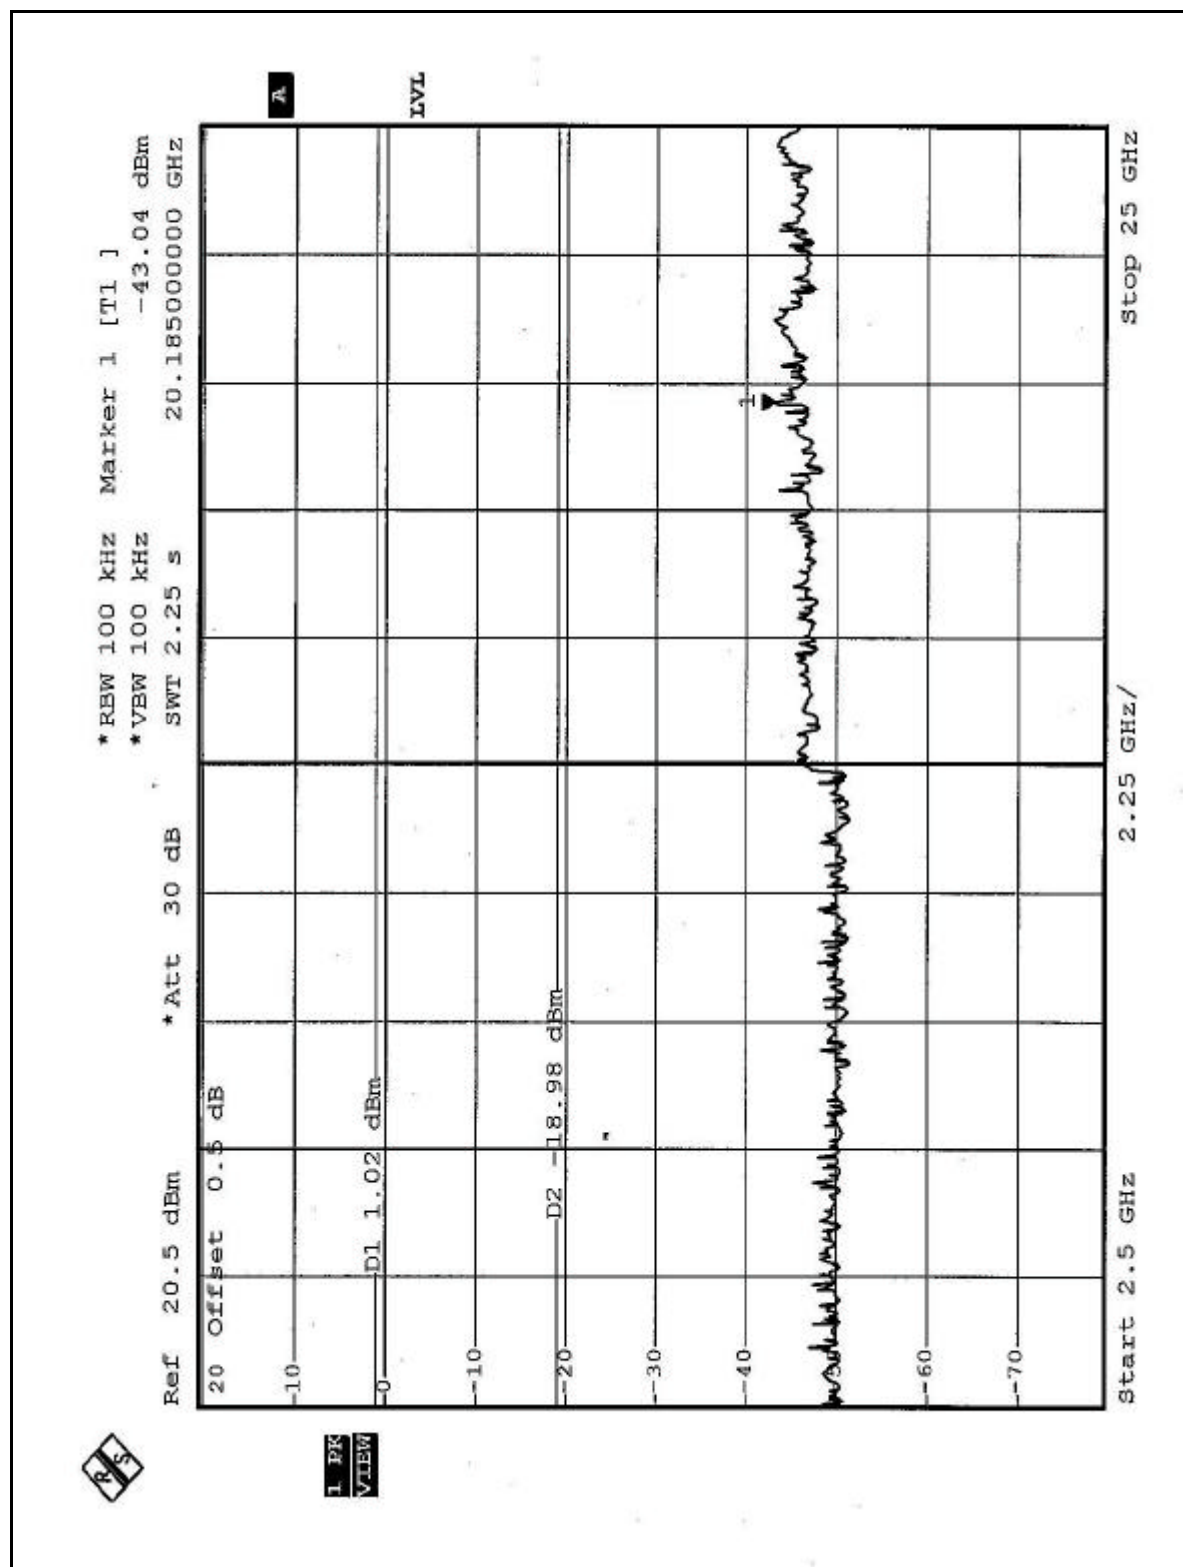



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Monopole antenna with UFL connector. The maximum Gain of the antenna is 0.69dBi.