



FCC TEST REPORT

FCC ID: 2A5LCWKDZ36781

Report Number.....: ZKT-220322L1792E

Date of Test..... Mar. 09, 2022 to Mar. 29, 2022

Date of issue.....: Mar. 29, 2022

Total number of pages..... 31

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Dongguan Vancode Electronics Technology Co., Ltd.

Address: Room 301, Building 5, No. 15, Zhongqian Road, Qingxi Town, Dongguan, Guangdong, China

Manufacturer's name: Dongguan Vancode Electronics Technology Co., Ltd.

Address: Room 301, Building 5, No. 15, Zhongqian Road, Qingxi Town, Dongguan, Guangdong, China

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.249
ANSI C63.10:2013

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-111_V0

Test Report Form(s) Originator.....: ZKT Testing

Master TRF: Dated: 2022-02-17

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Wireless Barcode Scanner

Trademark: vancode

Model/Type reference.....: VS3050BG

VS3050BG-1D, VS3050BGD-1D, VS3050BG-2D, VS3050BGD-2D,
VS3055BG-1D, VS3055BG-2D, VS3055BGD-2D, VS2602G,
VS2603G, VS9119G, VS9117G, VS9119BG, VS9117BG,
VS2615LG, VS2625LG, VS2800G-1D, VS2800G-2D, VS2806G-1D,
VS2806G-2D, VS2808G-1D, VS2808G-2D, VS2800BG-1D,
VS2800BG-2D, VS2806BG-1D, VS2806BG-2D, VS2808BG-1D,
VS2808BG-2D, VS2806LG, VS9200BG-1D, VS9209BG,
VS9209G, VS9215LG, R10-1D, R10-2D, VF3510-1D,
VF3510-2D, VF3520-1D, VF3520-2D, VF3530-2D

Ratings.....: Input: 5V---1A or DC 3.7V by battery



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Jim Liu

Reviewer (name + signature).....: Tom Zou

Approved (name + signature).....: Lake Xie





Table of Contents	Page
1.VERSION.....	5
2.SUMMARY OF TEST RESULTS.....	6
2.1 TEST FACILITY.....	7
2.2 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	9
3.3 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE).....	10
3.4 EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
4. EMC EMISSION TEST.....	12
4.1 CONDUCTED EMISSION MEASUREMENT.....	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits.....	12
4.1.2 TEST PROCEDURE.....	12
4.1.3 DEVIATION FROM TEST STANDARD.....	12
4.1.4 TEST SETUP.....	13
4.1.5 EUT OPERATING CONDITIONS.....	13
4.1.6 TEST RESULTS.....	13
4.2 RADIATED EMISSION MEASUREMENT.....	14
4.2.1 RADIATED EMISSION LIMITS.....	14
4.2.2 TEST PROCEDURE.....	15
4.2.3 DEVIATION FROM TEST STANDARD.....	15
4.2.4 TEST SETUP.....	16
4.2.5 EUT OPERATING CONDITIONS.....	17
5. BANDWIDTH OF FREQUENCY BAND EDGE.....	23
5.1 TEST REQUIREMENT:.....	23
5.2 TEST PROCEDURE.....	23
5.3 DEVIATION FROM TEST STANDARD.....	23
5.4 TEST SETUP.....	23
5.5 EUT OPERATING CONDITIONS.....	24
5.6 TEST RESULT.....	25
6. CHANNEL BANDWIDTH.....	27
6.1 APPLIED PROCEDURES / LIMIT.....	27
6.2 TEST PROCEDURE.....	27
6.3 DEVIATION FROM STANDARD.....	27
6.4 TEST SETUP.....	27



Table of Contents	Page
6.5 EUT OPERATION CONDITIONS.....	27
6.6 TEST RESULTS.....	28
7.ANTENNA REQUIREMENT.....	30
8. TEST SETUP PHOTO.....	31
9. EUT CONSTRUCTIONAL DETAILS.....	31



1.VERSION

Report No.	Version	Description	Approved
ZKT-220322L1792E	Rev.01	Initial issue of report	Mar. 29, 2022



2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC part 15.203	Antennarequirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	N/A	
FCC part 15.249	Fundamental &Radiated Spurious Emission Measurement	PASS	
FCC part 15.215 (c)	20dB Channel Bandwidth	PASS	
FCC part 15.205	Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless Barcode Scanner
Model No.:	VS3050BG VS3050BG-1D, VS3050BGD-1D, VS3050BG-2D, VS3050BGD-2D, VS3055BG-1D, VS3055BG-2D, VS3055BGD-2D, VS2602G, VS2603G, VS9119G, VS9117G, VS9119BG, VS9117BG, VS2615LG, VS2625LG, VS2800G-1D, VS2800G-2D, VS2806G-1D, VS2806G-2D, VS2808G-1D, VS2808G-2D, VS2800BG-1D, VS2800BG-2D, VS2806BG-1D, VS2806BG-2D, VS2808BG-1D, VS2808BG-2D, VS2806LG, VS9200BG-1D, VS9209BG, VS9209G, VS9215LG, R10-1D, R10-2D, VF3510-1D, VF3510-2D, VF3520-1D, VF3520-2D, VF3530-2D
Model Different.:	All the model are the same circuit and RF module. Only the model names and appearance colors are different. The model VS3050BG is the tested sample.
Hardware Version:	H1.0
Software Version:	S1.0
Sample(s) Status:	Engineer sample
Operation Frequency:	2410MHz~2470MHz
Channel Numbers:	61
Modulation Type:	GFSK
Antenna Type:	Internal Antenna
Antenna gain:	0dBi
Power supply:	Input: 5V---1A or DC 3.7V by battery
SWITCHING POWER ADAPTER:	N/A



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2410MHz	17	2426MHz	33	2442MHz	49	2458MHz
2	2411MHz	18	2427MHz	34	2443MHz	50	2459MHz
3	2412MHz	19	2428MHz	35	2444MHz	51	2460MHz
4	2413MHz	20	2429MHz	36	2445MHz	52	2461MHz
5	2414MHz	21	2430MHz	37	2446MHz	53	2462MHz
6	2415MHz	22	2431MHz	38	2447MHz	54	2463MHz
7	2416MHz	23	2432MHz	39	2448MHz	55	2464MHz
8	2417MHz	24	2433MHz	40	2449MHz	56	2465MHz
9	2418MHz	25	2434MHz	41	2450MHz	57	2466MHz
10	2419MHz	26	2435MHz	42	2451MHz	58	2467MHz
11	2420MHz	27	2436MHz	43	2452MHz	59	2468MHz
12	2421MHz	28	2437MHz	44	2453MHz	60	2469MHz
13	2422MHz	29	2438MHz	45	2454MHz	61	2470MHz
14	2423MHz	30	2439MHz	46	2455MHz		
15	2424MHz	31	2440MHz	47	2456MHz		
16	2425MHz	32	2441MHz	48	2457MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2410MHz
The middle channel	2440MHz
The Highest channel	2470MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: The EUT use new battery during the test. The test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	



3.3 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Barcode Scanner	vancode	VS3050BG	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.4 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 22, 2021	Sep. 21, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 22, 2021	Sep. 21, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Sep. 22, 2021	Sep. 21, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 22, 2021	Sep. 21, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 22, 2021	Sep. 21, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 22, 2021	Sep. 21, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 22, 2021	Sep. 21, 2022
8	Amplifier (1GHz-40GHz)	QuanJuDa	DLE-161	097	Sep. 22, 2021	Sep. 21, 2022
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 22, 2021	Sep. 21, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 22, 2021	Sep. 21, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 22, 2021	Sep. 21, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 22, 2021	Sep. 21, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 22, 2021	Sep. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\
18	Power Meter	MWRFTest	MW100-RFCB	\	Sep. 22, 2021	Sep. 21, 2022

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 22, 2021	Sep. 21, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 22, 2021	Sep. 21, 2022
3	Test Cable	N/A	C01	N/A	Sep. 22, 2021	Sep. 21, 2022
4	Test Cable	N/A	C02	N/A	Sep. 22, 2021	Sep. 21, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 22, 2021	Sep. 21, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 22, 2021	Sep. 21, 2022



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

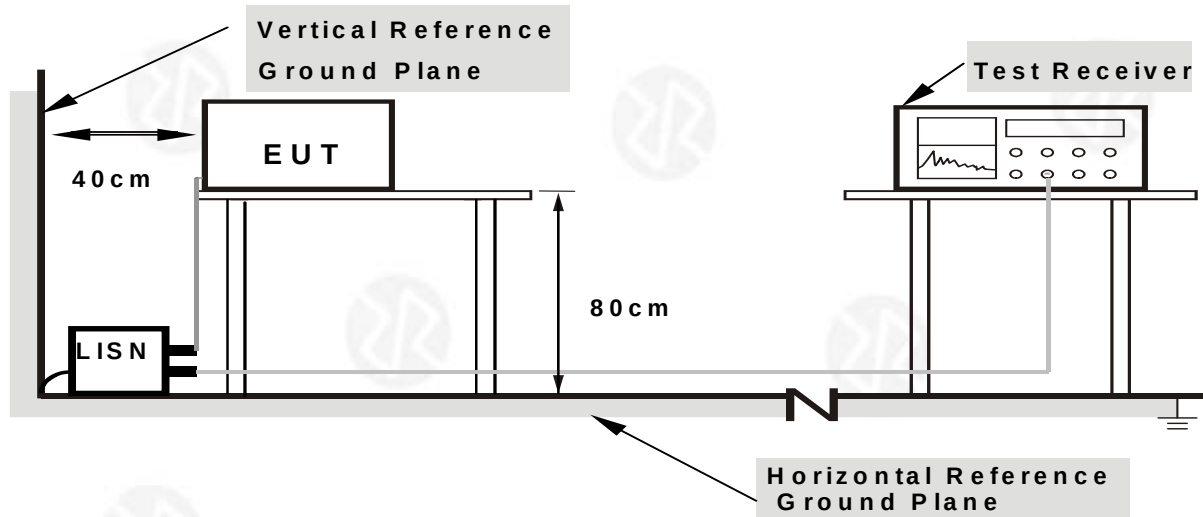

- Note:** 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 TEST RESULTS

The EUT is powered by the DC only, the test item is not applicable.



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500



LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


4.2.3 DEVIATION FROM TEST STANDARD

No deviation




4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

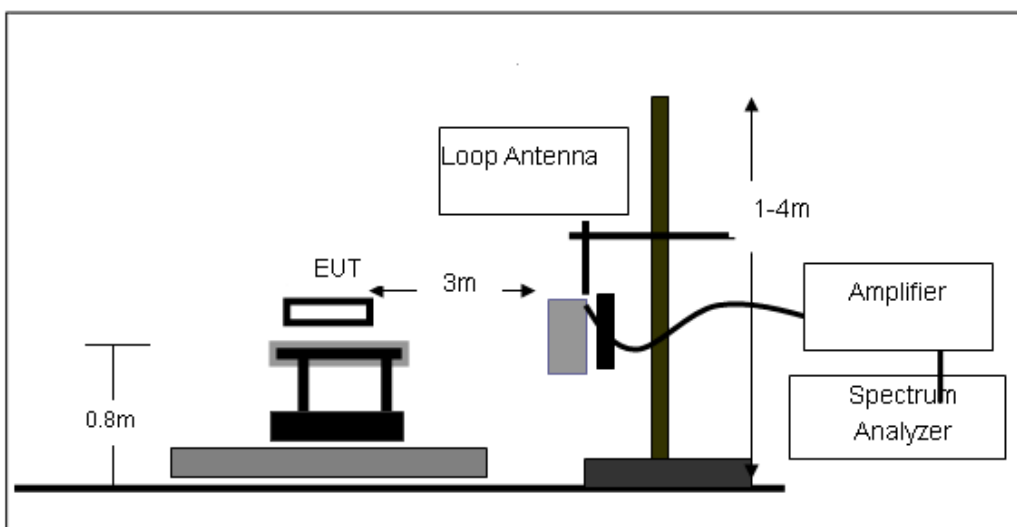


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

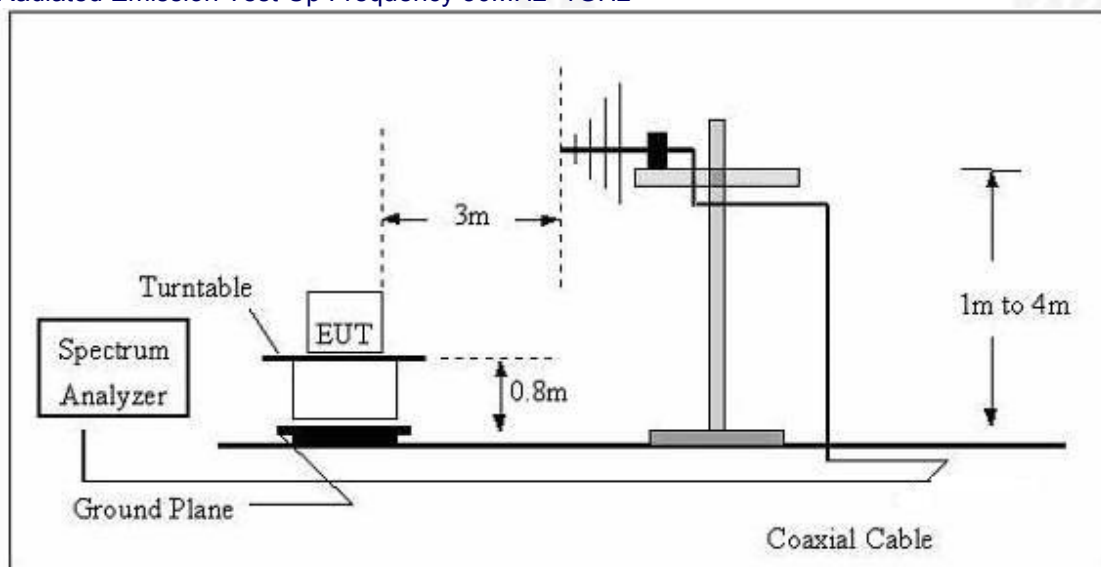



(C) Radiated Emission Test-Up Frequency Above 1GHz

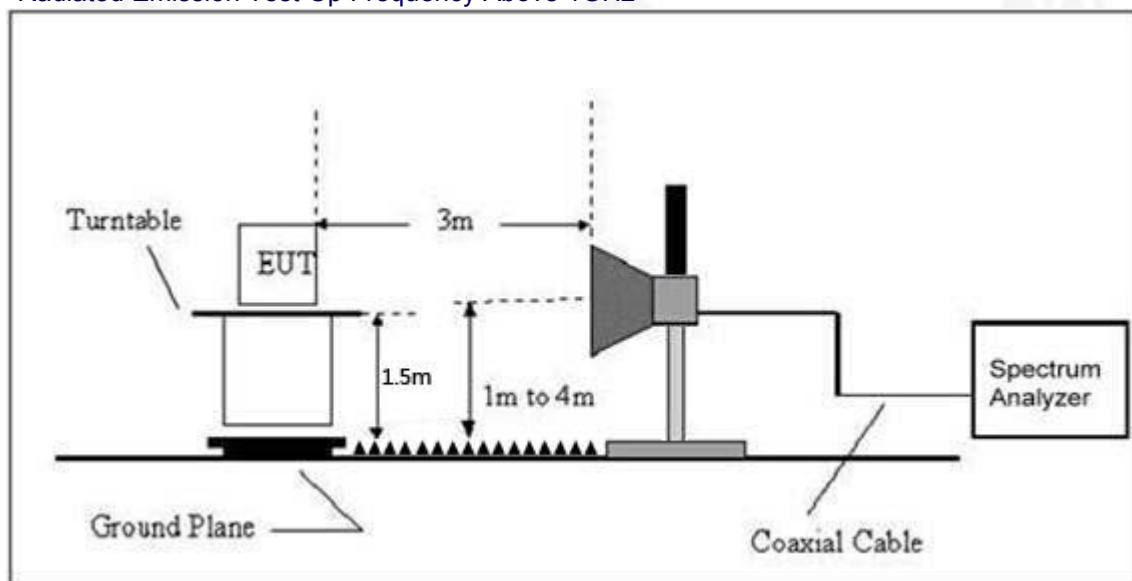

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




4.2.6 TEST RESULTS (Between 9KHz – 30 MHz)

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


Between 30MHz – 1GHz

Temperature:	24.6°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V		

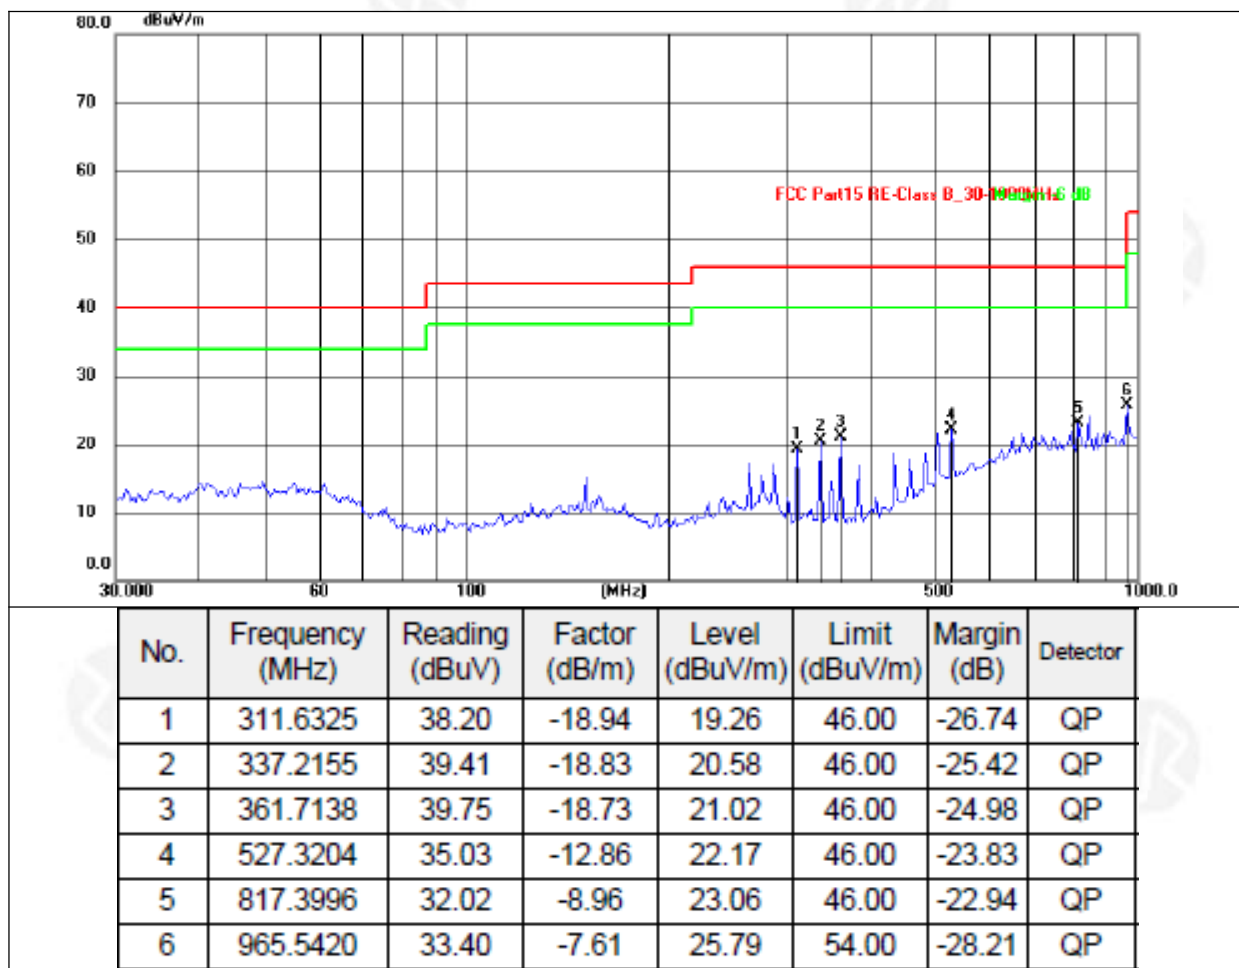



Temperature:	24.6℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V		

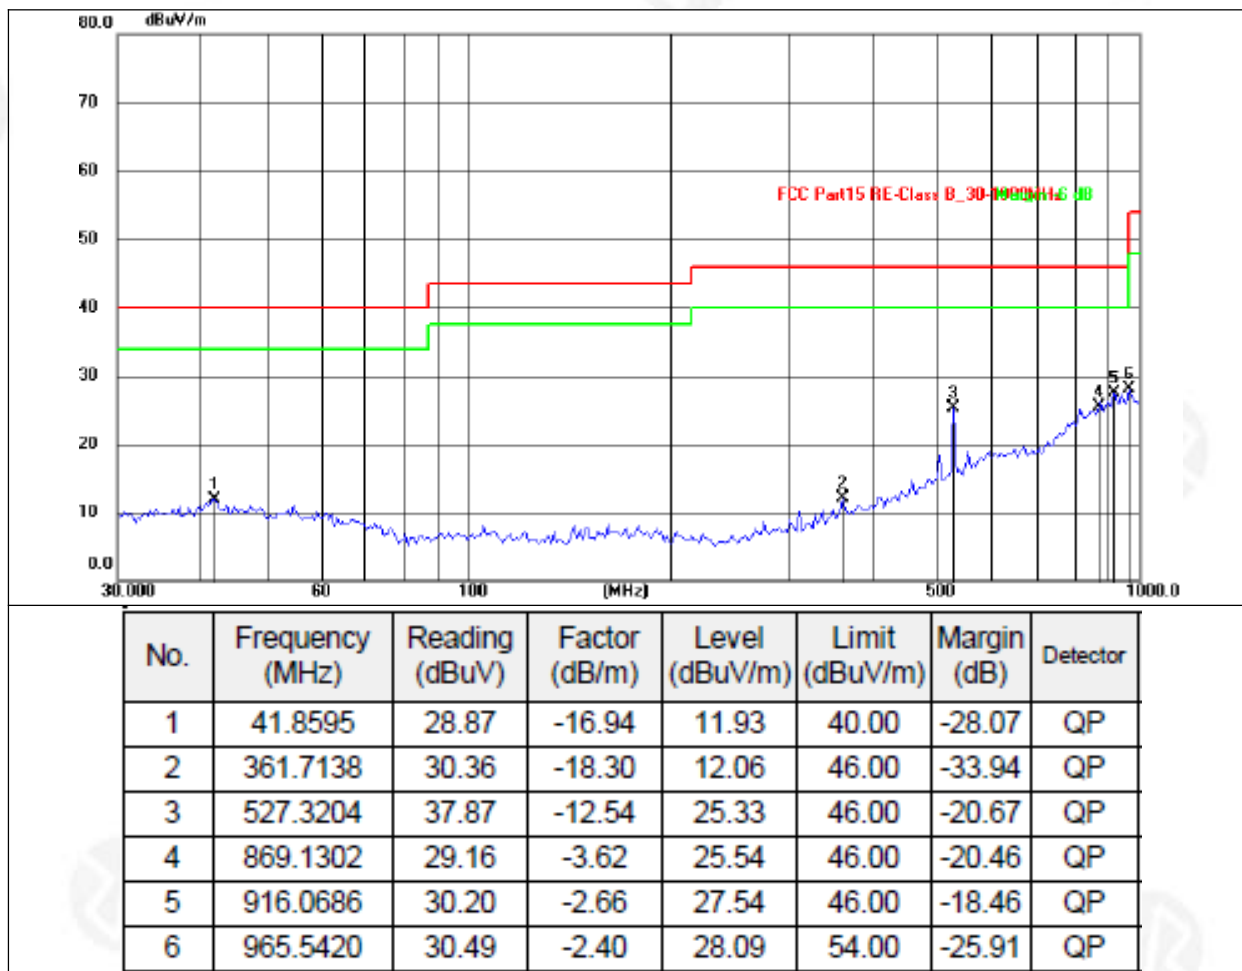

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



Field Strength of The Fundamental Signal
Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2410	93.92	27.58	5.39	30.18	96.71	114.00	-17.29	Vertical
2410	93.25	27.58	5.39	30.18	96.04	114.00	-17.96	Horizontal
2440	92.04	27.55	5.43	30.06	94.96	114.00	-19.04	Vertical
2440	86.16	27.55	5.43	30.06	89.08	114.00	-24.92	Horizontal
2470	93.17	27.52	5.47	29.93	96.23	114.00	-17.77	Vertical
2470	89.99	27.52	5.47	29.93	93.05	114.00	-20.95	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2410	82.44	27.58	5.39	30.18	85.23	94.00	-8.77	Vertical
2410	80.67	27.58	5.39	30.18	83.46	94.00	-10.54	Horizontal
2440	79.53	27.55	5.43	30.06	82.45	94.00	-11.55	Vertical
2440	75.67	27.55	5.43	30.06	78.59	94.00	-15.41	Horizontal
2470	83.10	27.52	5.47	29.93	86.16	94.00	-7.84	Vertical
2470	79.99	27.52	5.47	29.93	83.05	94.00	-10.95	Horizontal



GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2410MHz									
V	4820	52.25	30.55	5.77	24.66	52.13	74.00	-21.87	Pk
V	4820	42.11	30.55	5.77	24.66	41.99	54.00	-12.01	AV
V	7230	50.34	30.33	6.32	24.55	50.88	74.00	-23.12	Pk
V	7230	42.82	30.33	6.32	24.55	43.36	54.00	-10.64	AV
V	9640	50.84	30.85	7.45	24.69	52.13	74.00	-21.87	Pk
V	9640	42.72	30.85	7.45	24.69	44.01	54.00	-9.99	AV
V	12050	50.94	31.02	8.99	25.57	54.48	74.00	-19.52	Pk
V	12050	42.72	31.02	8.99	25.57	46.26	54.00	-7.74	AV
H	4820	52.59	30.55	5.77	24.66	52.47	74.00	-21.53	Pk
H	4820	42.44	30.55	5.77	24.66	42.32	54.00	-11.68	AV
H	7230	51.23	30.33	6.32	24.55	51.77	74.00	-22.23	Pk
H	7230	42.49	30.33	6.32	24.55	43.03	54.00	-10.97	AV
H	9640	51.23	30.85	7.45	24.69	52.52	74.00	-21.48	Pk
H	9640	42.49	30.85	7.45	24.69	43.78	54.00	-10.22	AV
H	12050	51.23	31.02	8.99	25.57	54.77	74.00	-19.23	Pk
H	12050	41.49	31.02	8.99	25.57	45.03	54.00	-8.97	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880	51.62	30.55	5.77	24.66	51.50	74.00	-22.50	Pk
V	4880	42.51	30.55	5.77	24.66	42.39	54.00	-11.61	AV
V	7320	50.15	30.33	6.32	24.55	50.69	74.00	-23.31	Pk
V	7320	42.19	30.33	6.32	24.55	42.73	54.00	-11.27	AV
V	9760	50.22	30.85	7.45	24.69	51.51	74.00	-22.49	Pk
V	9760	42.19	30.85	7.45	24.69	43.48	54.00	-10.52	AV
V	12200	50.12	31.02	8.99	25.57	53.66	74.00	-20.34	Pk
V	12200	42.19	31.02	8.99	25.57	45.73	54.00	-8.27	AV
H	4880	52.98	30.55	5.77	24.66	52.86	74.00	-21.14	Pk
H	4880	42.54	30.55	5.77	24.66	42.42	54.00	-11.58	AV
H	7320	53.69	30.33	6.32	24.55	54.23	74.00	-19.77	Pk
H	7320	42.32	30.33	6.32	24.55	42.86	54.00	-11.14	AV
H	9760	53.69	30.85	7.45	24.69	54.98	74.00	-19.02	Pk
H	9760	42.32	30.85	7.45	24.69	43.61	54.00	-10.39	AV
H	12200	54.19	31.02	8.99	25.57	57.73	74.00	-16.27	Pk
H	12200	42.32	31.02	8.99	25.57	45.86	54.00	-8.14	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2470MHz									
V	4940	51.23	30.55	5.77	24.66	51.11	74.00	-22.89	Pk
V	4940	42.77	30.55	5.77	24.66	42.65	54.00	-11.35	AV
V	7410	53.74	30.33	6.32	24.55	54.28	74.00	-19.72	Pk
V	7410	43.09	30.33	6.32	24.55	43.63	54.00	-10.37	AV
V	9880	53.74	30.85	7.45	24.69	55.03	74.00	-18.97	Pk
V	9880	43.58	30.85	7.45	24.69	44.87	54.00	-9.13	AV
V	12350	53.74	31.02	8.99	25.57	57.28	74.00	-16.72	Pk
V	12350	42.98	31.02	8.99	25.57	46.52	54.00	-7.48	AV
H	4940	51.32	30.55	5.77	24.66	51.20	74.00	-22.80	Pk
H	4940	42.99	30.55	5.77	24.66	42.87	54.00	-11.13	AV
H	7410	52.91	30.33	6.32	24.55	53.45	74.00	-20.55	Pk
H	7410	43.25	30.33	6.32	24.55	43.79	54.00	-10.21	AV
H	9880	53.51	30.85	7.45	24.69	54.80	74.00	-19.20	Pk
H	9880	43.35	30.85	7.45	24.69	44.64	54.00	-9.36	AV
H	12350	53.41	31.02	8.99	25.57	56.95	74.00	-17.05	Pk
H	12350	43.35	31.02	8.99	25.57	46.89	54.00	-7.11	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. BANDWIDTH OF FREQUENCY BAND EDGE

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP



Radiated Emission Test-Up Frequency Above 1GHz

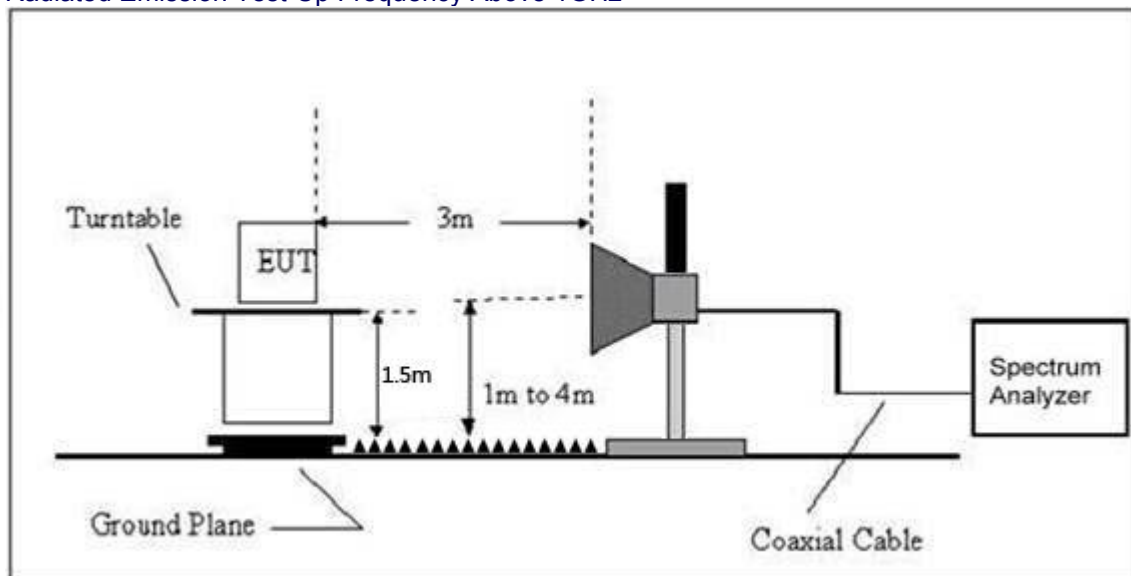

5.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT


Temperature :	24.8 °C	Relative Humidity :	54%
Pressure :	101 kPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode		

2410MHz Horizontal

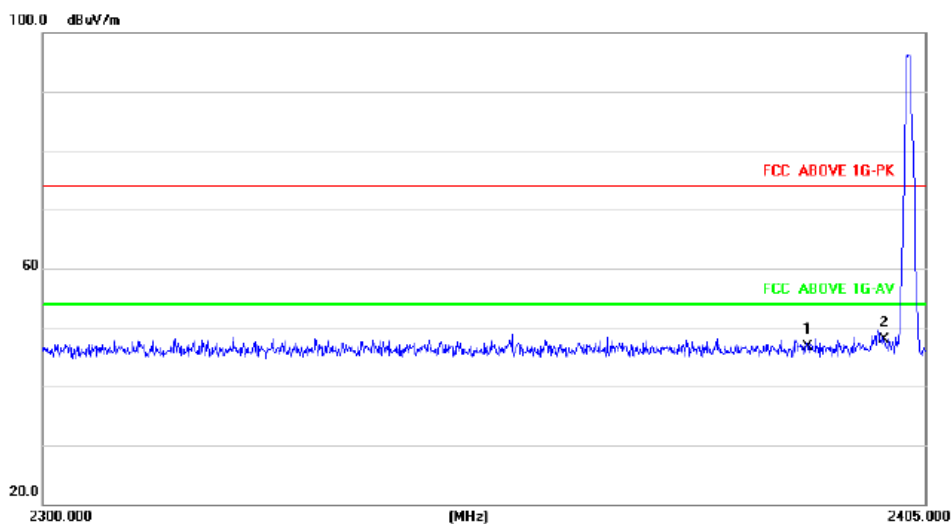

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390.00	52.62	-5.84	46.78	74.00	-27.22	peak
2400.00	53.97	-5.84	48.13	74.00	-25.87	peak

2410MHz Vertical

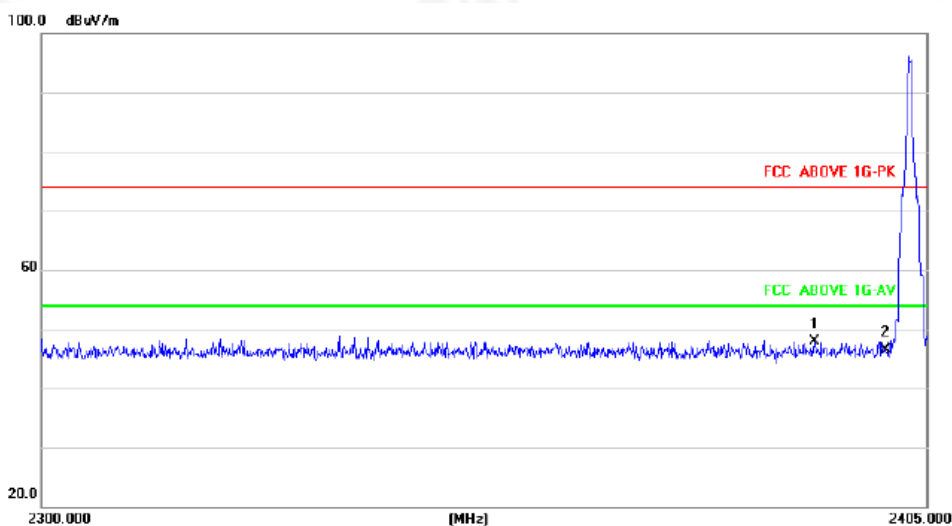


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390.00	53.70	-5.84	47.86	74.00	-26.12	peak
2400.00	52.67	-5.84	46.83	74.00	-27.17	peak




Temperature :	24.8 °C	Relative Humidity :	54%
Pressure :	101 kPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode		

2470MHz Horizontal

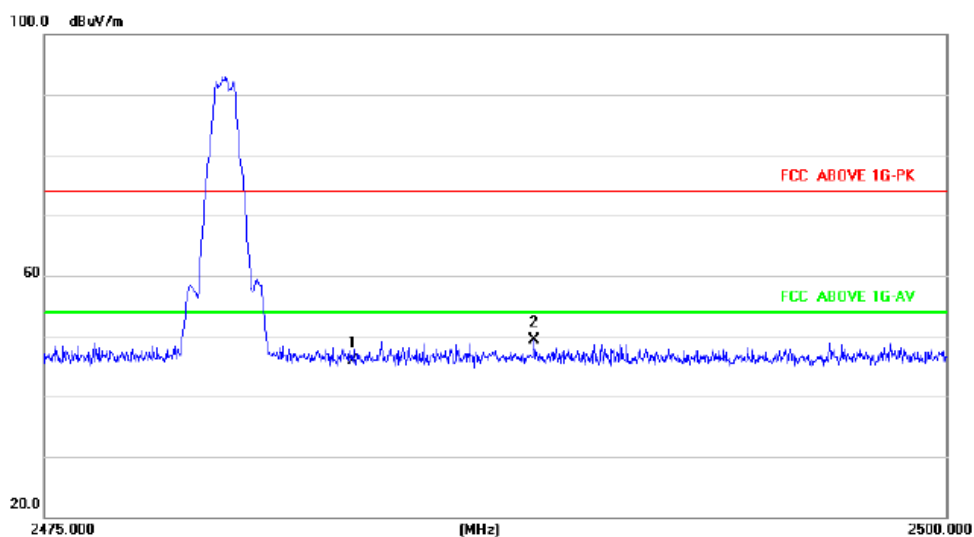

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	53.43	-5.60	47.83	74.00	-26.13	peak
2490.00	54.75	-5.60	49.15	74.00	-24.85	peak

2470MHz Vertical

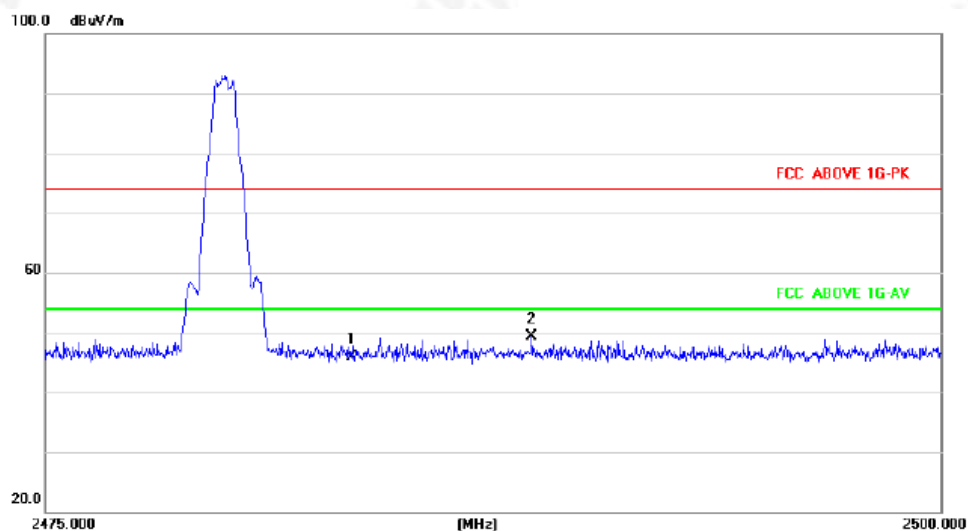

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	53.53	-5.60	47.93	74.00	-26.07	peak
2490.00	54.62	-5.60	49.02	74.00	-24.98	peak



6. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10: 2013

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.249(c)	Bandwidth	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

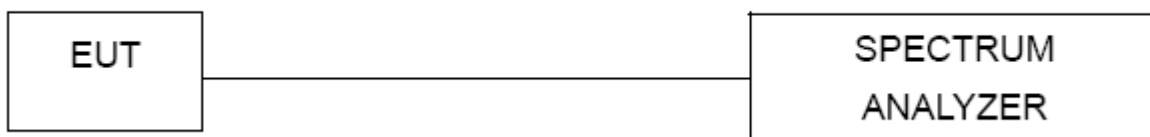

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




6.6 TEST RESULTS

Temperature:	24.5℃	Relative Humidity:	54%
Test Mode :	GFSK	Test Voltage:	DC 3.7V

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	4.085	Pass
	Middle	2.771	
	Highest	2.101	

Test plots GFSK

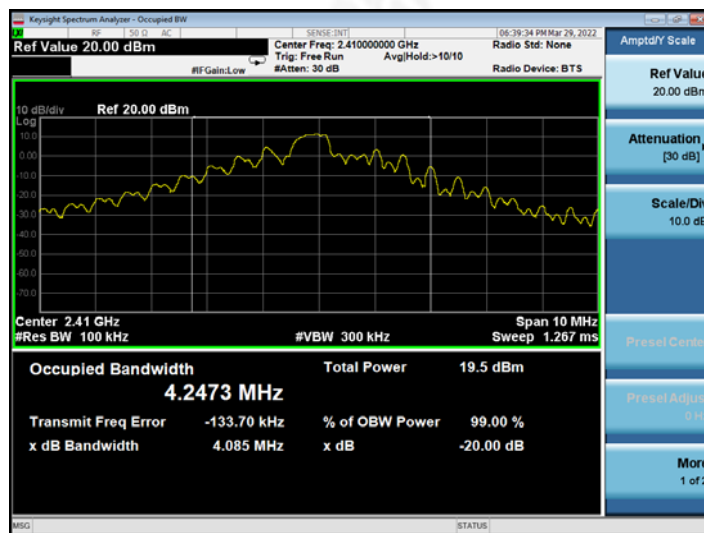

Lowest channel



Middle channel



Highest channel



7.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antennas are Internal Antenna, the best case gain of the antennas are 0dBi, reference to the appendix II for details.	



8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****