

Product Specification for model DNUA-PO1 (QCA AR9375_AL3D Base)

802.11n a/b/g USB Module

Draft Version 0.2 2014/08/19

**by
Tina Lu**

**Datacomm product center
Wistron Neweb® Corporation**


**Wistron Neweb® Corporation
20 Park Avenue II Road, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.
Tel: +886-3-666-7799
Fax: +886-3-666-7323**

Subject to change without notices
© Copyrights by Wistron Neweb®
All rights reserved


- **Revision history**

Revision	Change history	Date
0.1	Initial draft version	2014/07/01
0.2	Add certification	2014/08/19


● Block diagram:

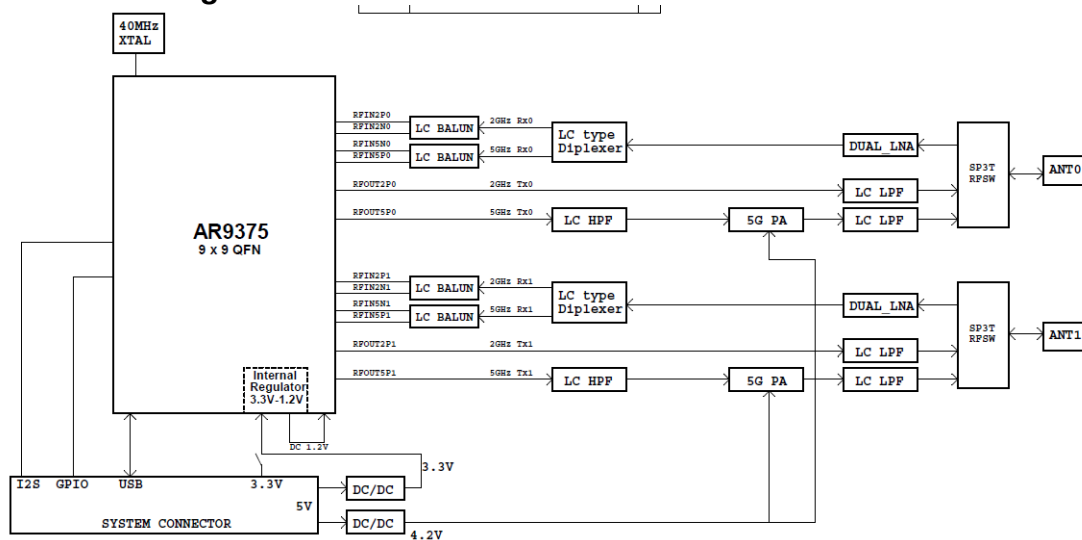

● PCBA outline drawing

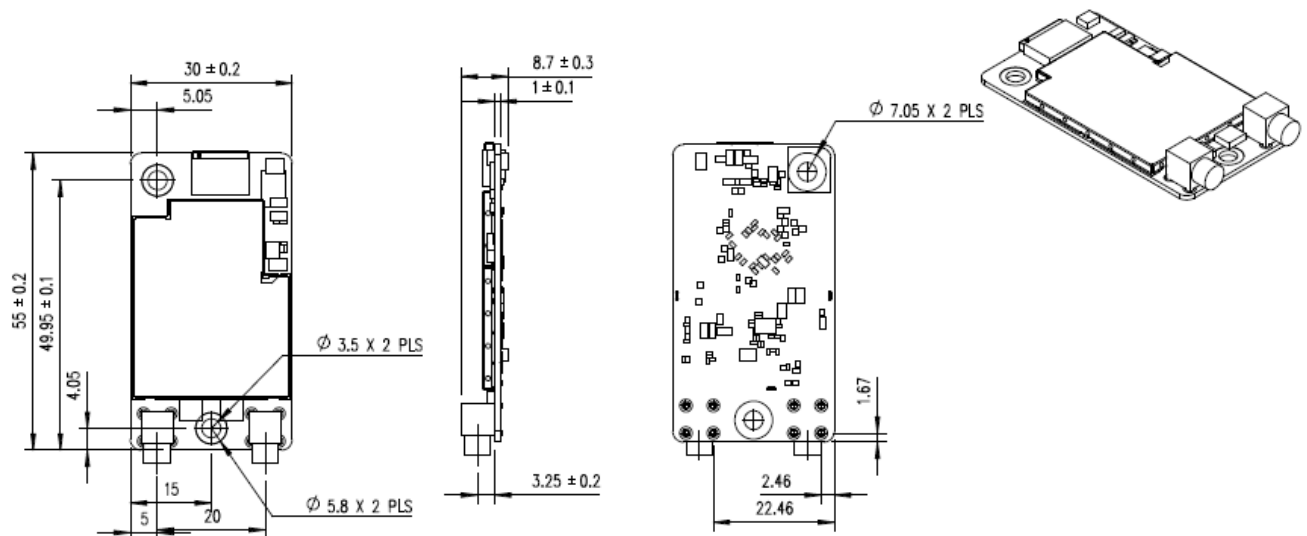

● PIN definition

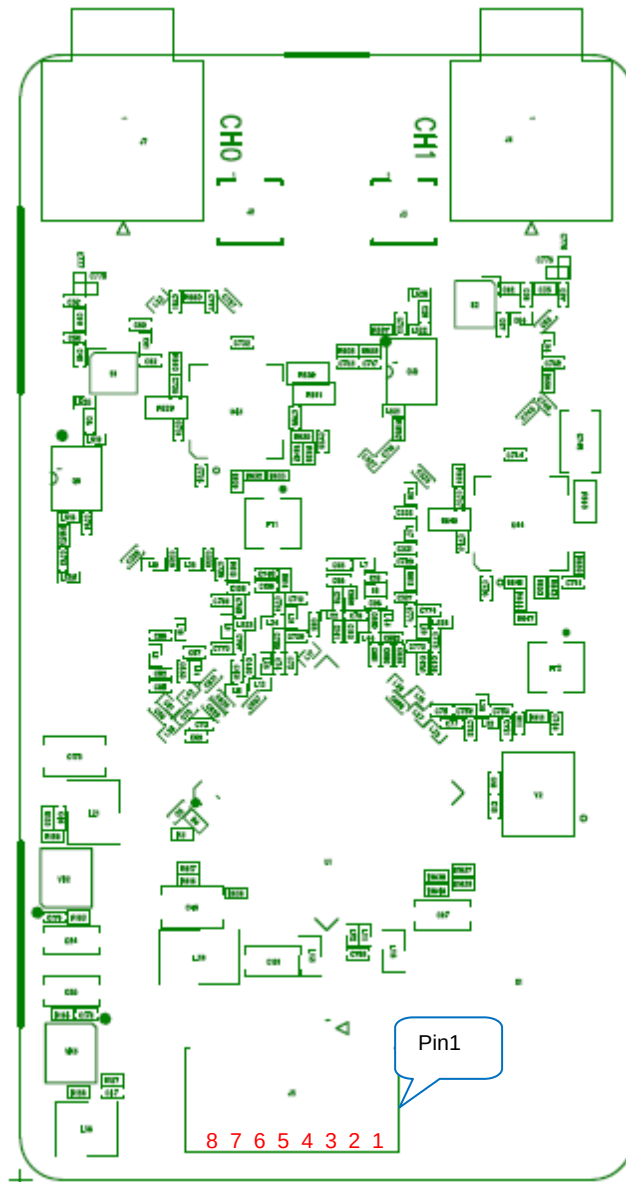

Pin No.	Description
Pin1	GND
Pin2	WAKE#
Pin3	W_RESET#
Pin4	USB_5V
Pin5	USB_5V
Pin6	USB_D-
Pin7	USB_D+
Pin8	GND

● DNUA-PO1, product specification, 802.11n a/b/g USB module

Item	Key specifications																			
Main chipset	➤ QCA AR9375_AL3D																			
TX/RX	➤ 2T2R																			
Frequency range	➤ USA: 2.400 ~ 2.483GHz, 5.15 ~ 5.25GHz, 5.725 ~ 5.85GHz ➤ Europe: 2.400 ~ 2.483GHz, 5.15 ~ 5.25GHz ➤ Japan: 2.400 ~ 2.497GHz, 5.15 ~ 5.25GHz,																			
Modulation technique	➤ 802.11 Legacy a/b/g DSSS (DBPSK, DQPSK, CCK) OFDM (BPSK, QPSK, 16-QAM, 64-QAM) DSSS (Direct Sequence Spread Spectrum) with DBPSK (Differential Binary Phase Shift Keying 1Mbps), DQPSK (Differential Quaternary Phase Shift Keying 2Mbps), and CCK (Complementary Code Keying 5.5&11Mbps), and OFDM (Orthogonal Frequency Division Multiplexing with BPSK for 6,9Mbps 、 QPSK for 12,18Mbps 、 16QAM for 24,36Mbps 、 64QAM for 48,54Mbps) ➤ 802.11n a/g OFDM (BPSK, QPSK, 16-QAM, 64-QAM)																			
Host interface	➤ USB 2.0																			
Channels support	➤ 802.11n b/g US/Canada: 11 (1 ~ 11) Major European country: 13 (1 ~ 13) France: 4 (10 ~ 13) Japan: 11b: 14 (1~13 or 14 th), 11g: 13 (1 ~ 13) ➤ 802.11n a 1). US/Canada: channels (36,40,44,48,52, 149,153,157,161,165) 2). Europe: channel (36,40,44,48,52) 3). Japan: channels (36,40,44,48,52)																			
Operation voltage	➤ 5V +/- 5%																			
Power consumption @25 o C	<table><tr><td></td><td colspan="2">802.11ng MCS8(40MHz)</td><td colspan="2">802.11na MCS8(40MHz)</td></tr><tr><td>(mA)</td><td colspan="2">Avg</td><td colspan="2">Avg</td></tr><tr><td>5V</td><td colspan="2">350</td><td colspan="2">756</td></tr></table>						802.11ng MCS8(40MHz)		802.11na MCS8(40MHz)		(mA)	Avg		Avg		5V	350		756	
	802.11ng MCS8(40MHz)		802.11na MCS8(40MHz)																	
(mA)	Avg		Avg																	
5V	350		756																	
Output Power (Typical-for each chain; with ±2dB tolerance). This power table bases on the maximum HW capability complying with IEEE spec regardless the regulatory limitation	➤ 802.11a																			
	Test Frequencies	6-24_Target	36_Target	48_Target	54_Target															
	5180	21	20	19	17															
	5320	21	20	19	17															
	5500	21	20	19	17															
	5600	21	20	19	17															
	5700	21	20	19	17															
	5825	21	20	19	17															
	➤ 802.11b																			
	Test Frequencies	1/2_Target	5.5_Target	11_Target																
	2412	16	16	16																
	2437	16	16	16																
	2472	16	16	16																
	➤ 802.11g																			
	Test Frequencies	6-24_Target	36_Target	48_Target	54_Target															
	2412	16	16	15	14															
	2437	16	16	15	14															
	2472	16	16	15	14															
	➤ 802.11n																			
	Freq. Range: HT20																			

	Test Freq	MCS 0/8	MCS 1/9	MCS 2/10	MCS 3/11	MCS 4/12	MCS 5/13	MCS 6/14	MCS 7/15	
	5180	21	21	21	21	20	20	19	17	
	5240	21	21	21	21	20	20	19	17	
	5320	21	21	21	21	20	20	19	17	
	5500	21	21	21	21	20	20	19	17	
	5700	21	21	21	21	20	20	19	17	
	5745	21	21	21	21	20	20	19	17	
	5825	21	21	21	21	20	20	19	17	
	Freq. Range: HT40									
	Test Freq	MCS 0/8	MCS 1/9	MCS 2/10	MCS 3/11	MCS 4/12	MCS 5/13	MCS 6/14	MCS 7/15	
	5190	21	21	21	21	20	20	19	17	
	5230	21	21	21	21	20	20	19	17	
	5310	21	21	21	21	20	20	19	17	
	5510	21	21	21	21	20	20	19	17	
	5670	21	21	21	21	20	20	19	17	
	5755	21	21	21	21	20	20	19	17	
	5795	21	21	21	21	20	20	19	17	
	Freq. Range: HT20									
	Test Freq	MCS 0/8	MCS 1/9	MCS 2/10	MCS 3/11	MCS 4/12	MCS 5/13	MCS 6/14	MCS 7/15	
	2412	16	16	16	16	15	15	14	14	
	2437	16	16	16	16	15	15	14	14	
	2472	16	16	16	16	15	15	14	14	
	Freq. Range: HT40									
	Test Freq	MCS 0/8	MCS 1/9	MCS 2/10	MCS 3/11	MCS 4/12	MCS 5/13	MCS 6/14	MCS 7/15	
	2412	16	16	16	16	15	15	14	14	
	2437	16	16	16	16	15	15	14	14	
	2472	16	16	16	16	15	15	14	14	

EVM	The transmit modulation accuracy is measured using error vector magnitude (EVM). EVM is the magnitude of the phase difference as a function of time between an ideal reference signal and the measured transmitted signal.									
	➤ 802.11a									
	Modulation	Code Rate	Relative constellation error (dB)			Relative constellation error (dB)				
			IEEE Spec (1Tx dB)			Typical (1Tx dB)				
	BPSK	1/2	-5			-25				
	BPSK	3/4	-8			-25				
	QPSK	1/2	-10			-25				
	QPSK	3/4	-13			-25				
	16-QAM	1/2	-16			-25				
	16-QAM	3/4	-19			-28				
	64-QAM	2/3	-22			-30				
	64-QAM	3/4	-25			-31				
	➤ 802.11b									
	Modulation	Code Rate	Relative constellation error (dB)			Relative constellation error (dB)				
			IEEE Spec (1Tx dB)			Typical (1Tx dB)				
	DBPSK		-10			-28				
	DQPSK		-10			-28				
	CCK		-10			-28				
	➤ 802.11g									
	Modulation	Code Rate	Relative constellation error (dB)			Relative constellation error (dB)				
			IEEE Spec (1Tx dB)			Typical (1Tx dB)				
	BPSK	1/2	-5			-28				
	BPSK	3/4	-8			-28				
	QPSK	1/2	-10			-28				
	QPSK	3/4	-13			-28				
	16-QAM	1/2	-16			-28				

	16-QAM	3/4	-19	-29
	64-QAM	2/3	-22	-29
	64-QAM	3/4	-25	-29
➤ 802.11ng				
	Modulation	Code Rate	Relative constellation error (dB) IEEE Spec (1Tx dB)	Relative constellation error (dB) Typical (1Tx dB)
✧ HT20				
	(MCS0) BPSK	1/2	-5	-25
	(MCS1) QPSK	1/2	-10	-26
	(MCS2) QPSK	3/4	-13	-26
	(MCS3) 16-QAM	1/2	-16	-26
	(MCS4) 16-QAM	3/4	-19	-29
	(MCS5) 64-QAM	2/3	-22	-30
	(MCS6) 64-QAM	3/4	-25	-30
	(MCS7) 64-QAM	5/6	-27	-31
	(MCS8) BPSK	1/2	-5	-25
	(MCS9) QPSK	1/2	-10	-26
	(MCS10) QPSK	3/4	-13	-26
	(MCS11) 16-QAM	1/2	-16	-26
	(MCS12) 16-QAM	3/4	-19	-29
	(MCS13) 64-QAM	2/3	-22	-30
	(MCS14) 64-QAM	3/4	-25	-30
	(MCS15) 64-QAM	5/6	-27	-31
✧ HT40				
	(MCS0) BPSK	1/2	-5	-26
	(MCS1) QPSK	1/2	-10	-27
	(MCS2) QPSK	3/4	-13	-27
	(MCS3) 16-QAM	1/2	-16	-27
	(MCS4) 16-QAM	3/4	-19	-29
	(MCS5) 64-QAM	2/3	-22	-30
	(MCS6) 64-QAM	3/4	-25	-30
	(MCS7) 64-QAM	5/6	-27	-31
	(MCS8) BPSK	1/2	-5	-26
	(MCS9) QPSK	1/2	-10	-27
	(MCS10) QPSK	3/4	-13	-27
	(MCS11) 16-QAM	1/2	-16	-27
	(MCS12) 16-QAM	3/4	-19	-29
	(MCS13) 64-QAM	2/3	-22	-30
	(MCS14) 64-QAM	3/4	-25	-30
	(MCS15) 64-QAM	5/6	-27	-31
➤ 802.11na				
	Modulation	Code Rate	Relative constellation error (dB) IEEE Spec (1Tx dB)	Relative constellation error (dB) Typical (1Tx dB)
✧ HT20				
	(MCS0) BPSK	1/2	-5	-25
	(MCS1) QPSK	1/2	-10	-26
	(MCS2) QPSK	3/4	-13	-26
	(MCS3) 16-QAM	1/2	-16	-26
	(MCS4) 16-QAM	3/4	-19	-29
	(MCS5) 64-QAM	2/3	-22	-30
	(MCS6) 64-QAM	3/4	-25	-30
	(MCS7) 64-QAM	5/6	-27	-31
	(MCS8) BPSK	1/2	-5	-25
	(MCS9) QPSK	1/2	-10	-26
	(MCS10) QPSK	3/4	-13	-26

	(MCS11) 16-QAM	1/2	-16	-26
	(MCS12) 16-QAM	3/4	-19	-29
	(MCS13) 64-QAM	2/3	-22	-30
	(MCS14) 64-QAM	3/4	-25	-30
	(MCS15) 64-QAM	5/6	-27	-31
	✧ HT40			
	(MCS0) BPSK	1/2	-5	-26
	(MCS1) QPSK	1/2	-10	-27
	(MCS2) QPSK	3/4	-13	-27
	(MCS3) 16-QAM	1/2	-16	-27
	(MCS4) 16-QAM	3/4	-19	-29
	(MCS5) 64-QAM	2/3	-22	-30
	(MCS6) 64-QAM	3/4	-25	-30
	(MCS7) 64-QAM	5/6	-27	-31
	(MCS8) BPSK	1/2	-5	-26
	(MCS9) QPSK	1/2	-10	-27
	(MCS10) QPSK	3/4	-13	-27
	(MCS11) 16-QAM	1/2	-16	-27
	(MCS12) 16-QAM	3/4	-19	-29
	(MCS13) 64-QAM	2/3	-22	-30
	(MCS14) 64-QAM	3/4	-25	-30
	(MCS15) 64-QAM	5/6	-27	-31
Sensitivity (1RX with +4/-2dB tolerance, dBm)	➤ 802.11a			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	BPSK	1/2	-82	-88
	BPSK	3/4	-81	-86
	QPSK	1/2	-79	-85
	QPSK	3/4	-77	-83
	16-QAM	1/2	-74	-79
	16-QAM	3/4	-70	-77
	64-QAM	2/3	-66	-73
	64-QAM	3/4	-65	-70
	➤ 802.11b			
	Modulation		IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	DBPSK		not specified	-93
	DQPSK		not specified	-91
	CCK		not specified	-87
	➤ 802.11g			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	BPSK	1/2	-82	-93
	BPSK	3/4	-81	-91
	QPSK	1/2	-79	-89
	QPSK	3/4	-77	-86
	16-QAM	1/2	-74	-83
	16-QAM	3/4	-70	-80
	64-QAM	2/3	-66	-75
	64-QAM	3/4	-65	-70
	➤ 802.11ng			
	Modulation	Code Rate	IEEE Spec (1Rx dBm)	Typical (1Rx dBm)
	✧ HT20			
	(MCS0) BPSK	1/2	-82	-90
	(MCS1) QPSK	1/2	-79	-87
	(MCS2) QPSK	3/4	-77	-86

	(MCS3) 16-QAM 1/2 -74 -84 (MCS4) 16-QAM 3/4 -70 -80 (MCS5) 64-QAM 2/3 -66 -77 (MCS6) 64-QAM 3/4 -65 -72 (MCS7) 64-QAM 5/6 -64 -67 ◇ HT40 (MCS0) BPSK 1/2 -79 -88 (MCS1) QPSK 1/2 -76 -86 (MCS2) QPSK 3/4 -74 -84 (MCS3) 16-QAM 1/2 -71 -80 (MCS4) 16-QAM 3/4 -67 -78 (MCS5) 64-QAM 2/3 -63 -73 (MCS6) 64-QAM 3/4 -62 -70 (MCS7) 64-QAM 5/6 -61 -64 ➤ 802.11na Modulation Code Rate IEEE Spec (1Rx dBm) Typical (1Rx dBm) ◇ HT20 (MCS0) BPSK 1/2 -82 -89 (MCS1) QPSK 1/2 -79 -87 (MCS2) QPSK 3/4 -77 -84 (MCS3) 16-QAM 1/2 -74 -80 (MCS4) 16-QAM 3/4 -70 -77 (MCS5) 64-QAM 2/3 -66 -72 (MCS6) 64-QAM 3/4 -65 -71 (MCS7) 64-QAM 5/6 -64 -67 ◇ HT40 (MCS0) BPSK 1/2 -79 -84 (MCS1) QPSK 1/2 -76 -81 (MCS2) QPSK 3/4 -74 -79 (MCS3) 16-QAM 1/2 -71 -76 (MCS4) 16-QAM 3/4 -67 -72 (MCS5) 64-QAM 2/3 -63 -70 (MCS6) 64-QAM 3/4 -62 -67 (MCS7) 64-QAM 5/6 -61 -64
Transmit spectrum mask	➤ For transmitted spectral mask for 11a shall be less than -40dBr for $f_c-30\text{MHz}<f<f_c+30\text{MHz}$. ➤ For transmitted spectral mask for 11b shall be less than -50dBr for $f_c-22\text{MHz}<f<f_c+22\text{MHz}$. ➤ For transmitted spectral mask for 11g shall be less than -40dBr for $f_c-30\text{MHz}<f<f_c+30\text{MHz}$. ➤ For transmitted spectral mask for 11n 20MHz shall be less than -45dBr for $f_c-30\text{MHz}<f<f_c+30\text{MHz}$. ➤ For transmitted spectral mask for 11n 40MHz shall be less than -45dBr for $f_c-60\text{MHz}<f<f_c+60\text{MHz}$.
Transmit spectrum flatness	➤ For 802.11a/g the average energy of the constellations in each of spectral lines -16..-1 and +1..+16 will deviate no more than +/- 2dB from their average energy. For 802.11n 40MHz mode, the average energy of the constellations in each of spectral lines -42..-2 and +2..+42 will deviate no more than +/- 2dB from their average energy. ➤ The transmitted spectral flatness should be with in +/- 4dB.
Transmit center frequency tolerance	➤ The transmitted center frequency tolerance shall be ± 20 ppm maximum.
Receiver	➤ 802.11a

maximum input level	Modulation	Code Rate	IEEE Spec (1Rx dBm) >-30
	➤ 802.11b Modulation		IEEE Spec (1Rx dBm) >-10
	DBPSK		>-10
	DQPSK		>-10
	CCK		>-10
	➤ 802.11g Modulation	Code Rate	IEEE Spec (1Rx dBm) >-20
	➤ 802.11na Modulation	Code Rate	IEEE Spec (1Rx dBm) >-30
	➤ 802.11ng Modulation	Code Rate	IEEE Spec (1Rx dBm) >-20
Operation system supported	➤ Linux & Windows		
PCB dimension	➤ 30mm x 55mm ; 4 Layer; FR4		
Transfer data rate	➤ 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps ➤ 802.11b: 1, 2, 5.5, 11Mbps ➤ 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps ➤ 802.11n: @800GI(400GI) ● 20MHz BW ▪ 1 Nss: 65(72.2) Mbps maximal ▪ 2 Nss: 130(144.444) Mbps maximal ● 40MHz BW ▪ 1 Nss: 135(150) Mbps maximal ▪ 2 Nss: 270(300) Mbps maximal		
Operation temperature	➤ 0° ~ 50° C		
Storage temperature	➤ -20° ~ 80° C		
Antenna type	➤ MCX connector for external Antenna ➤ Reserve U.FL connector for external Antenna		
Certification	➤		

	ICC	ICES-003	to be included in FCC 15B
		RSS-210	2.4G (refer to FCC result)
		RSS-210	5G B4 (5725~5825MHz), partial refer to FCC result Pls note that FCC 15.407 power is at least 5 dBm lower than FCC 15.247 5G B1, radiation use FCC result, this band is indoor use only
		IC grant	FCB filing
	TELEC (JPN)	ARIB STD-T66	2.4G (1~13ch)
		ARIB STD-T33	2.4G (14ch)
		ARIB STD-T71	W52(5150~5250MHz) indoor only
		TELEC filing (T66+T71)	Granted by telefication
		TELEC filing (T33)	Granted by telefication