



REPORT No.: SZ23040219S02

## **Annex C Plots of System Performance Check**

## System Check\_835MHz\_HAC\_RF\_E

Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2023.02.17;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2022.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Hearing Aid Compatibility Test (81x401x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Maximum value of Total (interpolated) = 120.64 V/m

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 58.41 V/m; Power Drift = -0.14 dB



Applied MIF = 0.00 dB

RF audio interference level = 41.63 dBV/m

**Emission category: M3**

MIF scaled E-field

|                                        |                                        |                                        |
|----------------------------------------|----------------------------------------|----------------------------------------|
| Grid 1 <b>M3</b><br><b>41.12 dBV/m</b> | Grid 2 <b>M3</b><br><b>41.62 dBV/m</b> | Grid 3 <b>M3</b><br><b>40.61 dBV/m</b> |
| Grid 4 <b>M4</b><br><b>36.94 dBV/m</b> | Grid 5 <b>M4</b><br><b>37.91 dBV/m</b> | Grid 6 <b>M4</b><br><b>36.47 dBV/m</b> |
| Grid 7 <b>M3</b><br><b>41.34 dBV/m</b> | Grid 8 <b>M3</b><br><b>41.65 dBV/m</b> | Grid 9 <b>M3</b><br><b>40.53 dBV/m</b> |

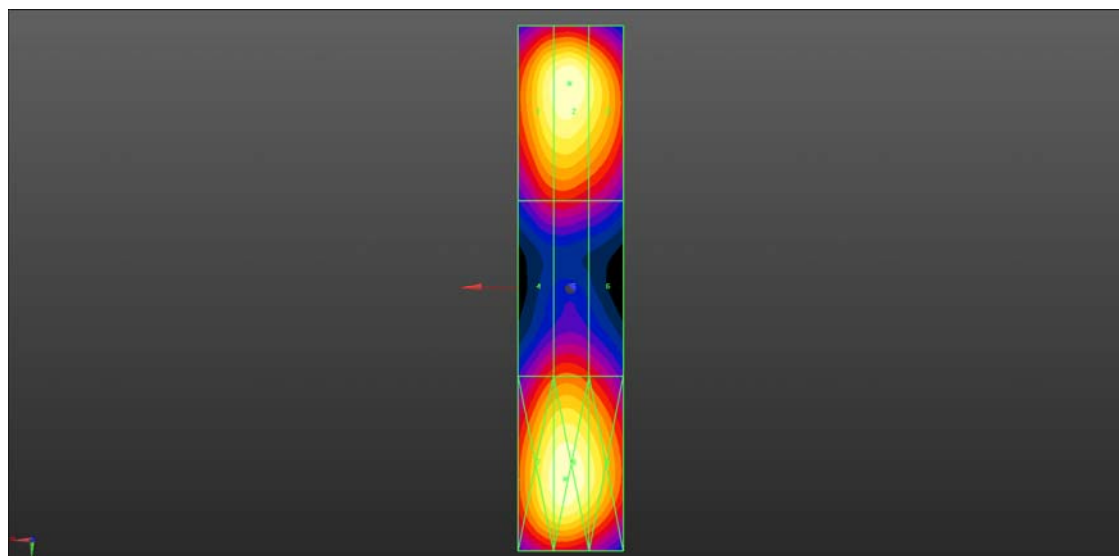

0 dB = 120.92 V/m = 41.65 dBV/m

## System Check\_1880MHz\_HAC\_RF\_E

Communication System: UID 0, CW (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2023.02.17;
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2022.06.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Hearing Aid Compatibility Test (81x321x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Maximum value of Total (interpolated) = 97.05 V/m

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 73.68 V/m; Power Drift = -0.11 dB



Applied MIF = 0.00 dB

RF audio interference level = 39.74 dBV/m

**Emission category: M2**

MIF scaled E-field

|                                        |                                        |                                        |
|----------------------------------------|----------------------------------------|----------------------------------------|
| Grid 1 <b>M2</b><br><b>39.28 dBV/m</b> | Grid 2 <b>M2</b><br><b>39.61 dBV/m</b> | Grid 3 <b>M2</b><br><b>38.55 dBV/m</b> |
| Grid 4 <b>M2</b><br><b>39.01 dBV/m</b> | Grid 5 <b>M2</b><br><b>39.52 dBV/m</b> | Grid 6 <b>M2</b><br><b>38.71 dBV/m</b> |
| Grid 7 <b>M2</b><br><b>39.32 dBV/m</b> | Grid 8 <b>M2</b><br><b>39.74 dBV/m</b> | Grid 9 <b>M2</b><br><b>38.83 dBV/m</b> |

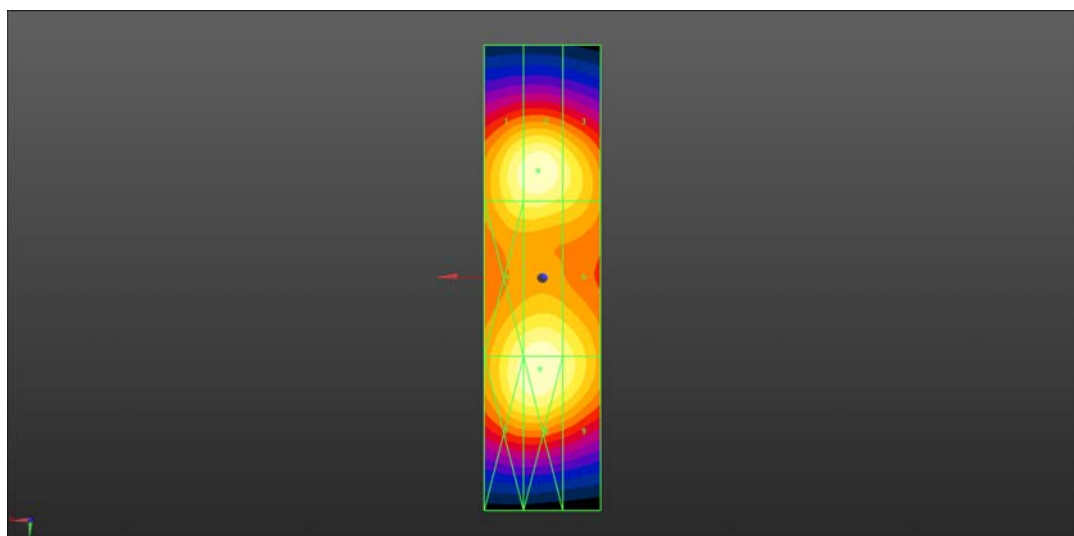

0 dB = 97.05 V/m = 39.74 dBV/m