



Product Block Diagram

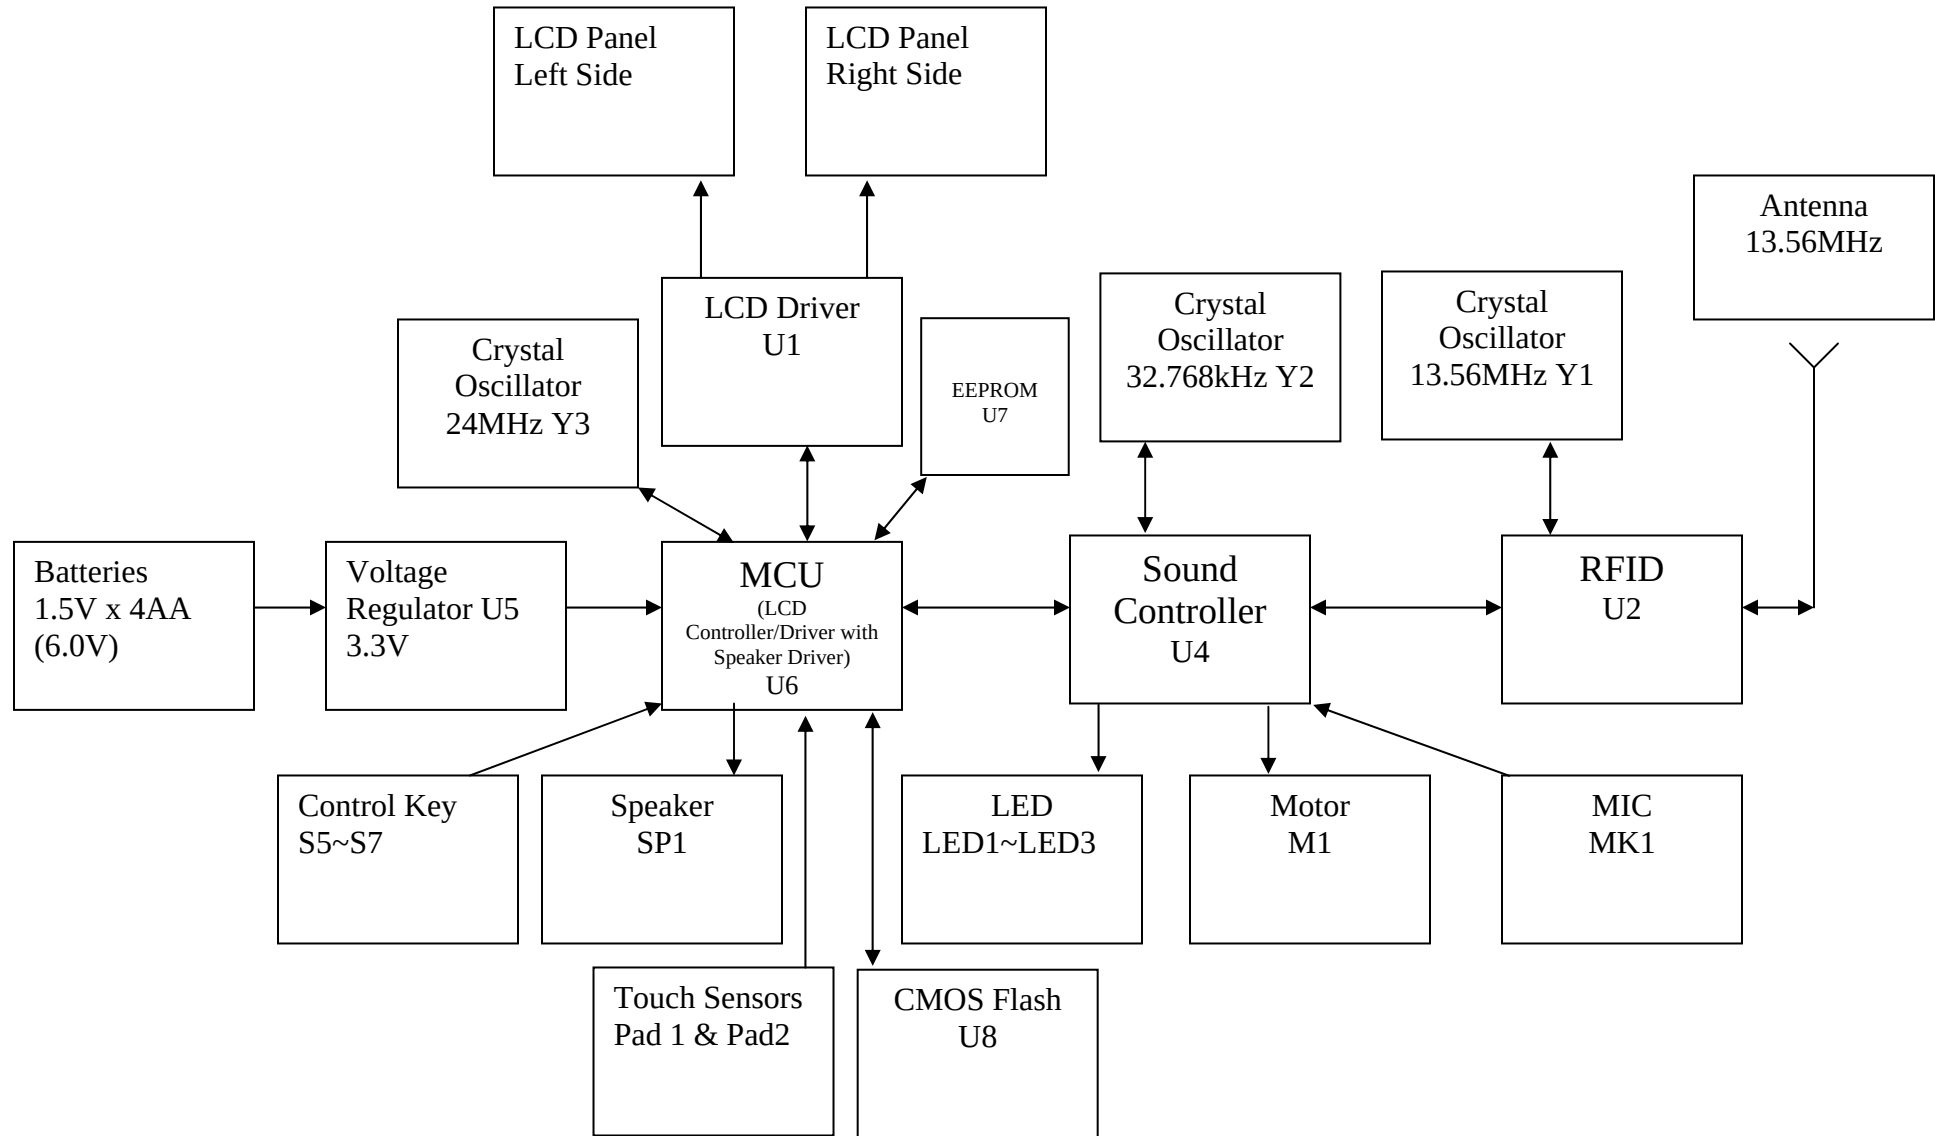

System Description

2.1 W55MID50 System Block Diagram

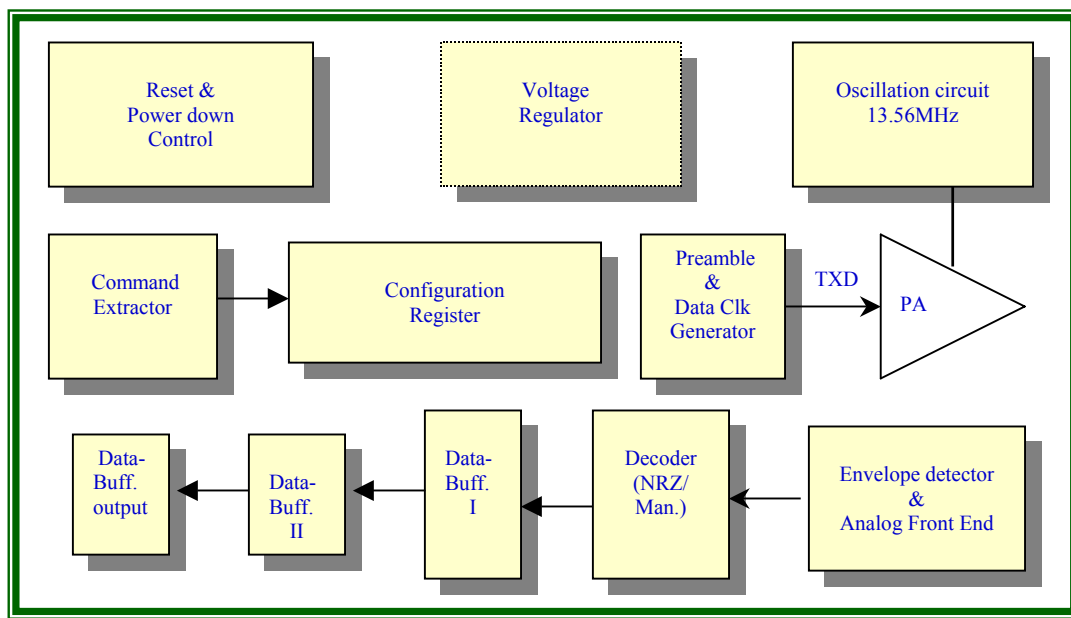

2.2 W55MID50 Functional Description

Transmission Power Amplifier (PA)

It provides 4 different selectable transmission power for Reader chip to support $MFID^{WB}$ Tag's radiation power supply. The external inductor coupling circuit is designed for 13.56MHz magnetic field resonance. The coupled center frequency will depend on equivalent value of external PCB inductor and capacitor.

Envelope Detector & Analog Front End

The major function of this unit provides $MFID^{WB}$ Tag's data can be extracted.

Voltage Regulator

The voltage regulator generates the system needs of device power supply.

Configuration Register

System configuration register controls the all functional settings of W55MID50 such as Tag data