



No. I20Z70029-SEM01

For

Samsung Electronics. Co., Ltd.

Mobile phone

Model Name: SM-A015T1

With

Hardware Version: REV3.0

Software Version: A015T1.001 (A015T1UVE1ATC1)

FCC ID: ZCASMA015T1

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

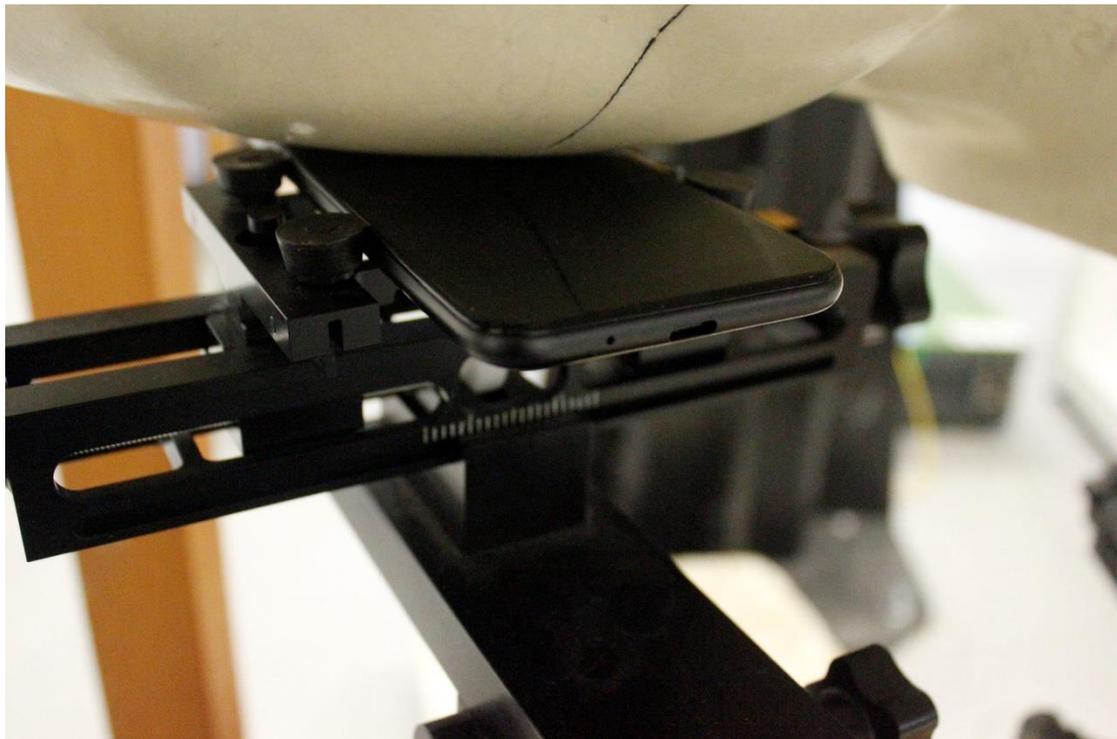


Picture 2: Right Head Touch Cheek Position

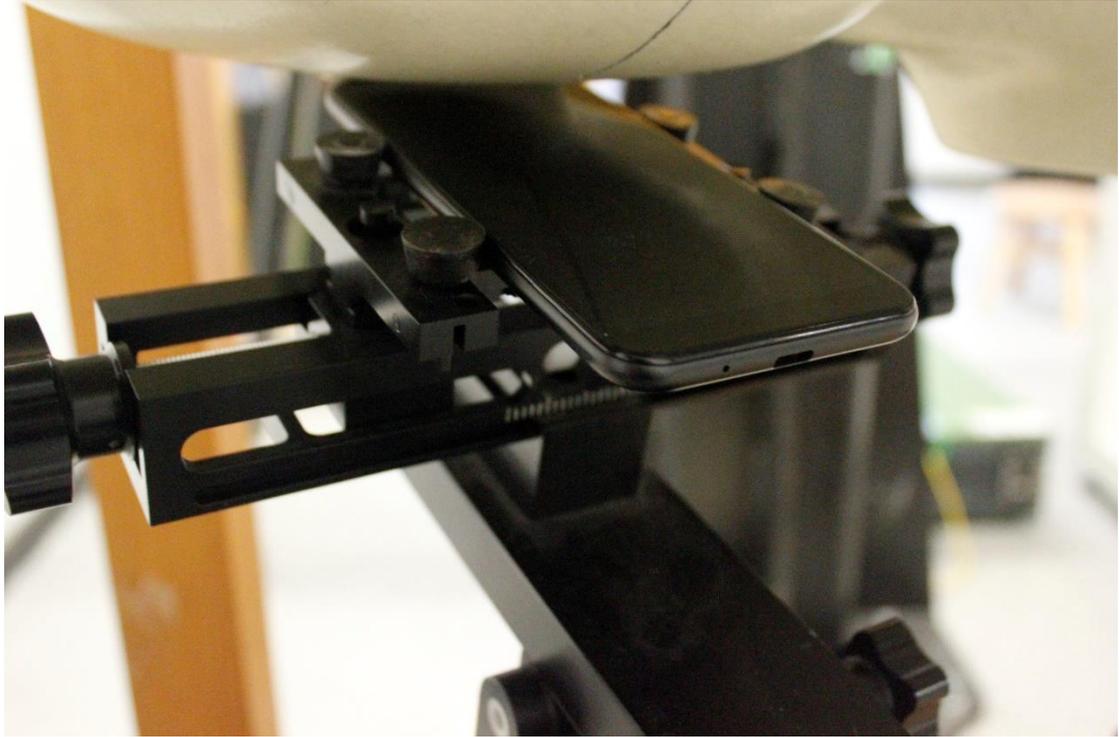

Picture 3: Right Head Tilt 15° Position

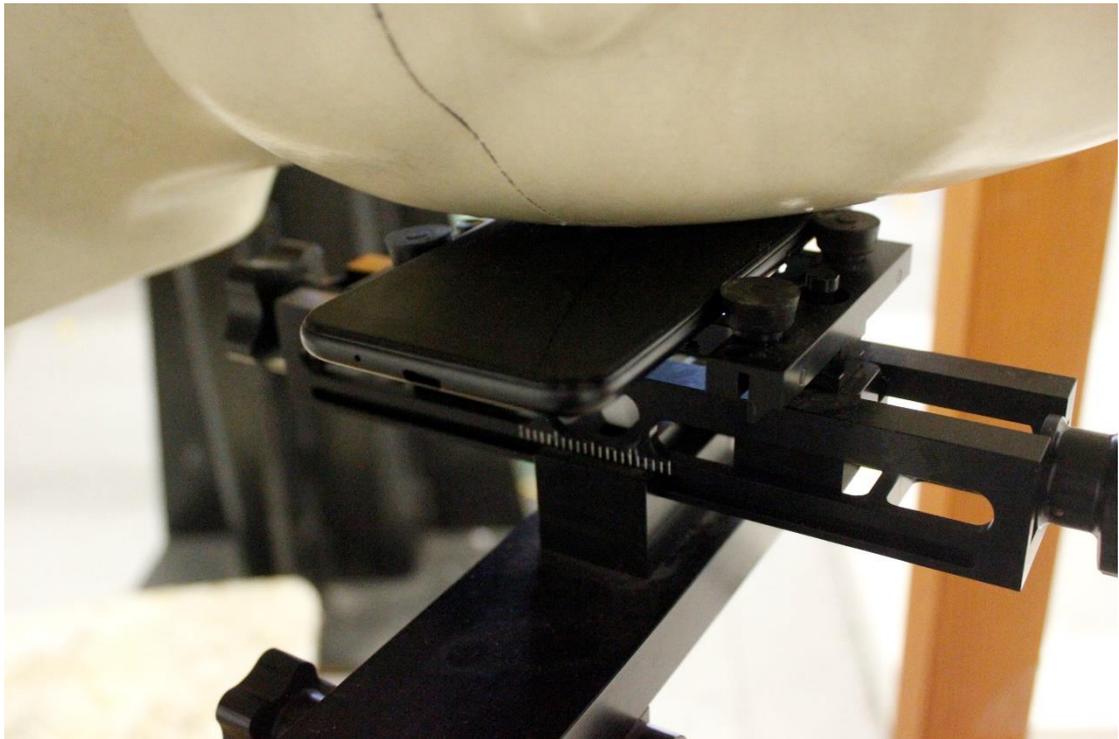


Picture 4: Left Head Touch Cheek Position

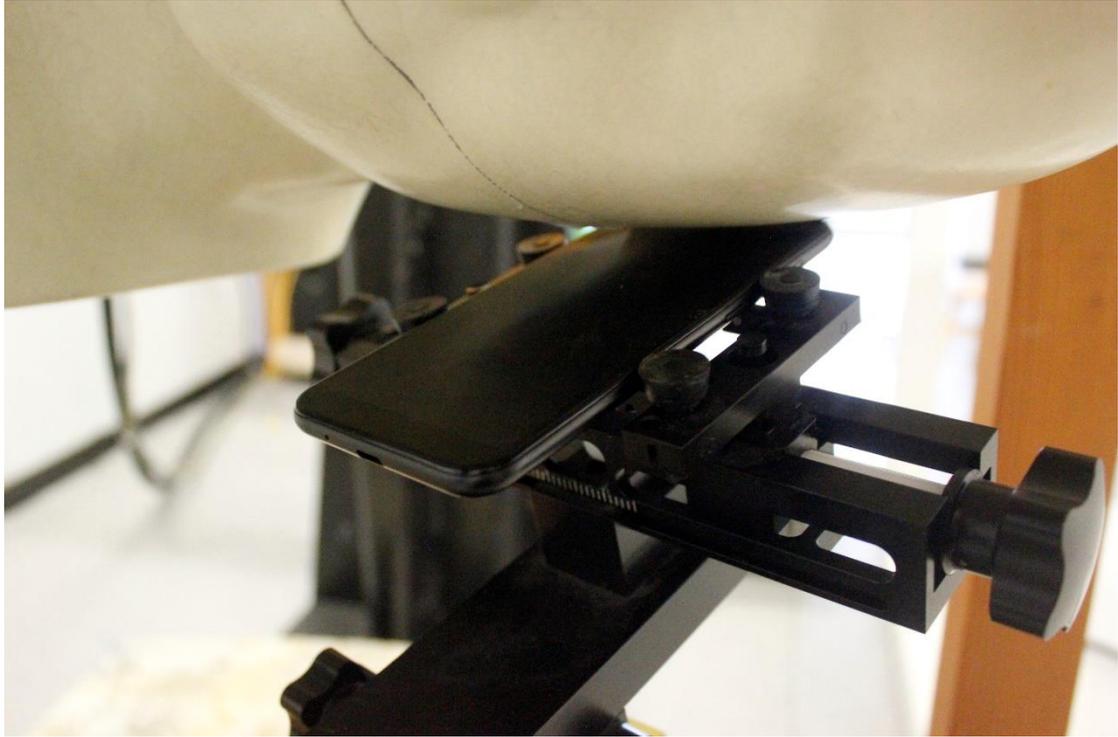


Picture 5: Left Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 9 test positions all with the distance =10/15/22mm between the EUT and the phantom bottom:

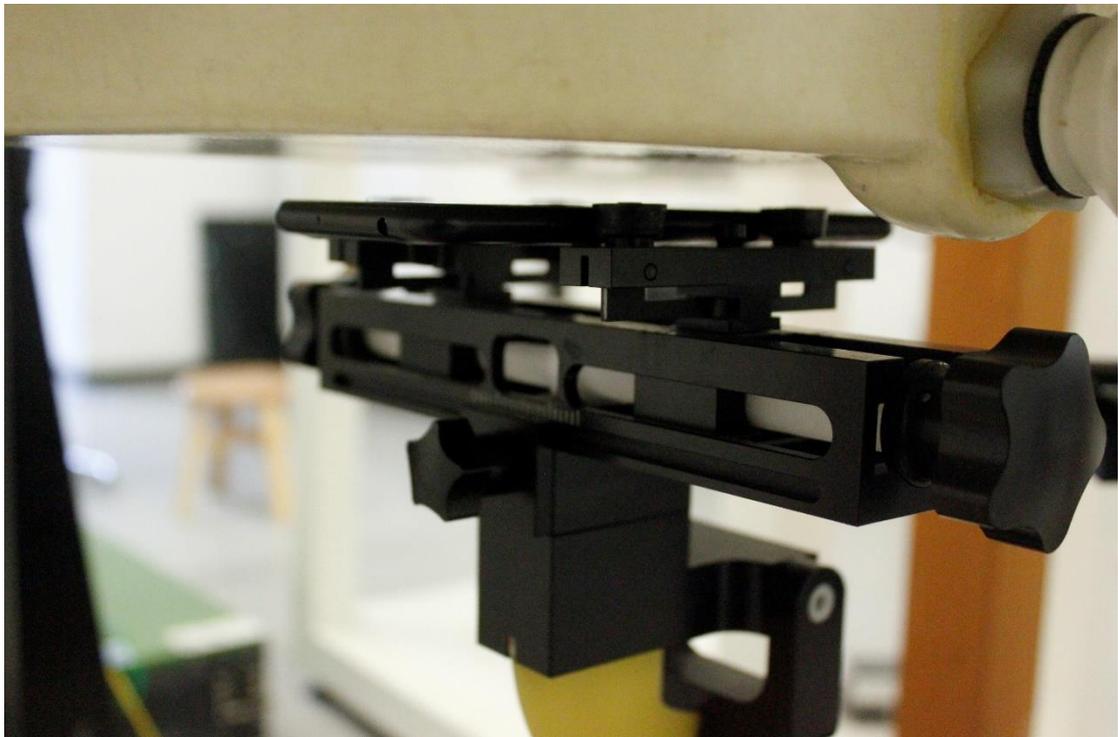


Picture 6: Front 10mm

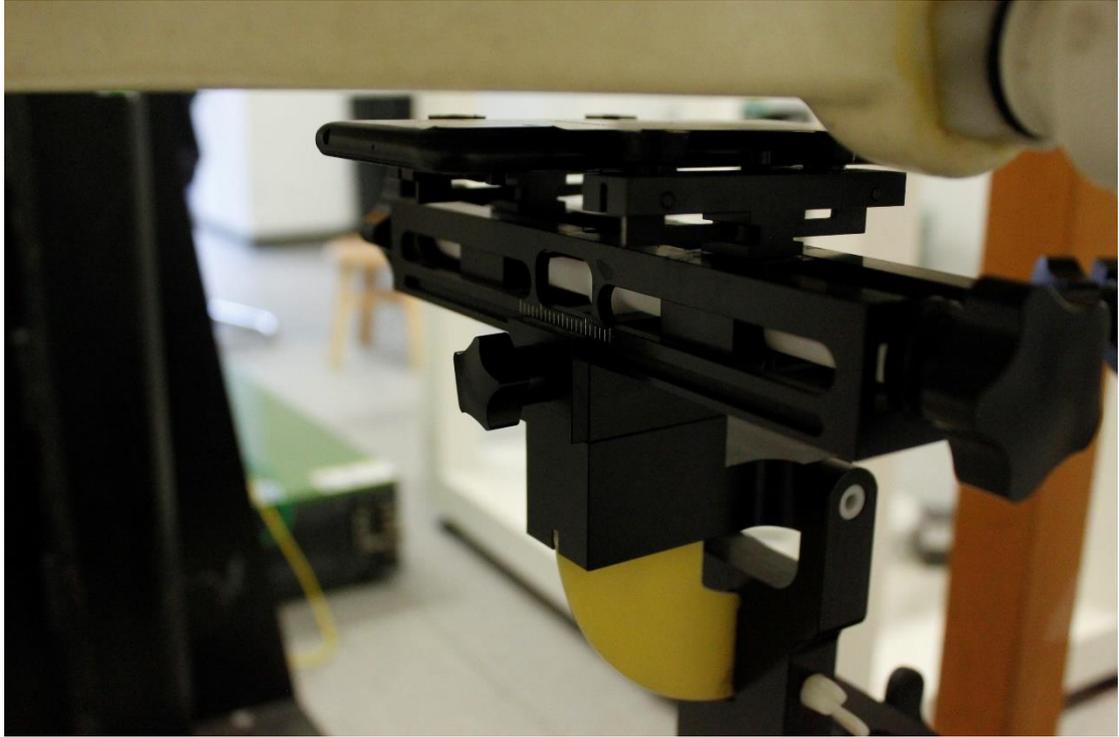


Picture 7: Rear 10mm

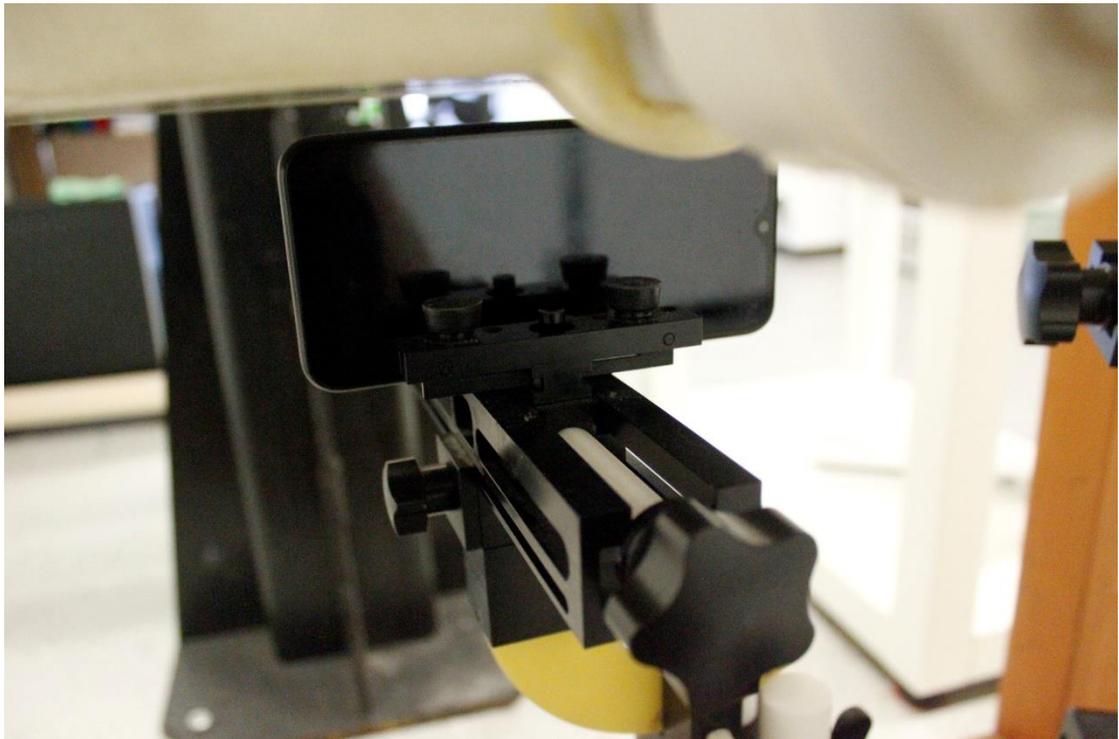


Picture 8: Left 10mm

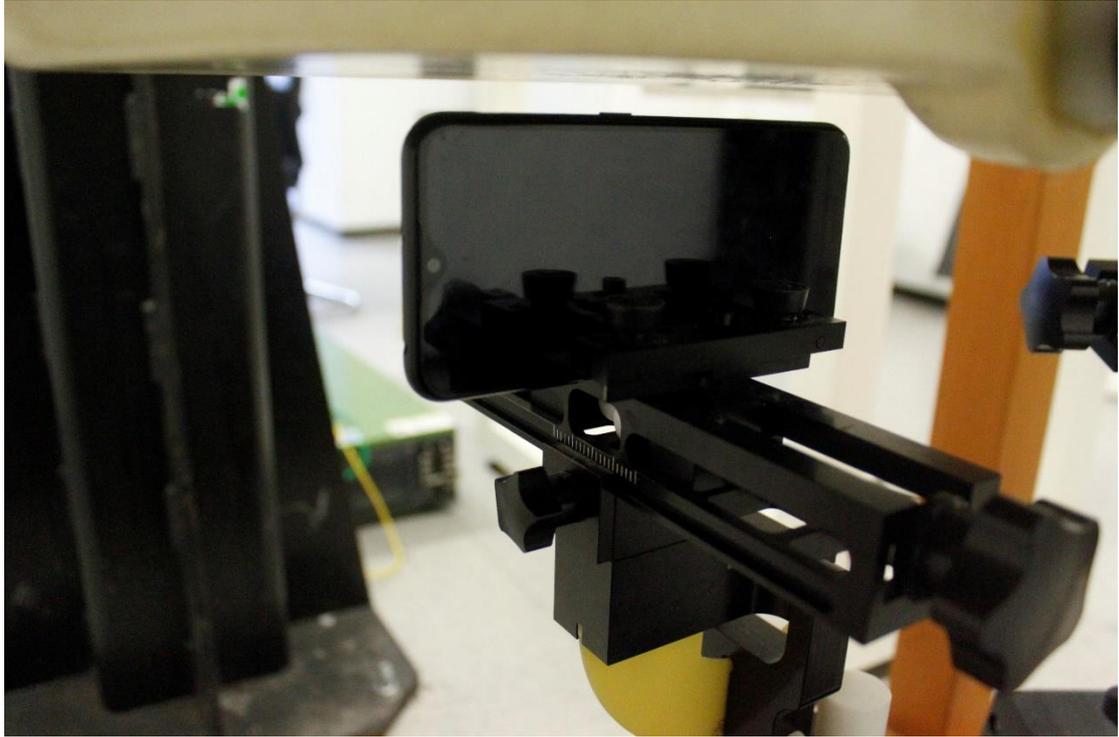


Picture 9: Right 10mm

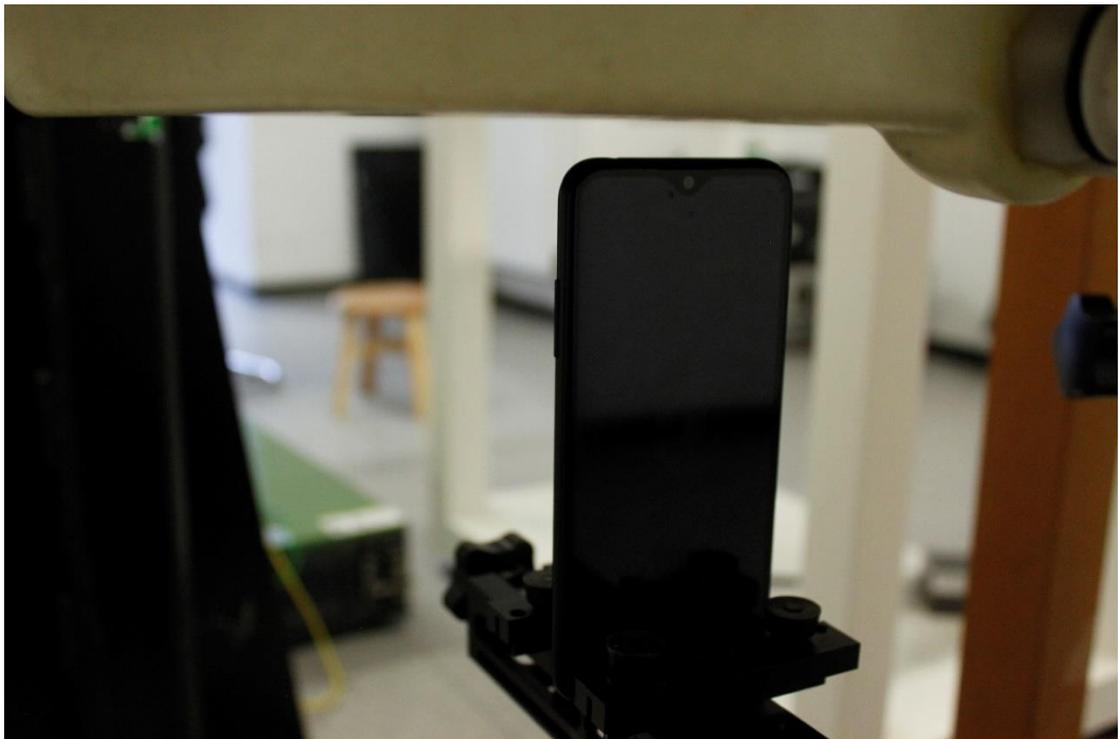


Picture 10: Top 10mm

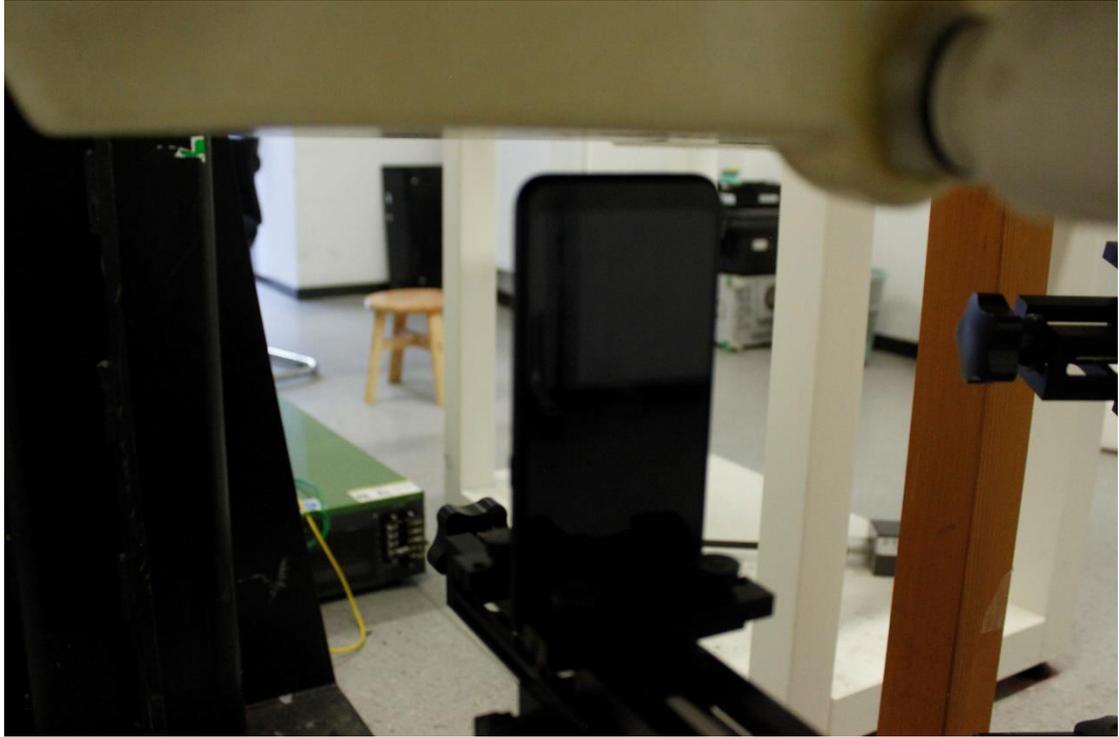


Picture 11: Bottom 10mm

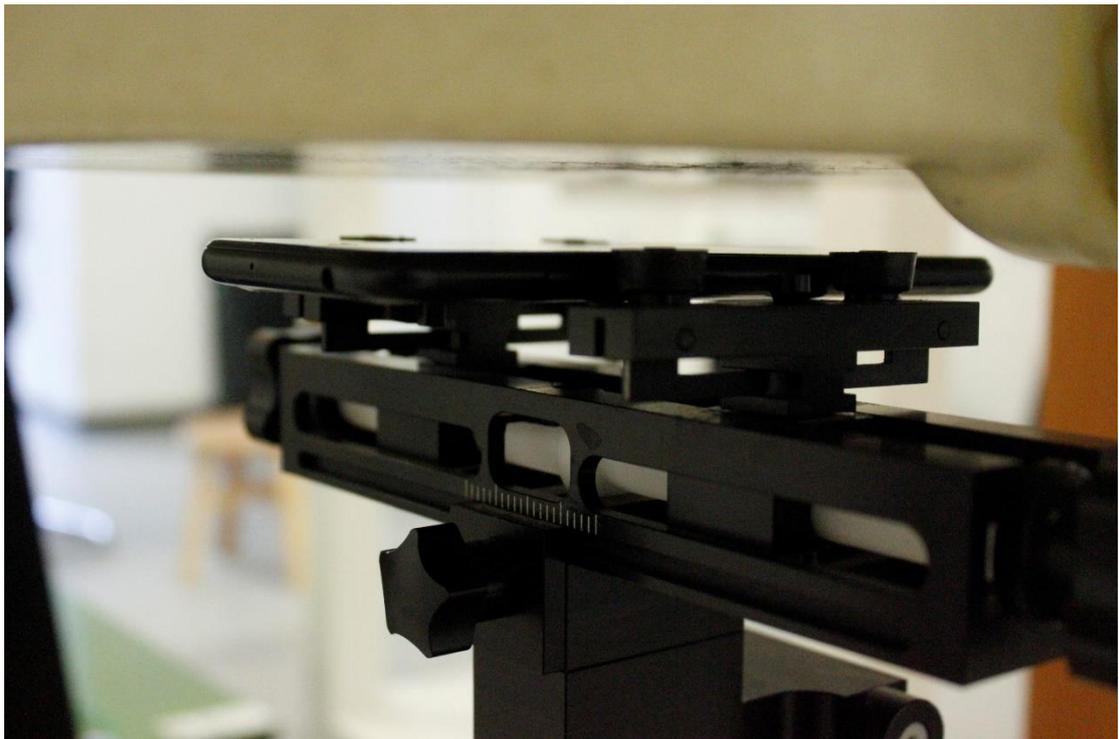


Picture 12: Front 15mm

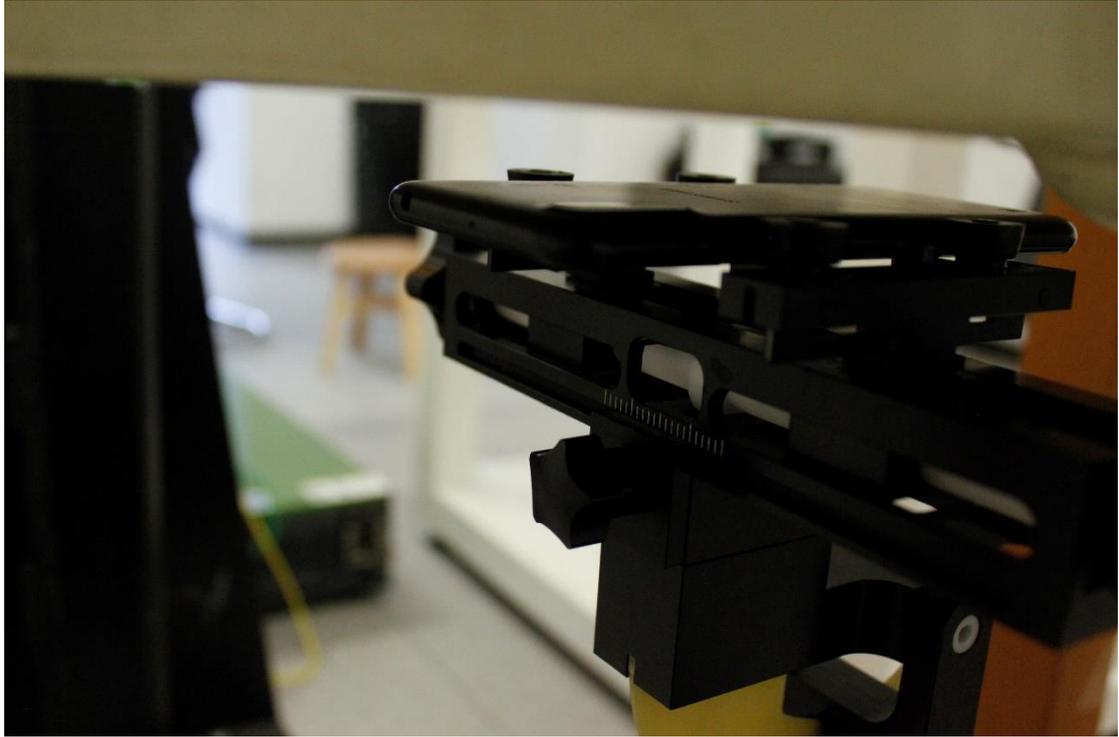


Picture 13: Rear 22mm

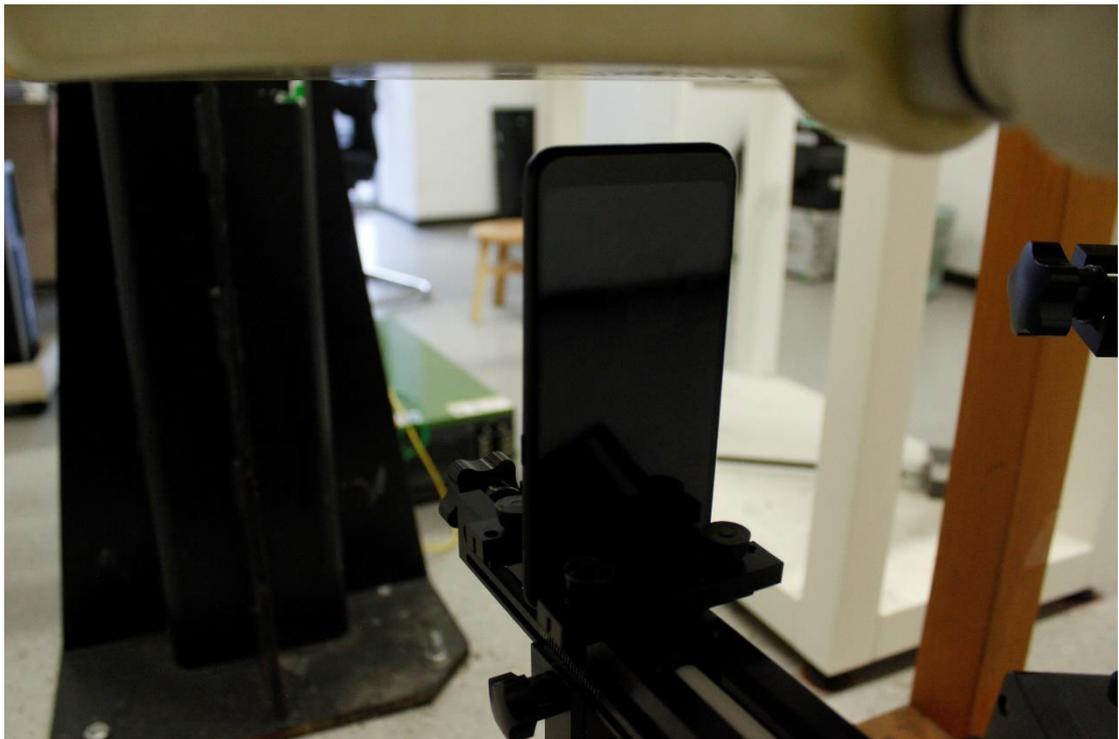

Picture 14: Bottom 22mm

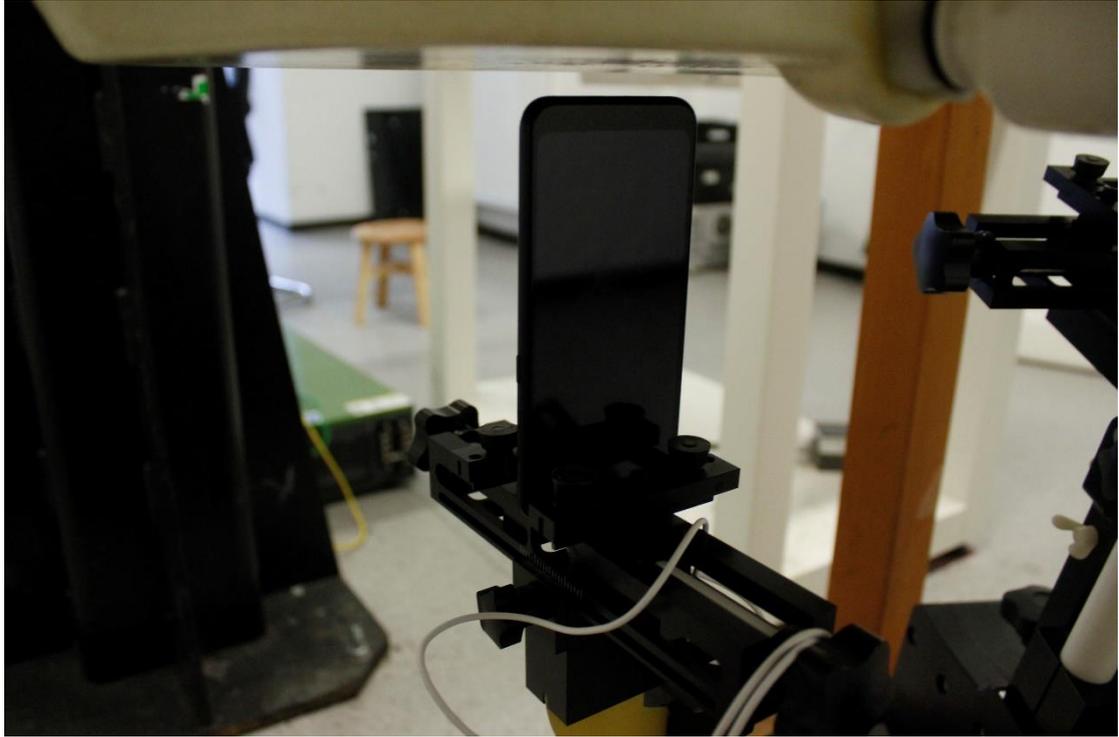

Picture 15: Bottom 10mm with Headset

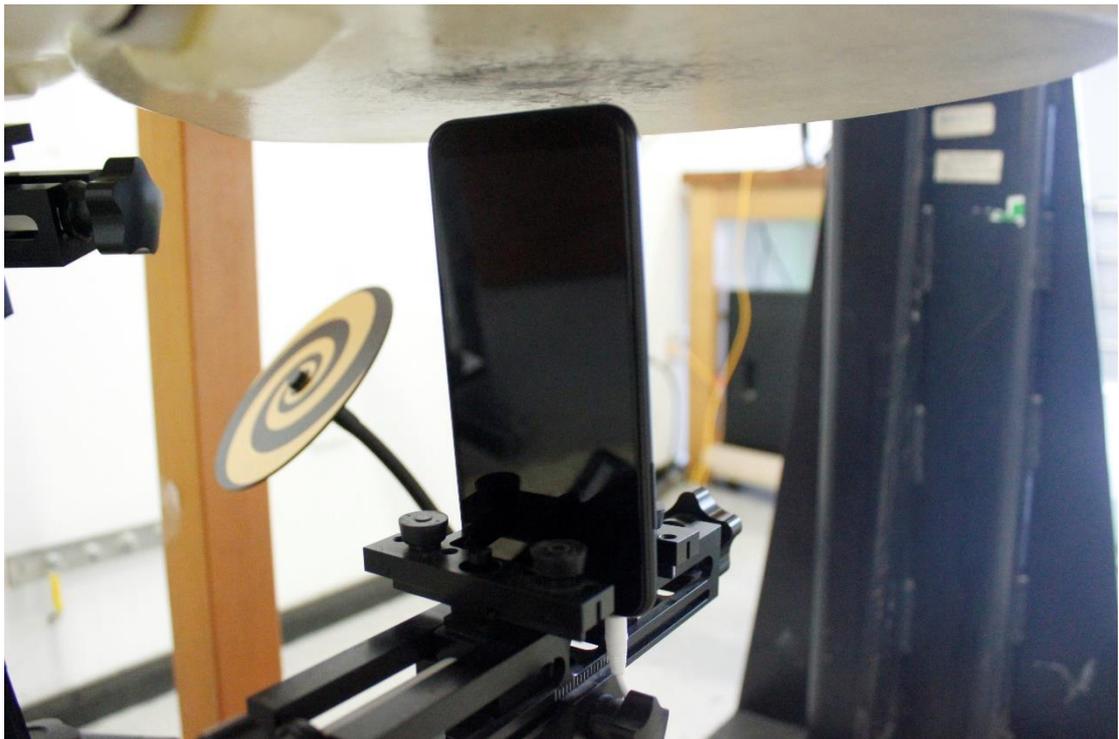

Picture 16: Bottom 22mm with Headset