



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	PEGATRON CORPORATION
Applicant Address	5F No. 76, Ligong St., Beitou District, Taipei City 112, Taiwan
FCC ID	VUI-ITV790X
Manufacturer's company	PEGATRON CORPORATION
Manufacturer Address	5F No. 76, Ligong St., Beitou District, Taipei City 112, Taiwan

Product Name	STB Product
Brand Name	CISCO
Model No.	ITV790X(The "X" in model name can be 0 to 9, A to Z or blank, for marketing purpose.)
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Jan. 23, 2014
Final Test Date	May 15, 2014
Submission Type	Original Equipment
Operating Mode	Client (without radar detection function)

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5350MHz / 5470 ~ 5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02r01, KDB644545 D01v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test	10
3.10. Duty Cycle.....	11
3.11. Test Configurations	13
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. Maximum Conducted Output Power Measurement.....	36
4.4. Power Spectral Density Measurement	39
4.5. Peak Excursion Measurement	50
4.6. Radiated Emissions Measurement	62
4.7. Band Edge Emissions Measurement	97
4.8. Frequency Stability Measurement	109
4.9. Antenna Requirements	111
5. LIST OF MEASURING EQUIPMENTS	112
6. MEASUREMENT UNCERTAINTY.....	114
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR432003AB	Rev. 01	Initial issue of report	Jun. 11, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : STB Product
Brand Name : CISCO
Model No. : ITV790X(The "X" in model name can be 0 to 9, A to Z or blank, for marketing purpose.)
Applicant : PEGATRON CORPORATION
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 23, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

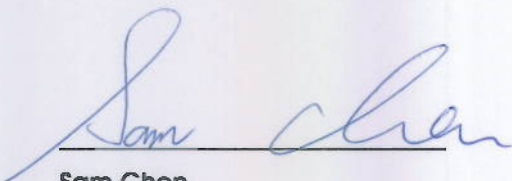

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	13.06 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.02 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.04 dB
4.5	15.407(a)	Peak Excursion	Complies	1.98 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.00 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.06 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	16 for 20MHz bandwidth ; 7 for 40MHz bandwidth 3 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss1 (VHT20): 18.08 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.80 MHz
Maximum Conducted Output Power	Band 1: 802.11ac MCS0/Nss1 (VHT20): 16.74 dBm ; 802.11ac MCS0/Nss1 (VHT40): 16.98 dBm ; 802.11ac MCS0/Nss1 (VHT80): 16.90 dBm Band 2: 802.11ac MCS0/Nss1 (VHT20): 23.72 dBm ; 802.11ac MCS0/Nss1 (VHT40): 23.83 dBm ; 802.11ac MCS0/Nss1 (VHT80): 21.16 dBm Band 3: 802.11ac MCS0/Nss1 (VHT20): 23.44 dBm ; 802.11ac MCS0/Nss1 (VHT40): 23.84 dBm ; 802.11ac MCS0/Nss1 (VHT80): 20.57 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	16
Channel Band Width (99%)	11a: 17.12 MHz
Maximum Conducted Output Power	Band 1: 16.74 dBm ; Band 2: 23.63 dBm ; Band 3: 23.18 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description
Communication Mode	☒ IP Based (Load Based) ☐ Frame Based
TPC Function	☒ With TPC ☐ Without TPC
Weather Band (5600~5650MHz)	☐ With 5600~5650MHz ☒ Without 5600~5650MHz
Beamforming Function	☐ With beamforming ☒ Without beamforming

Antenna and Band width

Antenna	Three (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	ENG	3A-183WU12	Input:100-120V~50-60Hz, 0.5A Output:12V, 1.5A
Adapter 2	APD	WB-18B12FU	Input:100-120V~ , 60Hz, 0.4A Max. Output:12V, 1.5A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Airgain	N5x20B	Embedded Antenna	U.FL	1.70
2	Airgain	N5x20B	Embedded Antenna	U.FL	1.70
3	Airgain	N5x20B	Embedded Antenna	U.FL	1.70
4	Hong Lin	N/A	Printed Antenna	N/A	3.39


Note: The EUT has three antennas.


For IEEE 802.11a/n/ac mode (3TX/3RX)

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

For IEEE 802.15.4 ZigBee RF4CE mode: (1TX/1RX)

Ant. 4 can be use as transmit and receive antenna.

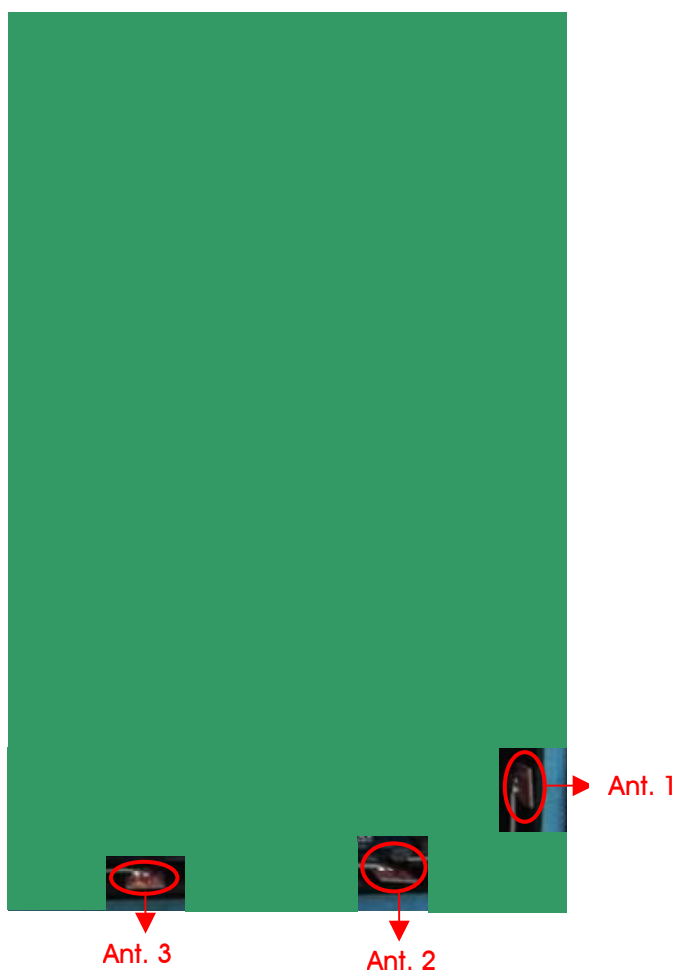

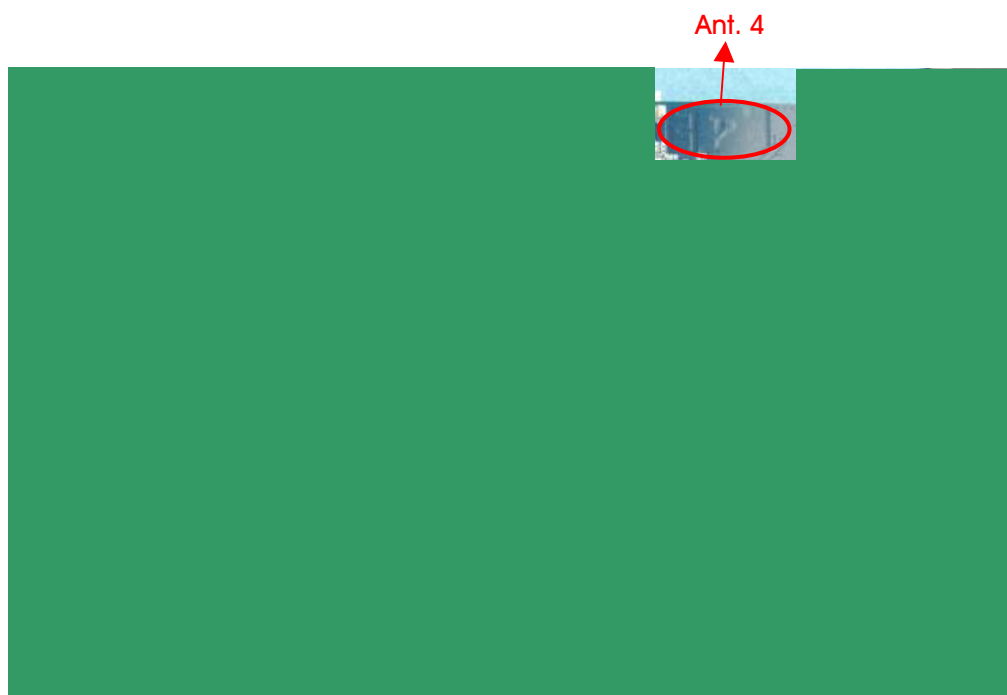

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 132, 136, 140.

For 40MHz bandwidth systems, use Channel 38, 46, 54, 62, 102, 110, 134.

For 80MHz bandwidth systems, use Channel 42, 58, 106.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	112	5560 MHz
	102	5510 MHz	116	5580 MHz
	104	5520 MHz	132	5660 MHz
	106	5530 MHz	134	5670 MHz
	108	5540 MHz	136	5680 MHz
	110	5550 MHz	140	5700 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	CTX		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 1-3	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140	1+2+3
	11ac VHT40	Band 1-3	MCS0/Nss1	38/46/54/62/ 102/110/134	1+2+3
	11ac VHT80	Band 1-3	MCS0/Nss1	42/58/106	1+2+3
	11a/BPSK	Band 1-3	6Mbps	36/40/48/52/60/ 64/100/116/140	1+2+3
Power Spectral Density	11ac VHT20	Band 1-3	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140	1+2+3
	11ac VHT40	Band 1-3	MCS0/Nss1	38/46/54/62/ 102/110/134	1+2+3
	11ac VHT80	Band 1-3	MCS0/Nss1	42/58/106	1+2+3
	11a/BPSK	Band 1-3	6Mbps	36/40/48/52/60/ 64/100/116/140	1+2+3
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 1-3	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140	1+2+3
	11ac VHT40	Band 1-3	MCS0/Nss1	38/46/54/62/ 102/110/134	1+2+3
	11ac VHT80	Band 1-3	MCS0/Nss1	42/58/106	1+2+3
	11a/BPSK	Band 1-3	6Mbps	36/40/48/52/60/ 64/100/116/140	1+2+3
Peak Excursion	11ac VHT20	Band 1-3	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140	1+2+3
	11ac VHT40	Band 1-3	MCS0/Nss1	38/46/54/62/ 102/110/134	1+2+3
	11ac VHT80	Band 1-3	MCS0/Nss1	42/58/106	1+2+3
	11a/BPSK	Band 1-3	6Mbps	36/40/48/52/60/ 64/100/116/140	1+2+3
Radiated Emission Below 1GHz	CTX		-	-	-

Radiated Emission Above 1GHz	11ac VHT20	Band 1-3	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140	1+2+3
	11ac VHT40	Band 1-3	MCS0/Nss1	38/46/54/62/ 102/110/134	1+2+3
	11ac VHT80	Band 1-3	MCS0/Nss1	42/58/106	1+2+3
	11a/BPSK	Band 1-3	6Mbps	36/40/48/52/60/ 64/100/116/140	1+2+3
Band Edge Emission	11ac VHT20	Band 1-3	MCS0/Nss1	36/40/48/52/60/ 64/100/116/140	1+2+3
	11ac VHT40	Band 1-3	MCS0/Nss1	38/46/54/62/ 102/110/134	1+2+3
	11ac VHT80	Band 1-3	MCS0/Nss1	42/58/106	1+2+3
	11a/BPSK	Band 1-3	6Mbps	36/40/48/52/60/ 64/100/116/140	1+2+3
Frequency Stability	Un-modulation		-	40/60/100	1+2+3

Note: VHT20/VHT40 covers HT20 & HT40, due to same modulation.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Laying of EUT + Adapter 1

Mode 2. Laying of EUT + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test:

Mode 1. Laying of EUT + Adapter 1

Mode 2. Laying of EUT + Adapter 2

Mode 1 is the worst case, so it was selected to record in this test report.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	Mtool 2.0.0.7								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS0/Nss1 VHT20	42	42	41	71	72	64	68	77	70

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	Mtool 2.0.0.7						
Frequency	5190 MHz	5230 MHz	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS0/Nss1 VHT40	38	38	72	62	66	74	72

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	Mtool 2.0.0.7		
Frequency	5210 MHz	5290 MHz	5530 MHz
MCS0/Nss1 VHT80	40	62	62

Power Parameters of IEEE 802.11a


Test Software Version	Mtool 2.0.0.7								
Frequency	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
802.11a	42	42	40	71	67	66	70	75	66

3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.10. Duty Cycle

IEEE 802.11ac MCS0/Nss1 VHT20

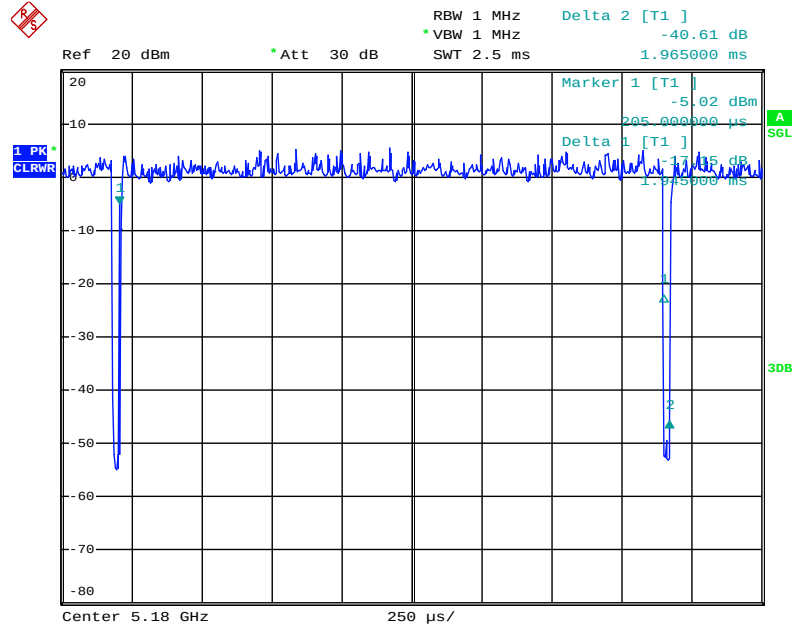


Date: 20.FEB.2014 23:06:35

IEEE 802.11ac MCS0/Nss1 VHT40

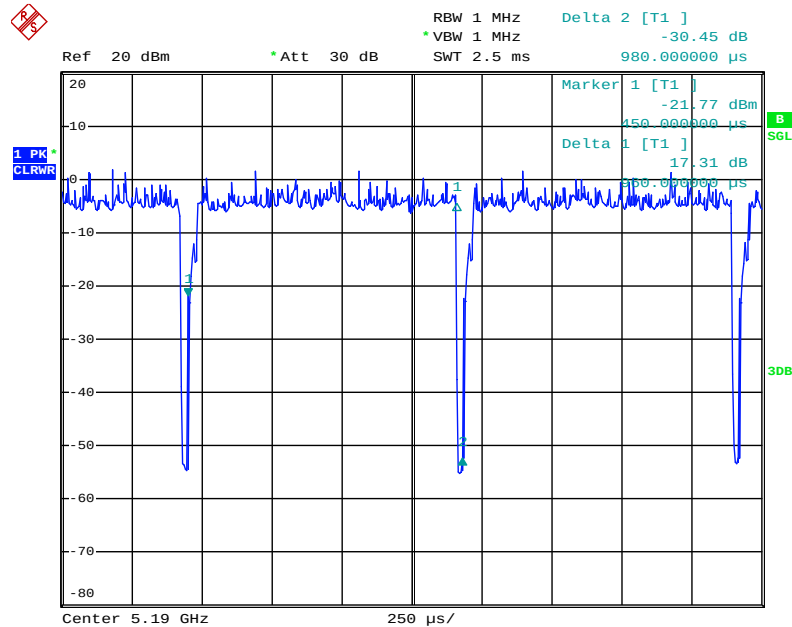


Date: 20.FEB.2014 23:07:56

IEEE 802.11ac MCS0/Nss1 VHT80

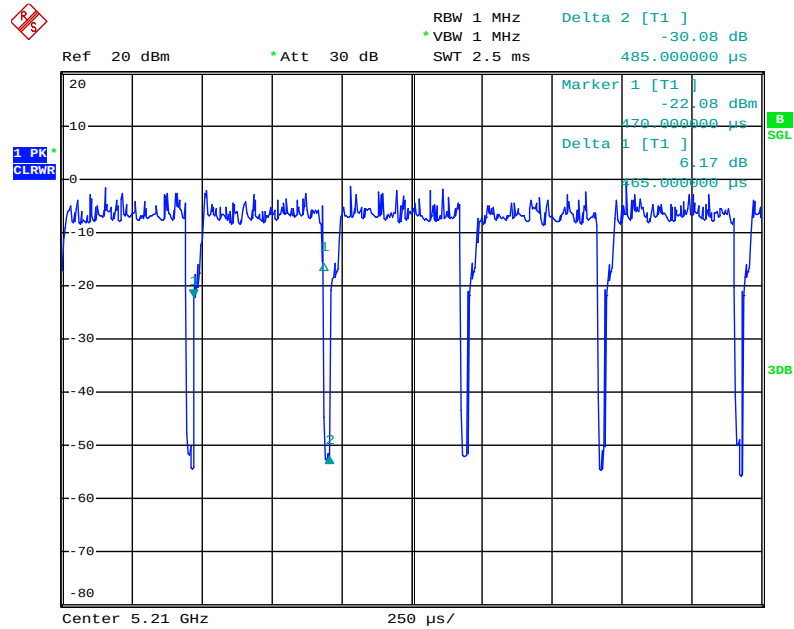


Date: 20.FEB.2014 23:08:51

IEEE 802.11a

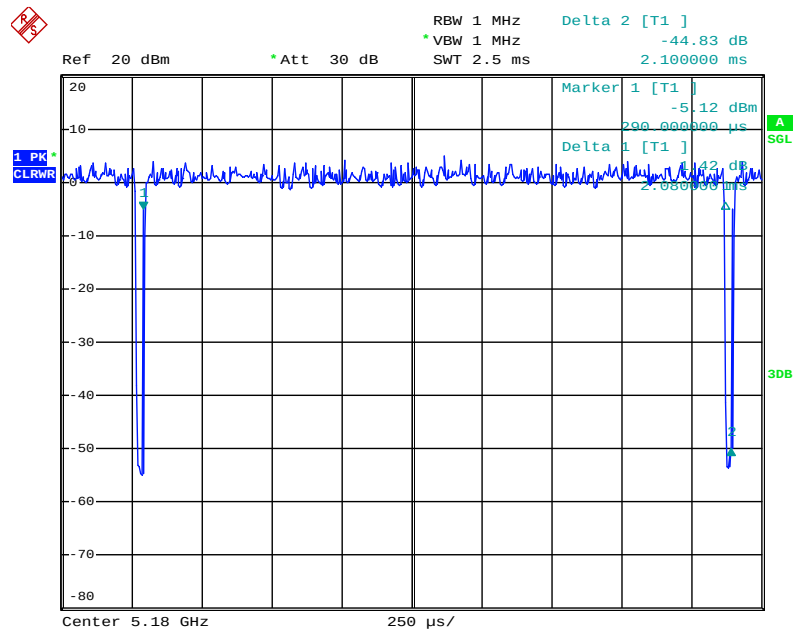

Date: 20.FEB.2014 23:05:58

3.11. Test Configurations

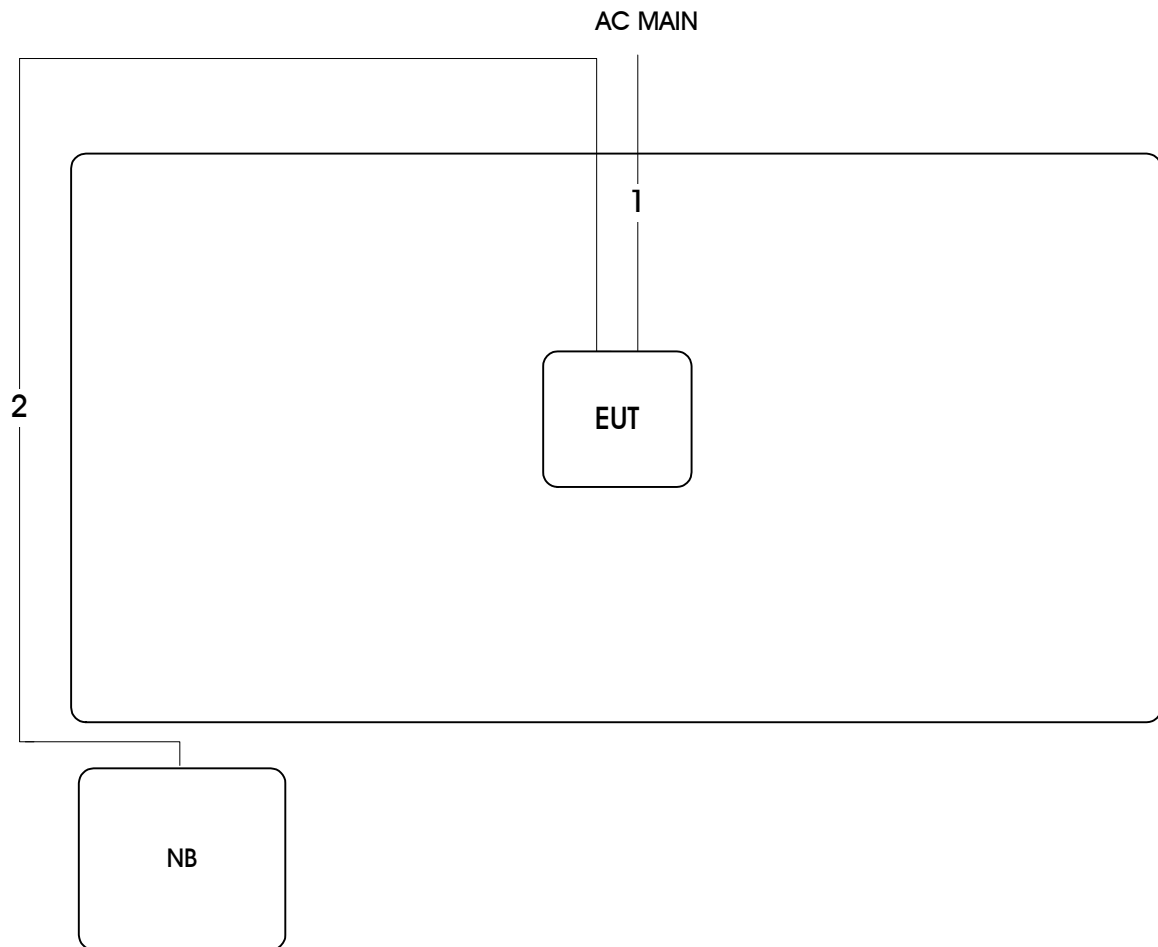

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement


Temperature	24°C	Humidity	52%
Test Engineer	Justin Chiu	Phase	Line
Configuration	CTX	Test Mode	Mode 1

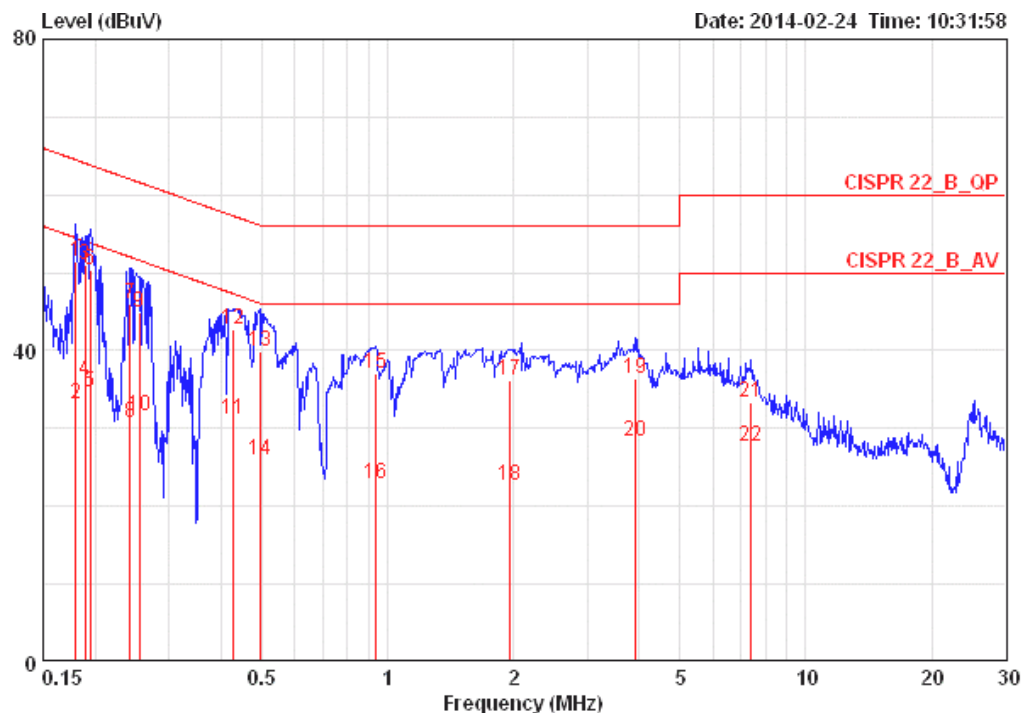

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.17961	51.35	-13.15	64.50	0.15	51.04	0.16	LINE	QP
2	0.17961	33.11	-21.39	54.50	0.15	32.80	0.16	LINE	AVERAGE
3 B	0.18938	51.00	-13.06	64.06	0.15	50.69	0.16	LINE	QP
4	0.18938	36.13	-17.93	54.06	0.15	35.82	0.16	LINE	AVERAGE
5	0.19447	34.60	-19.24	53.84	0.15	34.29	0.16	LINE	AVERAGE
6	0.19447	50.38	-13.46	63.84	0.15	50.07	0.16	LINE	QP
7	0.24165	46.02	-16.02	62.04	0.15	45.70	0.17	LINE	QP
8	0.24165	30.74	-21.30	52.04	0.15	30.42	0.17	LINE	AVERAGE
9	0.25480	44.80	-16.80	61.60	0.15	44.48	0.17	LINE	QP
10	0.25480	31.68	-19.92	51.60	0.15	31.36	0.17	LINE	AVERAGE
11	0.42825	31.25	-16.03	47.29	0.15	30.92	0.18	LINE	AVERAGE
12	0.42825	42.81	-14.47	57.29	0.15	42.48	0.18	LINE	QP

13	0.49411	39.98	-16.12	56.10	0.15	39.64	0.18	LINE	QP
14	0.49411	25.99	-20.11	46.10	0.15	25.65	0.18	LINE	AVERAGE
15	0.93314	36.98	-19.02	56.00	0.16	36.62	0.20	LINE	QP
16	0.93314	22.79	-23.21	46.00	0.16	22.43	0.20	LINE	AVERAGE
17	1.959	36.13	-19.87	56.00	0.19	35.69	0.25	LINE	QP
18	1.959	22.74	-23.26	46.00	0.19	22.30	0.25	LINE	AVERAGE
19	3.901	36.40	-19.60	56.00	0.28	35.83	0.30	LINE	QP
20	3.901	28.39	-17.61	46.00	0.28	27.82	0.30	LINE	AVERAGE
21	7.407	33.45	-26.55	60.00	0.33	32.76	0.36	LINE	QP
22	7.407	27.75	-22.25	50.00	0.33	27.06	0.36	LINE	AVERAGE

Temperature	24°C	Humidity	52%
Test Engineer	Justin Chiu	Phase	Neutral
Configuration	CTX	Test Mode	Mode 1

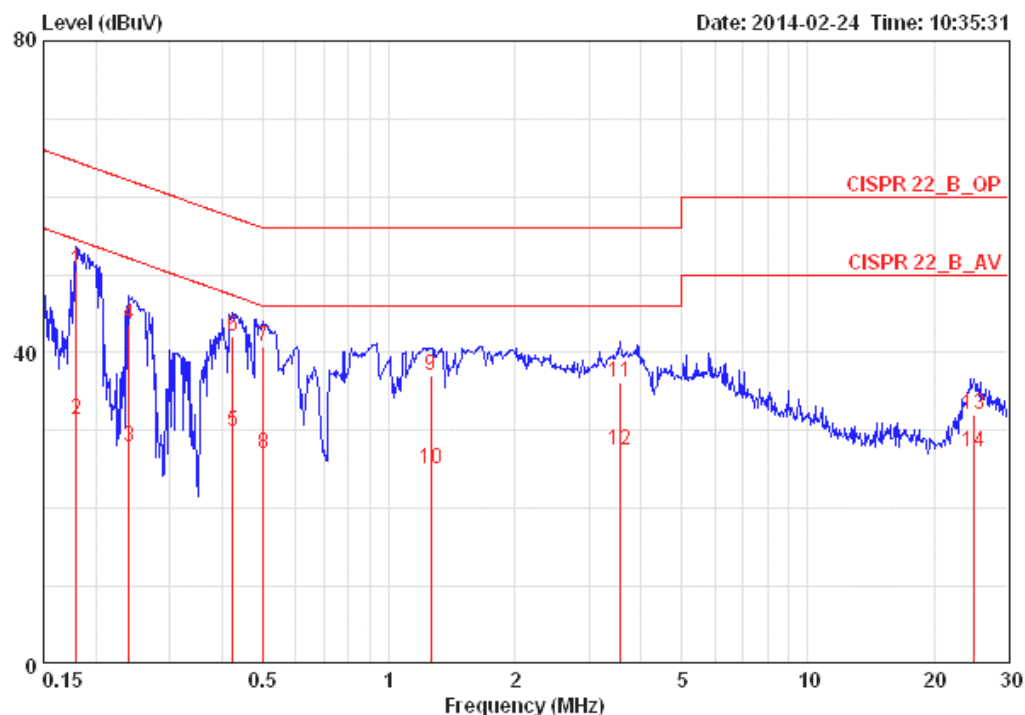

	Freq	Level	Over	Limit	LISN	Read	Cable		
	MHz	dBuV	Limit	Line	Factor	Level	Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.17961	50.53	-13.97	64.50	0.07	50.30	0.16	NEUTRAL	QP
2	0.17961	31.34	-23.16	54.50	0.07	31.11	0.16	NEUTRAL	AVERAGE
3	0.24037	27.97	-24.11	52.08	0.07	27.73	0.17	NEUTRAL	AVERAGE
4	0.24037	43.51	-18.57	62.08	0.07	43.27	0.17	NEUTRAL	QP
5	0.42373	29.94	-17.43	47.37	0.07	29.69	0.18	NEUTRAL	AVERAGE
6	0.42373	42.08	-15.29	57.37	0.07	41.83	0.18	NEUTRAL	QP
7	0.50203	40.68	-15.32	56.00	0.07	40.42	0.19	NEUTRAL	QP
8	0.50203	26.95	-19.05	46.00	0.07	26.69	0.19	NEUTRAL	AVERAGE
9	1.262	36.96	-19.04	56.00	0.09	36.66	0.22	NEUTRAL	QP
10	1.262	25.17	-20.83	46.00	0.09	24.87	0.22	NEUTRAL	AVERAGE
11	3.565	36.18	-19.82	56.00	0.13	35.76	0.29	NEUTRAL	QP
12	3.565	27.52	-18.48	46.00	0.13	27.10	0.29	NEUTRAL	AVERAGE
13	24.790	32.08	-27.92	60.00	0.65	30.87	0.57	NEUTRAL	QP
14	24.790	27.21	-22.79	50.00	0.65	26.00	0.57	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.32	17.92
40	5200 MHz	20.16	17.92
48	5240 MHz	20.32	17.92
52	5260 MHz	20.16	17.92
60	5300 MHz	20.16	17.92
64	5320 MHz	20.32	17.92
100	5500 MHz	20.32	17.92
116	5580 MHz	20.48	17.92
140	5700 MHz	20.32	18.08

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	38.72	36.16
46	5230 MHz	39.04	36.48
54	5270 MHz	38.72	36.16
62	5310 MHz	39.04	36.48
102	5510 MHz	38.72	36.16
110	5550 MHz	38.72	36.48
134	5670 MHz	38.72	36.48

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	81.92	76.80
58	5290 MHz	80.64	76.80
106	5530 MHz	81.92	76.80

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	19.68	16.96
40	5200 MHz	19.84	16.96
48	5240 MHz	19.68	16.96
52	5260 MHz	20.00	17.12
60	5300 MHz	19.84	17.12
64	5320 MHz	19.84	17.12
100	5500 MHz	19.84	16.96
116	5580 MHz	20.00	16.96
140	5700 MHz	20.00	17.12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

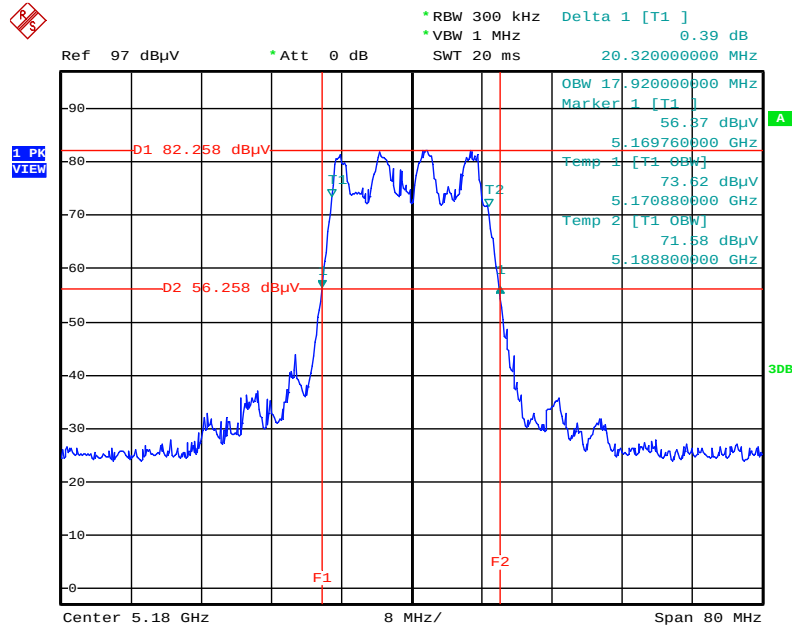


Date: 20.FEB.2014 21:30:50

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz

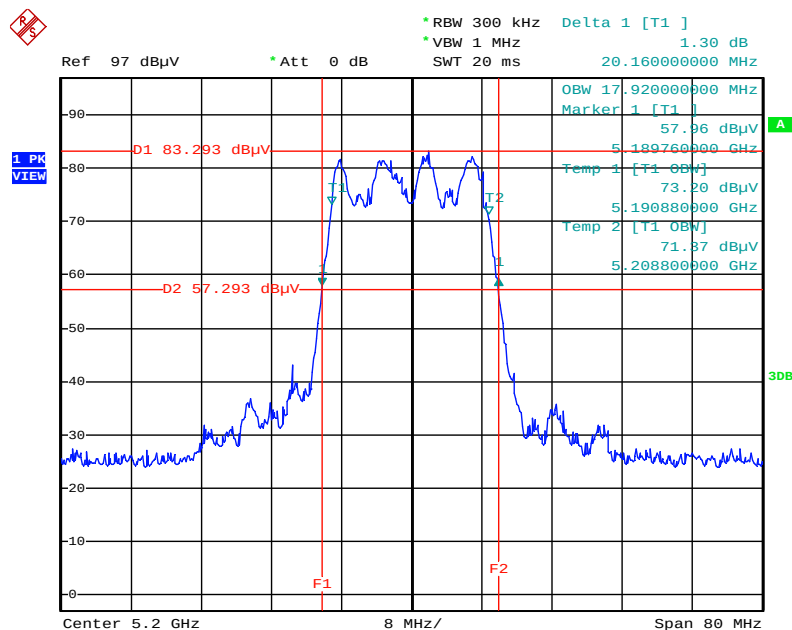


Date: 20.FEB.2014 21:30:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz

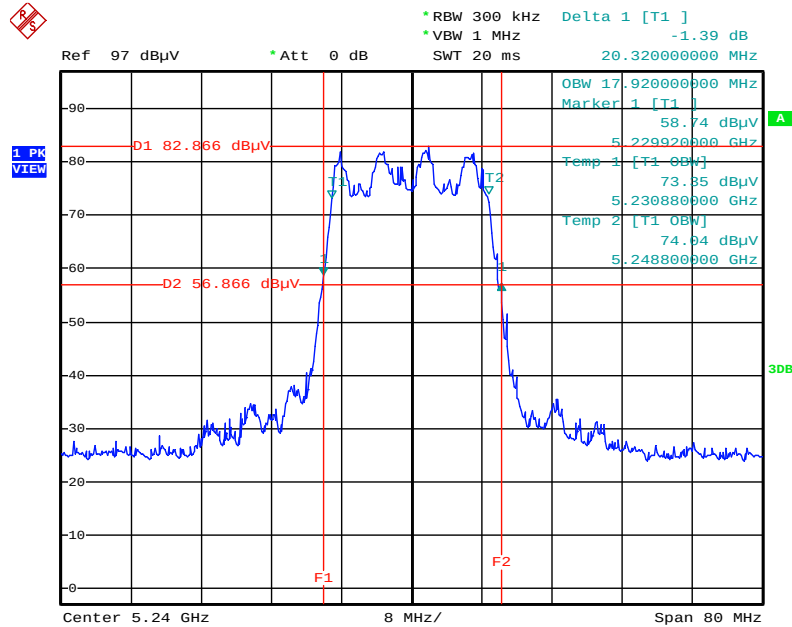


Date: 20.FEB.2014 21:29:51

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz

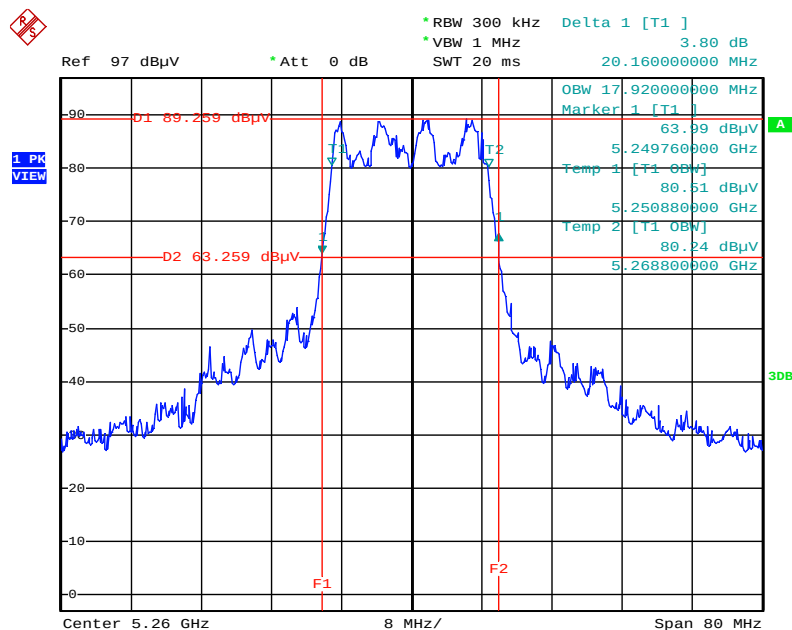


Date: 20.FEB.2014 21:29:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz

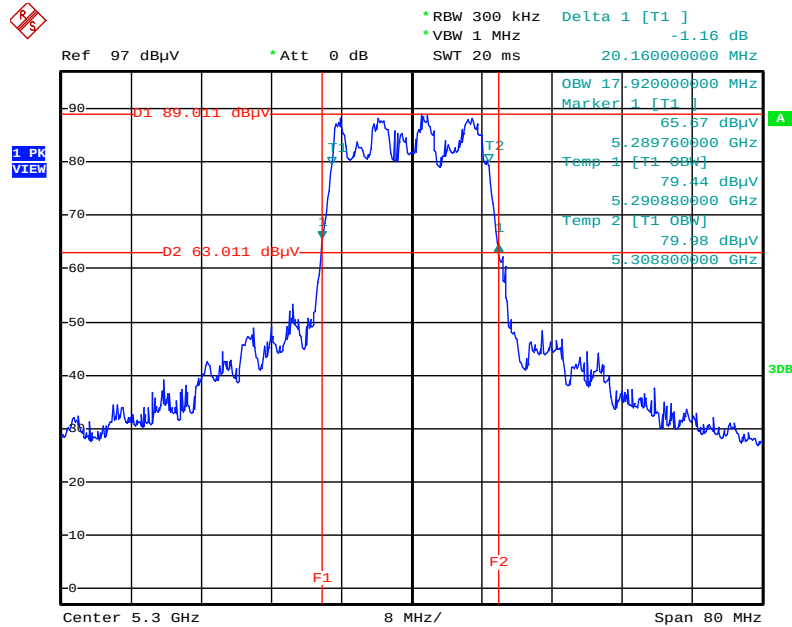


Date: 20.FEB.2014 21:26:11

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz

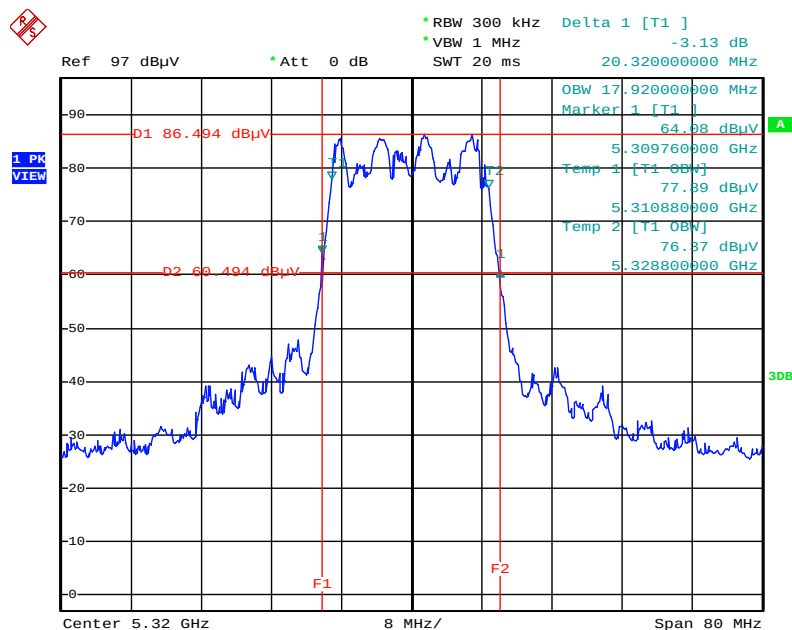


Date: 20.FEB.2014 21:25:37

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz

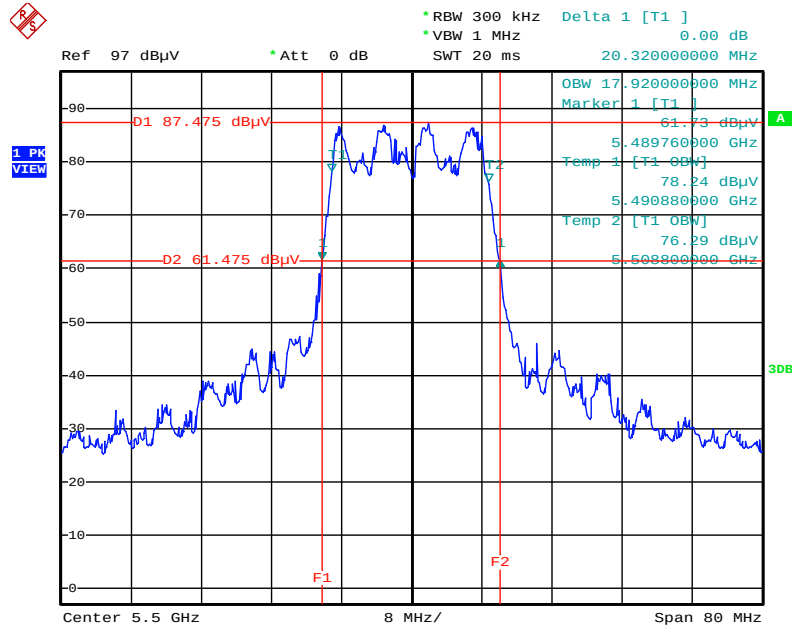


Date: 20.FEB.2014 21:25:08

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz

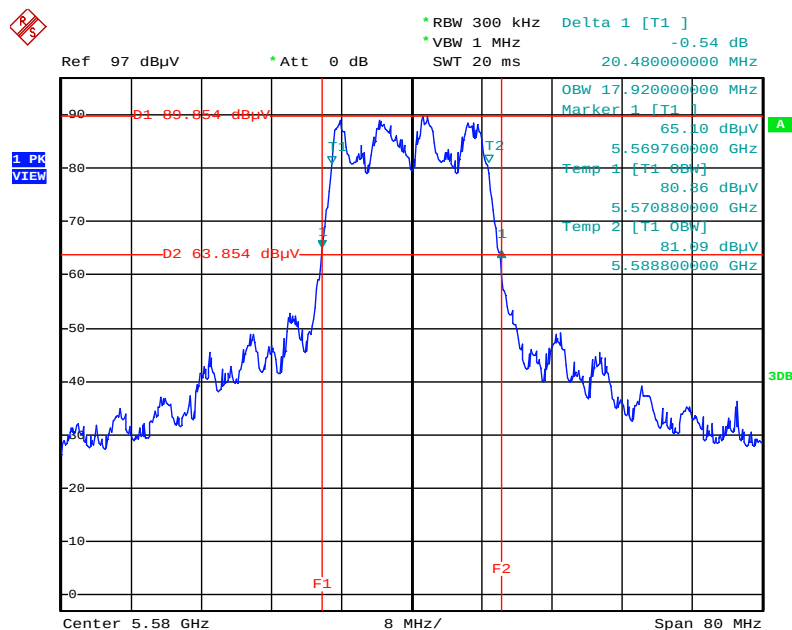


Date: 20.FEB.2014 21:24:32

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz

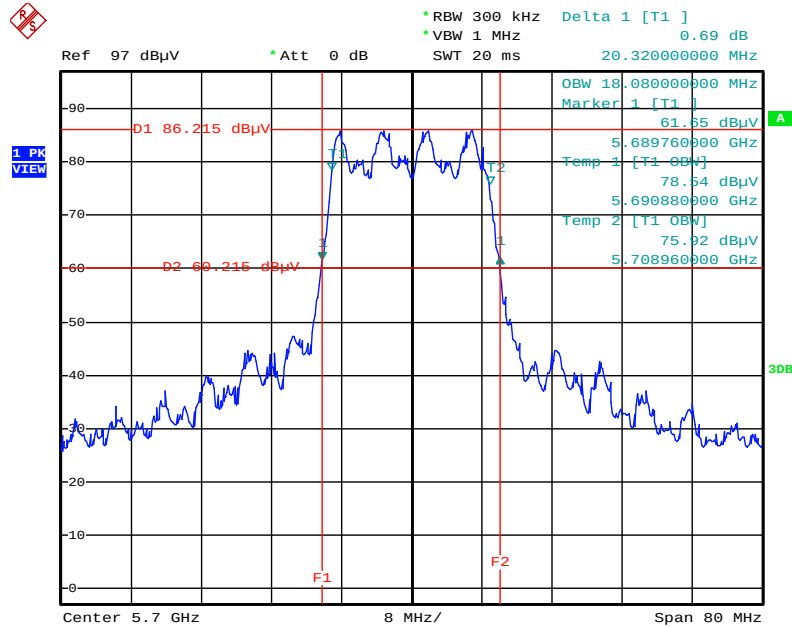


Date: 20.FEB.2014 21:23:56

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5190 MHz

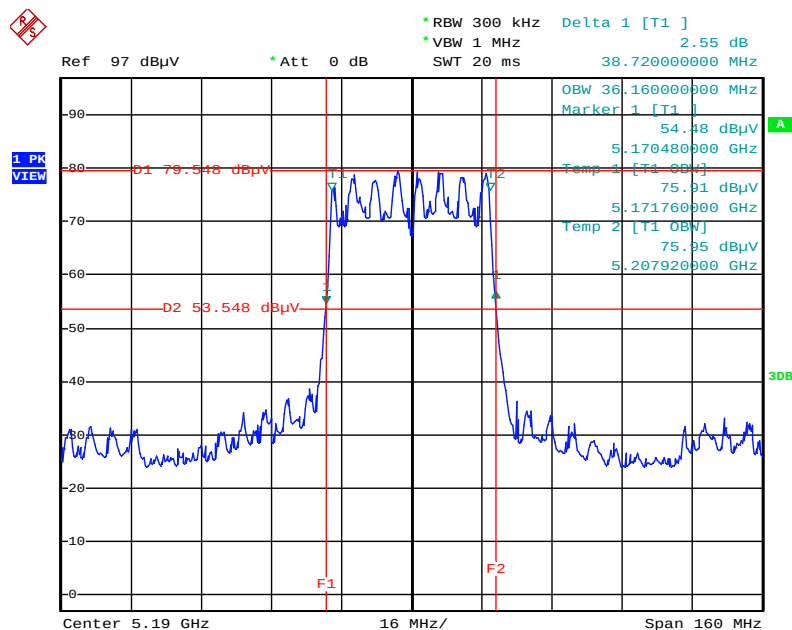


Date: 20.FEB.2014 21:32:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5230 MHz

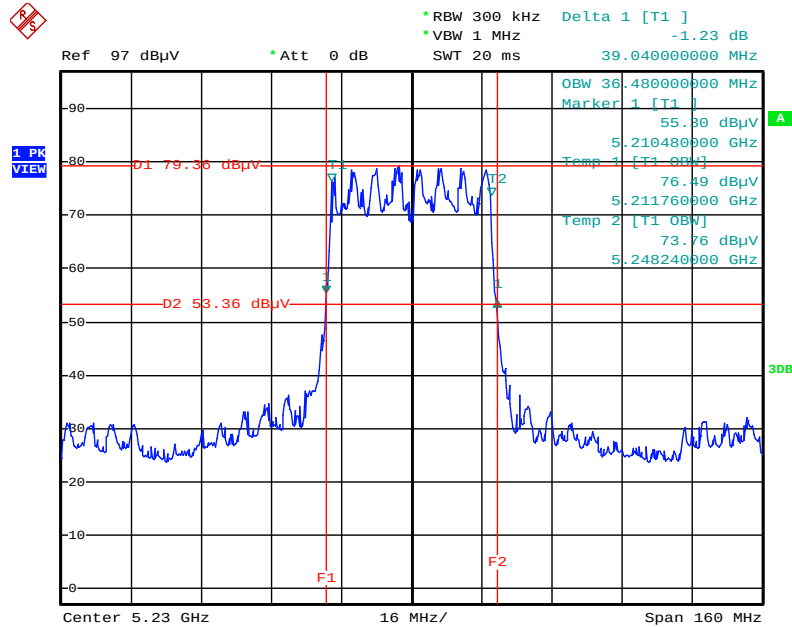


Date: 20.FEB.2014 21:32:28

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz

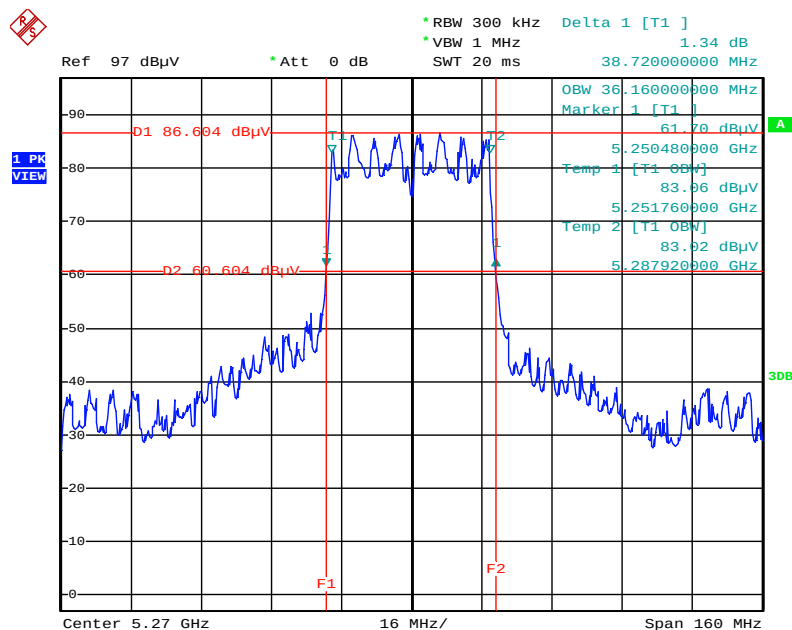


Date: 20.FEB.2014 21:32:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5310 MHz

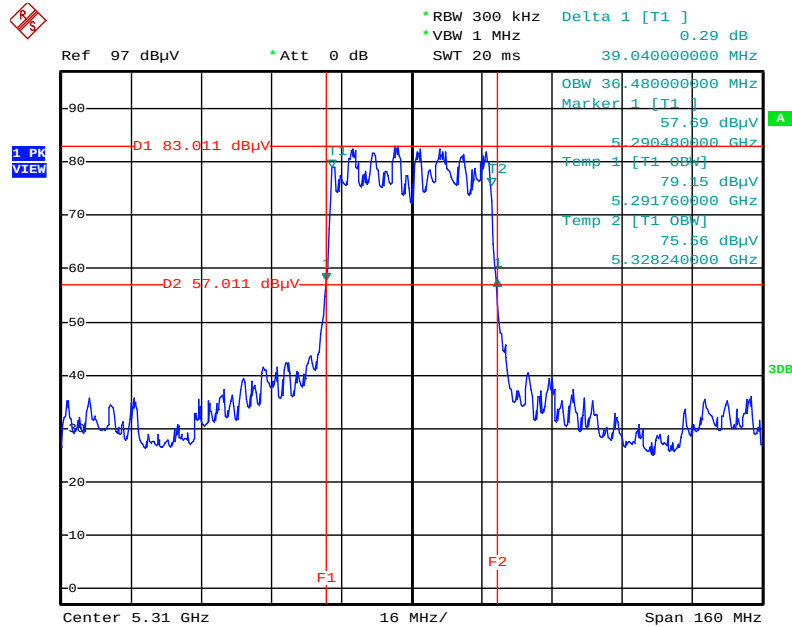


Date: 20.FEB.2014 21:33:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5510 MHz

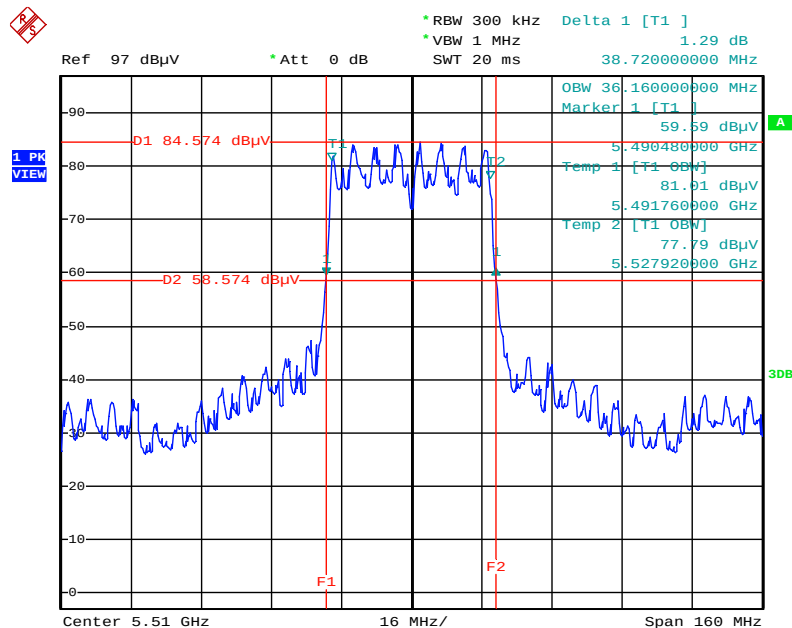


Date: 20.FEB.2014 21:34:21

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5550 MHz

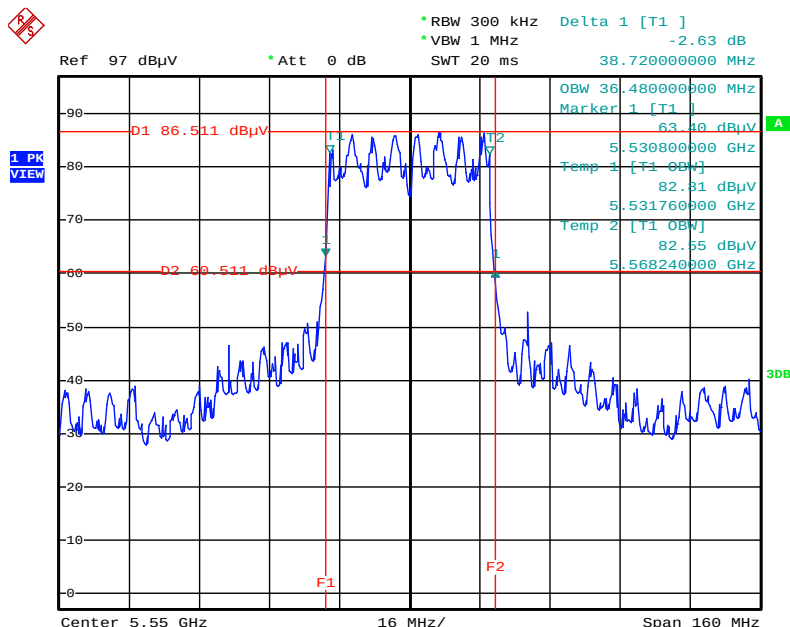


Date: 20.FEB.2014 21:35:50

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz

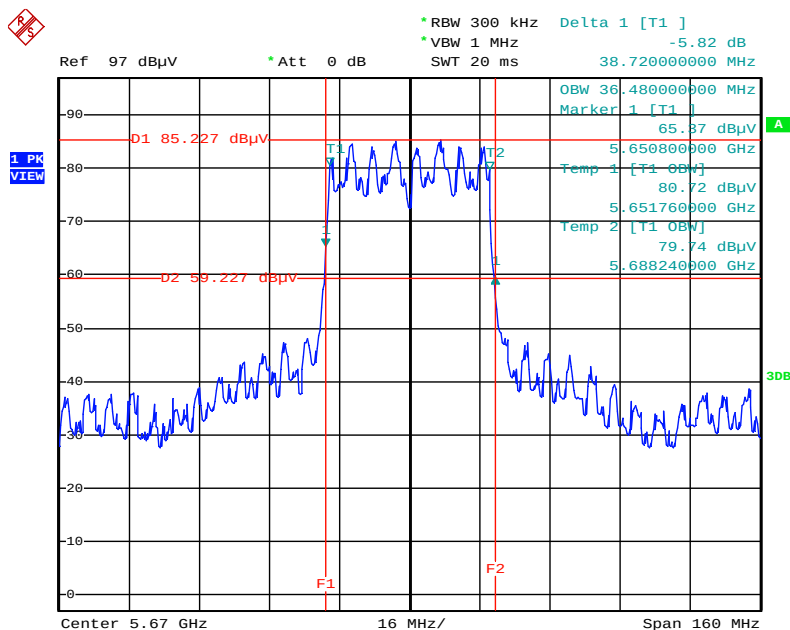


Date: 20.FEB.2014 21:36:21

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz

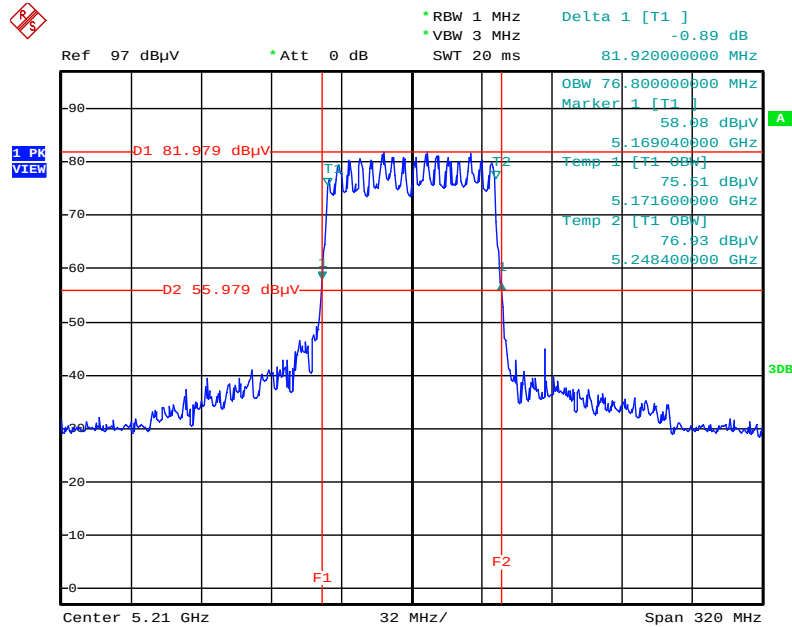


Date: 20.FEB.2014 21:37:06

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz

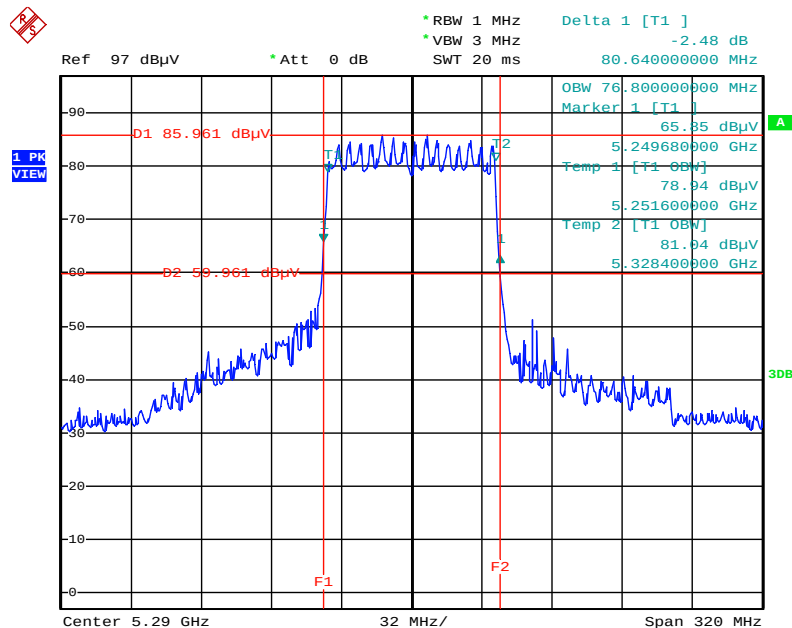


Date: 20.FEB.2014 21:37:35

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz

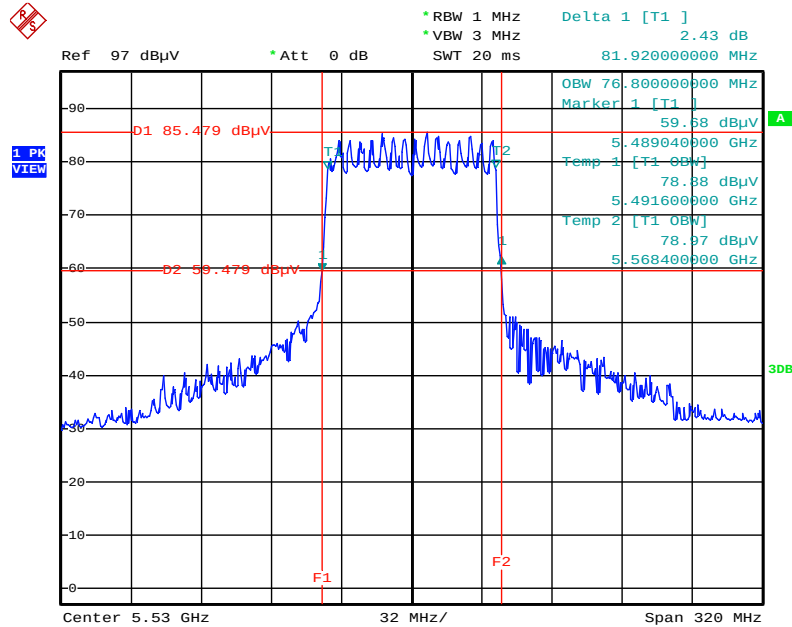


Date: 20.FEB.2014 21:38:03

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

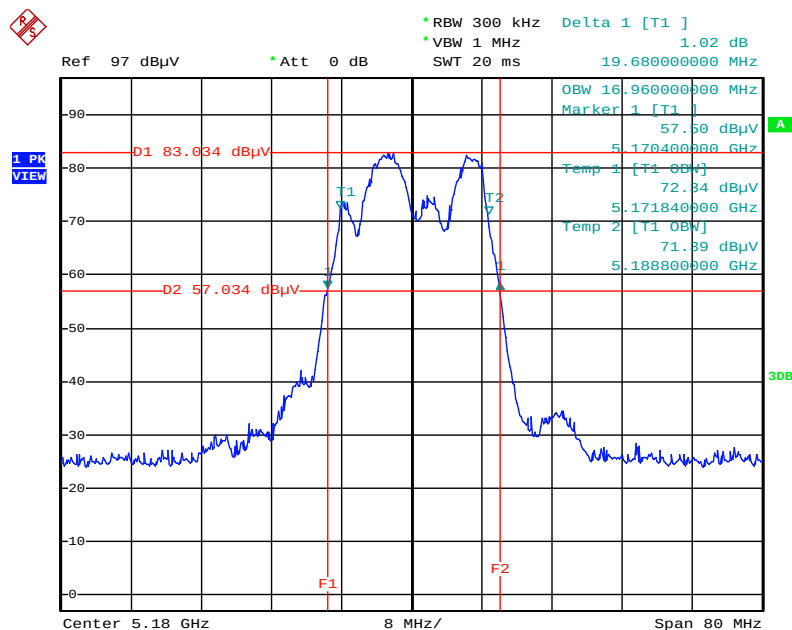


Date: 20.FEB.2014 20:51:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5200 MHz

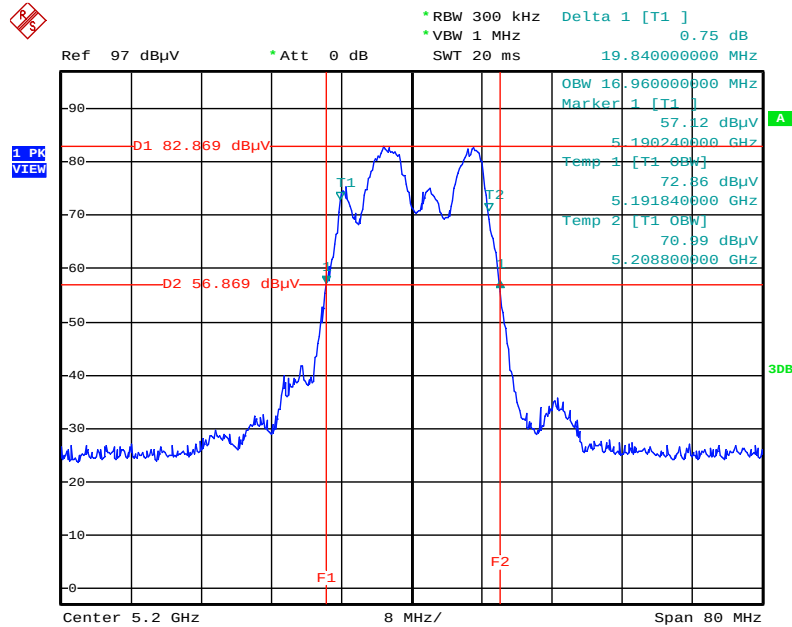


Date: 20.FEB.2014 20:52:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5240 MHz

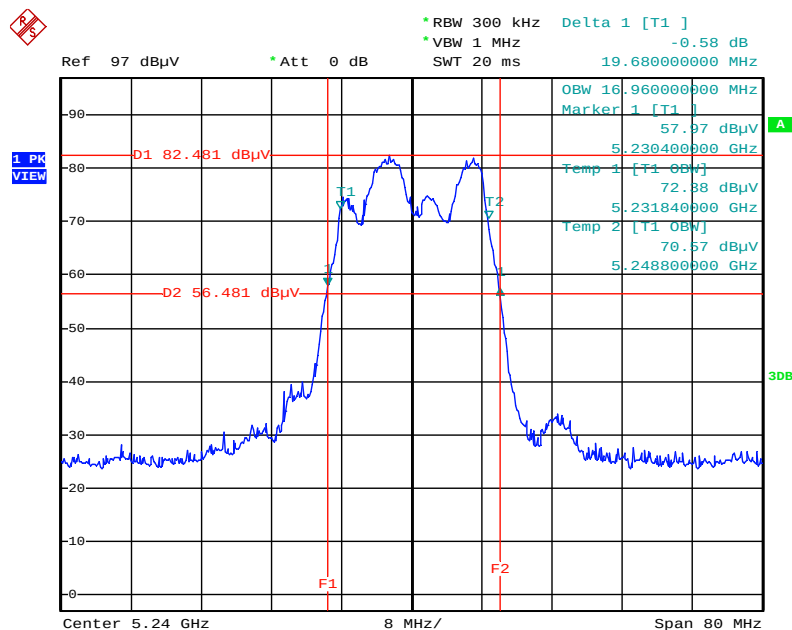


Date: 20.FEB.2014 20:53:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz

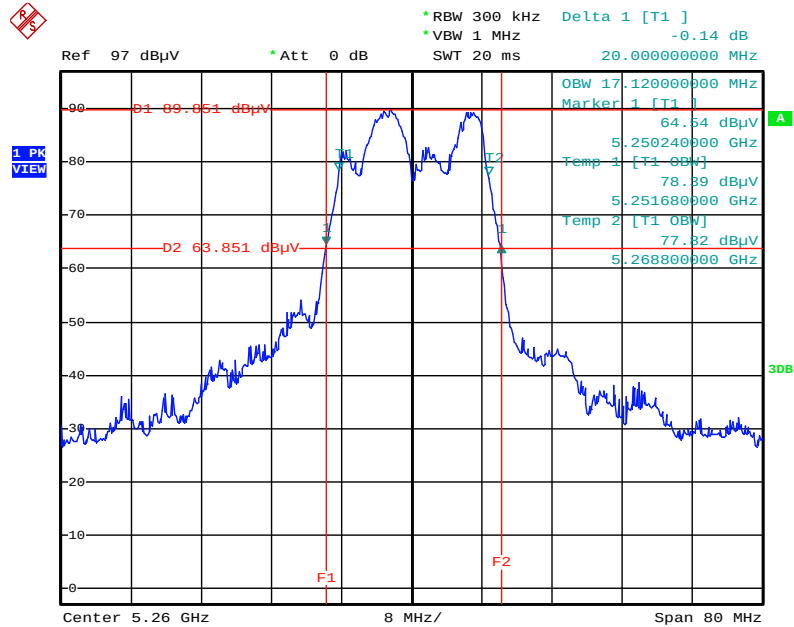


Date: 20.FEB.2014 21:02:36

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz

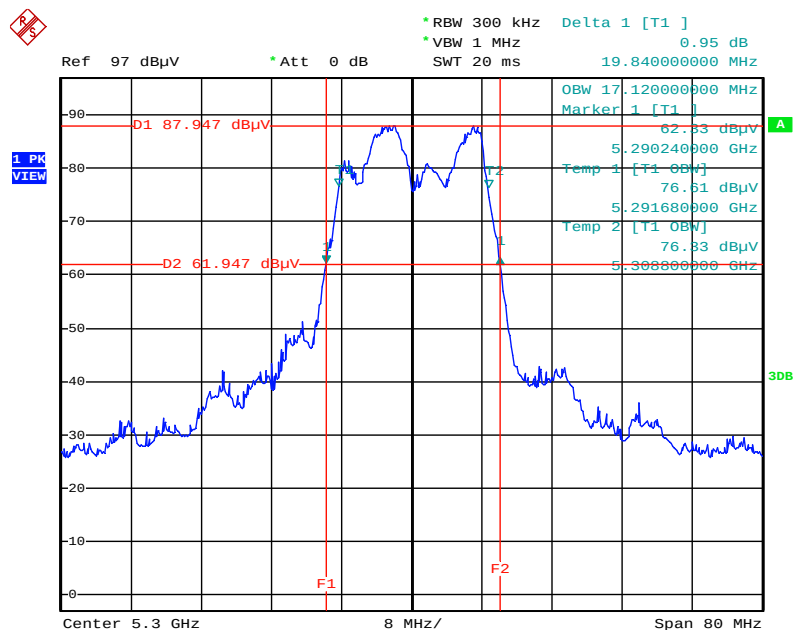


Date: 20.FEB.2014 21:03:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz

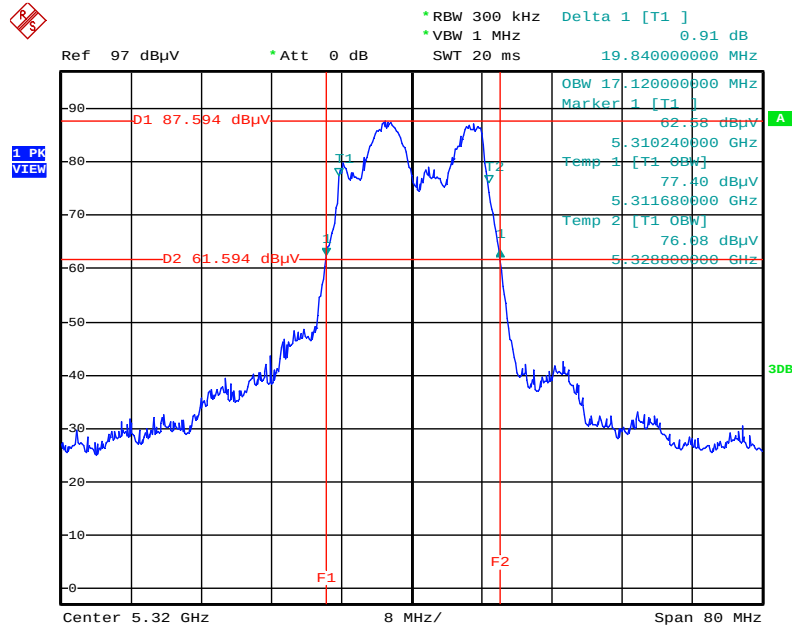


Date: 20.FEB.2014 21:04:53

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz

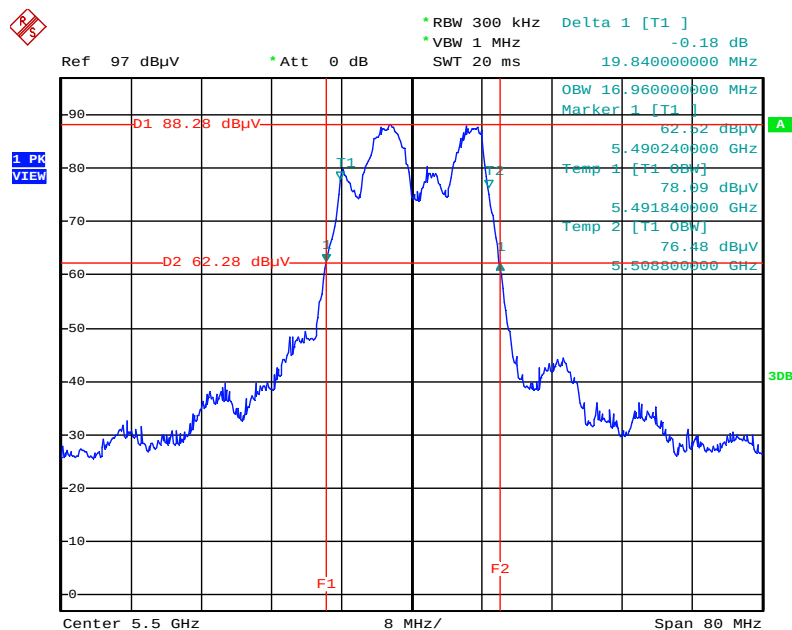


Date: 20.FEB.2014 21:21:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz

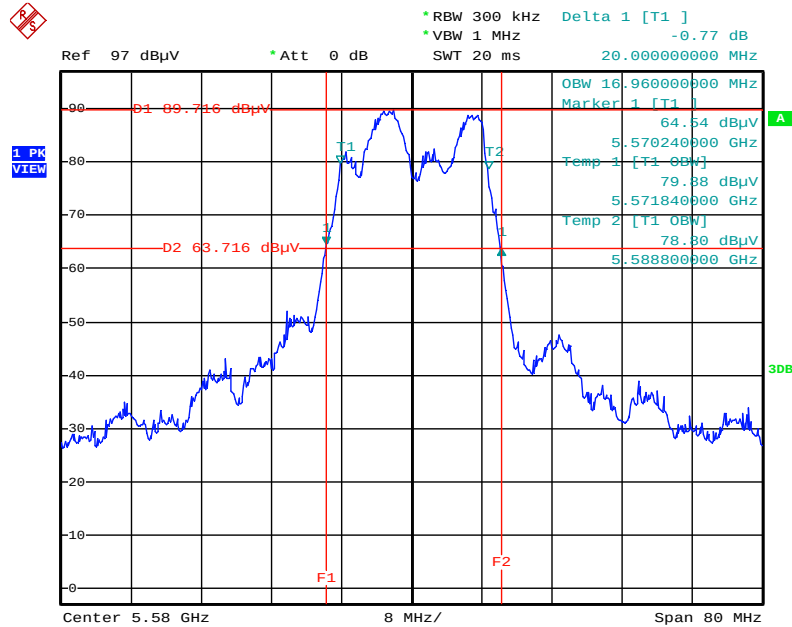

Date: 20.FEB.2014 21:22:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz

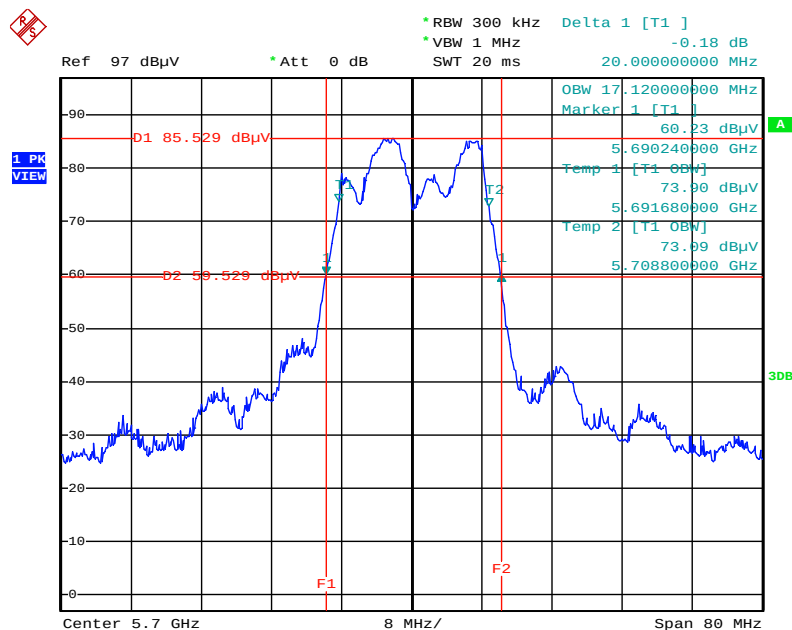

Date: 20.FEB.2014 21:22:58

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power => (3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac
Test Date	Feb. 20, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
36	5180 MHz	11.78	11.84	11.96	16.63	17.00	Complies
40	5200 MHz	11.68	11.92	11.95	16.62	17.00	Complies
48	5240 MHz	11.67	12.01	12.22	16.74	17.00	Complies
52	5260 MHz	19.18	18.42	18.36	23.44	24.00	Complies
60	5300 MHz	19.46	18.58	18.74	23.72	24.00	Complies
64	5320 MHz	17.52	16.58	16.67	21.72	24.00	Complies
100	5500 MHz	17.29	16.62	16.03	21.45	24.00	Complies
116	5580 MHz	19.54	18.50	17.78	23.44	24.00	Complies
140	5700 MHz	17.12	16.24	15.23	21.04	24.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
38	5190 MHz	11.78	12.07	12.26	16.81	17.00	Complies
46	5230 MHz	11.69	12.59	12.29	16.98	17.00	Complies
54	5270 MHz	19.57	18.86	18.68	23.83	24.00	Complies
62	5310 MHz	17.38	16.26	16.35	21.47	24.00	Complies
102	5510 MHz	18.03	17.04	16.59	22.03	24.00	Complies
110	5550 MHz	19.74	18.87	18.51	23.84	24.00	Complies
134	5670 MHz	18.92	18.16	17.06	22.88	24.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
42	5210 MHz	11.59	12.52	12.23	16.90	17.00	Complies
58	5290 MHz	16.87	16.16	16.09	21.16	24.00	Complies
106	5530 MHz	16.46	15.57	15.29	20.57	24.00	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a
Test Date	Feb. 20, 2014		

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
36	5180 MHz	11.69	11.95	11.96	16.64	16.94	Complies
40	5200 MHz	11.71	11.96	11.98	16.66	16.98	Complies
48	5240 MHz	11.46	12.35	12.05	16.74	16.94	Complies
52	5260 MHz	18.99	18.87	18.72	23.63	24.00	Complies
60	5300 MHz	18.12	18.03	17.77	22.75	23.98	Complies
64	5320 MHz	17.91	17.86	17.58	22.56	23.98	Complies
100	5500 MHz	18.29	18.07	17.48	22.73	23.98	Complies
116	5580 MHz	18.72	18.74	17.68	23.18	24.00	Complies
140	5700 MHz	16.98	16.02	15.41	20.96	24.00	Complies

Not1:CH36 Power Limit= $4 + 10\log(B)$ or $17\text{dBm} = 4 + 10*\log(19.68) = 16.94\text{dBm} < 17\text{dBm}$, So CH36 Power Limit=16.94dBm

Not2:CH40 Power Limit= $4 + 10\log(B)$ or $17\text{dBm} = 4 + 10*\log(19.84) = 16.98\text{dBm} < 17\text{dBm}$, So CH40 Power Limit=16.98dBm

Not3:CH48 Power Limit= $4 + 10\log(B)$ or $17\text{dBm} = 4 + 10*\log(19.68) = 16.94\text{dBm} < 17\text{dBm}$, So CH48 Power Limit=16.94dBm

Not3:CH60 and CH64 Power Limit= $11 + 10\log(B)$ or $24\text{dBm} = 11 + 10*\log(19.84) = 23.98\text{dBm} < 24\text{dBm}$, So CH60, CH64 Power Limit=23.98dBm

Not:CH100 Power Limit= $11 + 10\log(B)$ or $24\text{dBm} = 11 + 10*\log(19.84) = 23.98\text{dBm} < 24\text{dBm}$, So CH100 Power Limit=23.98dBm

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5.470-5.725 GHz	11

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

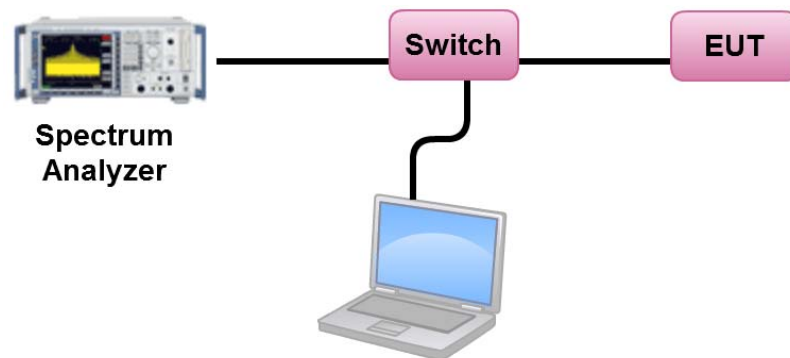

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac
Test Date	Feb. 20, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	3.46	3.53	Complies
40	5200 MHz	3.45	3.53	Complies
48	5240 MHz	3.46	3.53	Complies
52	5260 MHz	10.36	10.53	Complies
60	5300 MHz	10.45	10.53	Complies
64	5320 MHz	8.69	10.53	Complies
100	5500 MHz	8.45	10.53	Complies
116	5580 MHz	10.41	10.53	Complies
140	5700 MHz	7.31	10.53	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$, So Band1 Limit = $4 - (6.47 - 6) = 3.53\text{dBm/MHz}$

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$, So Band2 Limit = $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$, So Band3 Limit = $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.37	3.53	Complies
46	5230 MHz	0.45	3.53	Complies
54	5270 MHz	8.02	10.53	Complies
62	5310 MHz	5.95	10.53	Complies
102	5510 MHz	6.37	10.53	Complies
110	5550 MHz	8.34	10.53	Complies
134	5670 MHz	6.39	10.53	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$, So Band1 Limit = $4 - (6.47 - 6) = 3.53\text{dBm/MHz}$

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$, So Band2 Limit = $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/Nss) = 6.47\text{dBi} > 6\text{dBi}$, So Band3 Limit = $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-2.97	3.53	Complies
58	5290 MHz	2.25	10.53	Complies
106	5530 MHz	1.44	10.53	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.47\text{dBi} > 6\text{dBi}$, So Band1 Limit = $4 - (6.47 - 6) = 3.53\text{dBm/MHz}$

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.47\text{dBi} > 6\text{dBi}$, So Band2 Limit = $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.47\text{dBi} > 6\text{dBi}$, So Band3 Limit = $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a
Test Date	Feb. 20, 2014		

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	3.49	3.53	Complies
40	5200 MHz	3.48	3.53	Complies
48	5240 MHz	3.45	3.53	Complies
52	5260 MHz	10.42	10.53	Complies
60	5300 MHz	10.47	10.53	Complies
64	5320 MHz	10.44	10.53	Complies
100	5500 MHz	10.09	10.53	Complies
116	5580 MHz	10.48	10.53	Complies
140	5700 MHz	7.43	10.53	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.47\text{dBi} > 6\text{dBi}$, So Band1 Limit = $4 - (6.47 - 6) = 3.53\text{dBm/MHz}$


Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.47\text{dBi} > 6\text{dBi}$, So Band2 Limit = $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{ss}) = 6.47\text{dBi} > 6\text{dBi}$, So Band3 Limit = $11 - (6.47 - 6) = 10.53\text{dBm/MHz}$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

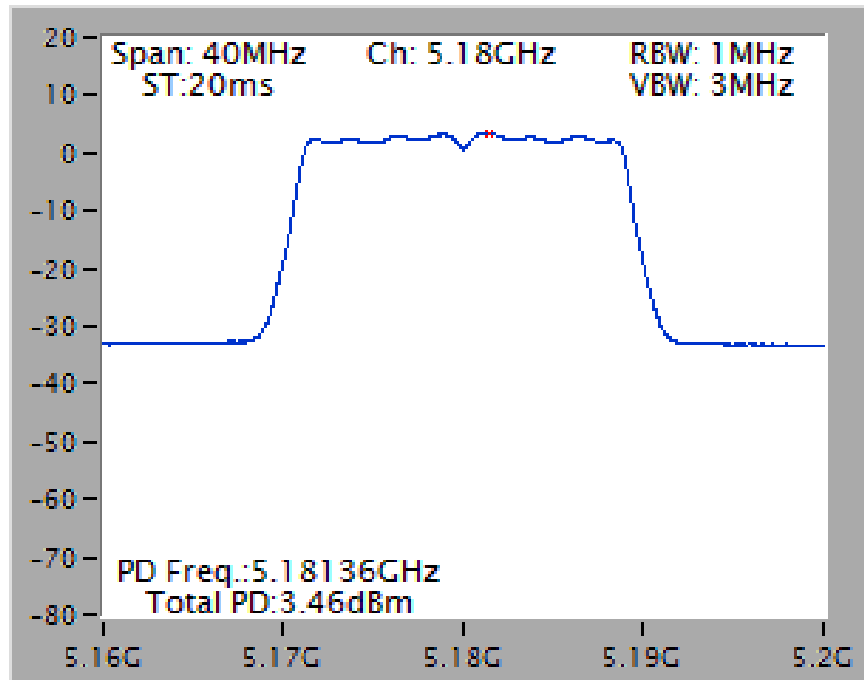


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz

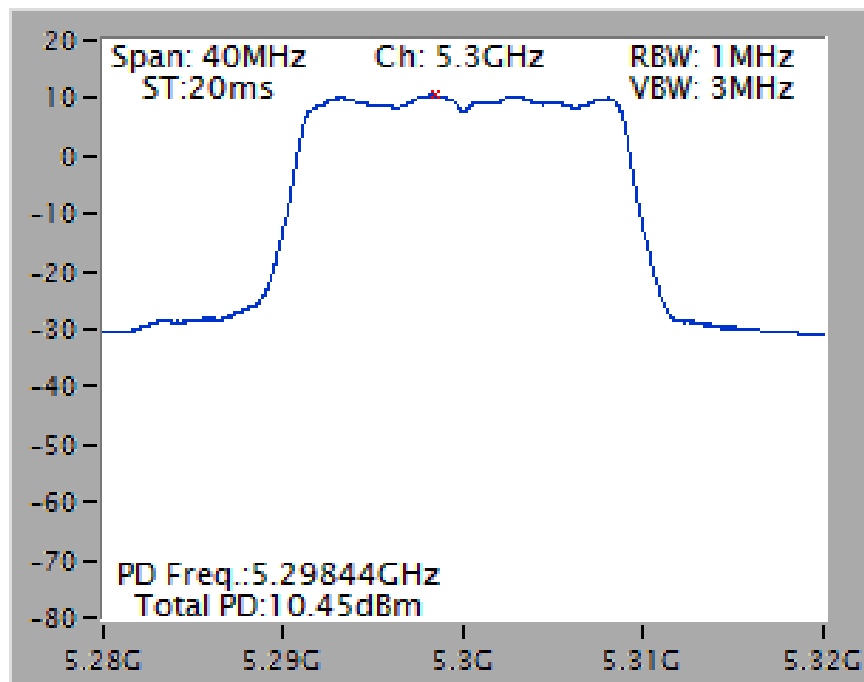


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz

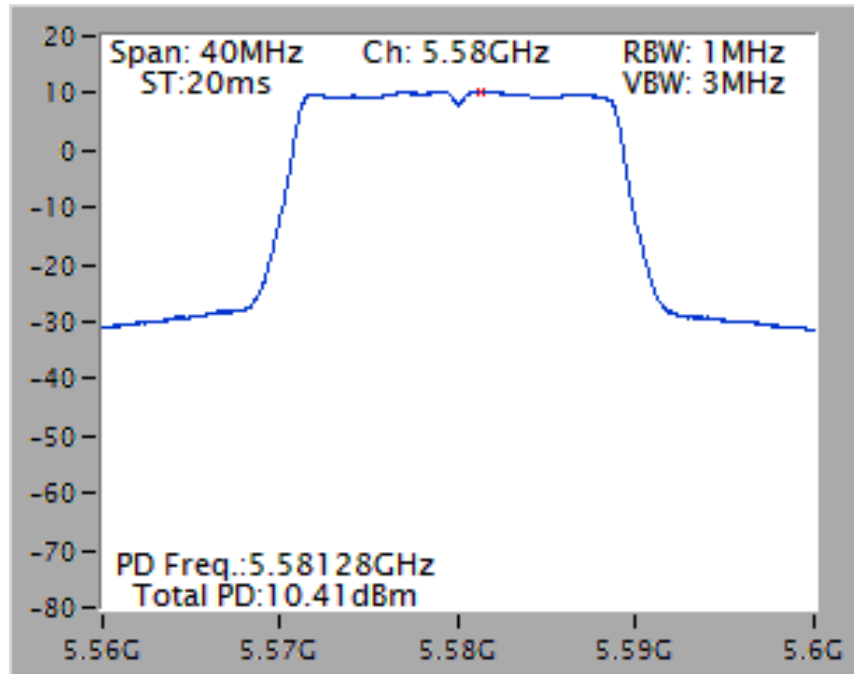


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5230 MHz

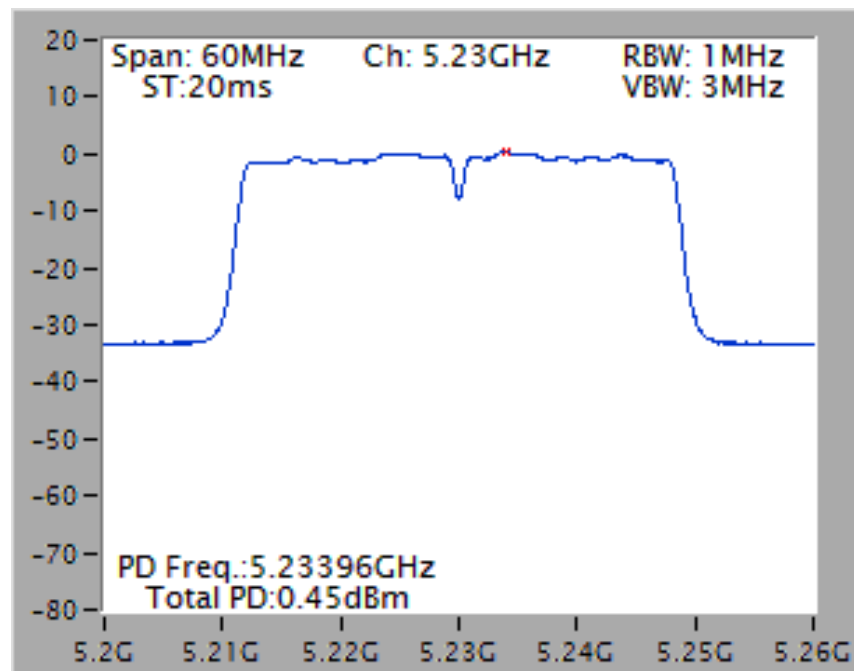


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz

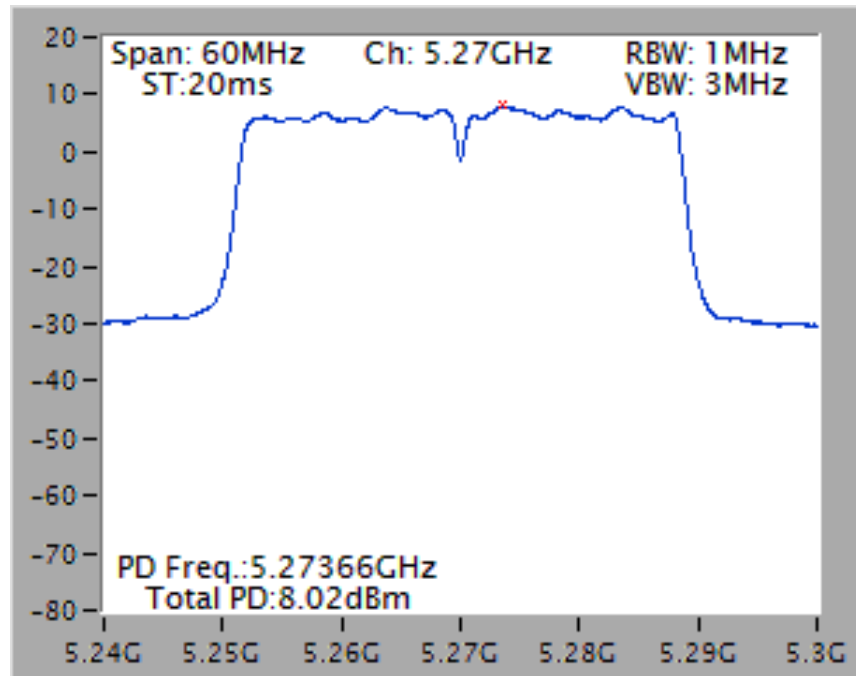


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5550 MHz

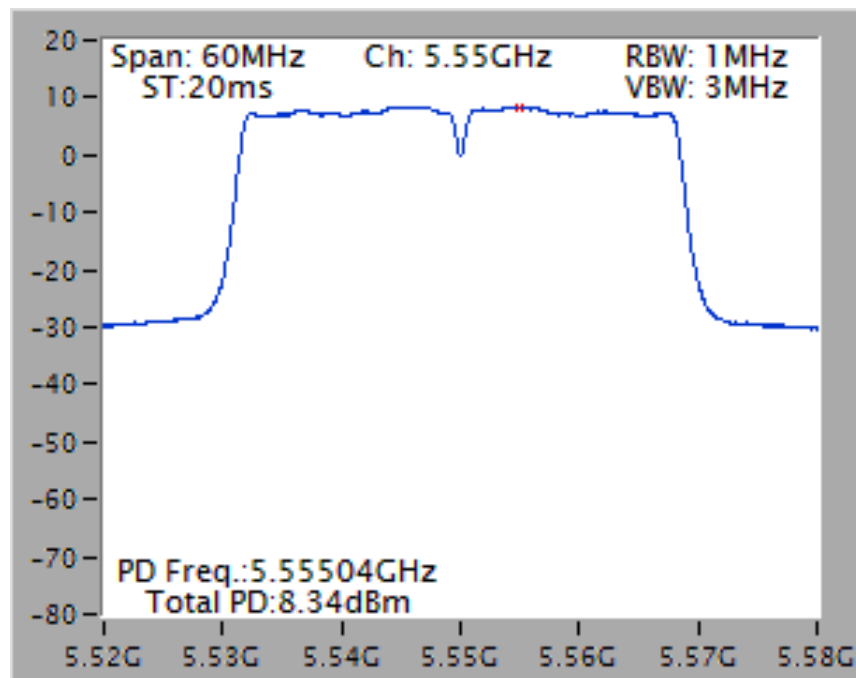


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5210 MHz

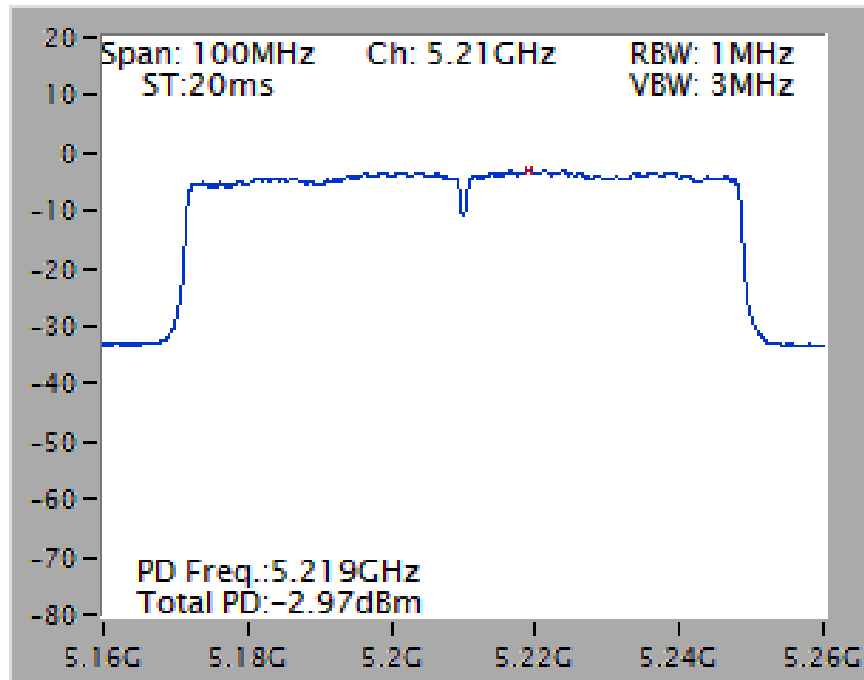


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz

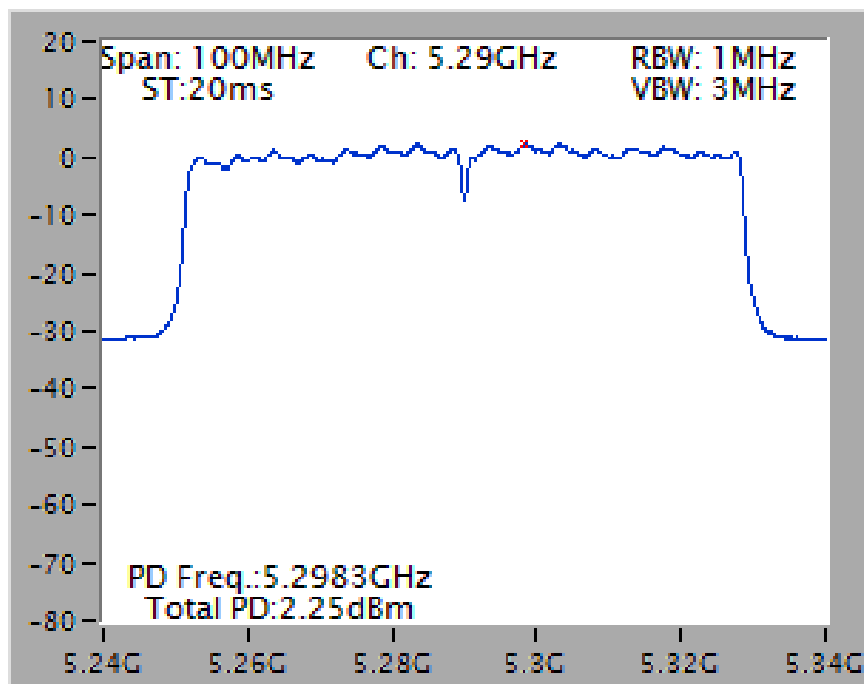


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz

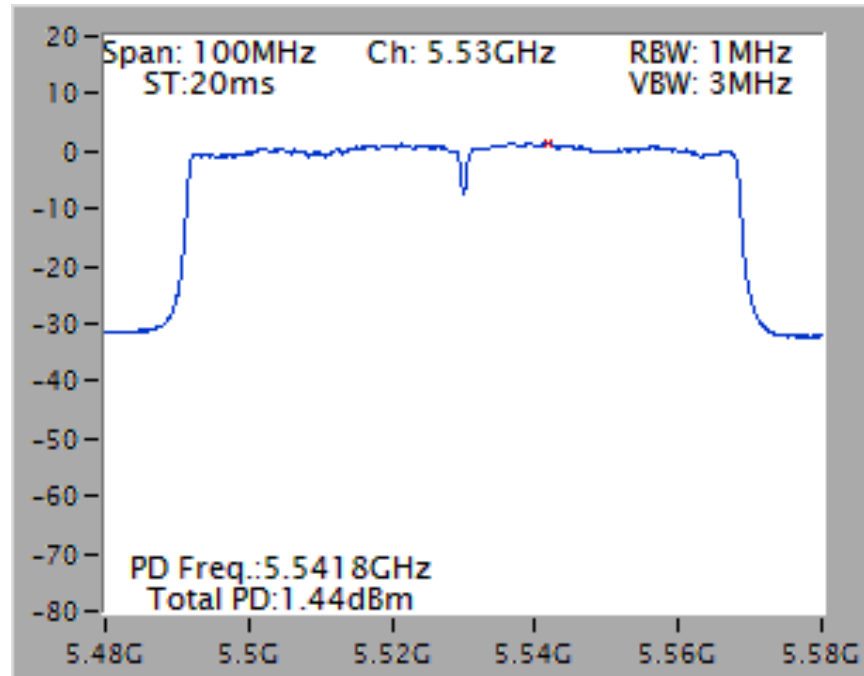


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5180 MHz

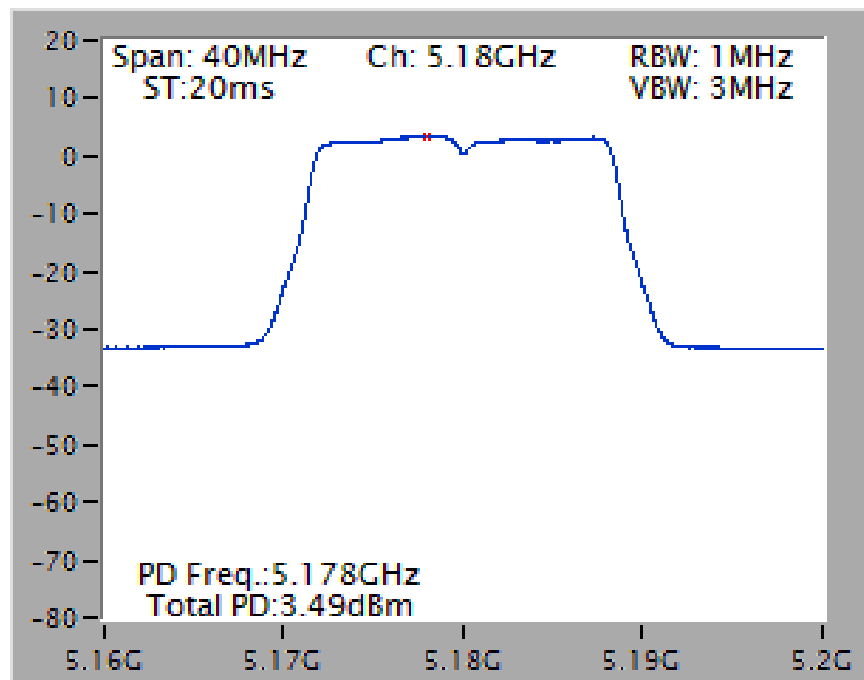

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz

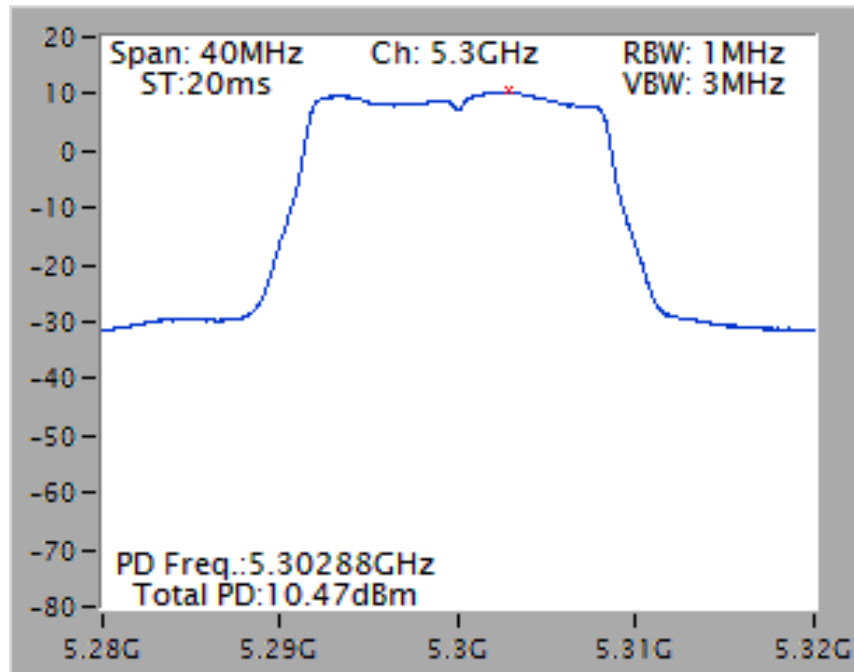

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz

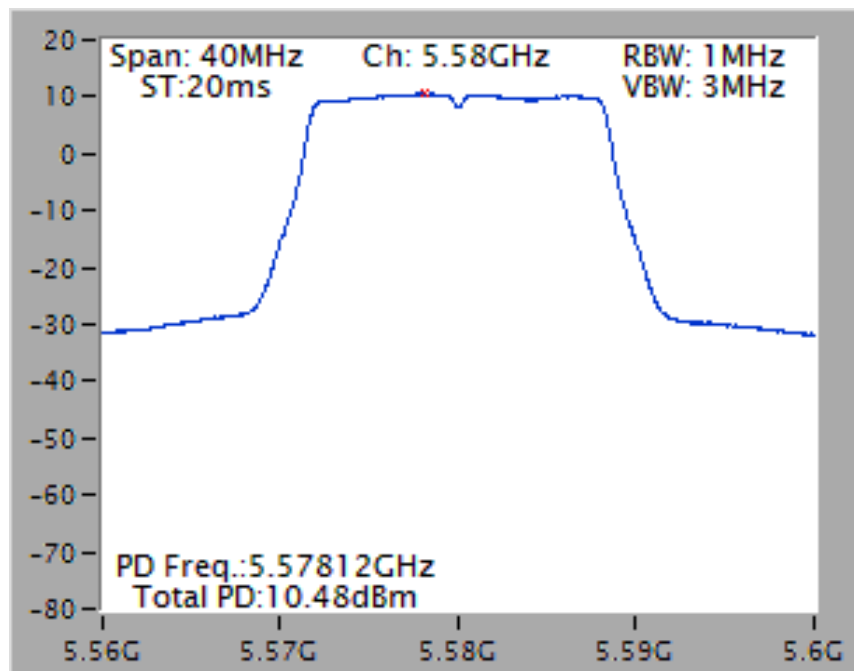

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (Peak Trace) / 1 MHz (Average Trace)
VBW	≥ 3 MHz (Peak Trace) / ≥ 3 MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

4.5.3. Test Procedures

1. Trace A, Set RBW = 1 MHz, VBW = 3 MHz, Span > 26 dB bandwidth, Max. hold.
2. Delta Mark trace A Maximum frequency and trace B same frequency.
3. Repeat the above procedure until measurements for all frequencies were complete.
4. Testing each modulation mode on a single channel in single operating band at single output port.
All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5240MHz	8.42	13	Complies
QPSK (MCS1)	5240MHz	8.27	13	Complies
16QAM (MCS3)	5240MHz	9.20	13	Complies
64QAM (MCS5)	5240MHz	9.28	13	Complies
256QAM (MCS8)	5240MHz	9.58	13	Complies
BPSK (MCS0)	5300MHz	8.39	13	Complies
QPSK (MCS1)	5300MHz	9.37	13	Complies
16QAM (MCS3)	5300MHz	8.98	13	Complies
64QAM (MCS5)	5300MHz	8.81	13	Complies
256QAM (MCS8)	5300MHz	9.56	13	Complies
BPSK (MCS0)	5580MHz	8.75	13	Complies
QPSK (MCS1)	5580MHz	8.72	13	Complies
16QAM (MCS3)	5580MHz	8.97	13	Complies
64QAM (MCS5)	5580MHz	9.43	13	Complies
256QAM (MCS8)	5580MHz	9.85	13	Complies

Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5230MHz	9.70	13	Complies
QPSK (MCS1)	5230MHz	8.31	13	Complies
16QAM (MCS3)	5230MHz	9.72	13	Complies
64QAM (MCS5)	5230MHz	9.91	13	Complies
256QAM (MCS8)	5230MHz	9.10	13	Complies
BPSK (MCS0)	5270MHz	8.45	13	Complies
QPSK (MCS1)	5270MHz	8.89	13	Complies
16QAM (MCS3)	5270MHz	8.77	13	Complies
64QAM (MCS5)	5270MHz	9.47	13	Complies
256QAM (MCS8)	5270MHz	11.02	13	Complies
BPSK (MCS0)	5550MHz	9.14	13	Complies
QPSK (MCS1)	5550MHz	9.26	13	Complies
16QAM (MCS3)	5550MHz	9.44	13	Complies
64QAM (MCS5)	5550MHz	10.30	13	Complies
256QAM (MCS8)	5550MHz	10.40	13	Complies

Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (MCS0)	5210MHz	9.22	13	Complies
QPSK (MCS1)	5210MHz	8.77	13	Complies
16QAM (MCS3)	5210MHz	9.25	13	Complies
64QAM (MCS5)	5210MHz	9.23	13	Complies
256QAM (MCS8)	5210MHz	9.63	13	Complies
BPSK (MCS0)	5290MHz	8.82	13	Complies
QPSK (MCS1)	5290MHz	8.85	13	Complies
16QAM (MCS3)	5290MHz	9.63	13	Complies
64QAM (MCS5)	5290MHz	9.24	13	Complies
256QAM (MCS8)	5290MHz	10.20	13	Complies
BPSK (MCS0)	5530MHz	9.54	13	Complies
QPSK (MCS1)	5530MHz	9.17	13	Complies
16QAM (MCS3)	5530MHz	9.84	13	Complies
64QAM (MCS5)	5530MHz	9.13	13	Complies
256QAM (MCS8)	5530MHz	8.56	13	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a


Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BPSK (6Mbps)	5240MHz	8.39	13	Complies
QPSK (12Mbps)	5240MHz	8.29	13	Complies
16QAM (24Mbps)	5240MHz	8.82	13	Complies
64QAM (48Mbps)	5240MHz	8.84	13	Complies
BPSK (6Mbps)	5260MHz	8.21	13	Complies
QPSK (12Mbps)	5260MHz	8.66	13	Complies
16QAM (24Mbps)	5260MHz	8.78	13	Complies
64QAM (48Mbps)	5260MHz	9.33	13	Complies
BPSK (6Mbps)	5580MHz	8.43	13	Complies
QPSK (12Mbps)	5580MHz	8.40	13	Complies
16QAM (24Mbps)	5580MHz	8.37	13	Complies
64QAM (48Mbps)	5580MHz	9.00	13	Complies

Note: All the test values were listed in the report.


For plots, only the modulation with worse result was shown.

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5240 MHz

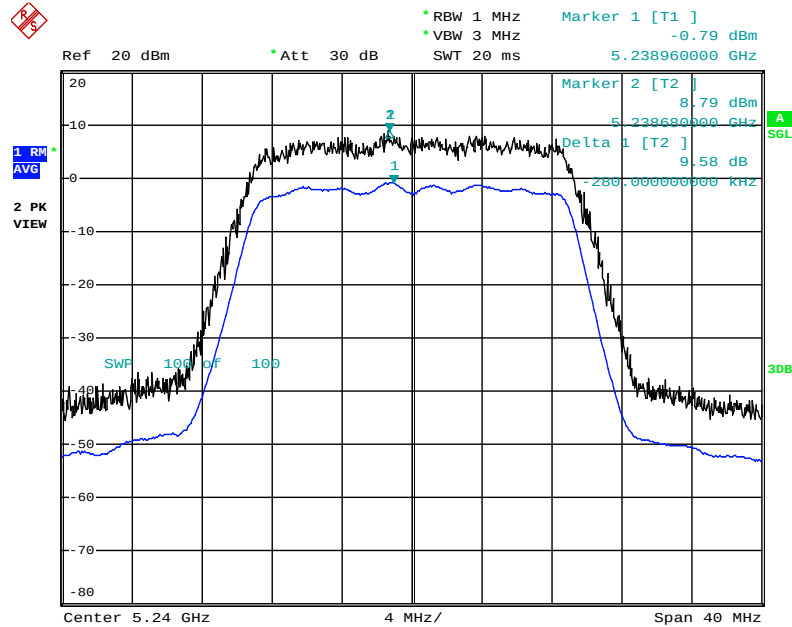


Date: 20.FEB.2014 22:28:21

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5300 MHz

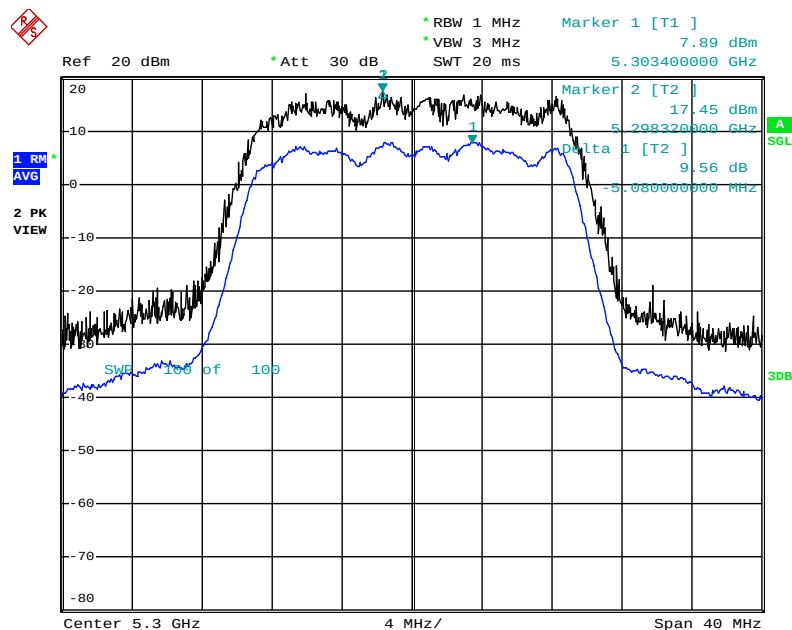


Date: 20.FEB.2014 22:29:12

Peak Excursion Plot on Configuration IEEE 802.11ac VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5580 MHz

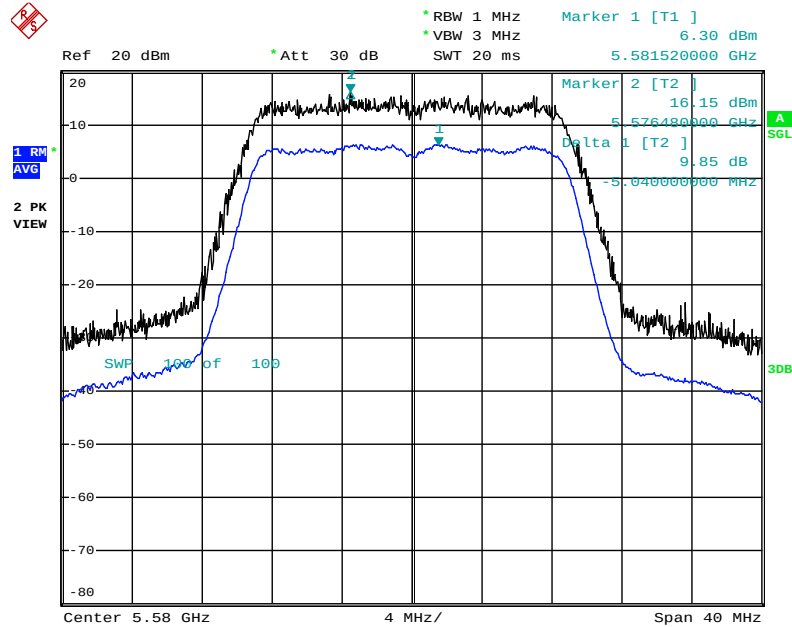


Date: 20.FEB.2014 22:33:22

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(MCS5) / 5230 MHz

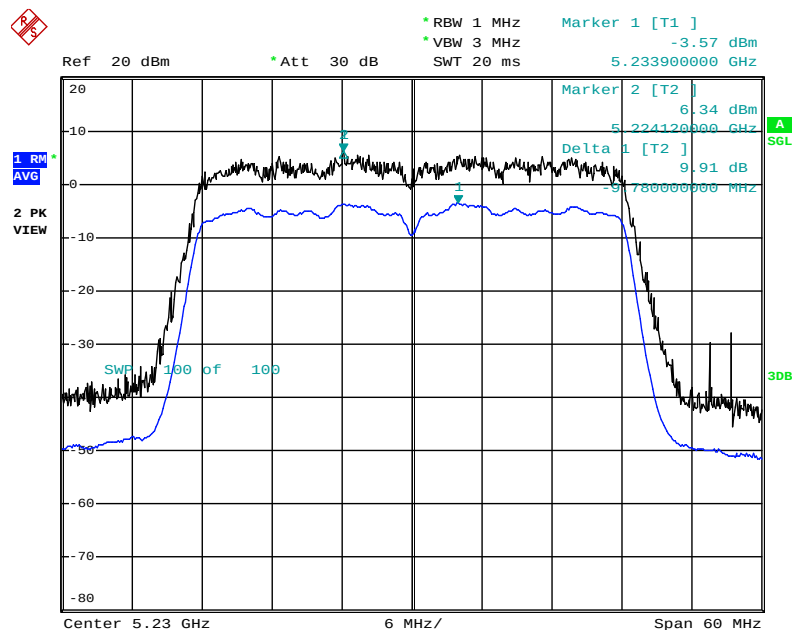


Date: 20.FEB.2014 22:35:07

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5270 MHz

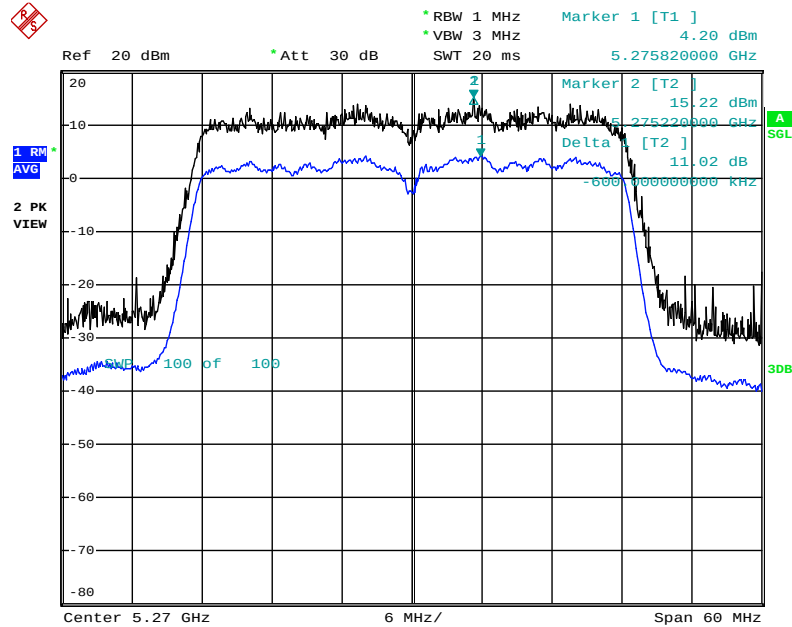


Date: 20.FEB.2014 22:38:54

Peak Excursion Plot on Configuration IEEE 802.11ac VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM (MCS8) / 5550 MHz

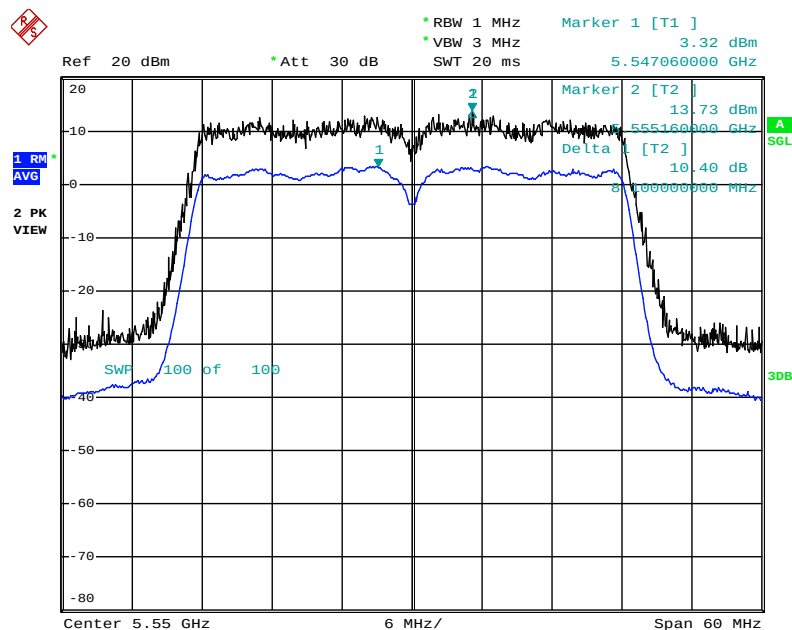


Date: 20.FEB.2014 22:39:40

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5210 MHz

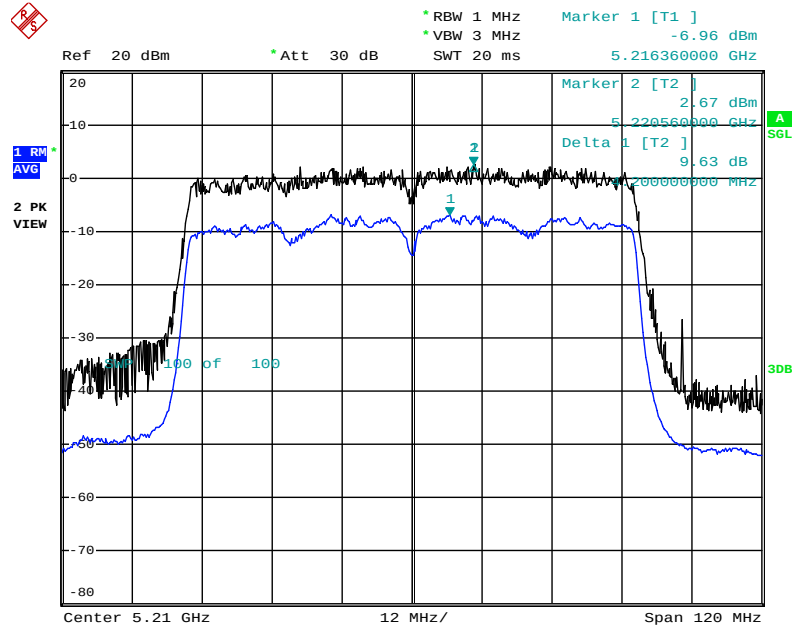


Date: 20.FEB.2014 22:43:55

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 256QAM(MCS8) / 5290 MHz

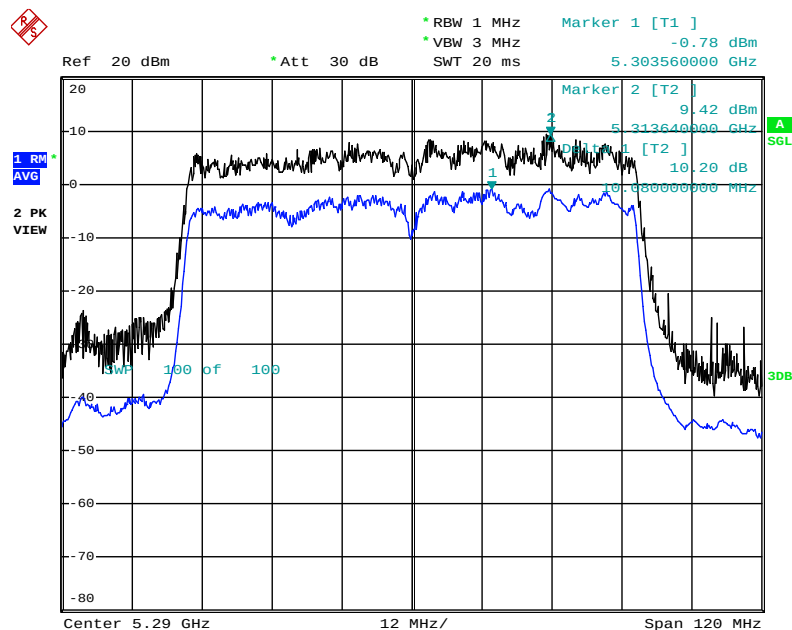


Date: 20.FEB.2014 22:44:41

Peak Excursion Plot on Configuration IEEE 802.11ac VHT80 / Ant. 1 + Ant. 2 + Ant. 3 /
16QAM(MCS3) / 5530 MHz

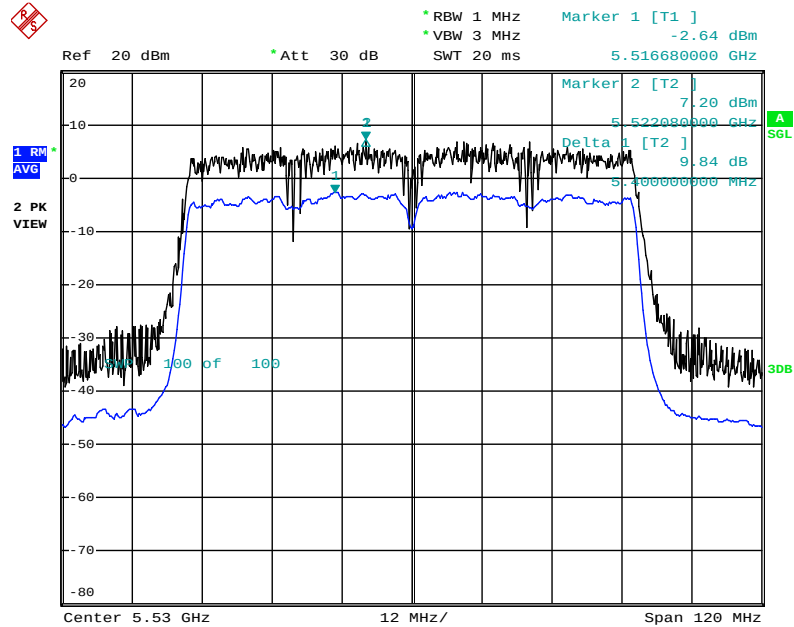


Date: 20.FEB.2014 22:48:06

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(48Mbps) / 5240 MHz

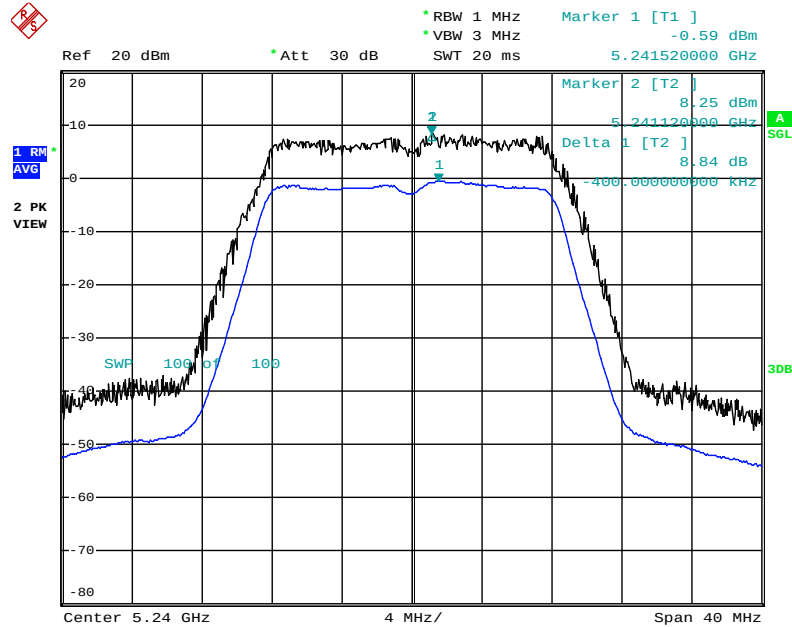


Date: 20.FEB.2014 22:20:45

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(48Mbps) / 5260 MHz

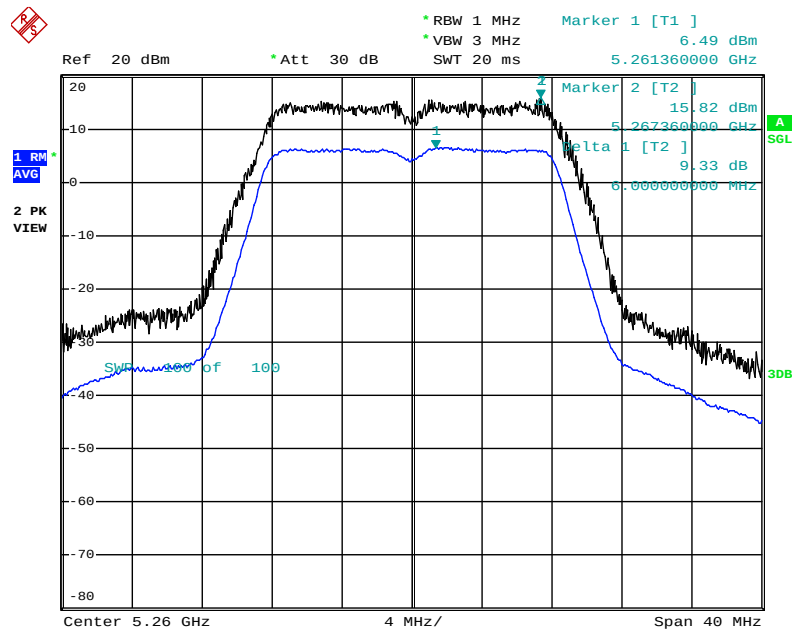

Date: 20.FEB.2014 22:21:34

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 64QAM(48Mbps) / 5580 MHz

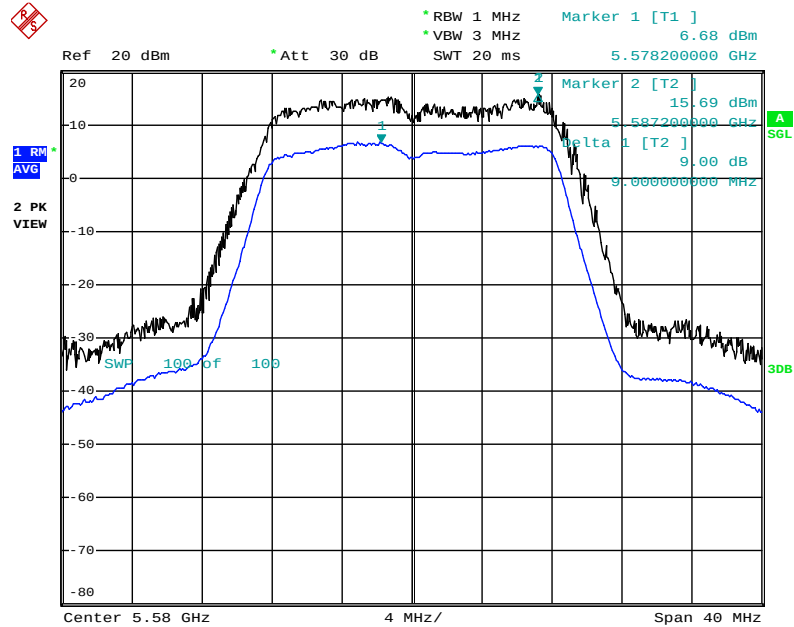

Date: 20.FEB.2014 22:25:35

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1 000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

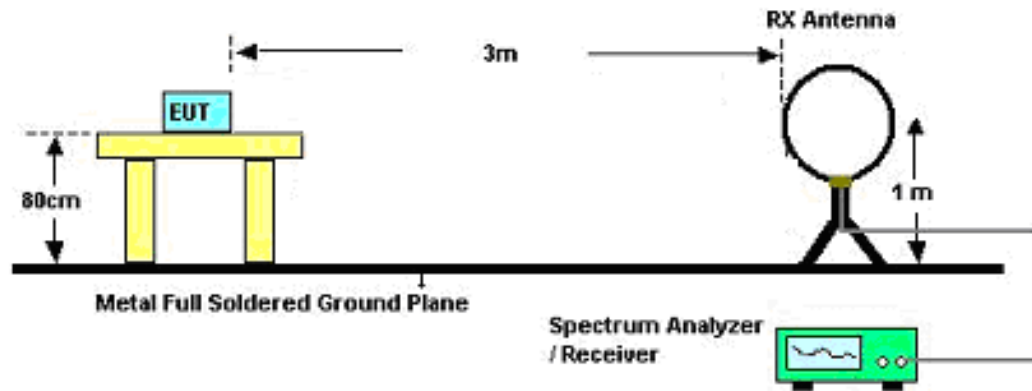

For Radiated Emissions: 30MHz~1GHz

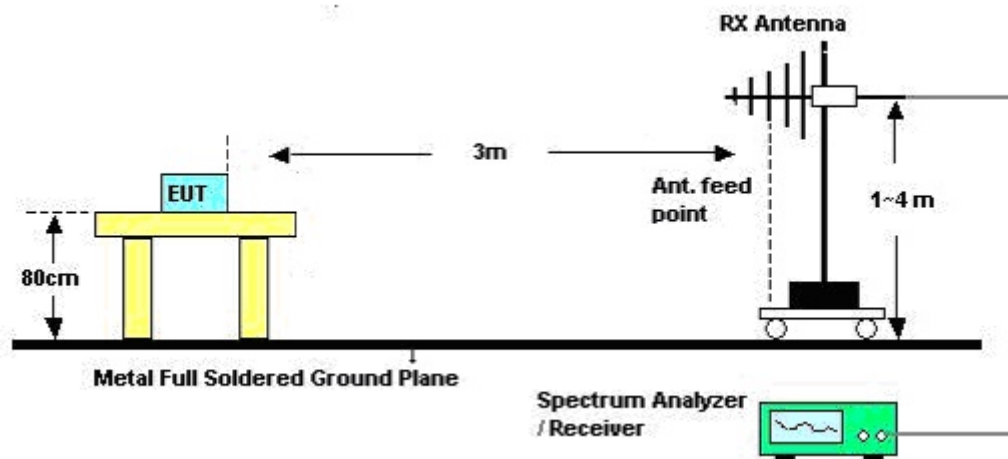

For Radiated Emissions: Above 1GHz

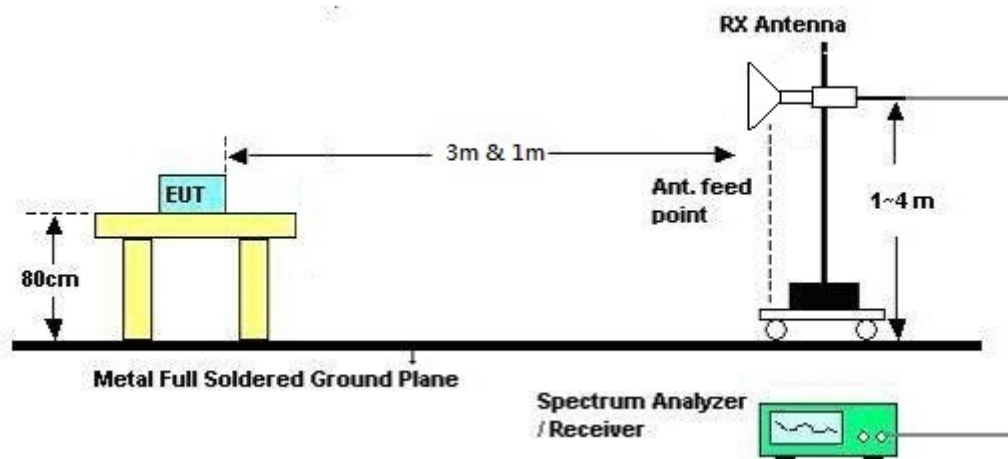

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	CTX
Test Date	Feb. 21, 2014		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	CTX
Test Mode	Mode 1		

Horizontal

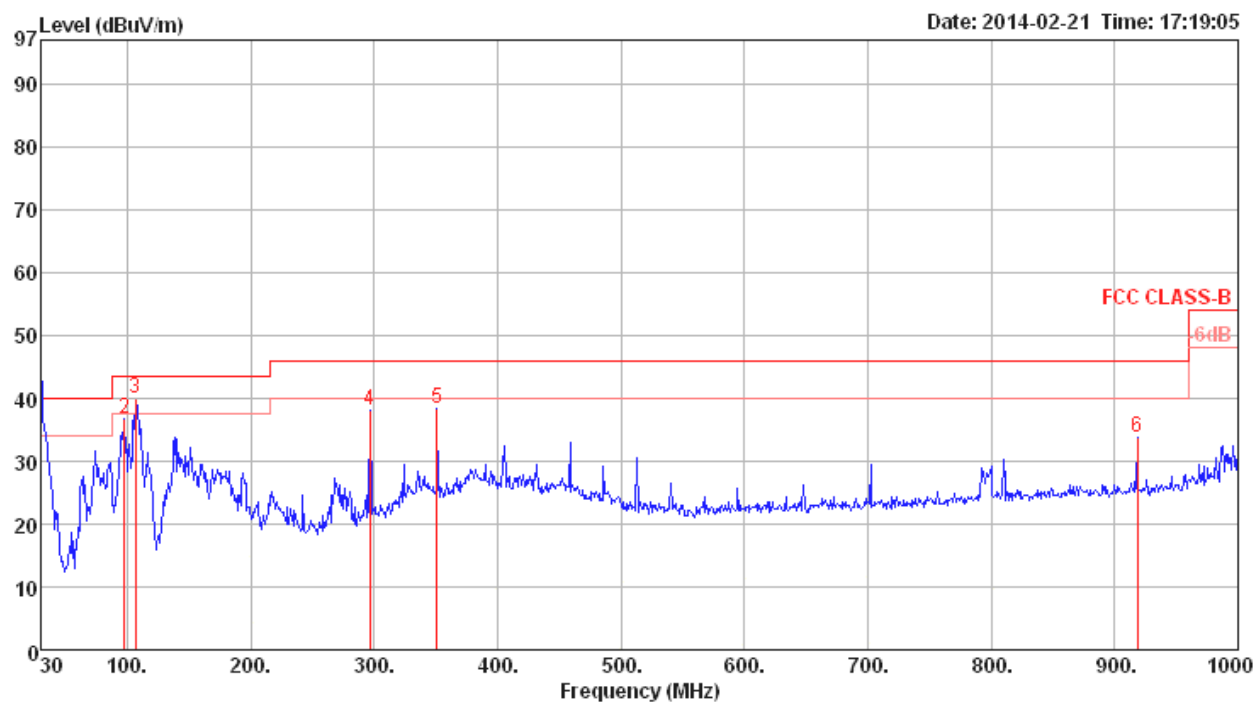

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	30.00	37.00	40.00	-3.00	45.43	0.61	18.76	27.80	QP	289	0	HORIZONTAL
2	97.90	36.68	43.50	-6.82	52.52	1.18	10.59	27.61	Peak	100	0	HORIZONTAL
3	106.63	39.90	43.50	-3.60	54.76	1.21	11.50	27.57	Peak	100	0	HORIZONTAL
4	296.75	37.96	46.00	-8.04	49.52	2.02	13.33	26.91	Peak	100	0	HORIZONTAL
5	351.07	38.34	46.00	-7.66	48.75	2.10	14.75	27.26	Peak	100	0	HORIZONTAL
6	918.52	33.68	46.00	-12.32	36.79	3.54	20.67	27.32	Peak	100	0	HORIZONTAL

Vertical

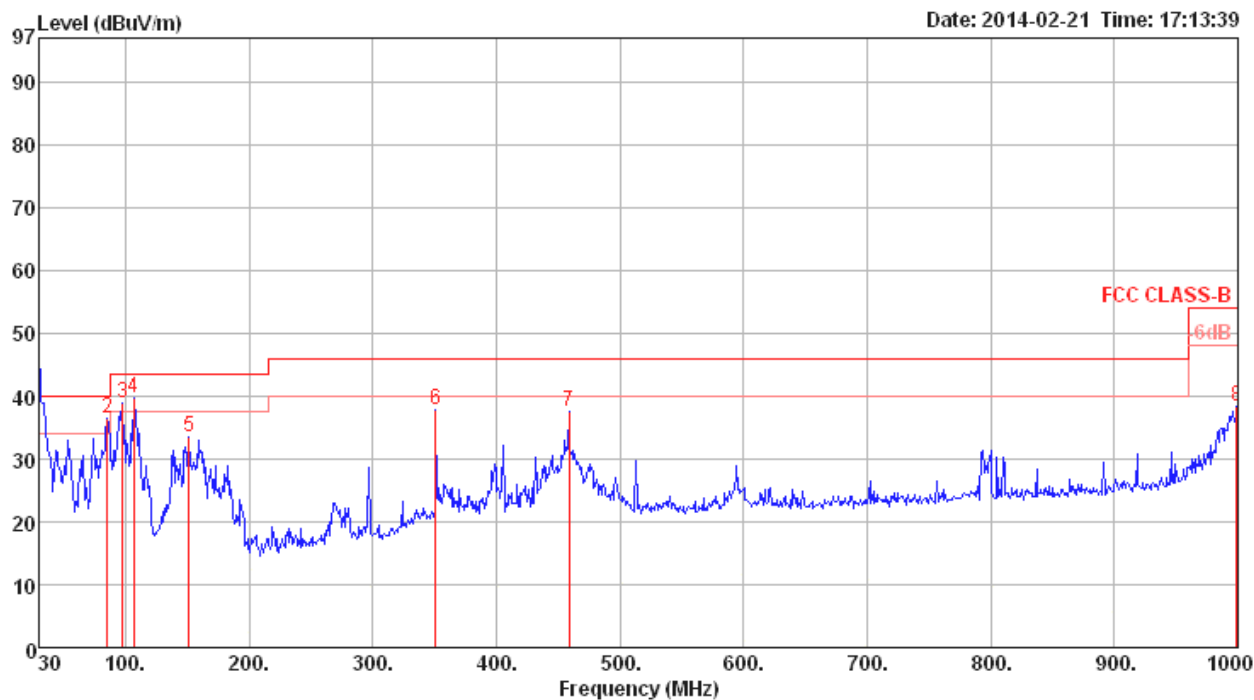

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	Pol/Phase
1	30.00	34.71	40.00	-5.29	43.14	0.61	18.76	27.80	QP	224	0	VERTICAL
2	85.29	36.35	40.00	-3.65	54.81	1.13	8.07	27.66	Peak	400	0	VERTICAL
3	97.90	38.94	43.50	-4.56	54.78	1.18	10.59	27.61	Peak	400	0	VERTICAL
4	106.63	39.60	43.50	-3.90	54.46	1.21	11.50	27.57	Peak	400	0	VERTICAL
5	151.25	33.43	43.50	-10.07	47.49	1.41	11.87	27.34	Peak	400	0	VERTICAL
6	351.07	37.88	46.00	-8.12	48.29	2.10	14.75	27.26	Peak	400	0	VERTICAL
7	458.74	37.67	46.00	-8.33	46.08	2.50	16.98	27.89	Peak	400	0	VERTICAL
8	999.03	38.50	54.00	-15.50	40.53	3.70	21.28	27.01	Peak	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15536.14	45.86	54.00	-8.14	31.22	10.37	38.78	34.51	100	255 HORIZONTAL	Average
2	15542.94	56.35	74.00	-17.65	41.72	10.37	38.78	34.52	100	255 HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15545.00	57.69	74.00	-16.31	43.06	10.37	38.78	34.52	100	178 VERTICAL	Peak
2	15549.58	45.78	54.00	-8.22	31.16	10.37	38.78	34.53	100	178 VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15595.78	45.96	54.00	-8.04	31.41	10.36	38.77	34.58	100	150	HORIZONTAL	Average
2	15603.40	57.39	74.00	-16.61	42.87	10.36	38.75	34.59	100	150	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15596.10	45.91	54.00	-8.09	31.37	10.36	38.77	34.59	100	63	VERTICAL	Average
2	15606.56	56.84	74.00	-17.16	42.33	10.36	38.75	34.60	100	63	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15712.60	44.84	54.00	-9.16	30.49	10.36	38.72	34.73	100	244	HORIZONTAL	Average
2	15728.40	55.16	74.00	-18.84	40.83	10.36	38.72	34.75	100	244	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15713.76	56.64	74.00	-17.36	42.29	10.36	38.72	34.73	100	351	VERTICAL	Peak
2	15720.54	44.90	54.00	-9.10	30.56	10.36	38.72	34.74	100	351	VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10517.30	41.07	54.00	-12.93	28.71	8.42	38.80	34.86	100	49	HORIZONTAL Average
2	10526.78	51.11	74.00	-22.89	38.74	8.43	38.80	34.86	100	49	HORIZONTAL Peak
3	15775.58	55.11	74.00	-18.89	40.87	10.35	38.70	34.81	100	338	HORIZONTAL Peak
4	15781.30	45.46	54.00	-8.54	31.23	10.35	38.70	34.82	100	338	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10519.04	55.47	74.00	-18.53	43.11	8.42	38.80	34.86	140	172	VERTICAL Peak
2	10524.08	47.20	54.00	-6.80	34.84	8.42	38.80	34.86	140	172	VERTICAL Average
3	15781.68	45.43	54.00	-8.57	31.20	10.35	38.70	34.82	100	69	VERTICAL Average
4	15782.68	55.73	74.00	-18.27	41.46	10.35	38.74	34.82	100	69	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10597.92	51.49	74.00	-22.51	38.97	8.47	38.91	34.86	100	214	HORIZONTAL Peak
2	10600.24	40.53	54.00	-13.47	28.01	8.47	38.91	34.86	100	214	HORIZONTAL Average
3	15891.16	44.29	54.00	-9.71	30.07	10.35	38.82	34.95	100	288	HORIZONTAL Average
4	15897.36	55.01	74.00	-18.99	40.80	10.35	38.82	34.96	100	288	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10598.84	43.74	54.00	-10.26	31.22	8.47	38.91	34.86	135	171	VERTICAL Average
2	10605.94	52.61	74.00	-21.39	40.09	8.47	38.91	34.86	135	171	VERTICAL Peak
3	15895.62	44.12	54.00	-9.88	29.91	10.35	38.82	34.96	100	60	VERTICAL Average
4	15905.76	54.38	74.00	-19.62	40.18	10.35	38.82	34.97	100	60	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10642.68	51.68	74.00	-22.32	39.09	8.50	38.95	34.86	100	242	HORIZONTAL Peak
2	10649.06	40.26	54.00	-13.74	27.67	8.50	38.95	34.86	100	242	HORIZONTAL Average
3	15951.06	44.28	54.00	-9.72	30.11	10.34	38.86	35.03	100	67	HORIZONTAL Average
4	15952.90	55.23	74.00	-18.77	41.06	10.34	38.86	35.03	100	67	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10647.54	40.96	54.00	-13.04	28.37	8.50	38.95	34.86	142	171	VERTICAL Average
2	10648.26	51.69	74.00	-22.31	39.10	8.50	38.95	34.86	142	171	VERTICAL Peak
3	15950.90	44.24	54.00	-9.76	30.07	10.34	38.86	35.03	100	132	VERTICAL Average
4	15955.38	54.89	74.00	-19.11	40.72	10.34	38.86	35.03	100	132	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11003.30	42.12	54.00	-11.88	29.16	8.71	39.10	34.85	100	84	HORIZONTAL	Average
2	11006.92	52.31	74.00	-21.69	39.34	8.72	39.10	34.85	100	84	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	10998.58	42.98	54.00	-11.02	30.03	8.71	39.10	34.86	135	162	VERTICAL	Average
2	11005.82	53.39	74.00	-20.61	40.43	8.71	39.10	34.85	135	162	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11150.78	42.47	54.00	-11.53	29.39	8.83	39.10	34.85	100	91	HORIZONTAL	Average
2	11155.82	52.57	74.00	-21.43	39.49	8.83	39.10	34.85	100	91	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11161.96	45.96	54.00	-8.04	32.87	8.84	39.10	34.85	144	197	VERTICAL	Average
2	11166.62	55.69	74.00	-18.31	42.60	8.84	39.10	34.85	144	197	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11393.58	53.14	74.00	-20.86	39.87	9.02	39.10	34.85	100	80 HORIZONTAL	Peak
2	11397.22	42.32	54.00	-11.68	29.05	9.02	39.10	34.85	100	80 HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11406.86	42.69	54.00	-11.31	29.41	9.03	39.10	34.85	138	159 VERTICAL	Average
2	11407.76	54.00	74.00	-20.00	40.72	9.03	39.10	34.85	138	159 VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15567.70	56.98	74.00	-17.02	42.39	10.37	38.77	34.55	100	116	HORIZONTAL	Peak
2	15573.58	45.93	54.00	-8.07	31.35	10.37	38.77	34.56	100	116	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15571.24	45.92	54.00	-8.08	31.33	10.37	38.77	34.55	100	17	VERTICAL	Average
2	15575.70	57.14	74.00	-16.86	42.57	10.36	38.77	34.56	100	17	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15682.26	45.42	54.00	-8.58	31.02	10.36	38.73	34.69	100	239	HORIZONTAL	Average
2	15686.18	57.40	74.00	-16.60	43.01	10.36	38.73	34.70	100	239	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15688.42	45.43	54.00	-8.57	31.04	10.36	38.73	34.70	100	290	VERTICAL	Average
2	15689.70	55.85	74.00	-18.15	41.46	10.36	38.73	34.70	100	290	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10535.36	41.31	54.00	-12.69	28.90	8.43	38.84	34.86	100	270	HORIZONTAL Average
2	10543.76	51.16	74.00	-22.84	38.74	8.44	38.84	34.86	100	270	HORIZONTAL Peak
3	15807.98	44.13	54.00	-9.87	29.89	10.35	38.74	34.85	100	94	HORIZONTAL Average
4	15810.26	55.04	74.00	-18.96	40.80	10.35	38.74	34.85	100	94	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10538.72	55.62	74.00	-18.38	43.21	8.43	38.84	34.86	149	184	VERTICAL Peak
2	10539.30	44.29	54.00	-9.71	31.88	8.43	38.84	34.86	149	184	VERTICAL Average
3	15804.38	44.92	54.00	-9.08	30.68	10.35	38.74	34.85	100	133	VERTICAL Average
4	15807.98	56.40	74.00	-17.60	42.16	10.35	38.74	34.85	100	133	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10615.18	40.03	54.00	-13.97	27.50	8.48	38.91	34.86	100	205	HORIZONTAL Average
2	10615.94	50.55	74.00	-23.45	38.02	8.48	38.91	34.86	100	205	HORIZONTAL Peak
3	15936.22	53.70	74.00	-20.30	39.51	10.34	38.86	35.01	100	88	HORIZONTAL Peak
4	15938.94	44.07	54.00	-9.93	29.88	10.34	38.86	35.01	100	88	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10610.90	51.07	74.00	-22.93	38.54	8.48	38.91	34.86	147	169	VERTICAL Peak
2	10612.94	40.37	54.00	-13.63	27.84	8.48	38.91	34.86	147	169	VERTICAL Average
3	15926.76	43.95	54.00	-10.05	29.75	10.34	38.86	35.00	100	118	VERTICAL Average
4	15933.20	53.60	74.00	-20.40	39.41	10.34	38.86	35.01	100	118	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11016.80	41.83	54.00	-12.17	28.86	8.72	39.10	34.85	100	226	HORIZONTAL	Average
2	11024.36	51.43	74.00	-22.57	38.45	8.73	39.10	34.85	100	226	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11016.62	51.95	74.00	-22.05	38.98	8.72	39.10	34.85	148	187	VERTICAL	Peak
2	11017.82	42.50	54.00	-11.50	29.53	8.72	39.10	34.85	148	187	VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11094.64	52.90	74.00	-21.10	39.86	8.79	39.10	34.85	102	216 HORIZONTAL	Peak
2	11100.86	42.00	54.00	-12.00	28.96	8.79	39.10	34.85	102	216 HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11095.86	52.71	74.00	-21.29	39.67	8.79	39.10	34.85	140	180 VERTICAL	Peak
2	11098.98	42.81	54.00	-11.19	29.77	8.79	39.10	34.85	140	180 VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11335.82	52.25	74.00	-21.75	39.03	8.97	39.10	34.85	100	209	HORIZONTAL	Peak
2	11339.18	41.74	54.00	-12.26	28.51	8.98	39.10	34.85	100	209	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11338.06	42.24	54.00	-11.76	29.01	8.98	39.10	34.85	144	174	VERTICAL	Average
2	11340.60	52.86	74.00	-21.14	39.63	8.98	39.10	34.85	144	174	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15622.00	56.20	74.00	-17.80	41.71	10.36	38.75	34.62	100	342	HORIZONTAL	Peak
2	15622.68	45.57	54.00	-8.43	31.08	10.36	38.75	34.62	100	342	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15634.38	56.21	74.00	-17.79	41.73	10.36	38.75	34.63	100	156	VERTICAL	Peak
2	15634.94	45.75	54.00	-8.25	31.27	10.36	38.75	34.63	100	156	VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10599.36	52.96	74.00	-21.04	40.44	8.47	38.91	34.86	100	189 HORIZONTAL	Peak
2	10614.00	40.38	54.00	-13.62	27.85	8.48	38.91	34.86	100	189 HORIZONTAL	Average
3	15857.52	57.17	74.00	-16.83	42.95	10.35	38.78	34.91	100	256 HORIZONTAL	Peak
4	15859.60	45.00	54.00	-9.00	30.78	10.35	38.78	34.91	100	256 HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10607.60	41.04	54.00	-12.96	28.51	8.48	38.91	34.86	100	246 VERTICAL	Average
2	10611.20	52.74	74.00	-21.26	40.21	8.48	38.91	34.86	100	246 VERTICAL	Peak
3	15846.88	55.76	74.00	-18.24	41.53	10.35	38.78	34.90	100	94 VERTICAL	Peak
4	15874.00	44.64	54.00	-9.36	30.40	10.35	38.82	34.93	100	94 VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11030.00	54.03	74.00	-19.97	41.05	8.73	39.10	34.85	100	216	HORIZONTAL	Peak
2	11049.12	42.85	54.00	-11.15	29.85	8.75	39.10	34.85	100	216	HORIZONTAL	Average

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11049.20	54.31	74.00	-19.69	41.31	8.75	39.10	34.85	100	139	VERTICAL	Peak
2	11102.90	42.84	54.00	-11.16	29.80	8.79	39.10	34.85	100	139	VERTICAL	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 36 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15530.84	45.54	54.00	-8.46	30.89	10.37	38.78	34.50	100	15	HORIZONTAL	Average
2	15534.18	57.38	74.00	-16.62	42.74	10.37	38.78	34.51	100	15	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15530.84	45.88	54.00	-8.12	31.23	10.37	38.78	34.50	100	329	VERTICAL	Average
2	15530.84	55.61	74.00	-18.39	40.96	10.37	38.78	34.50	100	329	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 40 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15591.36	45.87	54.00	-8.13	31.32	10.36	38.77	34.58	100	279	HORIZONTAL	Average
2	15597.02	56.43	74.00	-17.57	41.89	10.36	38.77	34.59	100	279	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	15599.66	57.26	74.00	-16.74	42.72	10.36	38.77	34.59	100	159	VERTICAL	Peak
2	15604.82	45.77	54.00	-8.23	31.26	10.36	38.75	34.60	100	159	VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 24, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15717.34	44.92	54.00	-9.08	30.58	10.36	38.72	34.74	100	59	HORIZONTAL	Average
2	15718.36	55.34	74.00	-18.66	41.00	10.36	38.72	34.74	100	59	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15710.54	44.88	54.00	-9.12	30.53	10.36	38.72	34.73	100	134	VERTICAL	Average
2	15712.98	56.77	74.00	-17.23	42.42	10.36	38.72	34.73	100	134	VERTICAL	Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 52 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 06, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10517.58	41.63	54.00	-12.37	29.27	8.42	38.80	34.86	100	360	HORIZONTAL Average
2	10528.02	52.28	74.00	-21.72	39.91	8.43	38.80	34.86	100	360	HORIZONTAL Peak
3	15776.65	56.44	74.00	-17.56	42.20	10.35	38.70	34.81	100	182	HORIZONTAL Peak
4	15787.70	44.65	54.00	-9.35	30.38	10.35	38.74	34.82	100	182	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10516.64	46.94	54.00	-7.06	34.58	8.42	38.80	34.86	146	5	VERTICAL Average
2	10517.24	58.08	74.00	-15.92	45.72	8.42	38.80	34.86	146	5	VERTICAL Peak
3	15777.48	45.99	54.00	-8.01	31.75	10.35	38.70	34.81	100	6	VERTICAL Average
4	15777.88	58.52	74.00	-15.48	44.28	10.35	38.70	34.81	100	6	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 60 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 06, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10595.22	51.45	74.00	-22.55	38.93	8.47	38.91	34.86	100	162	HORIZONTAL Peak
2	10595.90	40.33	54.00	-13.67	27.81	8.47	38.91	34.86	100	162	HORIZONTAL Average
3	15898.62	55.58	74.00	-18.42	41.37	10.35	38.82	34.96	100	233	HORIZONTAL Peak
4	15900.00	43.81	54.00	-10.19	29.61	10.35	38.82	34.97	100	233	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10591.36	52.33	74.00	-21.67	39.81	8.47	38.91	34.86	100	357	VERTICAL Peak
2	10603.94	41.76	54.00	-12.24	29.24	8.47	38.91	34.86	100	357	VERTICAL Average
3	15892.34	43.84	54.00	-10.16	29.63	10.35	38.82	34.96	100	163	VERTICAL Average
4	15902.72	55.48	74.00	-18.52	41.28	10.35	38.82	34.97	100	163	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	10633.70	51.85	74.00	-22.15	39.27	8.49	38.95	34.86	100	75	HORIZONTAL Peak
2	10643.66	39.33	54.00	-14.67	26.74	8.50	38.95	34.86	100	75	HORIZONTAL Average
3	15950.98	43.10	54.00	-10.90	28.93	10.34	38.86	35.03	100	117	HORIZONTAL Average
4	15961.38	55.26	74.00	-18.74	41.10	10.34	38.86	35.04	100	117	HORIZONTAL Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	10637.66	40.38	54.00	-13.62	27.80	8.49	38.95	34.86	100	292	VERTICAL Average
2	10645.72	51.48	74.00	-22.52	38.89	8.50	38.95	34.86	100	292	VERTICAL Peak
3	15956.34	43.64	54.00	-10.36	29.48	10.34	38.86	35.04	100	196	VERTICAL Average
4	15957.04	55.47	74.00	-18.53	41.31	10.34	38.86	35.04	100	196	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 100 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10999.74	42.12	54.00	-11.88	29.16	8.71	39.10	34.85	100	145	HORIZONTAL Average
2	11002.60	51.44	74.00	-22.56	38.48	8.71	39.10	34.85	100	145	HORIZONTAL Peak
3	16490.88	55.75	74.00	-18.25	40.40	10.61	39.70	34.96	100	194	HORIZONTAL Peak
4	16503.50	45.07	54.00	-8.93	29.70	10.62	39.70	34.95	100	194	HORIZONTAL Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11002.86	41.88	54.00	-12.12	28.92	8.71	39.10	34.85	100	241	VERTICAL Average
2	11003.88	53.06	74.00	-20.94	40.10	8.71	39.10	34.85	100	241	VERTICAL Peak
3	16494.54	45.83	54.00	-8.17	30.47	10.61	39.70	34.95	100	187	VERTICAL Average
4	16508.22	56.58	74.00	-17.42	41.21	10.62	39.70	34.95	100	187	VERTICAL Peak

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 116 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 06, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11157.70	54.01	74.00	-19.99	40.93	8.83	39.10	34.85	100	291	HORIZONTAL	Peak
2	11158.10	43.11	54.00	-10.89	30.02	8.84	39.10	34.85	100	291	HORIZONTAL	Average
3	16739.90	46.48	54.00	-7.52	30.33	10.74	40.30	34.89	100	191	HORIZONTAL	Average
4	16749.88	58.04	74.00	-15.96	41.87	10.75	40.30	34.88	100	191	HORIZONTAL	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11158.56	60.36	74.00	-13.64	47.27	8.84	39.10	34.85	100	0	VERTICAL	Peak
2	11159.32	48.42	54.00	-5.58	35.33	8.84	39.10	34.85	100	0	VERTICAL	Average
3	16732.72	57.70	74.00	-16.30	41.55	10.74	40.30	34.89	100	285	VERTICAL	Peak
4	16745.66	46.32	54.00	-7.68	30.15	10.75	40.30	34.88	100	285	VERTICAL	Average

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11375.50	42.23	54.00	-11.77	28.98	9.00	39.10	34.85	100	90	HORIZONTAL Average
2	11404.25	54.79	74.00	-19.21	41.51	9.03	39.10	34.85	100	90	HORIZONTAL Peak
3	17117.65	59.62	74.00	-14.38	41.92	10.90	41.58	34.78	100	131	HORIZONTAL Peak
4	17117.70	47.45	54.00	-6.55	29.75	10.90	41.58	34.78	100	131	HORIZONTAL Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11414.50	43.00	54.00	-11.00	29.72	9.03	39.10	34.85	100	327	VERTICAL Average
2	11416.75	55.00	74.00	-19.00	41.71	9.04	39.10	34.85	100	327	VERTICAL Peak
3	17075.95	48.20	54.00	-5.80	30.68	10.89	41.42	34.79	100	327	VERTICAL Average
4	17102.50	59.15	74.00	-14.85	41.62	10.90	41.42	34.79	100	327	VERTICAL Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 23, 2014& Jan. 24, 2014		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5100.60	63.55	74.00	-10.45	60.01	5.96	32.98	35.40	100	177 VERTICAL	Peak
2	5101.00	53.32	54.00	-0.68	49.78	5.96	32.98	35.40	100	177 VERTICAL	Average
3	5181.00	102.35			98.73	6.01	33.04	35.43	100	177 VERTICAL	Average
4	5181.00	111.83			108.21	6.01	33.04	35.43	100	177 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5121.00	53.82	54.00	-0.18	50.25	5.98	32.99	35.40	100	194 VERTICAL	Average
2	5121.40	64.89	74.00	-9.11	61.32	5.98	32.99	35.40	100	194 VERTICAL	Peak
3	5201.20	104.00			100.36	6.02	33.05	35.43	100	194 VERTICAL	Average
4	5201.20	112.97			109.33	6.02	33.05	35.43	100	194 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5018.50	60.41	74.00	-13.59	56.96	5.91	32.91	35.37	100	196 VERTICAL	Peak
2	5026.50	47.95	54.00	-6.05	44.48	5.92	32.92	35.37	100	196 VERTICAL	Average
3	5241.00	103.44			99.75	6.05	33.09	35.45	100	196 VERTICAL	Average
4	5241.00	113.18			109.49	6.05	33.09	35.45	100	196 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014& Feb. 19, 2014		

Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5141.30	50.03	54.00	-3.97	46.44	5.99	33.01	35.41	100	194 VERTICAL	Average
2	5145.50	63.63	74.00	-10.37	60.03	5.99	33.02	35.41	100	194 VERTICAL	Peak
3	5258.50	120.13			116.42	6.06	33.10	35.45	100	194 VERTICAL	Peak
4	5263.30	110.64			106.88	6.06	33.15	35.45	100	194 VERTICAL	Average
5	5381.50	47.80	54.00	-6.20	43.67	6.13	33.50	35.50	100	194 VERTICAL	Average
6	5381.50	59.92	74.00	-14.08	55.79	6.13	33.50	35.50	100	194 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5297.60	118.07			114.21	6.08	33.25	35.47	100	166 VERTICAL	Peak
2	5297.80	107.95			104.09	6.08	33.25	35.47	100	166 VERTICAL	Average
3	5372.40	53.09	54.00	-0.91	48.95	6.13	33.50	35.49	100	166 VERTICAL	Average
4	5372.80	63.99	74.00	-10.01	59.85	6.13	33.50	35.49	100	166 VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5319.60	104.87			100.95	6.10	33.30	35.48	100	142 VERTICAL	Average
2	5322.60	114.99			111.07	6.10	33.30	35.48	100	142 VERTICAL	Peak
3	5401.80	63.32	74.00	-10.68	59.08	6.14	33.60	35.50	100	142 VERTICAL	Peak
4	5402.00	53.55	54.00	-0.45	49.31	6.14	33.60	35.50	100	142 VERTICAL	Average

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014& Feb. 19, 2014		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5414.40	64.23	74.00	-9.77	59.99	6.15	33.60	35.51	110	137 VERTICAL	Peak
2	5419.60	53.72	54.00	-0.28	49.43	6.15	33.65	35.51	110	137 VERTICAL	Average
3	5470.00	47.86	54.00	-6.14	43.41	6.18	33.80	35.53	110	137 VERTICAL	Average
4	5470.00	61.25	74.00	-12.75	56.80	6.18	33.80	35.53	110	137 VERTICAL	Peak
5	5499.40	103.93			99.37	6.20	33.90	35.54	110	137 VERTICAL	Average
6	5504.40	113.73			109.17	6.20	33.90	35.54	110	137 VERTICAL	Peak

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5698.80	101.45			96.35	6.33	34.14	35.37	110	121 VERTICAL	Average
2	5698.80	111.42			106.32	6.33	34.14	35.37	110	121 VERTICAL	Peak
3	5778.80	53.48	54.00	-0.52	48.05	6.39	34.33	35.29	110	121 VERTICAL	Average
4	5784.20	64.90	74.00	-9.10	59.47	6.39	34.33	35.29	110	121 VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 23, 2014& Jan. 24, 2014		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5147.80	67.49	74.00	-6.51	63.89	5.99	33.02	35.41	100	181	VERTICAL Peak
2	5150.00	53.74	54.00	-0.26	50.14	5.99	33.02	35.41	100	181	VERTICAL Average
3	5195.60	113.06			109.42	6.02	33.05	35.43	100	181	VERTICAL Peak
4	5196.00	100.99			97.35	6.02	33.05	35.43	100	181	VERTICAL Average

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5146.00	53.03	54.00	-0.97	49.43	5.99	33.02	35.41	100	195	VERTICAL Average
2	5146.40	64.64	74.00	-9.36	61.04	5.99	33.02	35.41	100	195	VERTICAL Peak
3	5226.20	101.56			97.88	6.04	33.08	35.44	100	195	VERTICAL Average
4	5226.20	112.18			108.50	6.04	33.08	35.44	100	195	VERTICAL Peak

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014& Feb. 19, 2014		

Channel 54

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5263.20	116.04			112.28	6.06	33.15	35.45	100	196 VERTICAL	Peak
2	5263.40	105.35			101.59	6.06	33.15	35.45	100	196 VERTICAL	Average
3	5353.40	53.41	54.00	-0.59	49.39	6.11	33.40	35.49	100	196 VERTICAL	Average
4	5354.00	63.97	74.00	-10.03	59.94	6.12	33.40	35.49	100	196 VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5314.60	112.56			108.64	6.09	33.30	35.47	112	137 VERTICAL	Peak
2	5314.80	101.58			97.66	6.09	33.30	35.47	112	137 VERTICAL	Average
3	5350.00	53.29	54.00	-0.71	49.27	6.11	33.40	35.49	112	137 VERTICAL	Average
4	5350.80	65.73	74.00	-8.27	61.71	6.11	33.40	35.49	112	137 VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 07, 2014& Feb. 19, 2014		

Channel 102

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5434.80	51.37	54.00	-2.63	47.03	6.16	33.70	35.52	136	139 VERTICAL	Average
2	5444.00	63.92	74.00	-10.08	59.57	6.17	33.70	35.52	136	139 VERTICAL	Peak
3	5469.40	53.85	54.00	-0.15	49.40	6.18	33.80	35.53	136	139 VERTICAL	Average
4	5469.40	66.06	74.00	-7.94	61.61	6.18	33.80	35.53	136	139 VERTICAL	Peak
5	5504.60	109.89			105.33	6.20	33.90	35.54	136	139 VERTICAL	Peak
6	5504.80	99.33			94.77	6.20	33.90	35.54	136	139 VERTICAL	Average

Item 5, 6 are the fundamental frequency at 5510 MHz.

Channel 110

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5456.20	51.51	54.00	-2.49	47.11	6.17	33.75	35.52	103	174 VERTICAL	Average
2	5456.20	61.87	74.00	-12.13	57.47	6.17	33.75	35.52	103	174 VERTICAL	Peak
3	5465.60	53.52	54.00	-0.48	49.07	6.18	33.80	35.53	103	174 VERTICAL	Average
4	5465.60	64.37	74.00	-9.63	59.92	6.18	33.80	35.53	103	174 VERTICAL	Peak
5	5555.20	114.85			110.14	6.24	33.96	35.49	103	174 VERTICAL	Peak
6	5555.40	104.76			100.05	6.24	33.96	35.49	103	174 VERTICAL	Average

Item 5, 6 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5675.60	101.81			96.76	6.32	34.12	35.39	142	167 VERTICAL	Average
2	5675.60	113.61			108.56	6.32	34.12	35.39	142	167 VERTICAL	Peak
3	5740.00	64.87	74.00	-9.13	59.64	6.36	34.20	35.33	142	167 VERTICAL	Peak
4	5745.50	53.55	54.00	-0.45	48.30	6.37	34.20	35.32	142	167 VERTICAL	Average

Item 1, 2 are the fundamental frequency at 5670 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 58, 106 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 23, 2014, Jan. 24, 2014, Feb. 07, 2014 and Feb. 19, 2014		

Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5146.50	66.18	74.00	-7.82	62.58	5.99	33.02	35.41	100	180	VERTICAL Peak
2	5150.50	53.92	54.00	-0.08	50.32	5.99	33.02	35.41	100	180	VERTICAL Average
3	5195.50	105.77			102.13	6.02	33.05	35.43	100	180	VERTICAL Peak
4	5201.00	93.74			90.10	6.02	33.05	35.43	100	180	VERTICAL Average
5	5350.00	43.76	54.00	-10.24	39.74	6.11	33.40	35.49	100	180	VERTICAL Average
6	5350.00	60.17	74.00	-13.83	56.15	6.11	33.40	35.49	100	180	VERTICAL Peak

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 58

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5145.50	45.25	54.00	-8.75	41.65	5.99	33.02	35.41	116	137	VERTICAL Average
2	5145.50	60.33	74.00	-13.67	56.73	5.99	33.02	35.41	116	137	VERTICAL Peak
3	5264.50	108.97			105.22	6.06	33.15	35.46	116	137	VERTICAL Peak
4	5279.50	96.46			92.65	6.07	33.20	35.46	116	137	VERTICAL Average
5	5350.00	53.02	54.00	-0.98	49.00	6.11	33.40	35.49	116	137	VERTICAL Average
6	5350.00	65.11	74.00	-8.89	61.09	6.11	33.40	35.49	116	137	VERTICAL Peak

Item 3, 4 are the fundamental frequency at 5290 MHz.

Channel 106

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5455.50	66.39	74.00	-7.61	61.99	6.17	33.75	35.52	103	167	VERTICAL Peak
2	5460.00	52.27	54.00	-1.73	47.87	6.18	33.75	35.53	103	167	VERTICAL Average
3	5470.00	53.51	54.00	-0.49	49.06	6.18	33.80	35.53	103	167	VERTICAL Average
4	5470.00	65.45	74.00	-8.55	61.00	6.18	33.80	35.53	103	167	VERTICAL Peak
5	5520.50	95.12			90.51	6.21	33.92	35.52	103	167	VERTICAL Average
6	5521.00	105.96			101.35	6.21	33.92	35.52	103	167	VERTICAL Peak
7	5725.00	46.08	54.00	-7.92	40.89	6.35	34.18	35.34	103	167	VERTICAL Average
8	5741.50	61.99	74.00	-12.01	56.76	6.36	34.20	35.33	103	167	VERTICAL Peak

Item 5, 6 are the fundamental frequency at 5530 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Jan. 23, 2014 & Jan. 24, 2014		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5104.80	53.69	54.00	-0.31	50.14	5.97	32.98	35.40	100	177	VERTICAL	Average
2	5105.00	64.18	74.00	-9.82	60.63	5.97	32.98	35.40	100	177	VERTICAL	Peak
3	5184.40	101.18			97.56	6.01	33.04	35.43	100	177	VERTICAL	Average
4	5184.40	111.35			107.73	6.01	33.04	35.43	100	177	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5114.40	66.21	74.00	-7.79	62.65	5.97	32.99	35.40	100	195	VERTICAL	Peak
2	5114.60	53.94	54.00	-0.06	50.38	5.97	32.99	35.40	100	195	VERTICAL	Average
3	5195.20	103.27			99.63	6.02	33.05	35.43	100	195	VERTICAL	Average
4	5195.60	114.53			110.89	6.02	33.05	35.43	100	195	VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5023.50	48.73	54.00	-5.27	45.28	5.91	32.91	35.37	198	114	HORIZONTAL	Average
2	5078.00	62.11	74.00	-11.89	58.59	5.95	32.96	35.39	198	114	HORIZONTAL	Peak
3	5237.00	101.36			97.67	6.05	33.09	35.45	198	114	HORIZONTAL	Average
4	5237.00	112.38			108.69	6.05	33.09	35.45	198	114	HORIZONTAL	Peak
5	5461.00	50.32	54.00	-3.68	45.92	6.18	33.75	35.53	198	114	HORIZONTAL	Average
6	5465.00	62.50	74.00	-11.50	58.05	6.18	33.80	35.53	198	114	HORIZONTAL	Peak
7	5465.00	62.50	74.00	-11.50	58.05	6.18	33.80	35.53	198	114	HORIZONTAL	Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 06, 2014& Feb. 11, 2014		

Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5101.60	64.27	74.00	-9.73	60.73	5.96	32.98	35.40	100	165 VERTICAL	Peak
2	5104.30	51.88	54.00	-2.12	48.34	5.96	32.98	35.40	100	165 VERTICAL	Average
3	5262.00	111.32			107.61	6.06	33.10	35.45	100	165 VERTICAL	Average
4	5262.40	120.55			116.79	6.06	33.15	35.45	100	165 VERTICAL	Peak
5	5372.40	48.06	54.00	-5.94	43.92	6.13	33.50	35.49	100	165 VERTICAL	Average
6	5372.40	61.30	74.00	-12.70	57.16	6.13	33.50	35.49	100	165 VERTICAL	Peak

Item 3, 4 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5301.20	107.30			103.44	6.08	33.25	35.47	115	140 VERTICAL	Average
2	5301.20	116.61			112.75	6.08	33.25	35.47	115	140 VERTICAL	Peak
3	5381.20	53.09	54.00	-0.91	48.96	6.13	33.50	35.50	115	140 VERTICAL	Average
4	5381.20	64.12	74.00	-9.88	59.99	6.13	33.50	35.50	115	140 VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	5321.40	106.86			102.94	6.10	33.30	35.48	100	145 VERTICAL	Average
2	5322.40	117.02			113.10	6.10	33.30	35.48	100	145 VERTICAL	Peak
3	5401.20	53.70	54.00	-0.30	49.46	6.14	33.60	35.50	100	145 VERTICAL	Average
4	5402.40	64.59	74.00	-9.41	60.35	6.14	33.60	35.50	100	145 VERTICAL	Peak

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	24°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	IEEE 802.11a CH 100, 116, 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Feb. 11, 2014		

Channel 100

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5418.60	66.35	74.00	-7.65	62.06	6.15	33.65	35.51	122	140 VERTICAL	Peak
2	5419.00	53.93	54.00	-0.07	49.64	6.15	33.65	35.51	122	140 VERTICAL	Average
3	5498.60	114.09			109.53	6.20	33.90	35.54	122	140 VERTICAL	Peak
4	5499.40	104.68			100.12	6.20	33.90	35.54	122	140 VERTICAL	Average

Item 3, 4 are the fundamental frequency at 5500 MHz.

Channel 140

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5696.00	114.19			109.09	6.33	34.14	35.37	141	199 VERTICAL	Peak
2	5696.40	104.06			98.96	6.33	34.14	35.37	141	199 VERTICAL	Average
3	5775.40	64.23	74.00	-9.77	58.81	6.39	34.33	35.30	141	199 VERTICAL	Peak
4	5776.40	53.69	54.00	-0.31	48.27	6.39	34.33	35.30	141	199 VERTICAL	Average

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

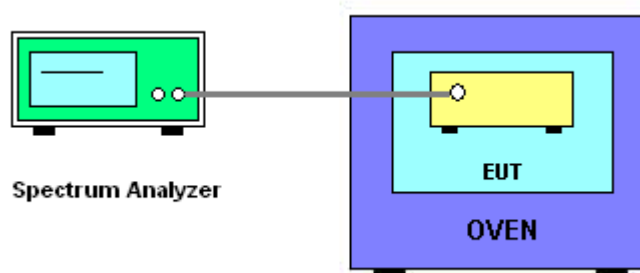

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	26°C	Humidity	63%
Test Engineer	Wen Chao	Test Date	Feb. 20, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)		
(V)	5200 MHz	5300 MHz	5500 MHz
126.50	5199.9984	5299.9988	5499.9984
110.00	5199.9986	5299.9988	5499.9982
93.50	5199.9986	5299.9988	5499.9982
Max. Deviation (MHz)	0.001600	0.001200	0.001800
Max. Deviation (ppm)	0.31	0.23	0.33

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)		
(°C)	5200 MHz	5300 MHz	5500 MHz
-30	5199.9980	5299.9984	5499.9978
-20	5199.9980	5299.9984	5499.9978
-10	5199.9984	5299.9986	5499.9980
0	5199.9984	5299.9986	5499.9980
10	5199.9984	5299.9988	5499.9982
20	5199.9986	5299.9988	5499.9982
30	5199.9986	5299.9988	5499.9982
40	5199.9988	5299.9990	5499.9984
50	5199.9988	5299.9990	5499.9984
Max. Deviation (MHz)	0.002000	0.001600	0.002200
Max. Deviation (ppm)	0.38	0.30	0.40

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Conduction (CO01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Nov. 23, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R	Conduction (CO01-CB)
Bilog Antenna	SCHAFFNER	CBL61112B	2894	30MHz - 1GHz	Nov. 14, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz ~ 30MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 01, 2013	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30MHz - 1GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1GHz - 40GHz	Nov. 17, 2013	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-4	N/A	1GHz – 40GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 04, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1GHz – 26.5GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1GHz – 26.5GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1GHz – 26.5GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1GHz – 26.5GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1GHz – 26.5GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1 = AMN/LISN VSWR 2 =	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.191	dB	K=1	0.095
Cable loss	± 0.169	dB	K=2	0.084
Antenna gain	± 0.191	dB	K=2	0.096
Site imperfection	± 0.582	dB	Triangular	0.291
Pre-amplifier gain	± 0.304	dB	K=2	0.152
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.186	dB	K=1	0.093
Cable loss	± 0.167	dB	K=2	0.083
Antenna gain	± 0.190	dB	K=2	0.095
Site imperfection	± 0.488	dB	Triangular	0.244
Pre-amplifier gain	± 0.269	dB	K=2	0.134
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	± 0.038	dB	K=2	0.019
Attenuator	± 0.047	dB	K=2	0.024
Power Meter specification	± 0.300	dB	Triangular	0.150
Power Sensor specification	± 0.300	dB	Rectangular	0.150
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$				1.726