

SAR TEST REPORT

Test Report No. : 25HE0088-HO-10

Applicant : Sharp Corporation

Type of Equipment : Wireless PDA

Model No. : PV200

FCC ID : APYNAR0060

Test standard : FCC47CFR 2.1093
FCC OET Bulletin 65, Supplement C

Test Result : Complied

Max. SAR Measured :

GSM 850 : Head 0.495W/kg (848.8MHz)
Body 1.33W/kg (848.8MHz)

PCS 1900 : Head 0.366W/kg (1880.0MHz)
Body 0.609W/kg (1909.8MHz)

Bluetooth : Body 0.000684 W/kg (2441MHz)


Colocation evaluation :


GSM850 + Bluetooth : 1.34 W/kg


PCS1900 + Bluetooth : 0.61 W/kg

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with the above standard. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

Date of test : March 8-13, 2006

Tested by : 
Miyo Ikuta
EMC Services

Tested by : 
Hisayoshi Sato
EMC Services

Approved by : 
Hironobu Shimoji
Group Leader of EMC Services

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 1 :	Client information	3
SECTION 2 :	Equipment under test (E.U.T.).....	3
2.1	Identification of E.U.T.	3
2.2	Product Description.....	4
SECTION 3 :	Test standard information.....	5
3.1	Requirements for compliance testing defined by the FCC	5
3.2	Exposure limit	6
SECTION 4 :	Test result.....	7
4.1	Result of Max. SAR value.....	7
4.3	Test Location.....	7
SECTION 5 :	Operation of E.U.T. during testing	8
5.1	Operating modes	8
5.2	Description of the head test setup.....	9
5.3	Method of measurement (Head SAR)	10
5.4	Description of the Body-worn test setup and Method	10
SECTION 6 :	Test surrounding	11
6.1	Measurement uncertainty	11
SECTION 7 :	Confirmation before testing.....	12
7.1	Output Power Measurement results.....	12
SECTION 8 :	Measurement results	13
8.1	Head 850MHz SAR	13
8.2	Body-worn 850MHz SAR.....	14
8.3	Head 1900MHz SAR	15
8.4	Body-worn 1900MHz SAR.....	16
8.5	Body-worn 2450MHz SAR.....	17
APPENDIX 1 :	Photographs of test setup	18
APPENDIX 2 :	Test instruments.....	26
1.	Equipment used	27
2.	Dosimetry assessment setup	28
3.	Configuration and peripherals	29
4.	System components	30
5.	Test system specifications	32
6.	900MHz Simulated Tissues Composition.....	33
7.	900MHz Validation Measurement.....	33
8.	900MHz System validation data.....	34
9.	900MHz Validation Measurement data	35
10.	1800MHz Simulated Tissues Composition.....	38
11.	1800MHz Validation Measurement.....	38
12.	1800MHz System validation data.....	39
13.	1800MHz Validation Measurement data	40
14.	2450MHz Simulated Tissues Composition.....	42
15.	2450MHz Validation Measurement.....	42
16.	2450MHz System validation data.....	43
17.	2450MHz Validation Measurement data	44
18.	Validation uncertainty	45
20.	System Validation Dipole (D900V2,S/N: 155)	46
21.	System Validation Dipole (D1800V2,S/N: 2d040).....	55
22.	System Validation Dipole (D2450V2,S/N: 713)	64
23.	Dosimetric E-Field Probe Calibration (EX3DV3,S/N: 3507).....	73
24.	References	83
APPENDIX 3 :	SAR Measurement data	84
1.	Evaluation procedure	85
2.	Measurement data (GSM 850).....	86
3.	Measurement data (PCS 1900)	102
4.	Measurement data (Bluetooth 2450MHz).....	118

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 1 : Client information

Company Name	Sharp Corporation
Brand name	SHARP
Address	492 Minosho-cho Yamatokoriyama-shi Nara,639-1186,Japan
Telephone Number	+81-743-55-4022
Facsimile Number	+81-743-55-2553
Contact Person	Takahiro Inoue

SECTION 2 : Equipment under test (E.U.T.)**2.1 Identification of E.U.T.**

Type of Equipment	Wireless PDA
Model No.	PV200
Serial No.	1 (for Bluetooth test) 5 (for GSM850 and PCS1900 tests)
Country of Manufacture	Japan
Battery	Model Name : PV-BL11 (Rechargeable Lithium-ion battery)
	Rating : DC3.7V/1500mAh
	Manufacture SHARP
Option Battery	N/A
Accessories	Carring case and Earphone
Condition of EUT	Engineering prototype (Not for sale: This sample is equivalent to mass-produced items.)
Operation Clock	32.768kHz, 12MHz, 26MHz, 32MHz
Receipt Date of Sample	February 23, 2006
Category Identified	Portable device

UL Apex Co., Ltd.***Head Office EMC Lab.****4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN**Telephone: +81 596 24 8116**Facsimile: +81 596 24 8124*

2.2 Product Description**Radio Specification**

	GSM850	PCS1900	Bluetooth
Equipment Type	Transceiver	Transceiver	Transceiver
Tx frequency	824.20 – 848.8MHz	1850.2MHz - 1909.8MHz	2402MHz - 2480MHz
Type of Modulation	GMSK/8PSK	GMSK/8PSK	FHSS
Bandwidth	340kHz	334kHz	1MHz
Channel Spacing	200kHz	200kHz	1MHz
Channel Number	124	299	79
Antenna fixed method	Integral	Integral	Integral
Antenna Type	PIFA (Type 53D)	PIFA (Type 53D)	Chip Antenna (AF216M245001T)
Antenna Connector Type	Spring Contact	Spring Contact	Spring Contact
Antenna Gain	-5.30dBi max	-2.29dBi max	-6.6dBi max
Antenna location	Refer to Appendix 1	Refer to Appendix 1	Refer to Appendix 1
Max. Transmit Power tested	32.62 dBm (1.8W)	28.95dBm (785mW)	0.02dBm (1mW)
Power Supply	DC 3.7 – 4.2V	DC3.7 – 4.2V	DC3.0V

UL Apex Co., Ltd.**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 3 : Test standard information

3.1 Requirements for compliance testing defined by the FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).

2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

3.2 Exposure limit**(A) Limits for Occupational/Controlled Exposure (W/kg)**

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE
SPATIAL PEAK(averaged over any 1g of tissue) LIMIT
1.6 W/kg**

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 4 : Test result

4.1 Result of Max. SAR value

4.1.1 GSM850

Max. SAR Measured : Head 0.495W/kg
 Body 1.33W/kg

4.1.2 PCS1900

Max. SAR Measured : Head 0.366W/kg
 Body 0.609W/kg

4.1.3 Bluetooth

Max. SAR Measured : Body 0.000684W/kg

4.2 Colocation of SAR value

As the colocation evaluation, the maximum SAR value of EUT is calculated by adding maximum SAR values of GSM and Bluetooth as shown below:

Max. SAR value = Max. SAR value (GSM850) + Max. SAR value (Bluetooth)

Max. SAR Measured (GSM 850 + Bluetooth) 1.34W/kg
=1.33(from GSM850 body test) + 0.000684 (Bluetooth)
=1.330684

Max. SAR value = Max. SAR value (PCS1900) + Max. SAR value (Bluetooth)

Max. SAR Measured (PCS1900 + Bluetooth) 0.61W/kg
=0.609(from PCS1900 body test) + 0.000684 (Bluetooth)
=0.609684

4.3 Test Location

UL Apex Co., Ltd. Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 5 : Operation of E.U.T. during testing

5.1 Operating modes

A communication link was set up with the Universal Radio Communication Tester from R&S.

The EUT was command to operate at maximum transmit power (Power class 0).

The frequency band and the modulation used in this test are shown as a following.

1. GSM850 (Power class 5)

Frequency band : 824.2MHz – 848.8MHz
Channel : 125ch(824.2MHz)
 190ch(836.6MHz)
 251ch(848.8MHz)
Modulation : GSM,GPRS,EGPRS
Crest factor : 8.3(GSM),4.2(GPRS,EGPRS)

2. PCS1900 (Power class 0)

Frequency band : 1850.2MHz – 1909.8MHz
Channel : 512ch(1850.2MHz)
 661ch(1880.0MHz)
 810ch(1909.8MHz)
Modulation : GSM,GPRS,EGPRS
Crest factor : 8.3(GSM),4.2(GPRS,EGPRS)

3. Bluetooth

Frequency band : 2402MHz – 2480MHz
Channel : 1ch(2402MHz)
 39ch(2441MHz)
 79ch(2480MHz)
Modulation : FHSS
Crest factor : 1

*The detail of base-station simulator

Item : Universal Radio Cimmunication Tester
Model Number : CMU200
Serial Number : 106223
Manufacture : Rohde & Schwarz

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124



5.2 Description of the head test setup

According to the OET 65 and IEEE1528, this EUT was tested on the "Cheek/Touch" and "Ear/Tilt" positions at the left head and right head section of the SAM phantom.

5.2.1 Initial ear position

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom.

The device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane".

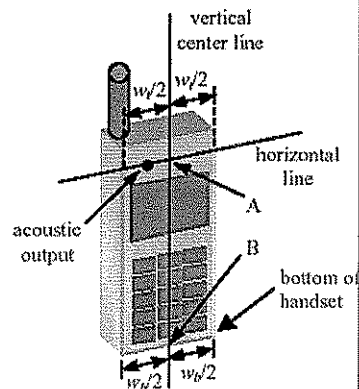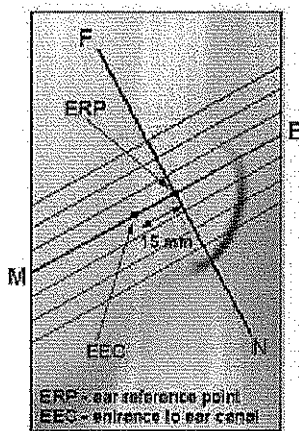


This part has been submitted for a separate exhibit.

5.2.2 Cheek position

The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line.

This test position is established:

- i) When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- ii) (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

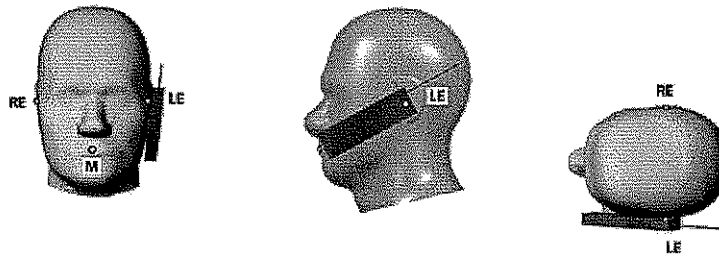

UL Apex Co., Ltd.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

5.2.3 Tilt position

If the earpiece of the handset is not in full contact with the phantom's ear spacer and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise the handset should be moved away from the cheek perpendicular to the line passes through both "ear reference points" for approximate 2-3 cm. While it is in this position, the handset is tilted away from the mouth with respect to the "test device reference point" by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.

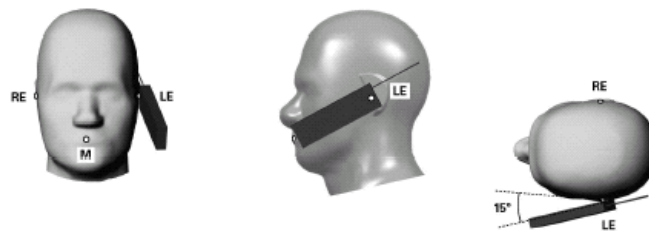

5.2.4 Antenna position

The antenna of this EUT was built-in antenna.

5.3 Method of measurement (Head SAR)

Step1. The searching for the worst position

Step2. The changing to the Low and High channels

The test was performed at the worst conditions of Step1.

5.4 Description of the Body-worn test setup and Method

This EUT was tested on the "Back" position at the flat section of SAM phantom.

The tested channel was performed in each Low, Mid and High channels.

The tested modulation was performed in each GSM, GPRS and EGPRS.

The tests were performed in the EUT with the carrying case and ear phone. (Refer to the Appendix1)

SECTION 6 : Test surrounding

6.1 Measurement uncertainty

The uncertainty budget has been determined for the DASY4 measurement system according to the SPEAG documents[6][7] and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or veff
Measurement System						
Probe calibration	± 6.8	Normal	1	1	± 6.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Boundary effects	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2	∞
Probe linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 0.3	Normal	1	1	± 0.3	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF ambient Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
RF ambient Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.5	∞
Probe positioning	± 9.9	Rectangular	$\sqrt{3}$	1	± 5.7	∞
Max.SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Test Sample Related						
Device positioning	± 2.9	Normal	1	1	± 2.9	32
Device holder uncertainty	± 3.6	Normal	1	1	± 3.6	4
Power drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid conductivity (meas.)	± 5.0	Rectangular	1	0.64	± 3.2	∞
Liquid permittivity (target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	Rectangular	1	0.6	± 3.0	∞
Combined Standard Uncertainty					± 13.453	
Expanded Uncertainty (k=2)					± 26.9	

SECTION 7 : Confirmation before testing**7.1 Output Power Measurement results**

Model : PV200
 Modulation : GSM,Bluetooth
 Serial No. : 5(for GSM testing)
 : 1(for Bluetooth testing)
 Ambient temperature (deg.c.) : 24.5
 Relative Humidity (%) : 35
 Date : March 8,2006
 Measured By : Miyo Ikuta

GSM850						
Ch	Frequency [MHz]	P/M Reading [dBm]	Atten. [dB]	Cable Loss [dB]	Result [dBm]	Convert [mW]
Low	824.2	2.11	30.00	0.49	32.60	1819.7
Mid	836.6	2.00	30.00	0.49	32.49	1774.2
High	848.8	2.13	30.00	0.49	32.62	1828.1

PCS1900						
Ch	Frequency [MHz]	P/M Reading [dBm]	Atten. [dB]	Cable Loss [dB]	Result [dBm]	Convert [mW]
Low	1850.2	7.34	20.00	0.50	27.84	608.1
Mid	1880.0	7.91	20.00	0.50	28.41	693.4
High	1909.8	8.45	20.00	0.50	28.95	785.2

Bluetooth						
Ch	Freq. [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm] [mW]	
Low	2402.0	-1.71	0.95	0.00	-0.76	0.84
Mid	2441.0	-1.10	0.95	0.00	-0.15	0.97
High	2480.0	-1.98	0.95	0.00	-1.03	0.79
Inquiry	2441.0	-0.93	0.95	0.00	0.02	1.00

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

SECTION 8 : Measurement results**8.1 Head 850MHz SAR**

Liquid Depth (cm)	: 15.0	Model	: PV200
Parameters	: $\epsilon_r = 41.3$, $\sigma = 0.88$	Serial No.	: 5
Ambient temperature (deg.c.)	: 24.5	Modulation	: GSM
Relative Humidity (%)	: 35	Crest factor	: 8.3
Date	: March 13, 2006	Measured By	: Miyo Ikuta

HEAD SAR MEASUREMENT RESULTS								
Frequency		Modulation	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Before	After	Maximum of multi-peak
Step1. Position search								
Mid	836.6	GSM	Left head	Fixed	Cheek	23.0	23.0	0.241
Mid	836.6	GSM	Left head	Fixed	Tilt	23.0	23.0	0.171
Mid	836.6	GSM	Right head	Fixed	Cheek	23.0	23.0	0.279
Mid	836.6	GSM	Right head	Fixed	Tilt	23.0	23.0	0.187
Step2. Frequency Change								
Low	824.2	GSM	Right head	Fixed	Tilt	23.0	22.8	0.160
High	848.8	GSM	Right head	Fixed	Tilt	22.8	22.8	0.495
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Head SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population						(averaged over 1 gram)		

*See Appendix 3 for measurement data plots.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.2 Body-worn 850MHz SAR

Liquid Depth (cm)	: 15.0	Model	: PV200
Parameters	: $\epsilon_r = 54.0$, $\sigma = 0.96$	Serial No.	: 5
Ambient temperature (deg.c.)	: 25.0	Modulation	: GSM
Relative Humidity (%)	: 36	Crest factor	: 8.3
Date	: March 9, 2006	Measured By	: Miyo Ikuta

BODY-WORN SAR MEASUREMENT RESULTS									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum of multi-peak
Low	824.2	GSM	Flat	Fixed	Back	0	24.3	24.3	0.532
Mid	836.6	GSM	Flat	Fixed	Back	0	24.3	24.3	0.624
High	848.8	GSM	Flat	Fixed	Back	0	24.3	24.3	0.631
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

Liquid Depth (cm)	: 15.0	Model	: PV200
Parameters	: $\epsilon_r = 55.2$, $\sigma = 0.95$	Serial No.	: 5
Ambient temperature (deg.c.)	: 25.0	Modulation	: GPRS,EGPRS
Relative Humidity (%)	: 36	Crest factor	: 4.2
Date	: March 10, 2006	Measured By	: Hisayoshi Sato

BODY-WORN SAR MEASUREMENT RESULTS									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum of multi-peak
Low	824.2	GPRS	Flat	Fixed	Back	0	24.7	24.7	1.13
Mid	836.6	GPRS	Flat	Fixed	Back	0	24.7	24.7	1.10
High	848.8	GPRS	Flat	Fixed	Back	0	24.7	24.7	1.33
Low	824.2	EGPRS	Flat	Fixed	Back	0	24.7	24.7	1.09
Mid	836.6	EGPRS	Flat	Fixed	Back	0	24.7	24.7	1.18
High	848.8	EGPRS	Flat	Fixed	Back	0	24.7	24.7	1.31
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population							Body SAR: 1.6 W/kg (averaged over 1 gram)		

* See Appendix 3 for measurement data plots.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.3 Head 1900MHz SAR

Liquid Depth (cm)	: 15.0	Model	: PV200
Parameters	: $\epsilon_r = 38.2$, $\sigma = 1.44$	Serial No.	: 5
Ambient temperature (deg.c.)	: 25.0	Modulation	: GSM
Relative Humidity (%)	: 34	Crest factor	: 8.3
Date	: March 8, 2006	Measured By	: Miyo Ikuta

HEAD SAR MEASUREMENT RESULTS								
Frequency		Modulation	Phantom Section	EUT Set-up Conditions		Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Before	After	Maximum of multi-peak
Step1. Position search								
Mid	1880.0	GSM	Left head	Fixed	Cheek	22.0	22.0	0.240
Mid	1880.0	GSM	Left head	Fixed	Tilt	22.0	22.0	0.366
Mid	1880.0	GSM	Right head	Fixed	Cheek	22.0	22.0	0.204
Mid	1880.0	GSM	Right head	Fixed	Tilt	22.0	22.0	0.271
Step2. Frequency Change								
Low	1850.2	GSM	Left head	Fixed	Tilt	22.0	22.1	0.345
High	1909.2	GSM	Left head	Fixed	Tilt	22.1	22.2	0.264
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Head SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population						(averaged over 1 gram)		

*See Appendix 3 for measurement data plots.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.4 Body-worn 1900MHz SAR

Liquid Depth (cm) : **15.0** Model : **PV200**
 Parameters : $\epsilon_r = 50.7$, $\sigma = 1.54$ Serial No. : **5**
 Ambient temperature (deg.c.) : **25.0** Modulation : **GSM**
 Relative Humidity (%) : **34** Crest factor : **8.3**
 Date : **March 8, 2006** Measured By : **Miyo Ikuta**

BODY-WORN SAR MEASUREMENT RESULTS PCS1900									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Low	1850.2	GSM	Flat	Fixed	Back	0	24.5	24.5	0.503
Mid	1880.0	GSM	Flat	Fixed	Back	0	24.5	24.5	0.530
High	1909.8	GSM	Flat	Fixed	Back	0	24.5	24.5	0.561
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population							(averaged over 1 gram)		

Liquid Depth (cm) : **15.0** Model : **PV200**
 Parameters : $\epsilon_r = 50.7$, $\sigma = 1.54$ Serial No. : **5**
 Ambient temperature (deg.c.) : **25.0** Modulation : **GPRS,EGPRS**
 Relative Humidity (%) : **35** Crest factor : **4.2**
 Date : **March 11, 2006** Measured By : **Hisayoshi Sato**

BODY-WORN SAR MEASUREMENT RESULTS PCS1900									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
Low	1850.2	GPRS	Flat	Fixed	Back	0	24.5	24.5	0.503
Mid	1880.0	GPRS	Flat	Fixed	Back	0	24.5	24.5	0.530
High	1909.8	GPRS	Flat	Fixed	Back	0	24.5	24.5	0.561
Low	1850.2	EGPRS	Flat	Fixed	Back	0	24.5	24.5	0.470
Mid	1880.0	EGPRS	Flat	Fixed	Back	0	24.5	24.5	0.492
High	1909.8	EGPRS	Flat	Fixed	Back	0	24.5	24.5	0.609
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body SAR: 1.6 W/kg		
Spatial Peak Uncontrolled Exposure / General Population							(averaged over 1 gram)		

* See Appendix 3 for measurement data plots.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

8.5 Body-worn 2450MHz SAR

Liquid Depth (cm) : **15.0** Model : **PV200**
 Parameters : $\epsilon_r = 50.2, \sigma = 2.03$ Serial No. : **1**
 Ambient temperature (deg.c.) : **24.5** Modulation : **FHSS**
 Relative Humidity (%) : **35** Crest factor : **1**
 Date : **March 13,2006** Measured By : **Miyo Ikuta**

BODY-WORN SAR MEASUREMENT RESULTS									
Frequency		Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g) [W/kg]
Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum of multi-peak
Low	2402	BT	Flat	Fixed	Back	0	24.0	24.0	0.0000327
Mid	2441	BT	Flat	Fixed	Back	0	24.0	24.0	0.0006840
High	2480	BT	Flat	Fixed	Back	0	24.0	24.0	0.0000237

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124