

FCC Test Report

Product Name	Portable Computer
Model No.	P109F
FCC ID.	E2K-P109F

Applicant	Dell Inc.
Address	One Dell Way, Round Rock, Texas 78682, USA

Date of Receipt	Dec. 22, 2020
Issued Date	Feb. 20, 2021
Report No.	20C0808R-E3032110108
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: Feb. 20, 2021

Report No.: 20C0808R-E3032110108




Product Name	Portable Computer
Applicant	Dell Inc.
Address	One Dell Way, Round Rock, Texas 78682, USA
Manufacturer	Dell Inc.
Model No.	P109F
FCC ID.	E2K-P109F
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	ALIENWARE
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Joanne Lin)

Tested By :

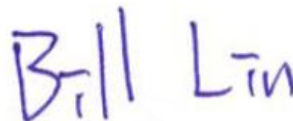

(Senior Engineer / Bill Lin)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Tested System	7
1.4. EUT Exercise Software	7
1.5. Test Facility	8
1.6. List of Test Item and Equipment	9
1.7. Uncertainty	10
1.8. Summary of Test Results.....	11
2. CONDUCTED EMISSION	12
2.1. Test Setup	12
2.2. Limits.....	12
2.3. Test Procedure	13
2.4. Test Result of Conducted Emission.....	14
3. PEAK POWER OUTPUT	16
3.1. Test Setup	16
3.2. Limit	16
3.3. Test Procedure	16
3.4. Test Result of Peak Power Output	17
4. RADIATED EMISSION	20
4.1. Test Setup	20
4.2. Limits.....	21
4.3. Test Procedure	22
4.4. Test Result of Radiated Emission.....	23
5. DUTY CYCLE	47
5.1. Test Setup	47
5.2. Test Result of Duty Cycle.....	48
6. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	51
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

Revision History

Report No.	Version	Description	Issued Date
20C0808R-E3032110108	V1.0	Initial issue of report.	Feb. 20, 2021

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Portable Computer
Trade Name	ALIENWARE
Model No.	P109F
FCC ID.	E2K-P109F
Frequency Range	2402-2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / $\pi/4$ DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Power Cable	Shielded, 1.8m
Power Adapter	MFR: DELL, M/N: HA240PM190 Input: AC 100-240V~5A, 50-60Hz Output: 19.5V=12.31A, 240.0W Cable Out: Shielded, 1.8m, with two ferrite cores bonded.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Hong-BO Co., Ltd.	260-24363 (DC33002IL0L) (Main) 260-24362 (DC33002IL1L) (Aux)	PIFA Antenna	2.64dBi for 2.4GHz
2	Wistron Neweb Corporation	DC33002IK0L (81EABG15.G09) (Main) DC33002IK1L (81EABG15.G10) (Aux)	PIFA Antenna	0.74dBi for 2.4GHz

Note:

- (1) The antenna of EUT is conforming to FCC 15.203.
- (2) Only the higher gain antenna was tested and recorded in this report.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is an Portable Computer with a built-in WLAN (802.11a/b/g/n/ac/ax) with Bluetooth (5.0 and V3.0+HS, V2.1+EDR) transceiver, this report for Bluetooth V3.0+HS, V2.1+EDR.
2. This report is based on the comprehensive requirements of KDB 996369 D02. The end product only evaluates RF power and spurious emissions. The original RF module test report is 181210-03.TR05.
3. BT signal is only transmitted by Main antenna port.
4. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
5. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Test Mode	Mode 1: Transmit - 1Mbps Mode 2: Transmit - 2Mbps Mode 3: Transmit - 3Mbps
-----------	--


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 External HDD	SanDisk	SanDisk Extreme 900	N/A	N/A
2 USB 3.0	Transcend	TS1TSJ25M3	D468623806	N/A
3 USB 3.0	Transcend	TS1TSJ25M3	D468623815	N/A
4 USB 3.0	Transcend	TS1TSJ25M3	D468623807	N/A
5 LCD Monitor	Lenovo	T24d	V5CZ4279	N/A
6 Microphone & Earphone	Verbatim	C09024VB	N/A	N/A

Signal Cable Type	Signal cable Description
A USB Cable	Shielded, 0.5m
B USB Cable	Shielded, 0.4m
C USB Cable	Shielded, 0.4m
D USB Cable	Shielded, 0.4m
E HDMI Cable	Shielded, 1.8m
F Microphone & Earphone Cable	Non-shielded, 2.0m

1.3. Configuration of Tested System

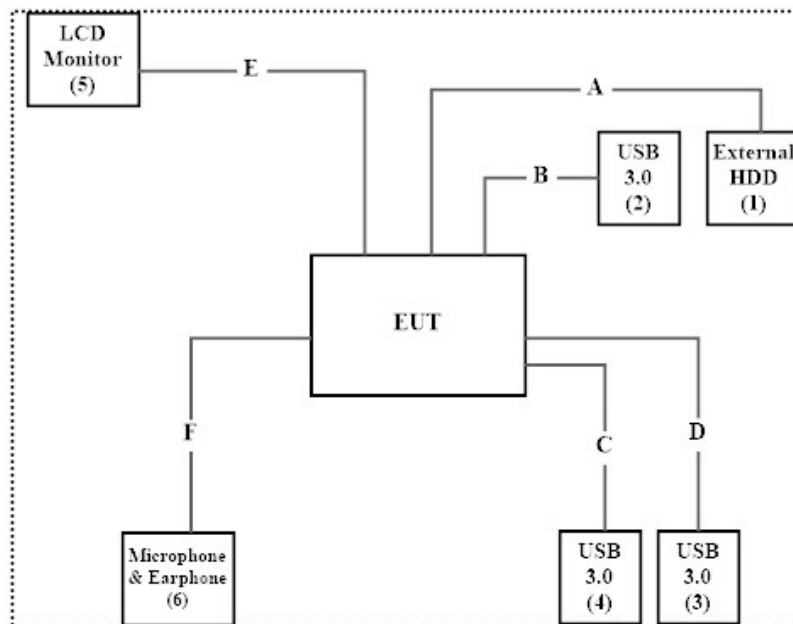

1.4. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.3.
- (2) Execute software “DRTU Ver. 22.3500.0.0-01462” on the EUT.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	22°C
	Humidity (%RH)	10~90 %	44.3%
Radiated Emission	Temperature (°C)	10~40 °C	16.8°C
	Humidity (%RH)	10~90 %	60.9%
Conductive	Temperature (°C)	10~40 °C	22°C
	Humidity (%RH)	10~90 %	55%

USA : FCC Registration Number: TW0023

Canada : IC Registration Number: 25880

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan, R.O.C.
Phone number : 886-2-2602-7968
Fax number : 866-2-2602-3286
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Item and Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Two-Line V-Network	R&S	ENV216	101306	2020.03.25	2021.03.24
X	Two-Line V-Network	R&S	ENV216	101307	2020.04.17	2021.04.16
X	Coaxial Cable	DEKRA	RG400 BNC	RF001	2020.05.24	2021.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

For Conducted measurements /ASR2

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2020.05.13	2021.05.12
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2020.05.22	2021.05.21
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2020.05.22	2021.05.21

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5

For Radiated measurements /ACB1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	49611	2020.03.16	2021.03.15
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2020.05.20	2021.05.19
X	Horn Antenna	ETS-Lindgren	3117	00201259	2020.10.23	2021.10.22
X	Horn Antenna	Com-Power	AH-840	101087	2020.06.08	2021.06.07
X	Pre-Amplifier	EMCI	EMC001330	980316	2020.06.23	2021.06.22
X	Pre-Amplifier	EMCI	EMC051835SE	980313	2020.11.25	2021.11.24
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2020.06.24	2021.06.23
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2020.06.10	2021.06.09
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR7	101601	2020.05.28	2021.05.27
X	Spectrum Analyzer	R&S	FSV40	101148	2020.03.16	2021.03.15
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2020.07.03	2021.07.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2020.06.10	2021.06.09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.


Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Peak Power Output	± 0.91 dB	
Radiated Emission	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Duty Cycle	± 2.31 ms	

1.8. Summary of Test Results

Description	Result
Conducted Emission	Pass
Peak Power Output	Pass
Radiated Emission	Pass
RF Antenna Conducted Test	Refer to Note 1
Band Edge	Refer to Note 1
Channel Number	Refer to Note 1
Channel Separation	Refer to Note 1
Dwell Time	Refer to Note 1
Occupied Bandwidth	Refer to Note 1
Duty Cycle	--
<p>Note 1 :</p> <p>This report is a partial report. The test items above were based on the comprehensive requirements of KDB 996369 D02 in which only RF power, Transmitter unwanted emissions and Receiver spurious emissions were performed. For other test data please refer to original modular report.</p> <p>(Original report no.: 181210-03.TR05, Brand: Intel® Wi-Fi 6 AX200, Model: AX200NGW)</p>	

2. Conducted Emission

2.1. Test Setup

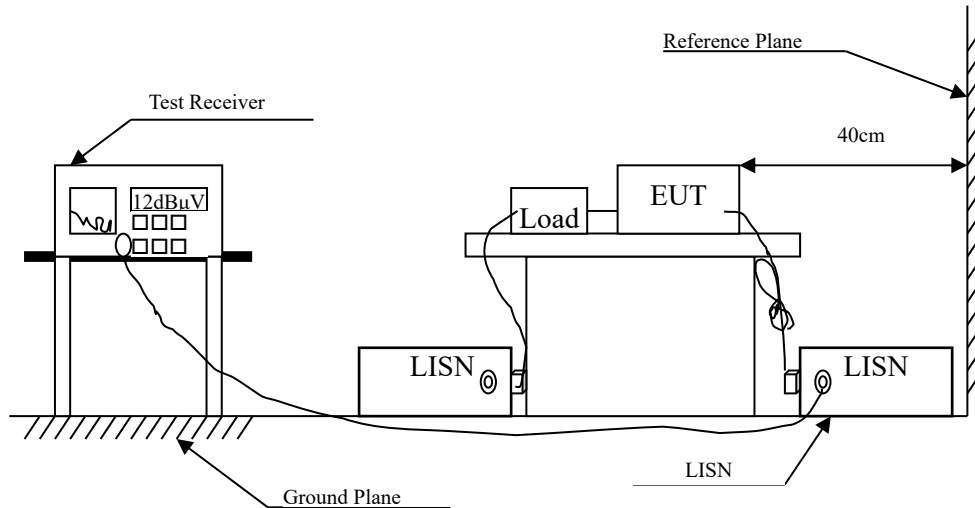

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)


Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT setup and the test procedure are according to ANSI C63.4, 2014 to comply with the requirements of FCC 47CFR Subpart C.

2.4. Test Result of Conducted Emission

Product : Portable Computer
 Test Item : Conducted Emission Test
 Power Line : L 1
 Test Mode : Mode 3: Transmit - 3Mbps (2440MHz)
 Test Date : 2021/02/19

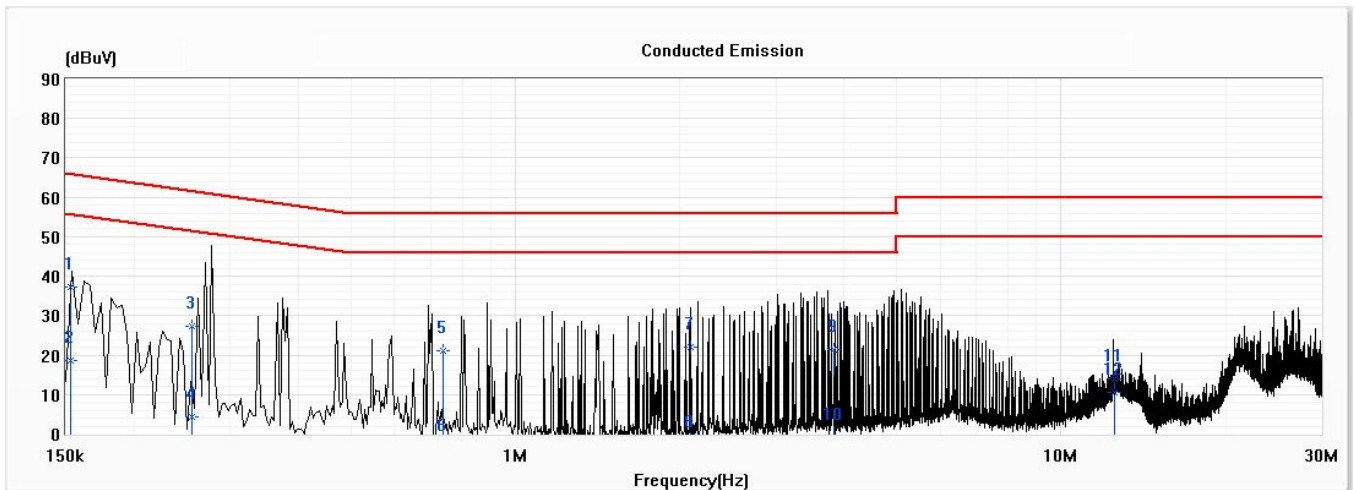


No	Frequency (MHz)	Emission Level (dBμV)	Limit (dBμV)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
*1	0.153	37.16	65.83	-28.67	27.50	9.66	QP
2	0.153	18.72	55.83	-37.11	9.06	9.66	AV
3	0.256	27.22	61.57	-34.35	17.57	9.65	QP
4	0.256	4.37	51.57	-47.21	-5.29	9.65	AV
5	0.736	21.07	56.00	-34.93	11.39	9.68	QP
6	0.736	-3.60	46.00	-49.60	-13.28	9.68	AV
7	2.094	21.97	56.00	-34.03	12.25	9.72	QP
8	2.094	-2.93	46.00	-48.93	-12.65	9.72	AV
9	3.826	21.50	56.00	-34.50	11.73	9.77	QP
10	3.826	-0.97	46.00	-46.97	-10.73	9.77	AV
11	12.493	14.02	60.00	-45.98	4.11	9.92	QP
12	12.493	10.53	50.00	-39.47	0.61	9.92	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Portable Computer
 Test Item : Conducted Emission Test
 Power Line : N
 Test Mode : Mode 3: Transmit - 3Mbps (2440MHz)
 Test Date : 2021/02/19

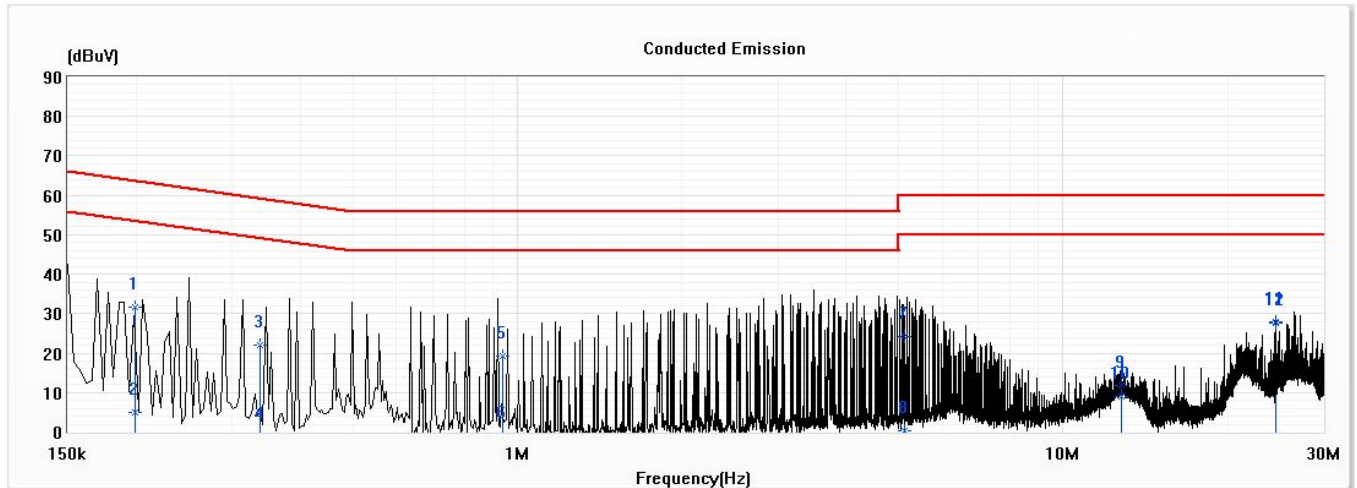


No	Frequency (MHz)	Emission Level (dBμV)	Limit (dBμV)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	0.199	31.78	63.64	-31.86	22.11	9.67	QP
2	0.199	5.01	53.64	-48.62	-4.66	9.67	AV
3	0.337	21.93	59.28	-37.35	12.26	9.67	QP
4	0.337	-1.14	49.28	-50.42	-10.81	9.67	AV
5	0.942	19.27	56.00	-36.73	9.58	9.69	QP
6	0.942	-1.06	46.00	-47.06	-10.75	9.69	AV
7	5.110	24.06	60.00	-35.94	14.24	9.81	QP
8	5.110	0.45	50.00	-49.55	-9.36	9.81	AV
9	12.791	11.76	60.00	-48.24	1.80	9.95	QP
10	12.791	8.98	50.00	-41.02	-0.98	9.95	AV
11	24.577	27.86	60.00	-32.14	17.78	10.08	QP
*12	24.577	27.48	50.00	-22.52	17.40	10.08	AV

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

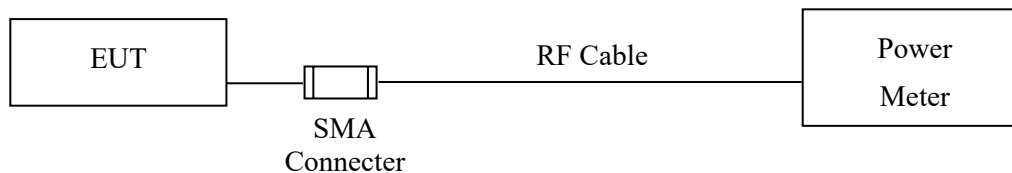

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

Tested according to FHSS test procedure of KDB 558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

3.4. Test Result of Peak Power Output

Product : Portable Computer
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2021/01/15

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	9.95	1 Watt= 30 dBm	Pass
Channel 39	2441.00	10.16	1 Watt= 30 dBm	Pass
Channel 78	2480.00	10.42	1 Watt= 30 dBm	Pass

Product : Portable Computer
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - 2Mbps
Test Date : 2021/01/15

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	9.72	1 Watt= 30 dBm	Pass
Channel 39	2441.00	9.89	1 Watt= 30 dBm	Pass
Channel 78	2480.00	10.07	1 Watt= 30 dBm	Pass


Product : Portable Computer
Test Item : Peak Power Output
Test Mode : Mode 3: Transmit - 3Mbps
Test Date : 2021/01/15

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	9.77	1 Watt= 30 dBm	Pass
Channel 39	2441.00	9.94	1 Watt= 30 dBm	Pass
Channel 78	2480.00	10.13	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

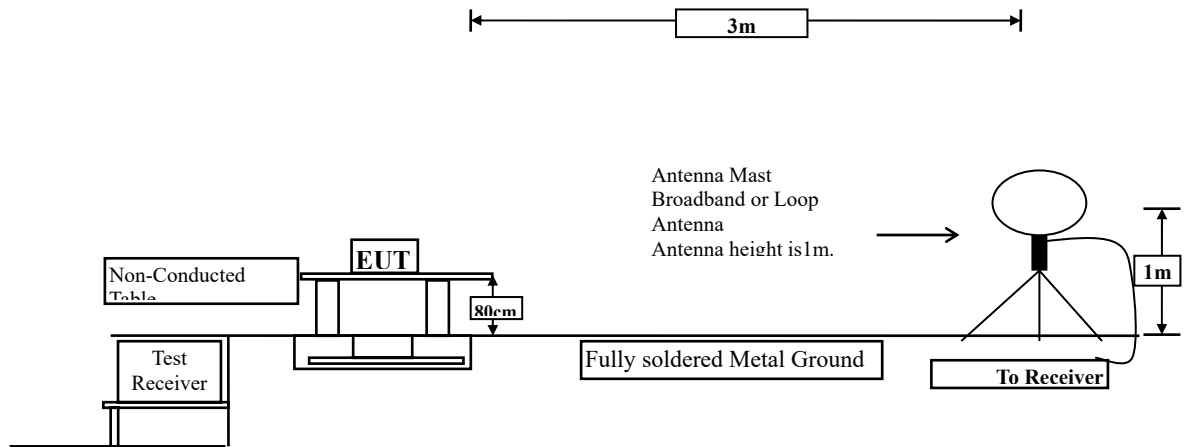

Radiated Emission Below 1GHz

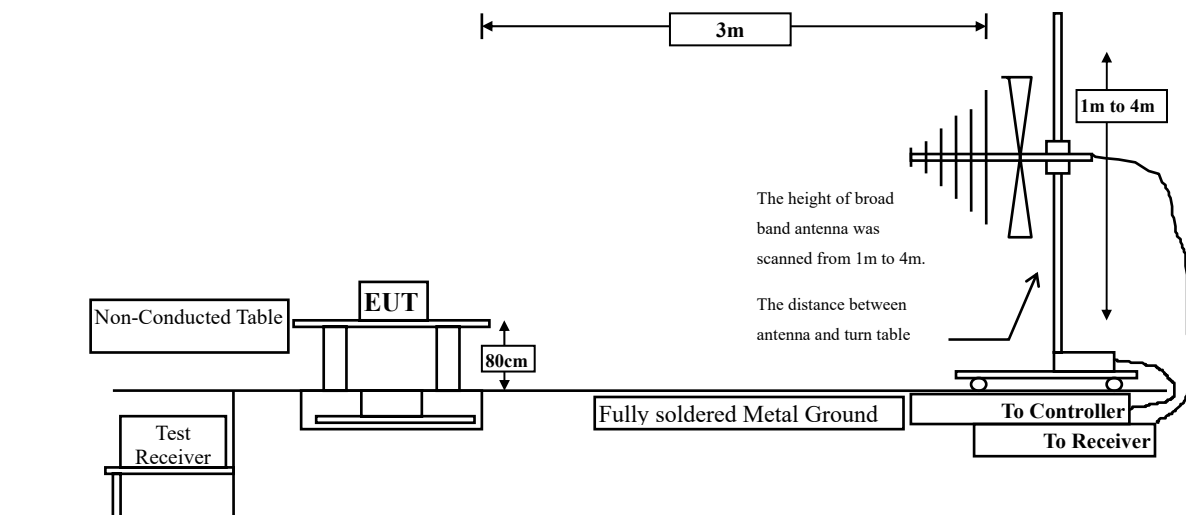

Radiated Emission Above 1GHz

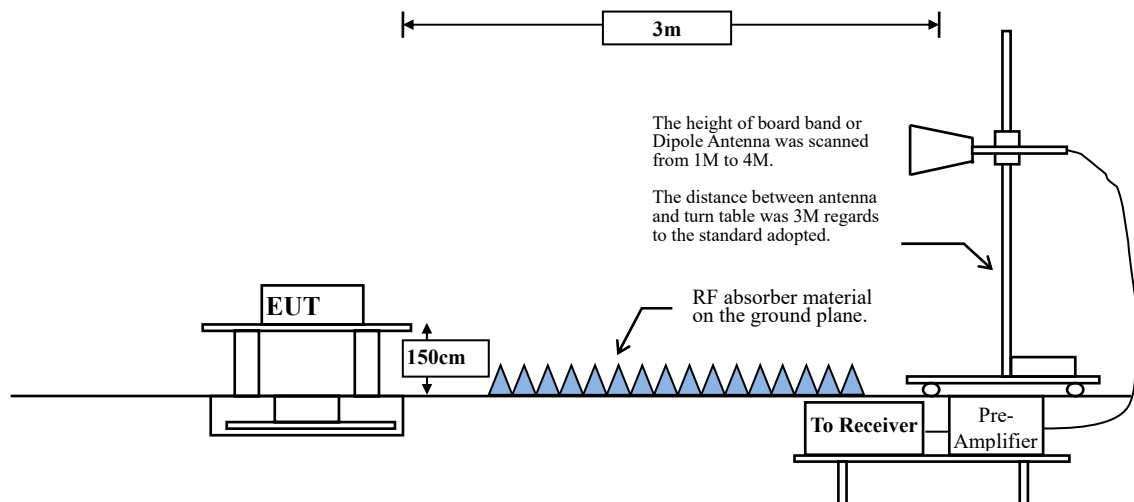

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.


The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

4.4. Test Result of Radiated Emission

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/01/20

Horizontal

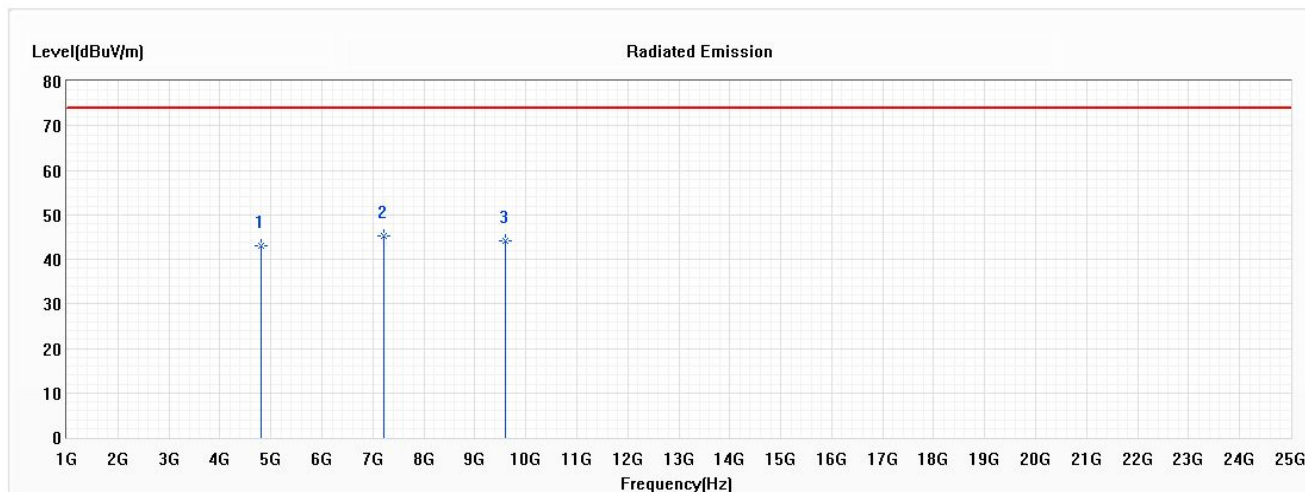

No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4804.000	42.91	74.00	-31.09	45.11	-2.20	PK
* 2	7206.000	45.26	74.00	-28.74	43.99	1.27	PK
3	9608.000	44.11	74.00	-29.89	40.59	3.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/01/20

Vertical

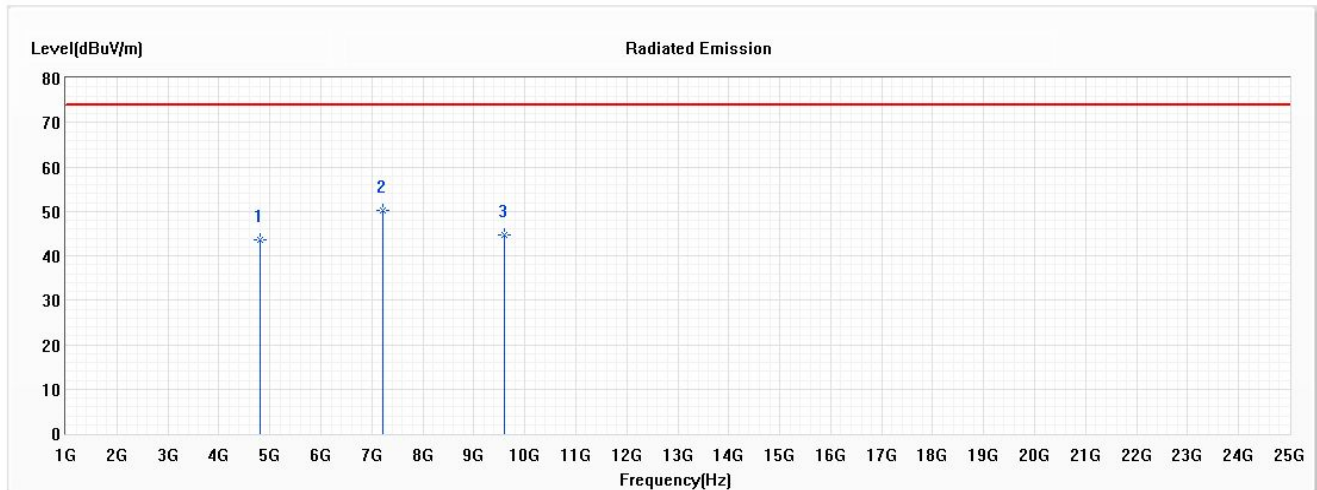

No	Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Reading Level (dB μ V)	Correct Factor (dB)	Detector Type
1	4804.000	43.49	74.00	-30.51	45.69	-2.20	PK
* 2	7206.000	50.18	74.00	-23.82	48.91	1.27	PK
3	9608.000	44.73	74.00	-29.27	41.21	3.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Average Measurement dB μ V/m	Margin dB	Peak Limit dB μ V/m	Average Limit dB μ V/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2021/01/20

Horizontal

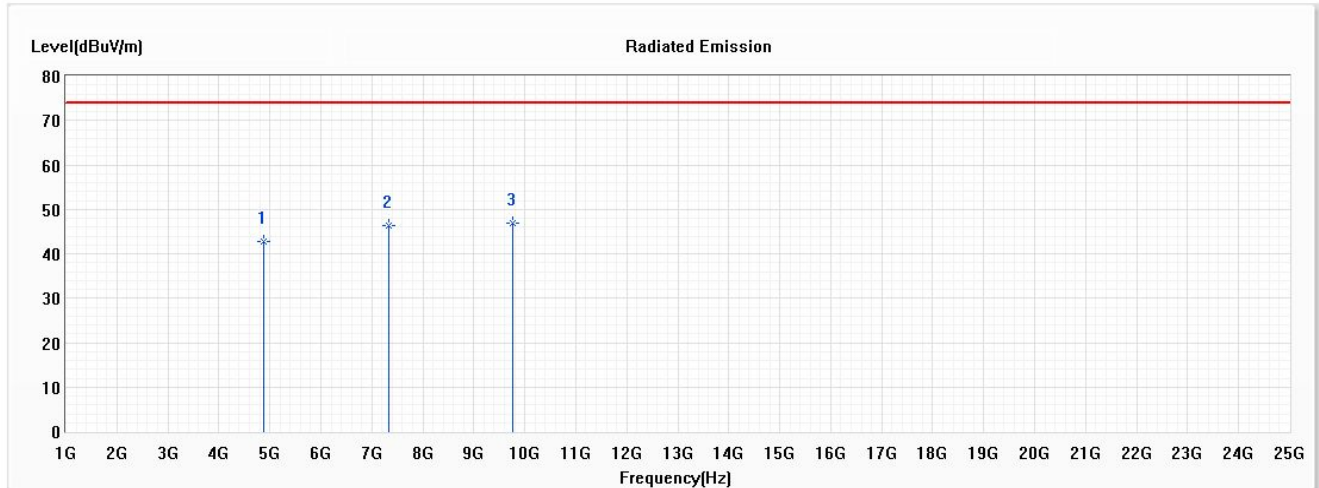

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	42.72	74.00	-31.28	45.01	-2.29	PK
2	7323.000	46.35	74.00	-27.65	45.09	1.26	PK
* 3	9764.000	46.84	74.00	-27.16	43.06	3.78	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2021/01/20

Vertical

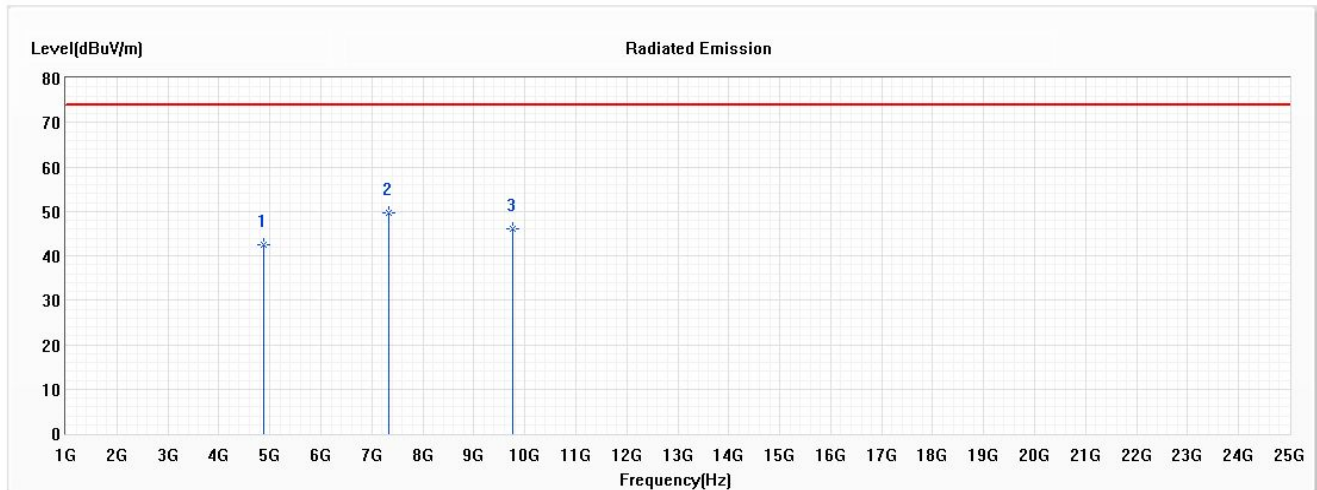

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	42.37	74.00	-31.63	44.66	-2.29	PK
* 2	7323.000	49.65	74.00	-24.35	48.39	1.26	PK
3	9764.000	45.98	74.00	-28.02	42.20	3.78	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Measurement Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
---	---	---	---	---	74.000	54.000


Average Detector:

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/01/20

Horizontal

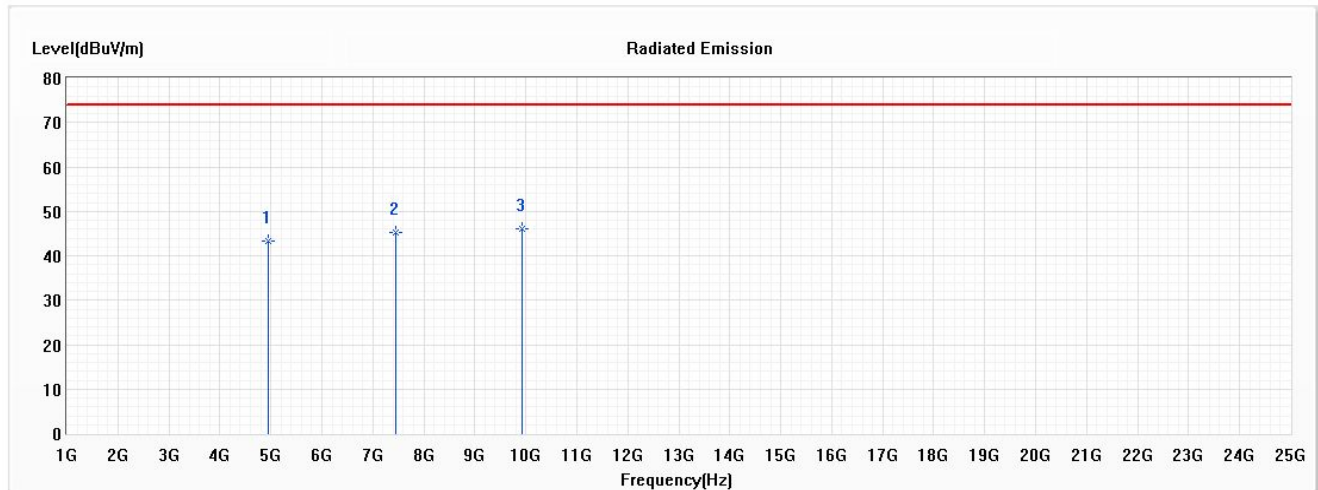

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	43.24	74.00	-30.76	45.33	-2.09	PK
2	7440.000	45.22	74.00	-28.78	43.92	1.30	PK
* 3	9920.000	46.17	74.00	-27.83	42.16	4.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/01/22

Vertical

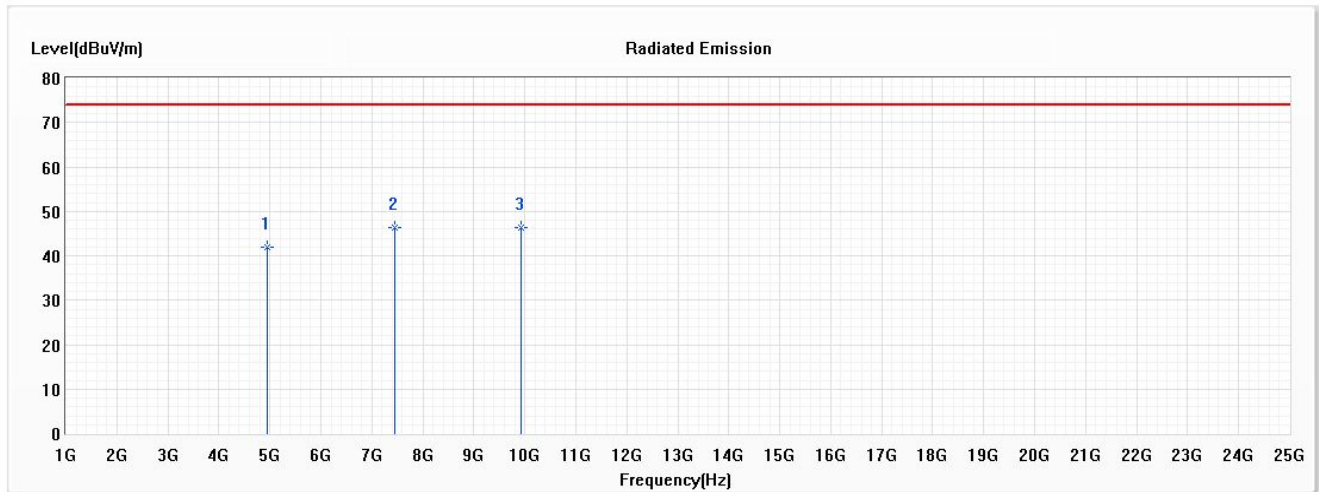

No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4960.000	42.05	74.00	-31.95	44.14	-2.09	PK
2	7440.000	46.33	74.00	-27.67	45.03	1.30	PK
* 3	9920.000	46.38	74.00	-27.62	42.37	4.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
Average Detector:					74.000	54.000
--	--	--	--	--		

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2402MHz)
 Test Date : 2021/01/22

Horizontal

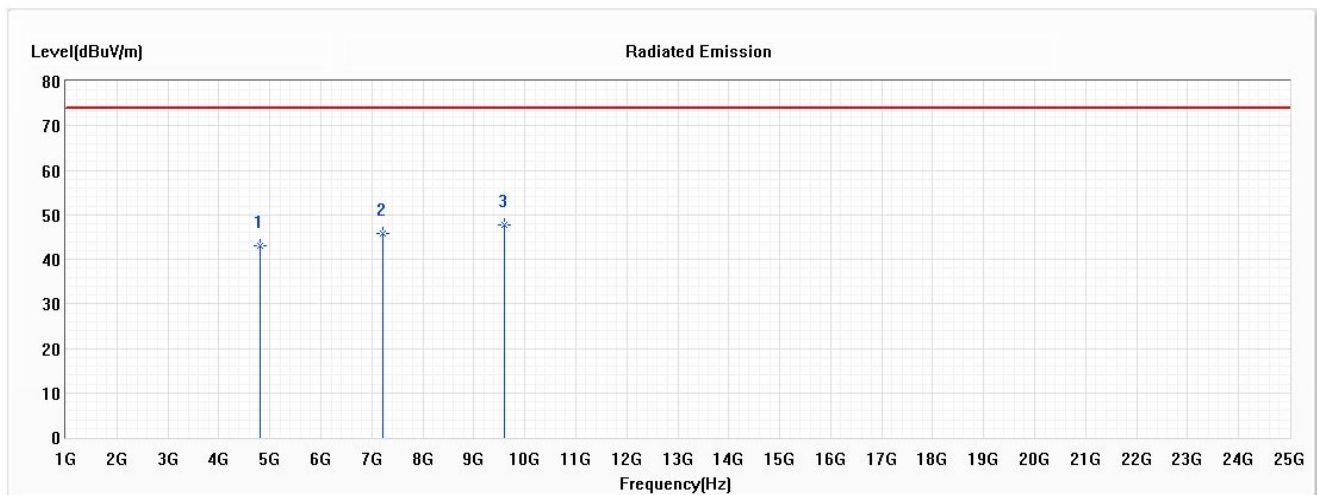

No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4804.000	42.91	74.00	-31.09	45.11	-2.20	PK
2	7206.000	45.88	74.00	-28.12	44.61	1.27	PK
* 3	9608.000	47.75	74.00	-26.25	44.23	3.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2402MHz)
 Test Date : 2021/01/22

Vertical

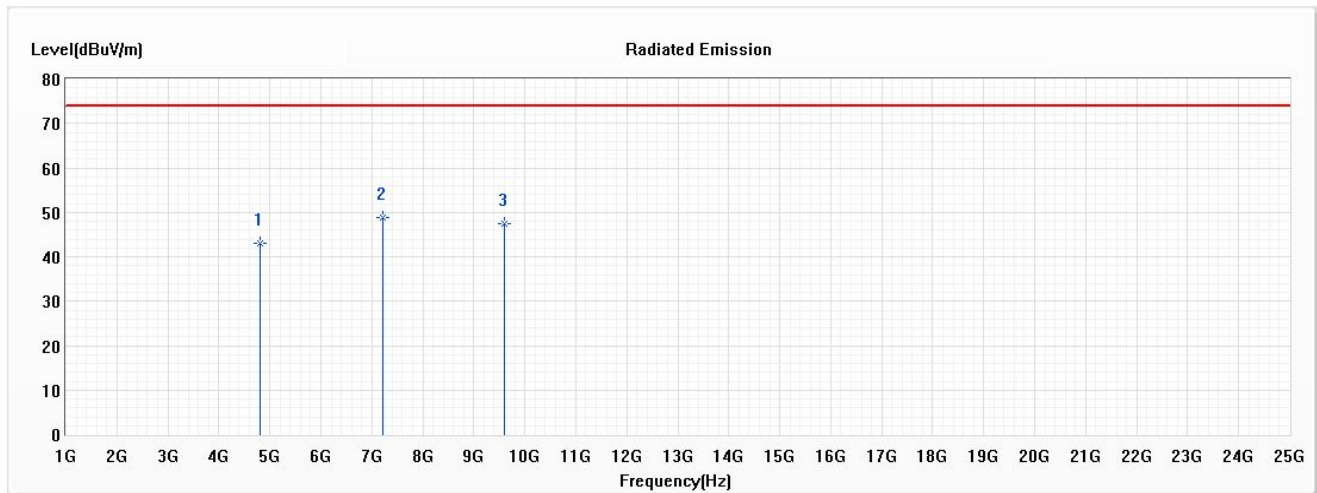

No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4804.000	43.15	74.00	-30.85	45.35	-2.20	PK
* 2	7206.000	48.95	74.00	-25.05	47.68	1.27	PK
3	9608.000	47.43	74.00	-26.57	43.91	3.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2441MHz)
 Test Date : 2021/01/22

Horizontal

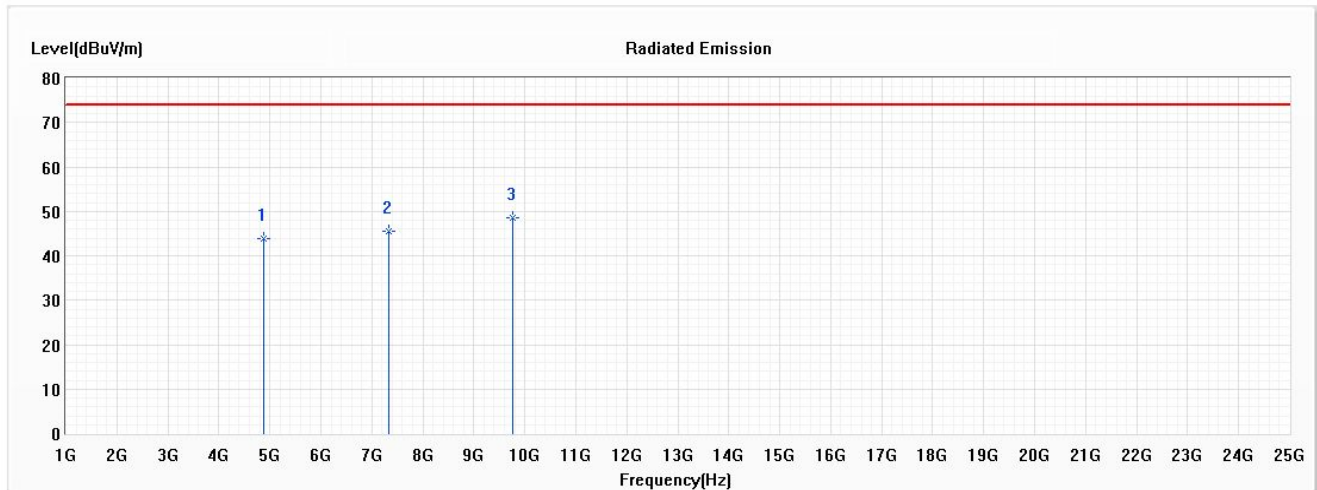

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	43.75	74.00	-30.25	46.04	-2.29	PK
2	7323.000	45.54	74.00	-28.46	44.28	1.26	PK
* 3	9764.000	48.62	74.00	-25.38	44.84	3.78	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2441MHz)
 Test Date : 2021/01/22

Vertical

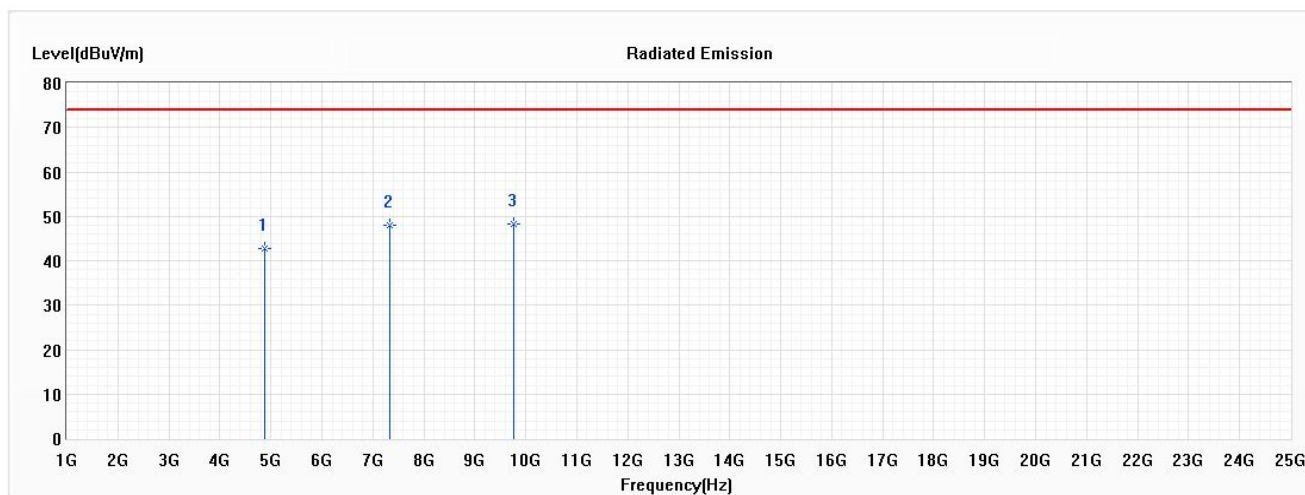

No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4882.000	42.73	74.00	-31.27	45.02	-2.29	PK
2	7323.000	48.13	74.00	-25.87	46.87	1.26	PK
* 3	9764.000	48.39	74.00	-25.61	44.61	3.78	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2480MHz)
 Test Date : 2021/01/22

Horizontal

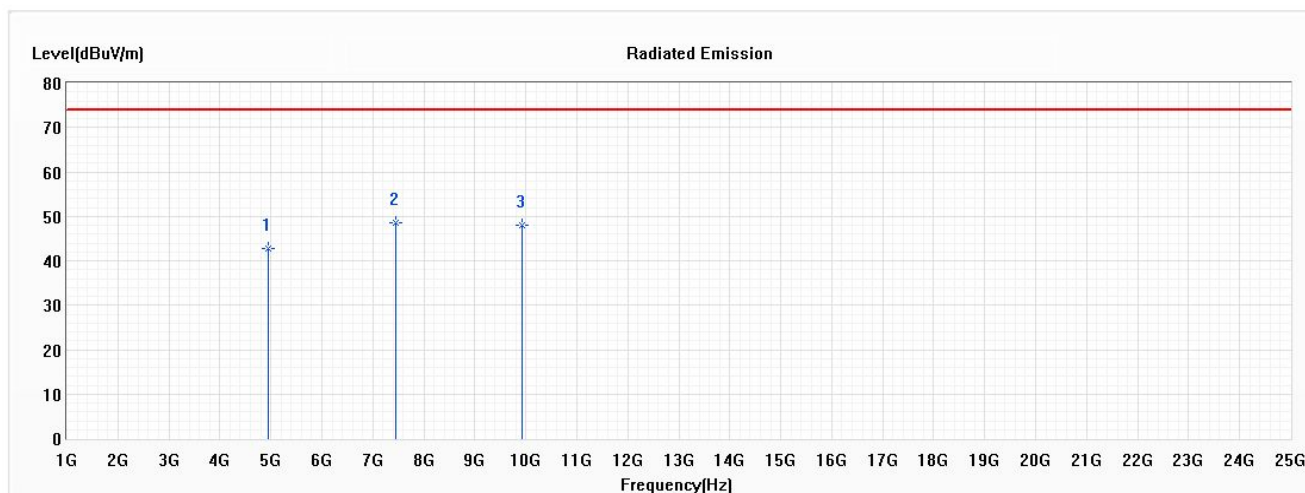

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	42.72	74.00	-31.28	44.81	-2.09	PK
* 2	7440.000	48.52	74.00	-25.48	47.22	1.30	PK
3	9920.000	47.94	74.00	-26.06	43.93	4.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2480MHz)
 Test Date : 2021/01/20

Vertical

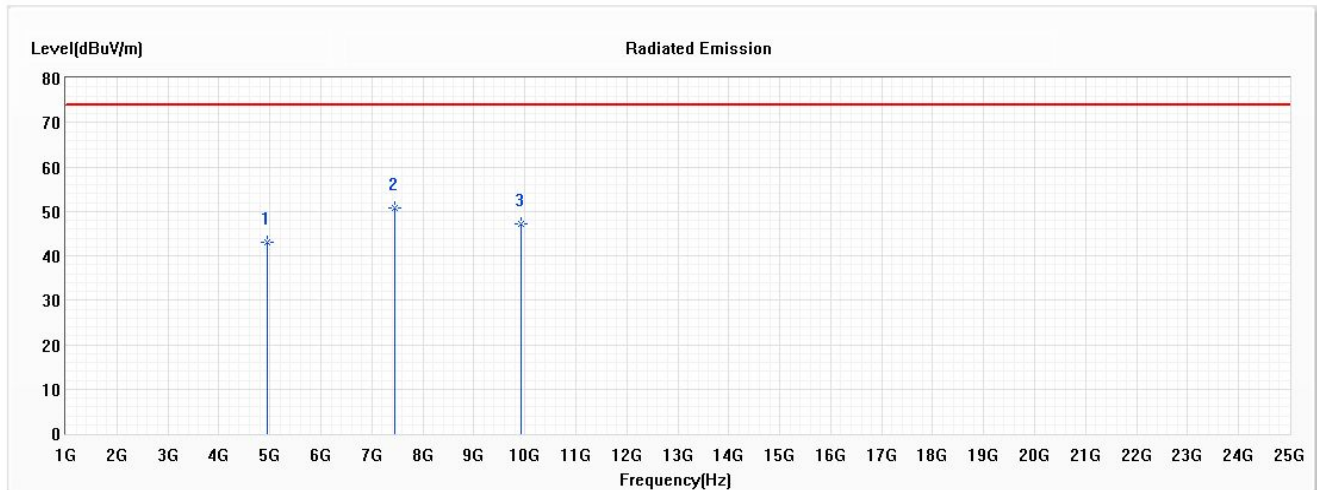

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	43.14	74.00	-30.86	45.23	-2.09	PK
* 2	7440.000	50.87	74.00	-23.13	49.57	1.30	PK
3	9920.000	47.04	74.00	-26.96	43.03	4.01	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Measurement Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
---	---	---	---	---	74.000	54.000


Average Detector:

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/22

Horizontal

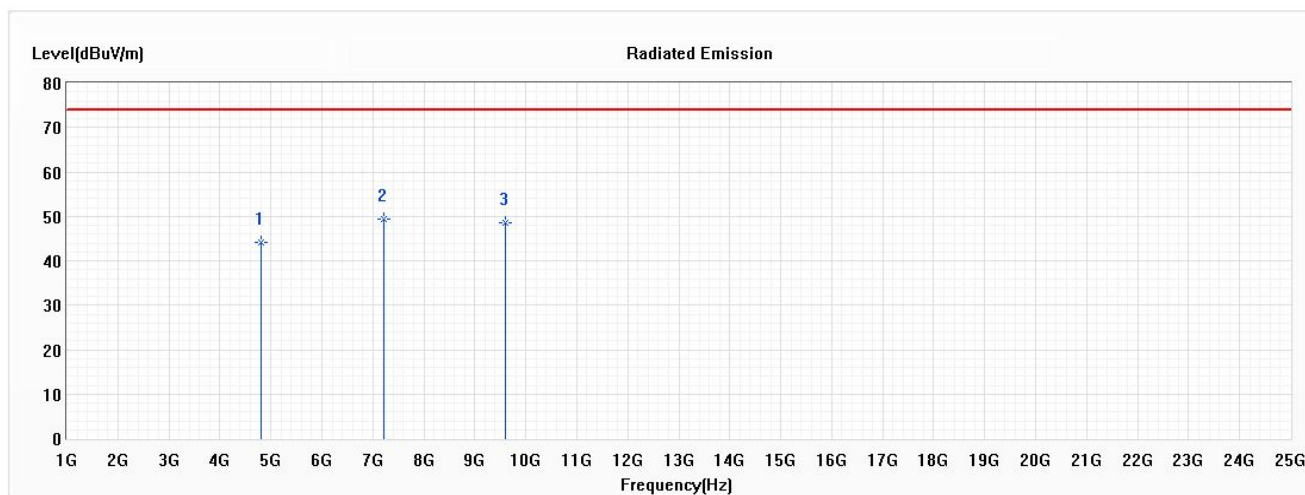

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	44.23	74.00	-29.77	46.43	-2.20	PK
* 2	7206.000	49.49	74.00	-24.51	48.22	1.27	PK
3	9608.000	48.57	74.00	-25.43	45.05	3.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/22

Vertical

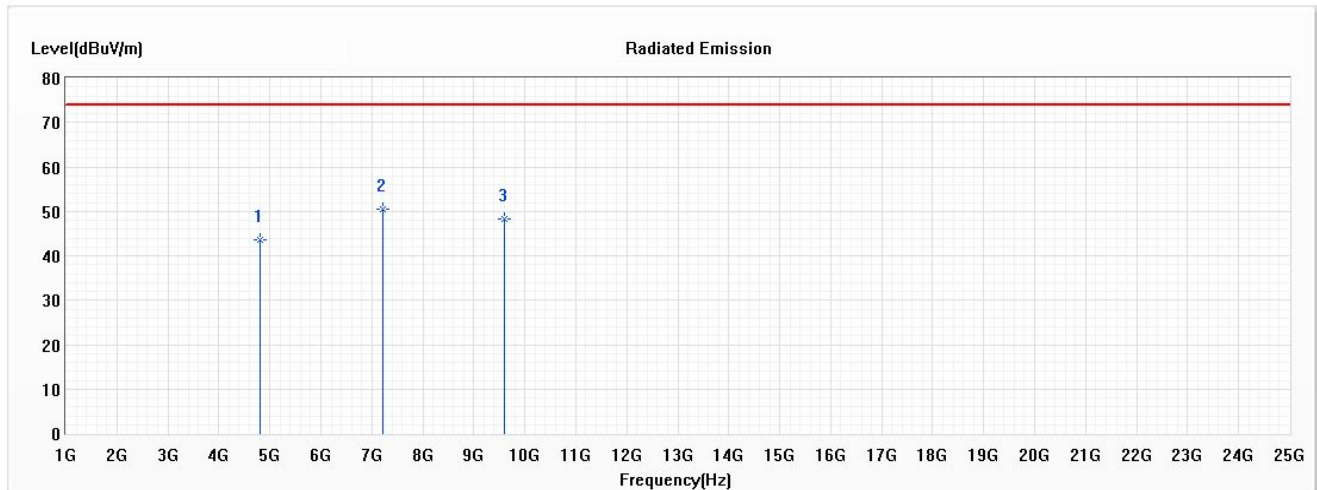

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	43.54	74.00	-30.46	45.74	-2.20	PK
* 2	7206.000	50.39	74.00	-23.61	49.12	1.27	PK
3	9608.000	48.25	74.00	-25.75	44.73	3.52	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/22

Horizontal

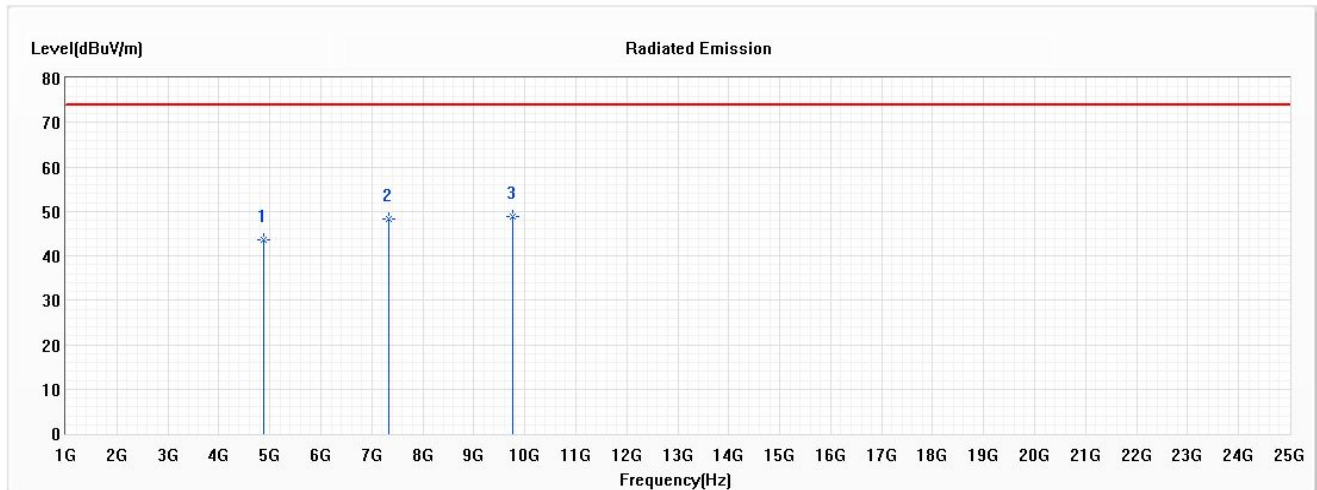

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	43.64	74.00	-30.36	45.93	-2.29	PK
2	7323.000	48.37	74.00	-25.63	47.11	1.26	PK
* 3	9764.000	48.84	74.00	-25.16	45.06	3.78	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/22

Vertical

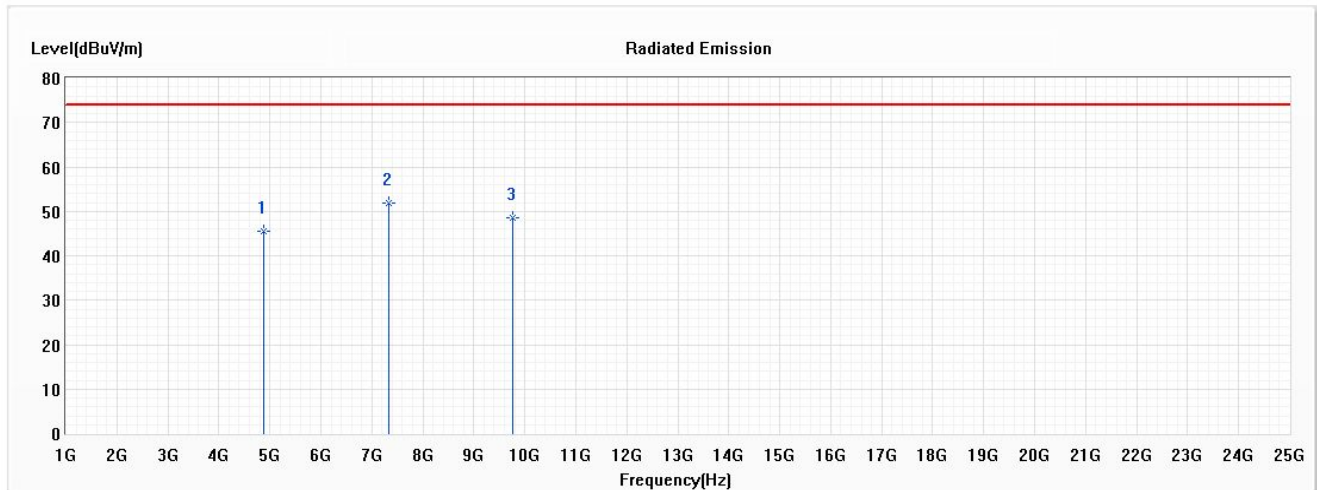

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	45.42	74.00	-28.58	47.71	-2.29	PK
* 2	7323.000	51.82	74.00	-22.18	50.56	1.26	PK
3	9764.000	48.51	74.00	-25.49	44.73	3.78	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Average Measurement dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/22

Horizontal

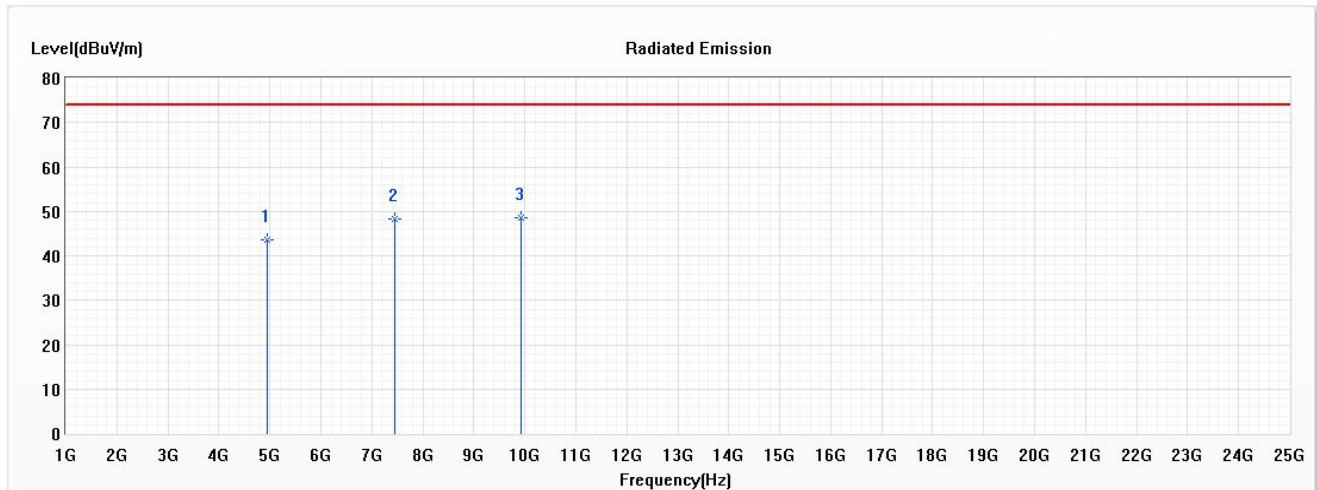

No	Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Reading Level (dB μ V)	Correct Factor (dB)	Detector Type
1	4960.000	43.62	74.00	-30.38	45.71	-2.09	PK
2	7440.000	48.16	74.00	-25.84	46.86	1.30	PK
* 3	9920.000	48.68	74.00	-25.32	44.67	4.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Average Measurement dB μ V/m	Margin dB	Peak Limit dB μ V/m	Average Limit dB μ V/m
Average Detector:						
--	--	--	--	--	74.000	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/22

Vertical

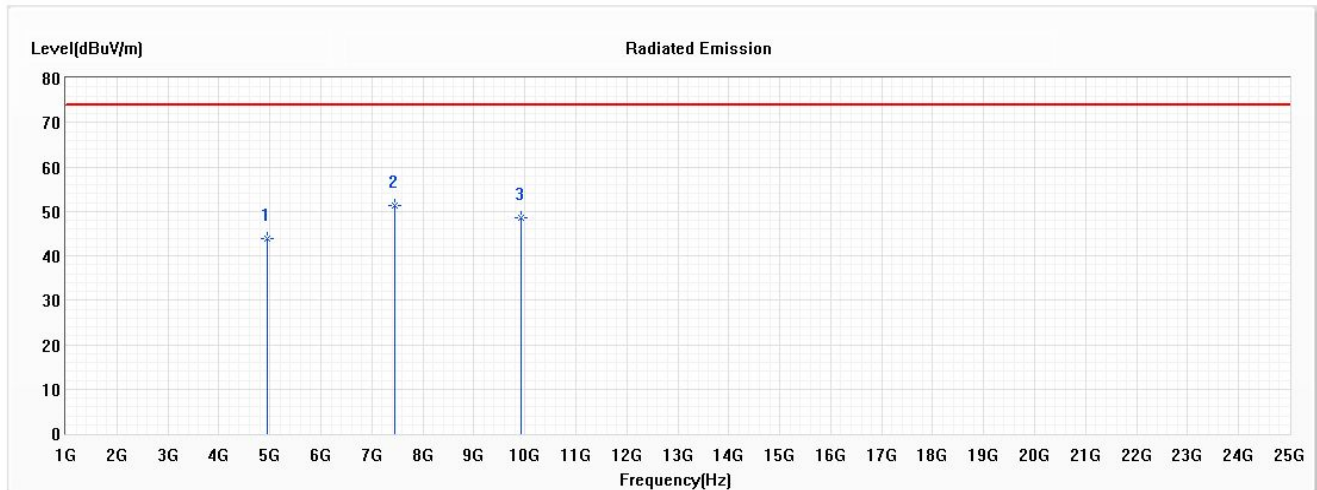

No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	4960.000	43.75	74.00	-30.25	45.84	-2.09	PK
* 2	7440.000	51.42	74.00	-22.58	50.12	1.30	PK
3	9920.000	48.64	74.00	-25.36	44.63	4.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Measurement Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
--	--	--	--	--	74.000	54.000


Average Detector:

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 4.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2021/01/18

Horizontal

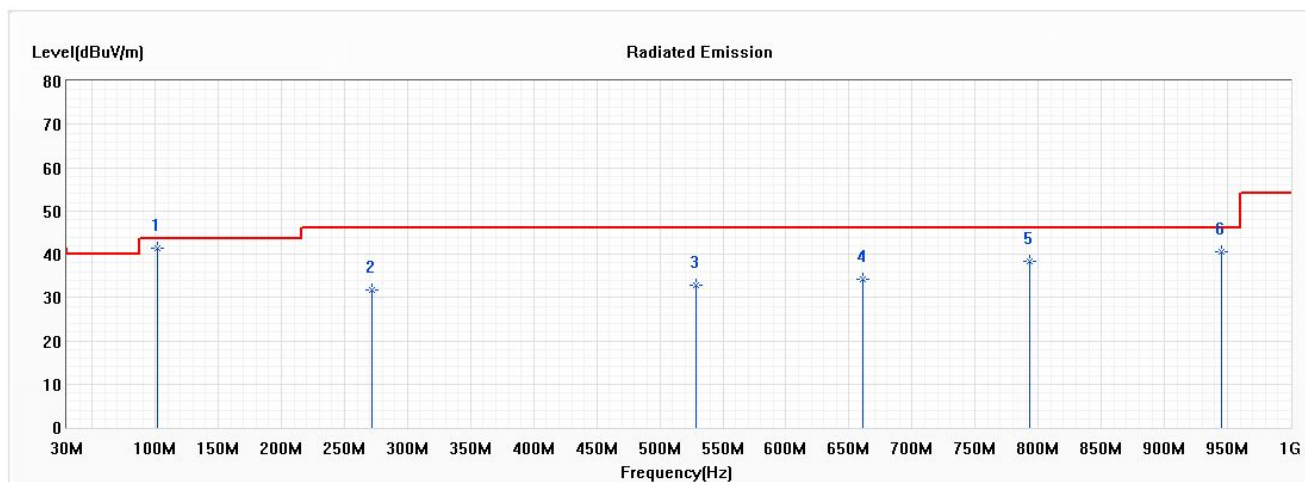


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.32	43.50	-2.18	56.48	-15.16	QP
2	271.797	31.59	46.00	-14.41	42.24	-10.65	QP
3	529.058	32.91	46.00	-13.09	37.66	-4.75	QP
4	661.203	34.26	46.00	-11.74	36.79	-2.53	QP
5	793.348	38.47	46.00	-7.53	38.89	-0.42	QP
6	945.174	40.59	46.00	-5.41	39.09	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2021/01/18

Vertical

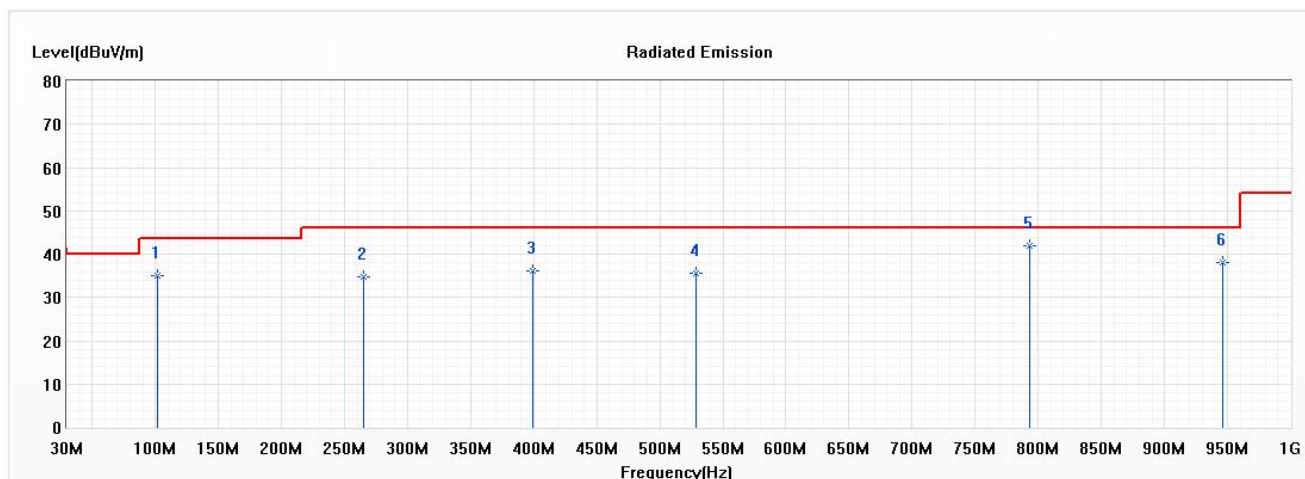


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.10	43.50	-8.40	50.26	-15.16	QP
2	264.768	34.86	46.00	-11.14	45.81	-10.95	QP
3	399.725	36.17	46.00	-9.83	43.47	-7.30	QP
4	529.058	35.63	46.00	-10.37	40.38	-4.75	QP
* 5	793.348	41.89	46.00	-4.11	42.31	-0.42	QP
6	946.580	38.20	46.00	-7.80	36.66	1.54	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2441MHz)
 Test Date : 2021/01/18

Horizontal

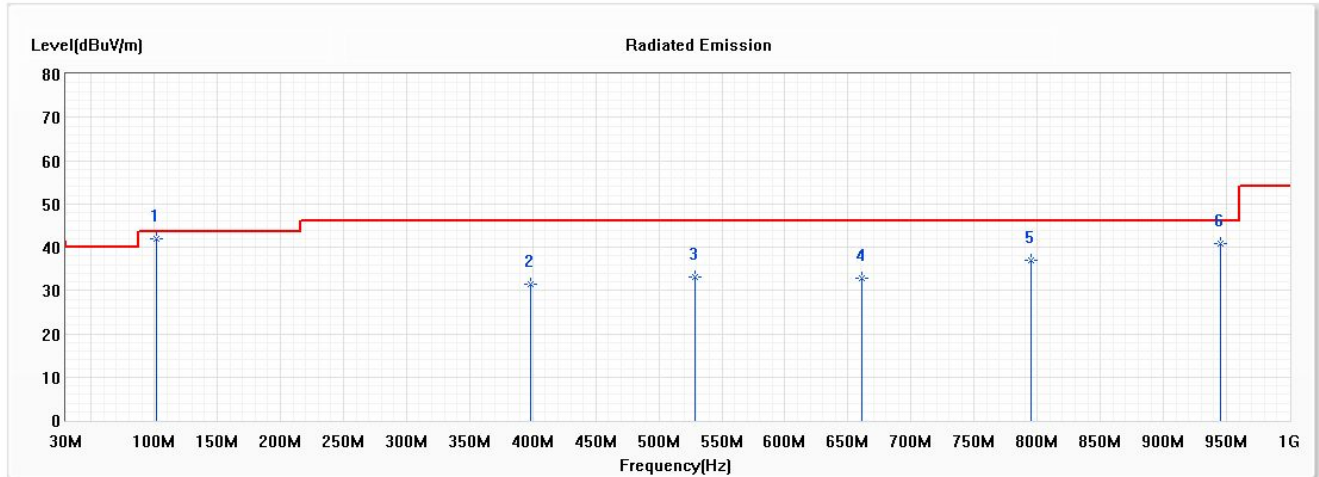


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	41.87	43.50	-1.63	57.03	-15.16	QP
2	398.319	31.57	46.00	-14.43	38.89	-7.32	QP
3	529.058	33.01	46.00	-12.99	37.76	-4.75	QP
4	661.203	32.82	46.00	-13.18	35.35	-2.53	QP
5	794.754	36.94	46.00	-9.06	37.33	-0.39	QP
6	945.174	40.96	46.00	-5.04	39.46	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 2: Transmit - 2Mbps (2441MHz)
 Test Date : 2021/01/18

Vertical

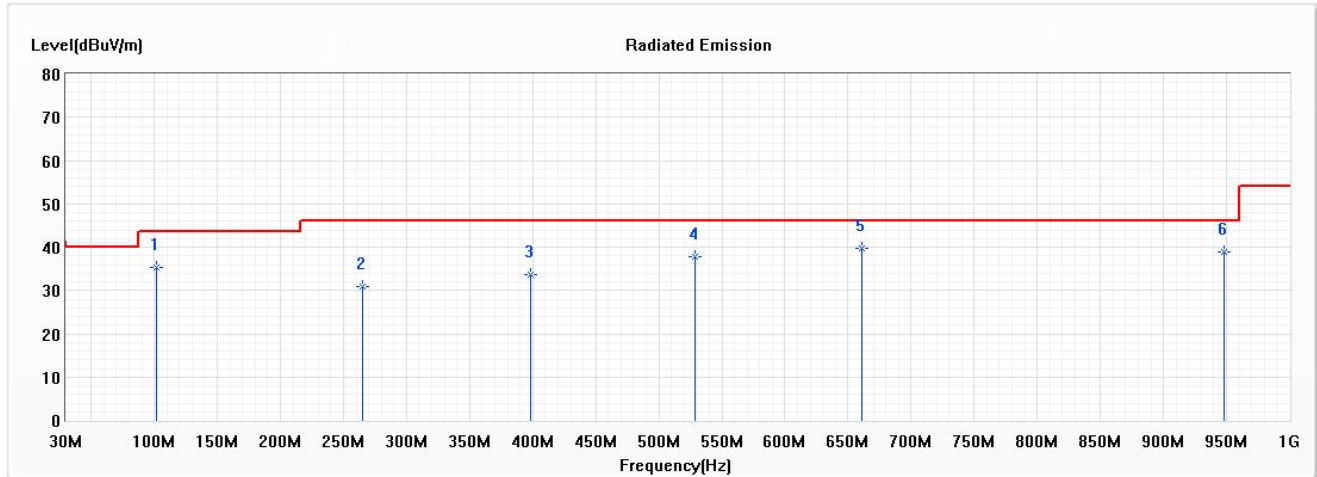


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	101.696	35.34	43.50	-8.16	50.50	-15.16	QP
2	264.768	30.97	46.00	-15.03	41.92	-10.95	QP
3	398.319	33.76	46.00	-12.24	41.08	-7.32	QP
4	529.058	37.78	46.00	-8.22	42.53	-4.75	QP
* 5	661.203	39.81	46.00	-6.19	42.34	-2.53	QP
6	947.986	38.86	46.00	-7.14	37.29	1.57	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/18

Horizontal

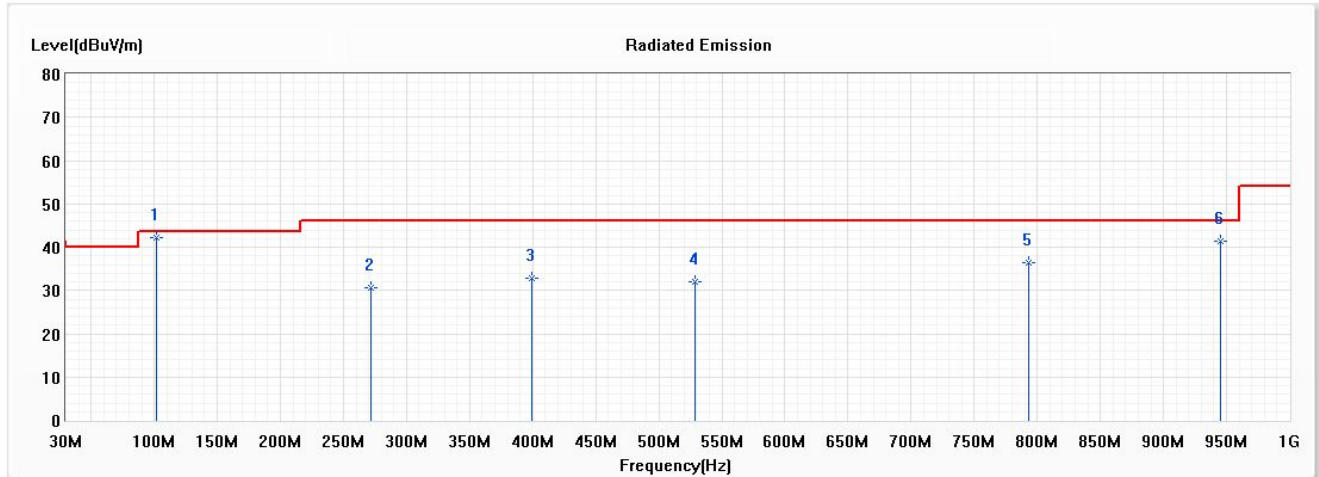


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
* 1	101.696	42.21	43.50	-1.29	57.37	-15.16	QP
2	271.797	30.73	46.00	-15.27	41.38	-10.65	QP
3	399.725	32.95	46.00	-13.05	40.25	-7.30	QP
4	529.058	31.92	46.00	-14.08	36.67	-4.75	QP
5	793.348	36.37	46.00	-9.63	36.79	-0.42	QP
6	945.174	41.39	46.00	-4.61	39.89	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Portable Computer
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/18

Vertical

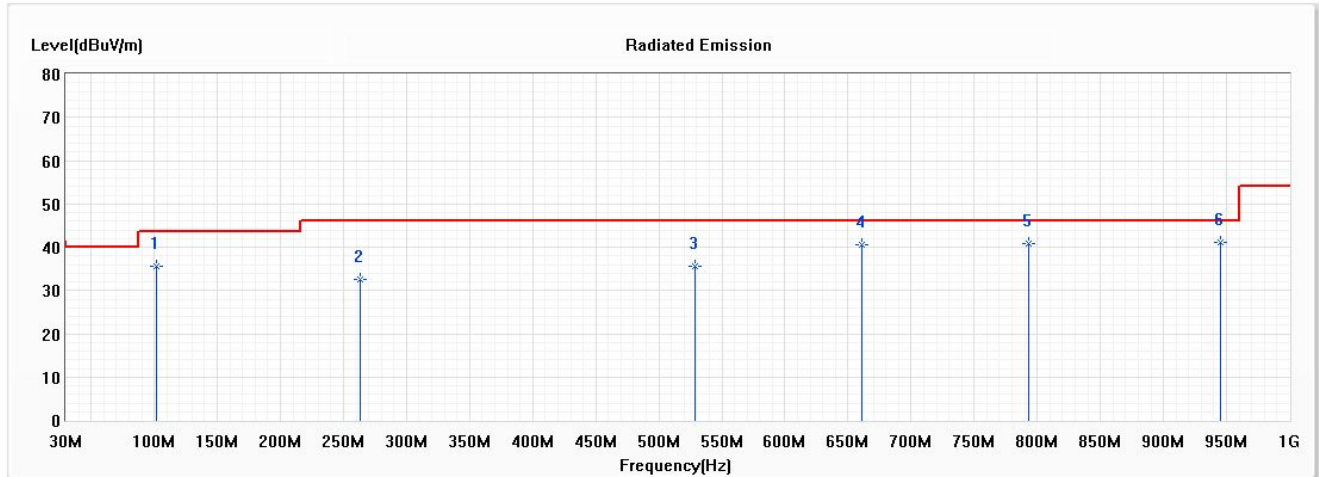


No	Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Reading Level (dBμV)	Correct Factor (dB)	Detector Type
1	101.696	35.61	43.50	-7.89	50.77	-15.16	QP
2	263.362	32.56	46.00	-13.44	43.58	-11.02	QP
3	529.058	35.66	46.00	-10.34	40.41	-4.75	QP
4	661.203	40.61	46.00	-5.39	43.14	-2.53	QP
5	793.348	40.96	46.00	-5.04	41.38	-0.42	QP
* 6	945.174	40.98	46.00	-5.02	39.48	1.50	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


5. Duty Cycle

5.1. Test Setup

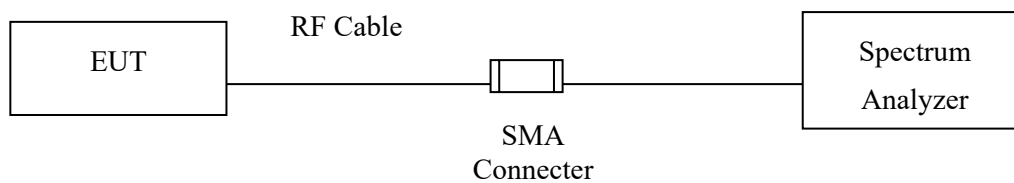

5.2. Test Result of Duty Cycle

Product : Portable Computer
 Test Item : Duty Cycle Data
 Test Mode : Mode 1: Transmit - 1Mbps

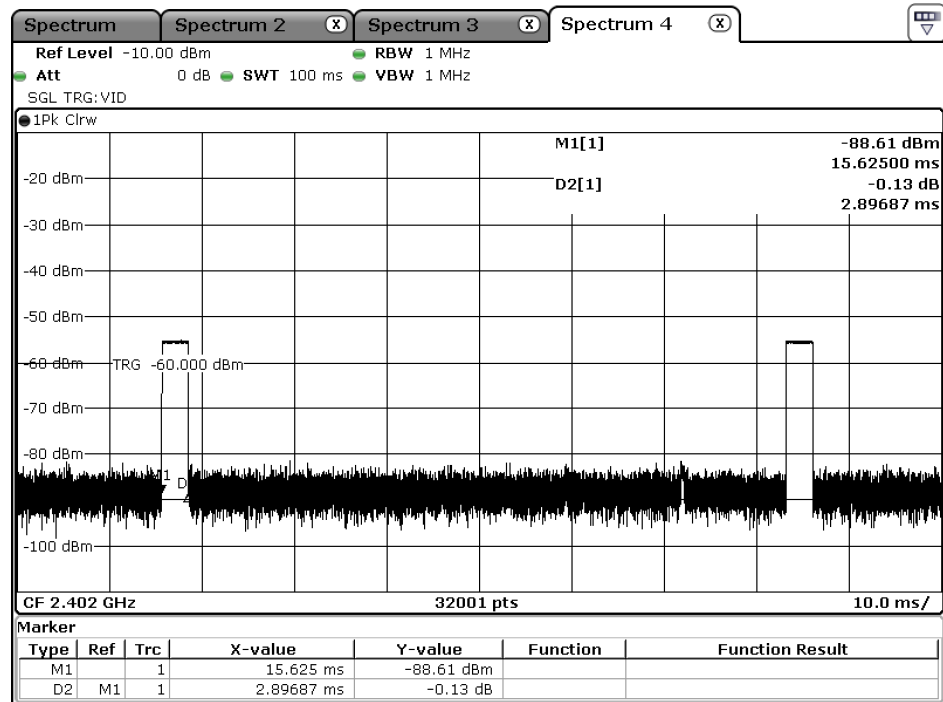

Date: 10.FEB.2021 14:48:40

Time on of 100ms= 2.89ms*2= 5.78ms

Duty Cycle=5.78ms / 100ms= 0.0578

Duty Cycle correction factor= 20 LOG 0.0578= -24.761 dB

Duty Cycle correction factor	-24.761	dB
------------------------------	---------	----

Spectrum **Spectrum 2** **Spectrum 3** **Spectrum 4**

Ref Level -10.00 dBm RBW 1 MHz

Att 0 dB SWT 100 ms VBW 1 MHz

SQL TRG:VID

1Pk Clrw

D2[1] -1.94 dBm
2.89687 ms
M1[1] -86.44 dBm
11.19375 ms


CF 2.402 GHz 32001 pts 10.0 ms/

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	11.19375 ms	-86.44 dBm		
D2	M1	1	2.89687 ms	-1.94 dB		

Duty Cycle correction factor	-24.761	dB
------------------------------	---------	----

Product : Portable Computer
 Test Item : Duty Cycle Data
 Test Mode : Mode 3: Transmit - 3Mbps

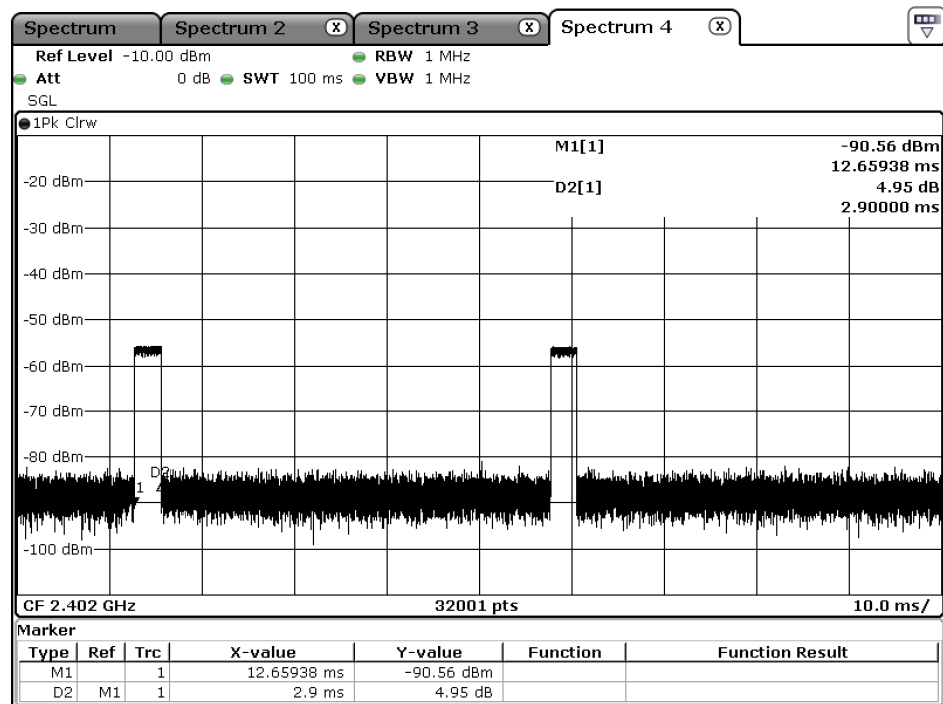

Date: 10.FEB.2021 14:53:26

Time on of 100ms= 2.9ms*2= 5.8ms

Duty Cycle=5.8ms / 100ms= 0.058

Duty Cycle correction factor= 20 LOG 0.058= -24.731 dB

Duty Cycle correction factor	-24.731	dB
------------------------------	---------	----

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.