

FCC Test Report

Report No.: AGC16084231004FR01

FCC ID : 2BCZK-JJ10508

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Jimmyjane round remote

BRAND NAME : Jimmyjane

JJ10508, JJ10850, JJ10851, JJ10705, JJ10705, JJ10550,

MODEL NAME : JJ10603, JJ10703, JJ10514, JJ10513, JJ10505, JJ10852,

JJ10853, JJ10854, JJ10855, JJ10704

APPLICANT: Jimmyjane

DATE OF ISSUE : Nov. 06, 2023

STANDARD(S) : FCC Part 15 Subpart C §15.231

REPORT VERSION :

Attestation of Global Compliance (Shenzhen) Co., Ltd.



Page 2 of 32


REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 06, 2023	Valid	Initial Release




TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	6
2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.4 TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
2.7 ANTENNA REQUIREMENT	7
3. TEST ENVIRONMENT	8
3.1 ADDRESS OF THE TEST LABORATORY	8
3.2 TEST FACILITY	8
3.3 ENVIRONMENTAL CONDITIONS	g
3.4 MEASUREMENT UNCERTAINTY	g
3.5 LIST OF EQUIPMENTS USED	10
4.SYSTEM TEST CONFIGURATION	12
4.1 EUT CONFIGURATION	12
4.2 EUT EXERCISE	12
4.3 CONFIGURATION OF TESTED SYSTEM	12
4.4 EQUIPMENT USED IN TESTED SYSTEM	12
4.5 SUMMARY OF TEST RESULTS	13
5. DESCRIPTION OF TEST MODES	14
6. PROVISION FOR MOMENTARY OPERATION	15
6.1 PROVISIONS APPLICABLE	15
6.2 MEASUREMENT PROCEDURE	15
6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	15
6.4 MEASUREMENT RESULTS	16
7. DUTY CYCLE CORRECTION FACTOR	17
7.1 PROVISIONS APPLICABLE	17
7.2 MEASUREMENT PROCEDURE	17
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	17
7.4 MEASUREMENT RESULTS	17
8. 20 DB BANDWIDTH	20
8.1 PROVISIONS APPLICABLE	20
8.2 MEASUREMENT PROCEDURE. Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated T	20 esting/Inspection





8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	20
7.4 MEASUREMENT RESULTS	21
7. RADIATED EMISSION	22
7.1 LIMITS OF RADIATED EMISSION TEST	22
7.2 MEASUREMENT PROCEDURE	23
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	25
7.4 MEASUREMENT RESULT	26
8. AC LINE CONDUCTED EMISSION TEST	30
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	30
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	30
8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	31
8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	31
8.5 MEASUREMENT RESULTS	31
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	32
APPENDIX II: PHOTOGRAPHS OF TEST EUT	32





1. GENERAL INFORMATION

Applicant	Jimmyjane
Address	
	8501 Fallbrook Ave Suite #370, West Hills, CA 91304, United States
Manufacturer	Jimmyjane
Address	8501 Fallbrook Ave Suite #370, West Hills, CA 91304, United States
Factory	Jimmyjane
Address	8501 Fallbrook Ave Suite #370, West Hills, CA 91304, United States
Product Designation	Jimmyjane round remote
Brand Name	Jimmyjane
Test Model	JJ10508
Series Model(s)	JJ10850, JJ10851, JJ10705, JJ10705, JJ10550, JJ10603, JJ10703, JJ10514,
Control Wicdon(o)	JJ10513, JJ10505, JJ10852, JJ10853, JJ10854, JJ10855, JJ10704
Difference Description	All the series models are the same as the test model except for the model names.
Deviation from Standard	No any deviation from the test method
Date of Receipt	Oct. 24, 2023
Date of Test	Oct. 24, 2023 – Nov. 03, 2023
Test Result	Pass
Test Report Form No	AGCTR-ER-FCC-SRDV1.0

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Cocili	
	Cici Li (Project Engineer)	Nov. 06, 2023
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Nov. 06, 2023
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Nov. 06, 2023



Page 6 of 32

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	V1.0
Software Version	V1.0
Operation Frequency	433.92MHz
Modulation Type	ASK
Number of channels	1
Field Strength of Fundamental	68.66dBµV/m(Peak)@3m 61.40dBµV/m(Average)@3m
Antenna Designation	Monopole Antenna
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery

2.2 TEST FREQUENCY LIST

Frequency Band	Channel Number	Frequency	
	01	433.92 MHz	

Note: According to manufacturer's requirements, periodic operation in the band 40.66-40.70 MHz and above 70 MHz.



Page 7 of 32

2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: 2BCZK-JJ10508, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0dBi.



Page 8 of 32

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 32


3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS				
Temperature range (°C)	15 - 35	-20 - 50				
Relative humidty range	20 % - 75 %	20 % - 75 %				
Pressure range (kPa)	86 - 106	86 - 106				
Power supply	3.7V	3.33V - 4.07V				
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.						

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$






3.5 LIST OF EQUIPMENTS USED

• R	RF Conducted Test System						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31
	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08

A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024/06/02	





• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
	AGC-EM-S004	RE Test System	FARA	EZ-EMC	Ver.RA-03A			
	AGC-ER-S012	BT/WIFI-Test System	Tonscend	JS1120-2	2.6			
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



Page 12 of 32

4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Radiate	d Emission Configu	re:
	EUT	

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable				
1	-	-	-	-	-				
	☐ Test Accessories Come From The Manufacturer								

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	-	-	1	-	-



Page 13 of 32

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.231(a)	Transmission Time (Activated automatically)	Pass
3	§15.231	Field Strength of Fundamental	Pass
4	§15.209	Radiated Emission	Pass
5	§15.205(a)	Restricted Bands of Operation	Pass
6	§15.231(c)	20dB Bandwidth	Pass
7	§15.207	AC Power Line Conducted Emission	N/A

Note: 1.N/A means not applicable

Note: 2.The SRD function cannot transmit when charging and does not require evaluation of AC Power Line Conducted Emission.



Page 14 of 32

5. DESCRIPTION OF TEST MODES

Summary table of Test Cases				
	Data Rate / Modulation			
Test Item	Short-range equipment / ASK			
Radiated&Conducted Test Cases	Mode 1: Tx _433.92 MHz			
AC Conducted Emission	N/A			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



6. PROVISION FOR MOMENTARY OPERATION


6.1 PROVISIONS APPLICABLE


\boxtimes	(1)	A manually operated transmitter shall employ a switch that will automatically deactivate the
		transmitter within not more than 5 seconds of being released.
	(2)	A transmitter activated automatically shall cease transmission within 5 seconds after activation.
	(3)	Periodic transmissions at regular predetermined intervals are not permitted.
		However, polling or supervision transmissions, including data, to determine system integrity of
		transmitters used in security or safety applications are allowed if the total duration of transmissions
		does not exceed more than two seconds per hour for each transmitter. There is no limit on the
		number of individual transmissions, provided the total transmission time does not exceed two
		seconds per hour.
	(4)	Intentional radiators which are employed for radio control purposes during emergencies
		involving fire, security, and safety of life, when activated to signal an alarm, may operate during the
		pendency of the alarm condition.
	(5)	Transmission of set-up information for security systems may exceed the transmission duration
		limits in (1) and (2) above, provided such transmission are under the control of a professional
		installer and do not exceed ten seconds after a manually operated switch is released or a transmitter
		is activated automatically. Such set-up information may include data.

6.2 MEASUREMENT PROCEDURE

- 1. Set the parameters of SPA as below:
- 2. Centre frequency = Operation Frequency
- 3. RBW=1MHz, VBW=3MHz Span: 0Hz Sweep time: 10S
- 4. Set the EUT to transmit by manually operated. Use the "View" function of SPA to find the transmission time of being released.
- 5. Record the data and Reported.

6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

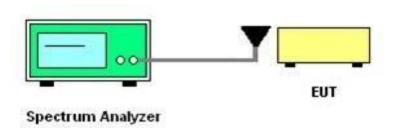





6.4 MEASUREMENT RESULTS

Test Mode	Test Channel (MHz)	The time of stopping transmission after automatically activation by alarm sensor (s)	Limits	Pass or Fail
ASK	433.92	0.24	5s	Pass

Test Graphs Of Launch Operation Time Center Freq 433.920000 MHz
PNO: Fast FGain:Low Avg Type: Log-Pwr Avg|Hold: 3/100 Frequency Trig: Free Run Atten: 30 dB **Auto Tune** ΔMkr1 240.0 ms -0.001 dE Ref 20.00 dBm Center Freq 433 920000 MHz Start Freq 433.920000 MHz Stop Freq 433.920000 MHz Center 433.920000 MHz Res BW 1.0 MHz Span 0 Hz Sweep 10.00 s (1001 pts) **CF Step** 1.000000 MHz VBW 3.0 MHz Man FUNCTION -0.001 dB 14.017 dBm Freq Offset Scale Type Log <u>Lin</u>



Page 17 of 32

7. DUTY CYCLE CORRECTION FACTOR

7.1 PROVISIONS APPLICABLE

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

7.2 MEASUREMENT PROCEDURE

After the antenna of the EUT is connected, the output signal of the EUT is received by the connected test

To the spectrum analyzer. Set the center frequency to the actual working frequency of the EUT, and then set the spectrum analyzer to Zero Span for

Release time reading. During the test, the switch is released and the EUT is automatically closed

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency


RBW=1MHz, VBW=3MHz

Span: 0Hz

Sweep time: more than two pulse trains or more than each type of pulse occupancy time

- 2. Set the EUT to transmit by manually operated. Use the "Delta mark" function of SPA to find the period time between two pulse trains and each type of pulse occupancy time.
- 3. Record the plots and Reported.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

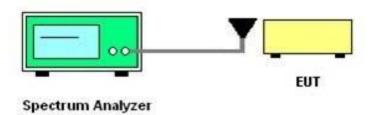


7.4 MEASUREMENT RESULTS

Type of Pules	Width of Pules (ms)	Quantity of Pules (pcs)	Transmission Time (ms)	Total Time (Ton) (ms)
Pules 1	1.02	8	8.16	11.58
Pules 2	0.38	9	3.42	11.56

Test Period (Tp)	Total Time (Ton)	Duty Cycle	Duty Cycle Correction Factor
(ms)	(ms) `	(%)	(dB)
26.70	11.58	43.37	-7.26


NOTE 1: Duty Cycle Factor=20 log (Duty Cycle) =-7.26


NOTE 2: The maximum reference value of the test cycle is 100ms.






Test Graphs of Test Period

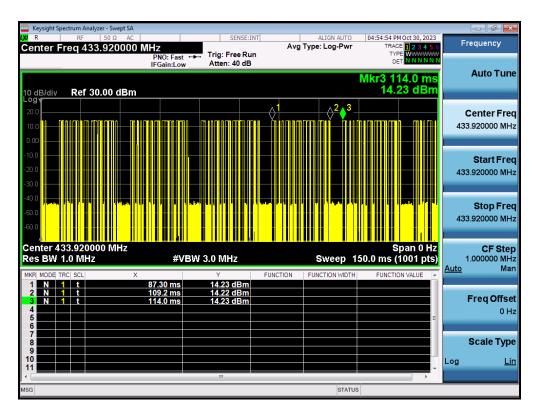

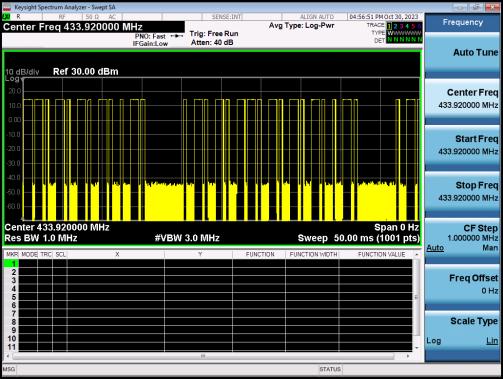



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





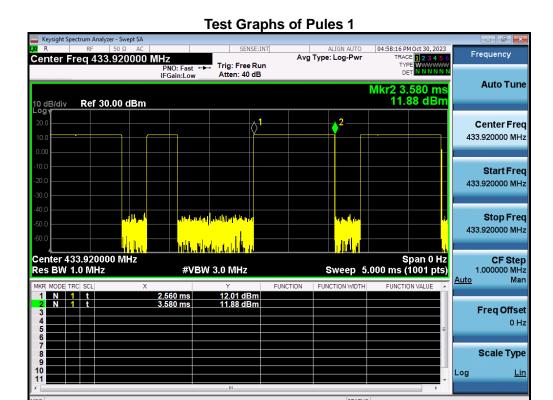

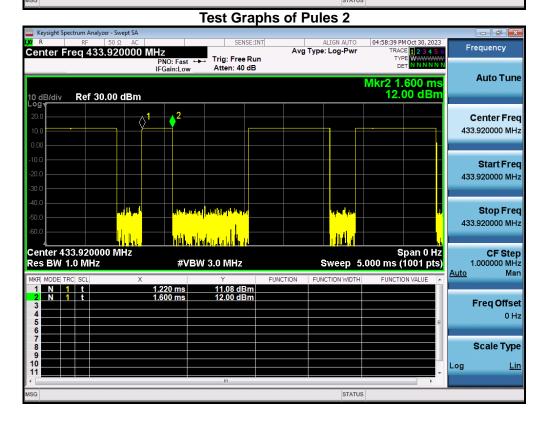



Page 20 of 32

8. 20 dB BANDWIDTH

8.1 PROVISIONS APPLICABLE

According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier

8.2 MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency

RBW=0.3kHz


VBW=1.0kHz


Span: 100kHz

Sweep time: Auto

- 2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 3. Record the plots and Reported.

8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

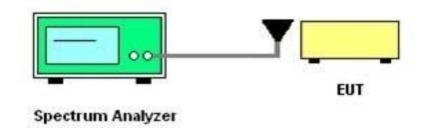






7.4 MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (MHz)	Pass or Fail	
ASK	433.92	22.854	8.267	1.0848	Pass	

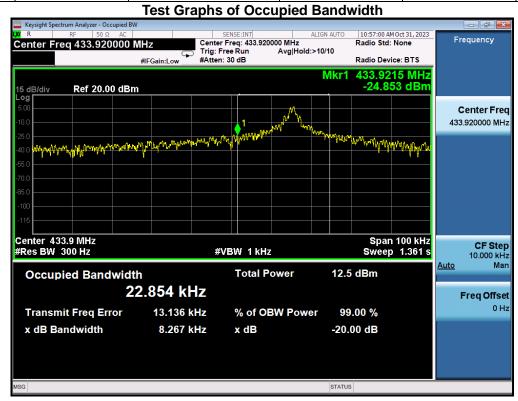



Page 22 of 32

7. RADIATED EMISSION

7.1 LIMITS OF RADIATED EMISSION TEST

15.209 Limit in the below table has to be followed:

Frequency	Distance	Field Strengths Limit					
(MHz)	Meters	μ V/m	dB(μV)/m				
0.009 ~ 0.490	300	2400/F(kHz)					
0.490 ~ 1.705	30	24000/F(kHz)					
1.705 ~ 30	30	30					
30 ~ 88	3	100	40.0				
88 ~ 216	3	150	43.5				
216 ~ 960	3	200	46.0				
960 ~ 1000	3	500	54.0				
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)					

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

15.231(b) Limit in the below table has to be followed:

Fundamental Frequency	Field Strength of Fundamental (microvolts/meter)	Field Strength of Harmonics (microvolts/meter)		
40.66-40.70MHz	2250	225		
70-130MHz	1250	125		
130-174MHz	1250 to 3750	125 to 375		
174-260MHz	3750	375		
260-470MHz	3750 to 12500	375 to 1250		
Above 470MHz	12500	1250		



Page 23 of 32

15.231(e) Limit in the below table has to be followed:

Fundamental Frequency	Field Strength of Fundamental (microvolts/meter)	Field Strength of Harmonics (microvolts/meter)		
40.66-40.70MHz	1000	225		
70-130MHz	1250	125		
130-174MHz	1250 to 3750	125 to 375		
174-260MHz	3750	375		
260-470MHz	3750 to 12500	375 to 1250		
Above 470MHz	12500	1250		

7.2 MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not

Any reparted and an argunowill be repeated and by one using the quasi-peat method for belowed the resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC16084231004FR01 Page 24 of 32


9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Ave


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP






7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

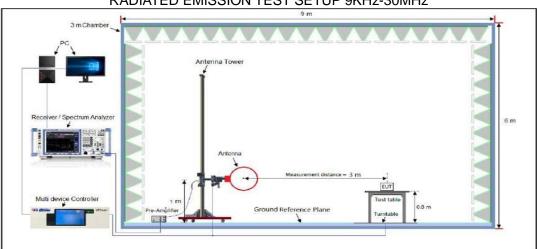

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

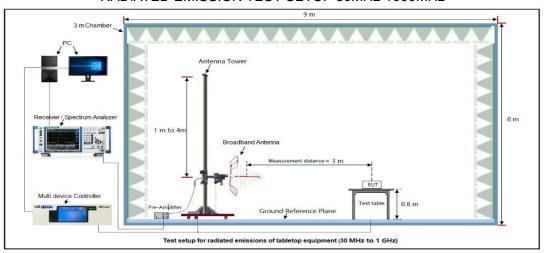


RADIATED EMISSION TEST SETUP ABOVE 1000MHz

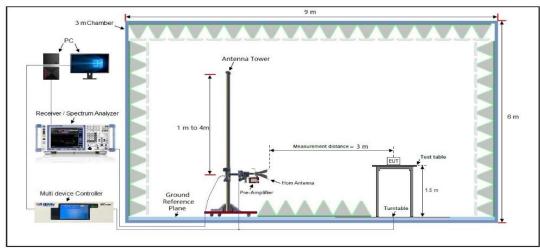

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



JJ10508



EUT

7.4 MEASUREMENT RESULT

RADIATED EMISSION BELOW 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

RADIATED EMISSION FROM 30MHz ~1000MHz

Jimmviane round remote


Model Name

EUI		Jim	Jimmyjane round remote		Wodel	wodel Name		JJ10508	
Tem	perature	22.	22.9° C		Relati	Relative Humidity		59.2%	
Pres	sure	960)hPa		Test V	Test Voltage		Voltage	
Test	Mode	Мо	de 1		Anten	na	Horizont	tal	
	82.0 dBu	V/m							
32.0 dBuV/m Limit: Margin: 42						6X			
	2.0								
Susp	30.000 Dected Data		Detection	(MHz	:) 3	300 400 500	600 700	1000.000	
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	40.1347	20.73	13.89	40.00	-19.27	150	359	Horizontal	
2	112.9196	22.06	16.33	43.50	-21.44	150	38	Horizontal	
3	216.7828	29.07	14.42	46.00	-16.93	150	42	Horizontal	
4	433.9200	67.68	23.82	46.00	21.68	150	42	Horizontal	
5	614.2142	31.94	25.17	46.00	-14.06	150	48	Horizontal	
6	869.1299	58.69	29.19	46.00	-12.69	150	114	Horizontal	
7	900.1473	38.18	31.78	46.00	-7.82	150	293	Horizontal	
Fina	l data result	_ Average	Detection						
NO.	Freq.	PK Level	Duty cycle	factor(dB)	AV Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	
	[MHz]	[dBµV/m]			[αυμ ν/πη	[αυμ ν/ιτι]	[0.2]		
1	[MHz] 433.9200 869.1299	67.68 58.69	-7.	26	60.42	80.82	20.40	Horizontal	





EUT	Jimmyjane round remote	Model Name	JJ10508
Temperature	22.9° C	Relative Humidity	59.2%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical
82.0 dBuV/m			

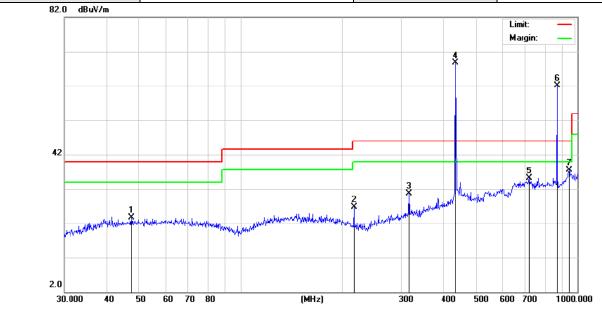

Suspected Data List_ Peak Detection


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	47.4918	23.70	16.97	40.00	-16.30	150	359	Vertical
2	216.7828	26.62	16.64	46.00	-19.38	150	38	Vertical
3	315.4808	30.70	19.98	46.00	-15.30	150	42	Vertical
4	433.9200	68.66	25.15	46.00	22.66	150	42	Vertical
5	719.1994	35.07	28.77	46.00	-10.93	150	48	Vertical
6	869.1302	62.08	27.73	46.00	16.08	150	114	Vertical
7	942.1304	37.58	30.90	46.00	-8.42	150	293	Vertical
F:		. A.,	_44!					

Final data result Average Detection

I illal data result_Average Detection								
NO.	Freq. [MHz]	PK Level [dBµV/m]	Duty cycle factor(dB)	AV Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity	
1	433.9200	68.66	-7.26	61.40	80.82	19.42	Vertical	
2	869.1302	62.08	-7.26	54.82	60.82	6.00	Vertical	

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.






RADIATED EMISSION FROM ABOVE 1GHZ

EUT	Jimmyjane round remote	Model Name	JJ10508
Temperature	24.3° C	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

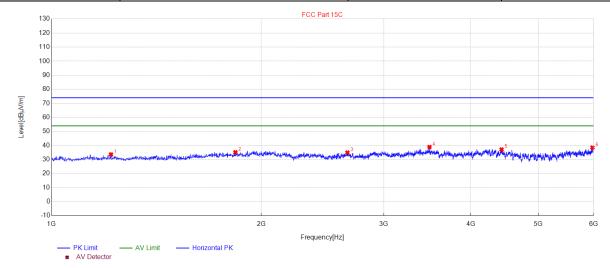

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1217.0434	33.64	-17.99	74.00	40.36	100	300	Horizontal
2	1836.1672	35.13	-14.76	74.00	38.87	100	110	Horizontal
3	2659.3319	34.90	-12.13	74.00	39.10	100	260	Horizontal
4	3488.4977	38.89	-10.67	74.00	35.11	100	340	Horizontal
5	4426.6853	37.15	-8.19	74.00	36.85	100	300	Horizontal
6	5978.9958	38.47	-5.46	74.00	35.53	100	70	Horizontal


RESULT: PASS





RADIATED EMISSION FROM ABOVE 1GHZ

EUT	Jimmyjane round remote	Model Name	JJ10508
Temperature	24.3° C	Relative Humidity	58.6%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

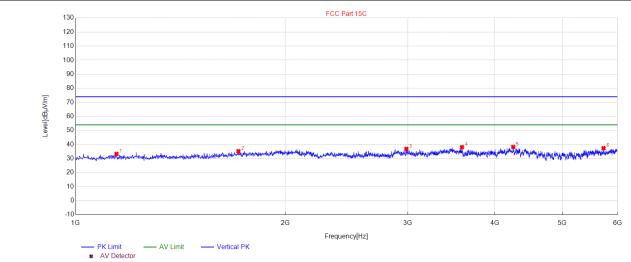

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1145.029	33.27	-18.11	74.00	40.73	100	140	Vertical
2	1713.1426	35.20	-15.78	74.00	38.80	100	340	Vertical
3	2985.3971	36.81	-11.98	74.00	37.19	100	180	Vertical
4	3587.5175	38.08	-10.52	74.00	35.92	100	300	Vertical
5	4249.6499	38.22	-8.93	74.00	35.78	100	330	Vertical
6	5728.9458	37.39	-6.20	74.00	36.61	100	200	Vertical

RESULT: PASS

Note:

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



8. AC LINE CONDUCTED EMISSION TEST


8.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage				
Frequency	Q.P. (dBμV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

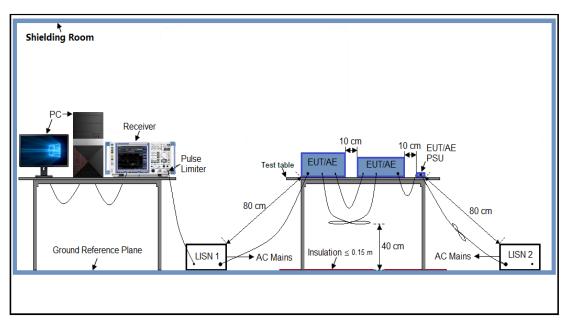



Report No.: AGC16084231004FR01 Page 31 of 32

8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3.7V power from battery.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

8.5 MEASUREMENT RESULTS

Not Applicable

Note: The SRD function cannot transmit when charging.



Page 32 of 32

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC16084231004AP01

APPENDIX II: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC16084231004AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.