




802.11ac(HT40)

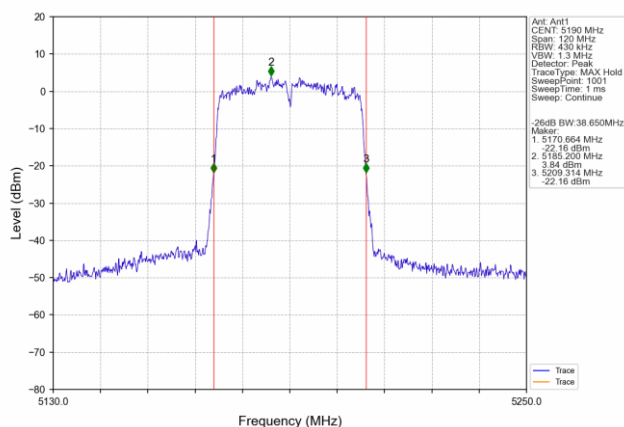


802.11ax(HT20)

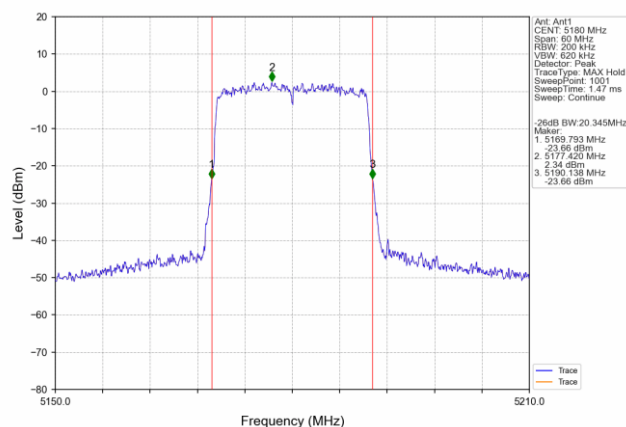


CH38

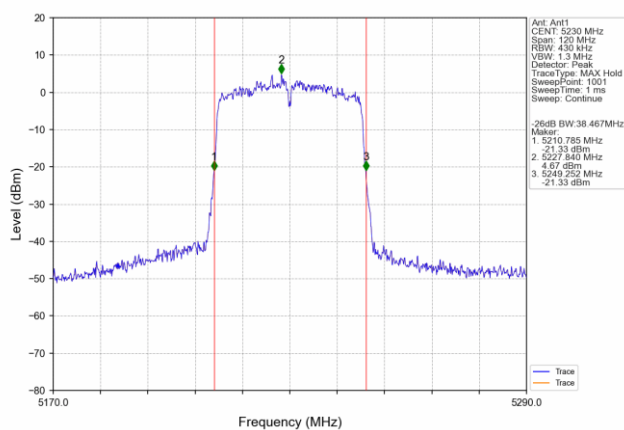


CH36

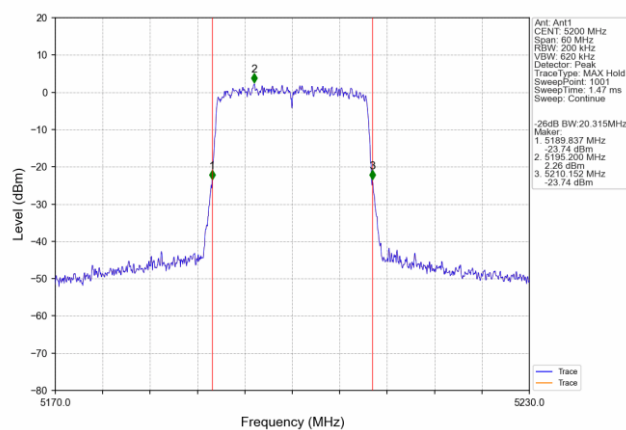


CH46

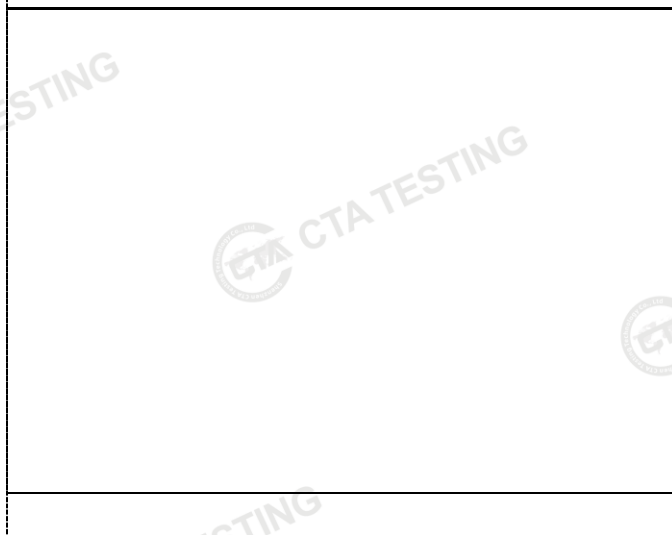

CH40

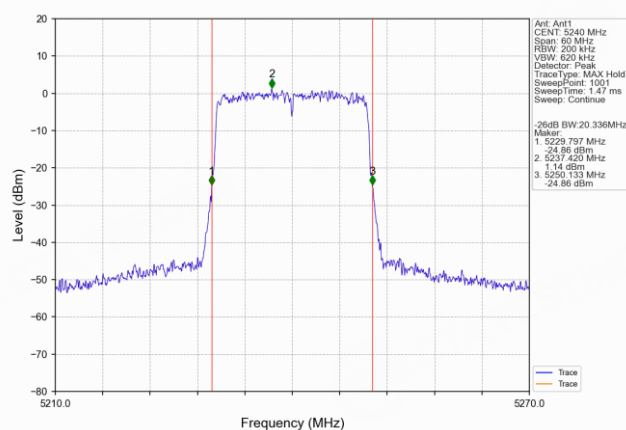

CH48

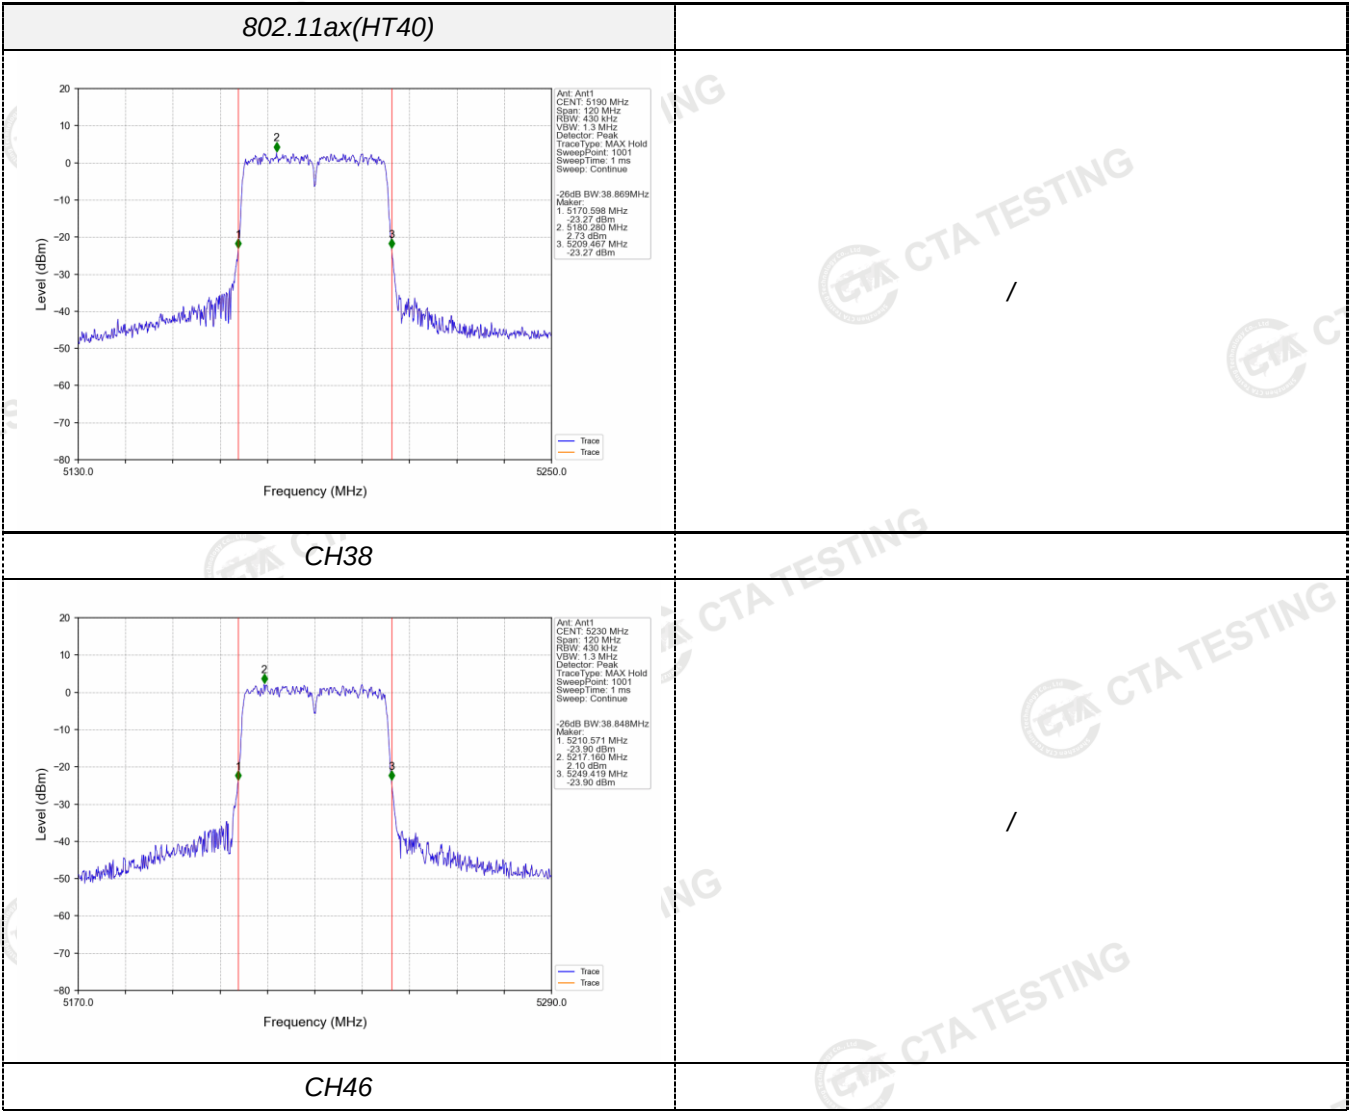

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration




Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	15.072	≥500KHz	Pass
		157	15.143		
		165	14.999		
802.11n(HT20)	U-NII 3	149	15.139		
		157	15.391		
		165	15.156		
802.11n(HT40)	U-NII 3	151	35.112		
		159	35.145		
802.11ac(HT20)	U-NII 3	149	15.236		
		157	15.089		
		165	15.087		
802.11ac(HT40)	U-NII 3	151	35.116		
		159	35.112		
802.11ax(HT20)	U-NII 3	149	18.450		
		157	18.773		
		165	18.542		
802.11ax(HT40)	U-NII 3	151	37.532		
		159	37.926		

Test plot as follows:


802.11a

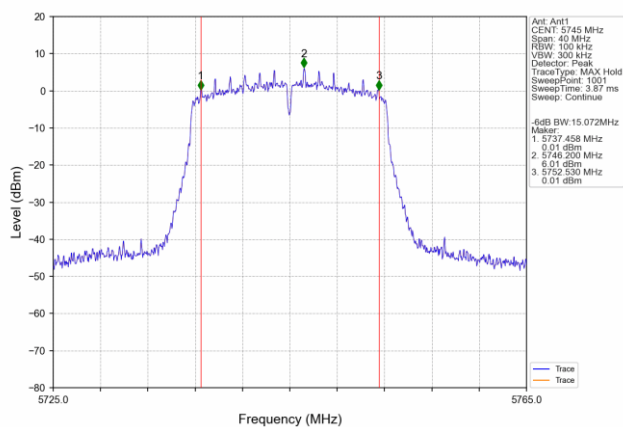


802.11n(HT20)

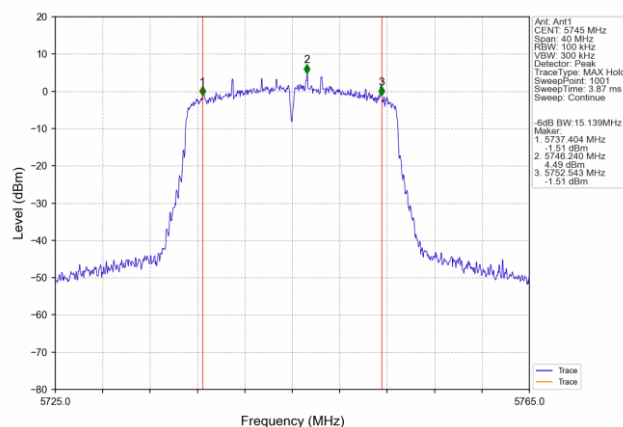


CH149

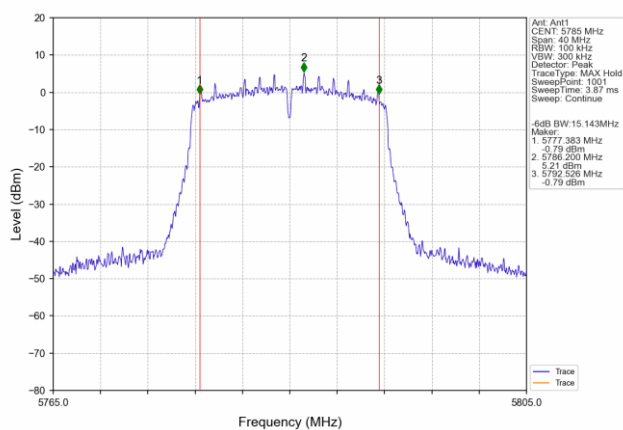


CH149

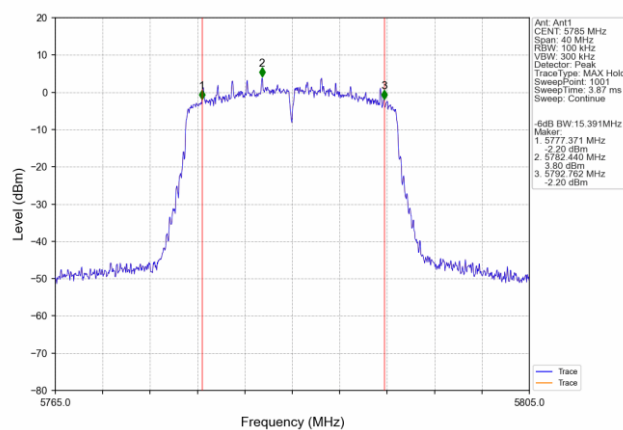

CH157

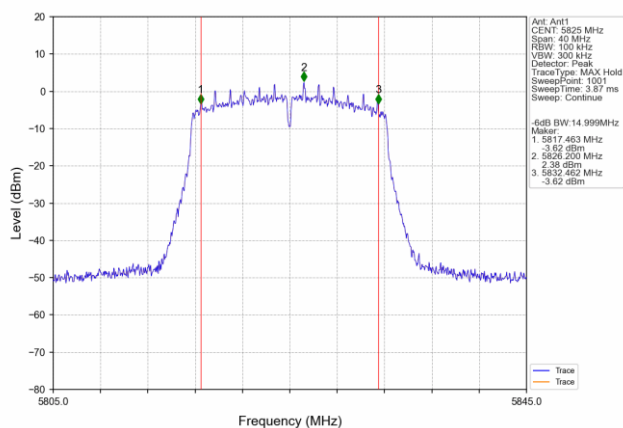


CH157

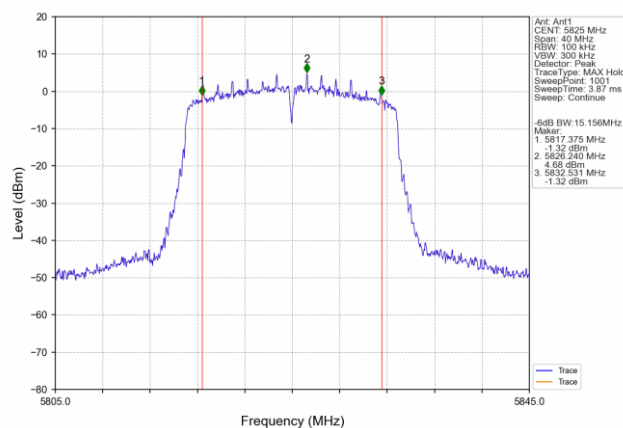


CH165

CH165


802.11n(HT40)

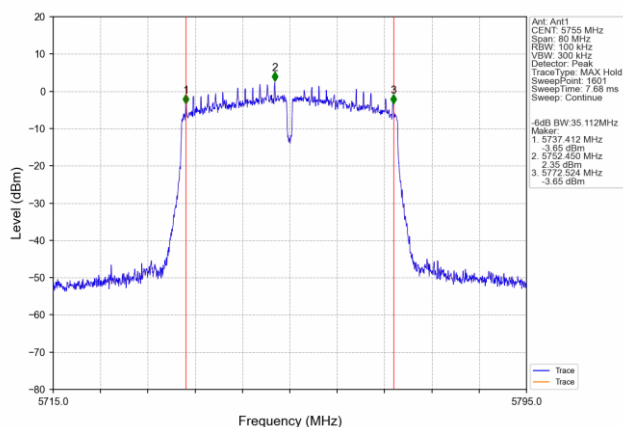


802.11ac(HT20)

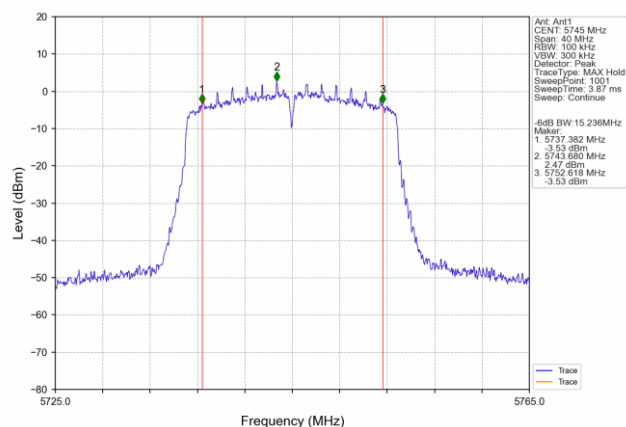


CH151

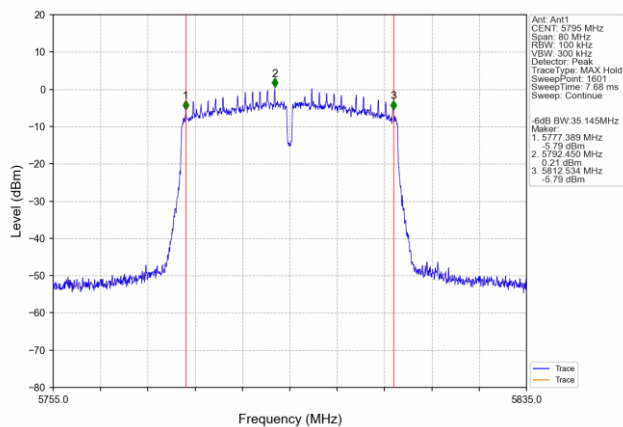

CH149

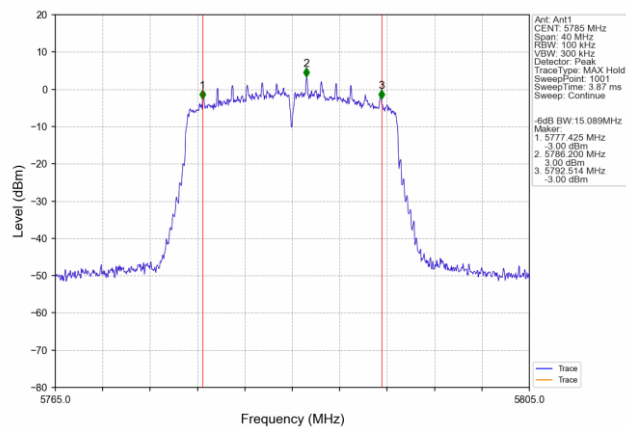


CH159

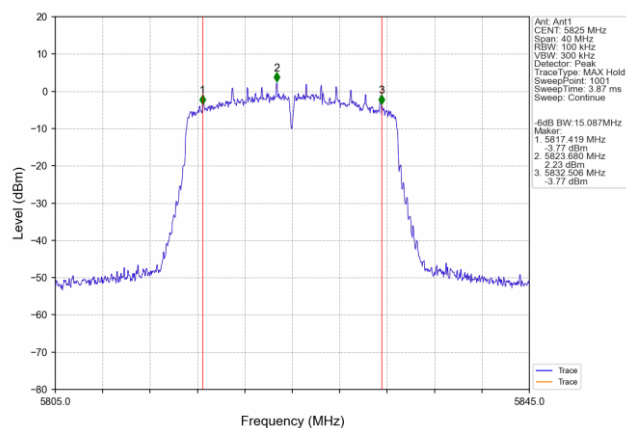


CH165


802.11ac(HT40)

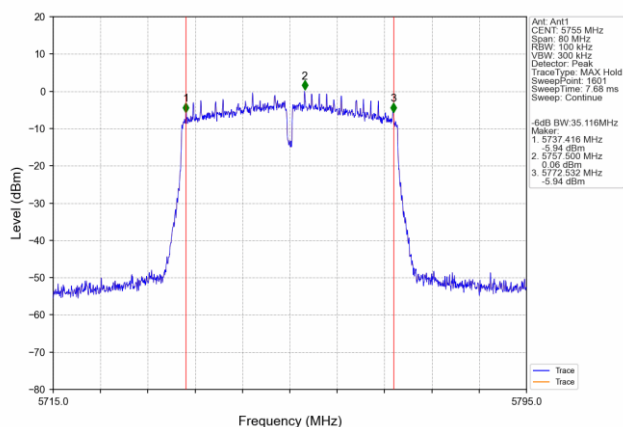


802.11ax(HT20)

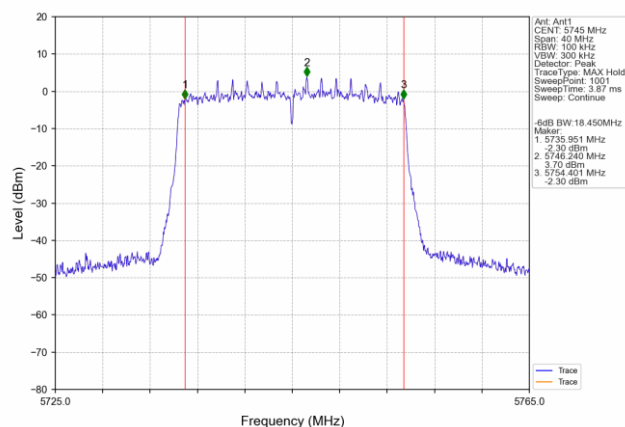


CH151

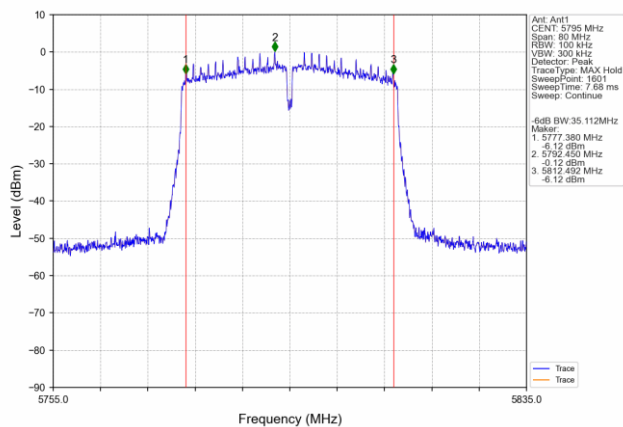


CH149

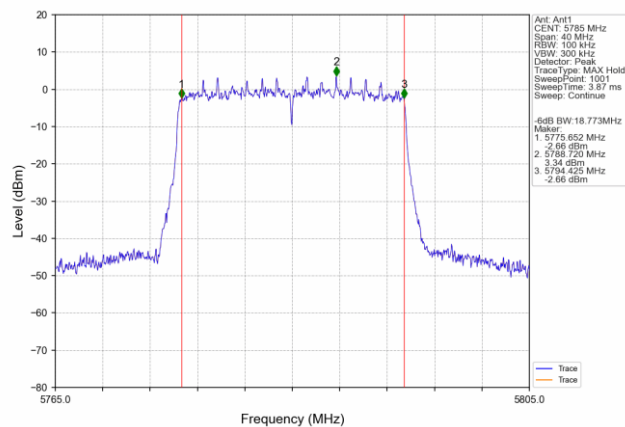


CH159

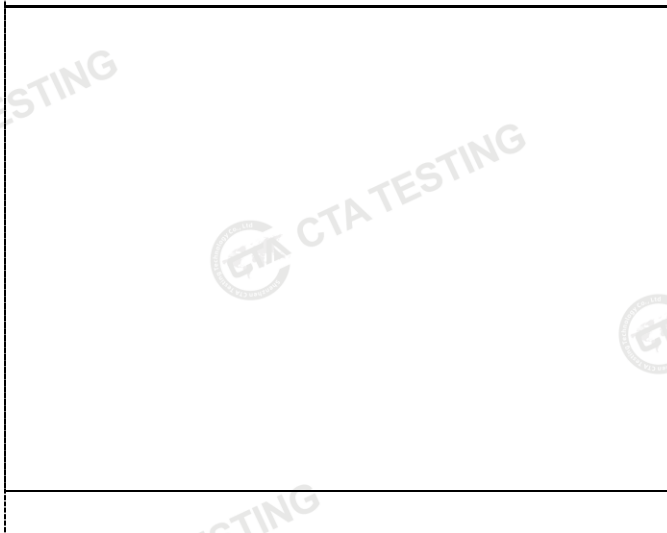

CH157

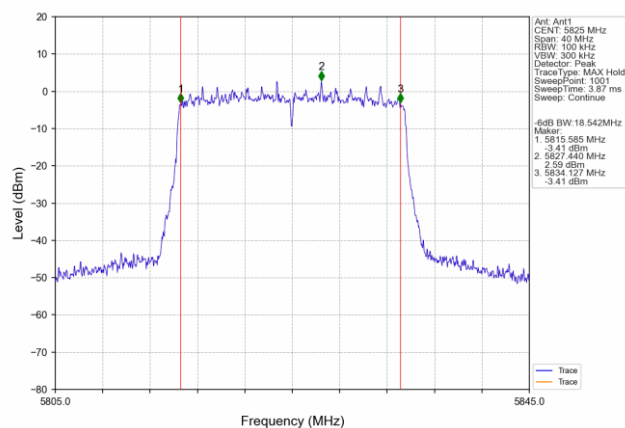

CH165

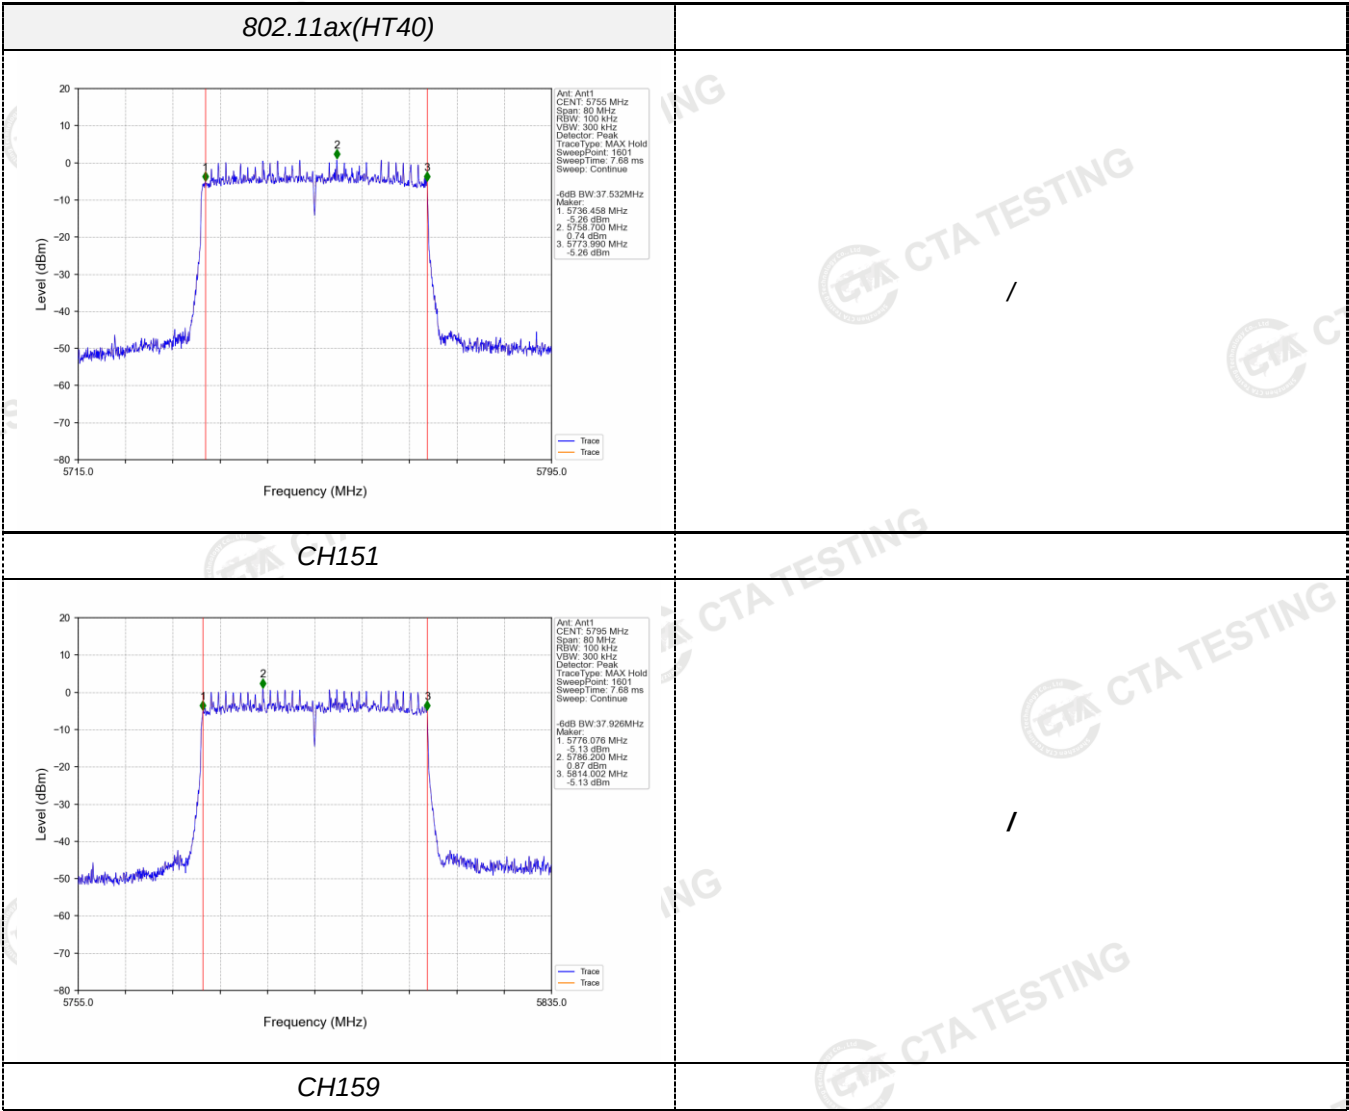


4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

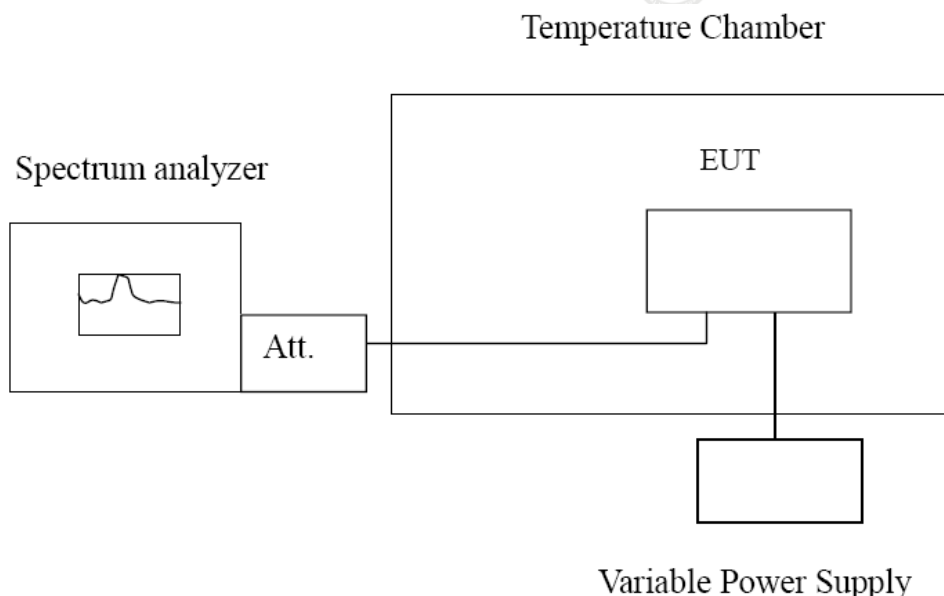

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.7	-30	110.26	0.021286	Within the band of operation	Pass
	-20	174.63	0.033712		
	-10	145.37	0.028064		
	0	146.45	0.028272		
	10	146.02	0.028189		
	20	99.51	0.019210		
	30	167.45	0.032326		
	40	129.37	0.024975		
	50	128.36	0.024780		
DC 4.2	25	195.44	0.037730	Within the band of operation	Pass
DC 3.4	25	118.57	0.022890		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
DC 3.7	-30	135.74	0.023628	Within the band of operation	Pass
	-20	129.43	0.022529		
	-10	167.27	0.029116		
	0	169.55	0.029513		
	10	136.41	0.023744		
	20	144.79	0.025203		
	30	116.58	0.020292		
	40	168.59	0.029346		
	50	160.91	0.028009		
DC 4.2	25	150.91	0.026268	Within the band of operation	Pass
DC 3.4	25	129.91	0.022613		

5 Test Setup Photos of the EUT



6 Photos of the EUT

Reference to the test report No. CTA25030500901.

***** End of Report *****