
T				
REV.	DESCRIPTION	BY	DATE	ECN NO.
	初版发行	Ann.He	2015.03.05	
(2)				
3				

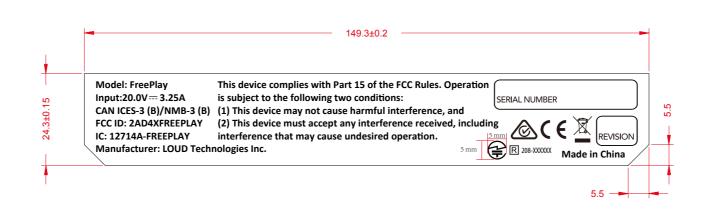

Note:

- 1.Parts shall be approved by Tymphany Engineering prior to mass production. 所有零部件都需超声工程师确定后才可生产。
- 2. indicates design-critical dimension, and ♦ indicates customer-controlled dimension. Supplier must establish quality control
- plan for these dimensions. Customer-controlled dimension cannot be changed without prior customer approval. 有"■"标识的尺寸为重要管控尺寸(IQC必检),有"●"标识的尺寸为客户重要管控尺寸(IQC必检)。

 3. Comply with Tymphany QSI057-1031 "Green Product Chemical Substances Specification".部件环保需符合迪芬尼QSI057-1031绿色产品化学物质限用规格;
- 4. Follow customer's specification as required.符合客户要求。
- 5. Follow Halogen- Free requirement: Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.有要求时需符合无卤要求: Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm .
- 6. All dimensions and tolerances indicated on the drawing indicate delivered part dimensions; All dimensions not indicated on the drawing are per CAD model. 来料部件或产品的尺寸及公差需附合图纸标识,未标识的尺寸请参照3D CAD。
- Weight(重量) :__^{g±5%} 7. Material : PC sheet,texture+3M 9448A tape,T=0.3mm(including tape)
- **材** 质: PC sheet,细沙纹+背3M 9448A胶, T=0.3mm(含胶)
- 8. Finishing(表面处理): Black background silkscreen GREY600(PANTONE 429C)/黑底丝印GREY600(PANTONE 429C)

_												
			This drawing is the property of Tymphany corporation. It contains material that is confidential and/or legally			Tolerance					Cus. Model NO.	
	TYÑP	privileged for the sole use of the intended recipient. Any review or distribution by others is strictly prohibited and punishable to the full extent of the law.			Angular ±0.25°					DLM BOOM		
L					Dimension	F	G	н	J	Tymphany Model NO.		
		Version NO	.: Scale:	1:1	Unit :	MM						1 ' ' '
	Quotation	00	Sheet :	1/1	Size :	A4	0~8	0~8 ±0.05 ±0.1/		±0.1	±0.2/	ANIMADOOMO 1540/44
-		Drawn By				oved By	8~25	±0.0/8	±0.15	±0.15	±0.3	ANMABOOM0-IF10/11
	Sample						25~80	±0./12	±0/2	±0.25	±0.4	Part NO.
F	+							±0.25	±0.3	±0.4	±9.6	YLBA19236-0001
\Box	Tooling	Ann.He						±0.5	±0.6	±0.8	±1.0	Part Name.
ction	Official Issue	,					800~2500	∮ 1.0	±1.0	±1.5	<u></u> ±1.7	
	Official Issue						2500~	±2.0	±2.0	±3.0	±3.0	COMPLIANCE STICKER
												F176-0705F