

5. Test of Radiated Emission

5.1. Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V / M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0


For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V / M)
30-230	10	30
230-1000	10	37

5.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3. Typical Test Setup

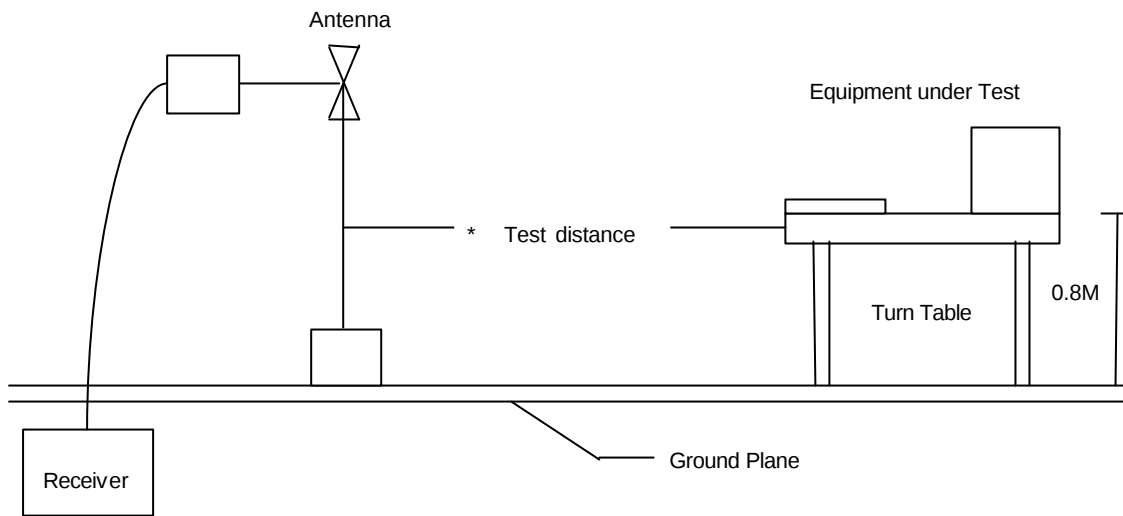


5.4. Measurement equipment

Instrument/Ancillary	Type	Manufacturer	Valid Date
EMI Receiver	8546A	HP	2006/04/13
Spectrum Analyzer	FSP40	R&S	2005/12/28
Horn Antenna	3115	EMCO	2006/02/21
Horn Antenna	3116	EMCO	2006/02/21
Bilog Antenna	CBL6112B	Schaffner	2006/04/12
Amplifier	8447D	Agilent	2006/02/14
Amplifier	8449B	Agilent	2005/12/27

5.5. Test Result of Radiated emission

EUT	: IP822LM	Pol/Phase	: HORIZONTAL
Power	: 110V	Temperature	: 25 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 1	Atmospheric Pressure	: 1018 mmHg
Modulation Type	: 802.11b/g	Memo	:
Rate	: 11/54 Mbps		

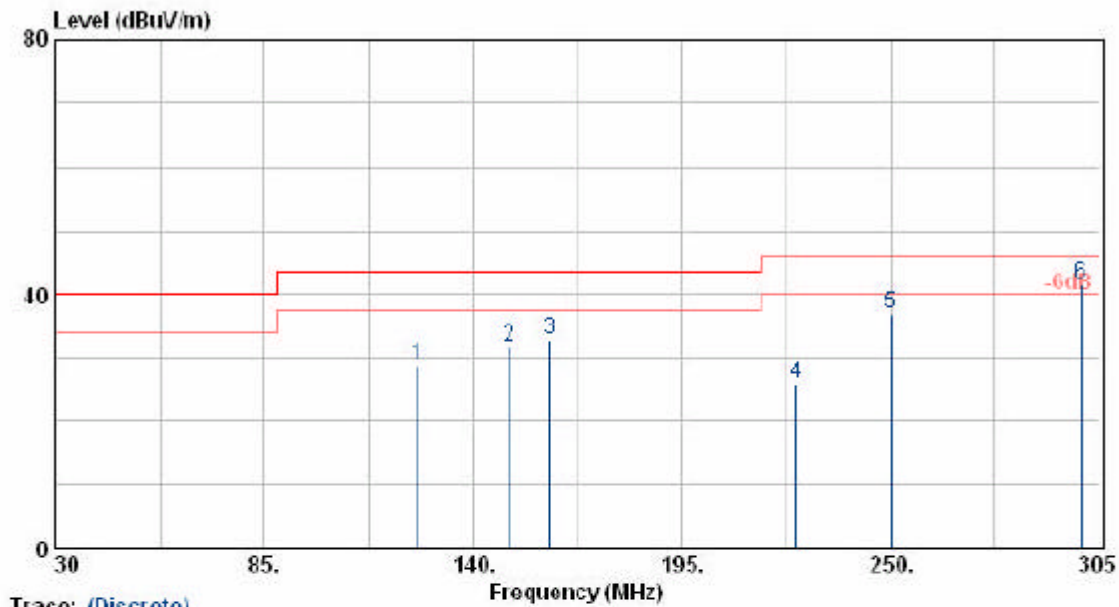


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
125.08	44.77	-15.92	28.85	43.50	-14.65	Peak	60	100
149.50	46.00	-14.40	31.60	43.50	-11.90	Peak	60	100
160.00	48.40	-15.67	32.73	43.50	-10.77	Peak	200	100
225.00	42.33	-16.39	25.95	46.00	-20.06	Peak	140	100
250.00	50.09	-13.17	36.92	46.00	-9.08	Peak	100	100
299.99	52.58	-11.10	41.48	46.00	-4.52	QP	300	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

EUT	: IP822LM	Pol/Phase	: HORIZONTAL
Power	: 110V	Temperature	: 25 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 1	Atmospheric Pressure	: 1018 mmHg
Modulation Type	: 802.11b/g	Memo	:
Rate	: 11/54 Mbps		

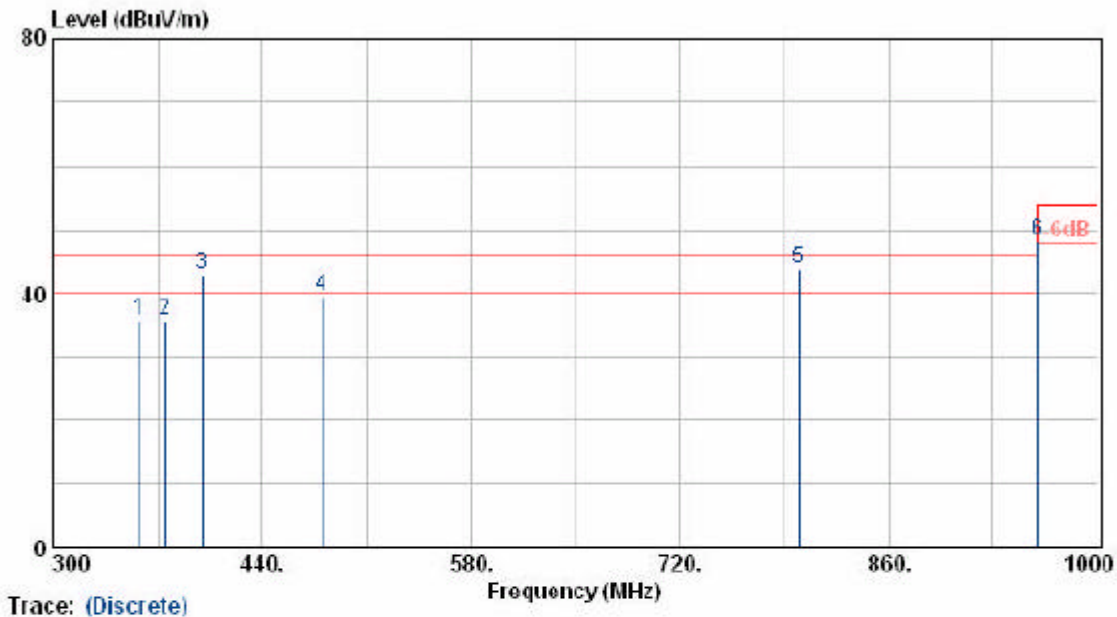


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
357.49	45.75	-9.93	35.82	46.00	-10.18	Peak	80	100
374.99	44.92	-9.29	35.64	46.00	-10.36	Peak	145	100
399.99	51.54	-8.59	42.95	46.00	-3.05	QP	310	100
480.01	47.00	-7.54	39.46	46.00	-6.54	Peak	70	100
800.00	44.78	-0.86	43.92	46.00	-2.08	QP	80	100
960.01	45.41	3.00	48.41	54.00	-5.59	QP	70	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

EUT	: IP622LM	Pol/Phase	: VERTICAL
Power	: 110V	Temperature	: 25 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 1	Atmospheric Pressure	: 1018 mmHg
Modulation Type	: 802.11b/g	Memo	:
Rate	: 11/54 Mbps		

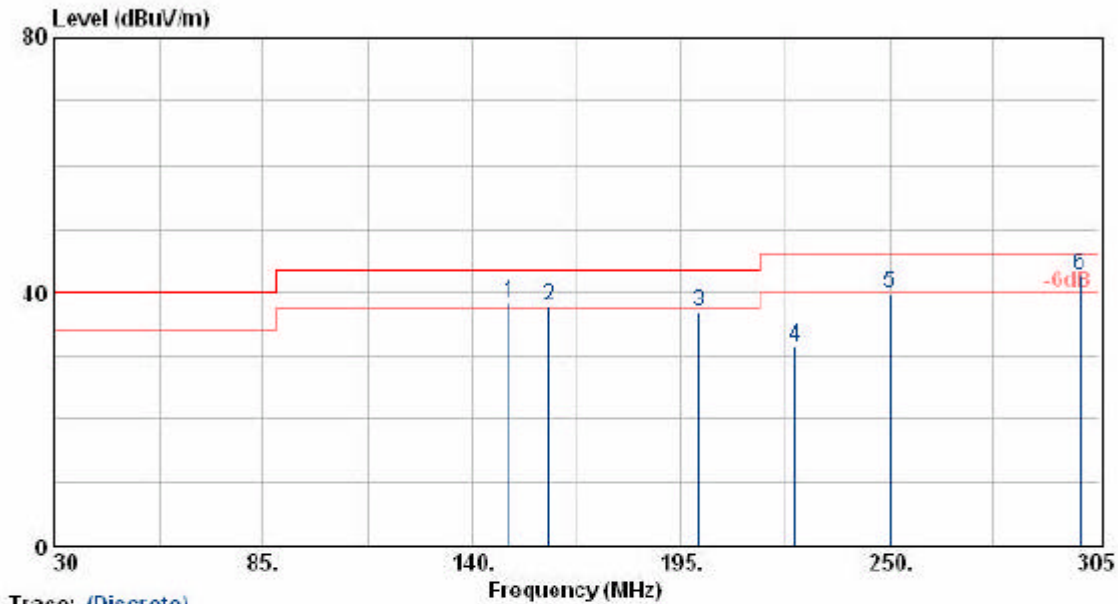


Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
150.00	52.70	-14.40	38.30	43.50	-5.20	QP	50	100
160.00	53.63	-15.67	37.96	43.50	-5.54	QP	95	100
199.99	53.93	-17.02	36.91	43.50	-6.59	Peak	200	100
225.00	47.86	-16.39	31.48	46.00	-14.53	Peak	200	100
250.01	53.04	-13.17	39.87	46.00	-6.13	Peak	100	100
299.99	53.88	-11.10	42.78	46.00	-3.22	QP	160	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

EUT	: IP822LM	Pol/Phase	: VERTICAL
Power	: 110V	Temperature	: 25 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 1	Atmospheric Pressure	: 1010 mmHg
Modulation Type	: 802.11b/g	Memo	:
Rate	: 11/54 Mbps		

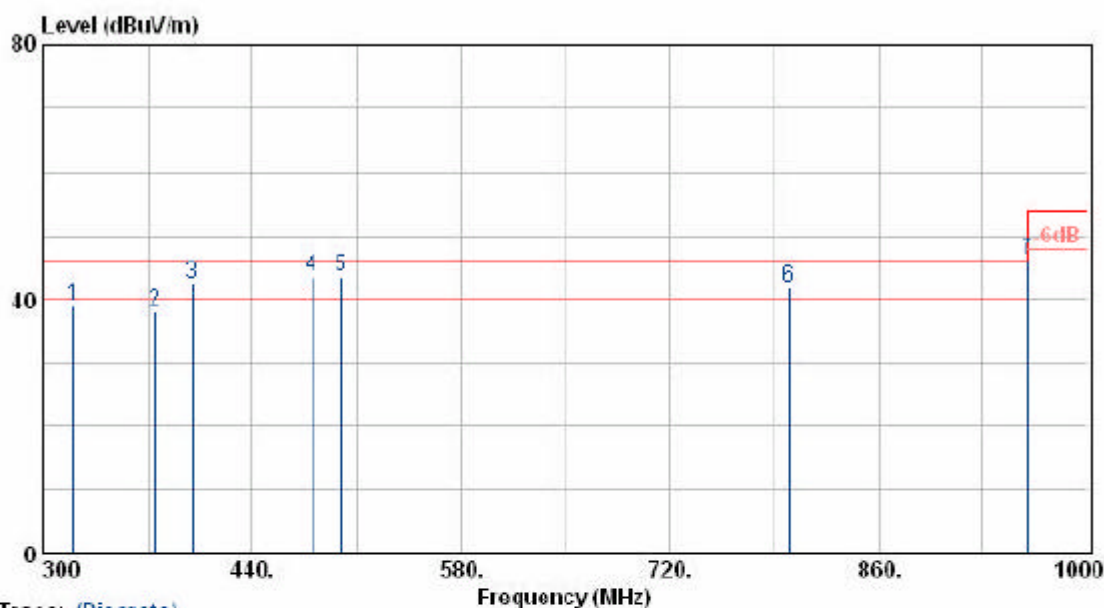


Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
319.97	49.52	-10.68	38.84	46.00	-7.16	Peak	85	100
374.97	47.28	-9.29	38.00	46.00	-8.00	Peak	220	100
399.99	50.93	-8.59	42.34	46.00	-3.66	QP	200	100
480.00	51.28	-7.54	43.74	46.00	-2.26	QP	300	100
499.98	50.35	-6.75	43.60	46.00	-2.40	QP	240	100
800.00	42.68	-0.86	41.82	46.00	-4.18	QP	240	100
960.01	43.36	3.00	46.36	54.00	-7.64	Peak	300	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

EUT	: IP822LM	Pol/Phase	: HORIZONTAL
Power	: 110V	Temperature	: 25 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 1	Atmospheric Pressure	: 1010 mmHg
Modulation Type	: 802.11b	Memo	:
Rate	: 11 Mbps		

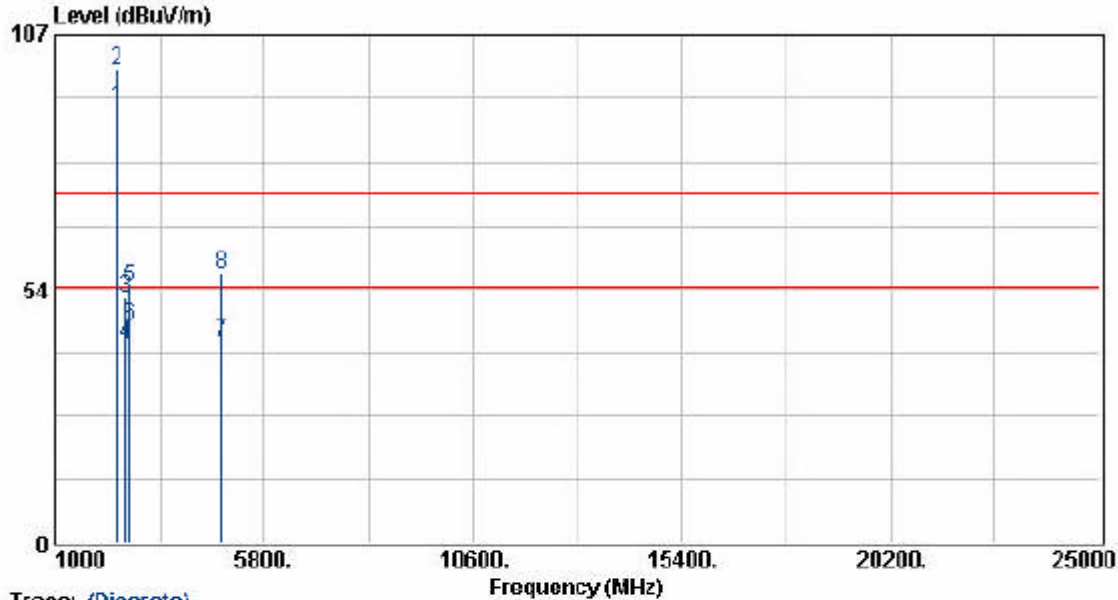


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2410.50	90.49	1.32	91.81	54.00	37.81	Average	228	100
2410.50	98.42	1.32	99.74	74.00	25.74	Peak	228	100
2618.00	49.65	2.05	51.70	74.00	-22.30	Peak	272	100
2618.00	39.97	2.05	42.02	54.00	-11.98	Average	272	100
2706.00	51.57	2.37	53.94	74.00	-20.06	Peak	272	100
2706.00	43.65	2.37	46.02	54.00	-7.98	Average	272	100
4823.20	34.10	8.12	42.22	54.00	-11.78	Average	228	100
4823.20	48.62	8.12	56.74	74.00	-17.26	Peak	228	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT : IP822LM
 Power : 110V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11b
 Rate : 11 Mbps

Pol/Phase : VERTICAL
 Temperature : 25 °C
 Humidity : 68 %
 Atmospheric Pressure: 1018 mmHg
 Memo :

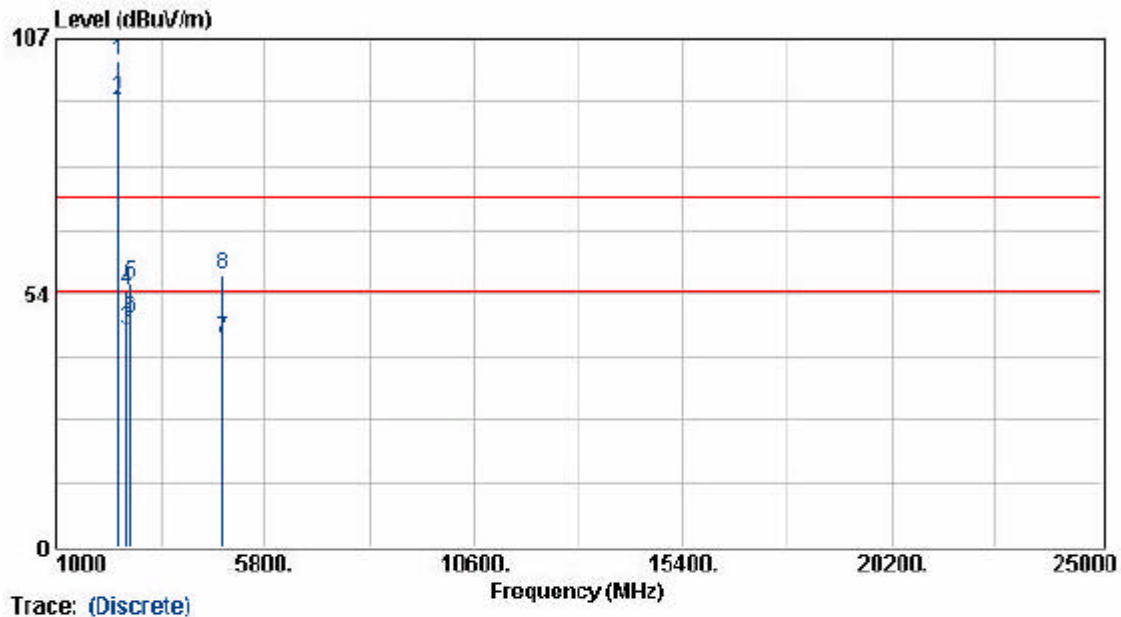


Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2410.50	101.81	0.62	102.43	74.00	28.43	Peak	86	100
2410.50	93.73	0.62	94.35	54.00	40.35	Average	86	100
2618.00	44.47	1.33	45.80	54.00	-8.20	Average	60	100
2618.00	52.56	1.33	53.89	74.00	-20.11	Peak	60	100
2706.00	53.86	1.63	55.49	74.00	-18.51	Peak	165	100
2706.00	46.63	1.63	48.26	54.00	-5.74	Average	165	100
4822.10	36.51	7.35	43.86	54.00	-10.14	Average	86	100
4822.10	50.30	7.35	57.65	74.00	-16.35	Peak	86	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT	: IP822LM	Pol/Phase	: HORIZONTAL
Power	: 110V	Temperature	: 25 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 6	Atmospheric Pressure	: 1010 mmHg
Modulation Type	: 802.11b	Memo	:
Rate	: 11 Mbps		

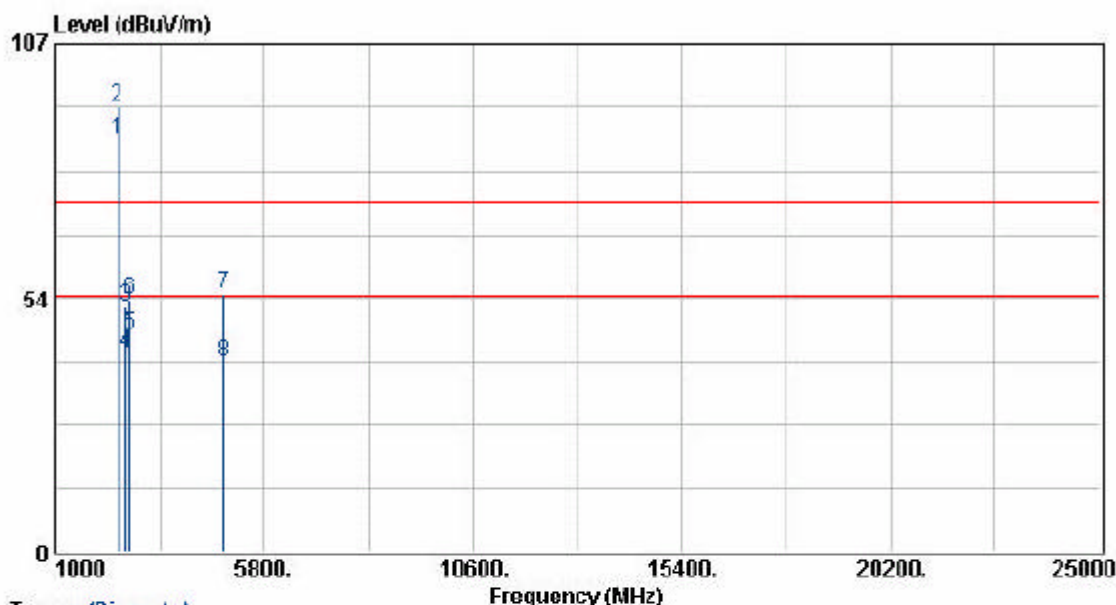


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2435.50	85.53	1.41	86.94	54.00	32.94	Average	228	100
2435.50	92.26	1.41	93.67	74.00	19.67	Peak	228	100
2618.00	49.58	2.05	51.63	74.00	-22.37	Peak	272	100
2618.00	39.81	2.05	41.86	54.00	-12.14	Average	272	100
2706.00	43.43	2.37	45.80	54.00	-8.20	Average	272	100
2706.00	51.07	2.37	53.44	74.00	-20.56	Peak	272	100
4868.40	46.31	8.29	54.60	74.00	-19.40	Peak	228	100
4868.40	31.77	8.29	40.06	54.00	-13.94	Average	228	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT	: IP822LM	Pol/Phase	: VERTICAL
Power	: 110V	Temperature	: 25 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 6	Atmospheric Pressure	: 1010 mmHg
Modulation Type	: 802.11b	Memo	:
Rate	: 11 Mbps		

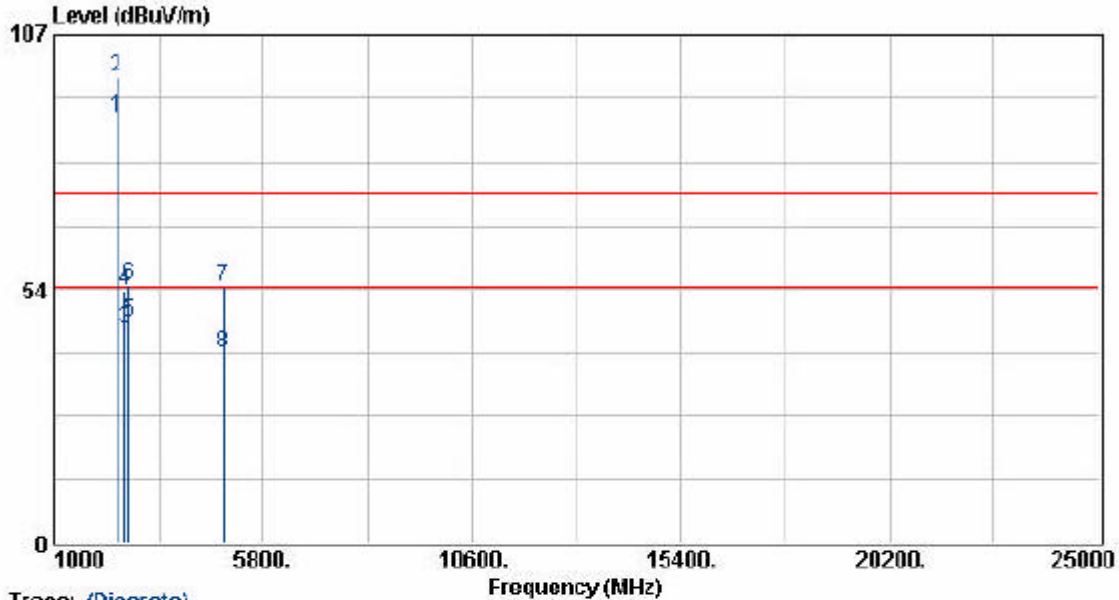


Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2438.40	88.85	0.72	89.57	54.00	35.57	Average	86	100
2438.40	97.35	0.72	98.07	74.00	24.07	Peak	86	100
2618.00	43.81	1.33	45.14	54.00	-8.86	Average	60	100
2618.00	52.16	1.33	53.49	74.00	-20.51	Peak	60	100
2706.00	45.24	1.63	46.87	54.00	-7.13	Average	165	100
2706.00	52.65	1.63	54.28	74.00	-19.72	Peak	165	100
4873.10	46.37	7.54	53.91	74.00	-20.09	Peak	86	100
4873.10	32.45	7.54	39.99	54.00	-14.01	Average	86	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT : IP822LM
 Power : 110V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11b
 Rate : 11 Mbps

Pol/Phase : HORIZONTAL
 Temperature : 25 °C
 Humidity : 68 %
 Atmospheric Pressure: 1018 mmHg
 Memo :

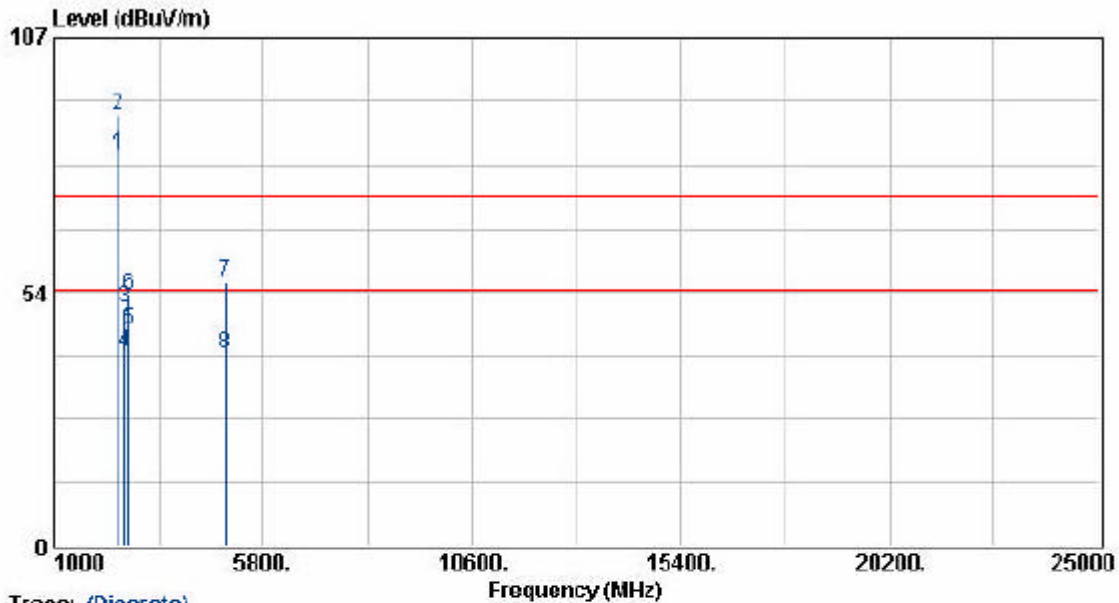


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2450.60	81.14	1.49	82.63	54.00	28.63	Average	228	100
2450.60	89.12	1.49	90.61	74.00	16.61	Peak	228	100
2618.00	48.17	2.05	50.22	74.00	-23.78	Peak	272	100
2618.00	38.85	2.05	40.90	54.00	-13.10	Average	272	100
2706.00	43.11	2.37	45.48	54.00	-8.52	Average	272	100
2706.00	50.73	2.37	53.10	74.00	-20.90	Peak	272	100
4925.30	47.03	8.51	55.54	74.00	-18.46	Peak	228	100
4925.30	31.95	8.51	40.46	54.00	-13.54	Average	228	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.

EUT	: IP822LM	Pol/Phase	: VERTICAL
Power	: 110V	Temperature	: 25 °C
Test Mode	: Transmit/Receive	Humidity	: 68 %
Operation Channel	: 11	Atmospheric Pressure	: 1010 mmHg
Modulation Type	: 802.11b	Memo	:
Rate	: 11 Mbps		

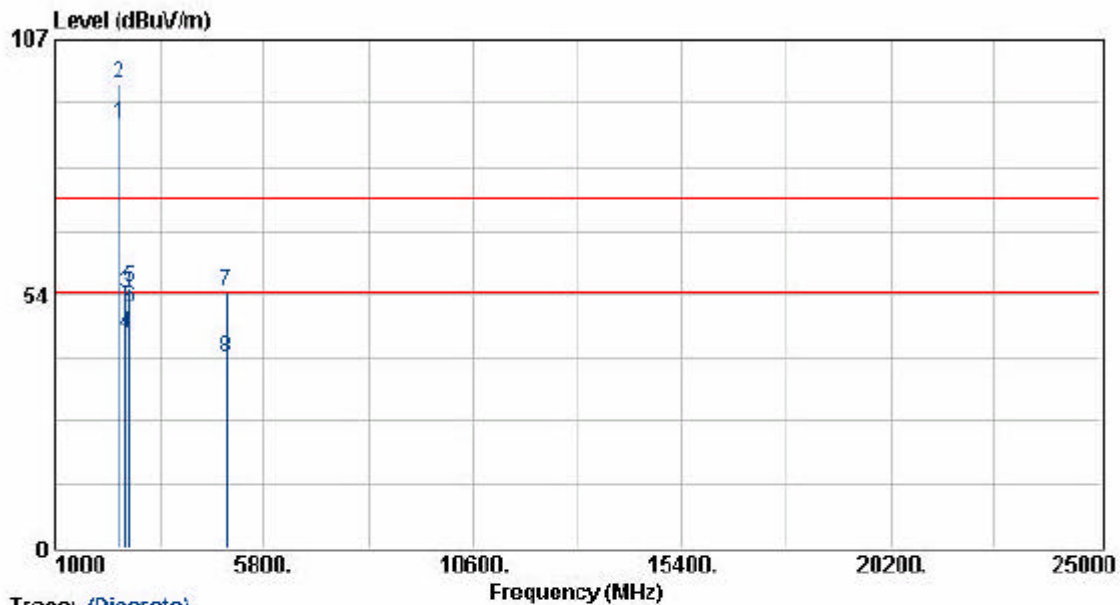

Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
2462.50	89.39	0.80	89.19	54.00	35.19	Average	86	100
2462.50	96.69	0.80	97.49	74.00	23.49	Peak	86	100
2618.00	52.21	1.33	53.54	74.00	-20.46	Peak	60	100
2618.00	43.77	1.33	45.10	54.00	-8.90	Average	60	100
2706.00	53.31	1.63	54.94	74.00	-19.06	Peak	165	100
2706.00	48.85	1.63	50.48	54.00	-3.52	Average	165	100
4923.00	46.48	7.72	54.20	74.00	-19.80	Peak	86	100
4923.00	32.48	7.72	40.20	54.00	-13.80	Average	86	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.
7. 2412,2437,2462 MHz is fundamental frequency.