



Report No.: TW2012217-02E File Reference No.: 2021-01-16

Applicant: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Product: Tablet POS

Model No.: HM628N, HM628

Trademark: N/A

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility



Dated: January 16, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2012217-02E

Date: 2021-01-16



Page 2 of 80

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 80

Report No.: TW2012217-02E

Date: 2021-01-16



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	24
8.0	Maximum Output Power.	36
9.0	Carrier Frequency Separation.	39
10.0	Number of Hopping Channel	43
11.0	Time of Occupancy (Dwell Time).	47
12.0	Out of Band Measurement.	60
13.0	Antenna Requirement.	77
14.0	FCC ID Label.	78
15.0	Photo of Test Setup and FUT View	79

Report No.: TW2012217-02E Page 4 of 80

Date: 2021-01-16



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Address: 399 Songling Road, Laoshan, Qingdao, China

Telephone: ---

1.3 Description of EUT

Product: Tablet POS

Manufacturer: Qingdao Hisense Intelligent Commercial System Co., Ltd.

Address: 399 Songling Road, Laoshan, Qingdao, China

Brand Name: N/A

Model Number: HM628N Additional Model Number: HM628 Hardware Version: WTR288C1

Software Version: HX-JX-10-GLKC2R100

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channels for Bluetooth

Antenna: Integral antenna used. The gain of the antennas is 1.48dBi (get from the antenna

specification provided the applicant)

Input Voltage: DC12V

Battey: DC7.6V, 55000mAh Li-ion battery

Power Supply: Model: PG241-12020001; Input: 100-240V~, 50/60Hz, 0.8A;

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2012217-02E Page 5 of 80

Date: 2021-01-16



(for simple base) Output: 12.0V 2.0A,24W

Power Supply: Model: FSP090-AAAN3; Input: 100-240V~, 50-60Hz, 1.2A;

(for multi-functional Output: DC24.0V, 3.75A,90W

base)

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2020-12-17 to 2021-01-16

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by



Page 6 of 80

Report No.: TW2012217-02E

Date: 2021-01-16



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2021-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2020-01-16	2021-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	7h an a di	7m		2020-06-23	2021-06-22
	Zhengdi				
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

Page 7 of 80

Report No.: TW2012217-02E

Date: 2021-01-16



3.0 **Technical Details**

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

Note: the multi-functional base and simple base were tested and only the worst case was reported. The multi-functional base was the worst case.

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



5. Power Line Conducted Emission Test

5.1 Schematics of the test

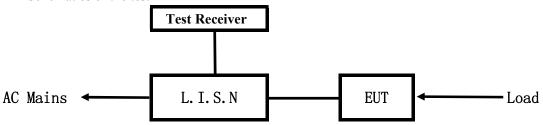


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

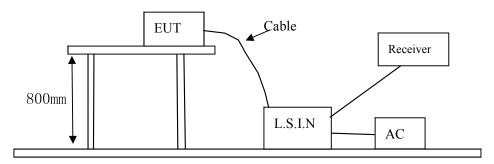

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Page 9 of 80

Report No.: TW2012217-02E

Date: 2021-01-16



A. EUT

Device	Manufacturer	Model	FCC ID
Tablet POS	Qingdao Hisense Intelligent Commercial	HM628N,	GOK-HM628N
Tablet POS	System Co., Ltd.	HM628	оук-пМ028N

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (d	lB μ V)
(MHz)	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	56.0	46.0
$5.00 \sim 30.00$	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2021-01-16

Report No.: TW2012217-02E



Conducted Emission on Live Terminal (150kHz to 30MHz) A:


EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Please refer to following diagram for individual

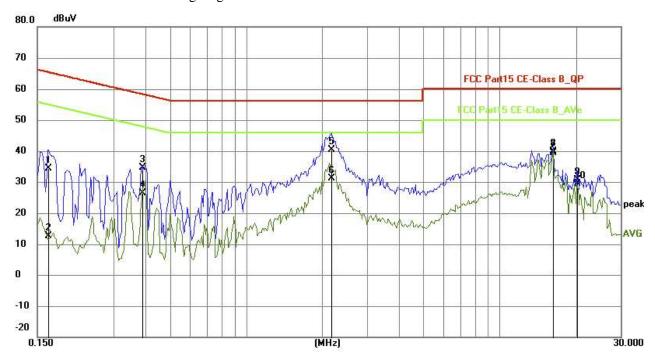

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	24.53	9.77	34.30	65.18	-30.88	QP	Р
2	0.1655	2.97	9.77	12.74	55.18	-42.44	AVG	Р
3	0.3879	24.94	9.76	34.70	58.11	-23.41	QP	Р
4	0.3879	16.52	9.76	26.28	48.11	-21.83	AVG	Р
5	2.1624	30.46	9.81	40.27	56.00	-15.73	QP	Р
6	2.1624	21.20	9.81	31.01	46.00	-14.99	AVG	Р
7	16.2288	28.88	10.45	39.33	60.00	-20.67	QP	Р
8	16.2288	28.73	10.45	39.18	50.00	-10.82	AVG	Р
9	20.2575	19.96	10.70	30.66	60.00	-29.34	QP	Р
10	20.2575	18.64	10.70	29.34	50.00	-20.66	AVG	Р

Report No.: TW2012217-02E

Date: 2021-01-16



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Please refer to following diagram for individual

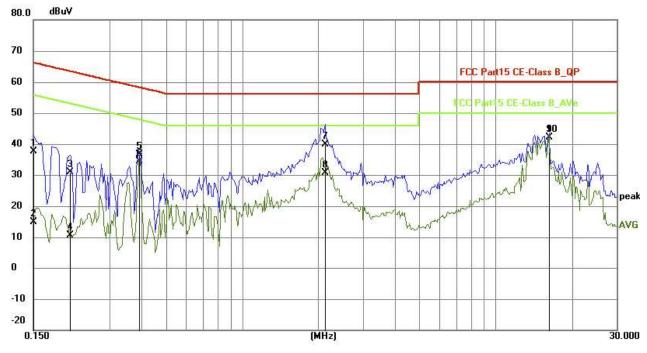

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	27.76	9.79	37.55	66.00	-28.45	QP	Р
2	0.1500	5.17	9.79	14.96	56.00	-41.04	AVG	Р
3	0.2085	21.04	9.75	30.79	63.26	-32.47	QP	Р
4	0.2085	0.84	9.75	10.59	53.26	-42.67	AVG	Р
5	0.3918	26.82	9.76	36.58	58.03	-21.45	QP	Р
6	0.3918	24.71	9.76	34.47	48.03	-13.56	AVG	Р
7	2.1234	30.18	9.81	39.99	56.00	-16.01	QP	Р
8	2.1234	20.85	9.81	30.66	46.00	-15.34	AVG	Р
9	16.2288	31.60	10.45	42.05	60.00	-17.95	QP	Р
10	16.2288	31.53	10.45	41.98	50.00	-8.02	AVG	Р

Report No.: TW2012217-02E Page 12 of 80

Date: 2021-01-16




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

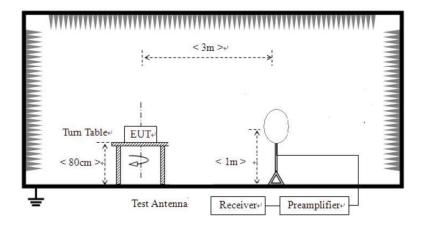


Page 13 of 80

Report No.: TW2012217-02E


Date: 2021-01-16



For radiated emissions from 30MHz to1GHz

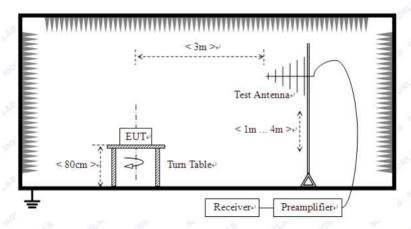

For radiated emissions above 1GHz

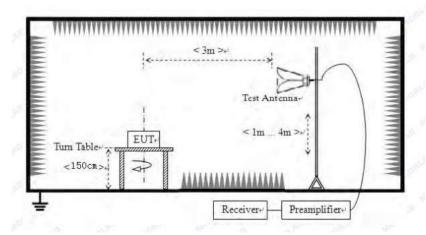

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2012217-02E Page 14 of 80

Date: 2021-01-16



Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. 8DPSK was the worst case because it has highest output power
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: TW2012217-02E

Date: 2021-01-16



Page 15 of 80

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Page 16 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Figure:

H

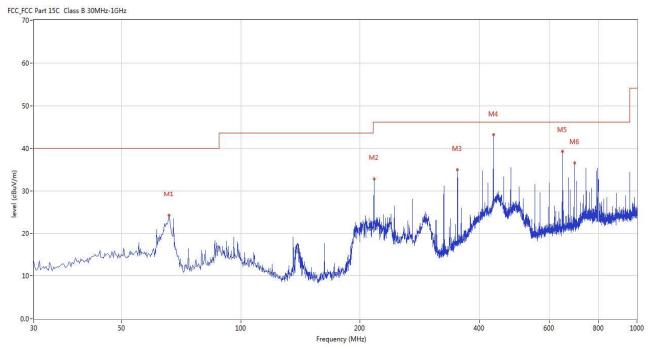

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	65.881	24.24	-13.87	40.0	-15.76	Peak	139.00	100	Horizontal	Pass
2	216.921	32.77	-13.51	46.0	-13.23	Peak	39.00	100	Horizontal	Pass
3	352.444	34.94	-9.46	46.0	-11.06	Peak	360.00	200	Horizontal	Pass
4	433.904	43.09	-8.03	46.0	-2.91	Peak	0.00	200	Horizontal	Pass
5	647.978	39.24	-4.59	46.0	-6.76	Peak	29.00	100	Horizontal	Pass
6	695.981	36.57	-4.14	46.0	-9.43	Peak	32.00	100	Horizontal	Pass


Page 17 of 80 Report No.: TW2012217-02E

Date: 2021-01-16



Test Figure:

V

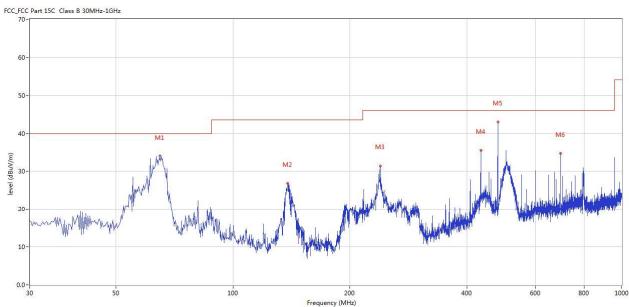

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	64.911	33.95	-13.55	40.0	-6.05	Peak	347.00	100	Vertical	Pass
2	138.128	26.71	-17.29	43.5	-16.79	Peak	360.00	100	Vertical	Pass
3	239.468	31.36	-12.36	46.0	-14.64	Peak	355.00	100	Vertical	Pass
4	433.904	35.41	-8.03	46.0	-10.59	Peak	350.00	100	Vertical	Pass
5	479.968	43.01	-7.40	46.0	-2.99	Peak	337.00	100	Vertical	Pass
6	695.981	34.63	-4.14	46.0	-11.37	Peak	352.00	100	Vertical	Pass

Page 18 of 80 Report No.: TW2012217-02E


Date: 2021-01-16



Test Figures above 1GHz:

Please refer to the following test plots for details:

Low Channel: Vertical

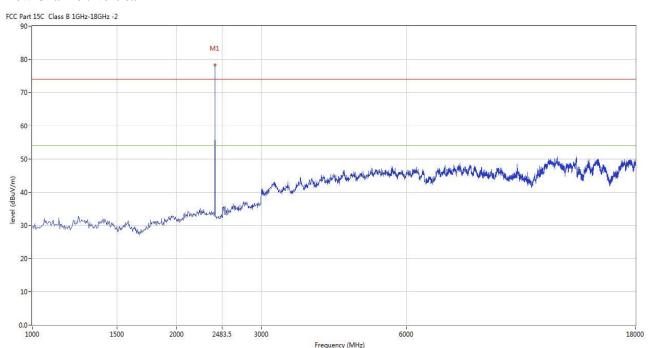


Page 19 of 80 Report No.: TW2012217-02E

Date: 2021-01-16



Low Channel: Horizontal

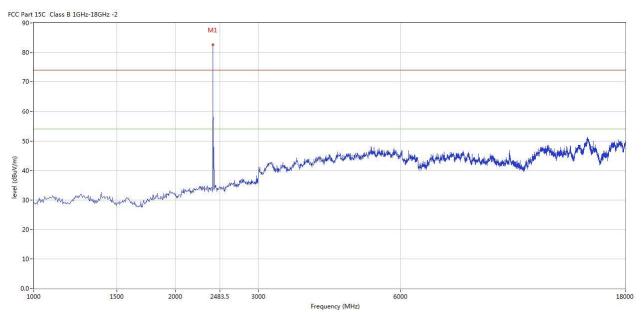


Page 20 of 80 Report No.: TW2012217-02E

Date: 2021-01-16



Middle Channel: Horizontal

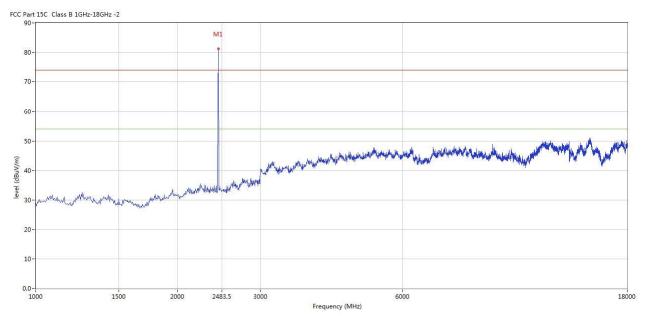


Page 21 of 80

Report No.: TW2012217-02E

Date: 2021-01-16



Middle Channel: Vertical

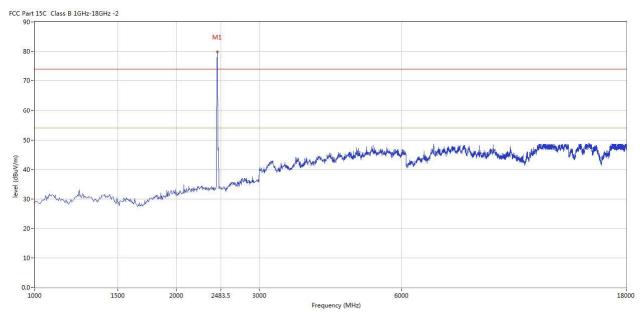


Page 22 of 80 Report No.: TW2012217-02E

Date: 2021-01-16



High Channel: Horizontal

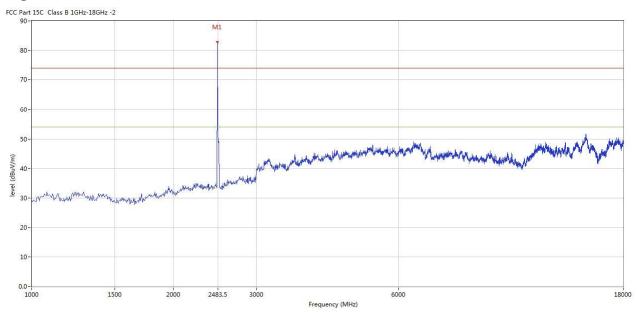


Report No.: TW2012217-02E Page 23 of 80

Date: 2021-01-16



High Channel: Vertical

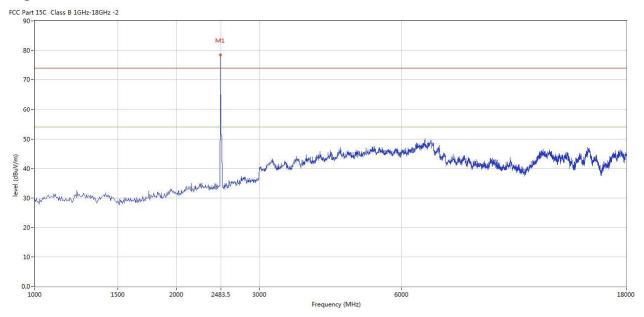

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G and Below 30MHz, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: TW2012217-02E

Date: 2021-01-16



Page 24 of 80

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

Type of Modulation G1511							
EUT		Tablet POS	Model	HM628N			
Mode	Ke	ep Transmitting	Input Voltage	DC7.6V			
Temperat	ure	24 deg. C,	Humidity	56% RH			
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail			
Low	2402	872		Pass			
Middle	2441	2441 878		Pass			
High 2480		884		Pass			

Page 25 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Figure:

1. Condition: Low Channel

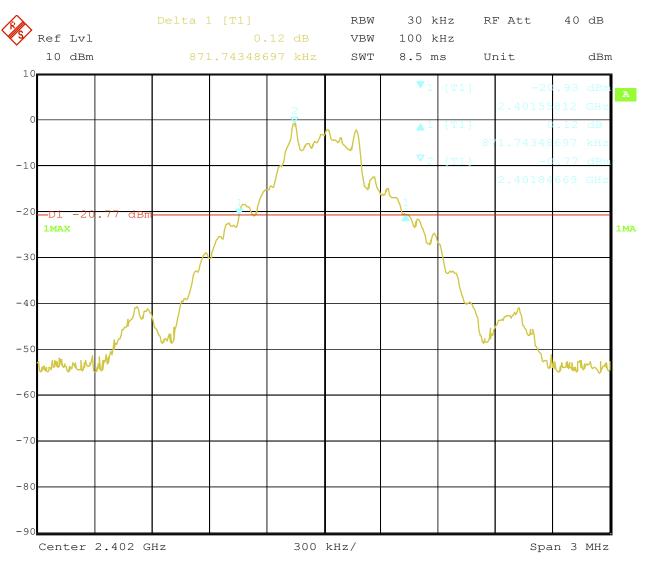

Date: 15.JAN.2021 13:17:12


Page 26 of 80

Report No.: TW2012217-02E

Date: 2021-01-16



2. Condition: Middle Channel

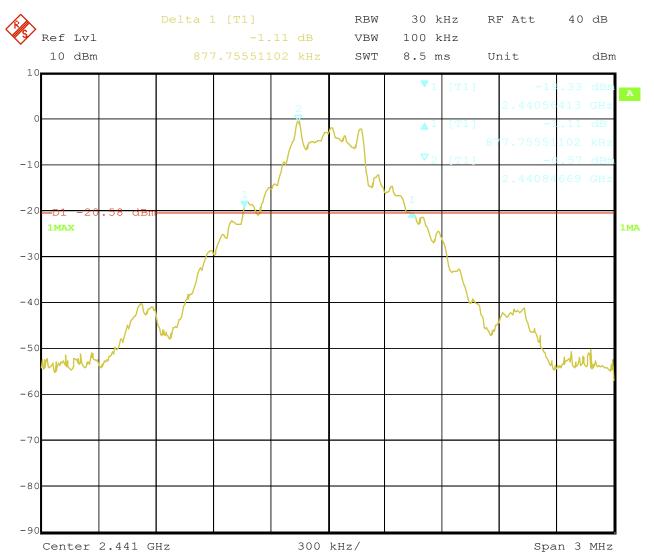


15.JAN.2021 13:16:11 Date:

Report No.: TW2012217-02E Page 27 of 80

Date: 2021-01-16



3. High Channel

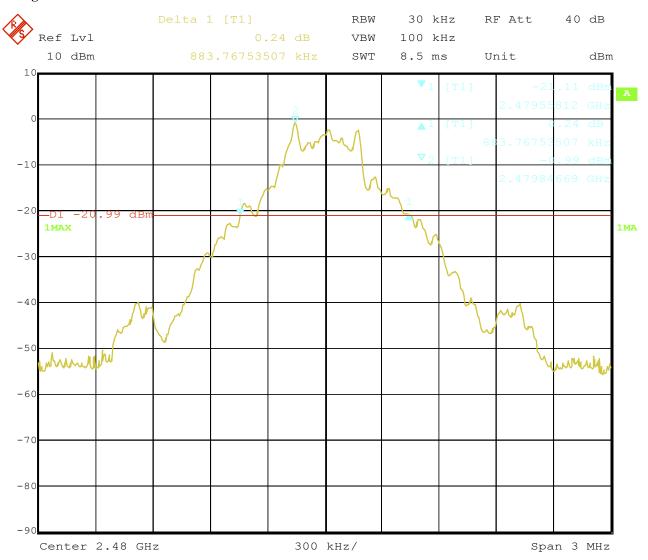

15.JAN.2021 13:14:29 Date:

Report No.: TW2012217-02E

Date: 2021-01-16



Page 28 of 80

Test Result

Type of Modulation: $\sqrt{1/4}$ D-QPSK

EUT		Tablet POS	Model	HM628N
Mode	Ko	eep Transmitting	Input Voltage	DC7.6V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1136		Pass
Middle	2441	1136		Pass
High	2480	1136		Pass

Page 29 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Figure:

1. Condition: Low Channel

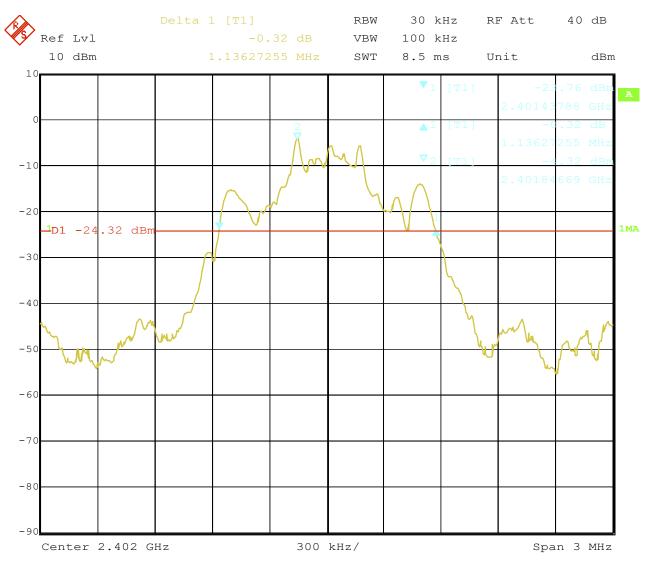


Date: 15.JAN.2021 13:18:29 Report No.: TW2012217-02E Page 30 of 80

Date: 2021-01-16



2. Condition: Middle Channel

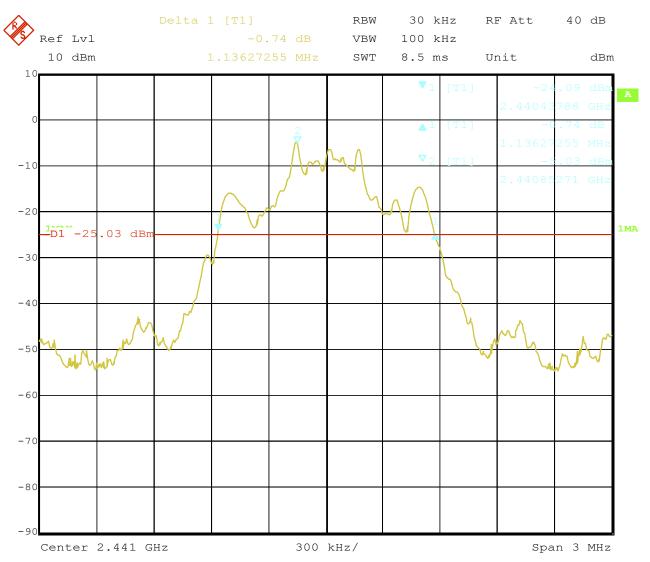


15.JAN.2021 13:19:48 Date:

Report No.: TW2012217-02E Page 31 of 80

Date: 2021-01-16



3. High Channel

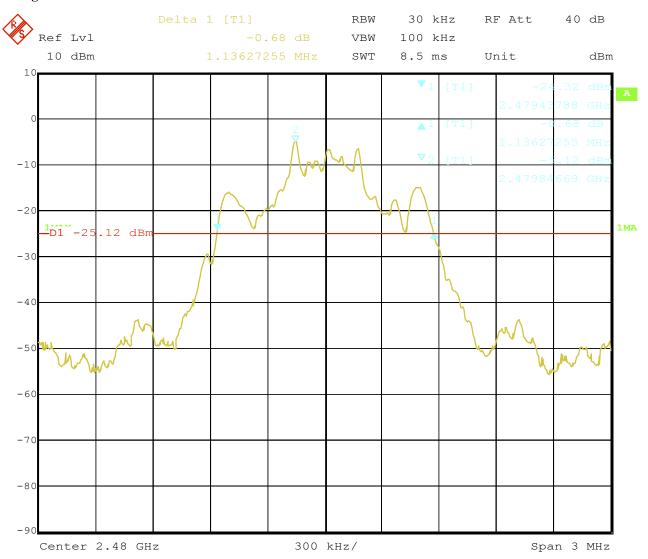

15.JAN.2021 13:20:45 Date:

Report No.: TW2012217-02E

Date: 2021-01-16



Page 32 of 80

Test Result

Type of Modulation: 8DPSK

EUT		Tablet POS	Model	HM628N	
Mode	K	eep Transmitting	Input Voltage	DC7.6V	
Temperat	ure	24 deg. C,	Humidity	56% RH	
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail	
Low	2402	2402 1160		Pass	
Middle	2441	2441 1160		Pass	
High	2480	1160		Pass	

Page 33 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Figure:

1. Condition: Low Channel

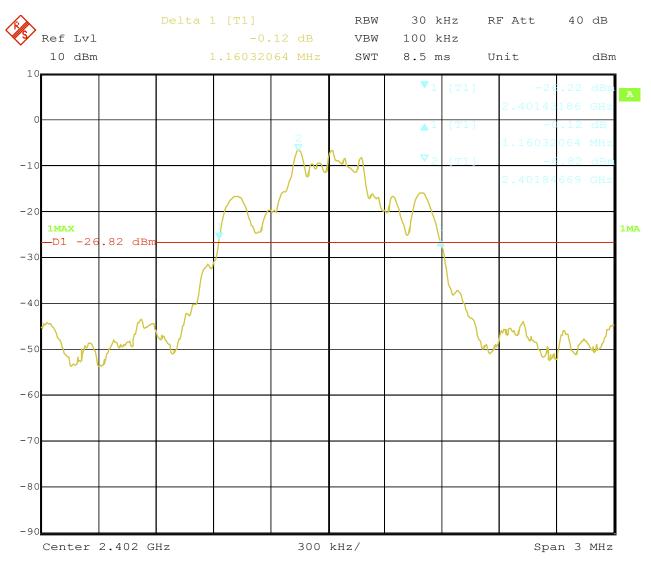


Date: 15.JAN.2021 13:36:52 Report No.: TW2012217-02E Page 34 of 80

Date: 2021-01-16



2. Condition: Middle Channel

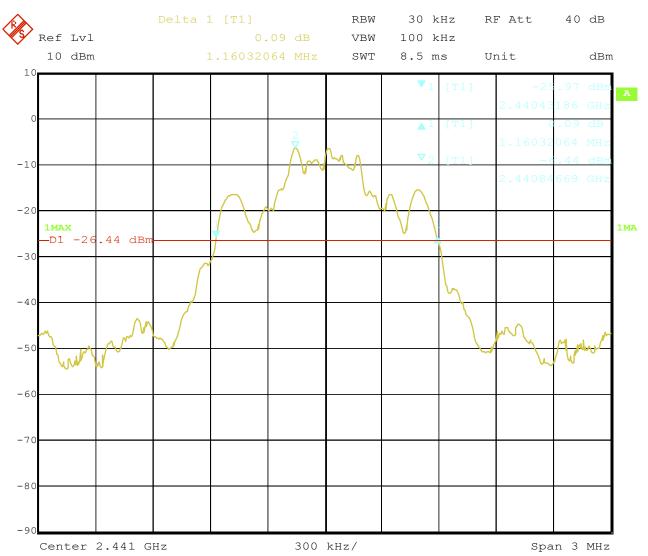


15.JAN.2021 13:26:10 Date:

Report No.: TW2012217-02E Page 35 of 80

Date: 2021-01-16



3. High Channel

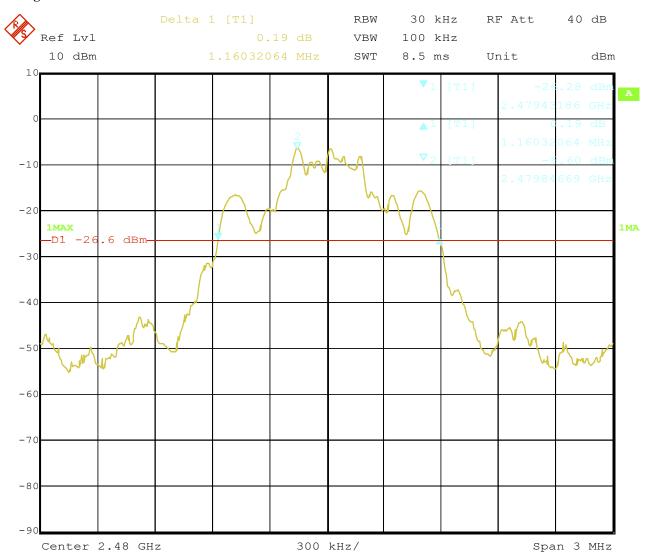

15.JAN.2021 13:22:23 Date:

Report No.: TW2012217-02E

Date: 2021-01-16



Page 36 of 80

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = 10MHz, RBW=3MHz; Sweep = 60s; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: TW2012217-02E Page 37 of 80

Date: 2021-01-16



8.4Test Results

Type of Modulation: GFSK

EUT		Tablet POS			HM628N
Mode	Ke	Keep Transmitting		Voltage	DC7.6V
Temperature	nperature 24 deg. C, Hum		Humidity		56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit	Pass/ Fail
		Peak		(dBm)	
Low	2402	1.13		30	Pass
Middle	2441	1.41		30	Pass
High	2480	1.01		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Type of Modulation: Л/4D-QPSK

EUT	Tablet POS		N	Iodel	HM628N
Mode	Mode Keep Transmitting		Input Voltage		DC7.6V
Temperature	emperature 24 deg. C, Hum		Humi	dity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm	1)	Peak Power Limit	Pass/ Fail
	,	Peak	Peak (dBm)		
Low	2402	0.31		30	Pass
Middle	2441	0.76		30	Pass
High	2480	0.45		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: TW2012217-02E

Date: 2021-01-16



Page 38 of 80

Type of Modulation: 8DPSK

EUT		Tablet POS			HM628N
Mode	Ke	Keep Transmitting		ıt Voltage	DC7.6V
Temperature	re 24 deg. C, Hu		Humidity		56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm) Peak		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	0.49		30	Pass
Middle	2441	0.82		30	Pass
High	2480	0.53		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Report No.: TW2012217-02E

Date: 2021-01-16



Page 39 of 80

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 40 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




9.4Test Result

Type of Modulation: GFSK

EUT	Tablet POS	Model	-	HM628N	
Mode	Hopping O	Input Voltage		DC7.6V	
Temperature	24 deg. C,	24 deg. C,			56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

Test Plots

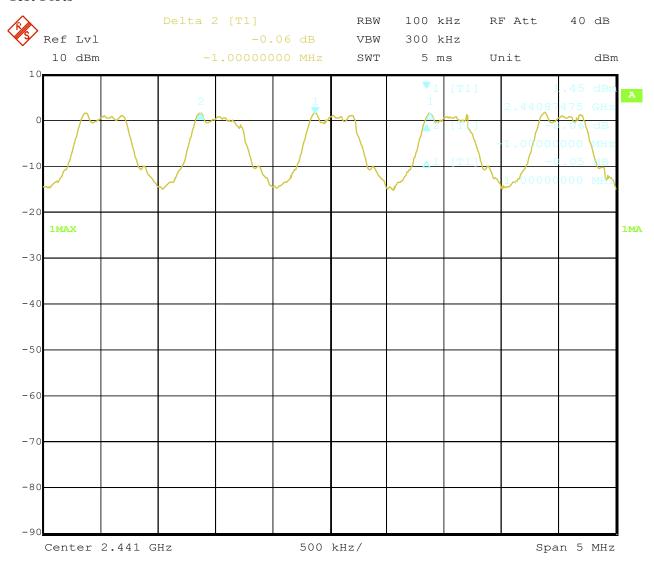

14.JAN.2021 15:10:56 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 41 of 80

Report No.: TW2012217-02E


Date: 2021-01-16



Type of Modulation: $\pi/4D$ -QPSK

EUT	Tablet POS	Model		HM628N	
Mode	Hopping O	Input Voltage		DC7.6V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bands	width	Pass

Test Plots

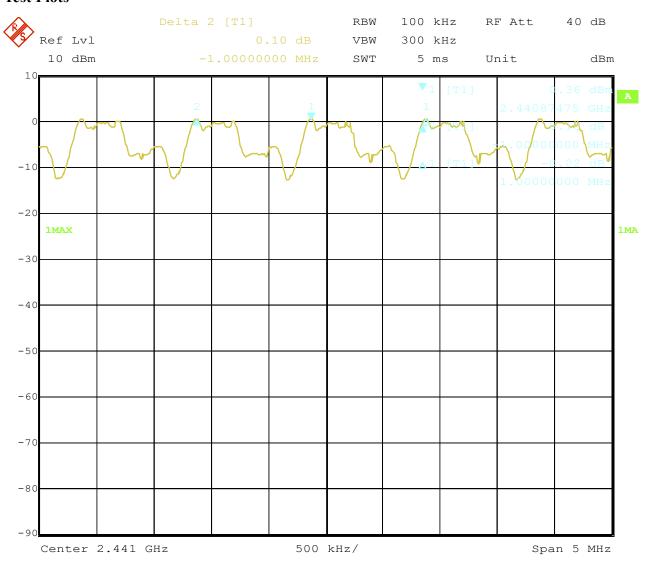

14.JAN.2021 16:46:00

Page 42 of 80

Report No.: TW2012217-02E


Date: 2021-01-16



Type of Modulation: 8DPSK

EUT	Tablet POS		Model		HM628N
Mode	Hopping On In		Input Voltage	DC7.6V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation			Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	/3 of 20 dB bands	width	Pass

Test Plots

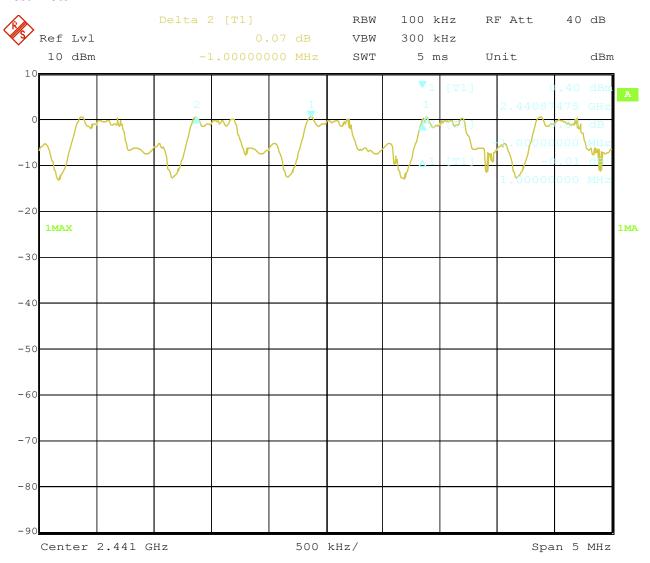

15.JAN.2021 09:55:26 Report No.: TW2012217-02E

Date: 2021-01-16



Page 43 of 80

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 44 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




10.4Test Result

Type of Modulation: GFSK

EUT	Tablet POS		Model		HM628N
Mode	Hopping On		Input Voltage	DC7.6V	
Temperature	2	24 deg. C,	Humidity	56% RH	
Operating Frequency		Number of hopp	ping channels	Limit	Pass/ Fail
2402-2480MHz		79		≥ 15	Pass

Test Plot

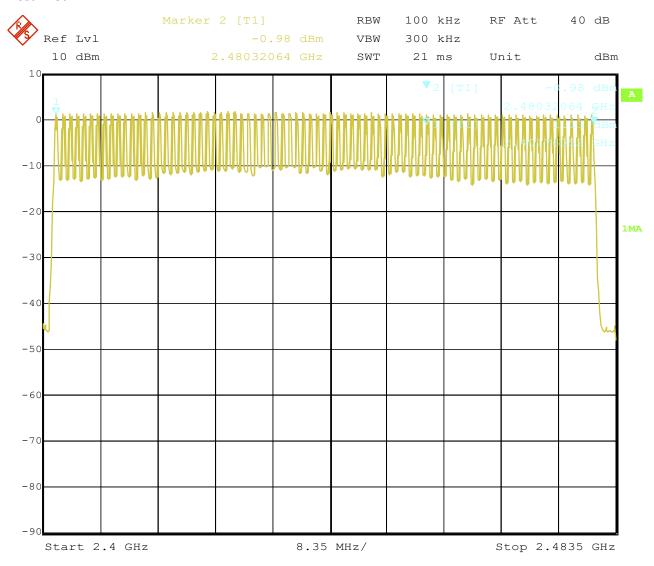

Date: 14.JAN.2021 14:00:50

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 45 of 80

Report No.: TW2012217-02E


Date: 2021-01-16



Type of Modulation: Л/4D-QPSK

EUT	Tablet POS		Model	-	HM628N
Mode	Hopping On		Input Voltage	DC7.6V	
Temperature		24 deg. C,		56% RH	
Operating Frequency		Number of hopping channels	Limit	;	Pass/ Fail
2402-2480MHz		79	≥ 15		Pass

Test Plot

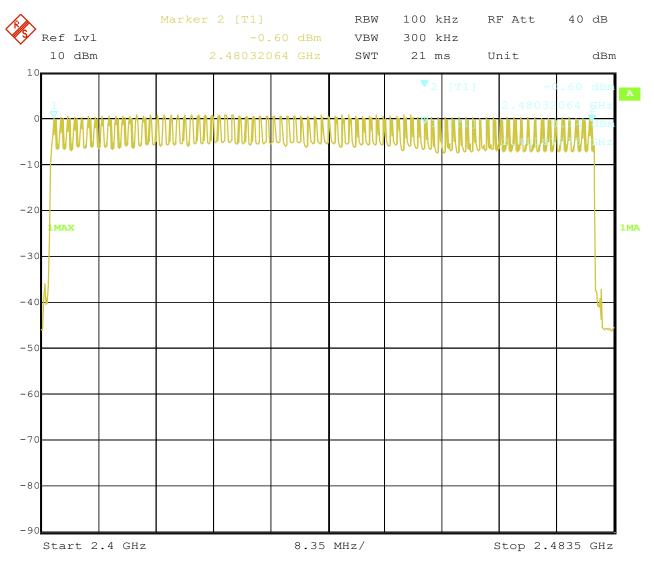

Date: 14.JAN.2021 17:32:38

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 46 of 80

Report No.: TW2012217-02E


Date: 2021-01-16



Type of Modulation: 8DPSK

EUT	Tablet POS		M	odel		HM628N	
Mode	Hopping On		Input	Voltage		DC7.6V	
Temperature		24 deg. C,		dity	7 56% RH		
Operating Frequency		Number of hoppin channels		Liı	mit	Pass/ Fail	
2402-2480MHz		79		>	15	Pass	

Test Plot

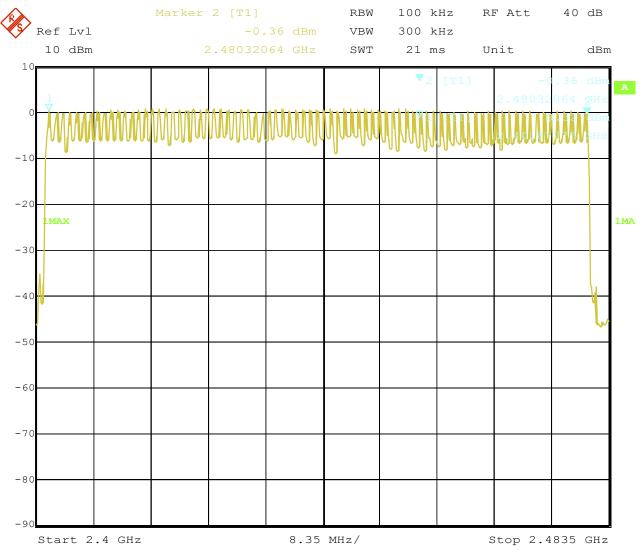

14.JAN.2021 17:46:18 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: TW2012217-02E

Date: 2021-01-16



Page 47 of 80

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: TW2012217-02E

Date: 2021-01-16



Page 48 of 80

11.4 Test Result

Type of Modulation: GFSK

EUT	Table	Tablet POS		H	IM628N				
Mode	Keep Tr	Keep Transmitting]	DC7.6V				
Temperatur	re 24 d	leg. C,	Humidity	4	56% RH				
Channel	Reading	Hopin	Hoping Rate		Limit				
			DH1						
Middle	0.200ms	800 1	nop/s	0.064s	0.4s				
			DH3						
Middle	0.200ms	400 l	400 hop/s		0.4s				
DH5									
Middle	0.200ms	266.66	7 hop/s	0.021s	0.4s				

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 49 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

DH1

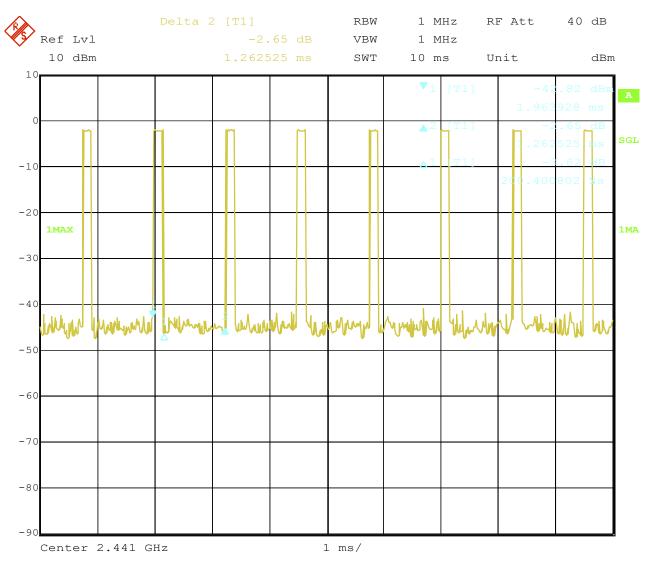

Date: 15.JAN.2021 13:43:28

Page 50 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

DH3

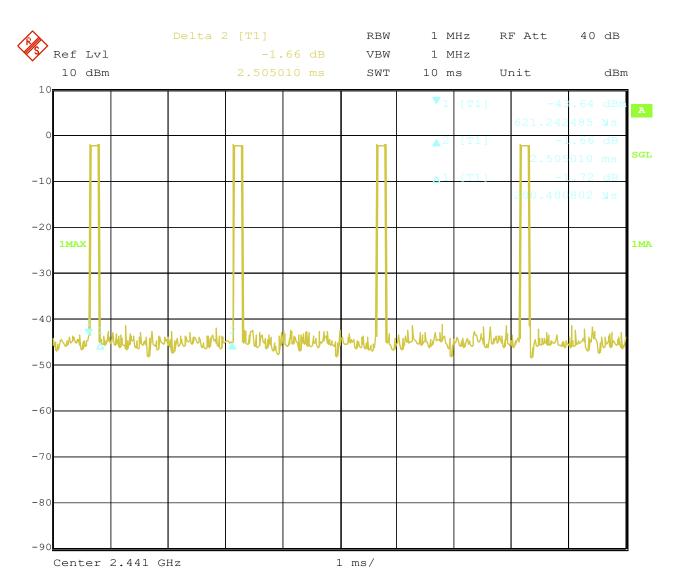

15.JAN.2021 13:44:17 Date:

Page 51 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

DH5

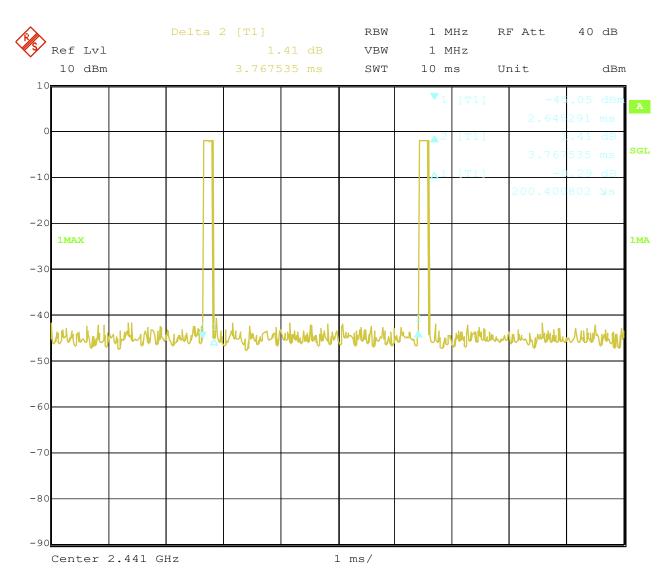

15.JAN.2021 13:44:59 Date:

Report No.: TW2012217-02E

Date: 2021-01-16



Page 52 of 80

Test Result

Type of Modulation: $\pi/4D$ -QPSK

EUT	Tabl	Tablet POS		H	M628N			
Mode	Keep Tr	Keep Transmitting Input		D	C7.6V			
Temperatur	e 24 c	deg. C, Humidity		50	6% RH			
Channel	Reading	Hoping	Hoping Rate		Limit			
	DH1							
Middle	0.200ms	800 l	nop/s	0.064s	0.4s			
			DH3					
Middle	0.200ms	400 h	400 hop/s		0.4s			
DH5								
Middle	0.200ms	266.66	7 hop/s	0.021s	0.4s			

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 53 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

2DH1

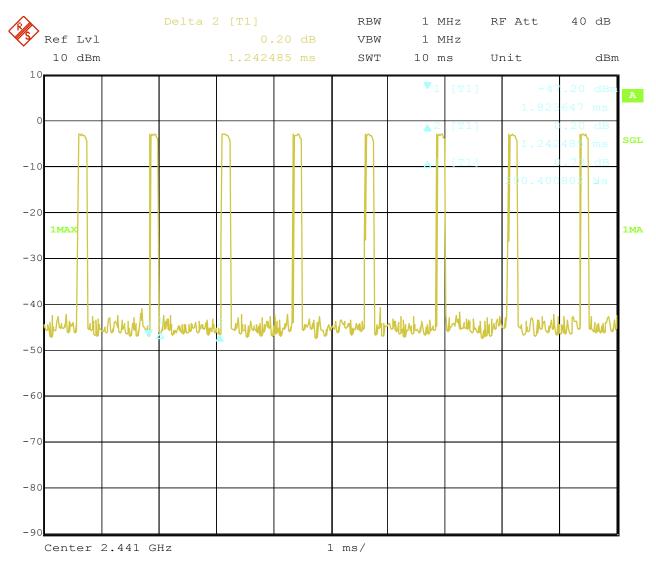

Date: 15.JAN.2021 13:49:18

Page 54 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

2DH3

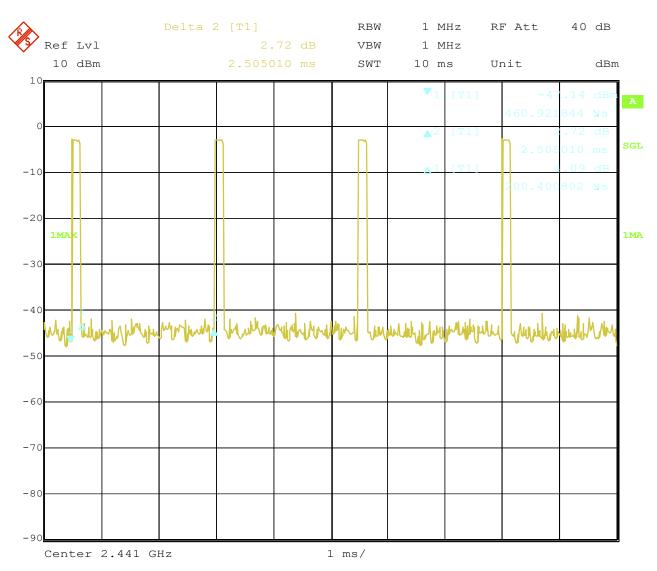

15.JAN.2021 13:50:04 Date:

Page 55 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

2DH5

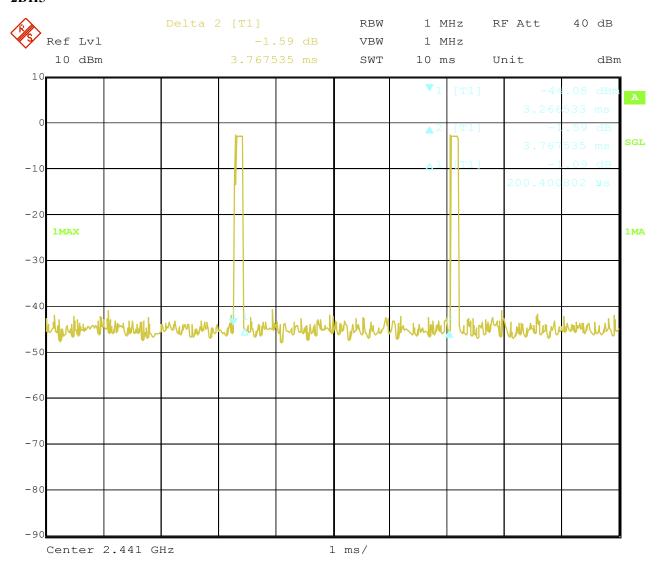

Date: 15.JAN.2021 13:50:45 Report No.: TW2012217-02E Page 56 of 80

Date: 2021-01-16



Type of Modulation: 8DPSK

EUT	Tablet POS		Model	H	IM628N				
Mode	Keep Transmitting		Input Voltage	I	DC7.6V				
Temperature	24 d	eg. C,	Humidity	5	56% RH				
Channel	Reading	Hoping	Hoping Rate		Limit				
	DH1								
Middle	0.200ms	800 h	nop/s	0.064s	0.4s				
			DH3						
Middle	0.200ms	400 h	400 hop/s		0.4s				
DH5									
Middle	0.200ms	266.667	7 hop/s	0.021s	0.4s				

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 57 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

3DH1

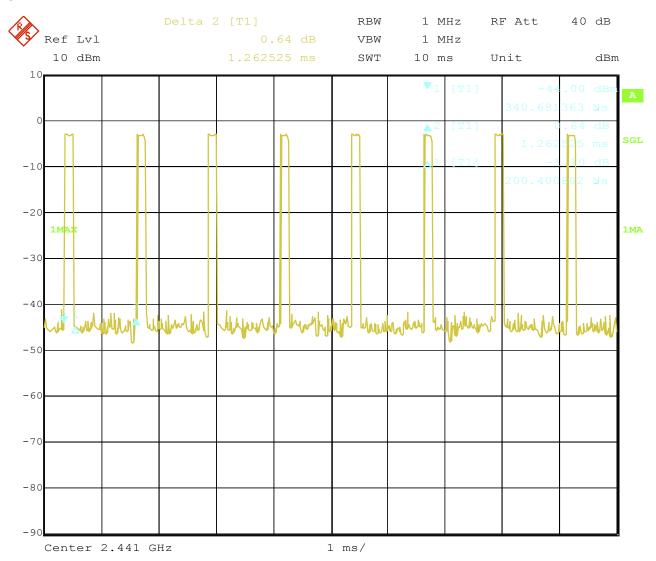

Date: 15.JAN.2021 13:51:42

Page 58 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

3DH3

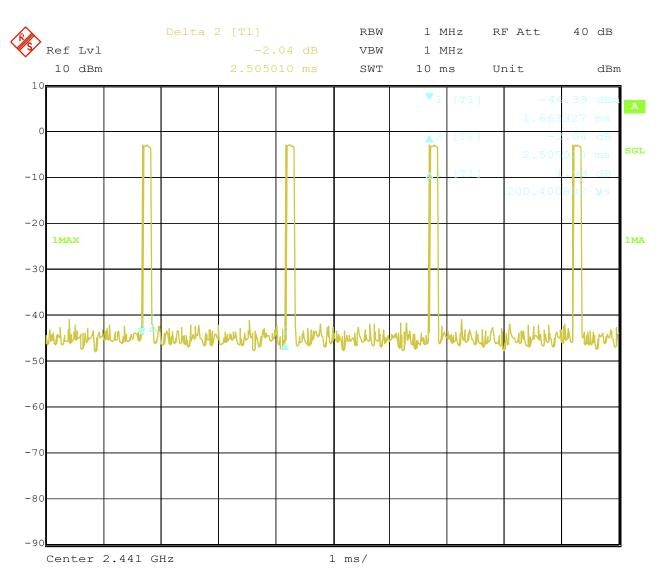

15.JAN.2021 13:52:38 Date:

Page 59 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



Test Plots:

3DH5

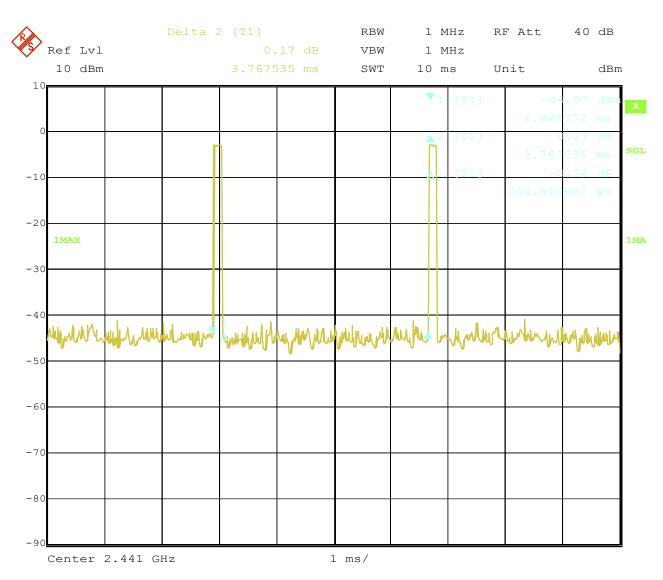

15.JAN.2021 13:53:28 Date:


Report No.: TW2012217-02E Page 60 of 80

Date: 2021-01-16



12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule. 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 61 of 80 Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Tablet POS	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

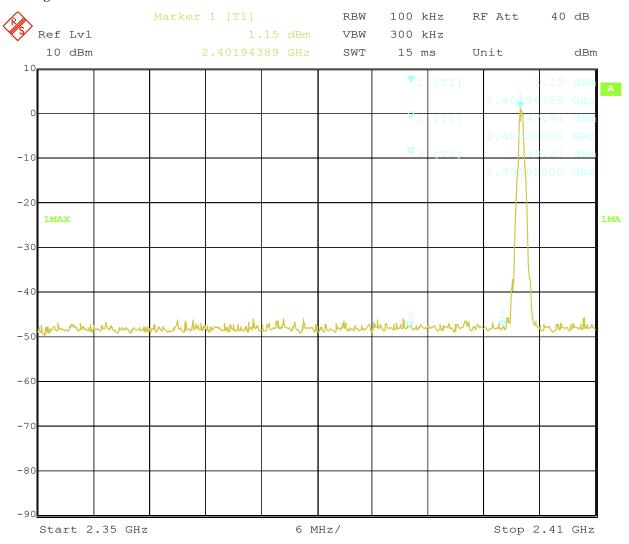

Date: 15.JAN.2021 13:06:34

Page 62 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Tablet POS	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

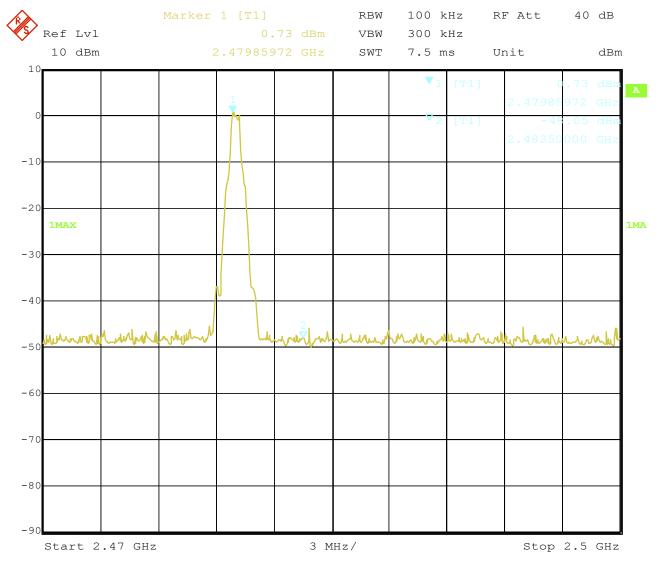

15.JAN.2021 Date: 13:11:56

Page 63 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: GFSK

Band Edge Test Result

Product:	Tablet POS	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

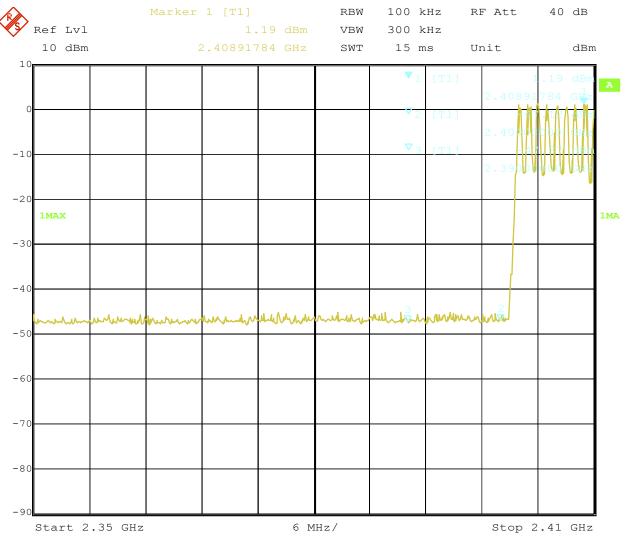

Date: 15.JAN.2021 13:05:59

Page 64 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: GFSK

Band Edge Test Result

Product:	Tablet POS	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

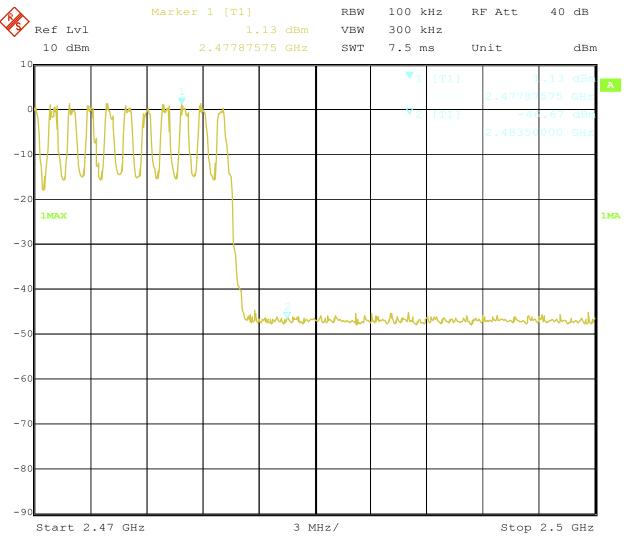

Date: 15.JAN.2021 13:03:26

Page 65 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: $\sqrt{1/4}$ D-QPSK

Out of Band Test Result 12.4

Product:	Tablet POS	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperat	24 deg. C	Humidity	56% RH
ure			
Test	Pass	Detector	PK
Result:			

Test Figure:

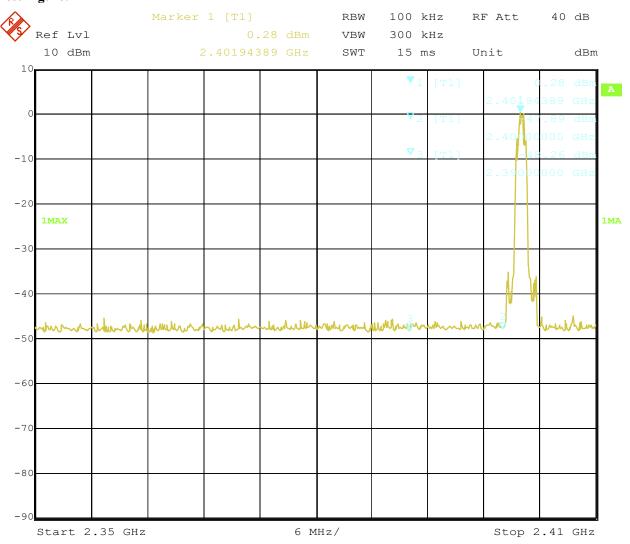

15.JAN.2021 13:07:29 Date:

Page 66 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: Л/4D-QPSK

Band Edge Test Result

Product:	Tablet POS	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

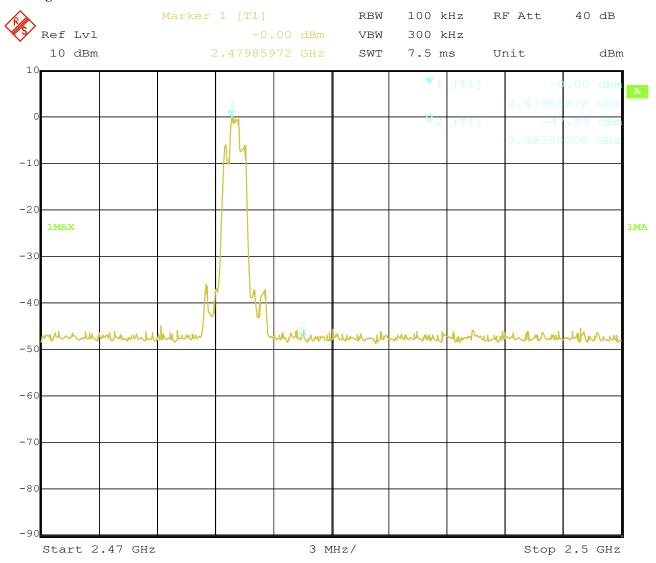

15.JAN.2021 13:11:28 Date:

Page 67 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: Л/4D-QPSK

Out of Band Test Result

Product:	Tablet POS	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

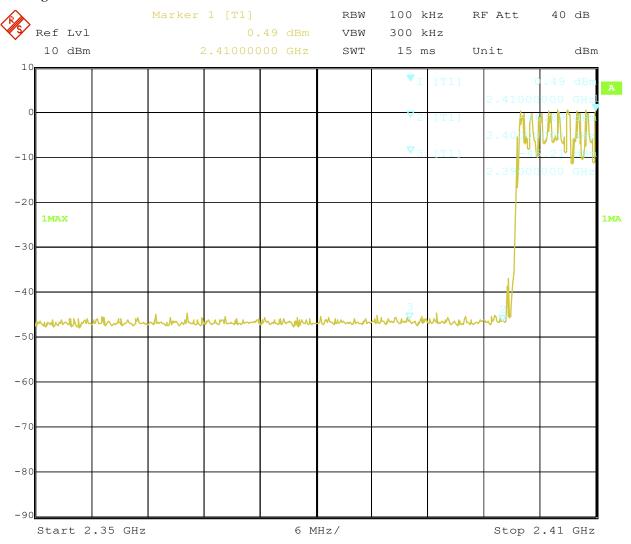

Date: 15.JAN.2021 11:19:02

Page 68 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: $\pi/4D$ -QPSK

Out of Band Test Result

Product:	Tablet POS	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

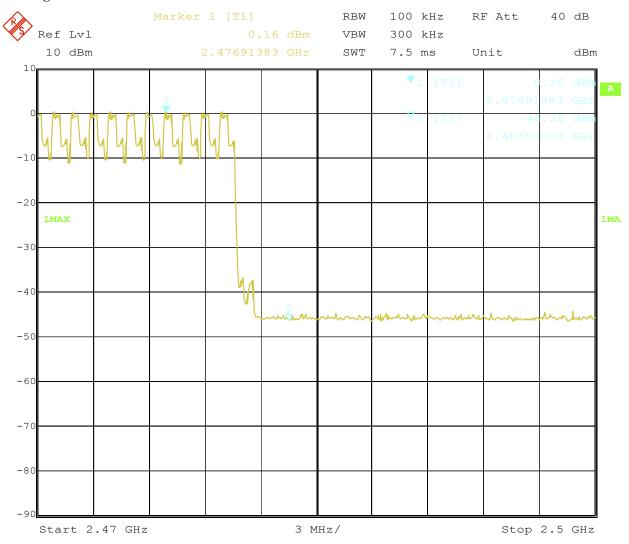

Date: 15.JAN.2021 12:59:29

Page 69 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	Tablet POS	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

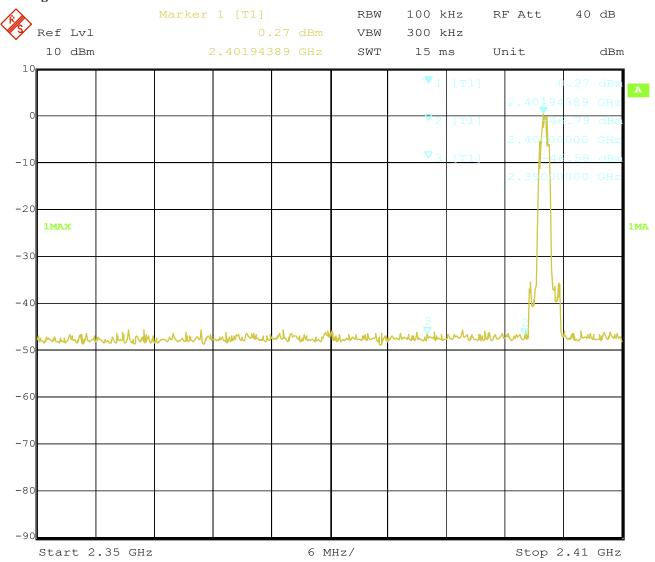

Date: 15.JAN.2021 13:08:29

Page 70 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: 8DPSK

Band Edge Test Result 12.4

Product:	Tablet POS	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

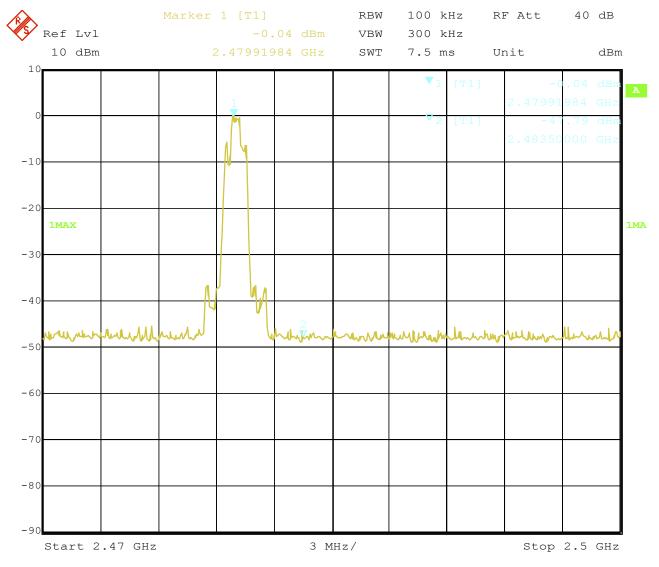

15.JAN.2021 Date: 13:10:04

Page 71 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Tablet POS	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

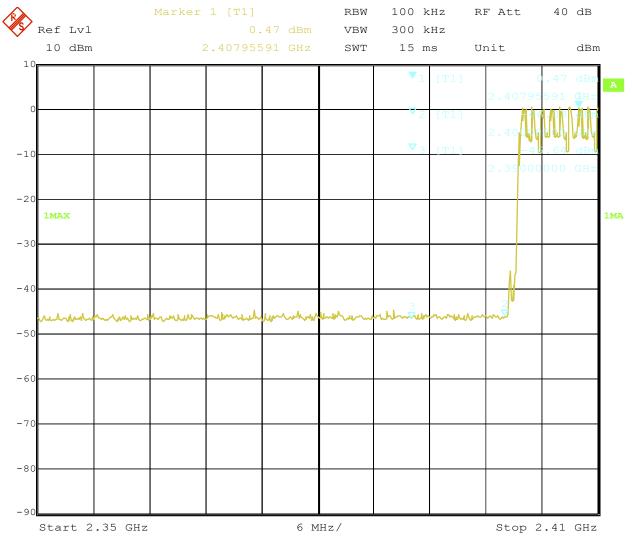

Date: 15.JAN.2021 11:14:16

Page 72 of 80

Report No.: TW2012217-02E

Date: 2021-01-16




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Tablet POS	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC7.6V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

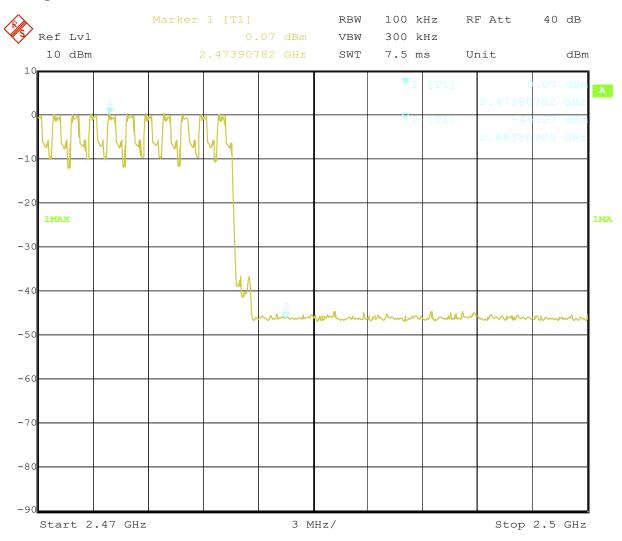


Date: 15.JAN.2021 11:02:47 Report No.: TW2012217-02E Page 73 of 80

Date: 2021-01-16



12.4 Restrict Band Measurement

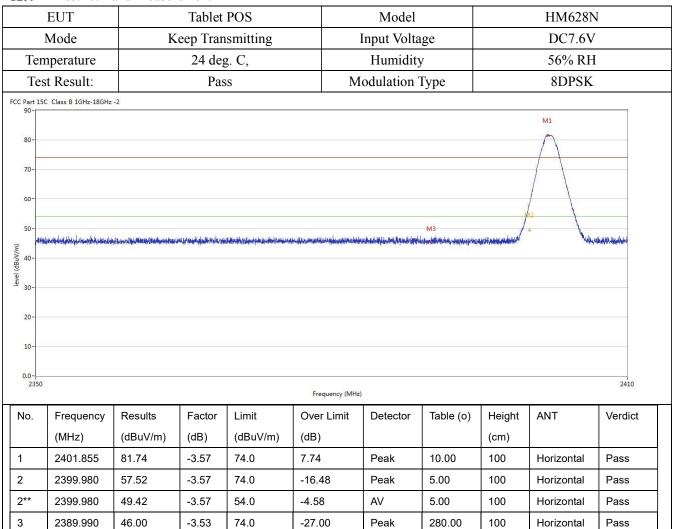

Report No.: TW2012217-02E Page 74 of 80

Date: 2021-01-16



12.4 Restrict Band Measurement


2.4 KCS			TC 11 4	DOG		N		т.	IN COONT	
EUT			Tablet			Model			IM628N	
Mode Temperature		Keep Transmitting 24 deg. C,		Input Voltage Humidity			DC7.6V			
						56% RH				
Test Resu	ult:		Pas	S	Mod	ulation Typ	ne	:	8DPSK	
Part 15C Class B 1	1GHz-18GHz	-2								
80-									M1	
70-										
60-										
									1	
50-	in follows and a	er foreign der fill foreign eine er geben der fil der seit foreign der fill fill der seit foreign der fill der	in Hinnymine with him	والتجاد بالمبار متدخه مطيط بالمعينوان	and a complete of the state of	Martin Marily or Advantage	M3	MA Angelogical	· ·	Varagitales lighter
mind the distribution of health	in the last of the contract of	aalgu ku mahtilli kuigu maineeste kisekaasigi durin	in desiration was done	de de la companya de	had a complete to the standard property	ed the head will probable		***************************************	\	aranginhaidaw
40-	indoklara puni	mtyukumbilifiniyan inanayisiminiyek atri	in diniquine with don	adurentin, antoblements	ni de escaphique de l'estant de sigle est différent de sigle est différent de sigle est différent de sigle est	afetenientische den		Alia di ministra de propied	\	romanish lide
40-	ing property and an extension of the second	માં કુતાના કરેલી હિંદુ કુતાને લગ્ન હતા	an de en gregorie de cale	akerodin, an olih obselj.	ni e e e e e e e e e e e e e e e e e e e	alle de ser in comingo de la comingo de		A 2		wongahhidaw
40- 30- 10-	in the delaya produced	ntsukumbilifakuminnakesimusepkatan	ien diensetzwijn wezie derek	akkerodine, wirkskil werely.	na de a como de la de la foliação de selector de la foliação de la foliação de la foliação de la foliação de l La foliação de la foliação de	<u>ماران در این این این این این این این این این این</u>				iron girişke iğine
40- 30-	indo di de La provinci	nolyskymikilijka, poviensky kolenny kolen	ien deinschen geschen der	akkerendine, som oksludbedle	Frequency (MHz)					2410
30- 20- 10- 2350	uency	Results	Factor	Limit				Height	ANT	
30- 20- 10- 2350	uency				Frequency (MHz)		ki fadja casa Antana Antana Kalina ya kuna			2410
30- 20- 10- 2350	uency z)	Results	Factor	Limit	Frequency (MHz) Over Limit		ki fadja casa Antana Antana Kalina ya kuna	Height		2410
30- 20- 10- 2350 No. Frequency (MHz	uency z)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (MHz) Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	2410 Verdict
30- 20- 10- 2350 No. Frequ (MHz	uency z) 2.110 0.995	Results (dBuV/m) 77.18	Factor (dB) -3.57	Limit (dBuV/m) 74.0	Frequency (MHz) Over Limit (dB) 3.18	Detector Peak	Table (o)	Height (cm)	ANT Vertical	Verdict Pass

Page 75 of 80 Report No.: TW2012217-02E

Date: 2021-01-16



12.4 Restrict Band Measurement

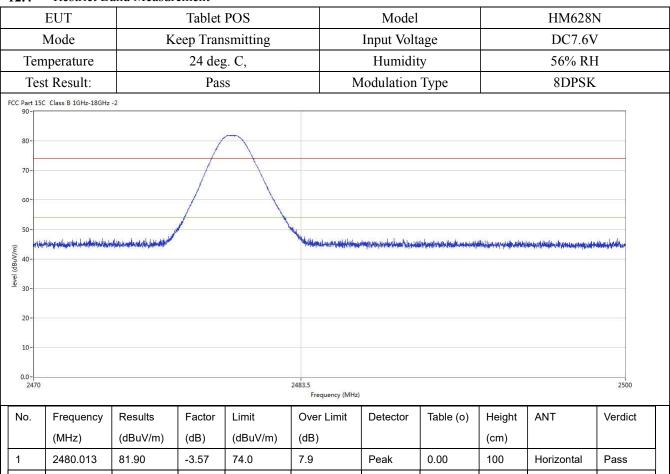

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2480.013	81.90	-3.57	74.0	7.9	Peak	0.00	100	Horizontal	Pass
2	2483.695	47.49	-3.57	74.0	-26.51	Peak	1.00	100	Horizontal	Pass

Page 76 of 80

Report No.: TW2012217-02E

Date: 2021-01-16



Restrict Band Measurement 12.4

	EUT		Tablet	POS		Model			HM6281	1
	Mode	K	eep Tran	smitting		Input Volta	ge		DC7.6V	r
Ten	nperature		24 deg	g. C,		Humidity	7		56% RH	[
Tes	st Result:		Pas	S	M	odulation [Гуре		8DPSK	
FCC Part 150	C Class B 1GHz-18GHz	-2								
80-				~~						
70-										
60-				1						
				1						
PI.	who had and desirate was been		Halde	-	المعامدين والمانال والمرافطة المانا	HAMMAN COLOR	to an analysis by the first		·	State Barbara And
level (dBuV/m)										
p) level (d										
- 20-										
30-										
30-										
30-										
20-										
20-					2483.5 Frequency (MHz)					2500
20-					2483.5 Frequency (MHz)					2500
20-		Results	Factor	Limit		Detector	Table (o)	Height	ANT	2500 Verdict
20-	Frequency (MHz)	Results (dBuV/m)	Factor (dB)		Frequency (MHz)	Detector	Table (o)	Height (cm)	ANT	
20-	Frequency			Limit	Over Limit	Detector	Table (o) 67.00	_	ANT Vertical	

Note: 1. For Restricted band test, All modulation mode was tested and only the worst case was reported.

2. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: TW2012217-02E

Date: 2021-01-16



Page 77 of 80

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral antenna used. The gain of the antennas is 1.48dBi.

Report No.: TW2012217-02E Page 78 of 80

Date: 2021-01-16




14.0 FCC ID Label

FCC ID: GQK-HM628N

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

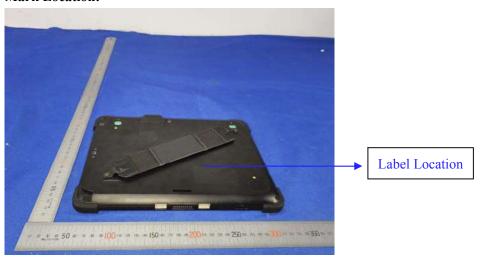

Page 79 of 80


Report No.: TW2012217-02E

Date: 2021-01-16



15.0 **Photo of testing**

Conducted Emission Test Setup:

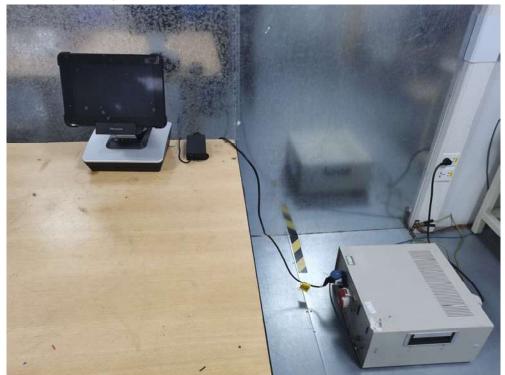


Report No.: TW2012217-02E

Date: 2021-01-16



Radiated Emission Test Setup:

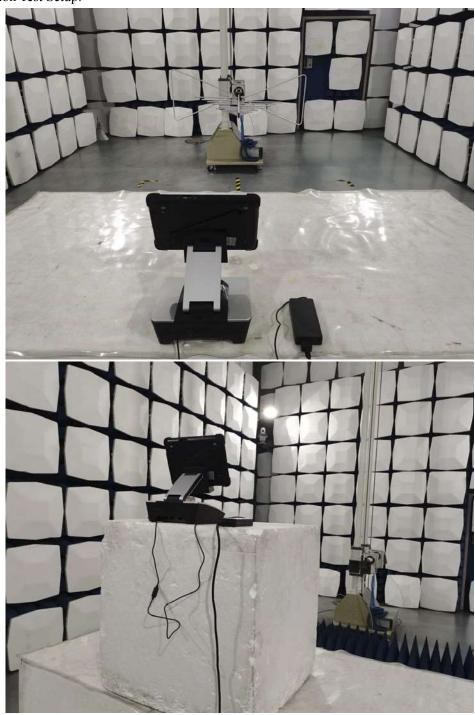

Photographs - EUT

Please refer test report TW2012217-01E

-- End of Report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to