

TEST REPORT

Applicant Name: JINGSHAN JINGYANG ELECTRONICS CO., LTD
Address: Group 1, Sanyang Village, Sanyang Town, Jingshan City,
Jingmen City, Hubei Province, China
Report Number: 2401X27023E-RF-00
FCC ID: 2BFYM-SBI002

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Chrome Circle Mouse Asrt
Model No.: PCEA-1216-BK
Multiple Model(s) No.: PCEA-1216-GL, PCEA-1216-PK, PCEA-1216-BL, SBI002
Trade Mark: Prime Audio
Date Received: 2024/09/25
Issue Date: 2024/11/20

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Michelle Zeng

Michelle Zeng
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.247 (I), §1.1307(B)(3)(I)(A)&§2.1093 - RF EXPOSURE	12
APPLICABLE STANDARD	12
RESULT	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.205, §15.209&§15.247(D) – RADIATED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	16
FACTOR & OVER LIMIT/MARGIN CALCULATION	16
TEST DATA	16
FCC §15.247(A) (1) - CHANNEL SEPARATION TEST	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39
FCC §15.247(A) (1) - 20DBEMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	42
FCC §15.247(A) (1) (III) - QUANTITY OF HOPPING CHANNEL TEST	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45

FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST DATA	50
FCC §15.247(D) - BAND EDGES TESTING.....	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST DATA	52
EUT PHOTOGRAPHS.....	55
TEST SETUP PHOTOGRAPHS	56

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401X27023E-RF-00	Original Report	2024/11/20

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Chrome Circle Mouse Asrt
Tested Model	PCEA-1216-BK
Multiple Model(s)	PCEA-1216-GL, PCEA-1216-PK, PCEA-1216-BL, SBI002
UPC number	195207091897, 195207091903, 195207091910, 195207091927, 195207102913
SKU number	9158288
Frequency Range	2402-2480MHz
Maximum conducted peak output power	-5.14dBm
Modulation Technique	GFSK
Antenna Specification [#]	3.55dBi (provided by the applicant)
Voltage Range	DC 1.5V from battery
Sample serial number	2S3I-3 for RF Conducted Test 2S3I-1 for Radiated Emissions (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note: The multiple models are electrically identical with the test model except for color and model name. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9 kHz~150 KHz	3.63dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel list

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461	/	/

Channel 1, 40, 79 was tested.

EUT Exercise Software

“FCC-test-tool.exe”[#] exercise software was used and the power level is Default[#]. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From/Port	To
/	/	/	/

Block Diagram of Test Setup

Radiated Emission Test_ Below 1GHz:

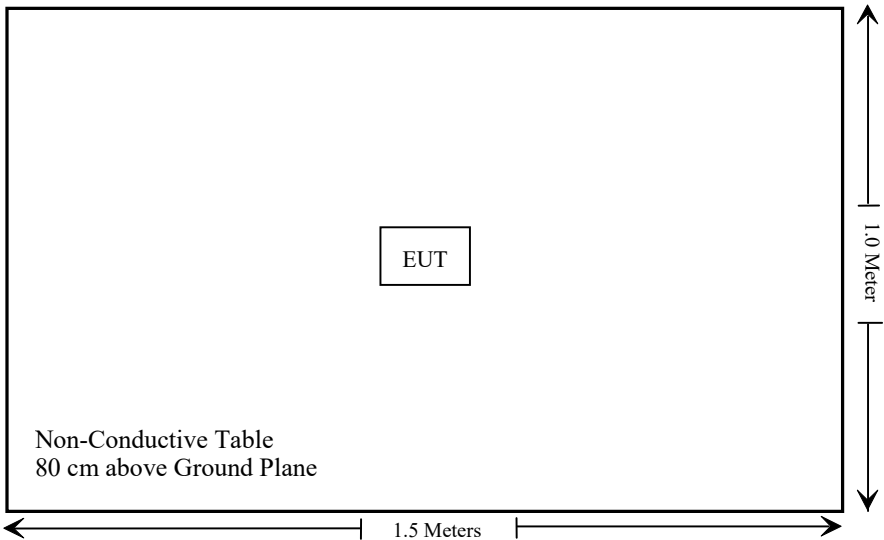

Radiated Emission Test_ Above 1GHz:

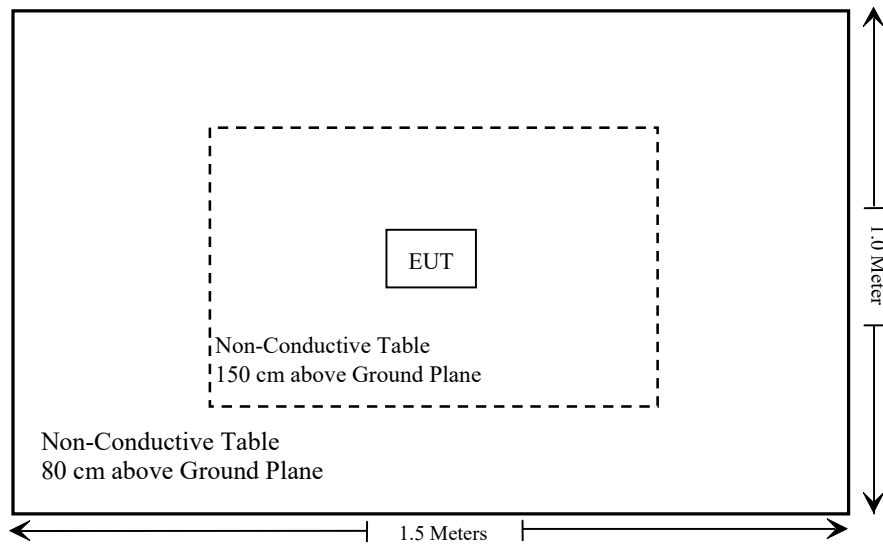

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1307(b)(3)(i)(A)&§2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20dBEmission Bandwidth&99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

Not Applicable: The EUT is powered by battery, so this test item is not required.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Unknown	Cable	PNG214	1354	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200982	2023/12/18	2024/12/17
MARCONI	10dB Attenuator	6534/3	2942	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307(b)(3)(i)(A)&§2.1093 - RF EXPOSURE**Applicable Standard**

According to FCC §2.1093 and §1.1307(b)(3), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance

1-mW Test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

Result**For worst case:**

Frequency (MHz)	Maximum Tune up conducted power [#] (dBm)	Antenna Gain [#] (dBi)	Maximum ERP (dBm)		Exemption Limit (mW)	Test Exemption
			dBm	mW		
2402-2480	-5.00	3.55	-3.6	0.44	1	Yes

Note: The tune up conducted power[#] and antenna gain[#] was declared by the applicant.

Result: Compliant

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has a PCB antenna arrangement which was permanently attached and the antenna gain[#] is 3.55dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant


FCC §15.205, §15.209&§15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)


EUT Setup

9 kHz-30MHz:

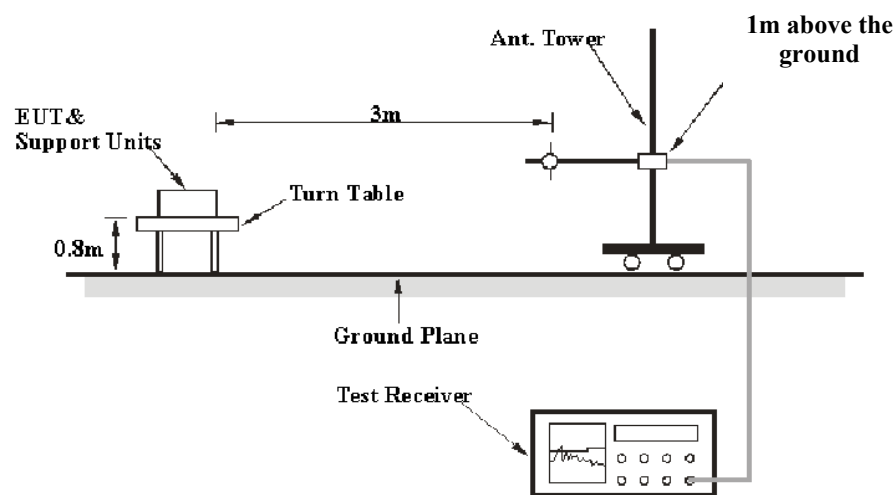

30MHz-1GHz:

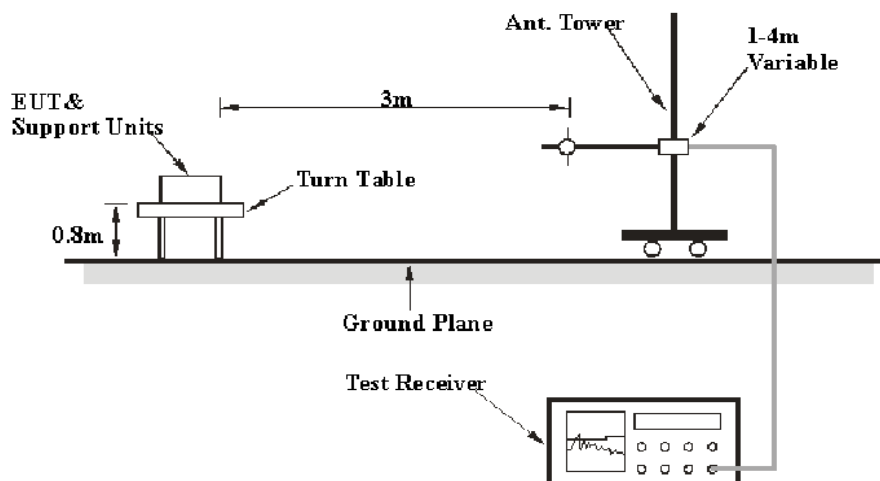

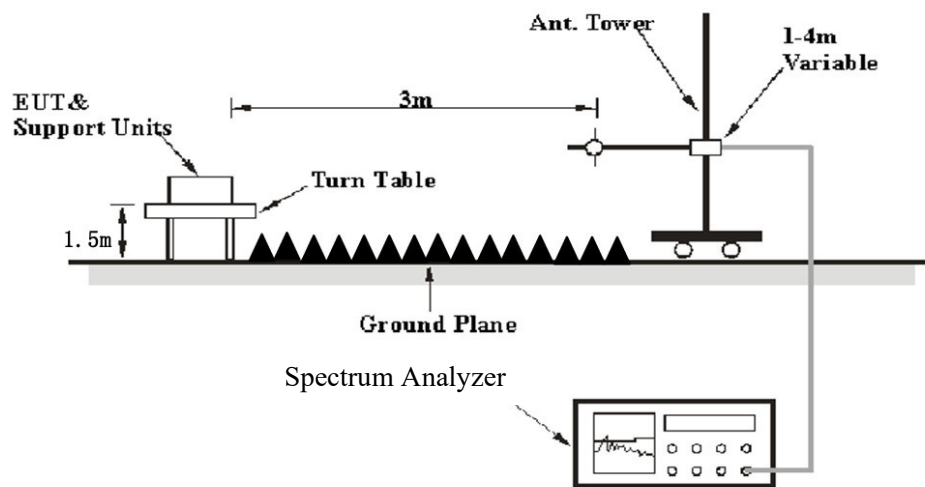Above 1GHz:

The radiated emission tests were performed in the 3meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	Harmonics			
	1MHz	3 MHz	/	PK
	Average Emission Level=Peak Emission Level+20*log(Duty cycle)			
	Band Edge & Other Emissions			
	1MHz	3 MHz	/	PK
	1MHz	≥10 Hz	/	Average

For Duty cycle measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$,

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulse, etc.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	21~25.2 °C
Relative Humidity:	42~50 %
ATM Pressure:	101 kPa


The testing was performed by Carl Zhu on 2024-10-28 for below 1GHz and Karl Xu on 2024-11-06 and 2024-11-15 for above 1GHz.

EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Z-axis of orientation was recorded.


9 kHz-30MHz: (Maximum output power mode, Low Channel)

Parallel (worst case)

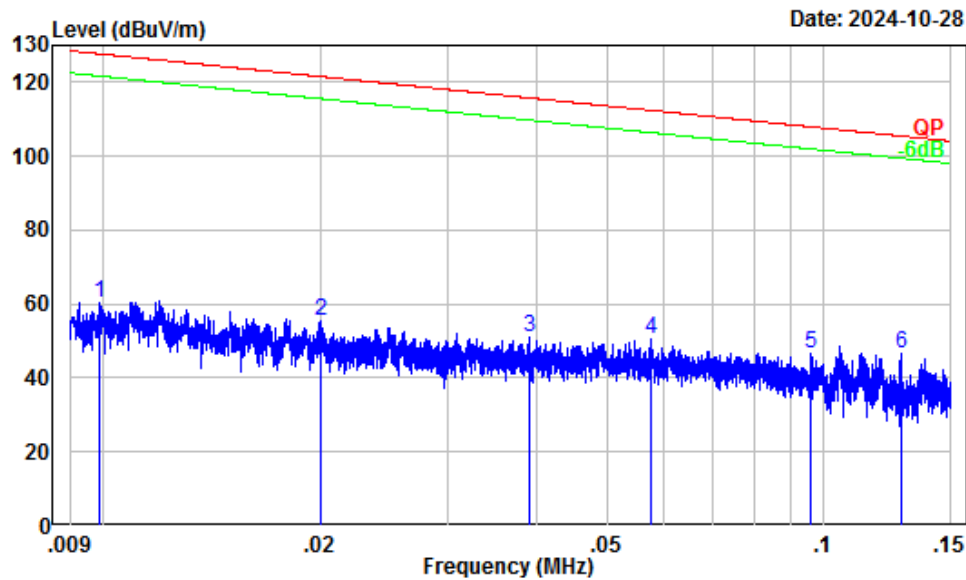

Site : Chamber A
Condition : 3m
Project Number: 2401X27023E-RF
Test Mode : Transmitting
Tester : Carl Zhu

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.32	28.20	60.52	127.68	-67.16 Peak
2	0.02	30.40	24.82	55.22	121.57	-66.35 Peak
3	0.04	27.55	23.38	50.93	115.78	-64.85 Peak
4	0.06	25.64	25.03	50.67	112.39	-61.72 Peak
5	0.10	22.28	24.32	46.60	107.95	-61.35 Peak
6	0.13	20.36	26.29	46.65	105.48	-58.83 Peak

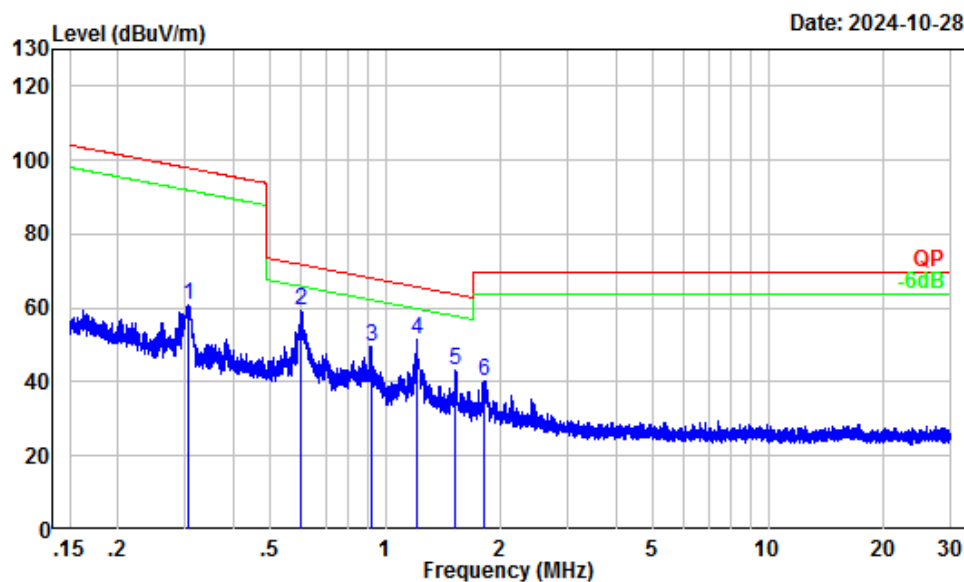


Site : Chamber A
 Condition : 3m
 Project Number: 2401X27023E-RF
 Test Mode : Transmitting
 Tester : Carl Zhu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.31	10.10	50.49	60.59	97.91	-37.32	Peak
2	0.60	5.11	54.02	59.13	71.94	-12.81	Peak
3	0.92	1.82	47.78	49.60	68.23	-18.63	Peak
4	1.21	0.62	50.67	51.29	65.80	-14.51	Peak
5	1.53	-0.28	43.29	43.01	63.72	-20.71	Peak
6	1.81	-1.07	41.45	40.38	69.54	-29.16	Peak

30MHz-1GHz: (Maximum output power mode, Low channel)


Horizontal

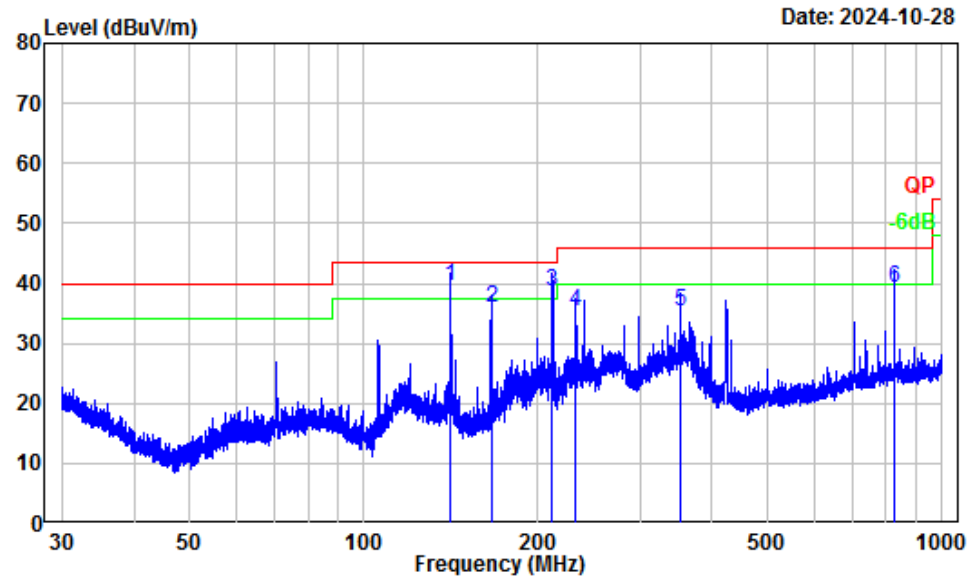

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401X27023E-RF
Test Mode : Transmitting
Tester : Carl Zhu

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	140.84	-11.89	51.48	39.59	43.50	-3.91	QP
2	166.29	-12.94	48.88	35.94	43.50	-7.56	QP
3	211.25	-14.07	52.73	38.66	43.50	-4.84	QP
4	232.84	-13.68	49.06	35.38	46.00	-10.62	QP
5	353.41	-10.06	45.43	35.37	46.00	-10.63	QP
6	825.32	-1.94	41.14	39.20	46.00	-6.80	QP

Vertical

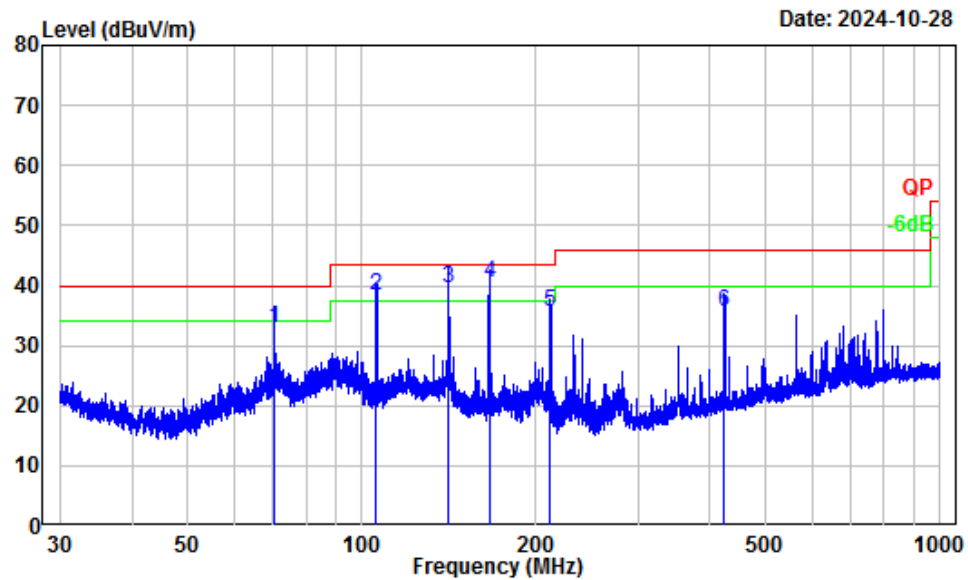

```
Site      : Chamber A
Condition : 3m Vertical
Project Number: 2401X27023E-RF
Test Mode : Transmitting
Tester    : Carl Zhu
```

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	70.68	-17.87	50.83	32.96	40.00	-7.04	QP
2	105.64	-14.24	52.60	38.36	43.50	-5.14	QP
3	140.96	-11.89	51.51	39.62	43.50	-3.88	QP
4	166.29	-12.94	53.37	40.43	43.50	-3.07	QP
5	211.25	-14.07	49.74	35.67	43.50	-7.83	QP
6	423.91	-7.89	43.59	35.70	46.00	-10.30	QP

Above 1GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
Low Channel(2402MHz)							
4804.00	69.54	PK	H	2.42	71.96	74	-2.04
4804.00	62.34	PK	V	2.42	64.76	74	-9.24
Middle Channel(2440MHz)							
4880.00	69.68	PK	H	2.58	72.26	74	-1.74
4880.00	63.13	PK	V	2.58	65.71	74	-8.29
High Channel(2480MHz)							
4960.00	70.02	PK	H	2.69	72.71	74	-1.29
4960.00	64.77	PK	V	2.69	67.46	74	-6.54

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude/Level = Corrected Factor + Reading

Margin = Corrected Amplitude /Level- Limit

Other emissions which were more than 20dB below limit or on noise floor level was not recorded.

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dB μ V/m)	Polar (H/V)	Duty Cycle Corrected Factor (dB)	Average Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel 2402MHz							
4804.00	71.96	H	-30.33	41.63	54	-12.37	Harmonic
4804.00	64.76	V	-30.33	34.43	54	-19.57	Harmonic
Middle Channel 2440MHz							
4880.00	72.26	H	-30.33	41.93	54	-12.07	Harmonic
4880.00	65.71	V	-30.33	35.38	54	-18.62	Harmonic
High Channel 2480MHz							
4960.00	72.71	H	-30.33	42.38	54	-11.62	Harmonic
4960.00	67.46	V	-30.33	37.13	54	-16.87	Harmonic


Note: Average level= Peak level+ Duty Cycle Corrected Factor

Margin = Average level - Limit


Worst case duty cycle:


Duty cycle = Ton/100ms = 0.4348*7/100=0.030436

Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.030436 = -30.33

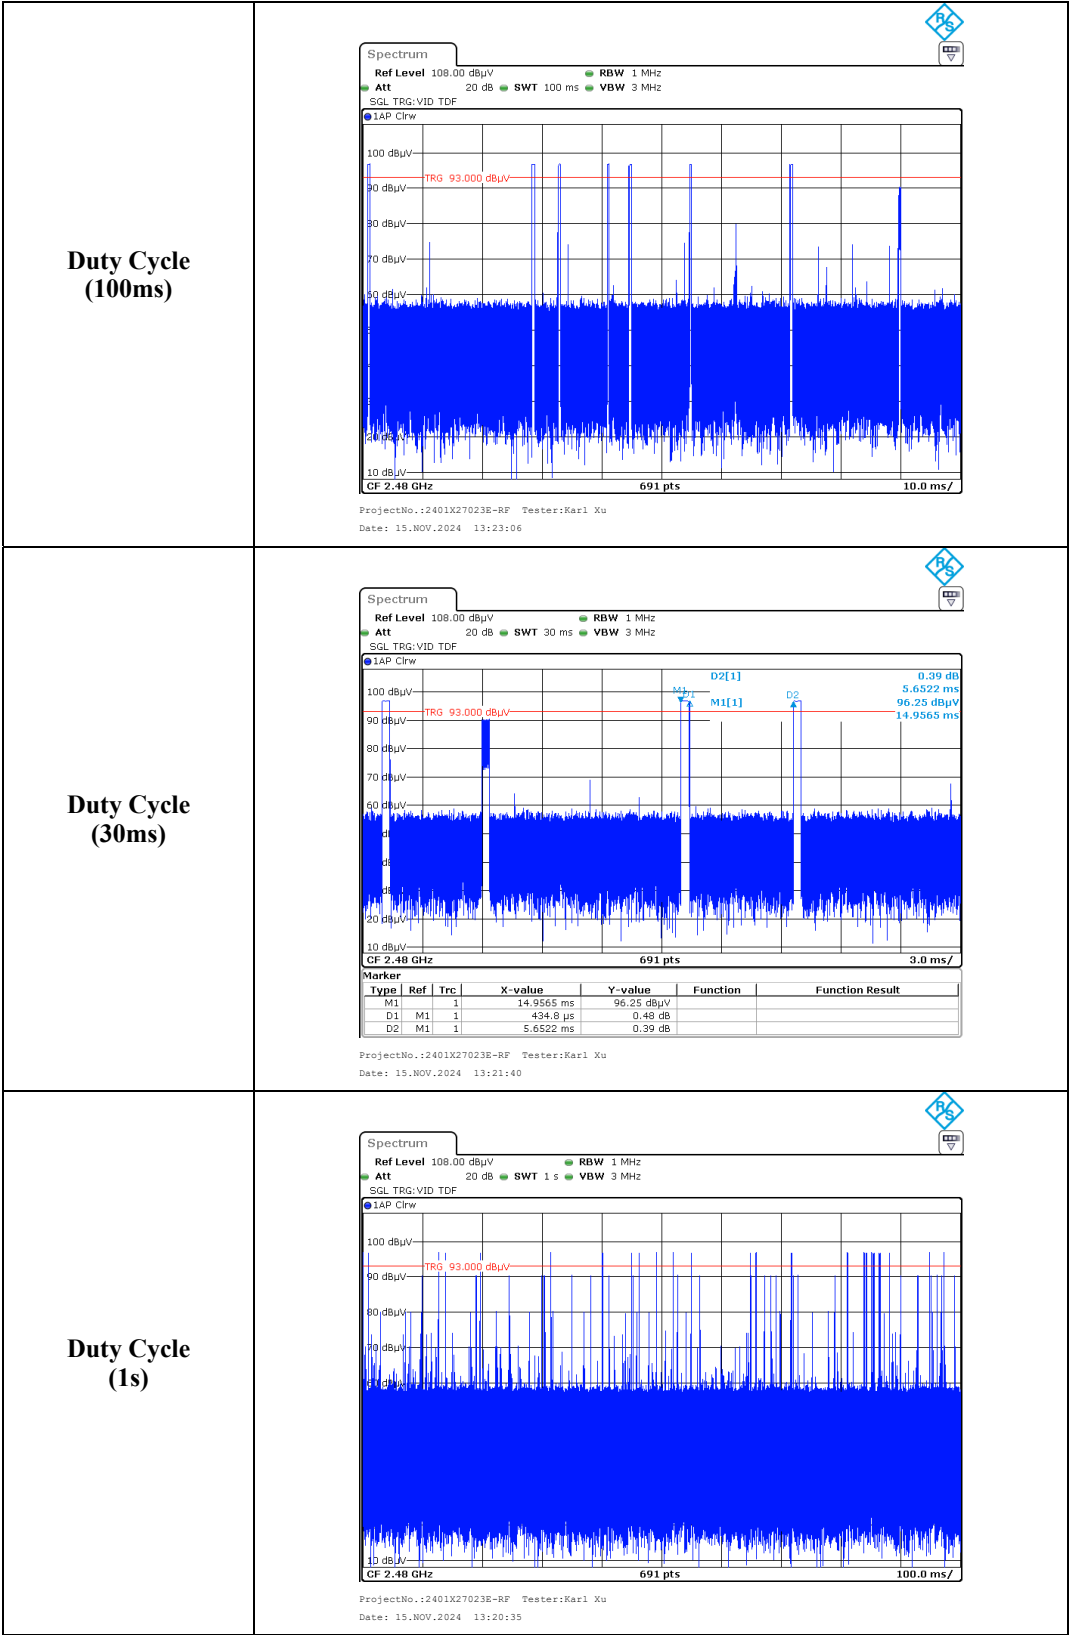

Test plots for Band Edge Measurements (Radiated):

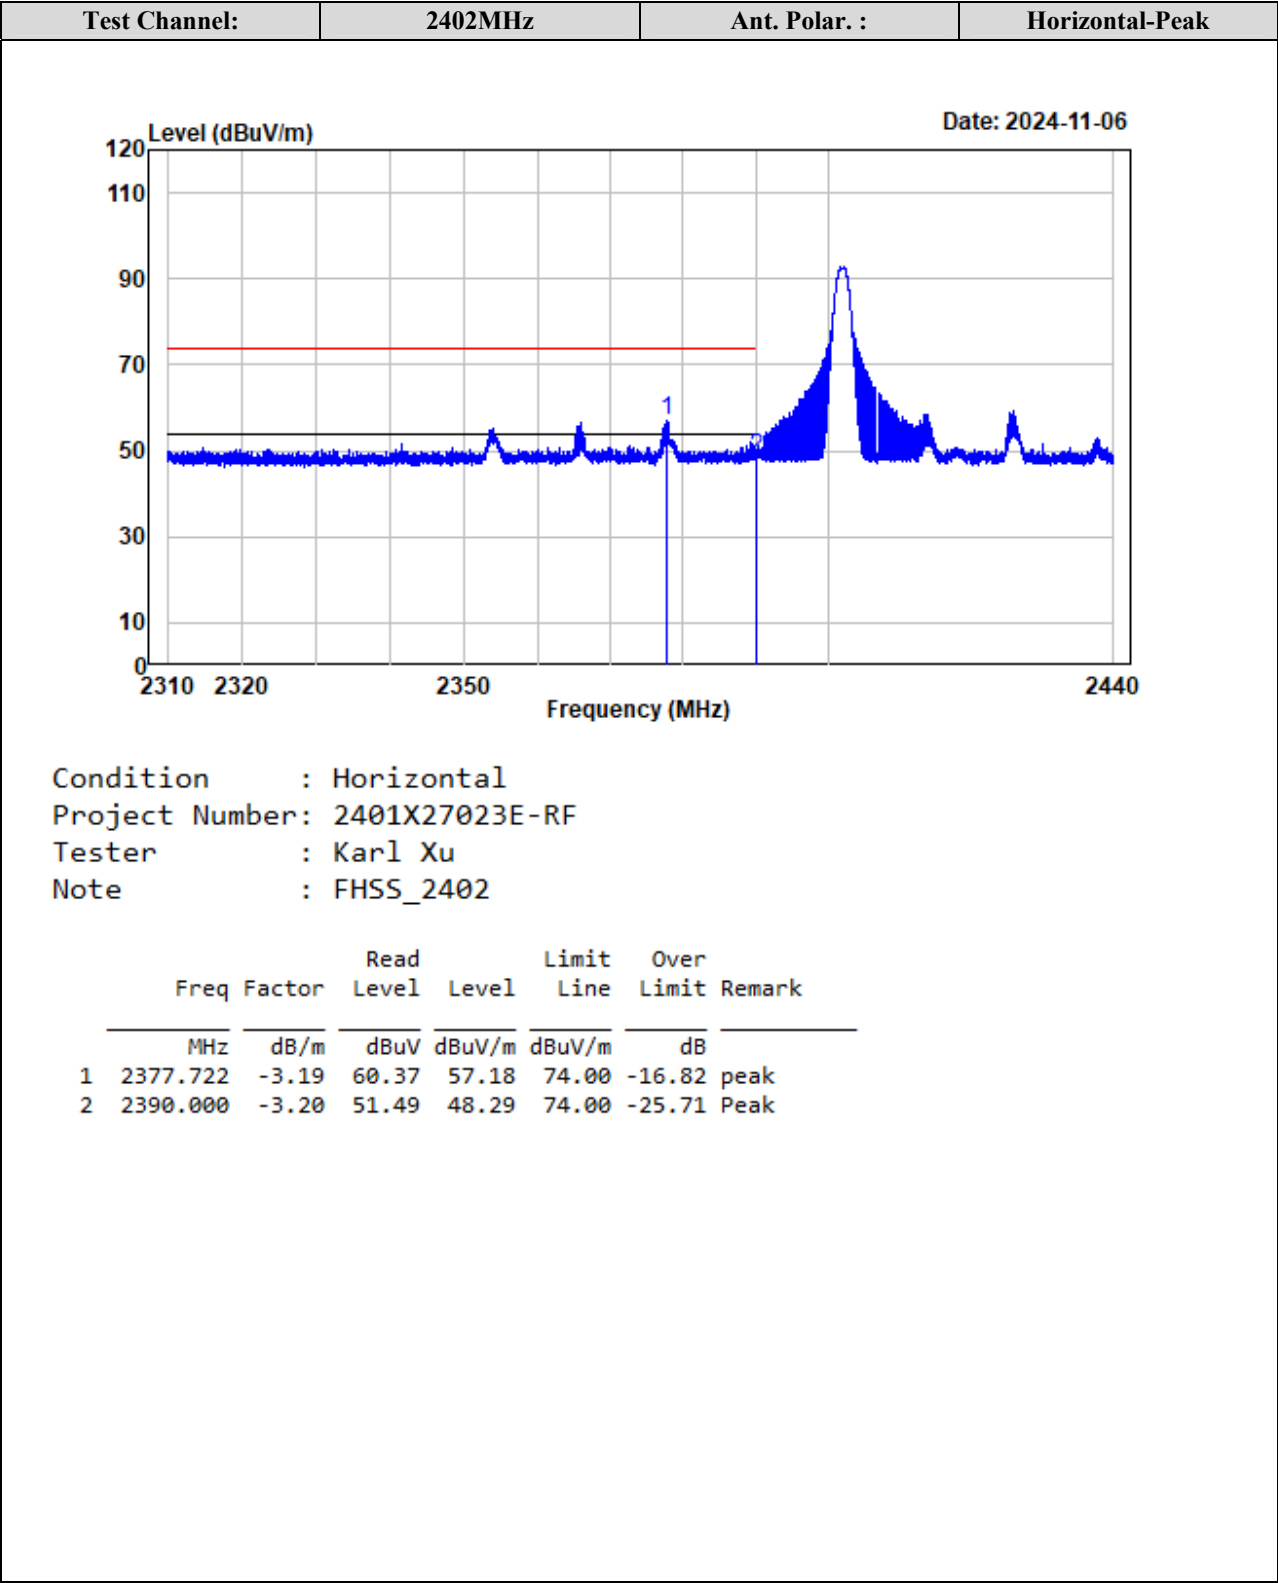

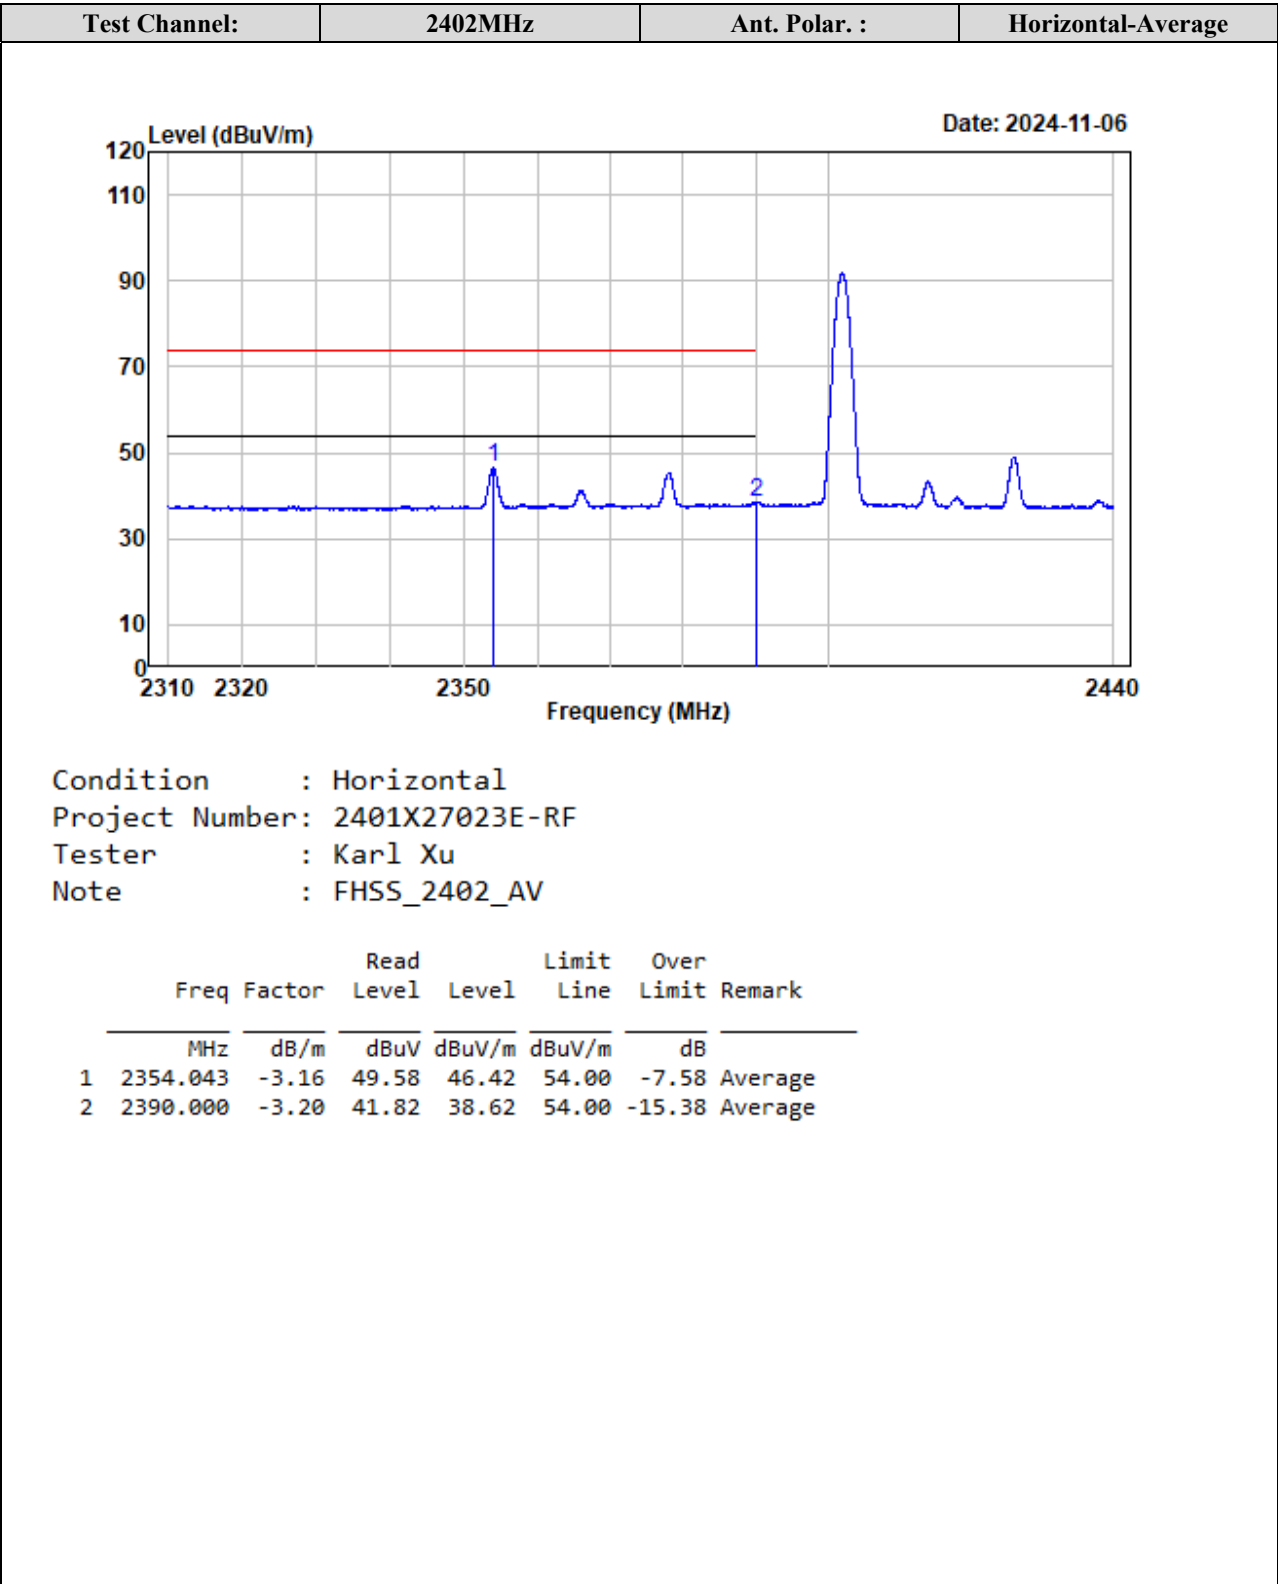


Note: Spectrum analyzer setting: RBW=1 MHz, VBW=5 kHz

Test Channel:

2402MHz

Ant. Polar. :

Vertical

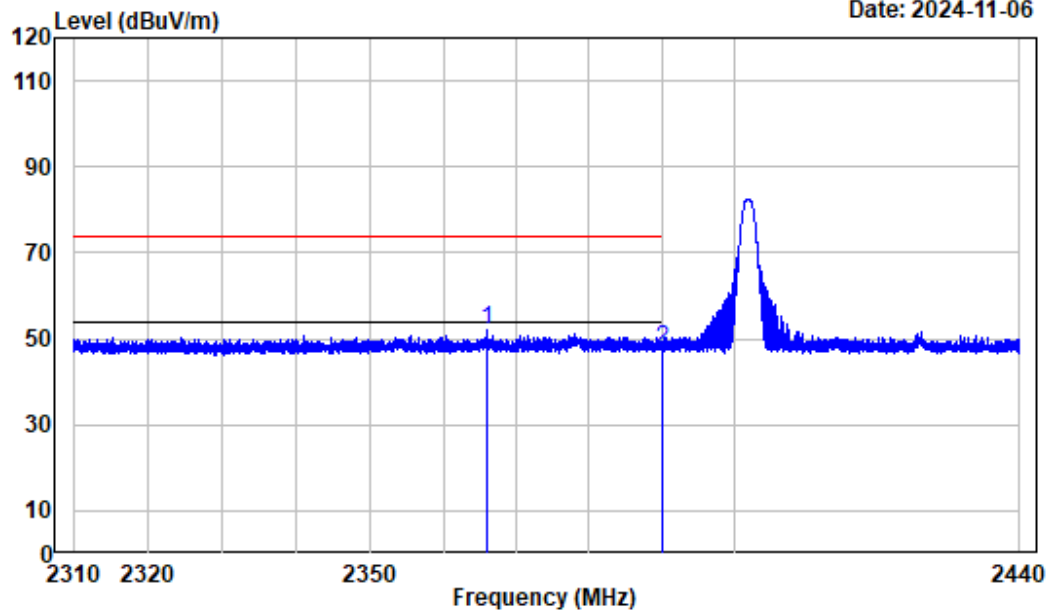

Condition : Vertical

Project Number: 2401X27023E-RF

Tester : Karl Xu

Note : FHSS_2402


		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2365.875	-3.16	55.24	52.08	74.00	-21.92 peak
2	2390.000	-3.20	50.94	47.74	74.00	-26.26 Peak

Test Channel:

2480MHz


Ant. Polar. :

Horizontal-Peak

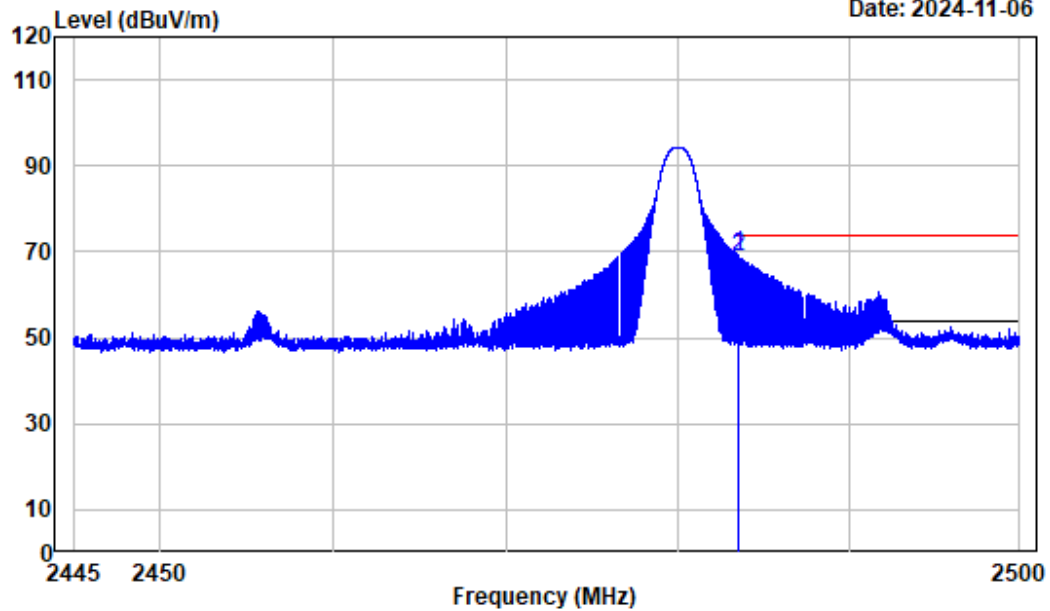



Condition : Horizontal
 Project Number: 2401X27023E-RF
 Tester : Karl Xu
 Note : FHSS_2480

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-3.17	72.57	69.40	74.00	-4.60	Peak
2	2483.539	-3.17	72.13	68.96	74.00	-5.04	peak

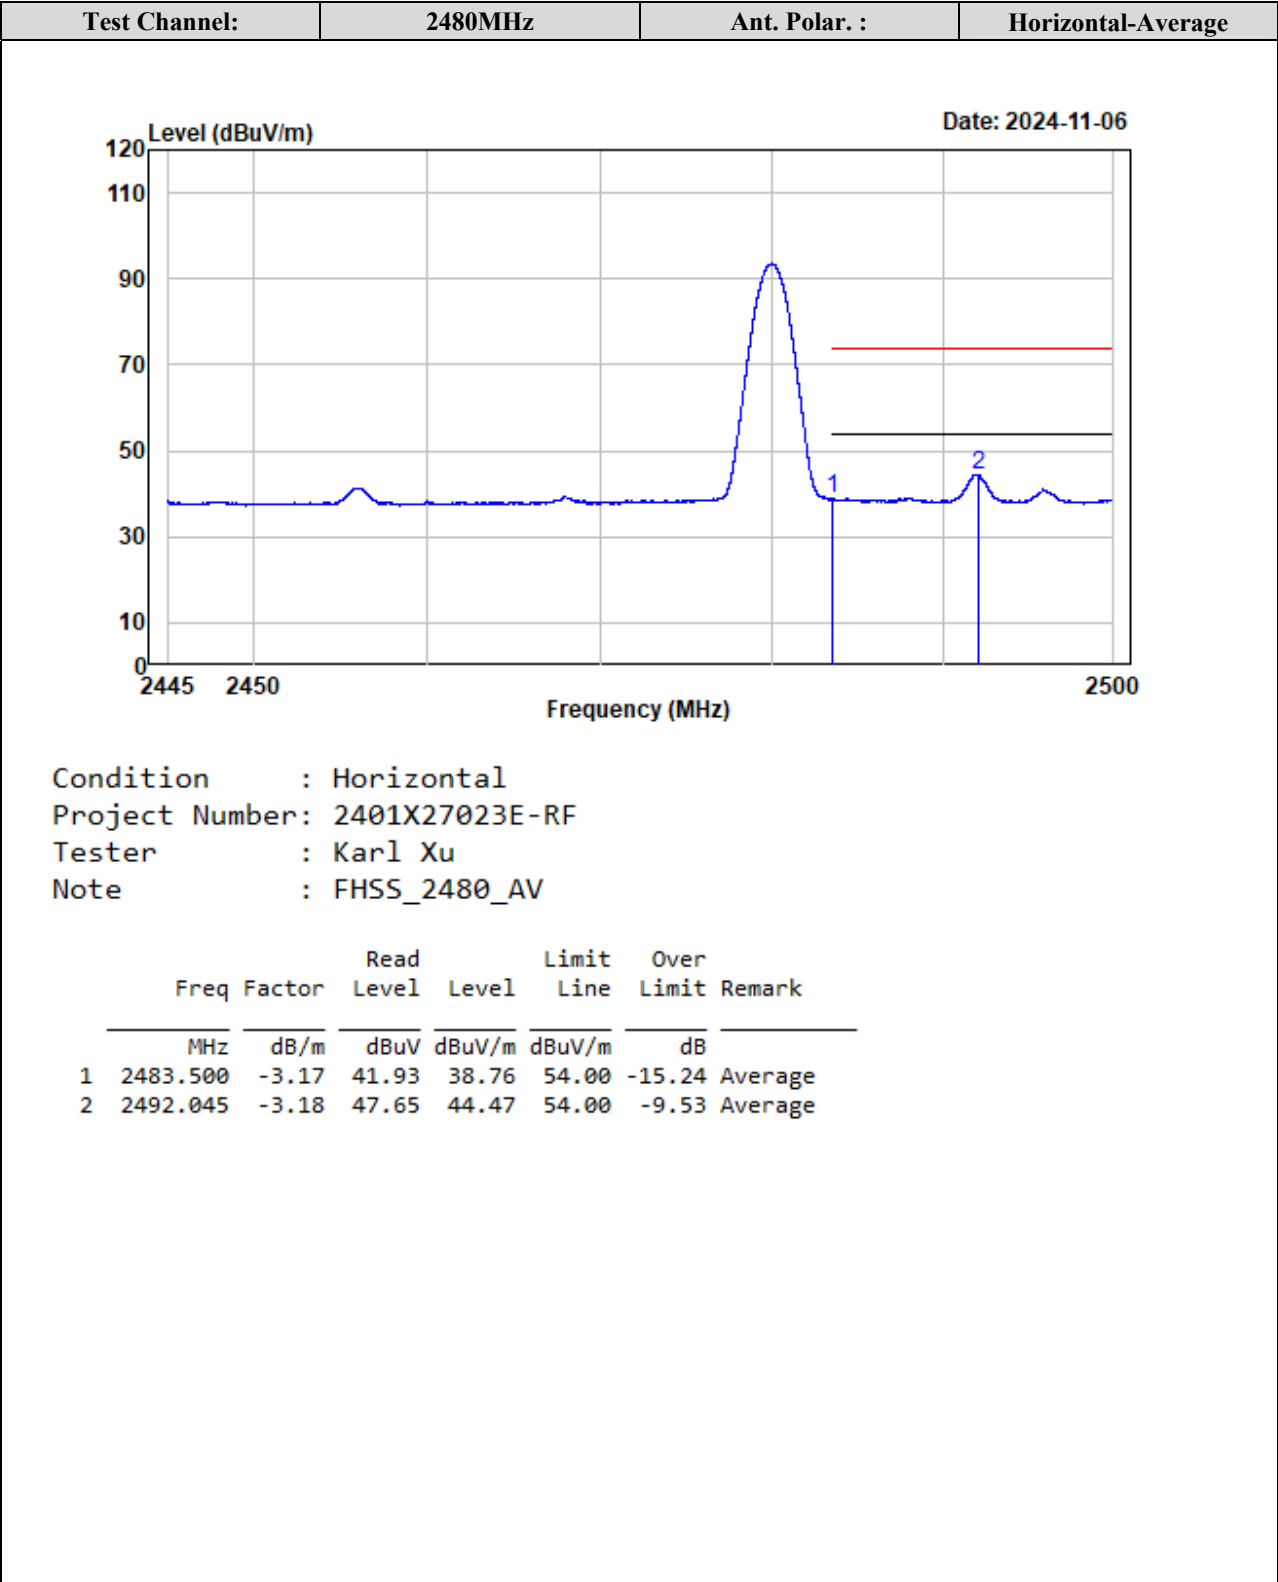


Note: Spectrum analyzer setting: RBW=1 MHz, VBW=5 kHz

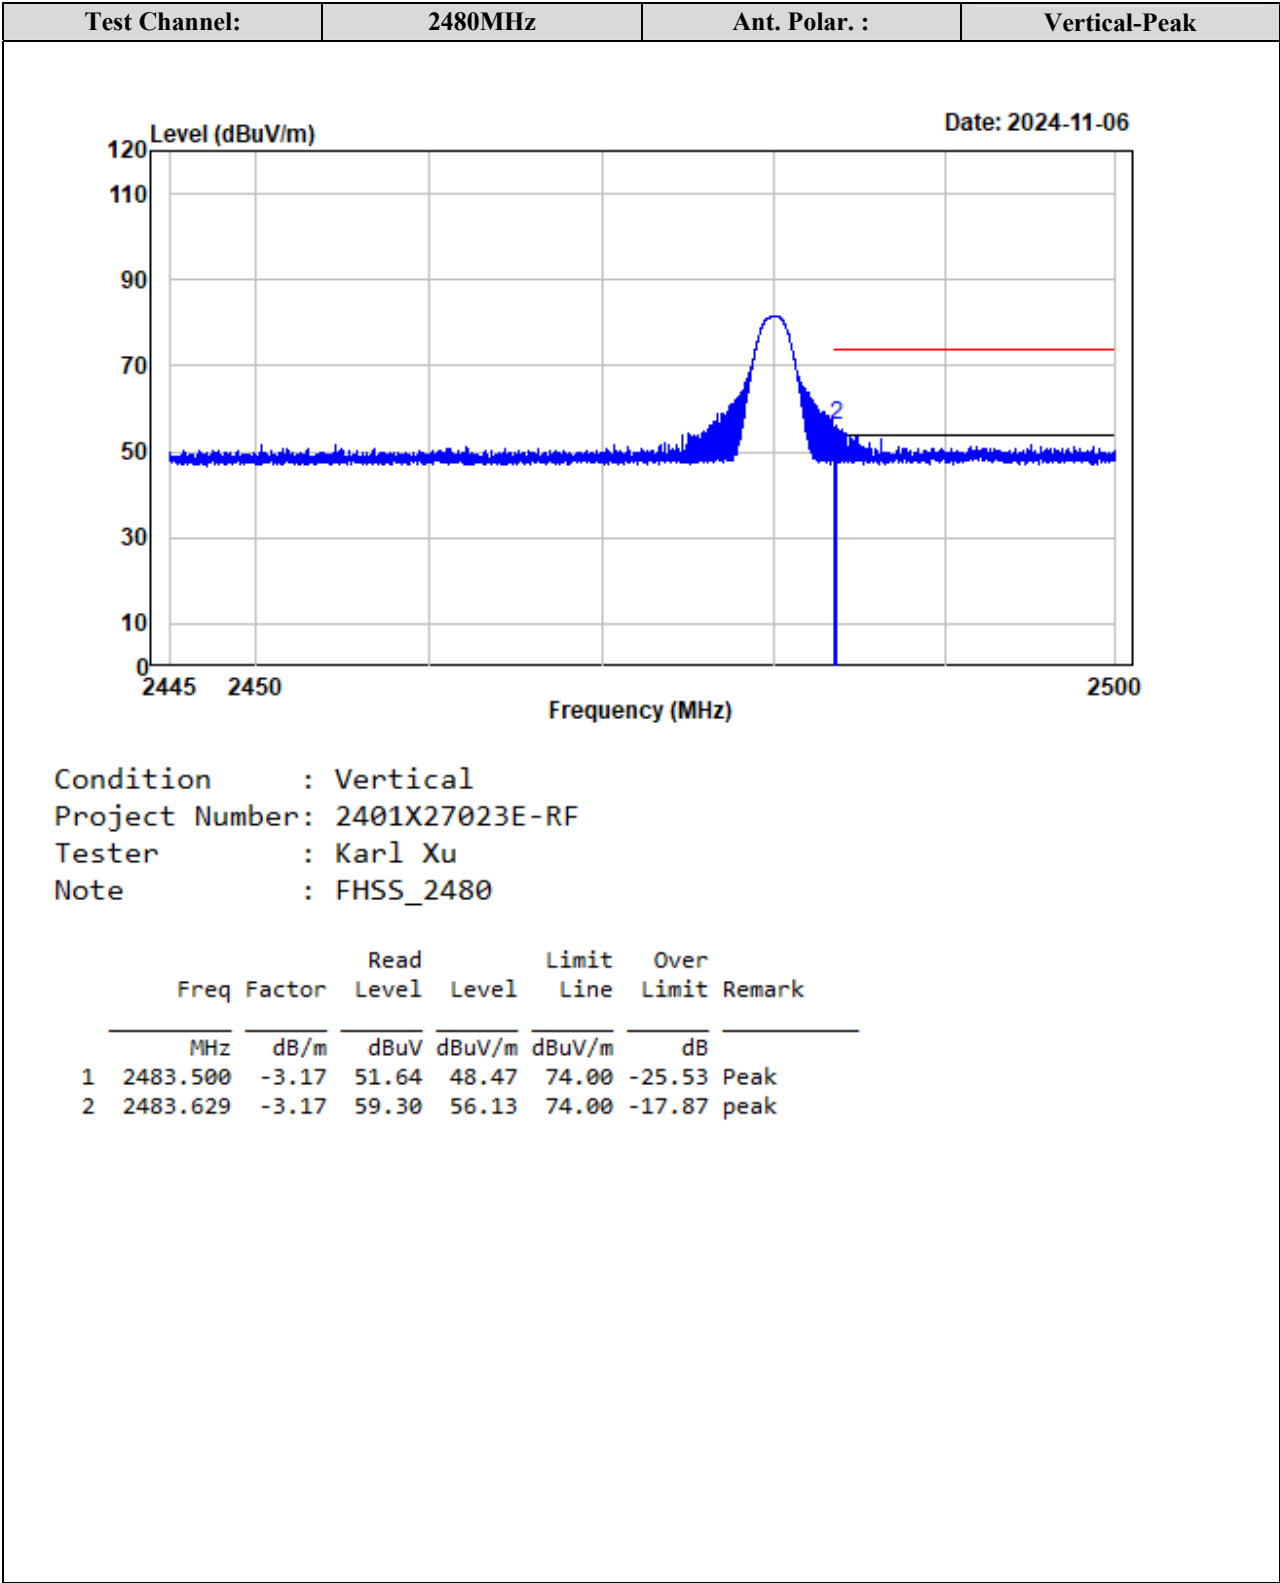


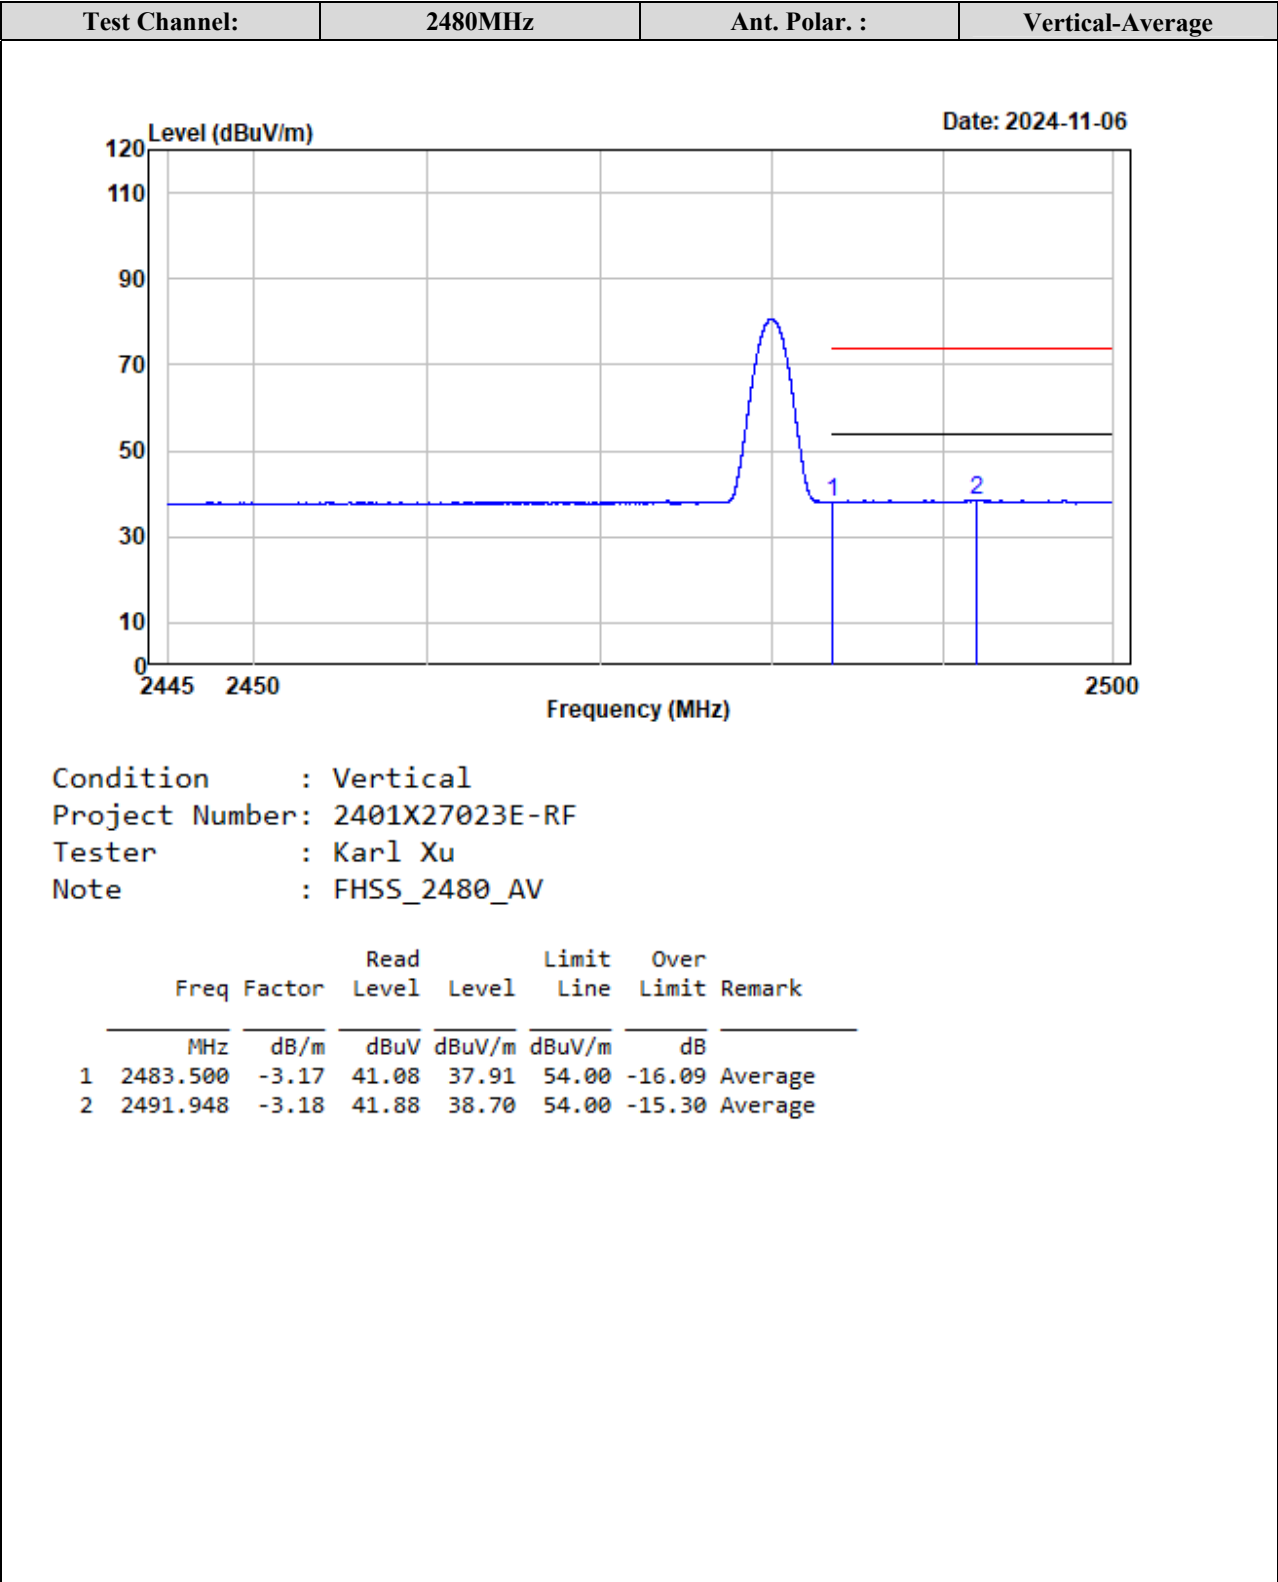



Note: Spectrum analyzer setting: RBW=1 MHz, VBW=5 kHz


Listed with the worst harmonic margin test plot:

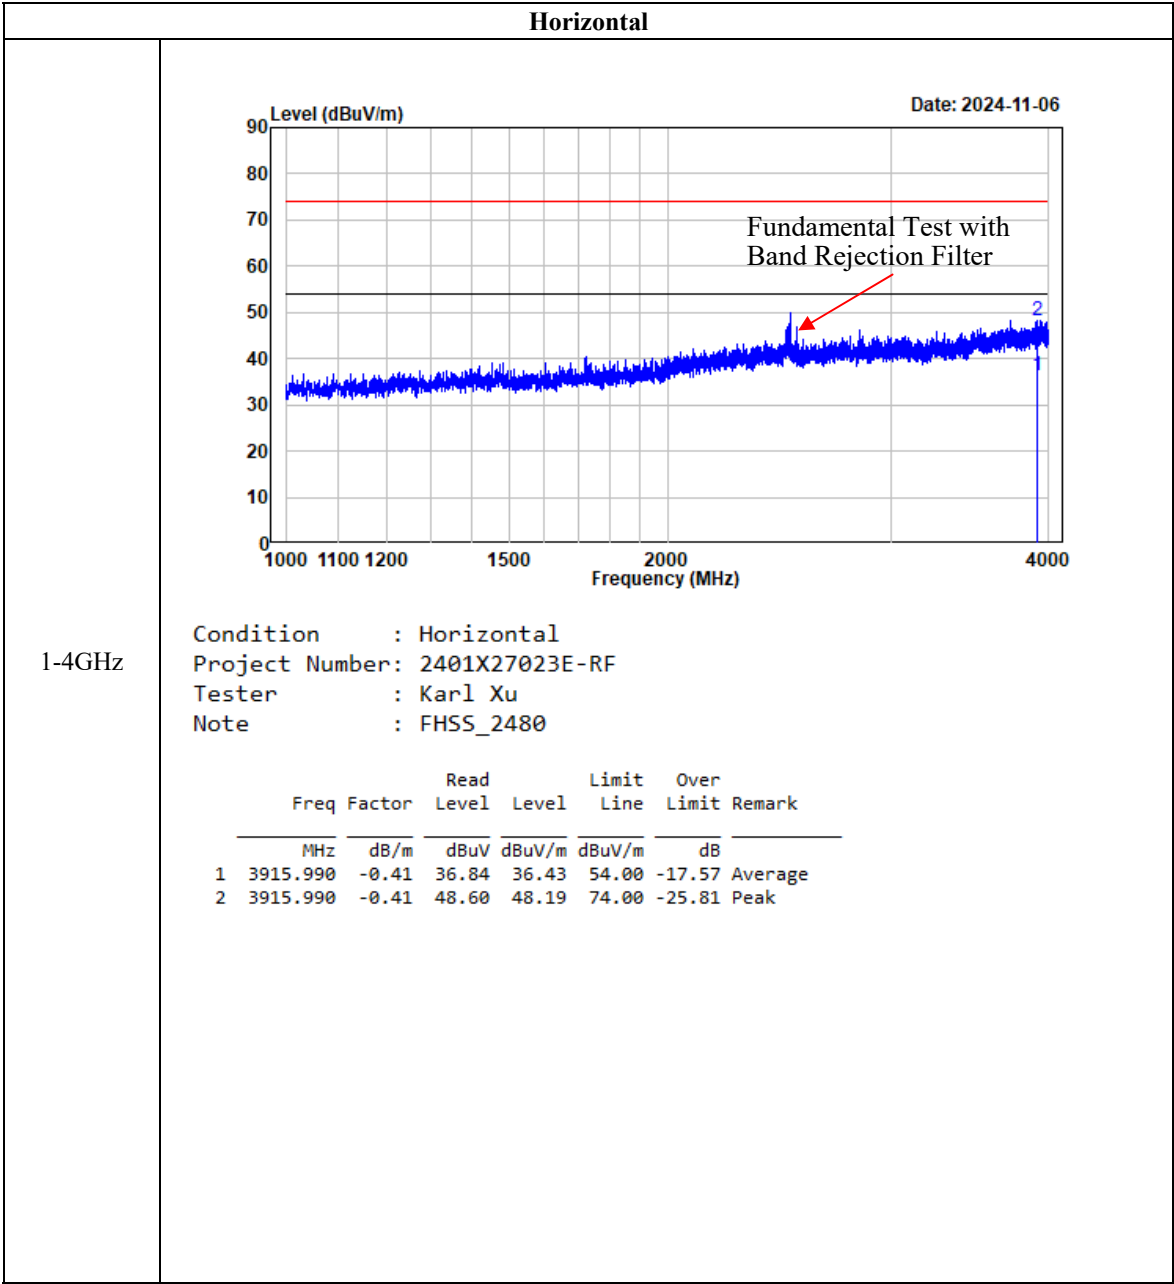


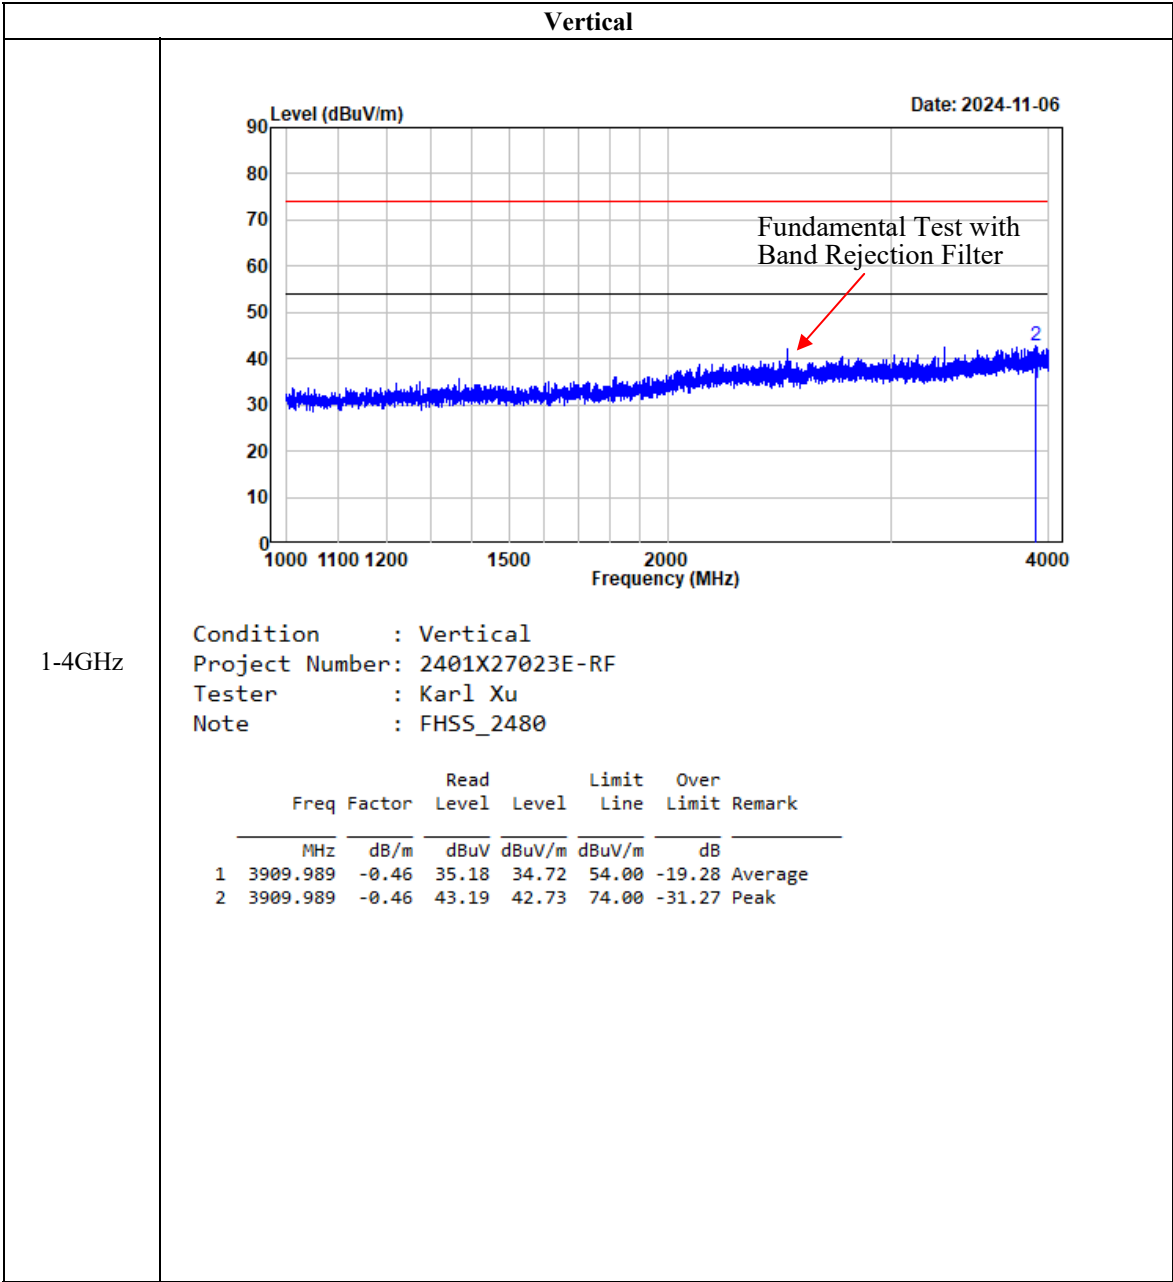


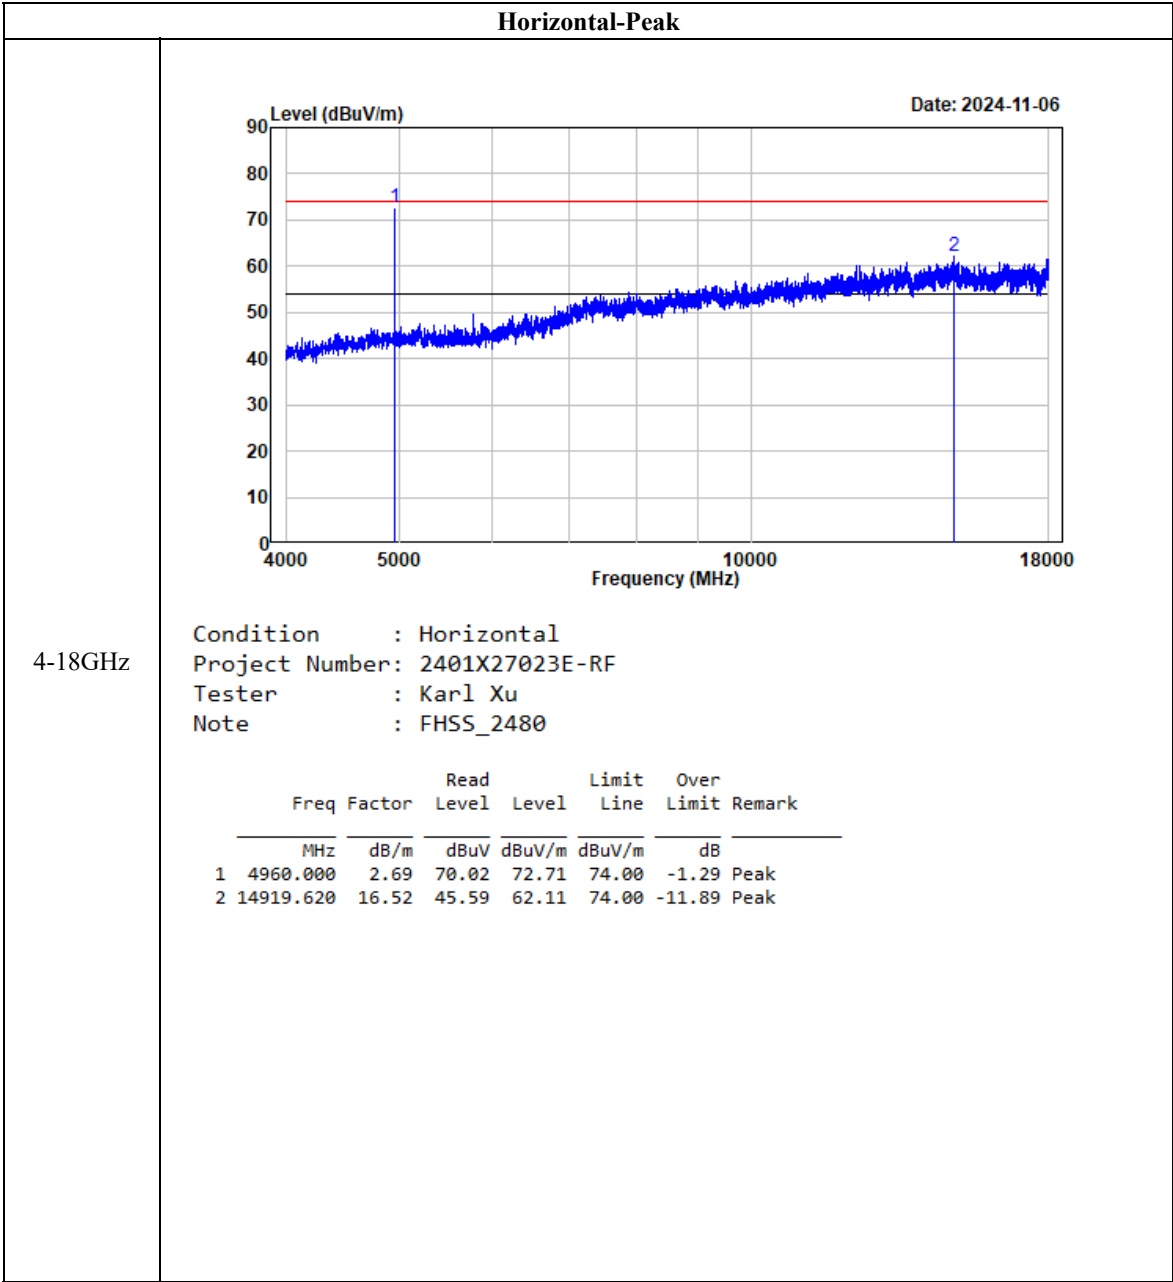


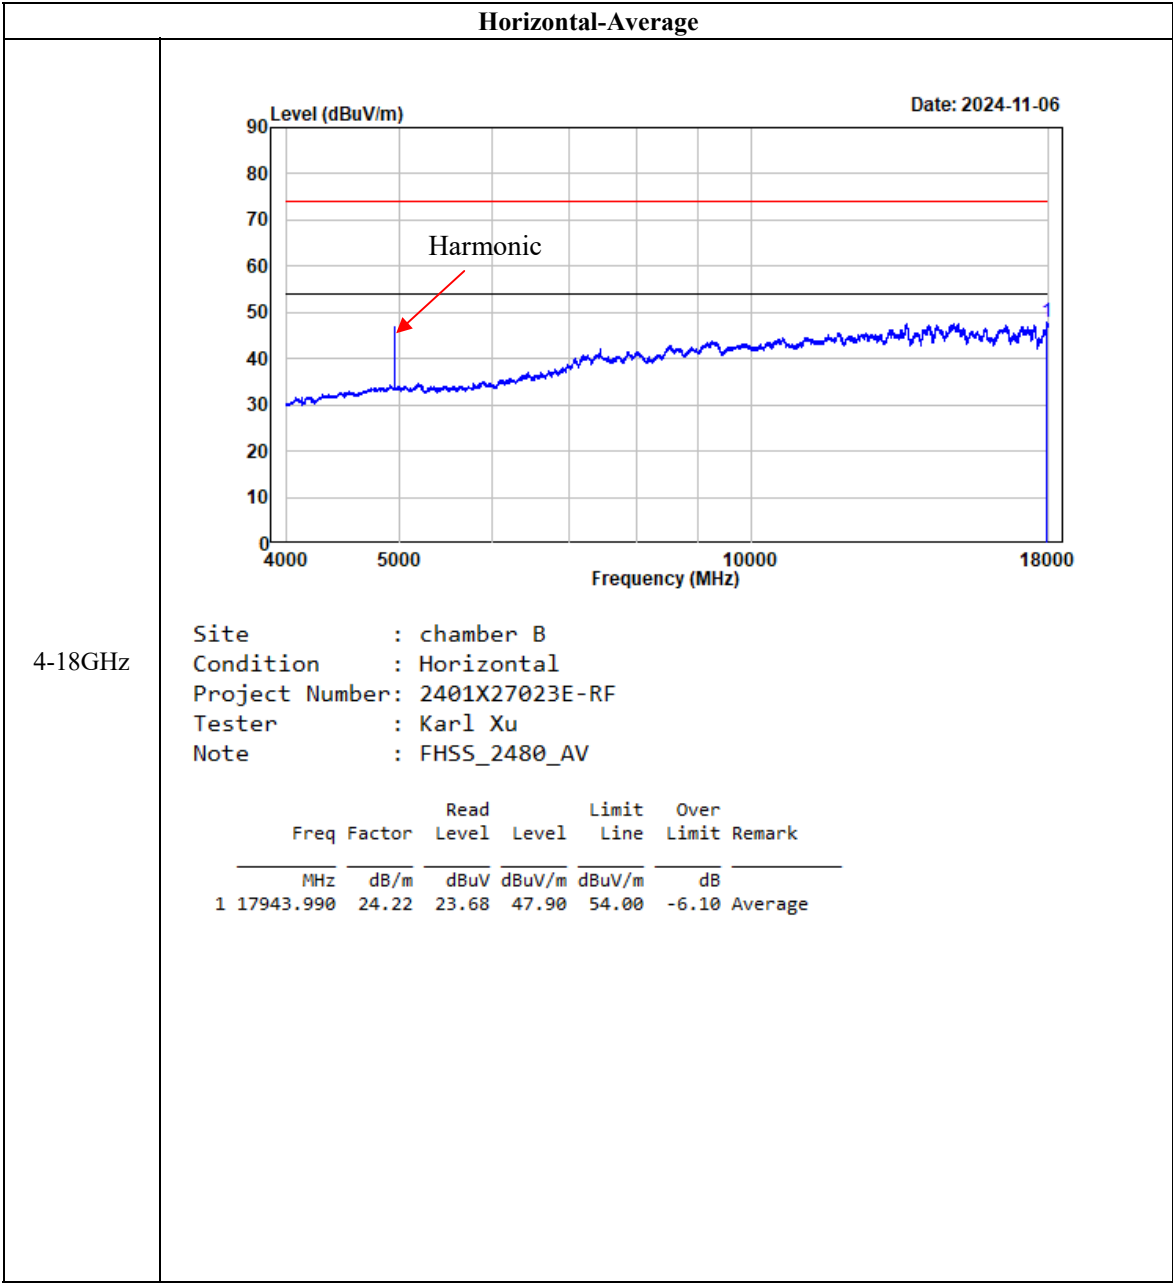

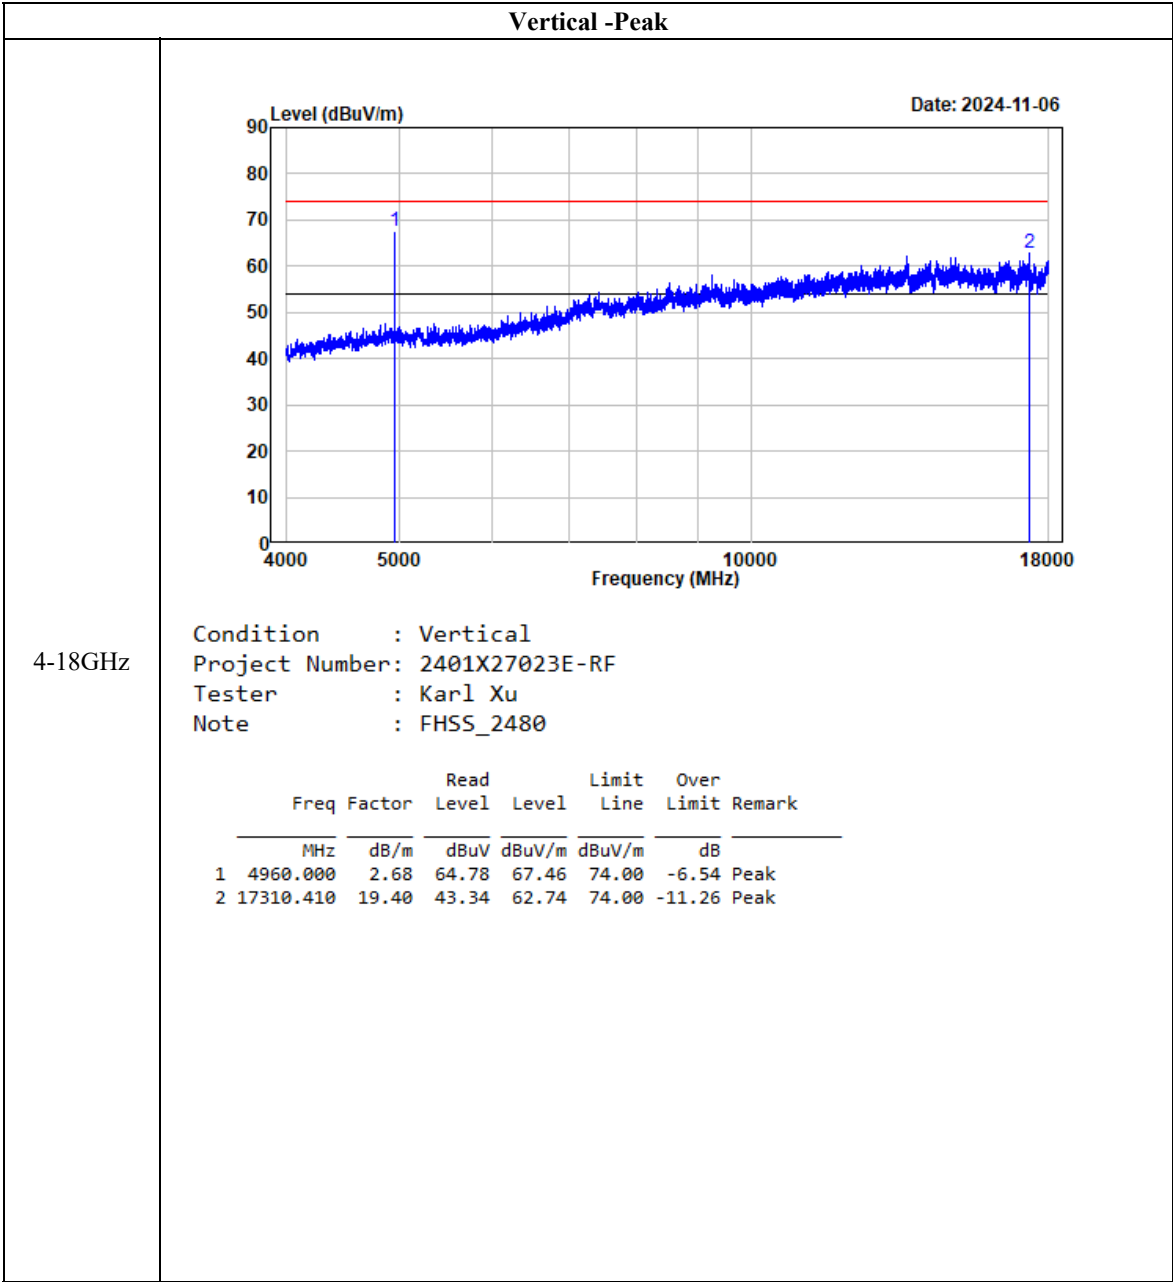

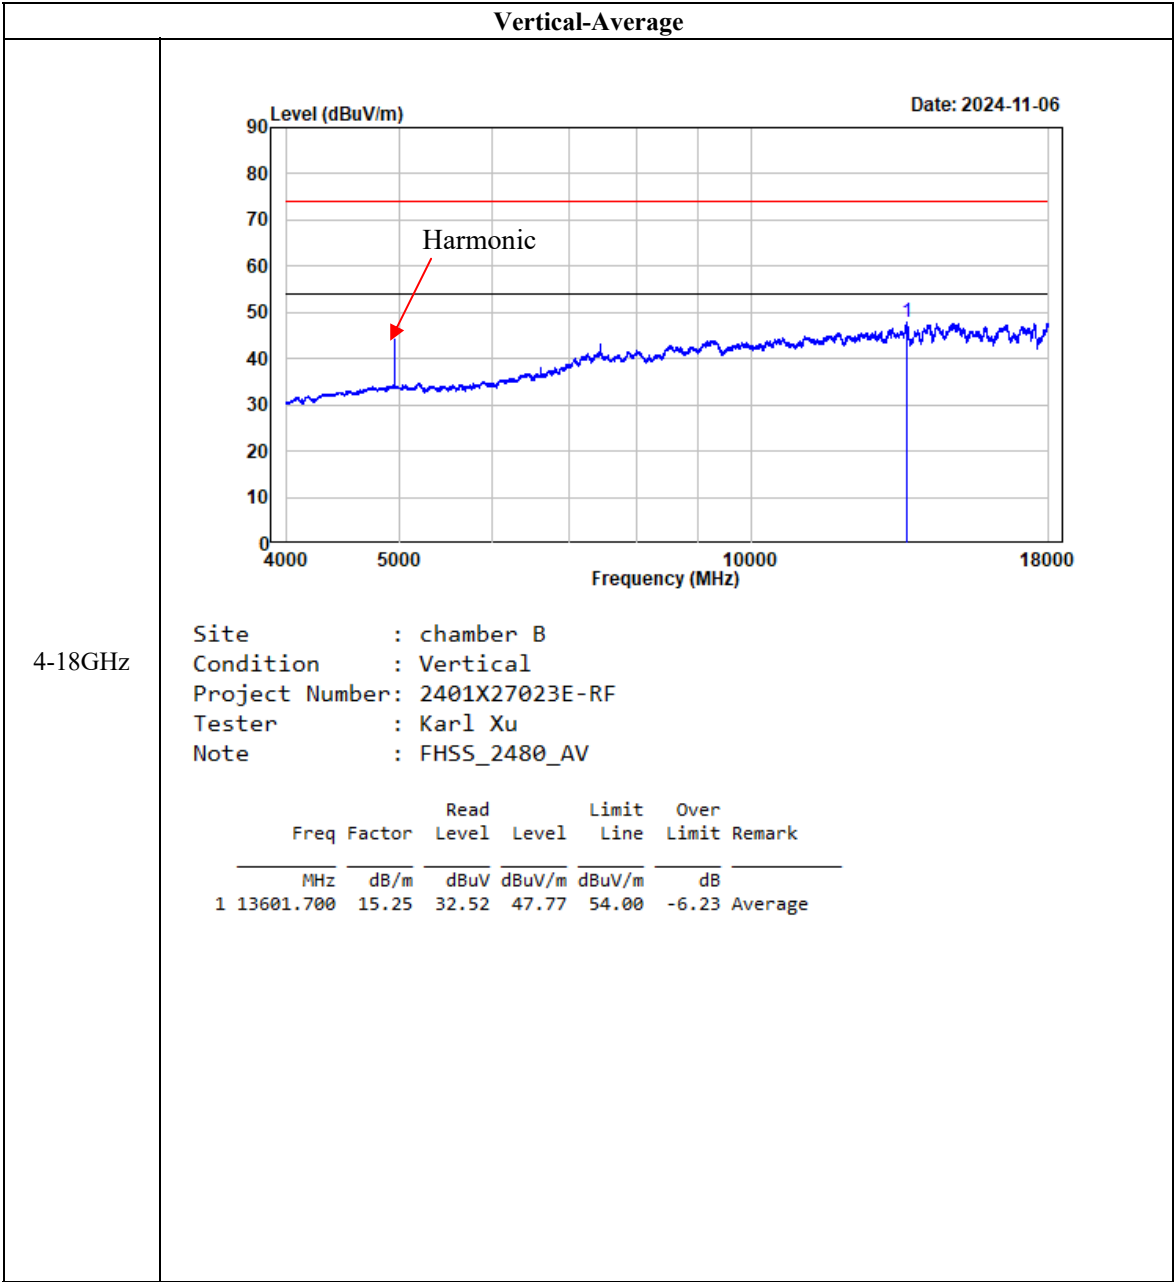

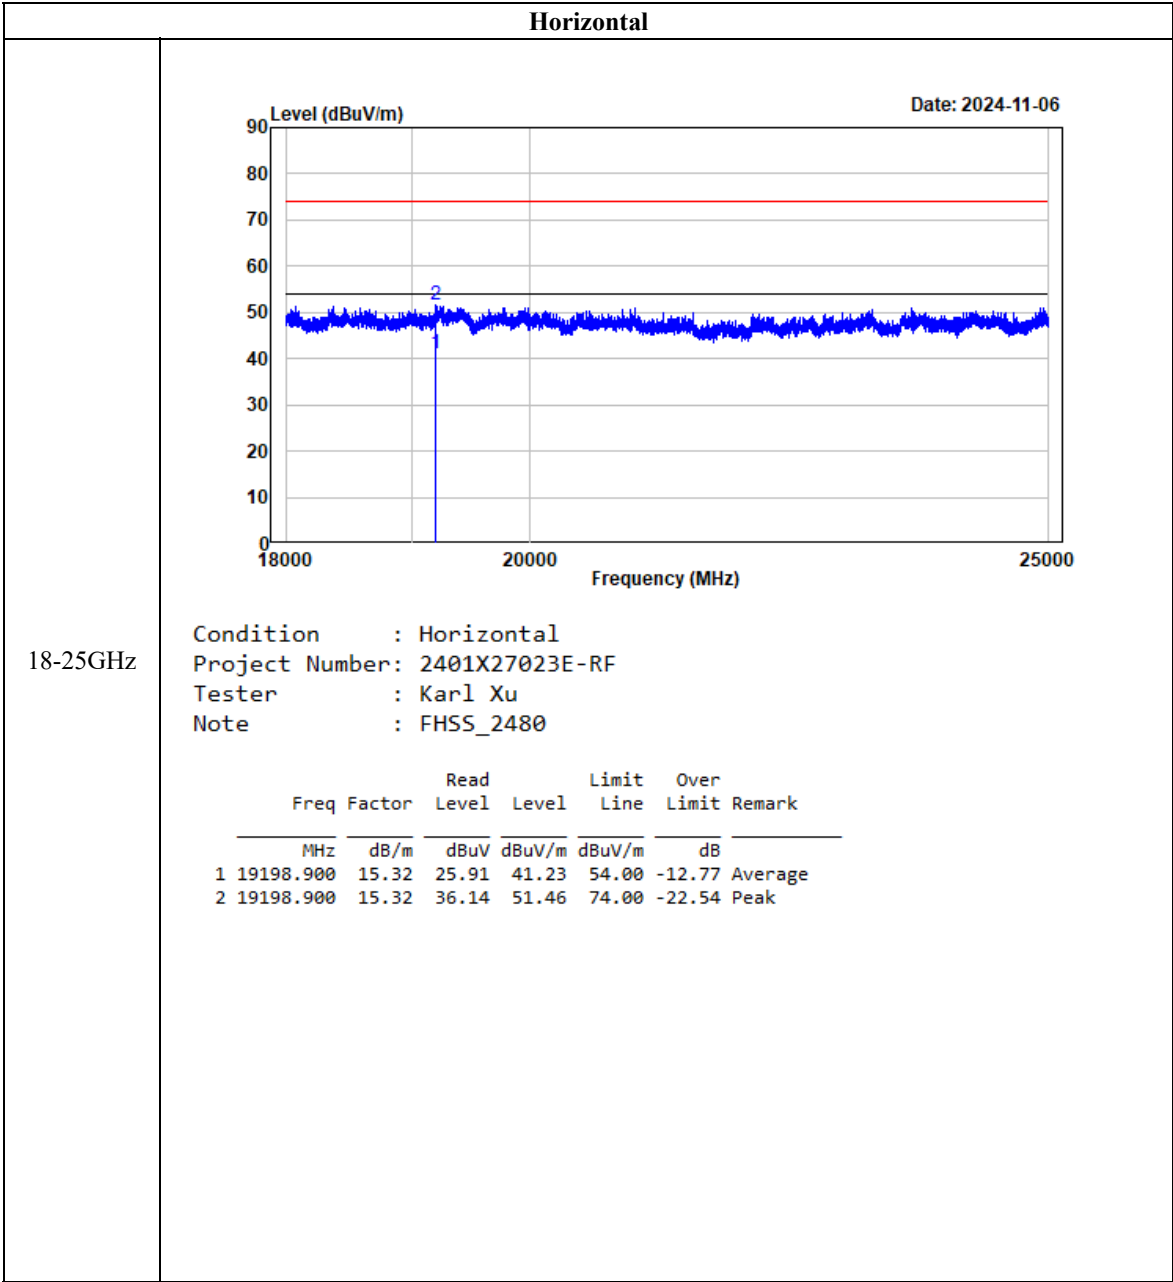

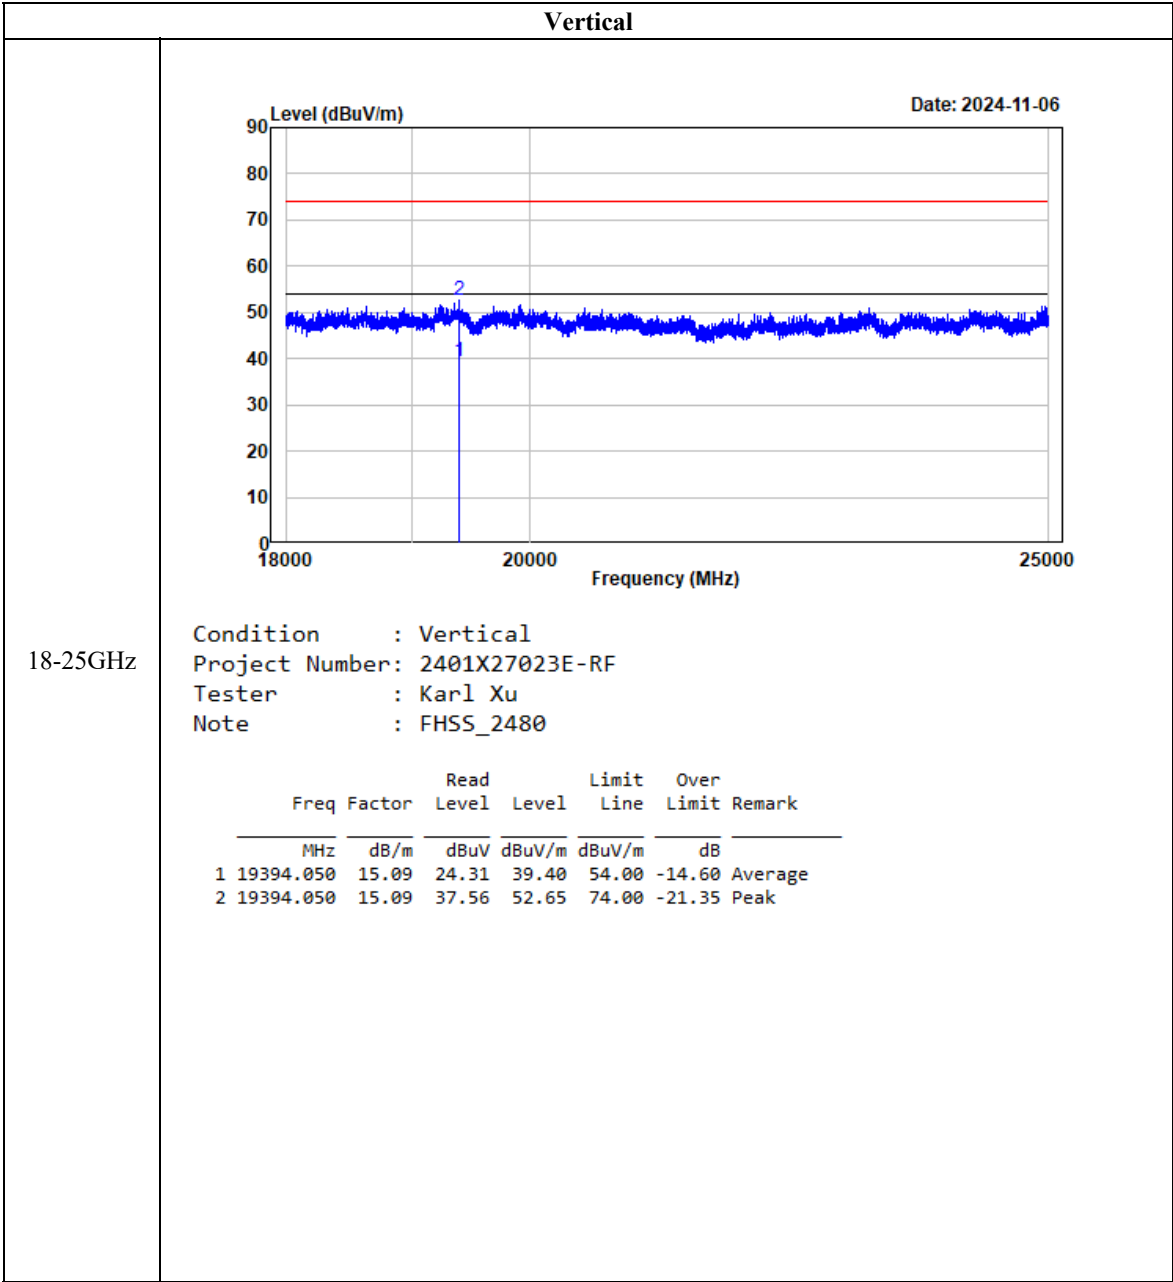

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined.

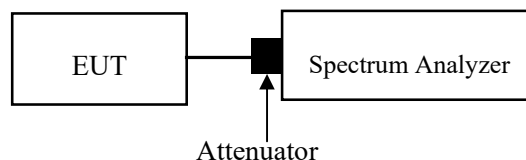

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101 kPa

The testing was performed by Rainbow Zhu on 2024-11-11.

EUT operation mode: Transmitting

Test Result: Compliant

Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
2441	1.000	0.774
The limit is the maximum 20dB bandwidth *2/3		

Please refer to the below plots:



FCC §15.247(a) (1) - 20dBEMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “–xx dB down” requirement; that is, if the requirement calls for measuring the –20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an un-modulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “–xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an un-modulated carrier, then turn the EUT modulation on, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “- xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “- xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

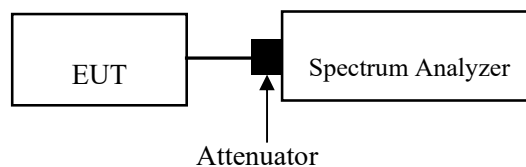

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101 kPa

The testing was performed by Rainbow Zhu on 2024-11-18.

EUT operation mode: Transmitting

Test Result: Compliant

Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	20 dB Emission Bandwidth (MHz)
GFSK	Low	2402	1.032	1.141
	Middle	2441	1.045	1.156
	High	2480	1.032	1.160

Please refer to the below plots:

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.

b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.


c) VBW \geq RBW.

d) Sweep: Auto.

e) Detector function: Peak.

f) Trace: Max hold.

It might prove necessary to break the span up into sub ranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels.

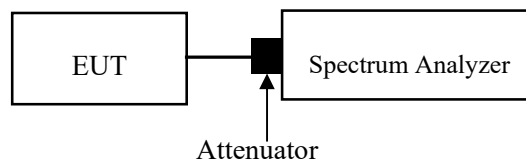**Test Data****Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Rainbow Zhu on 2024-10-24.

EUT operation mode: Transmitting

Test Result: Compliant

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
GFSK	2400-2483.5	79	≥15

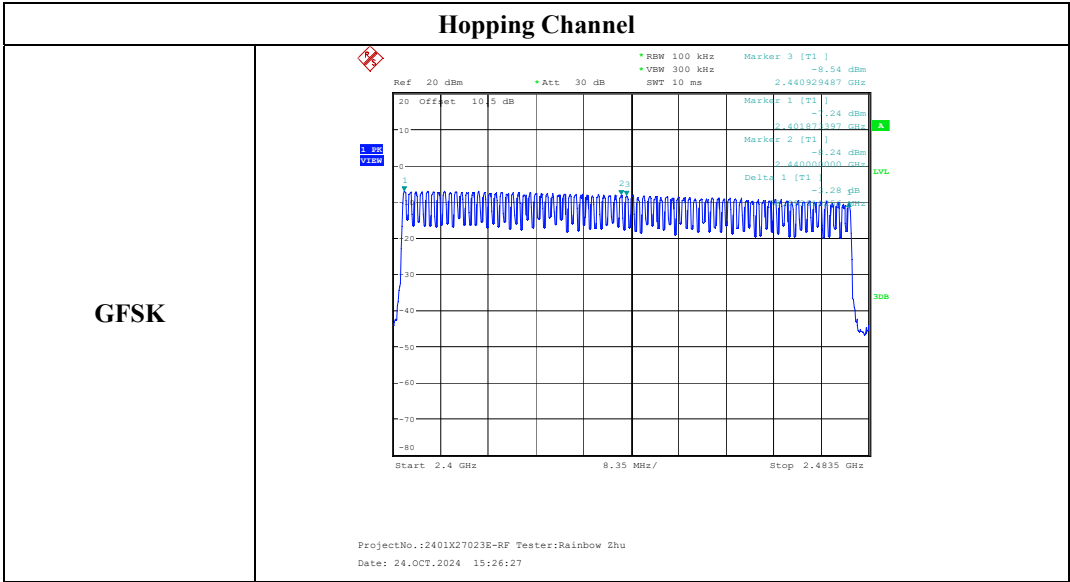


FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems (FHSs) in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

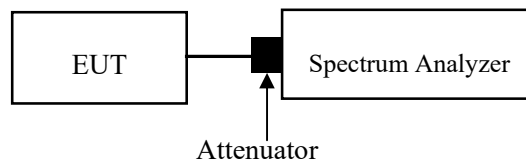**Test Data****Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	51 %
ATM Pressure:	101 kPa

The testing was performed by Rainbow Zhu on 2024-11-11.

EUT operation mode: Transmitting


Test Result: Compliant

Test Mode	Test Frequency (MHz)	Pulse width (ms)	Observation time (s)	Hopping Numbers in Observation time	Dwell Time (s)	Limit (s)
GFSK	2441	0.412	31.6	770	0.317	0.400

Note 1: Observation time= Hopping Channel Number× 0.4

Note 2: Dwell Time = Pulse width *Hopping Numbers in Observation time

Pulse Width



ProjectNo.: 2401X27023E-RF Tester:Rainbow Zhu
Date: 11.NOV.2024 06:07:35

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:


a) Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW \geq RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

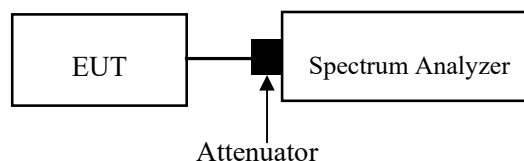

Test Data

Environmental Conditions

Temperature:	25~26 °C
Relative Humidity:	49~51 %
ATM Pressure:	101 kPa

The testing was performed by Rainbow Zhu on 2024-10-24 and 2024-11-11.

EUT operation mode: Transmitting

Test Result: Compliant

Mode	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
GFSK	Low	2402	-5.14	21
	Middle	2441	-5.60	21
	High	2480	-7.42	21

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard


According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

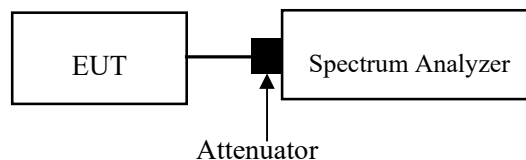

Test Data

Environmental Conditions


Temperature:	25°C
Relative Humidity:	49%
ATM Pressure:	101 kPa

The testing was performed by Rainbow Zhu on 2024-10-24.

EUT operation mode: Transmitting


Test Result: Compliant

**GFSK,
Left Side**



**GFSK,
Right Side**



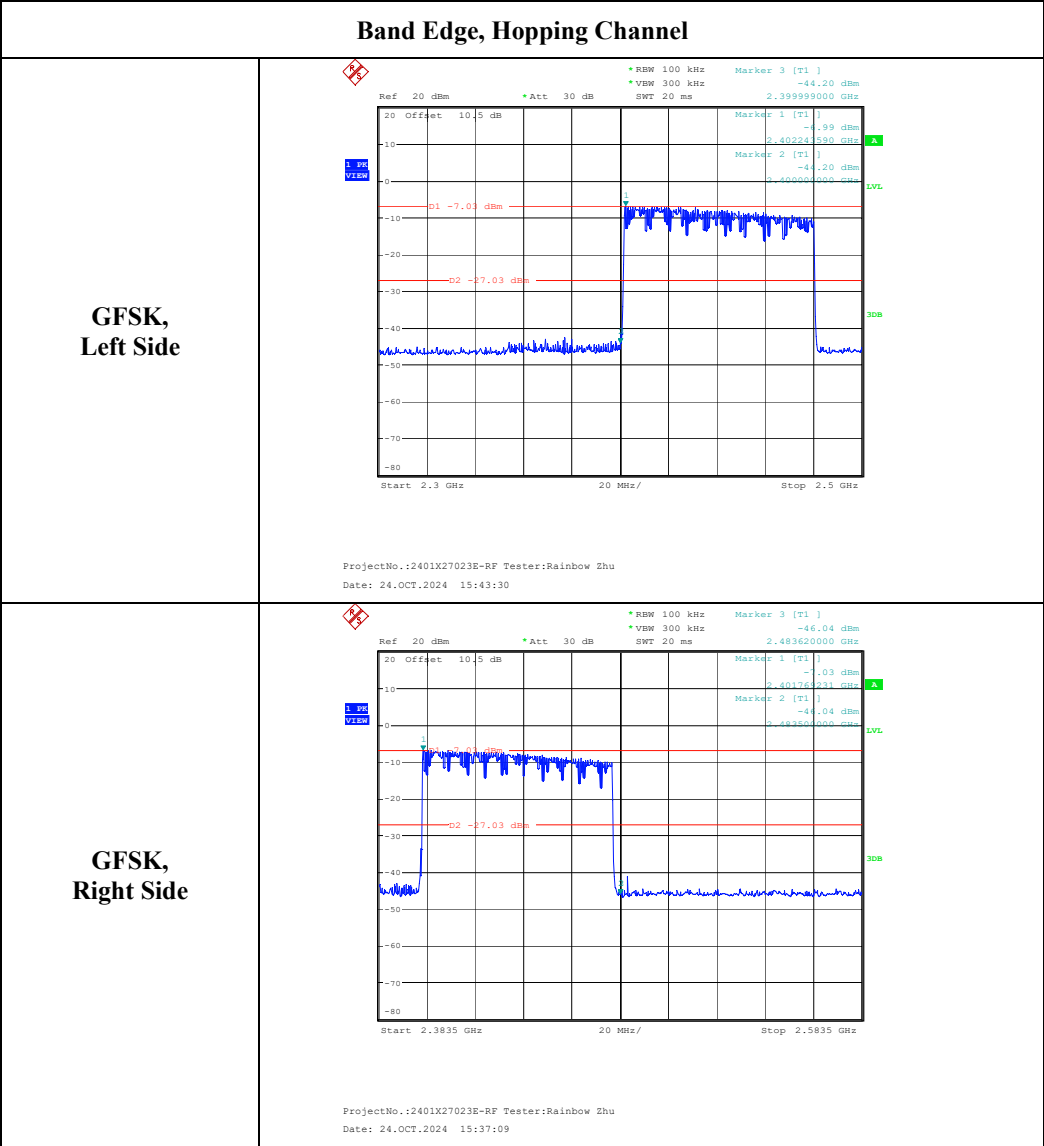

EUT PHOTOGRAPHS

Please refer to the attachment 2401X27023E-RF External photo and 2401X27023E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401X27023E-RF Test Setup photo.

******* END OF REPORT *******