

Test positions for body:

According to the antenna position, the Body-worn/hotspot SAR is tested at the following 6 test positions all with the distance =5mm between the EUT and the phantom bottom:



Figure 1-1 Front Side mode



Figure 1-2 Back Side mode



Figure 1-3 Left Side mode



Figure 1-4 Right Side mode







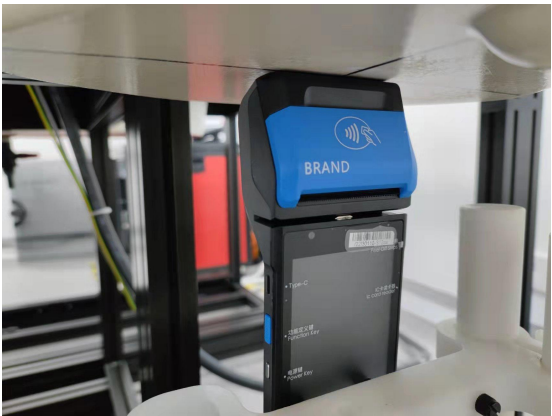

Figure 1-5 Top Side mode



Figure 1-6 Bottom Side mode

Test positions for Limb:

According to the antenna position, the limb SAR is tested at the following 6 test positions all with the distance =0mm between the EUT and the phantom bottom:

	
Figure 1-7 Front Side mode	Figure 1-8 Back Side mode
	
Figure 1-9 Left Side mode	Figure 1-10 Right Side mode
	
Figure 1-11 Top Side mode	Figure 1-12 Bottom Side mode

Test positions for sensor triggering minus 1 mm:

The sensor triggering minus 1 mm SAR is tested at the following 3 test positions with the distance =9&19mm between the EUT and the phantom bottom:

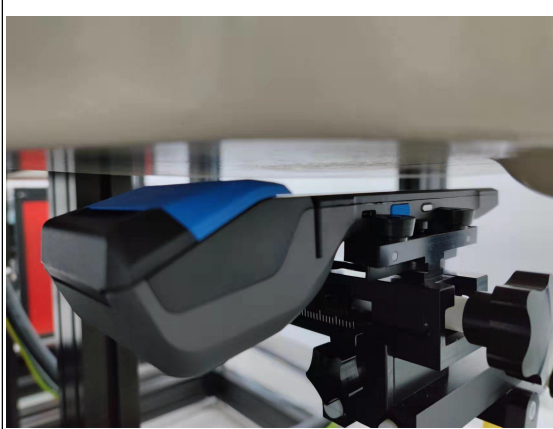


Figure 1-13 Front Side mode 9mm

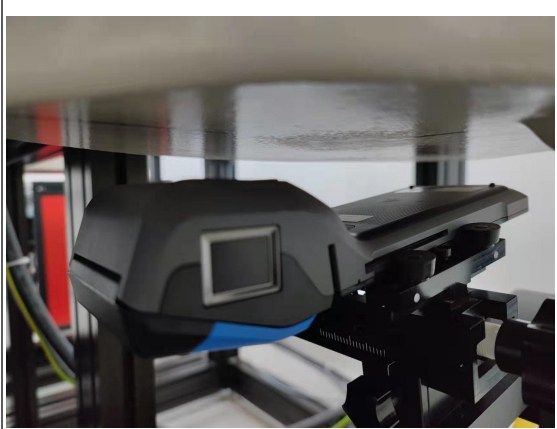


Figure 1-14 Back Side mode 19mm

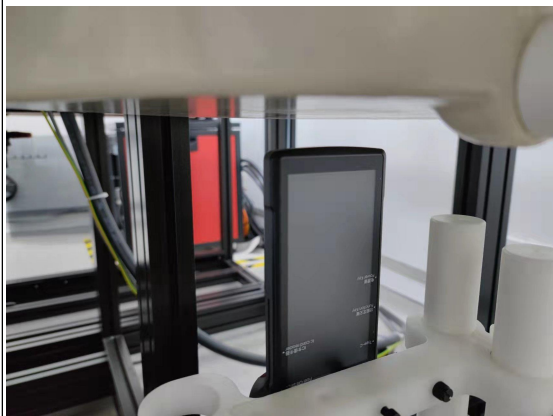


Figure 1-15 Bottom Side mode 19mm