


前面

55

后面

55 X 440 MM 80g 超白哑粉纸 黑白双面印刷 风琴折

Smart Knob

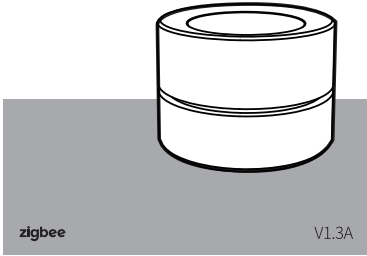


zigbeeV1.3A

Quick Guide

Remote Mode	
Single Press	On/Off
Long Press >3s	Set color
Rotate	Dimming
Press and Rotate	Set the color temperature
Remote control operate may vary depends on different model of smart light	

Scene Mode	
Single Press	Setting in APP
Double Clicks	Setting in APP
Long Press	Setting in APP
Rotate to left	Setting in APP
Rotate to right	Setting in APP

1 Dimension



2 Specification

Power supply: Battery CR2032 3V DC

Communication: Zigbee 3.0*

Control distance: 25m open area

Dimensions: 40 X 40 X 29mm


Operating temperature: -10 °C~45 °C

Working Humidity: <90%RH

Life of battery: 1 year (General use)

*Available for selected model

3 Install the battery

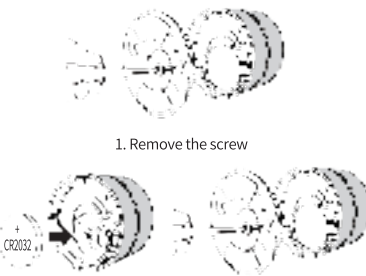

1. Remove the screw

2. Install the CR2032 battery

3. Install the cover

4 Remote mode

Scan the QR code to download APP



Gateway required to connect the device

5 Reset / Pairing



1. Hold "RESET" 6s


2. LED will start flashing

5.1 Add Device



55


5.2 Remote mode (Default operate mode)



5.3 Remote mode



First time to add smart light **MUST** press the button to activate memory



5.4 Remote mode

Control description under remote control mode



Single Press
On/Off



Rotate
Dimming



Press and Rotate
Set the color temperature



Long Press >3s
Set color


Note: The operates may different depending on the smart lights

5.5 Mode swap




Remote mode ↔ Scene mode

5.6 Scene mode



5.7 Scene mode



5.8 Scene mode



5.9 Scene mode

